

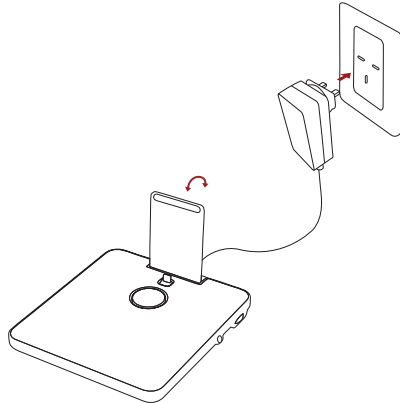
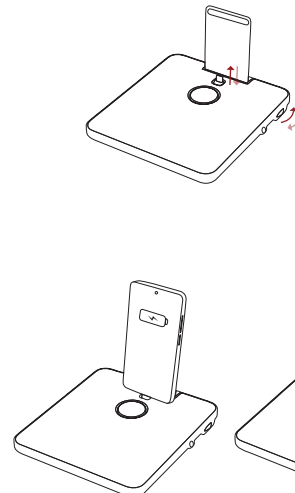
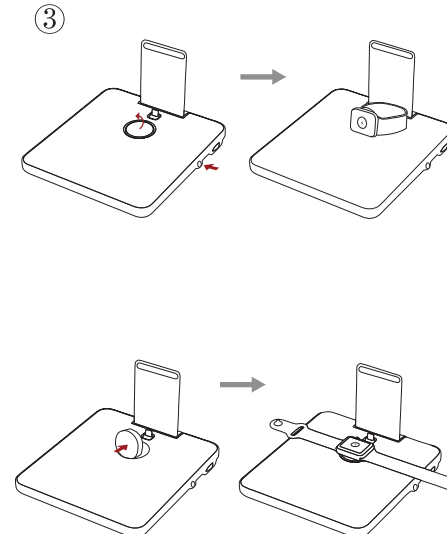

 Air Trio User Manual	Contents Welcome&Intro 1 Package Includes 2 Compatibility 3 Spec 4 Quick Guide 6 LED Light Indicator 9 Warranty10 Exclusions & Limitations11 Important11 Customer Service13 Legal13 FCC WARNING15 Welcome & Intro Thank you for purchasing the PITAKA Air Trio. The Air Trio is a 3-in-1 wireless charger that is powered through DC connector. It can charge phone, Apple Watch, iPad (Lightning or Type-C port) or other Qi-supported devices.	Package Includes 1. Air Trio *1 2. Adapter *1 3. Document Kit *1  	Compatibility <table><tr><th rowspan="2">Lightning Version</th><th colspan="2">phone</th><th rowspan="2">AirPods</th><th rowspan="2">iPad</th><th rowspan="2">Apple Watch</th></tr><tr><th>Deck Area</th><th>Terminal Area</th></tr><tr><td rowspan="2">Lightning Version</td><td rowspan="2">Made for: iPhone XS Max, iPhone XS, iPhone XR, iPhone 8 Plus, iPhone 8, iPhone 7 Plus, iPhone 7, iPhone SE, iPhone 6s Plus, iPhone 6s, iPhone 6, iPhone 5s, and other devices with Lightning port.</td><td>AirPods 1, AirPods 2</td><td>iPad Pro 10.5-inch, iPad Pro 12.9-inch (2nd Generation), iPad Pro 9.7-inch, iPad Pro 12.9-inch (1st Generation), iPad mini 4, iPad Air 2, iPad mini 3, iPad Air, iPad mini 2, iPad (6th generation), iPad (5th generation), iPod touch (6th generation).</td><td>Apple Watch Series 5, Apple Watch Series 4, Apple Watch Series 3, Apple Watch Series 2, Apple Watch Series 1, Apple Watch (1st generation).</td></tr><tr><td>Wireless devices that meet the standard of Qi2.4.</td><td>Devices that meet the standards of USB-IF TYPE C and USB PD.</td><td>AirPods 2, iPad Pro 12.9-inch, iPad Pro 11-inch.</td><td>Apple Watch Series 5, Apple Watch Series 4, Apple Watch Series 3, Apple Watch Series 2, Apple Watch Series 1, Apple Watch (1st generation).</td></tr></table>	Lightning Version	phone		AirPods	iPad	Apple Watch	Deck Area	Terminal Area	Lightning Version	Made for: iPhone XS Max, iPhone XS, iPhone XR, iPhone 8 Plus, iPhone 8, iPhone 7 Plus, iPhone 7, iPhone SE, iPhone 6s Plus, iPhone 6s, iPhone 6, iPhone 5s, and other devices with Lightning port.	AirPods 1, AirPods 2	iPad Pro 10.5-inch, iPad Pro 12.9-inch (2nd Generation), iPad Pro 9.7-inch, iPad Pro 12.9-inch (1st Generation), iPad mini 4, iPad Air 2, iPad mini 3, iPad Air, iPad mini 2, iPad (6th generation), iPad (5th generation), iPod touch (6th generation).	Apple Watch Series 5, Apple Watch Series 4, Apple Watch Series 3, Apple Watch Series 2, Apple Watch Series 1, Apple Watch (1st generation).	Wireless devices that meet the standard of Qi2.4.	Devices that meet the standards of USB-IF TYPE C and USB PD.	AirPods 2, iPad Pro 12.9-inch, iPad Pro 11-inch.	Apple Watch Series 5, Apple Watch Series 4, Apple Watch Series 3, Apple Watch Series 2, Apple Watch Series 1, Apple Watch (1st generation).	Spec Lightning Connector <table><tr><th>Items</th><th colspan="6">Specifications</th></tr><tr><td>Input Voltage</td><td colspan="6">15V</td></tr><tr><td>Input Current</td><td colspan="6">3.5A</td></tr><tr><td>Output Voltage</td><td>5V/9A</td><td>Lightning</td><td>5A</td><td colspan="3">5/7.5/9V</td></tr><tr><td>Output max. Current</td><td>3A/2A</td><td>(1.2A)</td><td>1A</td><td colspan="3" rowspan="12">1A</td></tr><tr><td>Output min. Current</td><td colspan="6">0A</td></tr><tr><td>Line Regulation</td><td colspan="6">± 1%</td></tr><tr><td>Output Voltage Tolerance</td><td colspan="6">± 5%</td></tr><tr><td>Short Circuit Protection</td><td colspan="6">Output shut down and auto restart</td></tr><tr><td>Over Load Protection</td><td colspan="6">Output shut down and auto restart</td></tr><tr><td>Over Voltage Protection</td><td colspan="6">Output shut down and auto restart</td></tr><tr><td>Over Temperature Protection</td><td colspan="6">Output shut down and auto restart</td></tr><tr><td>Ripple Voltage</td><td>150mV (p-p)</td><td colspan="5" rowspan="4">Input:(5V DC) Output:full load</td></tr></table>	Items	Specifications						Input Voltage	15V						Input Current	3.5A						Output Voltage	5V/9A	Lightning	5A	5/7.5/9V			Output max. Current	3A/2A	(1.2A)	1A	1A			Output min. Current	0A						Line Regulation	± 1%						Output Voltage Tolerance	± 5%						Short Circuit Protection	Output shut down and auto restart						Over Load Protection	Output shut down and auto restart						Over Voltage Protection	Output shut down and auto restart						Over Temperature Protection	Output shut down and auto restart						Ripple Voltage	150mV (p-p)	Input:(5V DC) Output:full load					Type-C Connector <table><tr><th>Items</th><th colspan="6">Specifications</th></tr><tr><td>Input Voltage</td><td colspan="6">15V</td></tr><tr><td>Input Current</td><td colspan="6">3.5A</td></tr><tr><td>Output Voltage</td><td>5V</td><td>9V</td><td>12V</td><td>TYPE C</td><td>5A</td><td>5/7.5/9V</td></tr><tr><td>Output max. Current</td><td>3A</td><td>2A</td><td>1.5A</td><td>(1.0A)</td><td>1A</td><td>Apple watch 1A</td></tr><tr><td>Output min. Current</td><td colspan="6">0A</td></tr><tr><td>Line Regulation</td><td colspan="6">± 1%</td></tr><tr><td>Output Voltage Tolerance</td><td colspan="6">± 5%</td></tr><tr><td>Short Circuit Protection</td><td colspan="6">Output shut down and auto restart</td></tr><tr><td>Over Load Protection</td><td colspan="6">Output shut down and auto restart</td></tr><tr><td>Over Voltage Protection</td><td colspan="6">Output shut down and auto restart</td></tr><tr><td>Over Temperature Protection</td><td colspan="6">Output shut down and auto restart</td></tr><tr><td>Ripple Voltage</td><td>150mV (p-p)</td><td colspan="5">Input:(5V DC) Output:full load</td></tr></table>	Items	Specifications						Input Voltage	15V						Input Current	3.5A						Output Voltage	5V	9V	12V	TYPE C	5A	5/7.5/9V	Output max. Current	3A	2A	1.5A	(1.0A)	1A	Apple watch 1A	Output min. Current	0A						Line Regulation	± 1%						Output Voltage Tolerance	± 5%						Short Circuit Protection	Output shut down and auto restart						Over Load Protection	Output shut down and auto restart						Over Voltage Protection	Output shut down and auto restart						Over Temperature Protection	Output shut down and auto restart						Ripple Voltage	150mV (p-p)	Input:(5V DC) Output:full load					Quick Guide    
Lightning Version	phone		AirPods		iPad	Apple Watch																																																																																																																																																																																																							
	Deck Area	Terminal Area																																																																																																																																																																																																											
Lightning Version	Made for: iPhone XS Max, iPhone XS, iPhone XR, iPhone 8 Plus, iPhone 8, iPhone 7 Plus, iPhone 7, iPhone SE, iPhone 6s Plus, iPhone 6s, iPhone 6, iPhone 5s, and other devices with Lightning port.	AirPods 1, AirPods 2	iPad Pro 10.5-inch, iPad Pro 12.9-inch (2nd Generation), iPad Pro 9.7-inch, iPad Pro 12.9-inch (1st Generation), iPad mini 4, iPad Air 2, iPad mini 3, iPad Air, iPad mini 2, iPad (6th generation), iPad (5th generation), iPod touch (6th generation).	Apple Watch Series 5, Apple Watch Series 4, Apple Watch Series 3, Apple Watch Series 2, Apple Watch Series 1, Apple Watch (1st generation).																																																																																																																																																																																																									
		Wireless devices that meet the standard of Qi2.4.	Devices that meet the standards of USB-IF TYPE C and USB PD.	AirPods 2, iPad Pro 12.9-inch, iPad Pro 11-inch.	Apple Watch Series 5, Apple Watch Series 4, Apple Watch Series 3, Apple Watch Series 2, Apple Watch Series 1, Apple Watch (1st generation).																																																																																																																																																																																																								
Items	Specifications																																																																																																																																																																																																												
Input Voltage	15V																																																																																																																																																																																																												
Input Current	3.5A																																																																																																																																																																																																												
Output Voltage	5V/9A	Lightning	5A	5/7.5/9V																																																																																																																																																																																																									
Output max. Current	3A/2A	(1.2A)	1A	1A																																																																																																																																																																																																									
Output min. Current	0A																																																																																																																																																																																																												
Line Regulation	± 1%																																																																																																																																																																																																												
Output Voltage Tolerance	± 5%																																																																																																																																																																																																												
Short Circuit Protection	Output shut down and auto restart																																																																																																																																																																																																												
Over Load Protection	Output shut down and auto restart																																																																																																																																																																																																												
Over Voltage Protection	Output shut down and auto restart																																																																																																																																																																																																												
Over Temperature Protection	Output shut down and auto restart																																																																																																																																																																																																												
Ripple Voltage	150mV (p-p)	Input:(5V DC) Output:full load																																																																																																																																																																																																											
Items	Specifications																																																																																																																																																																																																												
Input Voltage	15V																																																																																																																																																																																																												
Input Current	3.5A																																																																																																																																																																																																												
Output Voltage	5V	9V	12V	TYPE C	5A	5/7.5/9V																																																																																																																																																																																																							
Output max. Current	3A	2A	1.5A	(1.0A)	1A	Apple watch 1A																																																																																																																																																																																																							
Output min. Current	0A																																																																																																																																																																																																												
Line Regulation	± 1%																																																																																																																																																																																																												
Output Voltage Tolerance	± 5%																																																																																																																																																																																																												
Short Circuit Protection	Output shut down and auto restart																																																																																																																																																																																																												
Over Load Protection	Output shut down and auto restart																																																																																																																																																																																																												
Over Voltage Protection	Output shut down and auto restart																																																																																																																																																																																																												
Over Temperature Protection	Output shut down and auto restart																																																																																																																																																																																																												
Ripple Voltage	150mV (p-p)	Input:(5V DC) Output:full load																																																																																																																																																																																																											

LED Light Indicators	
Working Conditions	LED Indicator
Power on	The red and white indicators alternately flash for about 2 seconds, then the red light is off, and the white light is on.
Charge devices	The white light flashes once a second.
Overheat protection	The red light flashes every 0.5 second.
Foreign object debris	Red light is always on.
Overcurrent short circuit protection	Red light flashes every 2 seconds.
Overvoltage /undervoltage protection	The white light flashes once a second.
Other indicator: LED indicator is in strong light when it's light in the surrounding environment, the LED indicator is in low light when it's dim.	

9

Warranty	
At PITAKA, we are always striving to provide our customers with the best quality products. The PITAKA Air Trio is warrantied for 12 months from the date of purchase.	
The Air Trio is warranted to be free defects in materials and function under normal use. A defect is defined as an imperfection or flaw that is produced by a manufacturing error, including malfunction of the wireless charging or surface defects etc.	
The warranty is non-transferable and covers the original end-user purchaser. PITAKA will only authorize the warranty claim if the products were purchased from an official store or an authorized dealer. For full details regarding warranty terms and exclusions, please visit: ipitaka.com/pages/shipping-warranty.	
MODIFICATION: Any changes or modifications of this device could void the warranty.	
Exclusions & Limitations	
Except for the limited warranty expressly set forth or to the extent restricted or prohibited by applicable law, PITAKA expressly disclaims any and all other warranties express or implied, including any warranty of quality, merchant ability, or fitness for a particular purpose, and you specifically agree that PITAKA shall not be liable for any special, incidental, indirect, punitive, or consequential damages of any type on any PITAKA product. In addition to and without limiting the generality of the foregoing disclaimers, the limited warranty does not, under any circumstances, cover the replacement or cost of any electronic device or personal property inside or outside of the PITAKA product.	
Important!	
1. Please use the AC adapter included in the package to charge. If you are using a third-party adapter, please check and confirm whether the voltage is within the applicable range.	
2. Do not keep the Air Trio in a high-temperature environment, including heat caused by intense sunlight or other forms of heat. Do not place it in fire or other excessively hot environments.	
3. Do not disassemble the Air Trio or attempt to modify it in any way.	
4. Do not attempt to power the Air Trio with any connection other than the Type-C connector.	
5. Do not attempt to replace any part of the Air Trio.	
6. All parts have gone through a thorough quality assurance inspection. If you find that your Air Trio is excessively hot, is emitting odor, is deformed, abraded or is experiencing or demonstrating an abnormal phenomenon, immediately stop all product use and contact manufacturer.	
7. If this Air Trio is intended by the purchaser to be used by a minor, purchasing adult agrees to provide detailed instructions and warnings to any minor prior to use. Failure to do so is the sole responsibility of the purchaser, who agrees to indemnify manufacturer for any unintended use/misuse by a minor.	
Customer Service	
Tel: +852 9202 6223	
Email: support@ipitaka.com	
Web: www.ipitaka.com	
Legal	
iPhone, Apple Watch are trademarks of Apple Inc. in the US and other countries.	
The 'Qi' symbol is a trademark of the Wireless Power Consortium. All associated logos and distinctive designs are the property of PITAKA and should be protected under design, trademark and other trade dress regulations.	
This product is meant for use only in conjunction with the appropriate device and the steps laid out in this manual. Please consult your device packaging to determine whether this product is compatible with your particular device.	
The manufacturer is not responsible for any damages to any device incurred through the use of this product. The manufacturer shall not, in any way, be liable to you or to any third party for any damages you or any third party may suffer as a result of use, intended or unintended, or misuse of this product in conjunction with any device or accessory other than the appropriate device for which this product is designed. The manufacturer will not be responsible for any damages you or any third party may suffer as a result of misuse of this product as outlined above.	
The purchaser agrees to defend, indemnify, and hold the manufacturer harmless for any claims or damages arising from unintended use or misuse, including use with an un-intended device.	
FCC WARNING	
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.	
Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.	
NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.	
If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: -- Reorient or relocate the receiving antenna. -- Increase the separation between the equipment and receiver. -- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. -- Consult the dealer or an experienced radio/TV technician for help.	
To maintain compliance with FCC' s RF Exposure guidelines, this equipment should be installed and operated with minimum distance between 20cm the radiator your body. Use only the supplied antenna.	
FCC ID: 2ARI5-AT1004C	

10

11

12

13

14

15

16