Appendix A
RF Test Data for BT(BDR/EDR) (Conducted Measurement)

Product Name: Smart phone

Trade Mark: N/A

Test Model: K58

FCC ID: 2APX7K58

Environmental Conditions

Temperature:	23.8℃
Relative Humidity:	58%
ATM Pressure:	100.0 kPa
Test Engineer:	Nancy Li
Supervised by:	Hugo Chen

Appendix A: 20dB Emission Bandwidth

Test Result

TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.894	2401.535	2402.429	---	PASS
		2441	0.942	2440.535	2441.477	---	PASS
		2480	0.942	2479.535	2480.477	---	PASS
2DH5	Ant1	2402	1.317	2401.337	2402.654	---	PASS
		2441	1.311	2440.340	2441.651	---	PASS
		2480	1.323	2479.337	2480.660	---	PASS
3DH5	Ant1	2402	1.308	2401.346	2402.654	---	PASS
		2441	1.302	2440.343	2441.645	---	PASS
		2480	1.275	2479.352	2480.627	---	PASS

Test Graphs

DH5_Ant1_2402

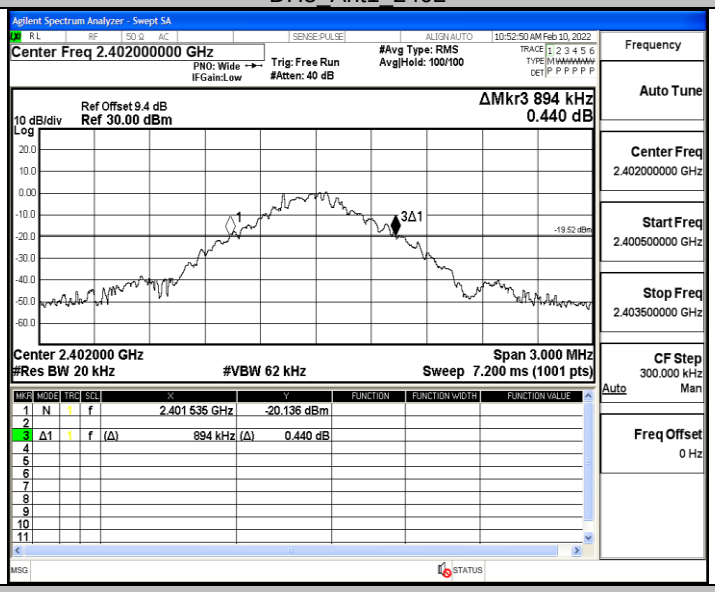

DH5_Ant1_2441

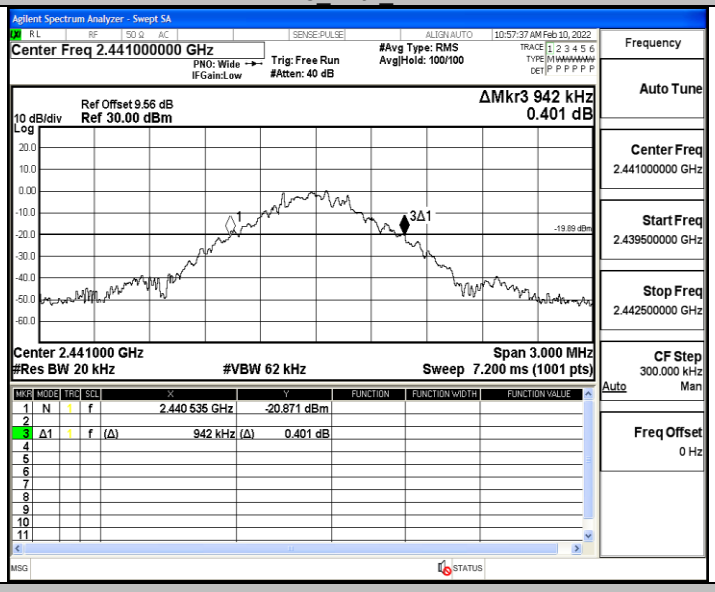

DH5_Ant1_2480

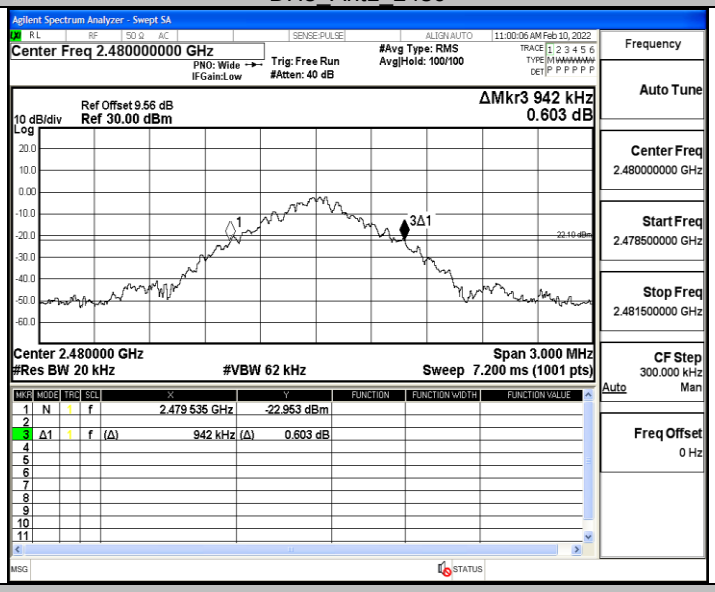

2DH5_Ant1_2402

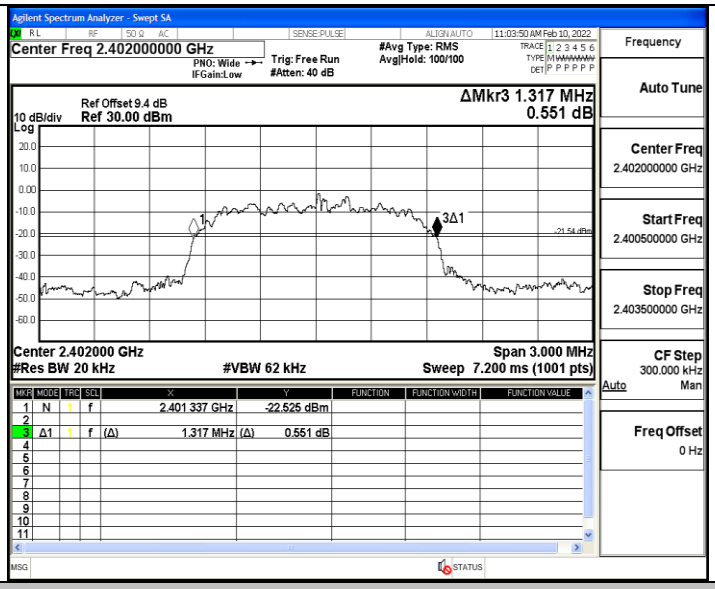

2DH5_Ant1_2441

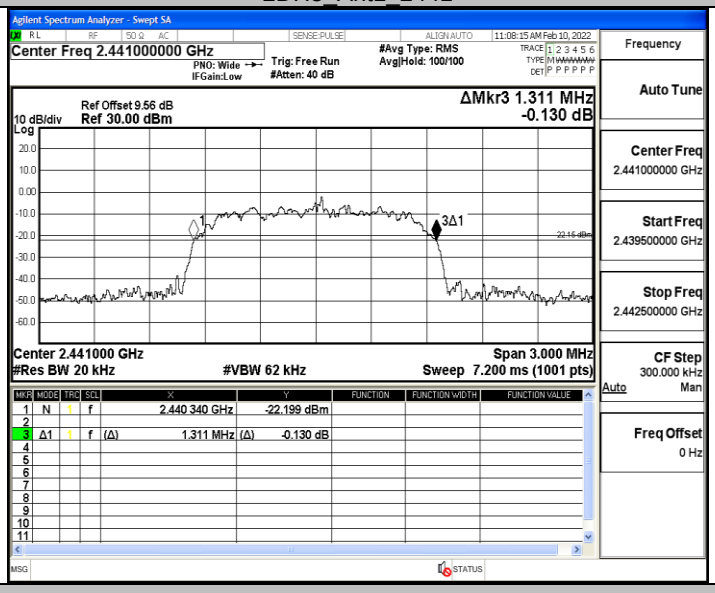

2DH5_Ant1_2480

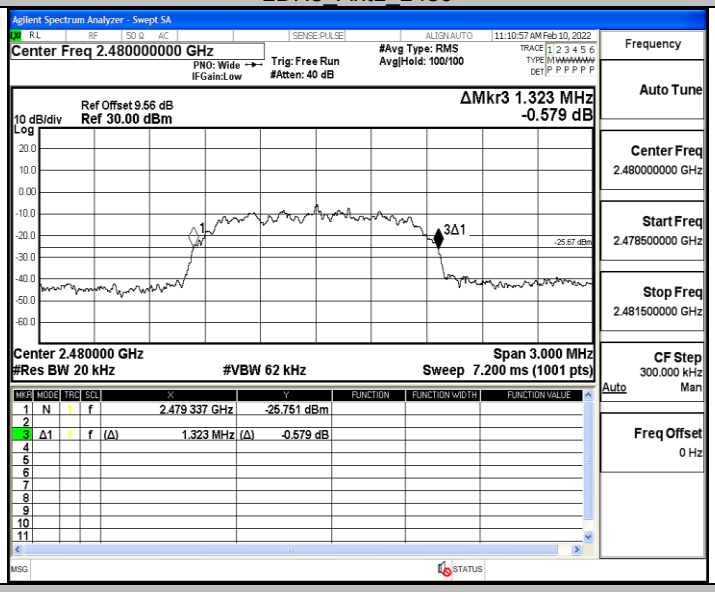

3DH5_Ant1_2402

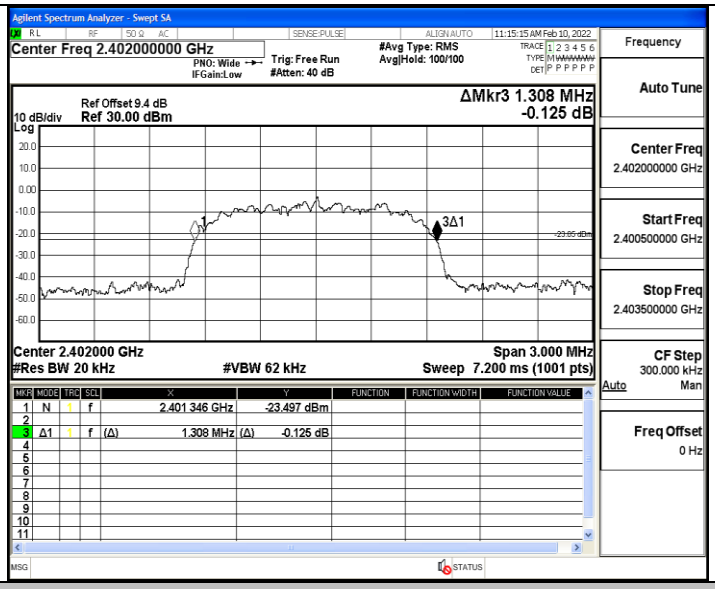

3DH5_Ant1_2441

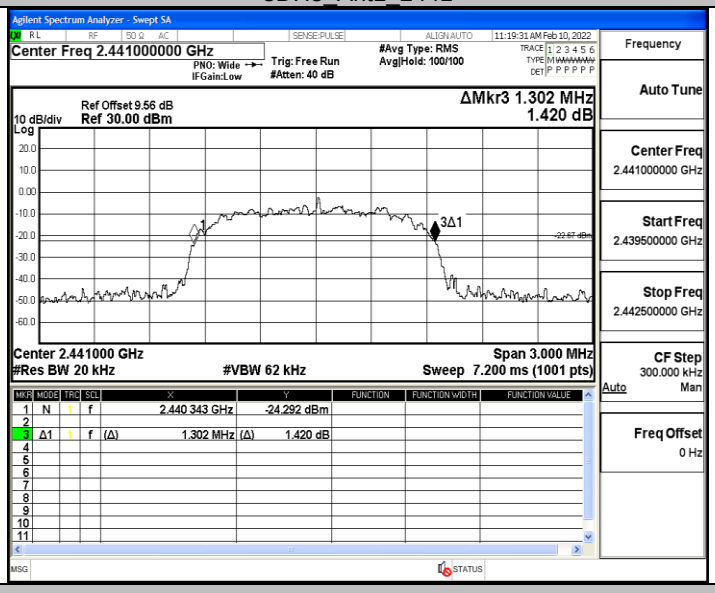

3DH5_Ant1_2480

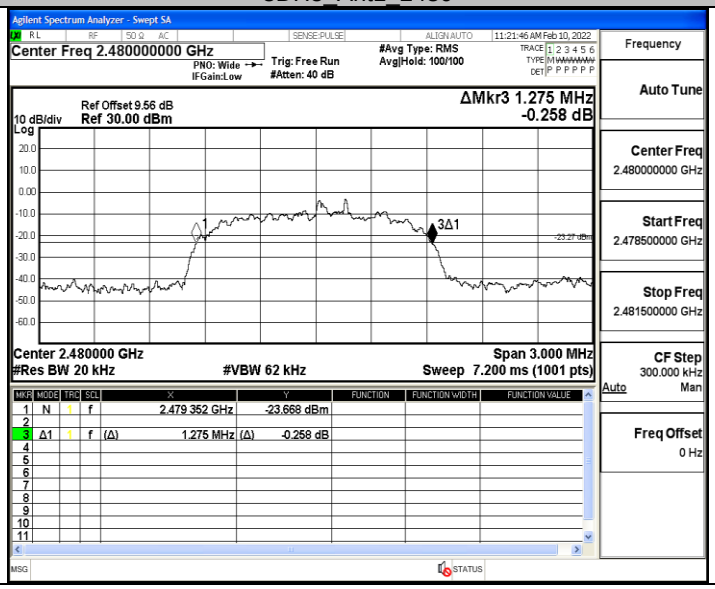

Appendix B: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.85770	2401.562	2402.419	---	PASS
		2441	0.84584	2440.566	2441.412	---	PASS
		2480	0.86035	2479.566	2480.426	---	PASS
2DH5	Ant1	2402	1.1907	2401.400	2402.591	---	PASS
		2441	1.1872	2440.402	2441.589	---	PASS
		2480	1.1900	2479.405	2480.595	---	PASS
3DH5	Ant1	2402	1.2006	2401.388	2402.589	---	PASS
		2441	1.1896	2440.396	2441.586	---	PASS
		2480	1.2032	2479.391	2480.594	---	PASS

Test Graphs

DH5_Ant1_2402

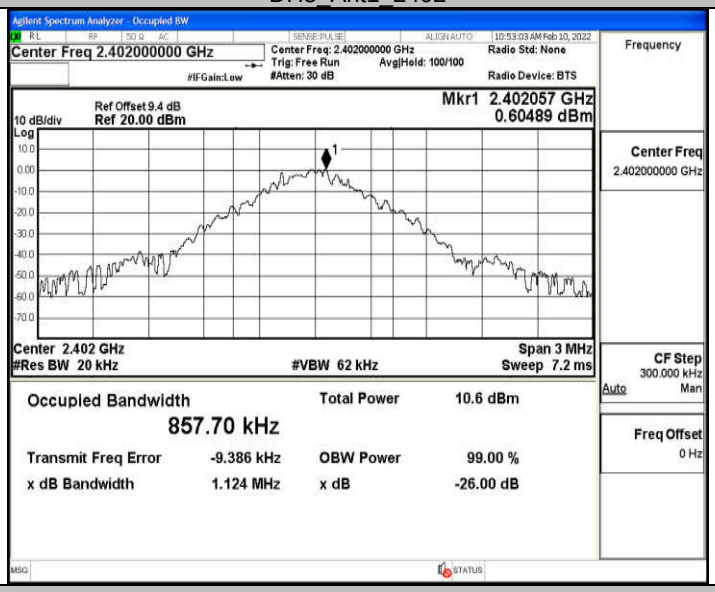

DH5_Ant1_2441

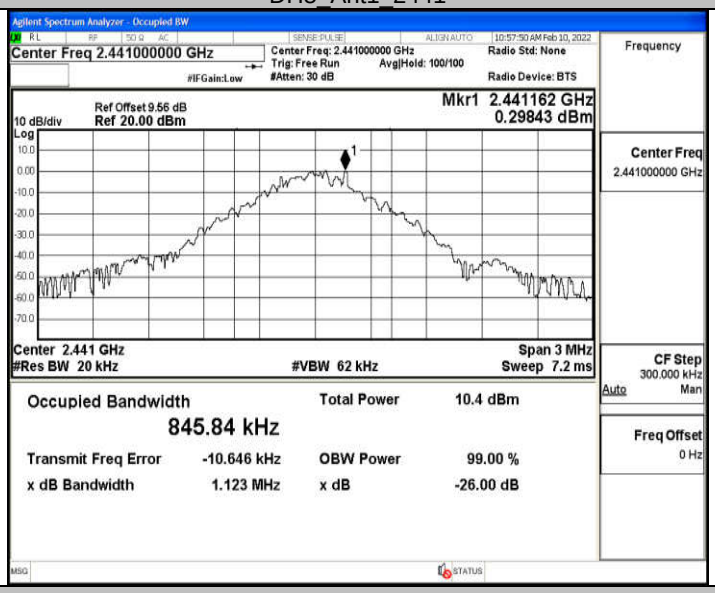

DH5_Ant1_2480

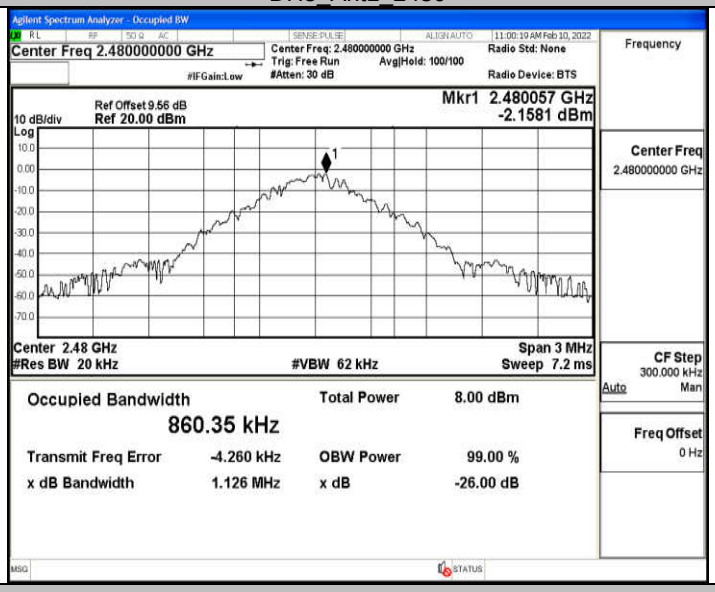

2DH5_Ant1_2402

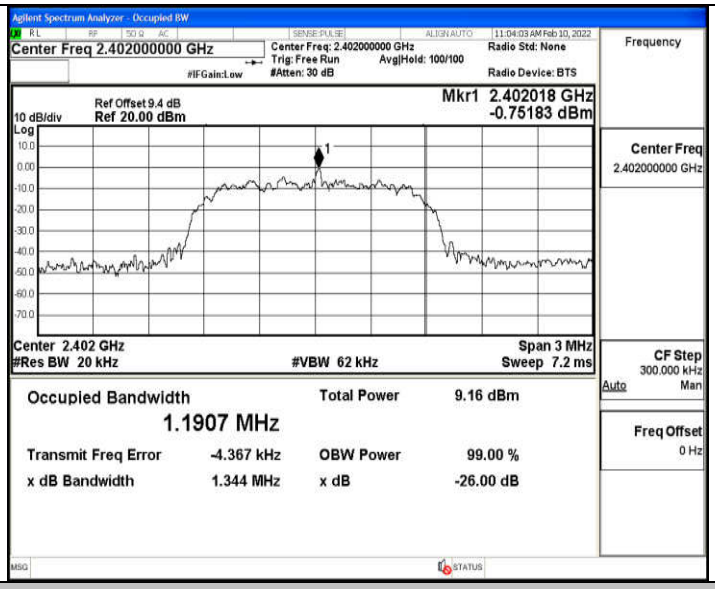

2DH5_Ant1_2441

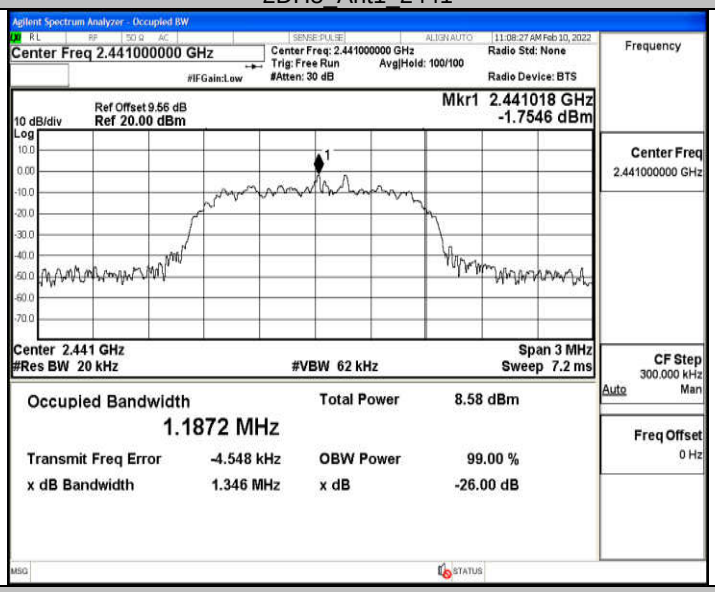

2DH5_Ant1_2480

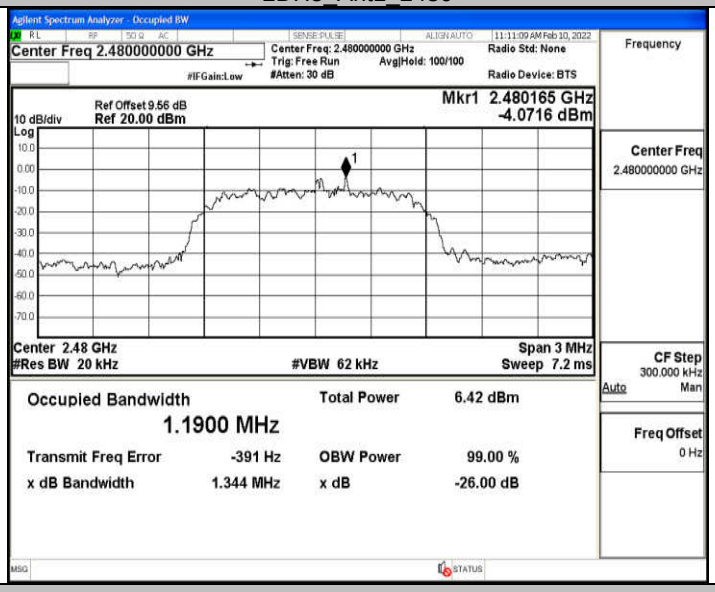

3DH5_Ant1_2402

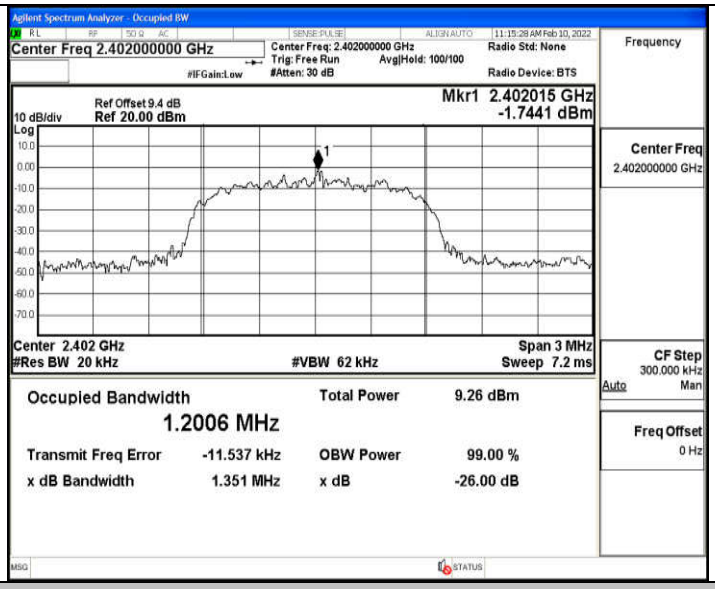

3DH5_Ant1_2441

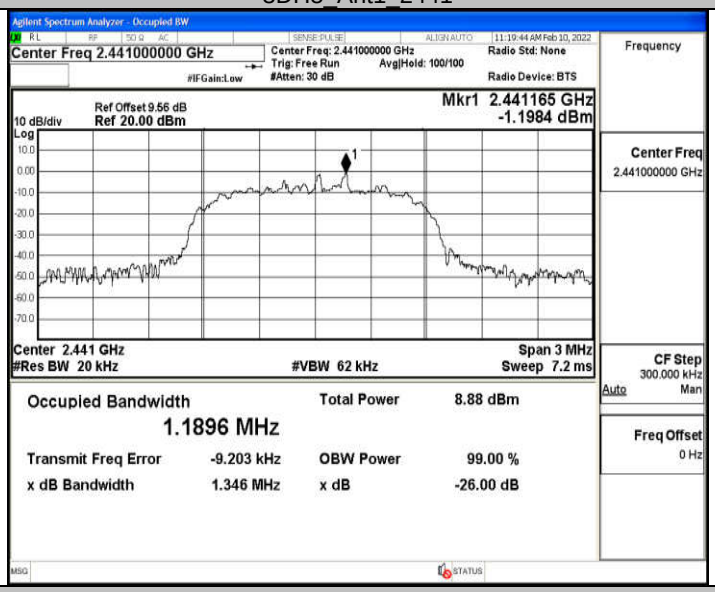

3DH5_Ant1_2480

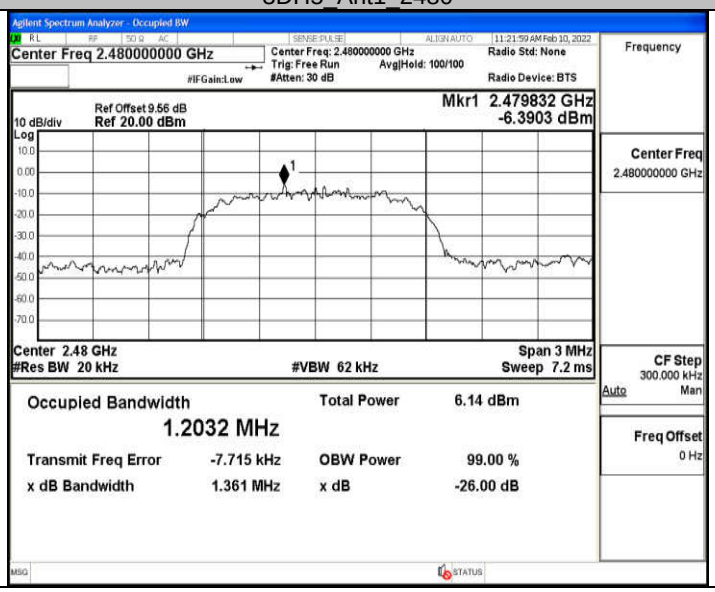

Appendix C: Maximum conducted output power

Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	4.19	<=30.00	PASS
		2441	3.83	<=30.00	PASS
		2480	1.59	<=30.00	PASS
2DH5	Ant1	2402	5.11	<=20.97	PASS
		2441	4.31	<=20.97	PASS
		2480	2.13	<=20.97	PASS
3DH5	Ant1	2402	5.47	<=20.97	PASS
		2441	4.62	<=20.97	PASS
		2480	2.23	<=20.97	PASS

Test Graphs

DH5_Ant1_2402

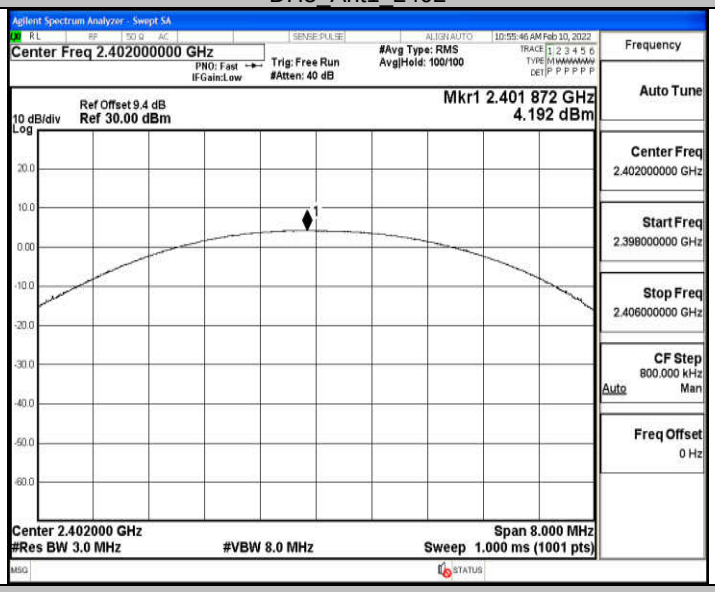

DH5_Ant1_2441

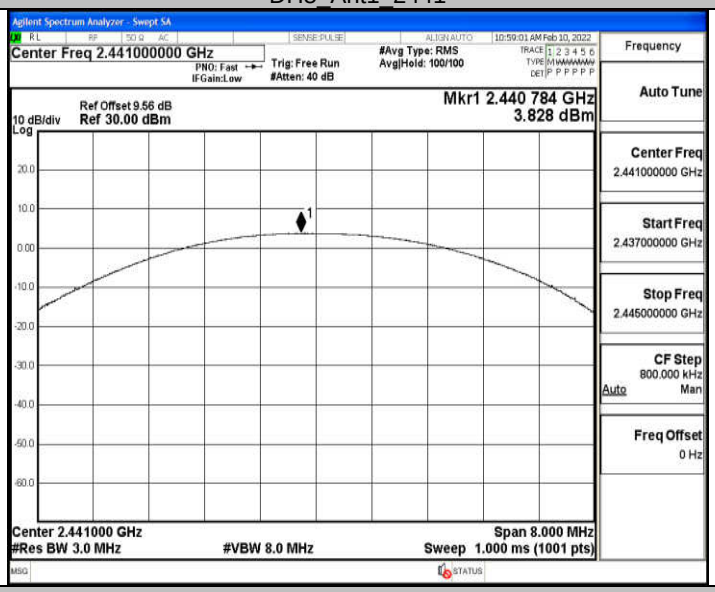

DH5_Ant1_2480

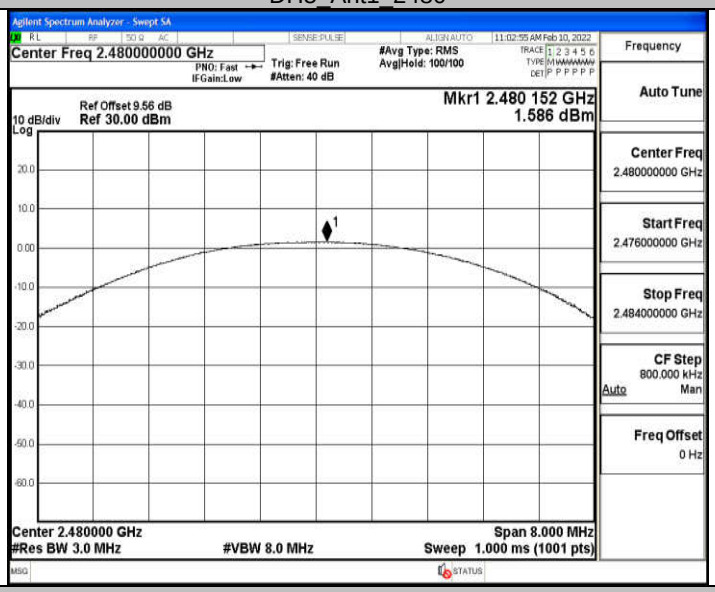

2DH5_Ant1_2402

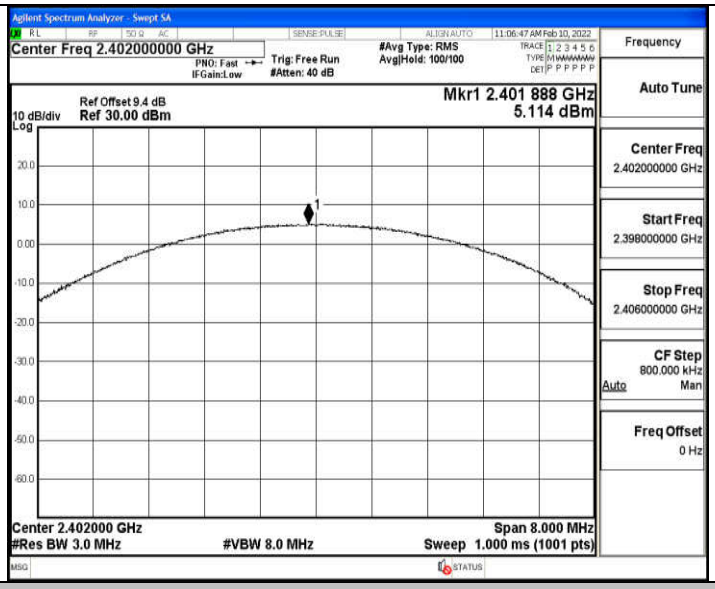

2DH5_Ant1_2441

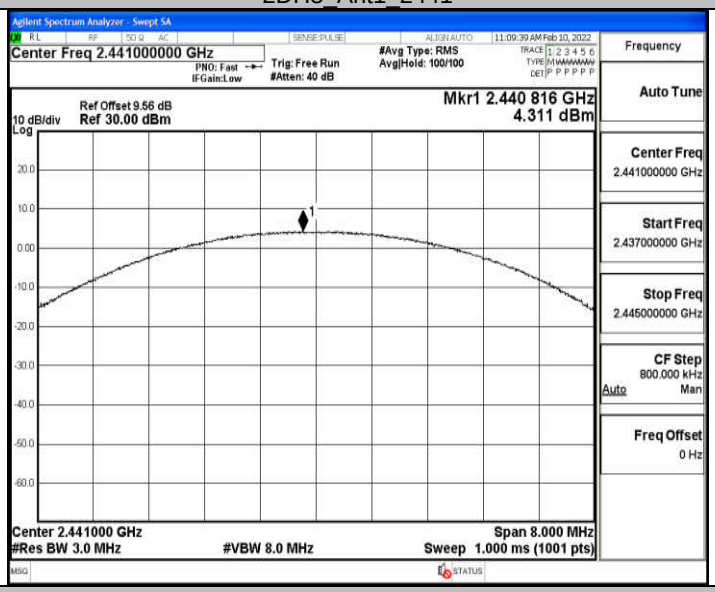

2DH5_Ant1_2480

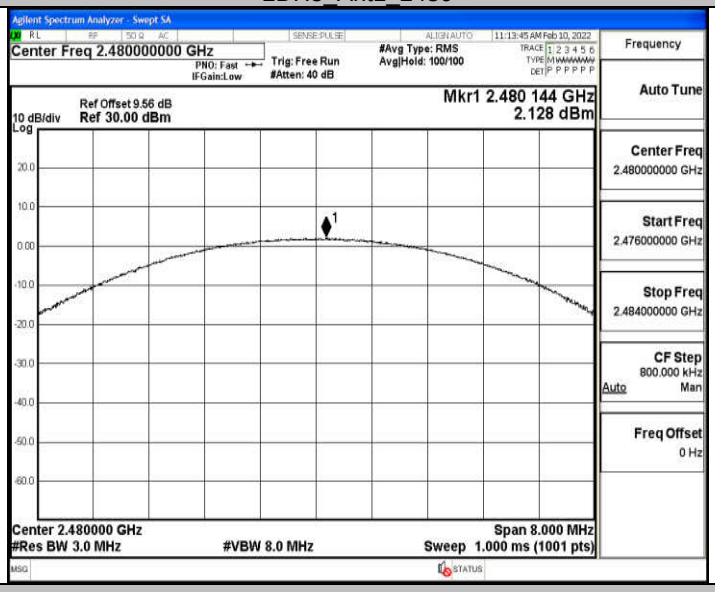

3DH5_Ant1_2402

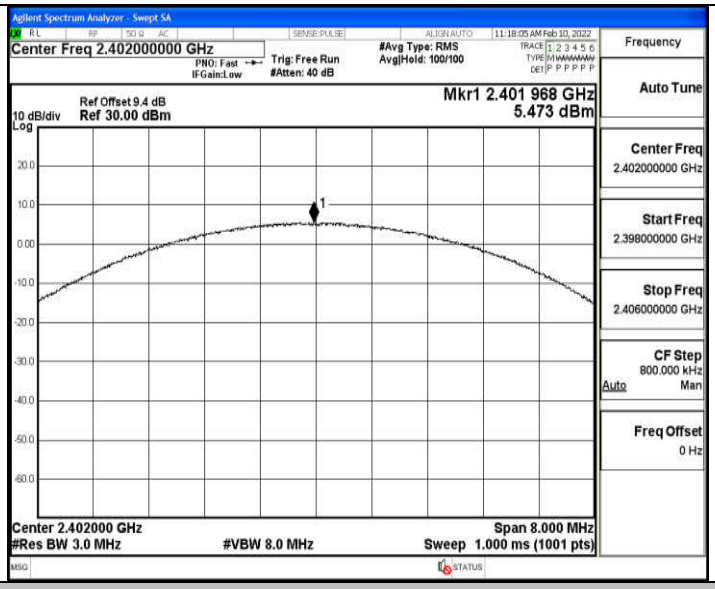

3DH5_Ant1_2441

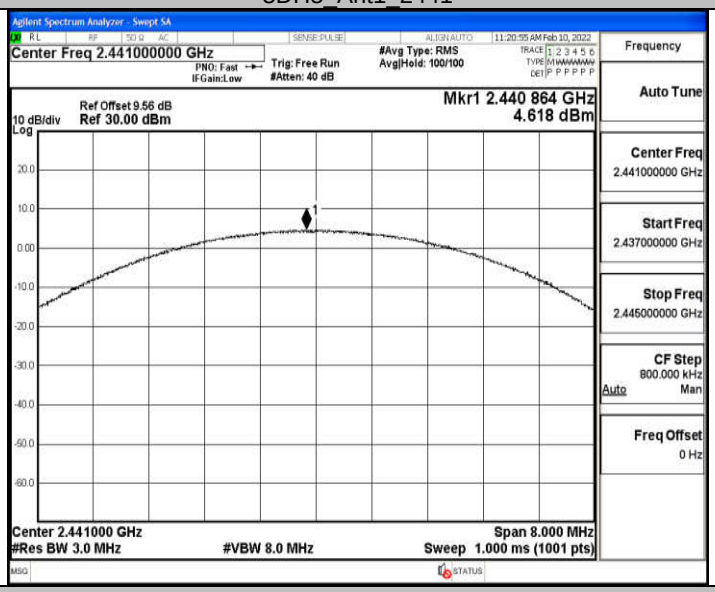

3DH5_Ant1_2480

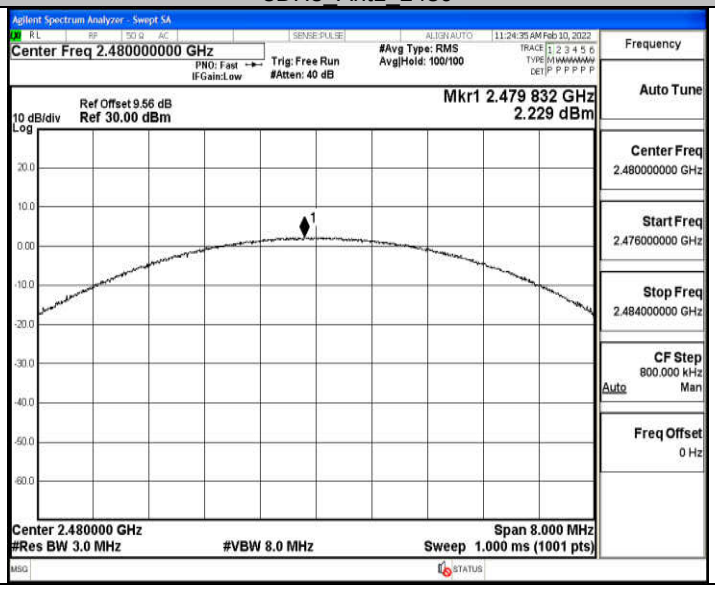

Appendix D: Carrier frequency separation

Test Result

TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.008	>=0.942	PASS
2DH5	Ant1	Hop	0.992	>=0.878	PASS
3DH5	Ant1	Hop	0.998	>=0.874	PASS

Test Graphs

DH5_Ant1_Hop

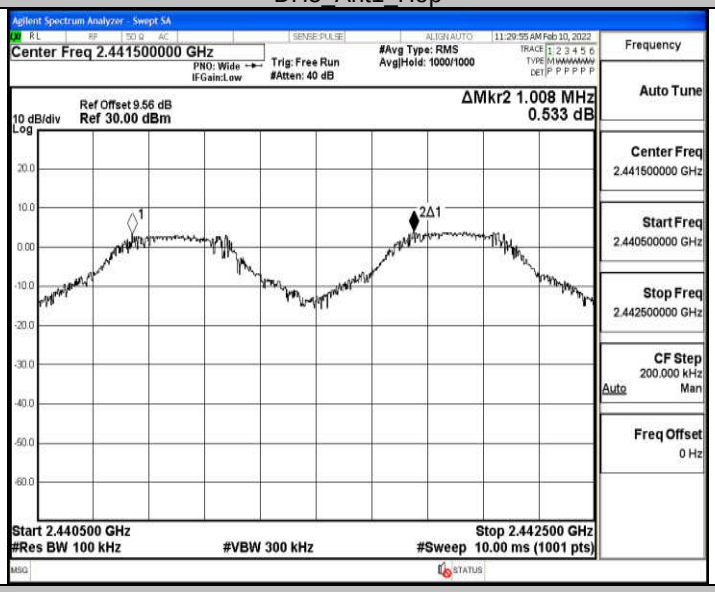

2DH5_Ant1_Hop

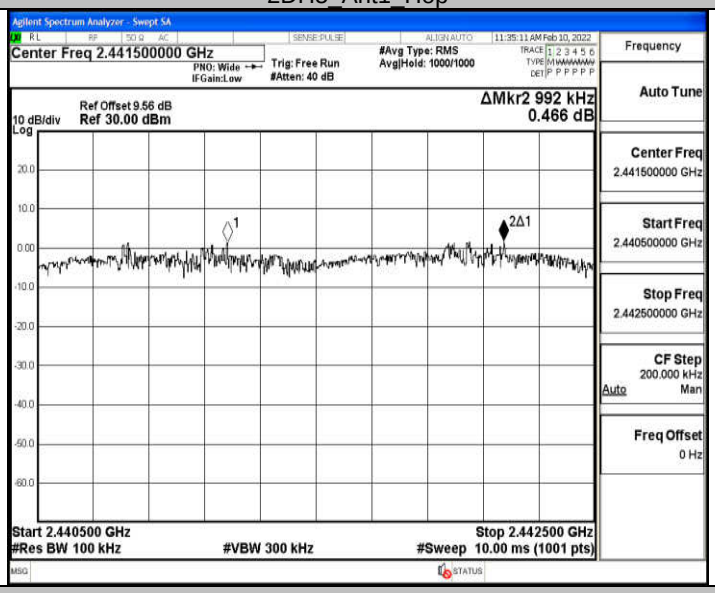

3DH5_Ant1_Hop

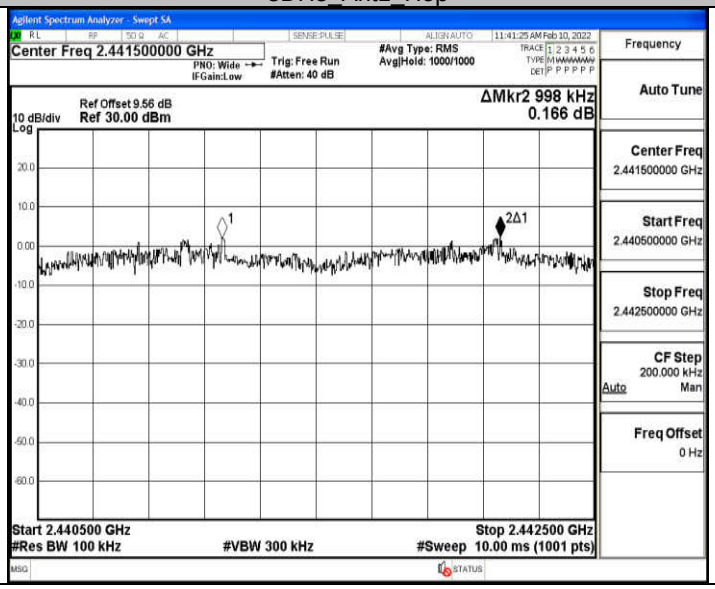

Appendix E: Time of occupancy

Test Result

TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH5	Ant1	Hop	2.89	90	0.26	<=0.4	PASS
2DH5	Ant1	Hop	2.88	130	0.375	<=0.4	PASS
3DH5	Ant1	Hop	2.88	80	0.231	<=0.4	PASS

Test Graphs

DH5_Ant1_Hop

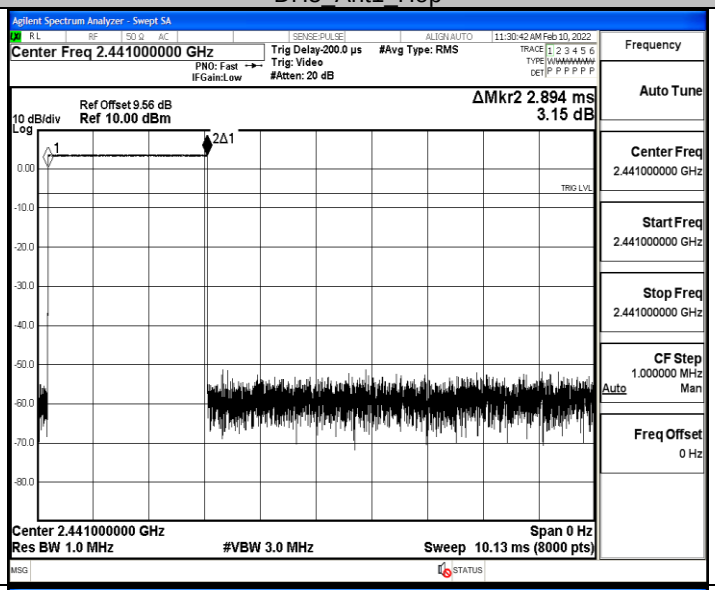

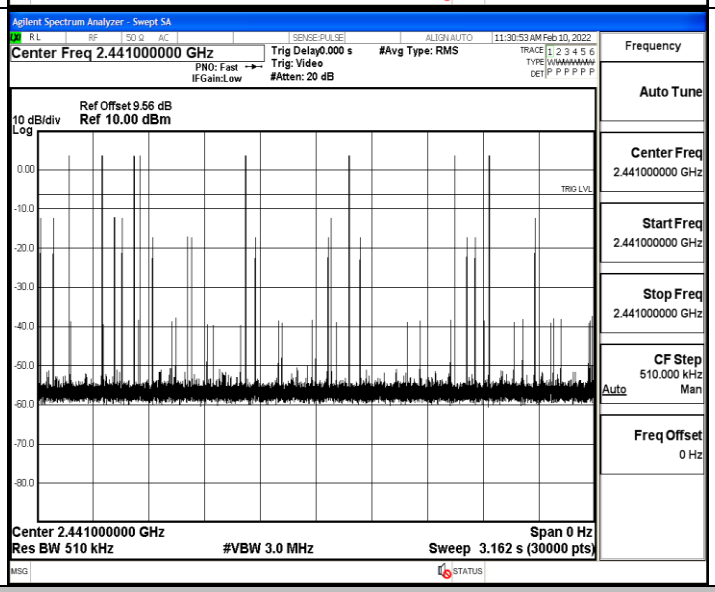

2DH5_Ant1_Hop

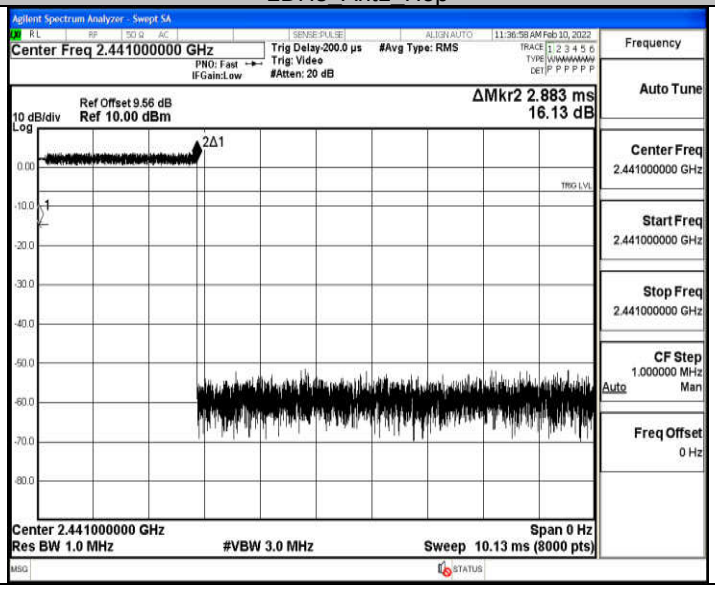

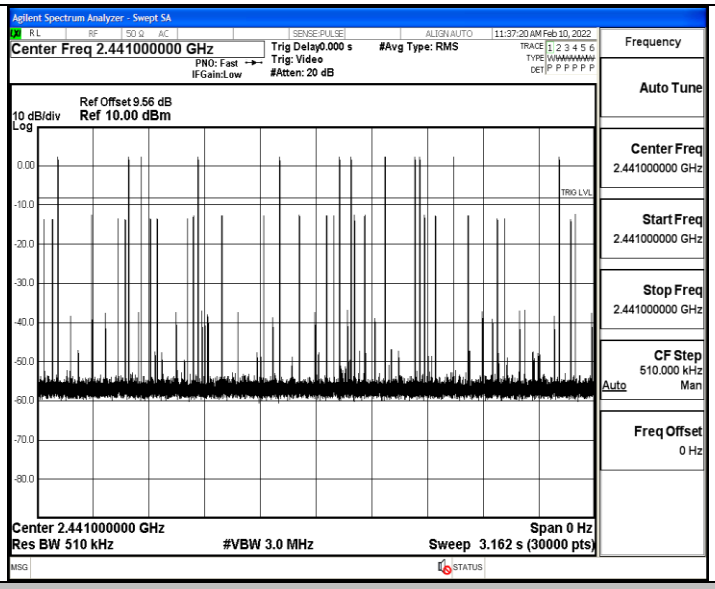

3DH5_Ant1_Hop

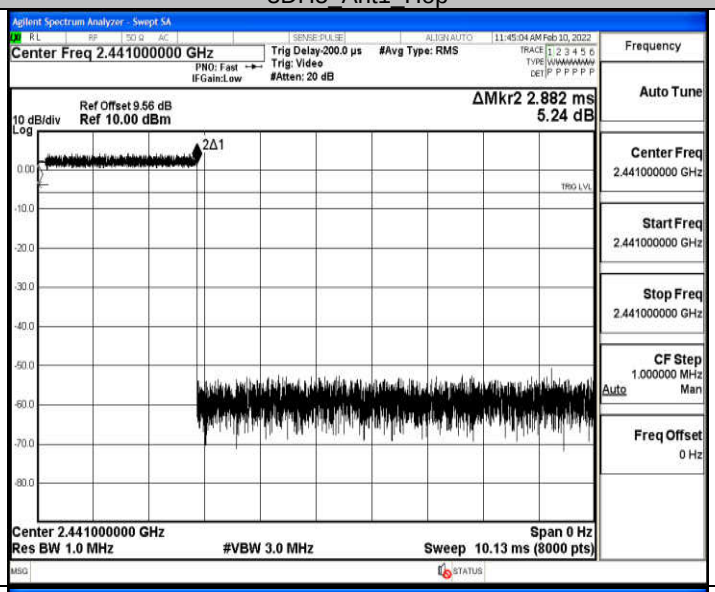

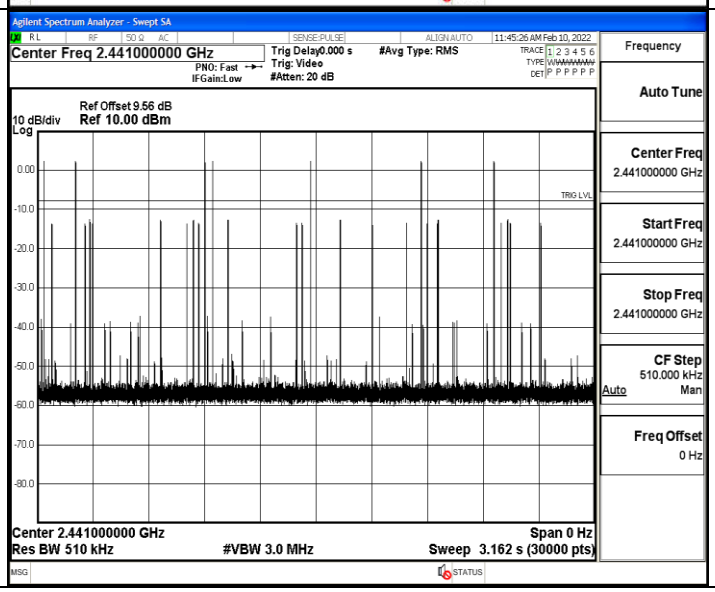

Appendix F: Number of hopping channels

Test Result

TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	>=15	PASS
2DH5	Ant1	Hop	79	>=15	PASS
3DH5	Ant1	Hop	79	>=15	PASS

Test Graphs

DH5_Ant1_Hop

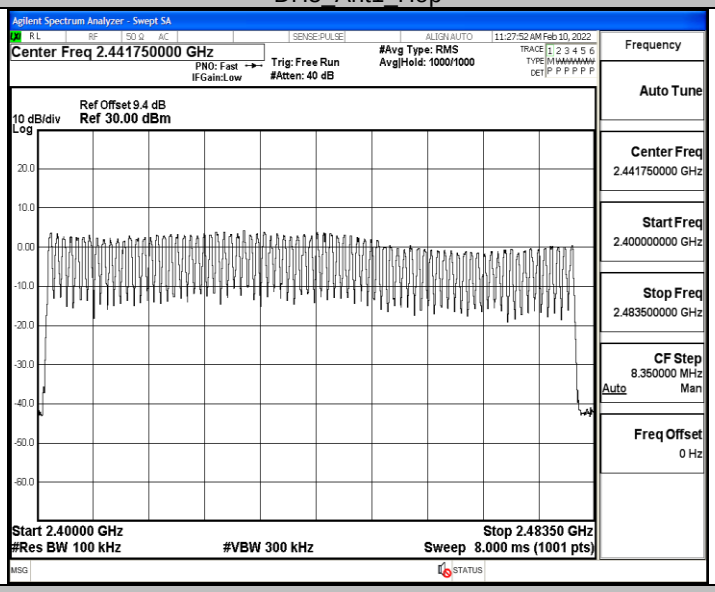

2DH5_Ant1_Hop

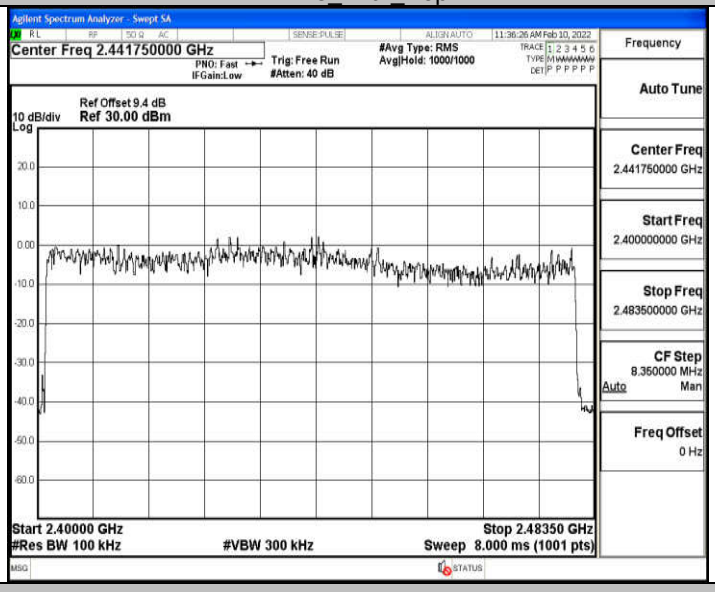

3DH5_Ant1_Hop

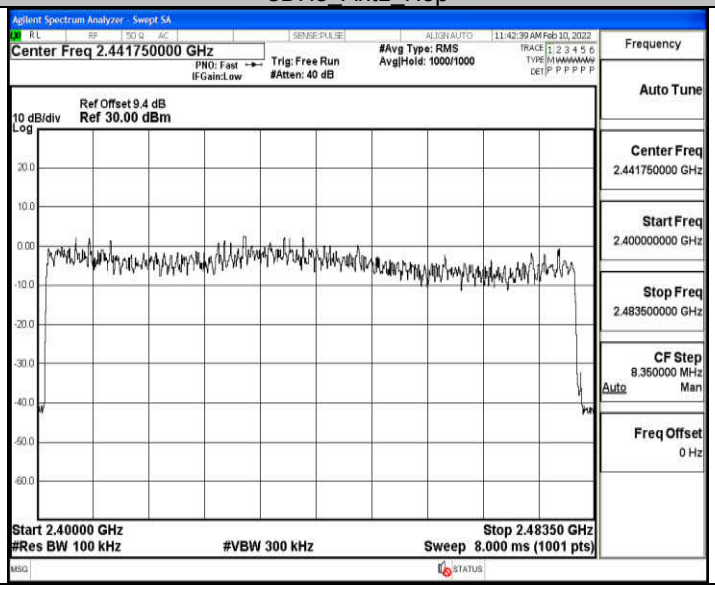

Appendix G: Band edge measurements

Test Result

TestMode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	3.88	-49.85	≤-16.12	PASS
		High	2480	1.16	-49.31	≤-18.84	PASS
		Low	Hop_2402	2.30	-50.65	≤-17.7	PASS
		High	Hop_2480	1.32	-48.81	≤-18.68	PASS
2DH5	Ant1	Low	2402	2.22	-50.21	≤-17.78	PASS
		High	2480	-0.03	-48.15	≤-20.03	PASS
		Low	Hop_2402	-0.82	-50.38	≤-20.82	PASS
		High	Hop_2480	-3.05	-49.77	≤-23.05	PASS
3DH5	Ant1	Low	2402	2.66	-50.11	≤-17.34	PASS
		High	2480	-1.87	-49.19	≤-21.87	PASS
		Low	Hop_2402	-1.69	-49.42	≤-21.69	PASS
		High	Hop_2480	-2.70	-49.3	≤-22.7	PASS

Test Graphs

DH5_Ant1_Low_2402

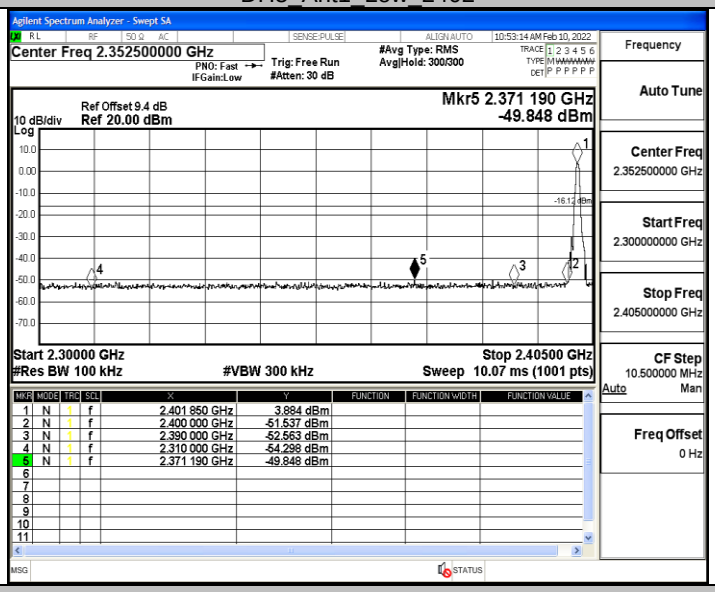

DH5_Ant1_High_2480

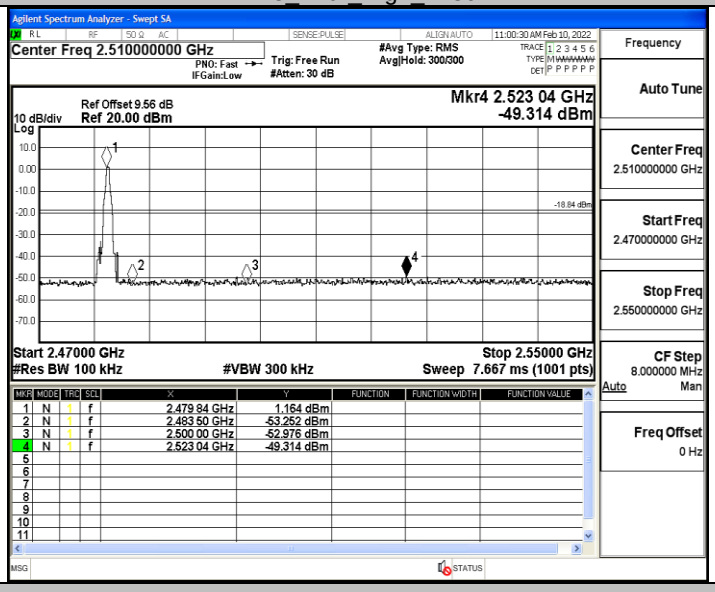

DH5_Ant1_Low_Hop_2402

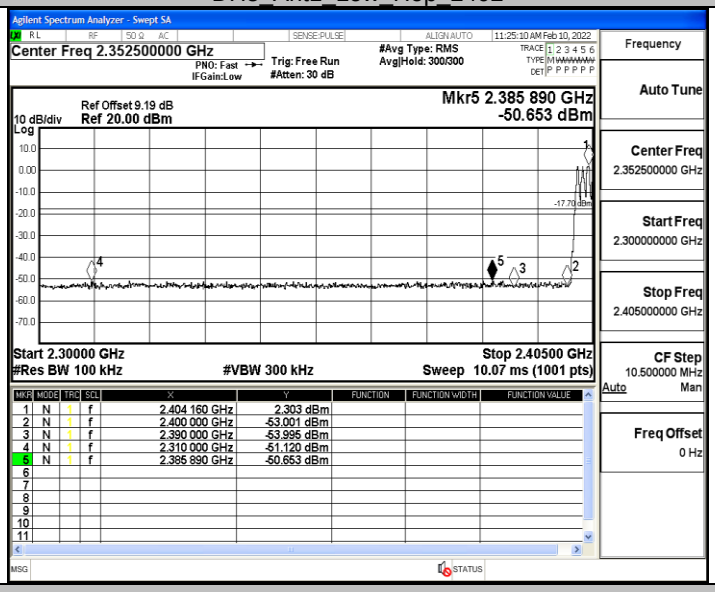

DH5_Ant1_High_Hop_2480

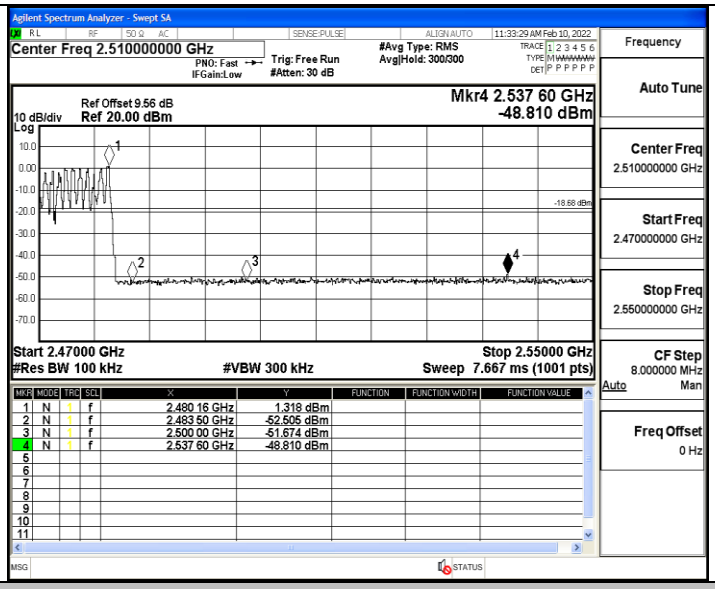

2DH5_Ant1_Low_2402

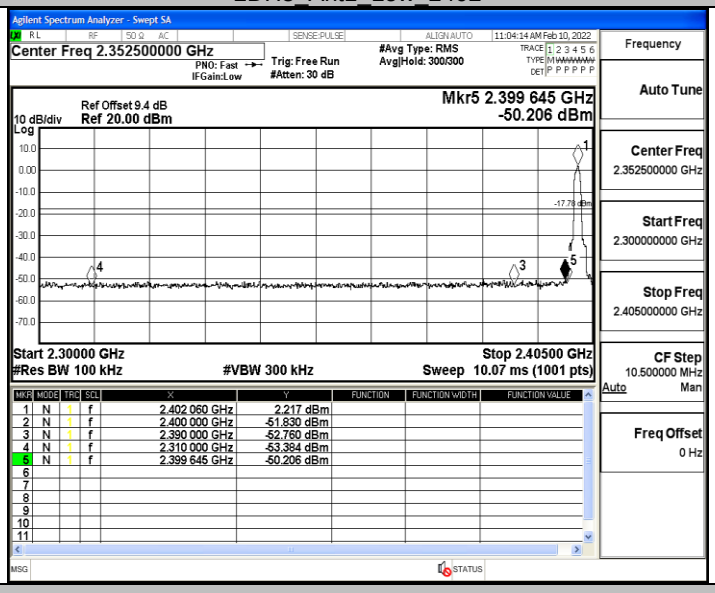

2DH5_Ant1_High_2480

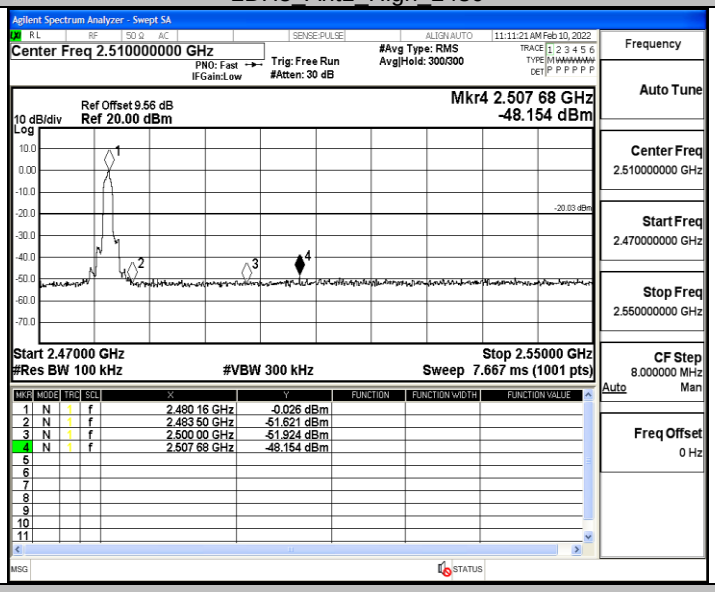

2DH5_Ant1_Low_Hop_2402

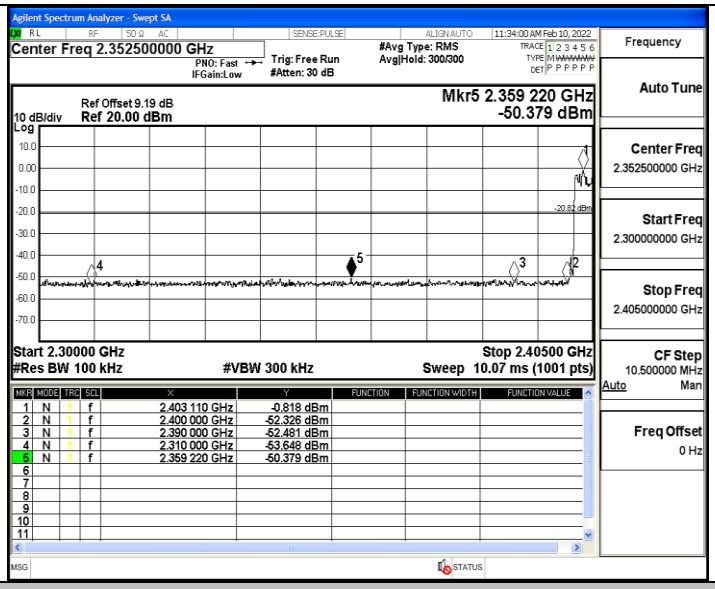

2DH5_Ant1_High_Hop_2480

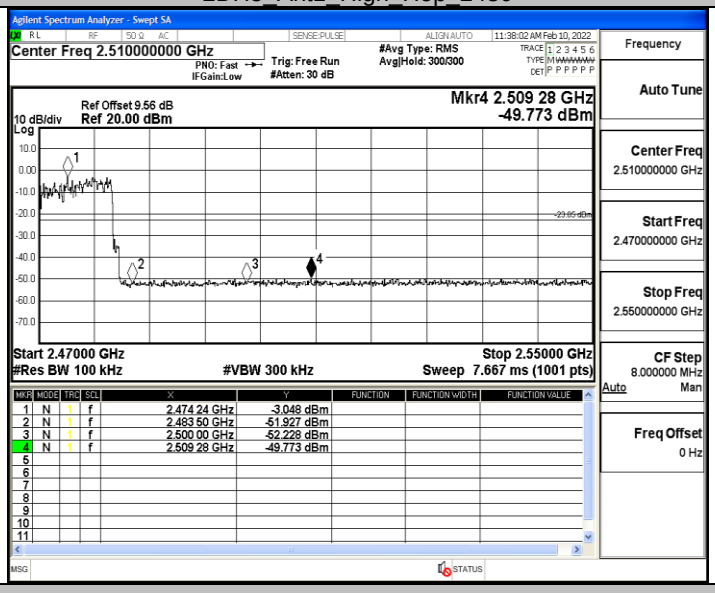

3DH5_Ant1_Low_2402

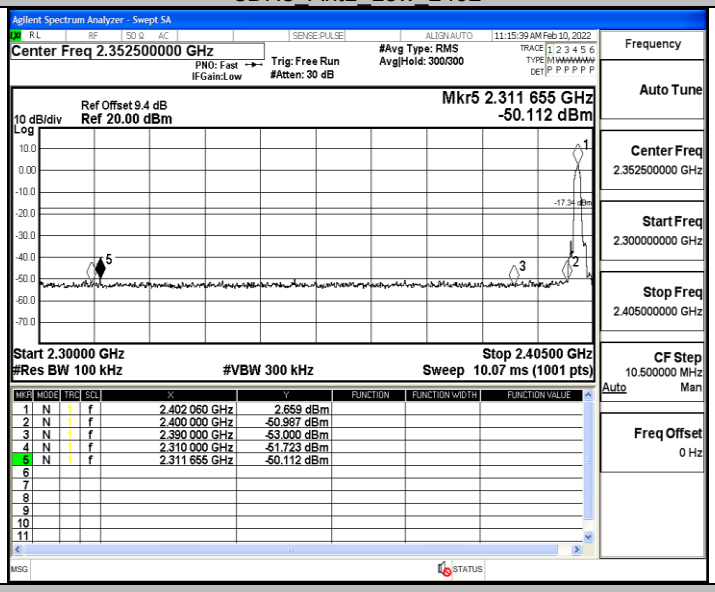

3DH5_Ant1_High_2480

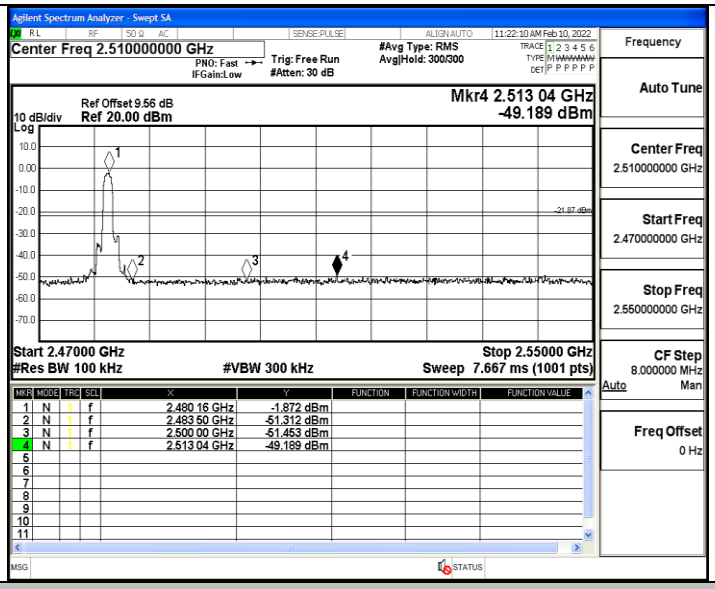

3DH5_Ant1_Low_Hop_2402

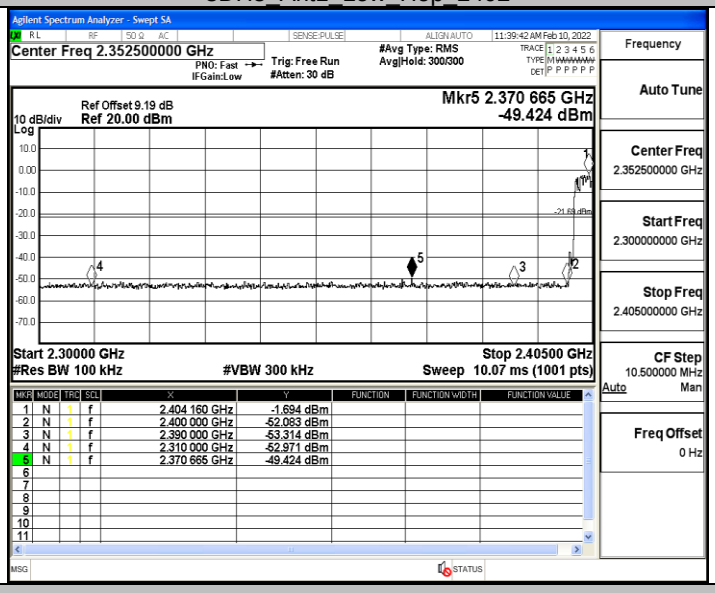

3DH5_Ant1_High_Hop_2480

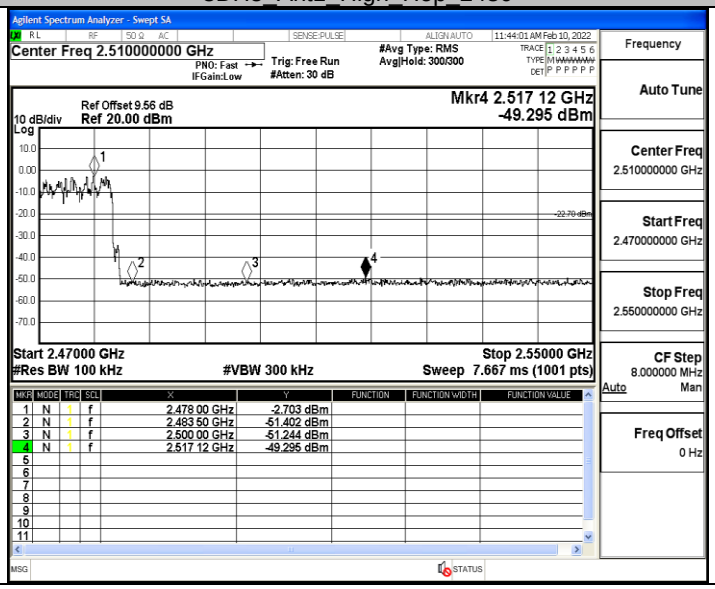

Appendix H: Conducted Spurious Emission

Test Result

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	3.02	3.02	---	PASS
			30~1000	3.02	-61.31	≤-16.98	PASS
			1000~26500	3.02	-52.6	≤-16.98	PASS
		2441	Reference	2.91	2.91	---	PASS
			30~1000	2.91	-61.25	≤-17.09	PASS
			1000~26500	2.91	-52.76	≤-17.09	PASS
		2480	Reference	0.52	0.52	---	PASS
			30~1000	0.52	-61.39	≤-19.48	PASS
			1000~26500	0.52	-52.32	≤-19.48	PASS
2DH5	Ant1	2402	Reference	1.88	1.88	---	PASS
			30~1000	1.88	-61.05	≤-18.12	PASS
			1000~26500	1.88	-52.61	≤-18.12	PASS
		2441	Reference	-1.06	-1.06	---	PASS
			30~1000	-1.06	-61.26	≤-21.06	PASS
			1000~26500	-1.06	-52.7	≤-21.06	PASS
		2480	Reference	-0.23	-0.23	---	PASS
			30~1000	-0.23	-61.2	≤-20.23	PASS
			1000~26500	-0.23	-51.56	≤-20.23	PASS
3DH5	Ant1	2402	Reference	1.97	1.97	---	PASS
			30~1000	1.97	-61.99	≤-18.03	PASS
			1000~26500	1.97	-53.63	≤-18.03	PASS
		2441	Reference	0.20	0.20	---	PASS
			30~1000	0.20	-61	≤-19.8	PASS
			1000~26500	0.20	-53.03	≤-19.8	PASS
		2480	Reference	-0.05	-0.05	---	PASS
			30~1000	-0.05	-60.11	≤-20.05	PASS
			1000~26500	-0.05	-52.44	≤-20.05	PASS

Test Graphs

DH5_Ant1_2402_0~Reference

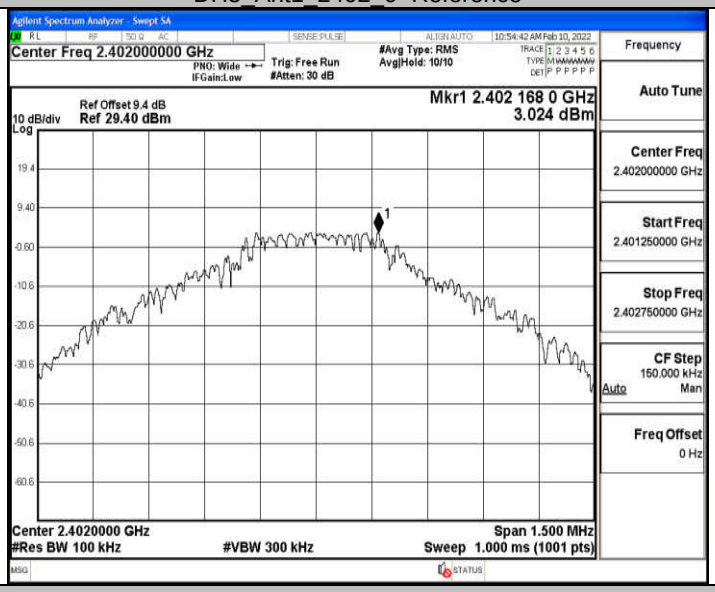

DH5_Ant1_2402_30~1000

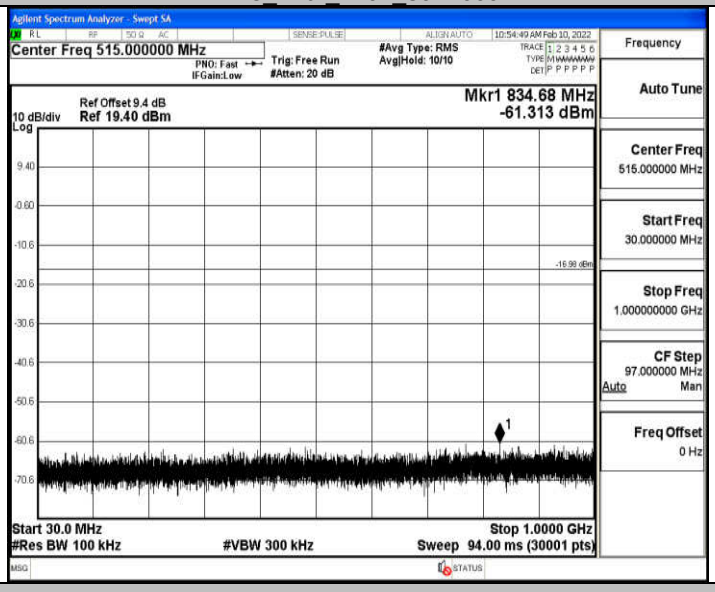

DH5_Ant1_2402_1000~26500

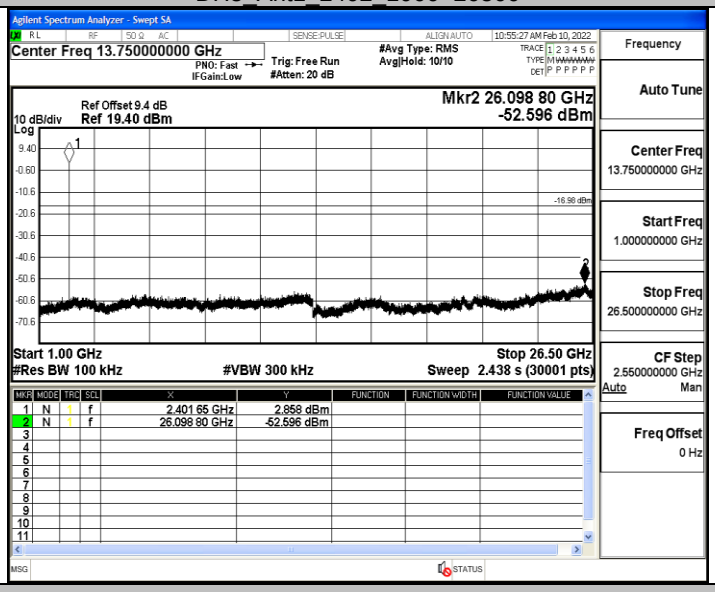

DH5_Ant1_2441_0~Reference

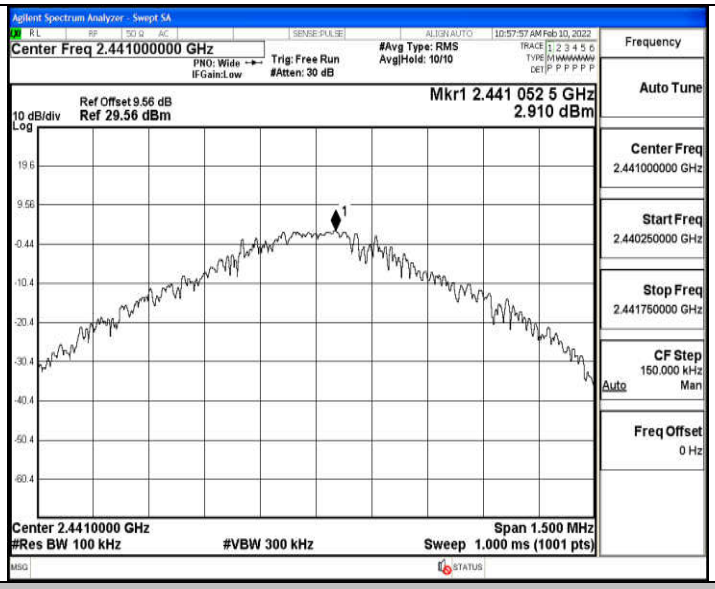

DH5_Ant1_2441_30~1000

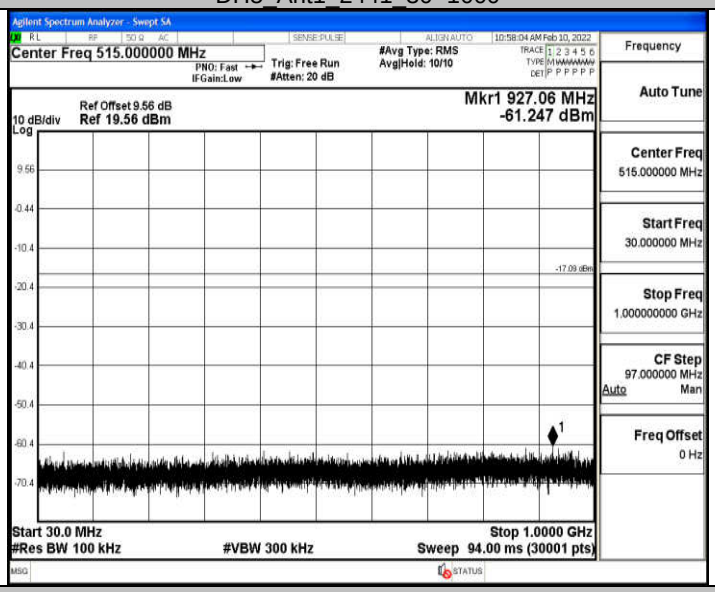

DH5_Ant1_2441_1000~26500

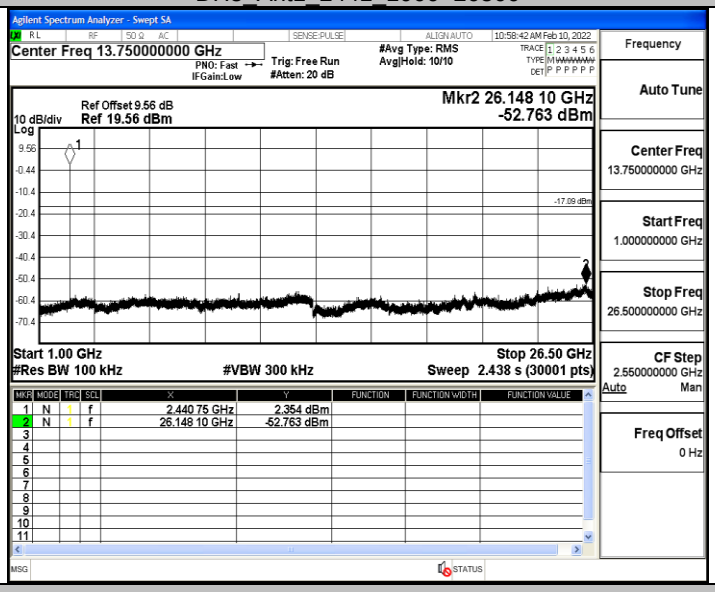

DH5_Ant1_2480_0~Reference

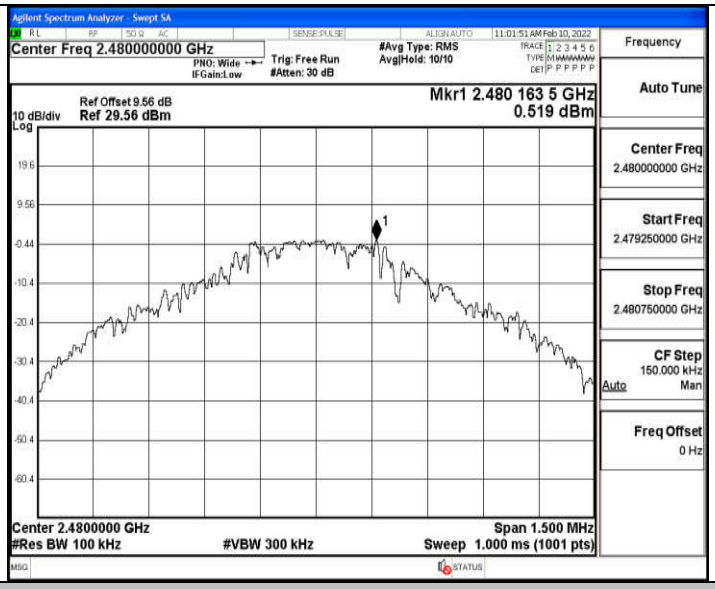

DH5_Ant1_2480_30~1000

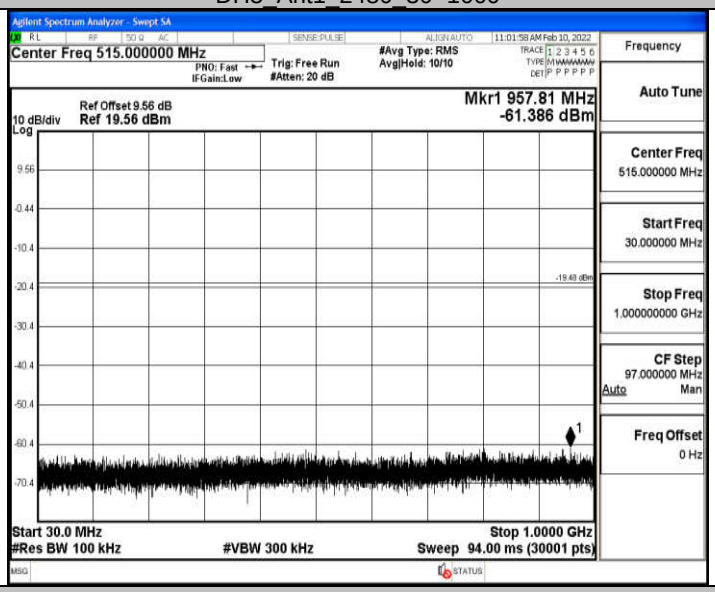

DH5_Ant1_2480_1000~26500

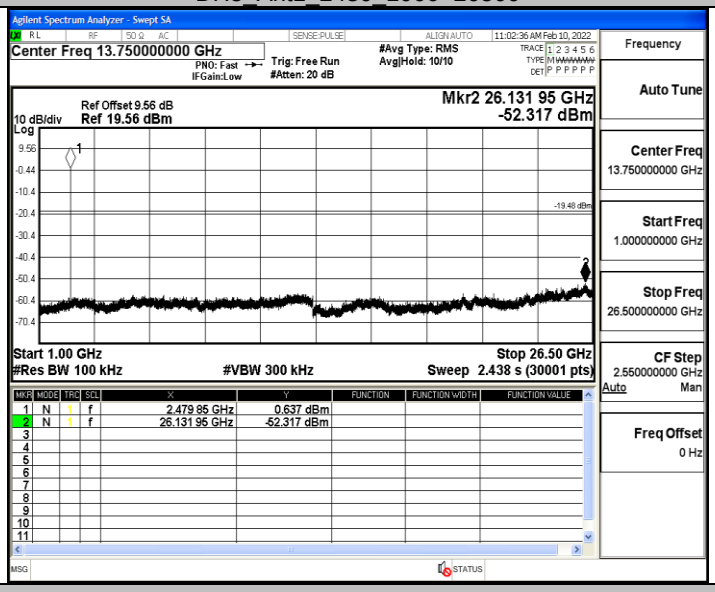

2DH5_Ant1_2402_0~Reference

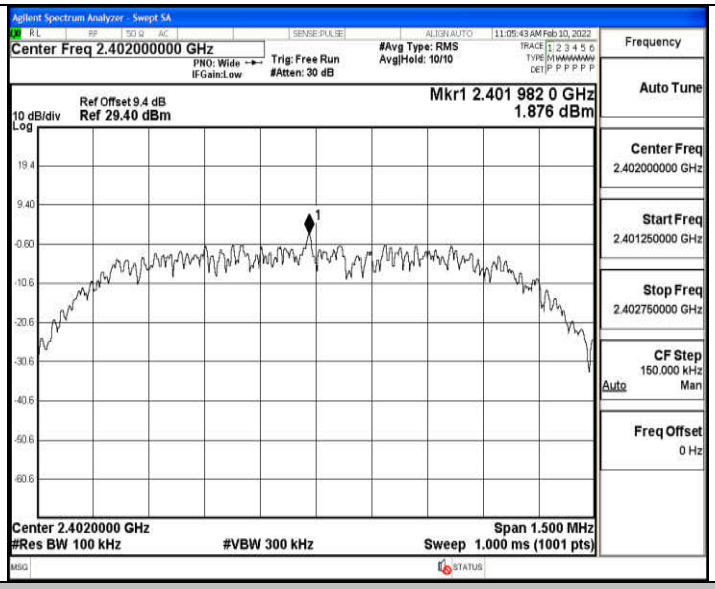

2DH5_Ant1_2402_30~1000

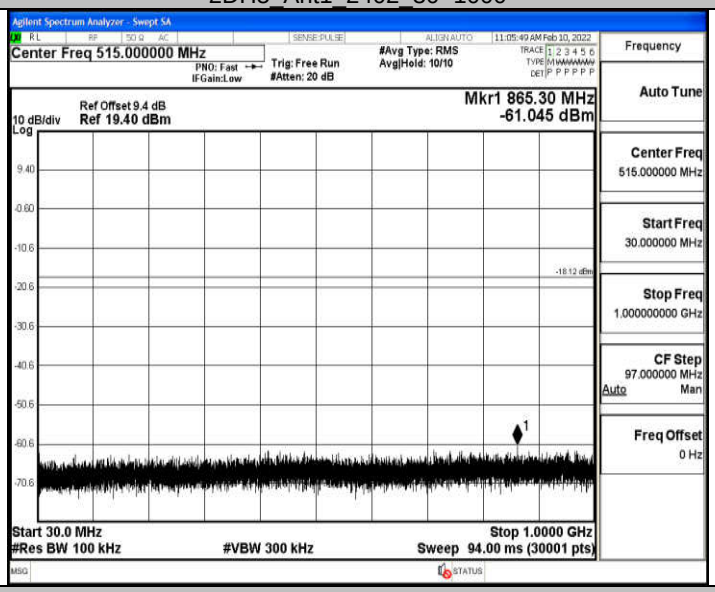

2DH5_Ant1_2402_1000~26500

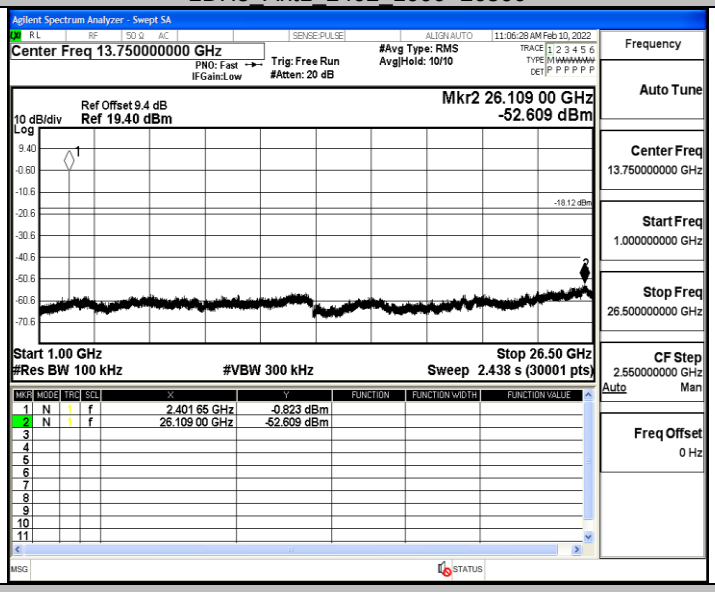

2DH5_Ant1_2441_0~Reference

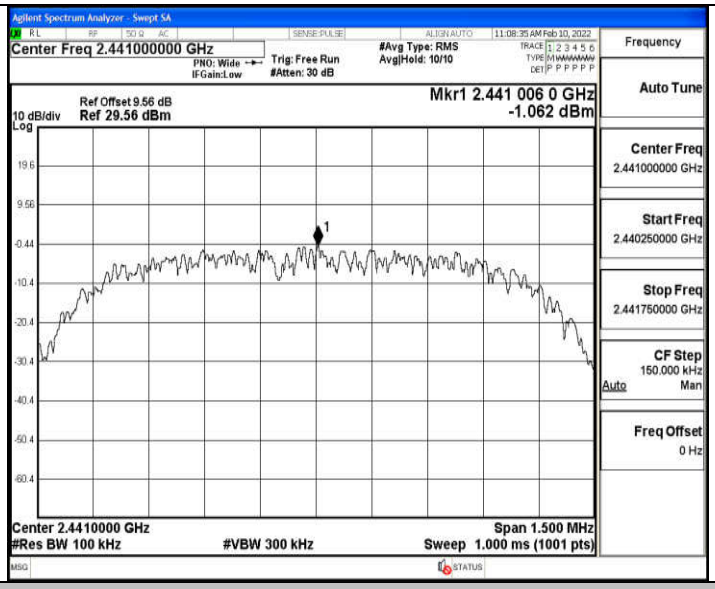

2DH5_Ant1_2441_30~1000

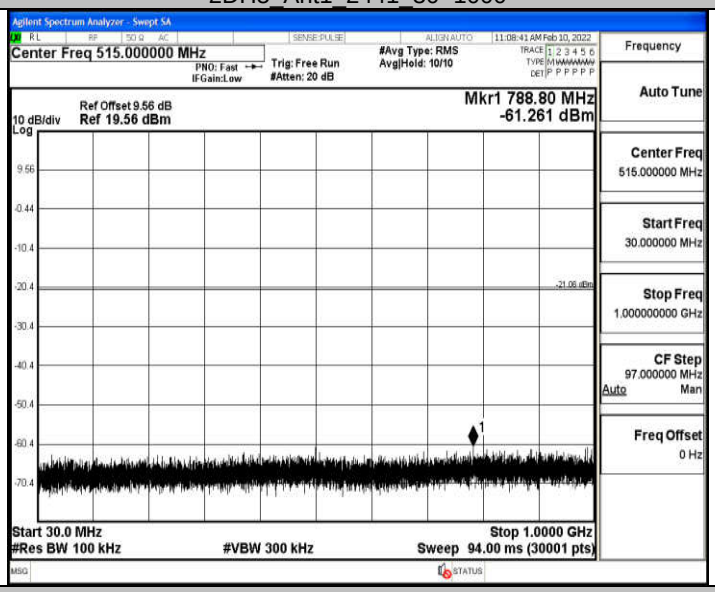

2DH5_Ant1_2441_1000~26500

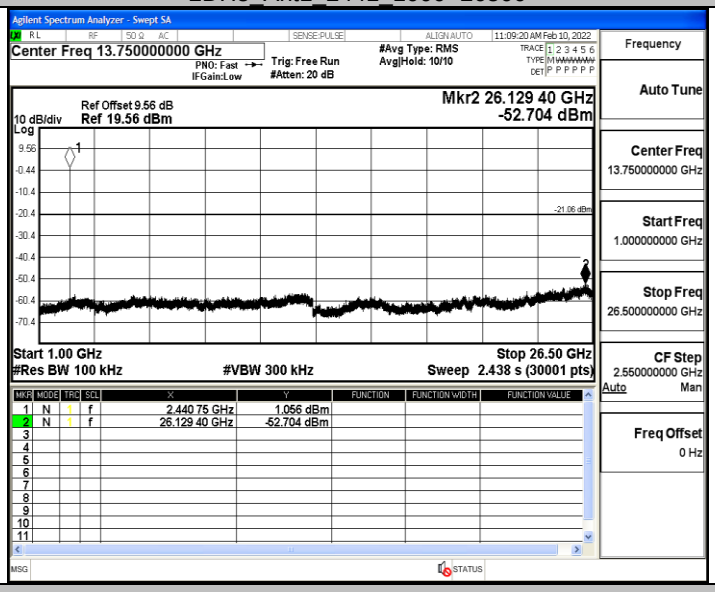

2DH5_Ant1_2480_0~Reference

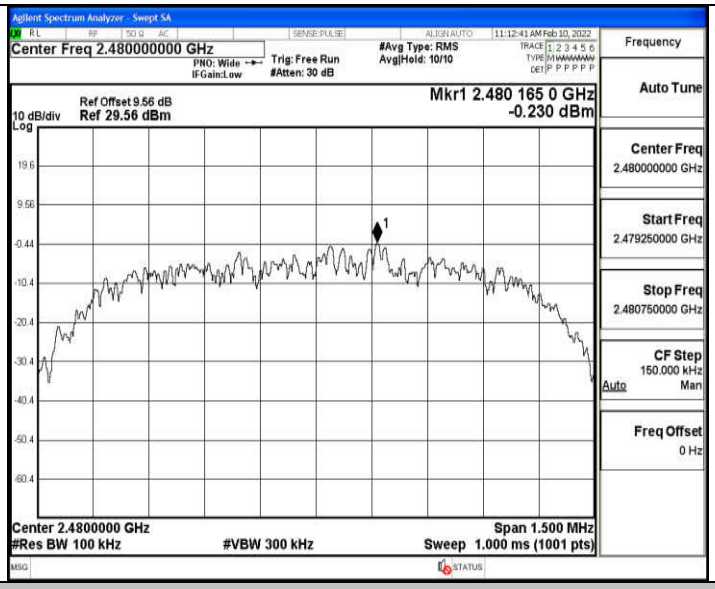

2DH5_Ant1_2480_30~1000

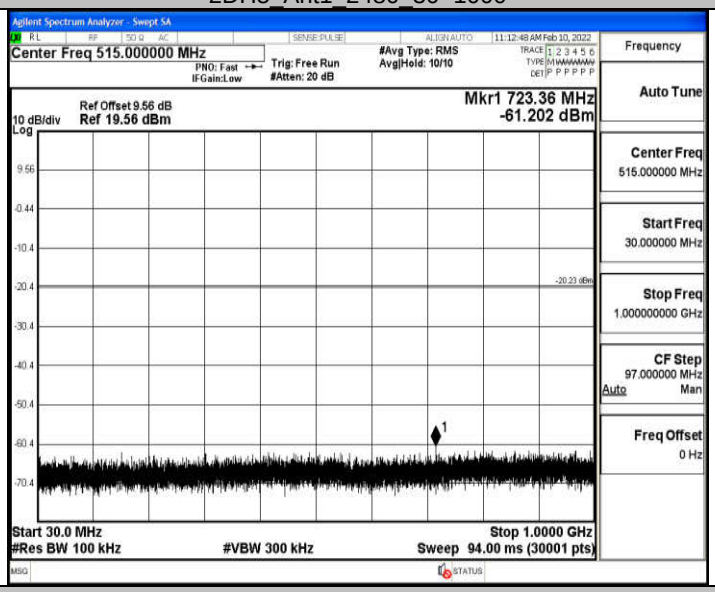

2DH5_Ant1_2480_1000~26500

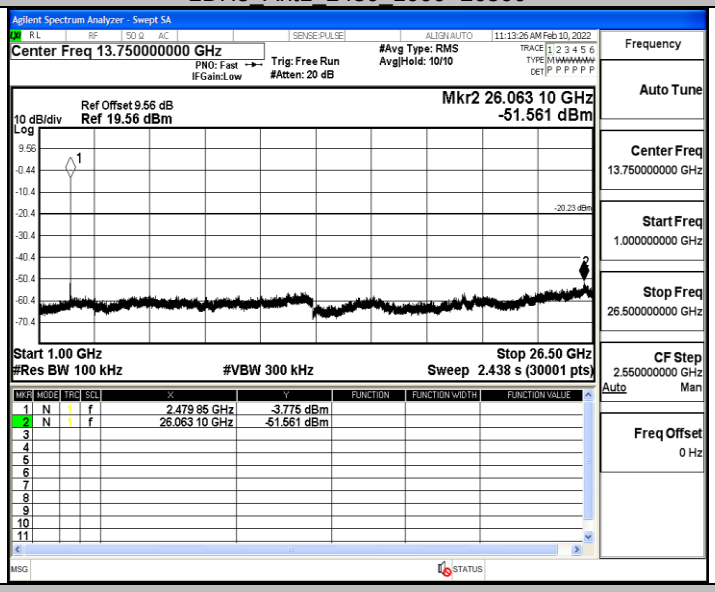

3DH5_Ant1_2402_0~Reference

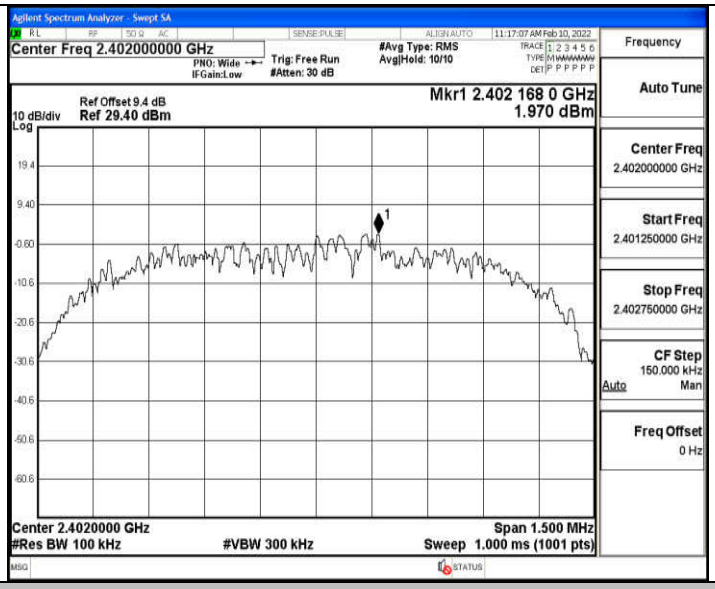

3DH5_Ant1_2402_30~1000

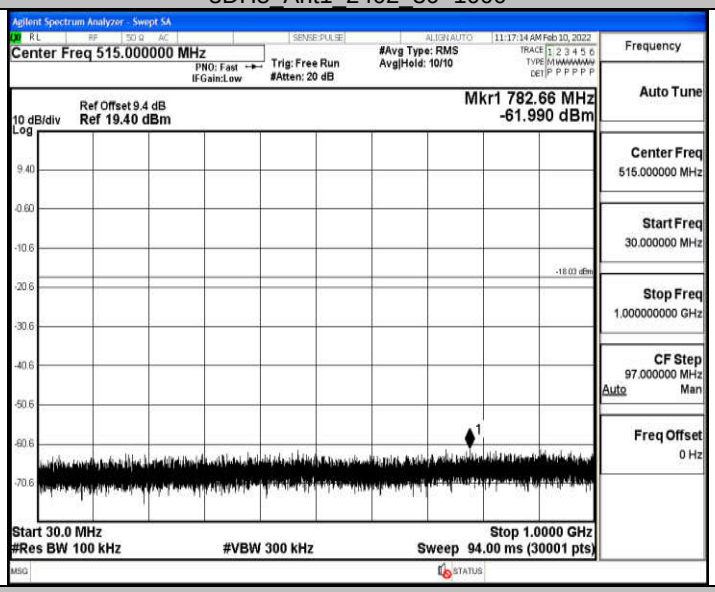

3DH5_Ant1_2402_1000~26500

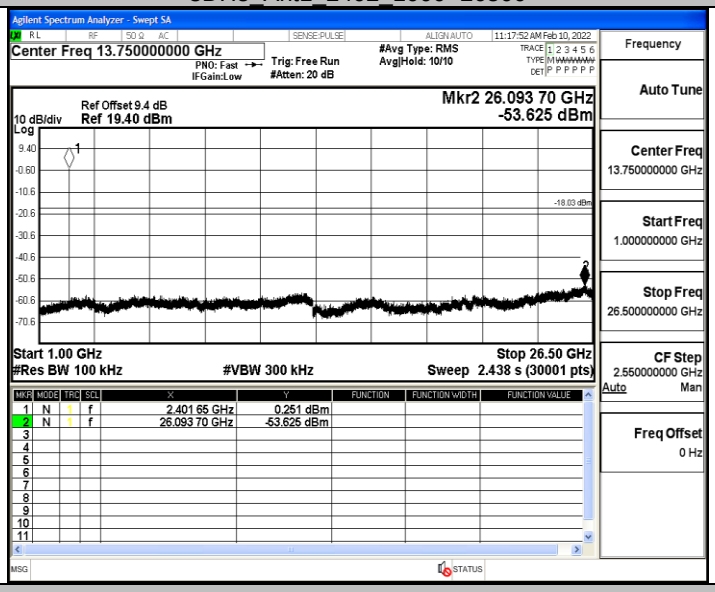

3DH5_Ant1_2441_0~Reference

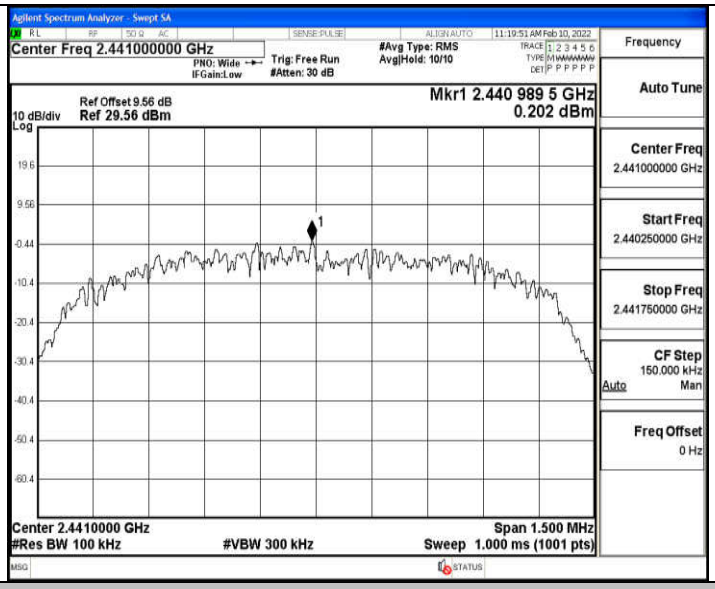

3DH5_Ant1_2441_30~1000

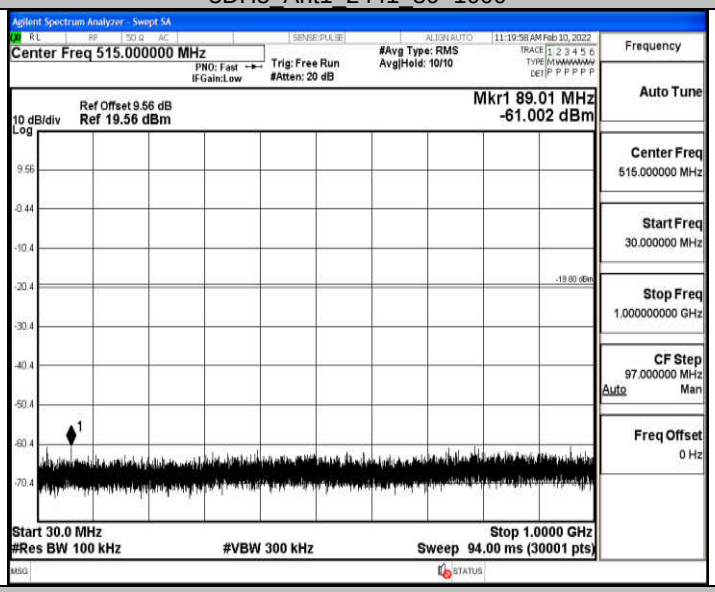

3DH5_Ant1_2441_1000~26500

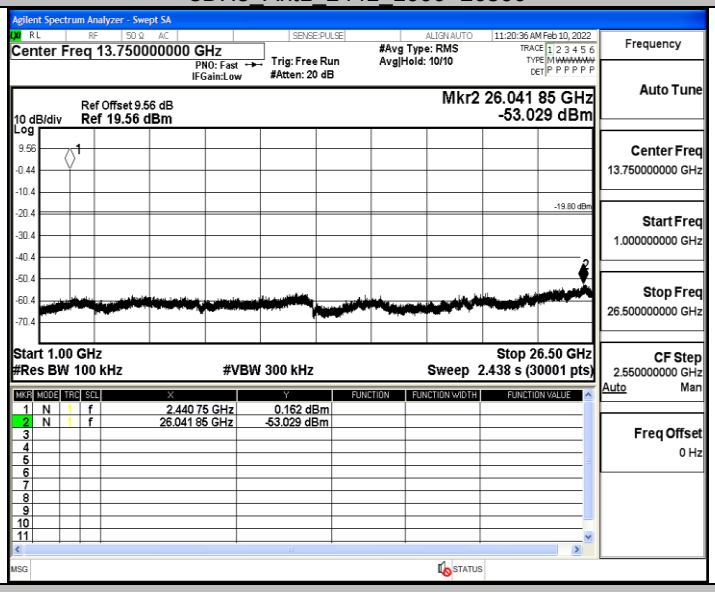

3DH5_Ant1_2480_0~Reference

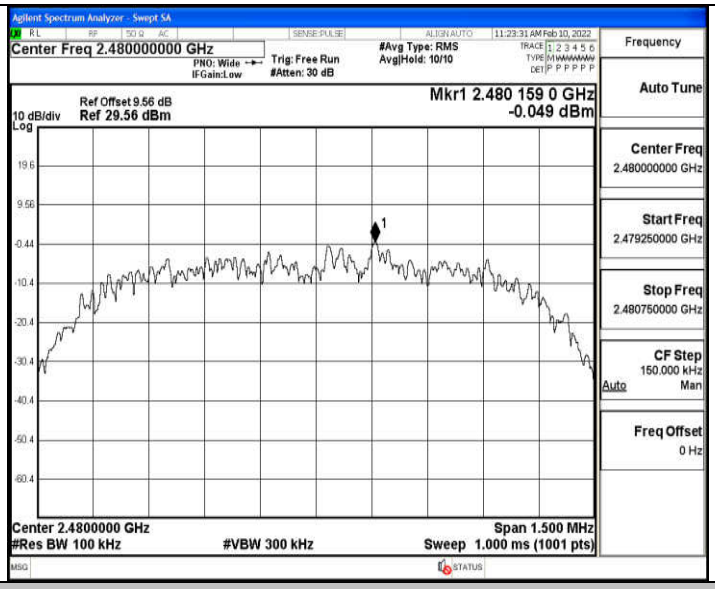

3DH5_Ant1_2480_30~1000

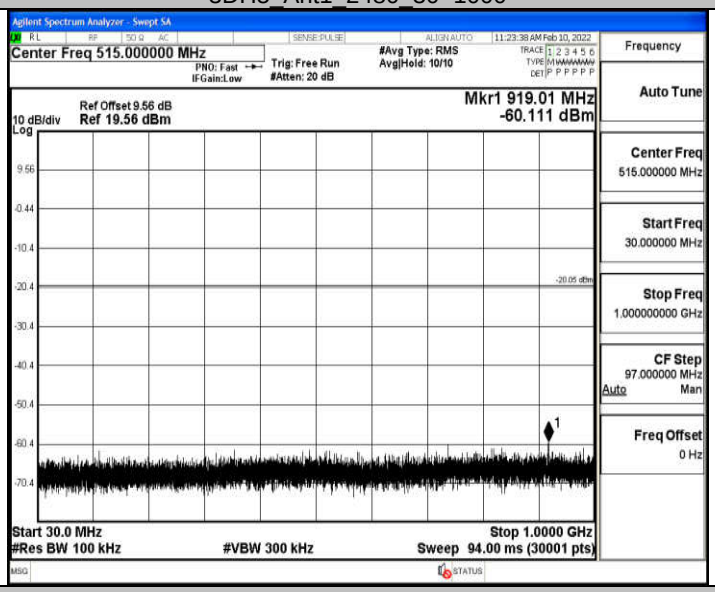

3DH5_Ant1_2480_1000~26500

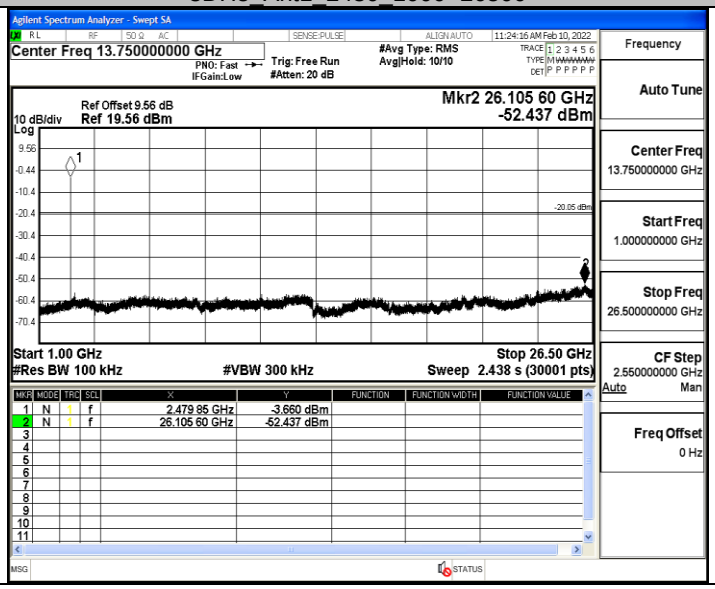

Appendix I: Duty Cycle

Test Result

TestMode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	1/B [kHz]
DH5	Ant1	2402	2.90	3.75	77.33	0.34
		2441	2.90	3.75	77.33	0.34
		2480	2.89	3.74	77.27	0.35
2DH5	Ant1	2402	2.88	3.75	76.80	0.35
		2441	2.89	3.75	77.07	0.35
		2480	2.88	3.75	76.80	0.35
3DH5	Ant1	2402	2.89	3.75	77.07	0.35
		2441	2.89	3.75	77.07	0.35
		2480	2.88	3.75	76.80	0.35

Test Graphs

DH5_Ant1_2402

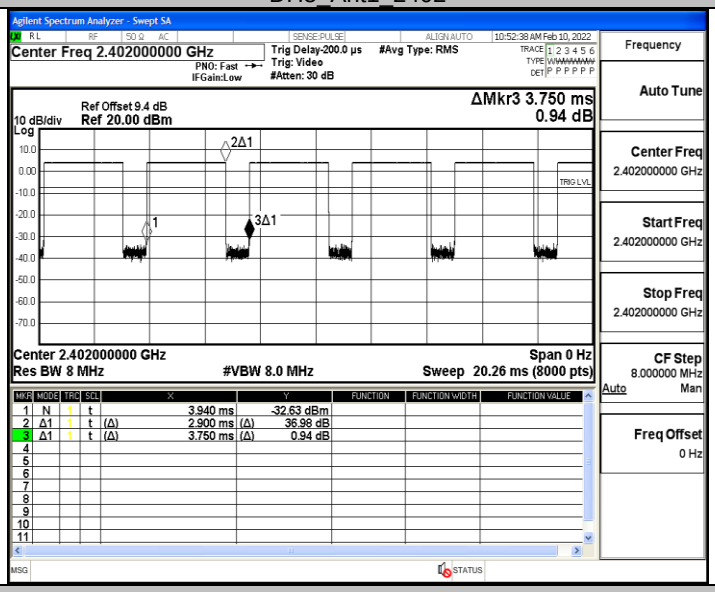

DH5_Ant1_2441

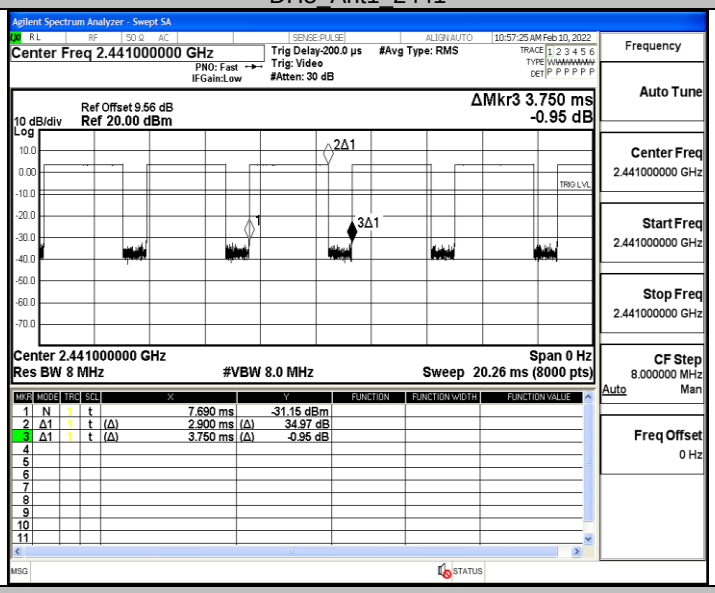

DH5_Ant1_2480

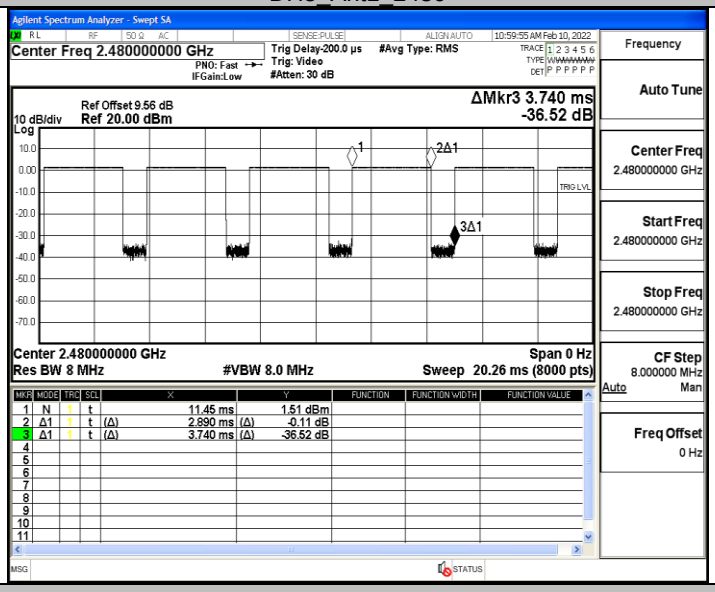

2DH5_Ant1_2402

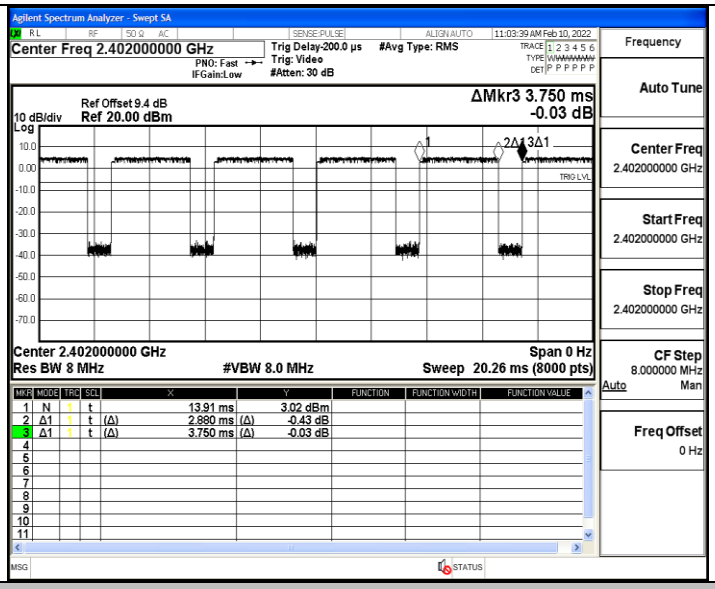

2DH5_Ant1_2441

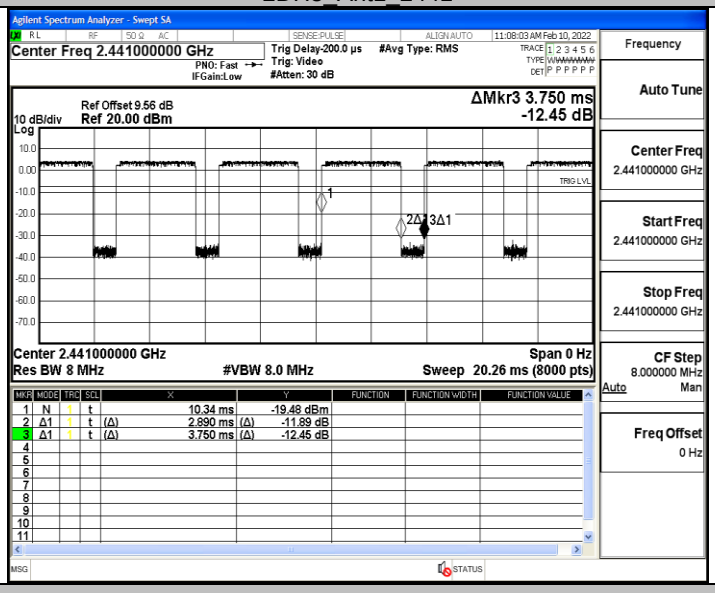

2DH5_Ant1_2480

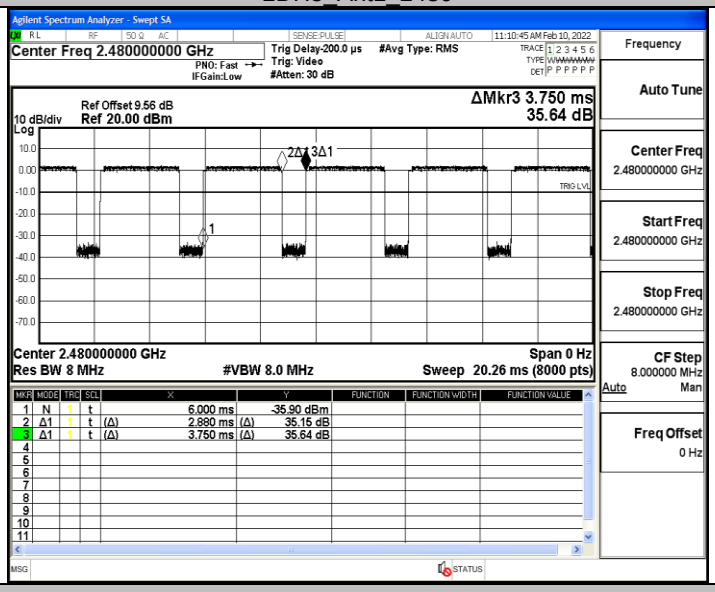

3DH5_Ant1_2402

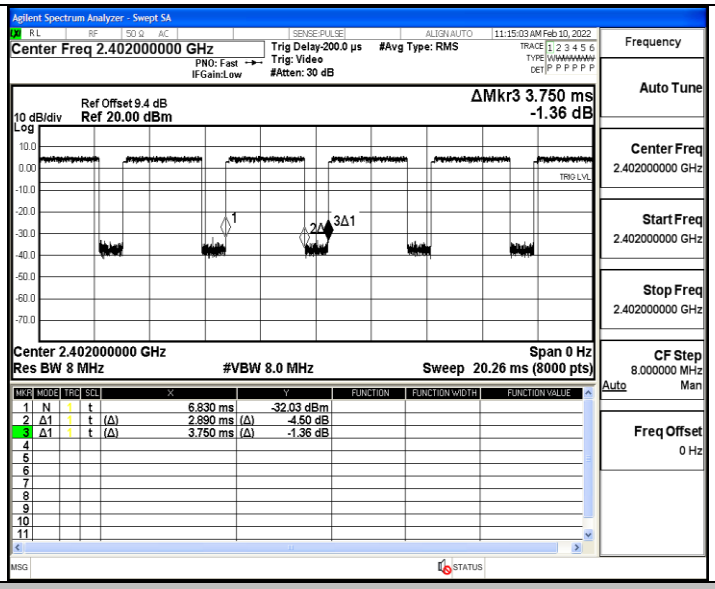

3DH5_Ant1_2441

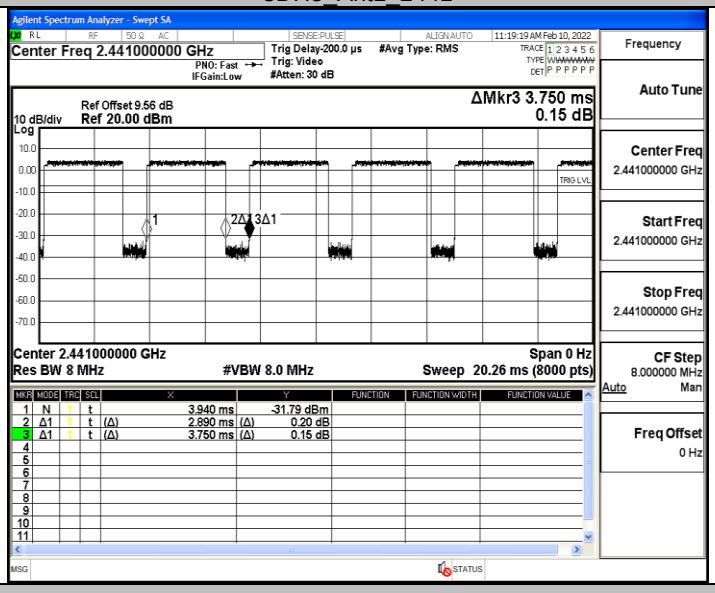

3DH5_Ant1_2480

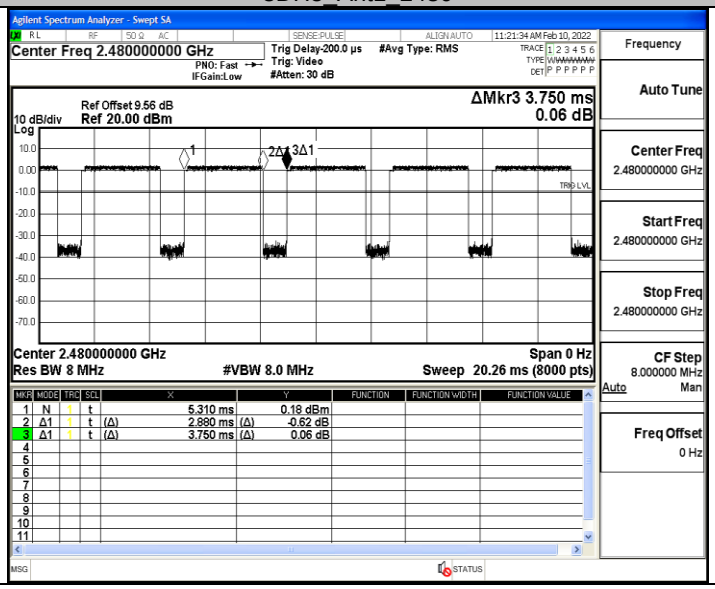

Appendix J: Emissions in Restricted Bands

Test Result

TestMode	Antenna	ChName	Channel	Detector	Freq(MHz)	Result(dBm)	Limit(dBm)	Verdict
DH5	Ant1	Low	2402	AV	2310.000	-49.36	≤-41.20	PASS
				AV	2389.565	-48.98	≤-41.20	PASS
				AV	2390.000	-49.07	≤-41.20	PASS
				Peak	2310.000	-42.27	≤-21.20	PASS
				Peak	2378.225	-38.54	≤-21.20	PASS
				Peak	2390.000	-41.37	≤-21.20	PASS
		High	2480	AV	2483.500	-48.19	≤-41.20	PASS
				AV	2483.520	-48.19	≤-41.20	PASS
				AV	2500.000	-48.33	≤-41.20	PASS
				Peak	2483.500	-39.78	≤-21.20	PASS
				Peak	2483.600	-38.66	≤-21.20	PASS
				Peak	2500.000	-41.63	≤-21.20	PASS
2DH5	Ant1	Low	2402	AV	2310.000	-49.42	≤-41.20	PASS
				AV	2381.270	-49	≤-41.20	PASS
				AV	2390.000	-49.08	≤-41.20	PASS
				Peak	2310.000	-42.48	≤-21.20	PASS
				Peak	2324.990	-39.27	≤-21.20	PASS
				Peak	2390.000	-41.89	≤-21.20	PASS
		High	2480	AV	2483.500	-47.3	≤-41.20	PASS
				AV	2483.520	-47.3	≤-41.20	PASS
				AV	2500.000	-48.41	≤-41.20	PASS
				Peak	2483.500	-40.9	≤-21.20	PASS
				Peak	2494.000	-39.07	≤-21.20	PASS
				Peak	2500.000	-41.45	≤-21.20	PASS
3DH5	Ant1	Low	2402	AV	2310.000	-49.38	≤-41.20	PASS
				AV	2373.815	-49.01	≤-41.20	PASS
				AV	2390.000	-49.11	≤-41.20	PASS
				Peak	2310.000	-42.3	≤-21.20	PASS
				Peak	2374.655	-38.78	≤-21.20	PASS
				Peak	2390.000	-42.92	≤-21.20	PASS
		High	2480	AV	2483.500	-47.24	≤-41.20	PASS
				AV	2483.520	-47.24	≤-41.20	PASS
				AV	2500.000	-48.4	≤-41.20	PASS
				Peak	2483.500	-38.78	≤-21.20	PASS
				Peak	2499.440	-38.66	≤-21.20	PASS
				Peak	2500.000	-41.15	≤-21.20	PASS

Note：

1. The Antenna Gain is compensated in the graph with 2dBi and Antenna Gain which is Higher.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs

DH5_Ant1_Low_2402_AV

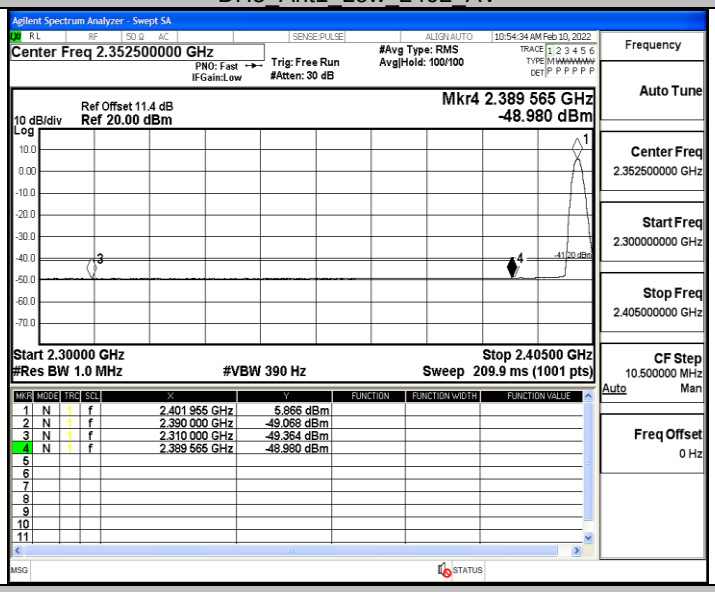

DH5_Ant1_Low_2402_Peak

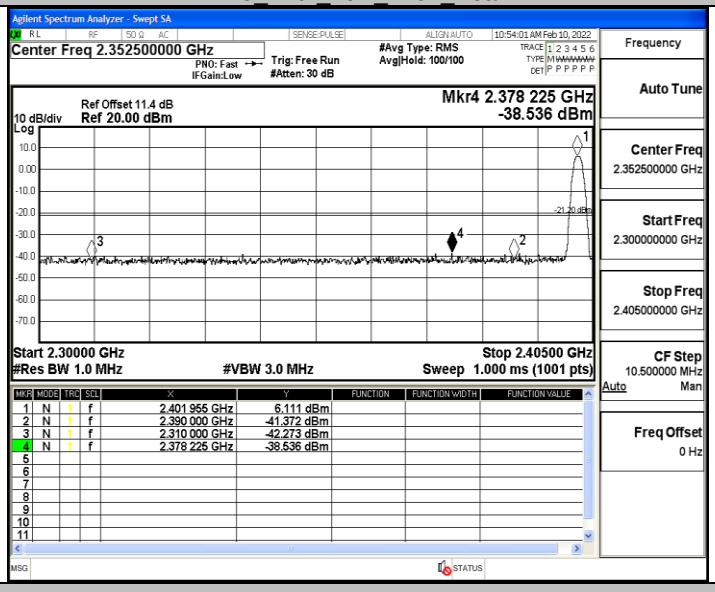

DH5_Ant1_High_2480_AV

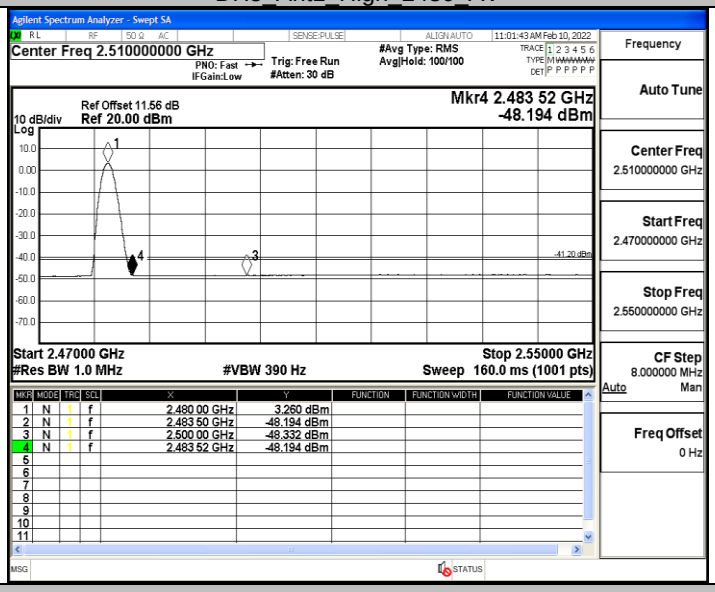

DH5_Ant1_High_2480_Peak

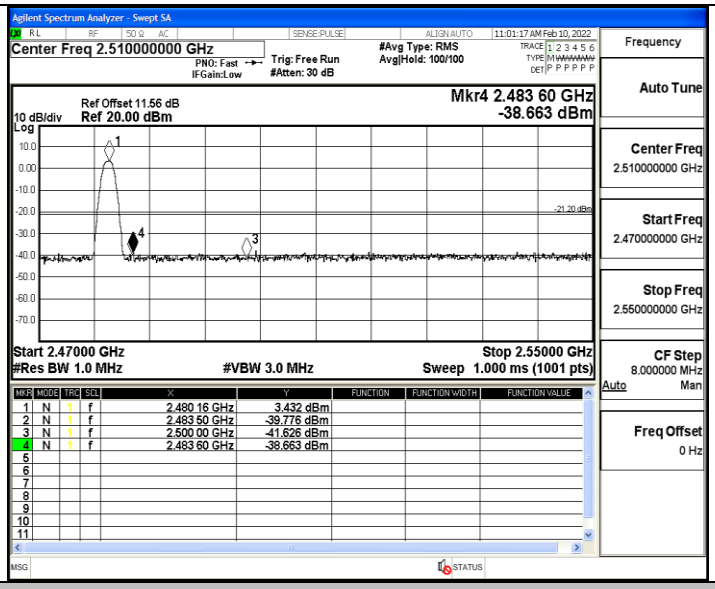

2DH5_Ant1_Low_2402_AV

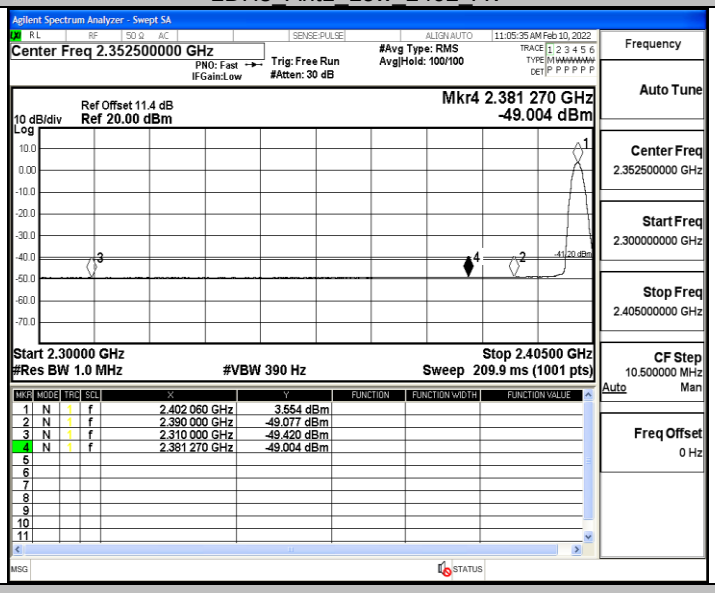

2DH5_Ant1_Low_2402_Peak

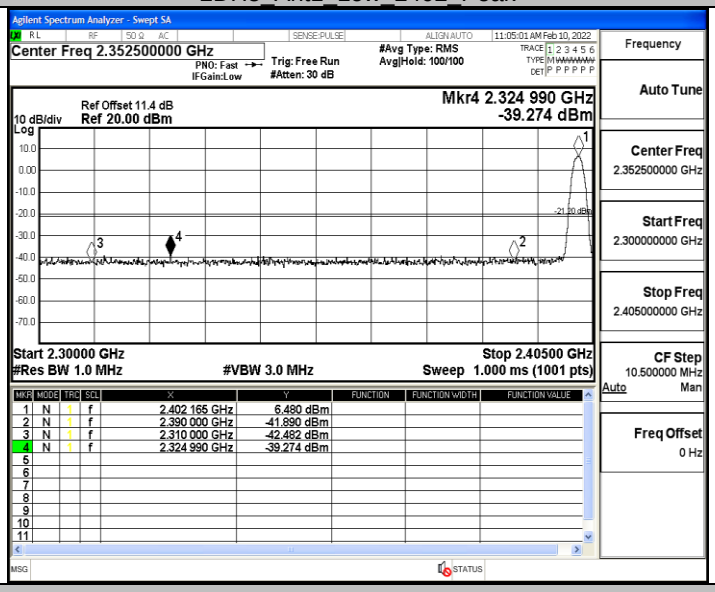

2DH5_Ant1_High_2480_AV

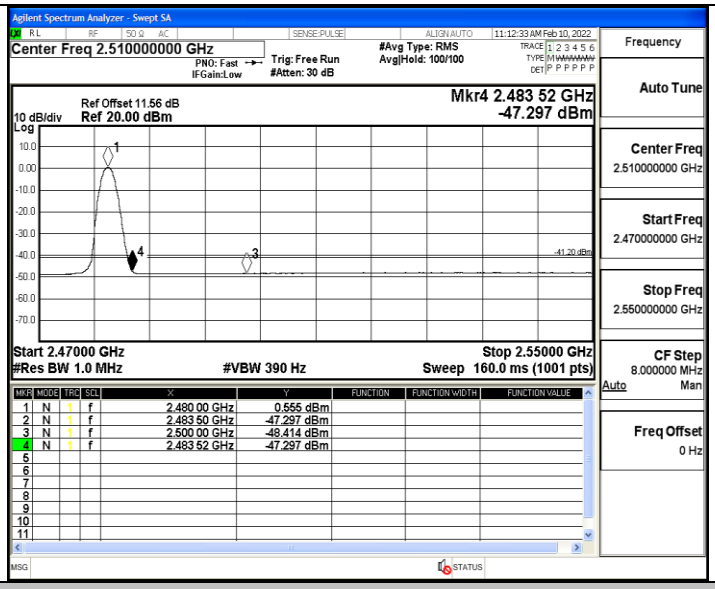

2DH5_Ant1_High_2480_Peak

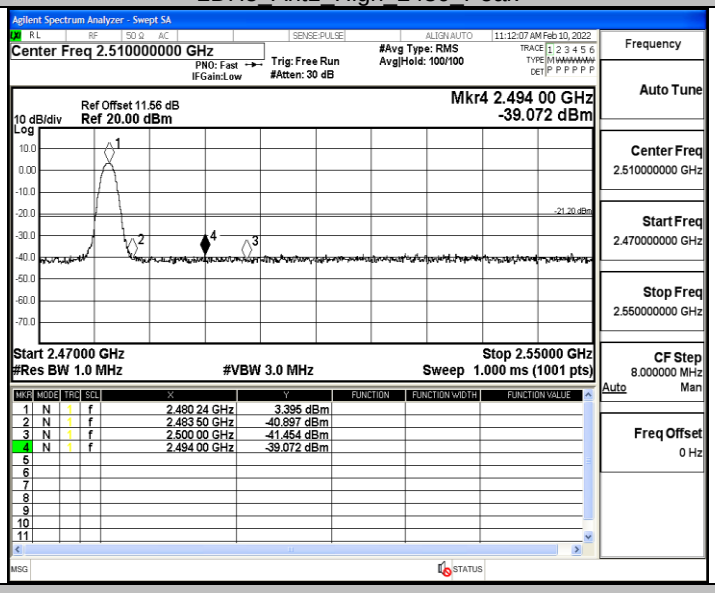

3DH5_Ant1_Low_2402_AV

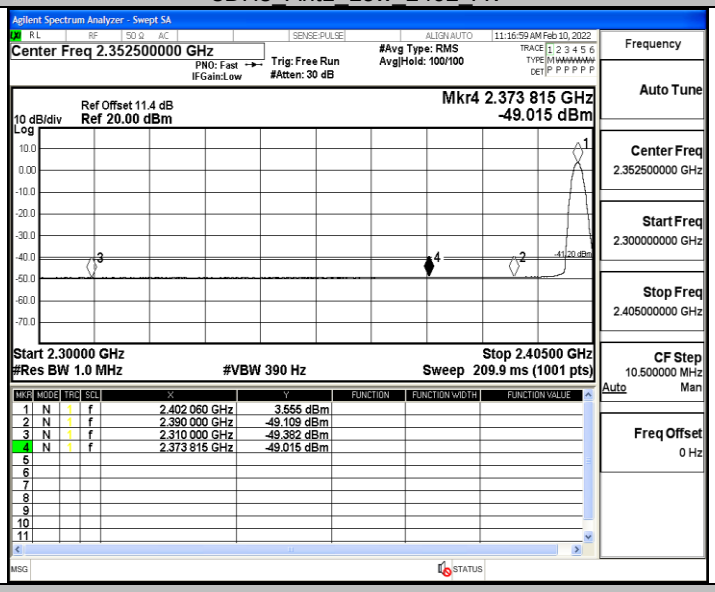

3DH5_Ant1_Low_2402_Peak

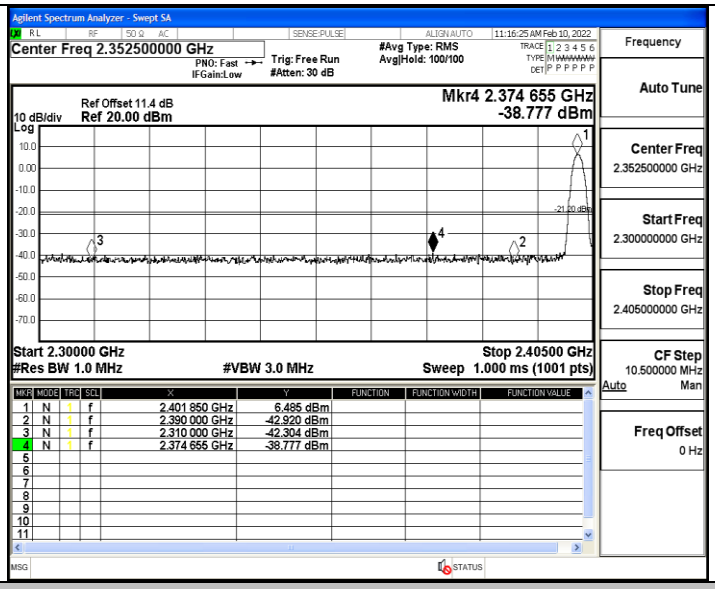

3DH5_Ant1_High_2480_AV

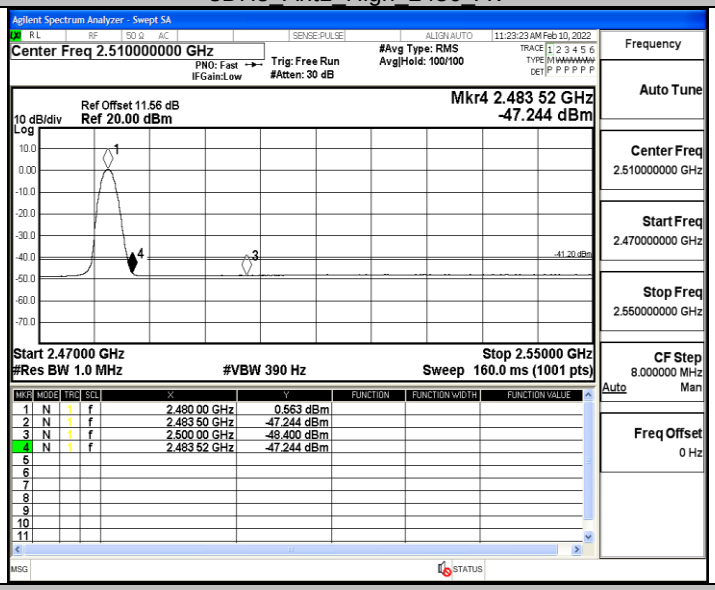

3DH5_Ant1_High_2480_Peak