


|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                   | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                             |                    |     |
| Ant. Pol.     | Horizontal                               |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5825 MHz (U-NII-3) |                    |     |
| Remark:       |                                          |                    |     |

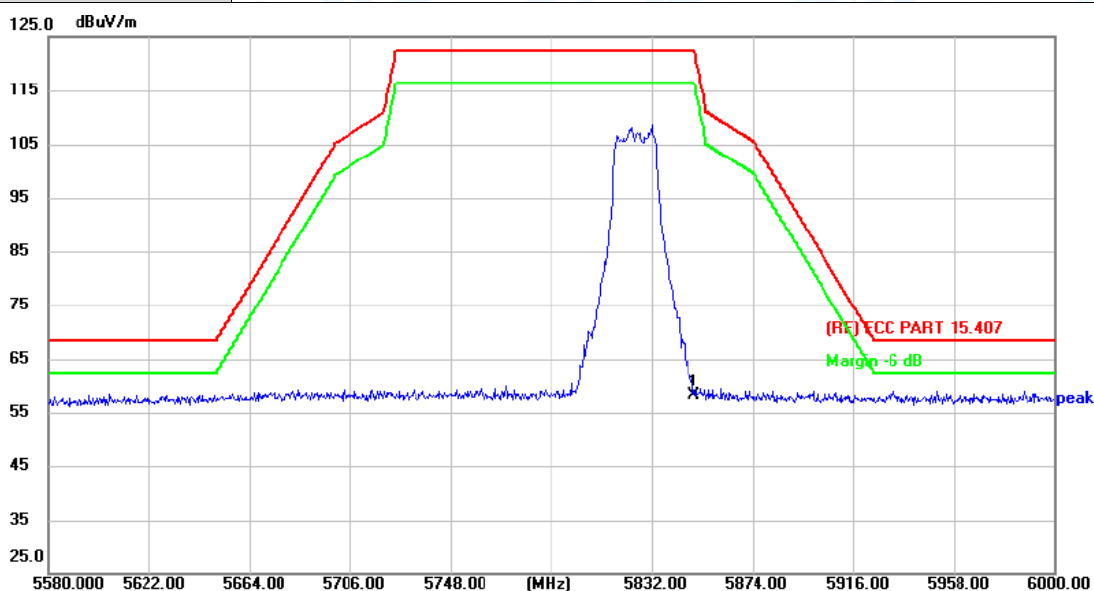


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 44.61          | 13.54         | 58.15          | 122.30         | -64.15      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                   | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                             |                    |     |
| Ant. Pol.     | Vertical                                 |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5825 MHz (U-NII-3) |                    |     |
| Remark:       |                                          |                    |     |

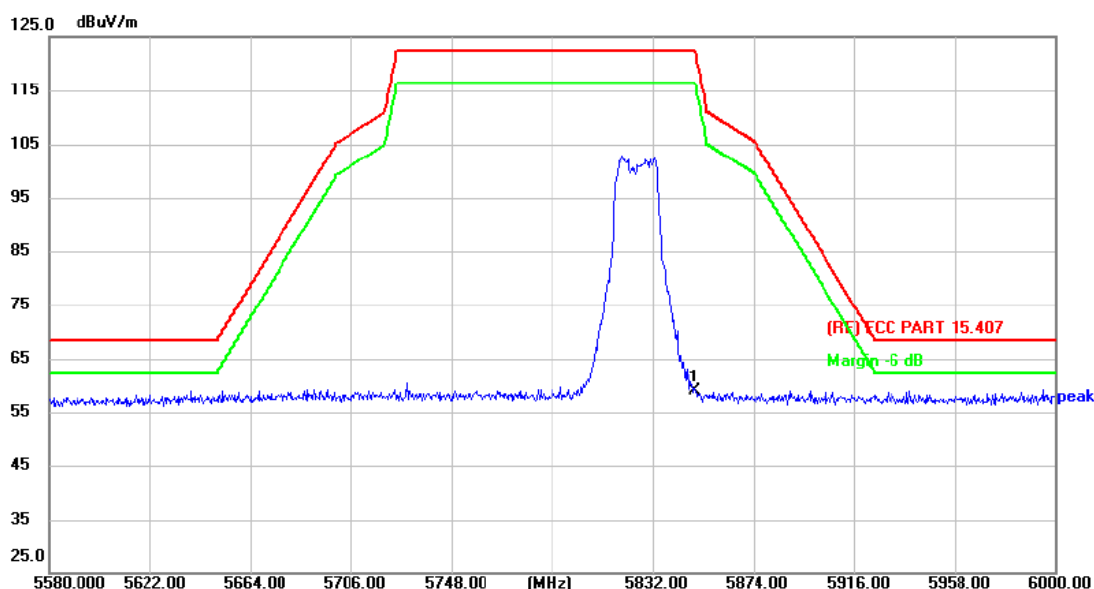


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                     | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Horizontal                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

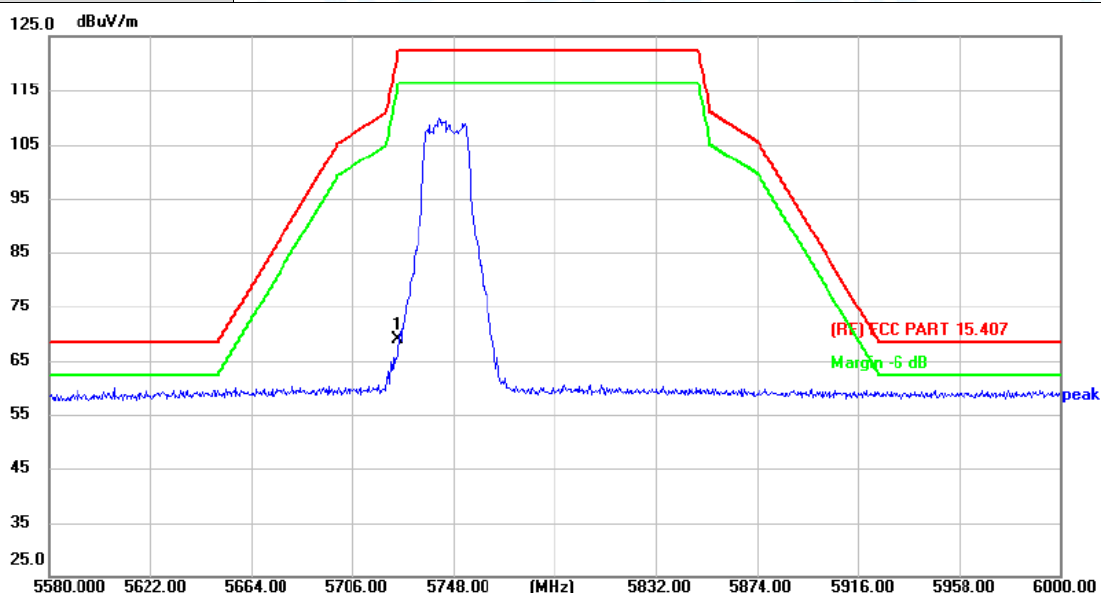


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 55.32          | 13.58         | 68.90          | 122.30         | -53.40      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                     | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Vertical                                   |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

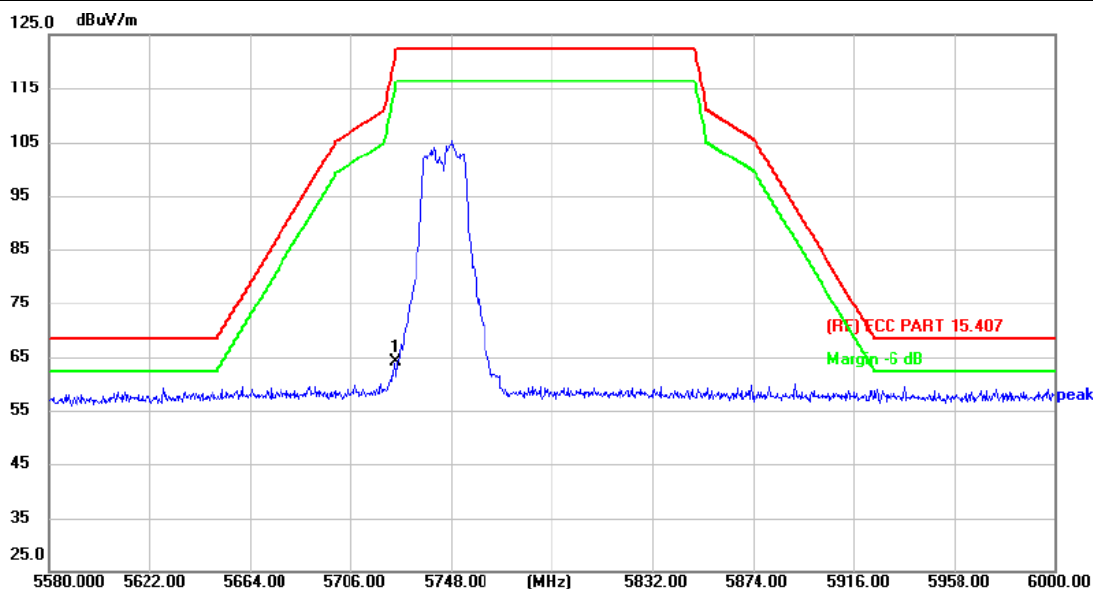


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 50.50          | 13.58         | 64.08          | 122.30         | -58.22      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                     | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Horizontal                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

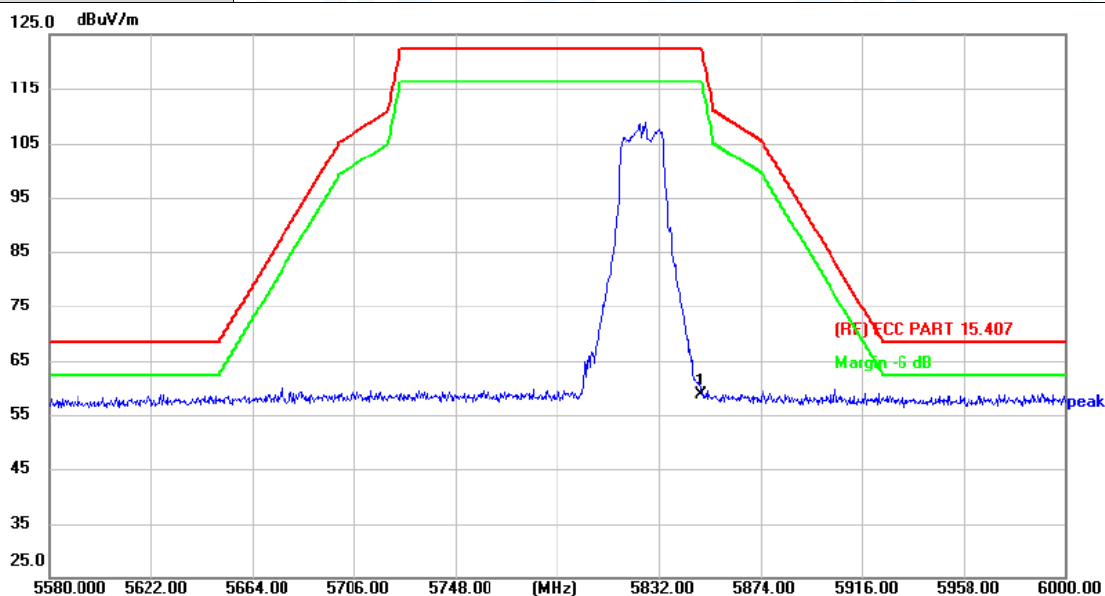


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 45.13          | 13.54         | 58.67          | 122.30         | -63.63      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                     | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Vertical                                   |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

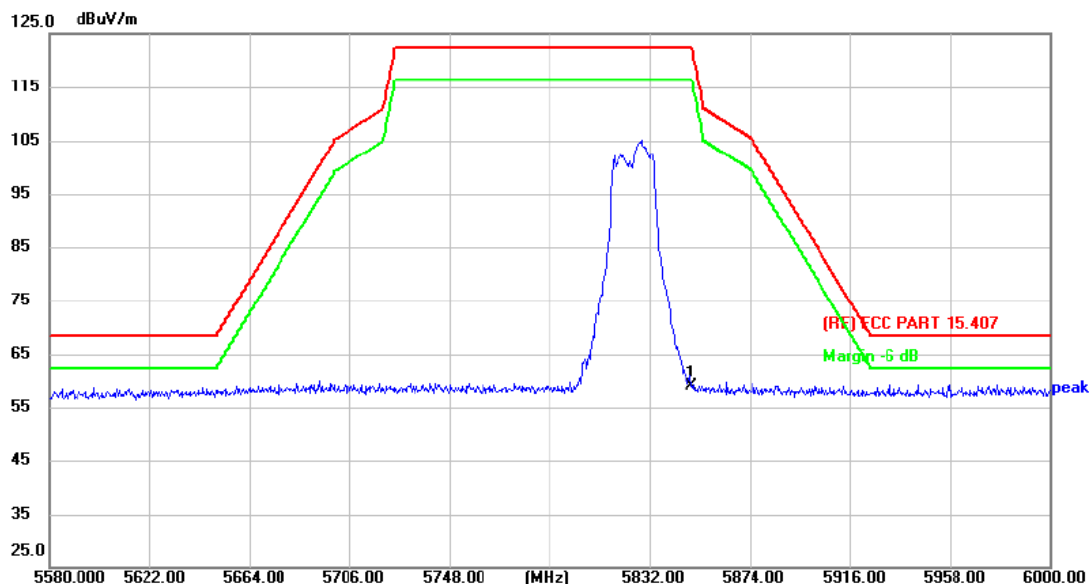


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 45.42          | 13.54         | 58.96          | 122.30         | -63.34      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Horizontal                                |                    |     |
| Test Mode:    | TX 802.11ax(HE20) Mode 5745 MHz (U-NII-3) |                    |     |
| Remark:       |                                           |                    |     |

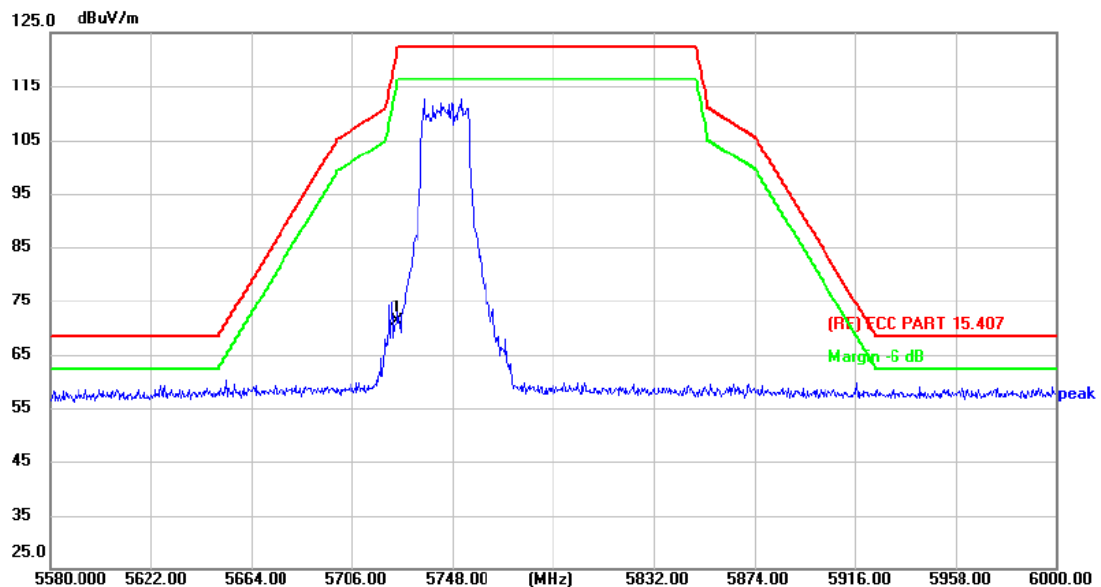


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 57.58          | 13.58         | 71.16          | 122.30         | -51.14      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Vertical                                  |                    |     |
| Test Mode:    | TX 802.11ax(HE20) Mode 5745 MHz (U-NII-3) |                    |     |
| Remark:       |                                           |                    |     |

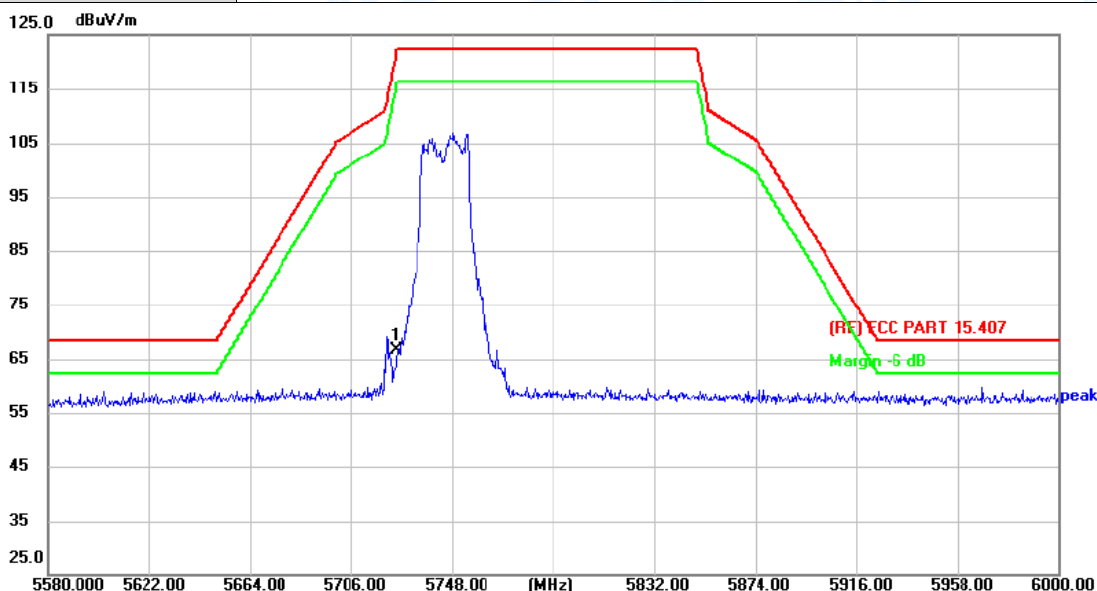


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 52.95          | 13.58         | 66.53          | 122.30         | -55.77      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Horizontal                                |                    |     |
| Test Mode:    | TX 802.11ax(HE20) Mode 5825 MHz (U-NII-3) |                    |     |
| Remark:       |                                           |                    |     |

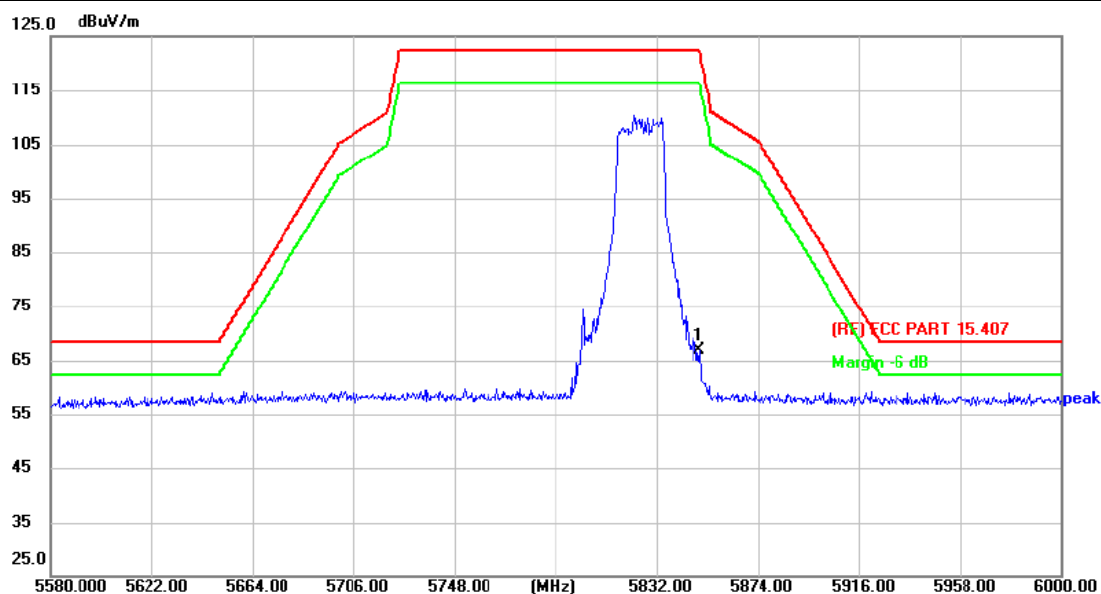


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 53.26          | 13.54         | 66.80          | 122.30         | -55.50      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Vertical                                  |                    |     |
| Test Mode:    | TX 802.11ax(HE20) Mode 5825 MHz (U-NII-3) |                    |     |
| Remark:       |                                           |                    |     |

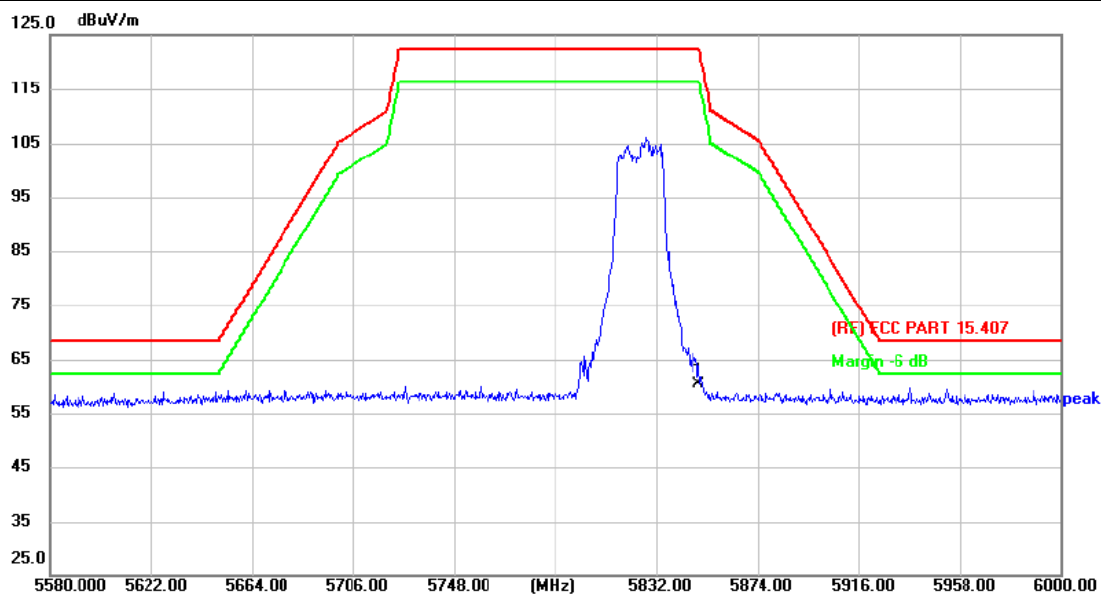


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 46.92          | 13.54         | 60.46          | 122.30         | -61.84      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                   | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                             |                    |     |
| Ant. Pol.     | Horizontal                               |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5755 MHz (U-NII-3) |                    |     |
| Remark:       |                                          |                    |     |

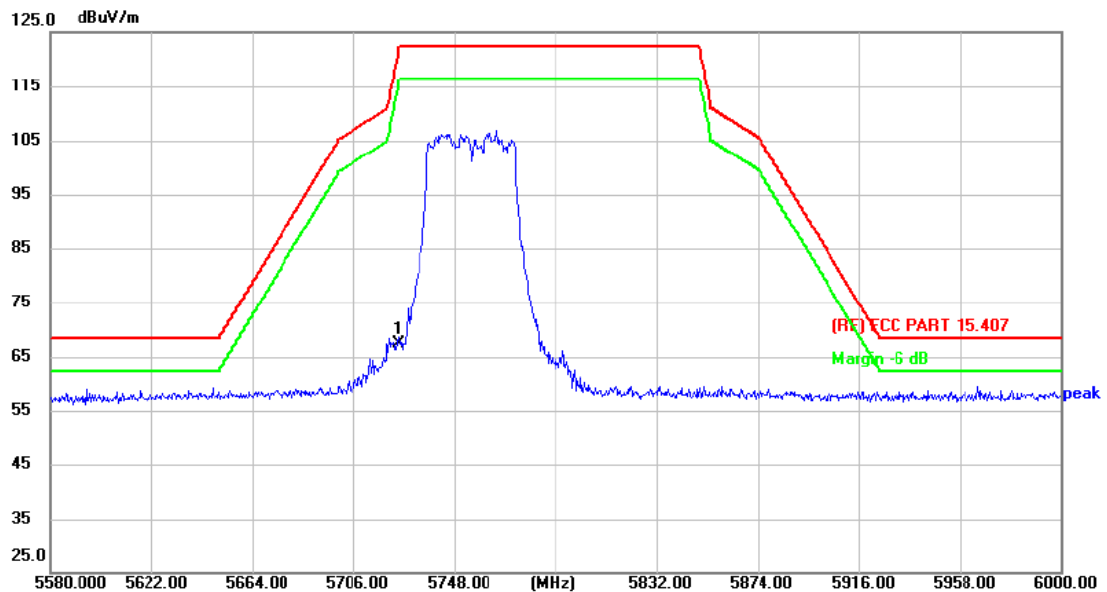


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 53.76          | 13.58         | 67.34          | 122.30         | -54.96      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                   | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                             |                    |     |
| Ant. Pol.     | Vertical                                 |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5755 MHz (U-NII-3) |                    |     |
| Remark:       |                                          |                    |     |

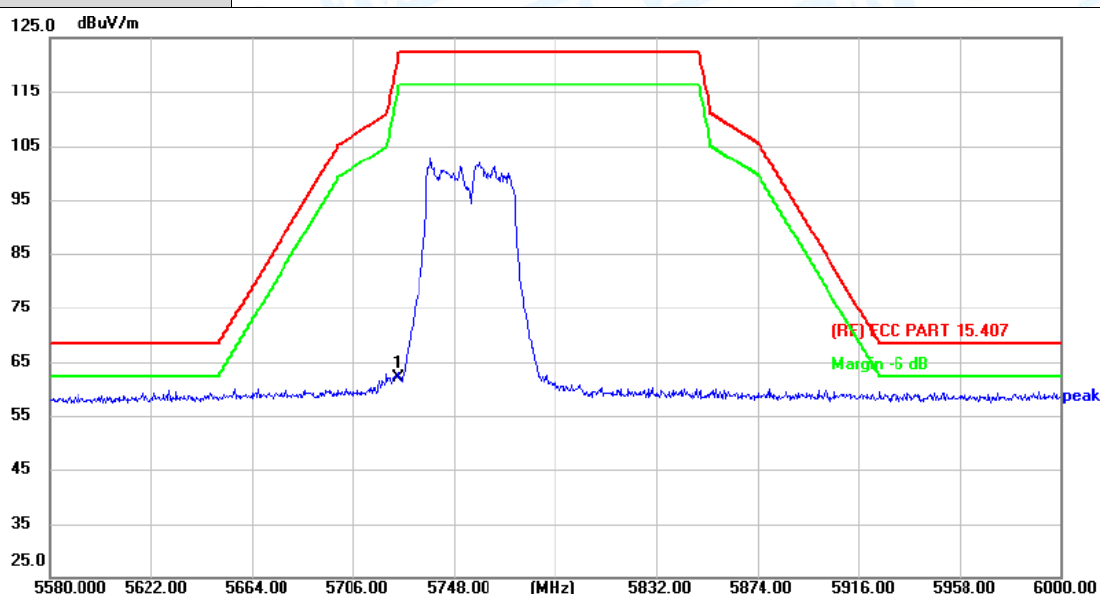


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 48.48          | 13.58         | 62.06          | 122.30         | -60.24      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                   | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                             |                    |     |
| Ant. Pol.     | Horizontal                               |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5795 MHz (U-NII-3) |                    |     |
| Remark:       |                                          |                    |     |

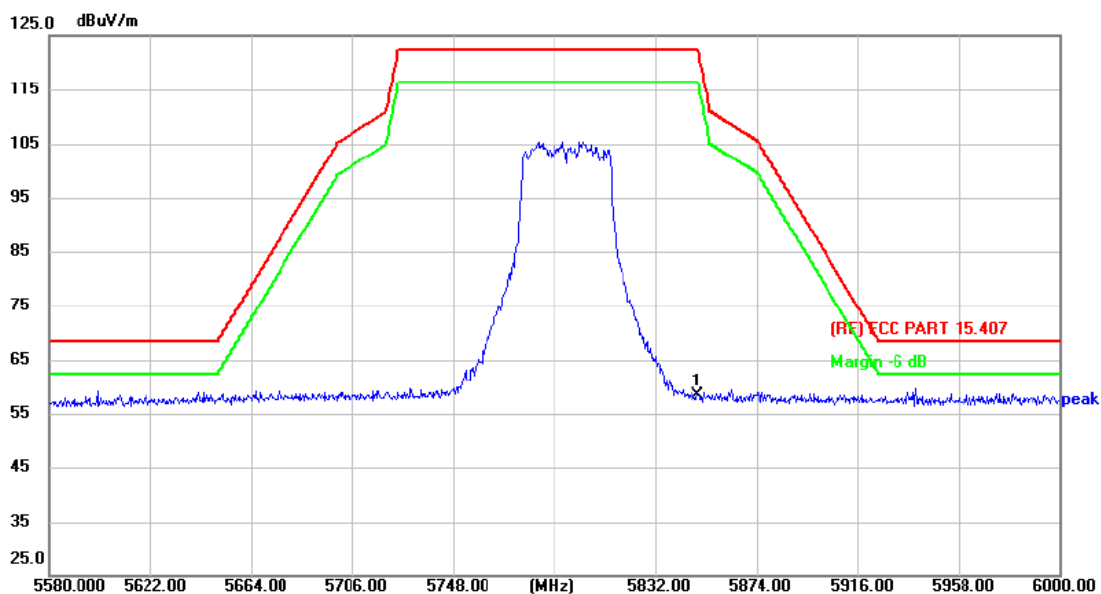


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 44.82          | 13.54         | 58.36          | 122.30         | -63.94      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                   | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                             |                    |     |
| Ant. Pol.     | Vertical                                 |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5795 MHz (U-NII-3) |                    |     |
| Remark:       |                                          |                    |     |

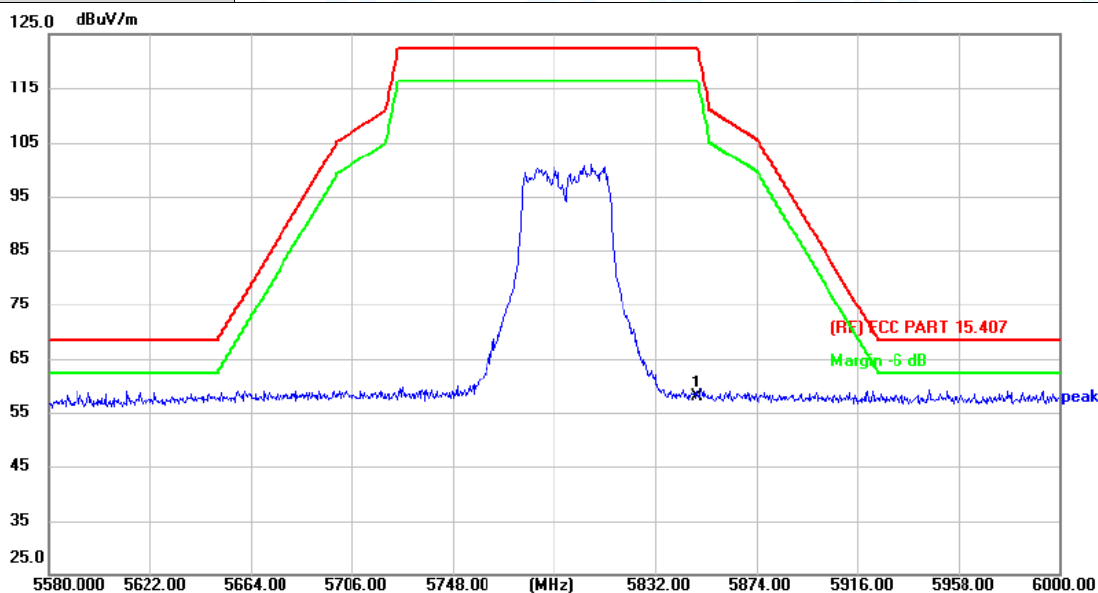


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 44.33          | 13.54         | 57.87          | 122.30         | -64.43      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                     | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Horizontal                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

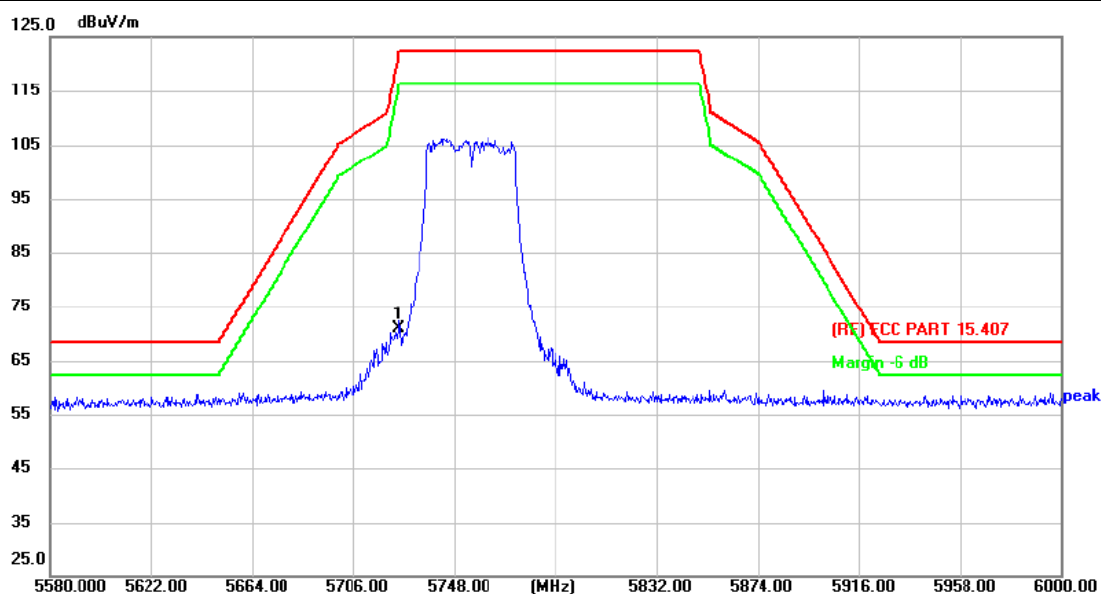


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 57.36          | 13.58         | 70.94          | 122.30         | -51.36      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                     | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Vertical                                   |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

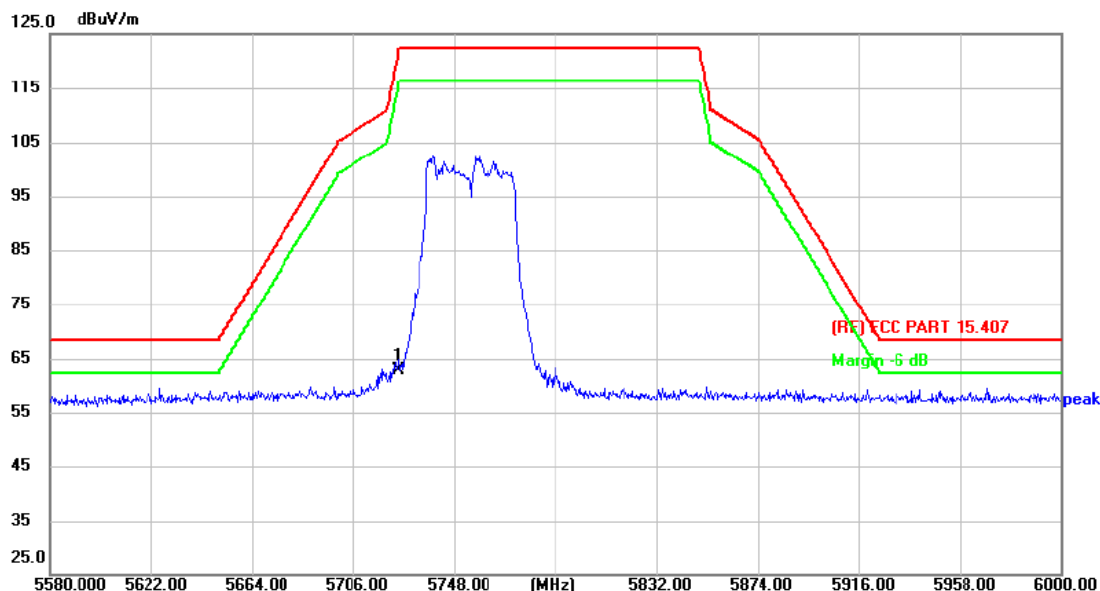


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 49.29          | 13.58         | 62.87          | 122.30         | -59.43      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                     | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Horizontal                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

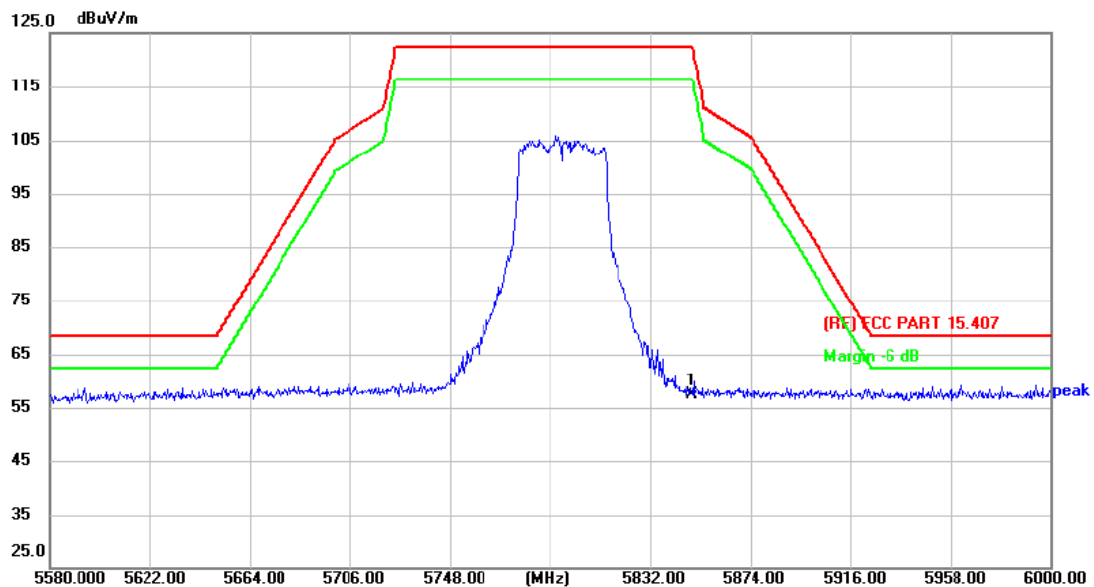


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                     | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Vertical                                   |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

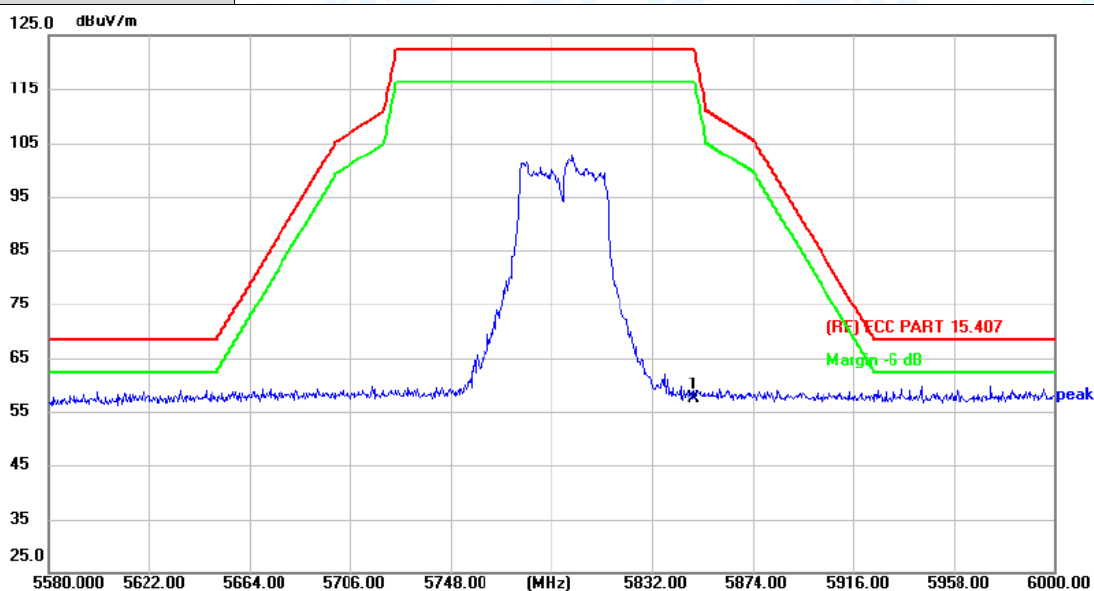


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 43.94          | 13.54         | 57.48          | 122.30         | -64.82      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Horizontal                                |                    |     |
| Test Mode:    | TX 802.11ax(HE40) Mode 5755 MHz (U-NII-3) |                    |     |
| Remark:       |                                           |                    |     |

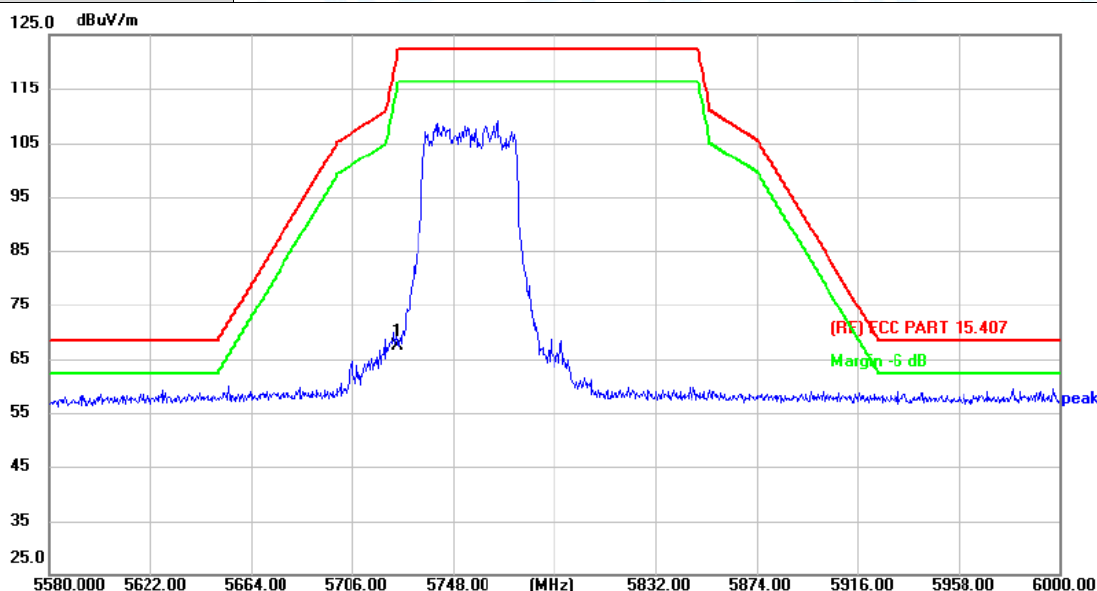


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 53.81          | 13.58         | 67.39          | 122.30         | -54.91      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Vertical                                  |                    |     |
| Test Mode:    | TX 802.11ax(HE40) Mode 5755 MHz (U-NII-3) |                    |     |
| Remark:       |                                           |                    |     |

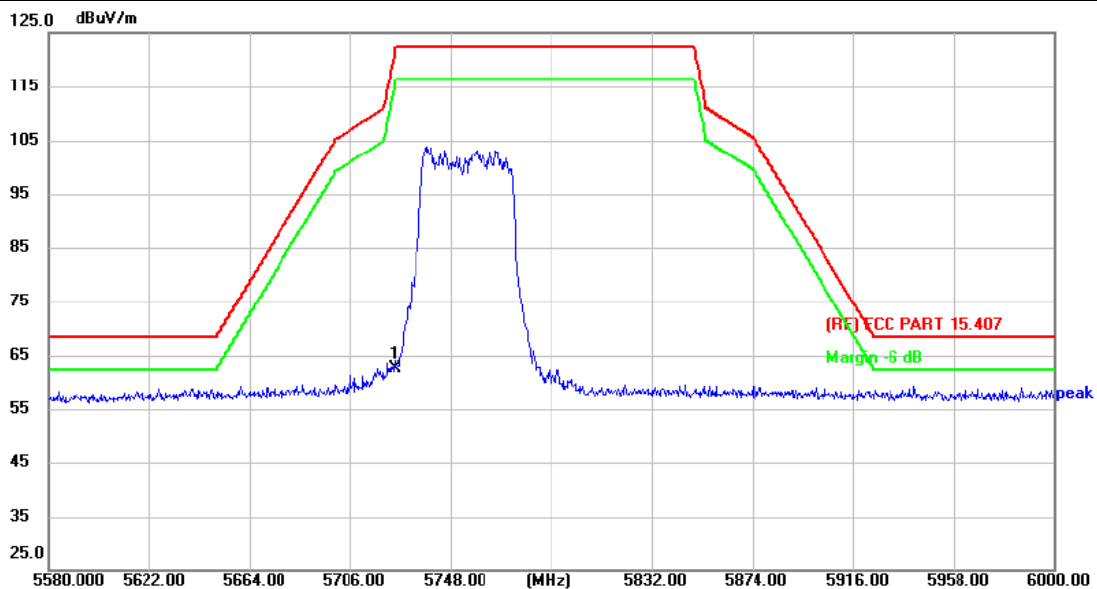


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 49.17          | 13.58         | 62.75          | 122.30         | -59.55      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Horizontal                                |                    |     |
| Test Mode:    | TX 802.11ax(HE40) Mode 5795 MHz (U-NII-3) |                    |     |
| Remark:       |                                           |                    |     |

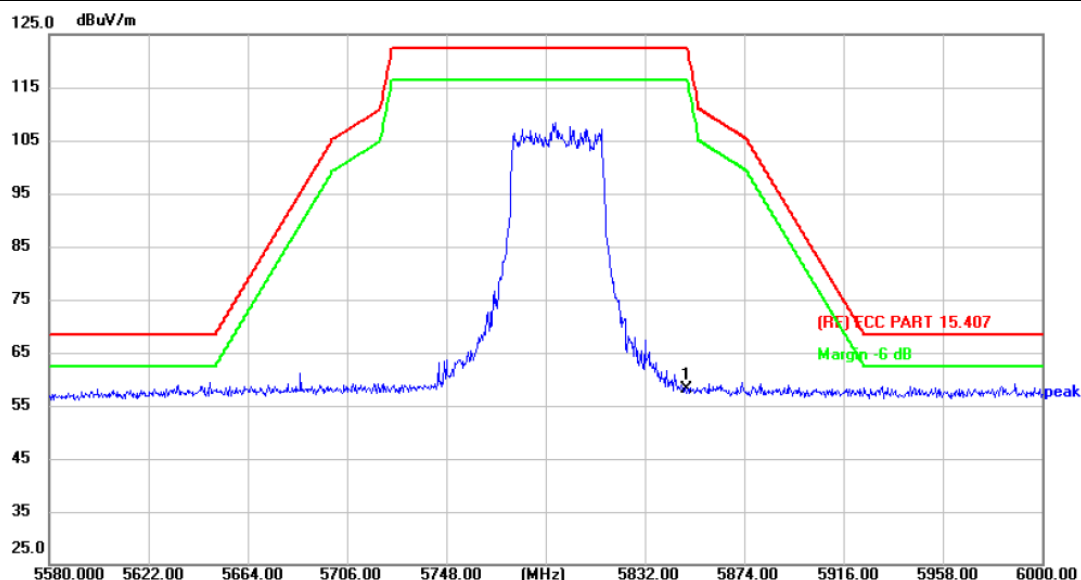


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 44.66          | 13.54         | 58.20          | 122.30         | -64.10      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Vertical                                  |                    |     |
| Test Mode:    | TX 802.11ax(HE40) Mode 5795 MHz (U-NII-3) |                    |     |
| Remark:       |                                           |                    |     |

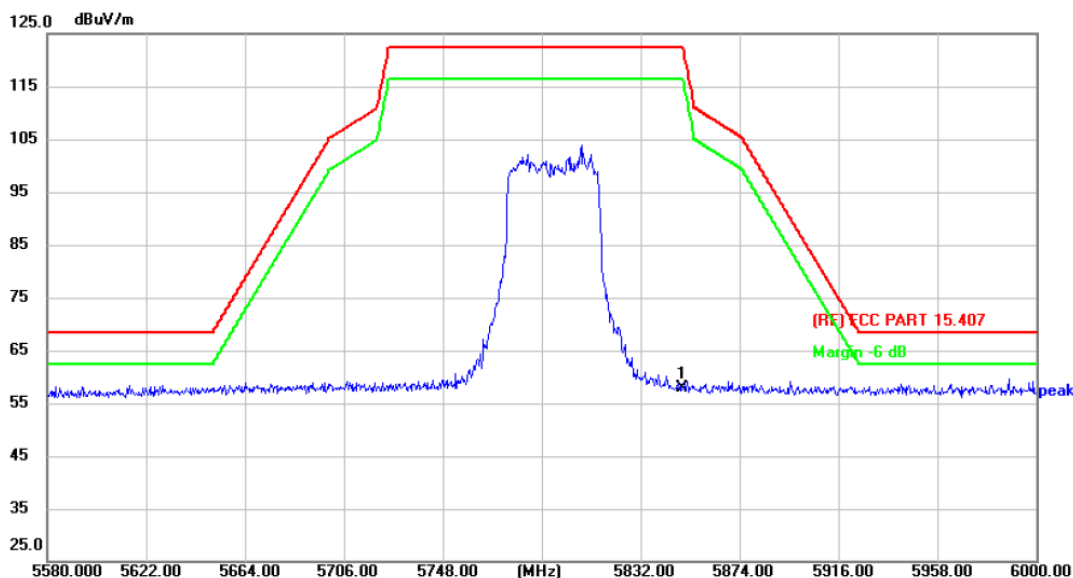


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 44.35          | 13.54         | 57.89          | 122.30         | -64.41      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                     | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Horizontal                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

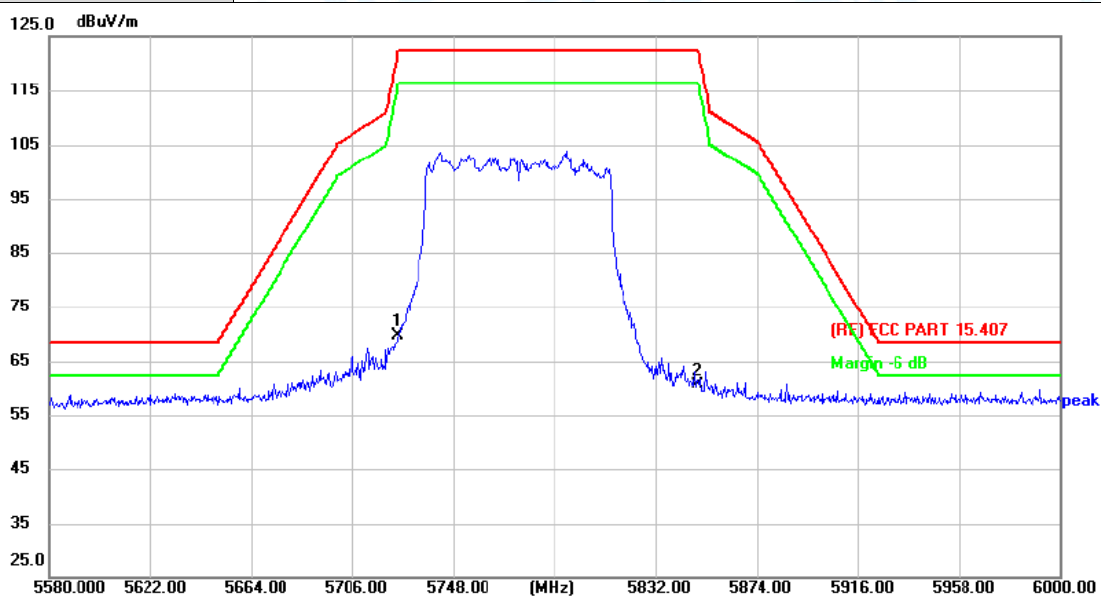


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 55.96          | 13.58         | 69.54          | 122.30         | -52.76      | peak     | P   |
| 2   | 5850.000        | 47.04          | 13.54         | 60.58          | 122.30         | -61.72      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                     | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Vertical                                   |                    |     |
| Test Mode:    | TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

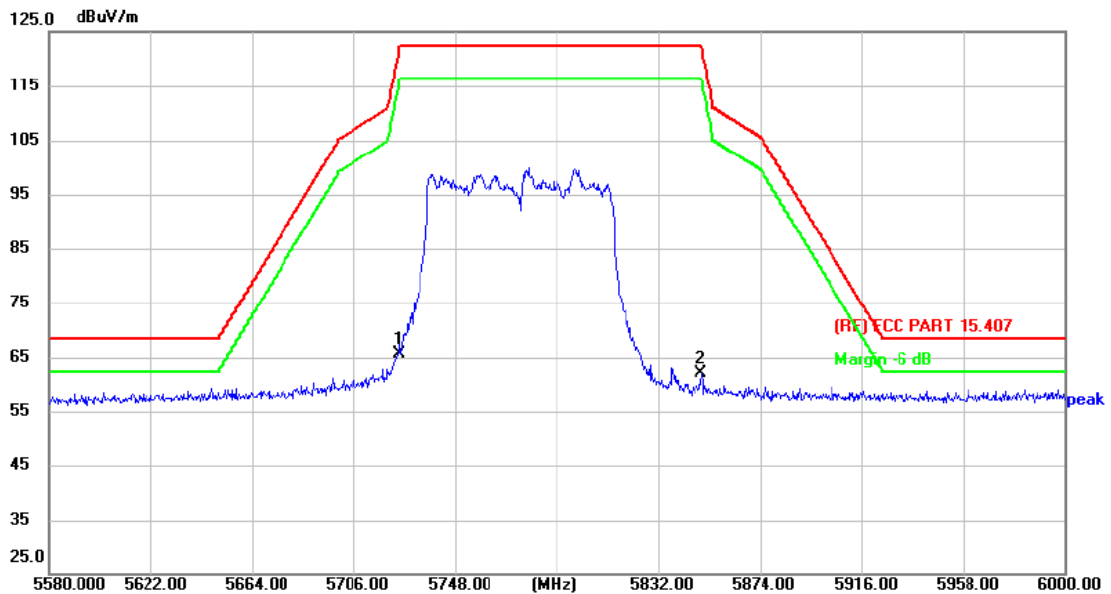


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 52.05          | 13.58         | 65.63          | 122.30         | -56.67      | peak     | P   |
| 2   | 5850.000        | 48.60          | 13.54         | 62.14          | 122.30         | -60.16      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Horizontal                                |                    |     |
| Test Mode:    | TX 802.11ax(HE80) Mode 5775 MHz (U-NII-3) |                    |     |
| Remark:       |                                           |                    |     |

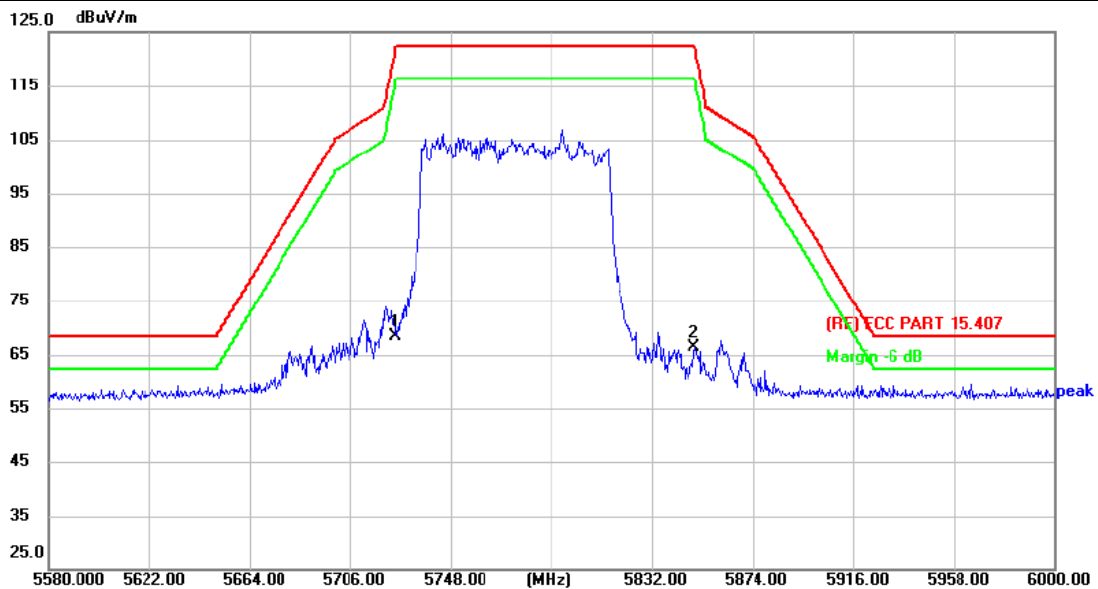


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 54.81          | 13.58         | 68.39          | 122.30         | -53.91      | peak     | P   |
| 2   | 5850.000        | 52.80          | 13.54         | 66.34          | 122.30         | -55.96      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.9°C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Vertical                                  |                    |     |
| Test Mode:    | TX 802.11ax(HE80) Mode 5775 MHz (U-NII-3) |                    |     |
| Remark:       |                                           |                    |     |

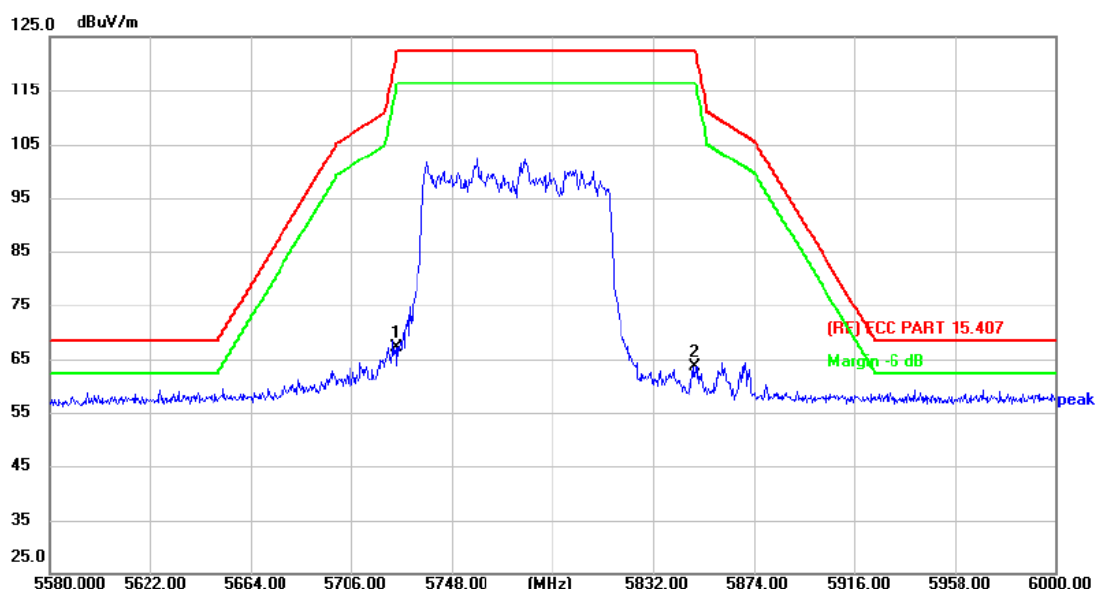

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 53.55          | 13.58         | 67.13          | 122.30         | -55.17      | peak     | P   |
| 2   | 5850.000        | 50.11          | 13.54         | 63.65          | 122.30         | -58.65      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)

-----END OF REPORT-----

