

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)



## Test Report

Product Name: LICENSED BROADCAST TRANSMITTER

FCC ID: JFZT341C

Applicant:

**AUDIO TECHNICA CORPORATION  
2206 NARUSE, MACHIDA  
TOKYO 194  
JAPAN**

**Date Receipt: JANUARY 21, 2004**

**Date Tested: FEBRUARY 12, 2004**

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT341C

REPORT #: A\AudioTechnica\_JFZ\70UT4\70UT4TestReport.doc

COVER SHEET

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## TABLE OF CONTENTS LIST

### TEST REPORT CONTAINING:

PAGE 1.....	GENERAL INFORMATION & TECHNICAL DESCRIPTION
PAGE 2.....	TECHNICAL DESCRIPTION & RF OUTPUT POWER
PAGE 3.....	AUDIO FREQUENCY RESPONSE GRAPH
	AUDIO LOW PASS FILTER
PAGE 4.....	MODULATION LIMITING GRAPH
PAGE 5.....	OCCUPIED BANDWIDTH
PAGE 6.....	OCCUPIED BANDWIDTH PLOT
PAGE 7-9.....	RADIATED EMISSIONS TEST DATA
PAGE 10.....	METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS
PAGE 11.....	FREQUENCY STABILITY TEST DATA
PAGE 12-13.....	EQUIPMENT LIST

### EXHIBITS INCLUDING:

CONFIDENTIALITY LETTER  
BLOCK DIAGRAM  
SCHEMATICS  
PARTS LIST  
USERS MANUAL  
LABEL SAMPLE & LOCATION  
EXTERNAL PHOTOGRAPHS  
INTERNAL PHOTOGRAPHS  
TUNING PROCEDURE  
OPERATIONAL DESCRIPTION  
TEST SET UP PHOTOGRAPH

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT341C

REPORT #: A\AudioTechnica\_JFZ\70UT4\70UT4TestReport.doc

TABLE OF CONTENTS

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## GENERAL INFORMATION REQUIRED FOR TYPE ACCEPTANCE

2.1033(c)(1)(2) AUDIO TECHNICA CORPORATION will manufacture the T341C in quantity, for use under FCC RULES PART 74.801, LOW POWER AUXILIARY STATIONS.

AUDIO TECHNICA CORPORATION  
2206 NARUSE, MACHIDA  
TOKYO, 194  
JAPAN

2.1033

## TECHNICAL DESCRIPTION

(c)(3) Instruction book. The instruction manual is included in the exhibits.

(c)(4) Type of Emission: 130K0F3E

$B_n = 2M + 2DK$   
 $M = 20000$   
 $D = 45\text{kHz (Peak Deviation)}$   
 $K = 1$   
 $B_n = 2(20k) + 2(45k)(1) = 130k$

ALLOWED AUTHORIZED BANDWIDTH = 200kHz.  
74.861(e)(5)

(c)(5) Frequency Range: Part 74: 541.5 - 566.375 MHz

(c)(6) Power Range and Controls: UNIT has no controls.

(c)(7) Maximum Output Power Rating: .020 Watts into 50 ohms resistive load.

(c)(8) DC Voltages and Current into Final Amplifier:

FINAL AMPLIFIER ONLY  
9.0V BATTERY  
 $V_{ce} = 9.0 \text{ Volts}$   
 $I_{ce} = 28 \text{ mA.}$

(c)(9) Tune-up procedure. The tune-up procedure is given in the exhibits.

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT341C

REPORT #: A\AudioTechnica\_JFZ\70UT4\70UT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45


Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

- (c)(10) Complete Circuit Diagrams: The circuit diagram and block diagram are included in the exhibits.
- 2.1033(c)(11) Photo or Drawing of Label and sketch of location:  
See the exhibits.
- 2.1033(c)(12) Photos of Equipment:  
See the exhibits.
- (c)(13) Description of all circuitry and devices provided for determining and stabilizing frequency.
- Description of any circuits or devices employed for suppression of spurious radiation, for limiting modulation, and for limiting power is included in the exhibits.
- Limiting Power:  
There is no provision for limiting power.
- (13) Digital modulation. This unit does not use digital modulation.
- 2.1033(c)(14) The data required by 2.1046 through 2.1057 is submitted below.
- 2.1046 **RF power output.**
- RF power measured is:  
OUTPUT POWER: .10 WATTS

## R.F. POWER OUTPUT TEST PROCEDURE

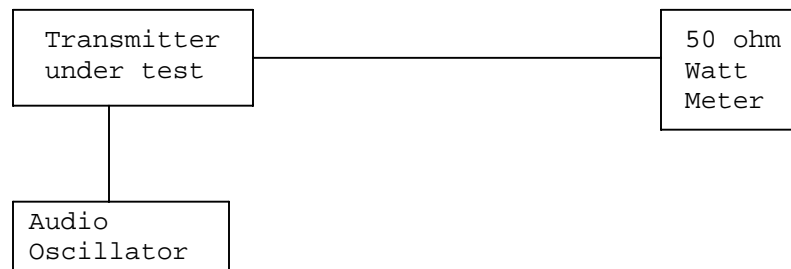

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT341C

REPORT #: A\AudioTechnica\_JFZ\70UT4\70UT4TestReport.doc

Page 2 of 13

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)


2.1047(a)(b) Modulation characteristics:

## AUDIO FREQUENCY RESPONSE

The audio frequency response was measured in accordance with TIA/EIA Specification 603.

The audio frequency response curve is shown below.

## AUDIO FREQUENCY RESPONSE GRAPH

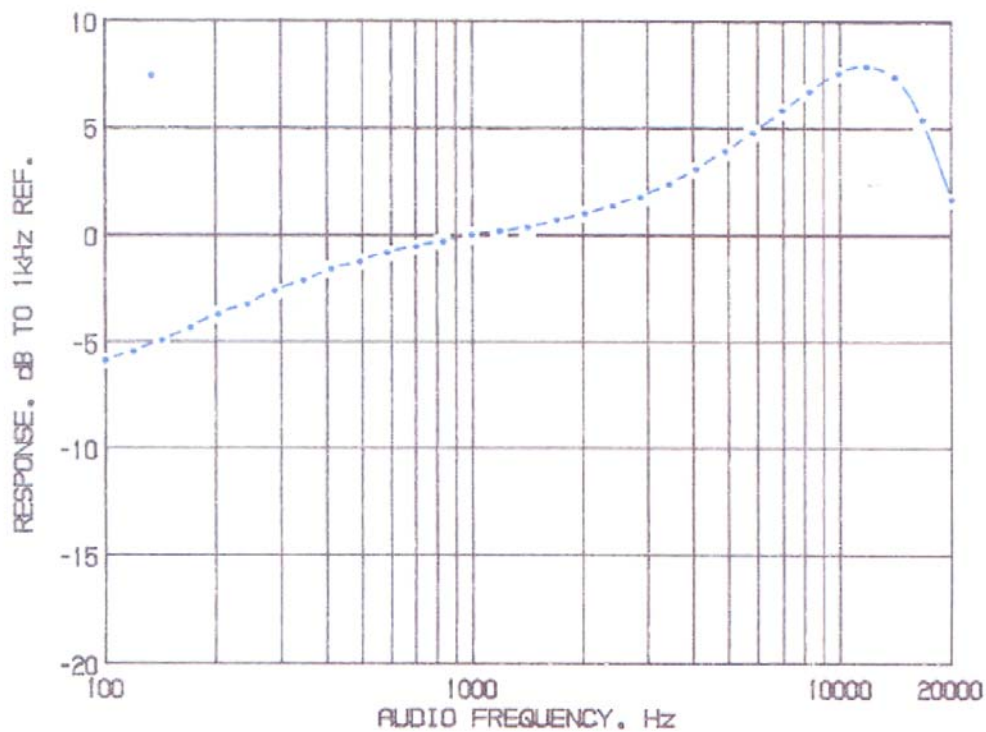

## AUDIO LOW PASS FILTER

The audio low pass filter is not required in this unit.

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT341C

REPORT #: A\AudioTechnica\_JFZ\70UT4\70UT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>


888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

2.1047(b)  
74.861 (e)

## Audio input versus modulation

A plot of the audio input versus deviation is shown in the following plots.

### MODULATION LIMITING

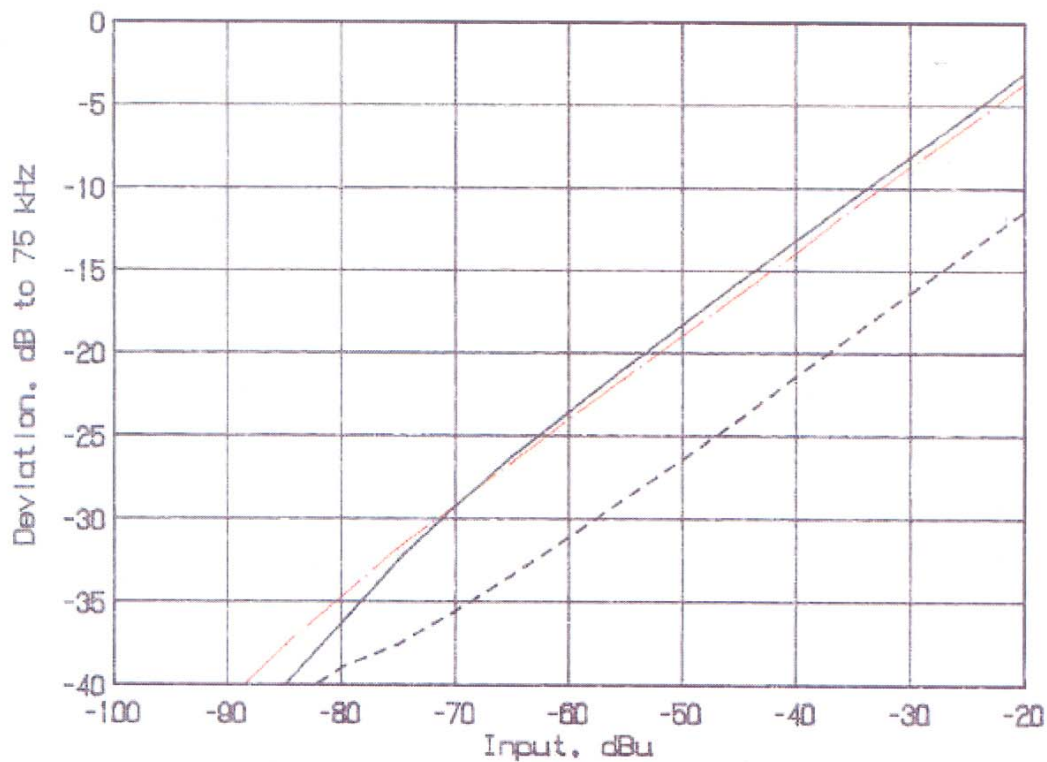

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT341C

REPORT #: A\AudioTechnica\_JFZ\70UT4\70UT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

2.1049(c)


## Occupied Bandwidth:

Data in the plots show that all sidebands between 50 & 100% for the authorized bandwidth are attenuated by at least 25dB. From 100 to 250% of the authorized bandwidth they are attenuated by at least 35dB and beyond 250%  $43 \log(P_o)$  dB. The plot shows the transmitter modulated with 15000 Hz (the highest modulation frequency), adjusted for 50% modulation plus 16 dB. The spectrum analyzer was set with the un-modulated carrier at the top of the screen. The test procedure diagram and occupied bandwidth plots follow.

Wireless Microphone transmitter:

Test procedure diagram

## OCCUPIED BANDWIDTH MEASUREMENT

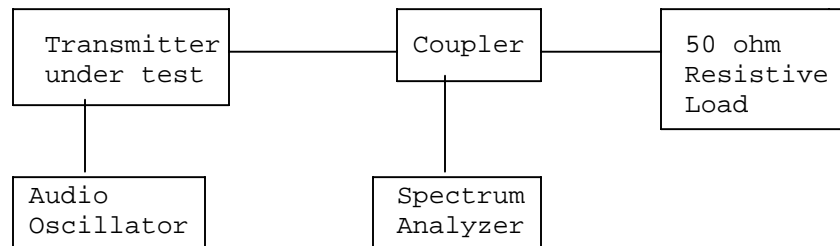

REQUIREMENT: PART 74: 200kHz EMISSION BANDWIDTH.

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT341C

REPORT #: A\AudioTechnica\_JFZ\70UT4\70UT4TestReport.doc

# TIMCO ENGINEERING INC.


849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## OCCUPIED BANDWIDTH

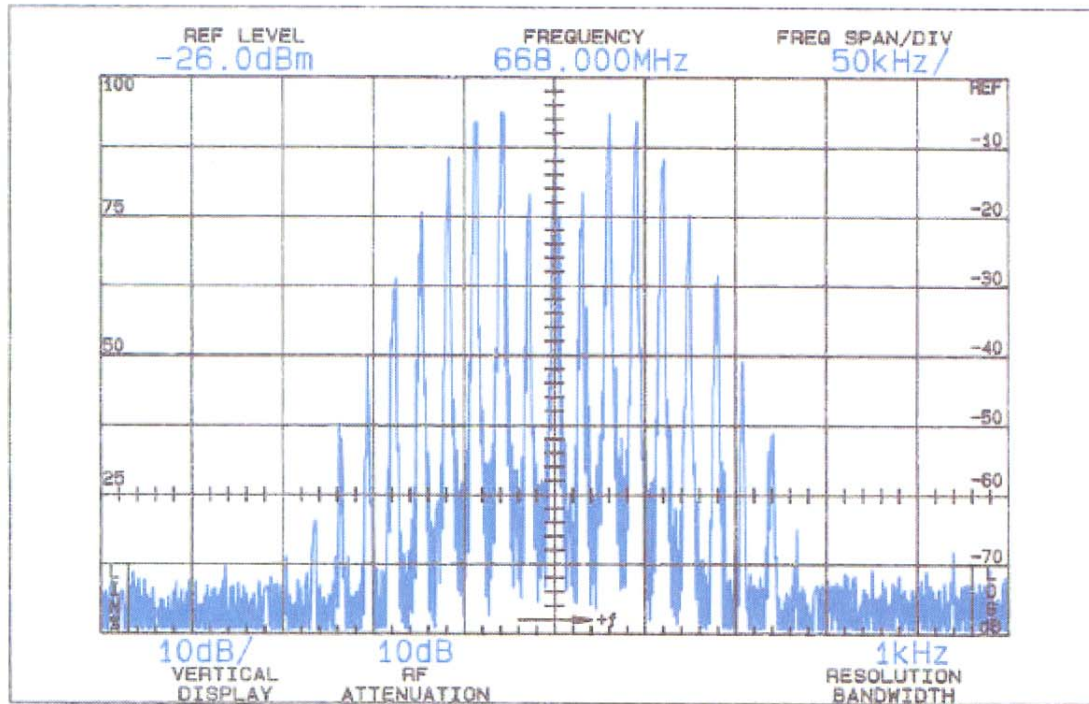

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT341C

REPORT #: A\AudioTechnica\_JFZ\70UT4\70UT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

2.1051 Spurious emissions at antenna terminals (conducted):  
Not Applicable no antenna connector.

2.1053(a)(b) Field strength of spurious emissions:

**NAME OF TEST:** RADIATED SPURIOUS EMISSIONS (541.5 MHz)

**REQUIREMENTS:** Emissions must be 43 +10log(Po) dB below the  
mean power output of the transmitter.

$$43 + 10\log(0.10) = 23.00 \text{ dB}$$

**TEST DATA:**

Emission Frequency MHz	Ant. Polarity	Corrected EUT Signal Reading	Coax Loss (dB)	Substitution Antenna (dBd)	dB Below Carrier (dBc)
541.50	V	9.00	0	0	0
1083.00	V	-49.20	1.02	3.28	55.93
1624.50	V	-49.30	1.12	5.05	54.38
2166.00	V	-53.39	1.23	5.81	57.81
2707.50	V	-46.20	1.32	6.92	49.60
3249.00	V	-48.10	1.37	7.35	51.13
3790.50	V	-47.70	1.43	7.61	50.52
4332.00	V	-47.80	1.48	8.05	50.23
4873.50	V	-44.20	1.57	7.80	46.97
5415.00	V	-50.70	1.68	8.23	53.15

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT341C

REPORT #: A\AudioTechnica\_JFZ\70UT4\70UT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## 2.1053(a)(b) Field strength of spurious emissions:

**NAME OF TEST:** RADIATED SPURIOUS EMISSIONS (553.875 MHz)

**REQUIREMENTS:** Emissions must be 43 +10log(Po) dB below the mean power output of the transmitter.

$$43 + 10\log(0.10) = 23.00 \text{ dB}$$

### TEST DATA:

Emission Frequency MHz	Ant. Polarity	Corrected EUT Signal Reading	Coax Loss (dB)	Substitution Antenna (dBd)	dB Below Carrier (dBc)
553.88	V	9.10	0	0	0
1107.75	V	-54.50	1.02	3.38	61.24
1661.63	V	-52.30	1.14	5.08	57.46
2215.50	V	-54.70	1.24	5.95	59.09
2769.38	H	-41.60	1.33	6.97	45.06
3323.25	V	-50.50	1.38	7.41	53.57
3877.13	V	-46.20	1.44	7.63	49.11
4431.00	V	-45.90	1.49	8.17	48.33
4984.88	V	-45.70	1.60	7.67	48.73
5538.75	V	-51.30	1.72	8.40	53.71

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT341C

REPORT #: A\AudioTechnica\_JFZ\70UT4\70UT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## 2.1053(a)(b) Field strength of spurious emissions:

**NAME OF TEST:** RADIATED SPURIOUS EMISSIONS (566.375 MHz)

**REQUIREMENTS:** Emissions must be 43 +10log(Po) dB below the mean power output of the transmitter.

$$43 + 10 \log(0.10) = 23.00 \text{ dB}$$

### TEST DATA:

Emission Frequency MHz	Ant. Polarity	Corrected EUT Signal Reading	Coax Loss (dB)	Substitution Antenna (dBd)	dB Below Carrier (dBc)
566.38	V	8.40	0	0	0
1132.75	V	-55.40	1.03	3.48	61.35
1699.13	V	-55.30	1.14	5.11	59.73
2265.50	V	-50.90	1.25	6.09	54.46
2831.88	H	-38.50	1.33	7.02	41.22
3398.25	V	-45.40	1.39	7.47	47.72
3964.63	V	-44.10	1.45	7.64	46.30
4531.00	V	-44.00	1.51	8.21	45.69
5097.38	V	-47.40	1.62	7.79	49.63
5663.75	V	-53.60	1.77	8.58	55.19

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT341C

REPORT #: A\AudioTechnica\_JFZ\70UT4\70UT4TestReport.doc

# TIMCO ENGINEERING INC.


849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## Method of Measuring Radiated Spurious Emissions

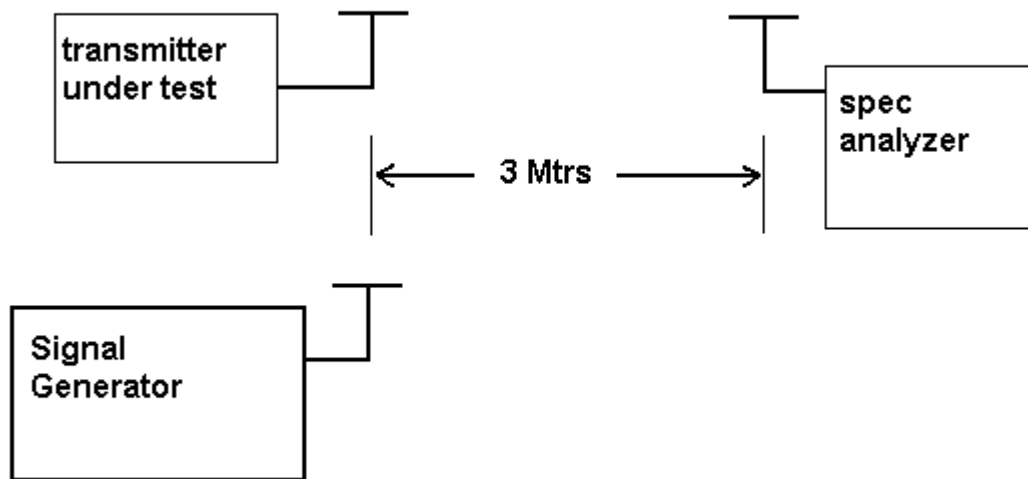

**METHOD OF MEASUREMENT:** The procedure used was TIA/EIA STANDARD 603. The spectrum was scanned from 30 to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer and an appropriate antenna. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located at 849 NW SR 45 Newberry, Florida 32669.

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT341C

REPORT #: A\AudioTechnica\_JFZ\70UT4\70UT4TestReport.doc

Page 10 of 13

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

2.1055 Frequency stability:  
S74.861(e)(4)

-----

Temperature and voltage tests were performed to verify that the frequency remains within the .0050%, (50 ppm) (74.861e.4) specification limit.

The test was conducted as follows: The transmitter was placed in the temperature chamber at 25° C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15-second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30° C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15-second intervals. The worst-case number was recorded for temperature plotting. This procedure was repeated in 10-degree increments up to + 50 degrees C.

## MEASUREMENT DATA:

**Assigned Frequency (Ref. Frequency): 541.498 510**

TEMPERATURE °C	FREQUENCY MHz	PPM
-30	541.510 970	23.01
-20	541.510 139	21.48
-10	541.508 436	18.33
0	541.506 182	14.17
10	541.503 142	5.88
20	541.500 372	3.44
30	541.497 855	-1.21
40	541.495 709	-5.17
50	541.494 644	-7.14

Batt. Volts	Batt. Data	PPM
-15%	541.498 876	0.68

**RESULTS OF MEASUREMENTS:** The test results indicates that the EUT meets the requirements.

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT341C

REPORT #: A\AudioTechnica\_JFZ\70UT4\70UT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## EMC Equipment List

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/26/01	3/26/04
3-Meter OATS	TEI	N/A	N/A	Listed 1/13/03	1/13/06
AC Voltmeter	HP	400FL	2213A14499	CAL 10/9/01	10/9/03
Blue Tower Quasi-Peak Adapter	HP	85650A	2811A01279	CAL 4/15/03	4/15/05
Blue Tower RF Preselector	HP	85685A	2926A00983	CAL 4/15/03	4/15/05
Blue Tower Spectrum Analyzer	HP	8568B	2928A04729 2848A18049	CAL 4/15/03	4/15/05
Coaxial Cable #64	Semflex Inc.	60637	Timco #64	CHAR 1/24/02	1/24/04
Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	152	CAL 3/21/01	3/21/04
Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	153	CAL 9/26/02	9/26/05
Frequency Counter	HP	5385A	2730A03025	CAL 3/7/03	3/7/05
Hygro-Thermometer	Extech	445703	0602	CAL 10/4/02	10/4/04
Log-Periodic Antenna	Electro-Metrics	LPA-25	1122	CAL 10/2/01	10/2/03
Measuring Tape-7.5M	Kraftixx	7.5M PROFI		CHAR 2/1/02	2/1/04
Modulation Analyzer	HP	8901A	3435A06868	CAL 9/5/01	9/5/03
Multimeter	Fluke	FLUKE-77-3	79510405	CHAR 9/26/01	9/26/03
Silver Tower Preamplifier	HP	8449B	3008A01075	CHAR 1/28/02	1/28/04
Silver Tower Quasi-Peak Adapter	HP	85650A	3303A01844	CAL 10/14/02	10/14/04
Silver Tower RF Preselector	HP	85685A	2620A00294	CAL 10/14/02	10/14/04

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT341C

REPORT #: A\AudioTechnica\_JFZ\70UT4\70UT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

Silver Tower	HP	8566B	3552A22064	CAL	10/14/04
Spectrum		Opt 462	3638A08608	10/14/02	
Analyzer					
System One	Audio	System	SYS1-45868	CHAR	4/25/04
	Precision	One		4/25/02	
Tan Tower	HP	8449B-	3008A00372	CAL	9/23/05
Preamplifier		H02		9/23/03	
Tan Tower	HP	85650A	3303A01690	CAL	9/23/05
Quasi-Peak				9/23/03	
Adapter					
Tan Tower RF	HP	85685A	3221A01400	CAL	9/23/05
Preselector				9/23/03	
Tan Tower	HP	8566B	3138A07786	CAL	9/23/05
Spectrum		Opt 462	3144A20661	9/23/03	
Analyzer					
Temperature	Tenney	TTRC	11717-7	CHAR	1/22/04
Chamber	Engineering			1/22/02	

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT341C

REPORT #: A\AudioTechnica\_JFZ\70UT4\70UT4TestReport.doc