

HAC_E_Dipole_835**DUT: HAC-Dipole 835 MHz**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 835 MHz; Calibrated: 2019/1/30

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn854; Calibrated: 2019/5/21

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

E Scan - measurement distance from the probe sensor center to CD835 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x361x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 134.3 V/m; Power Drift = -0.05 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 112.4 V/m

Average value of Total=(108.7+112.4) / 2 = 110.55 V/m

PMF scaled E-field



Grid 1 M4 108.7 V/m	Grid 2 M4 108.7 V/m	Grid 3 M4 101.1 V/m
Grid 4 M4 61.06 V/m	Grid 5 M4 61.11 V/m	Grid 6 M4 59.54 V/m
Grid 7 M4 108.4 V/m	Grid 8 M4 112.4 V/m	Grid 9 M4 110.8 V/m

Cursor:

Total = 112.4 V/m

E Category: M4

Location: -0.5, 73.5, 9.7 mm

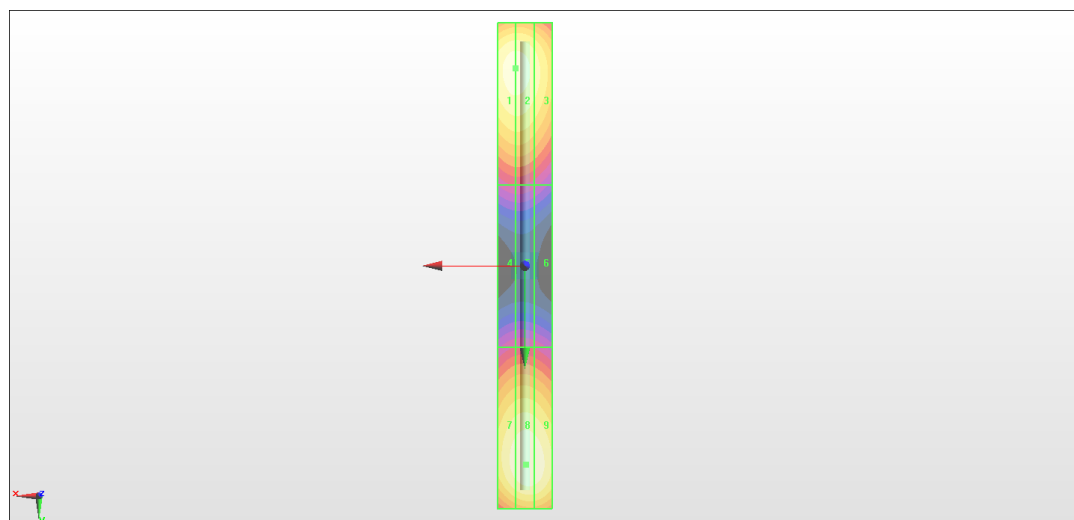

0 dB = 112.4 V/m = 41.02 dBV/m

HAC_E_Dipole_1880**DUT: HAC Dipole 1880 MHz**

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2019/5/21
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

E Scan - measurement distance from the probe sensor center to CD1880 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 158.3 V/m; Power Drift = 0.00 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 87.44 V/m

Average value of Total=(86.97+87.44) / 2 = 87.21 V/m

PMF scaled E-field



Grid 1 M3 86.35 V/m	Grid 2 M3 86.97 V/m	Grid 3 M3 83.84 V/m
Grid 4 M3 64.68 V/m	Grid 5 M3 64.74 V/m	Grid 6 M3 63.19 V/m
Grid 7 M3 86.75 V/m	Grid 8 M3 87.44 V/m	Grid 9 M3 84.22 V/m

Cursor:

Total = 87.44 V/m

E Category: M3

Location: 1, 34, 9.7 mm

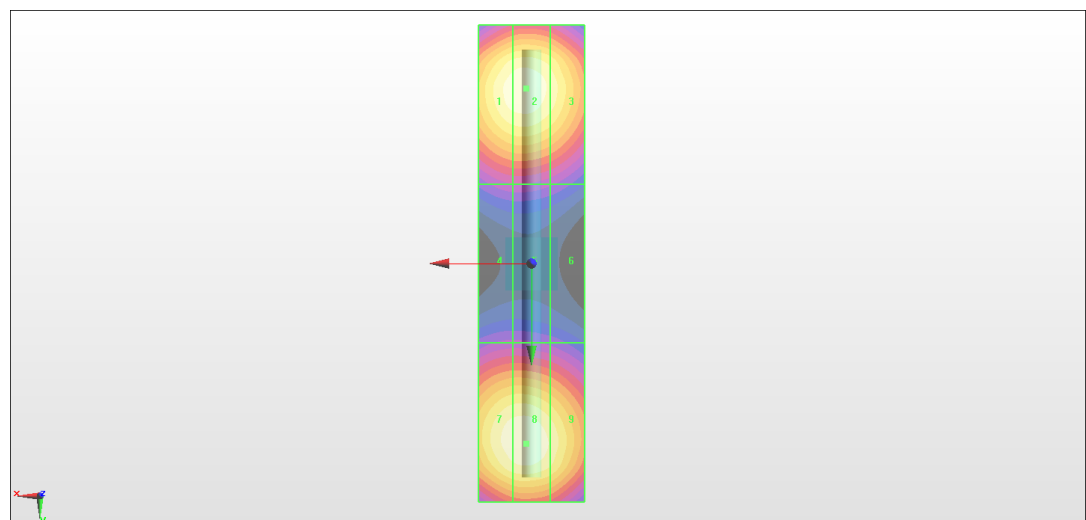

0 dB = 87.44 V/m = 38.83 dBV/m