



802.11 n40 CH03 (2422MHz)




802.11 n40 CH03 (2422MHz)

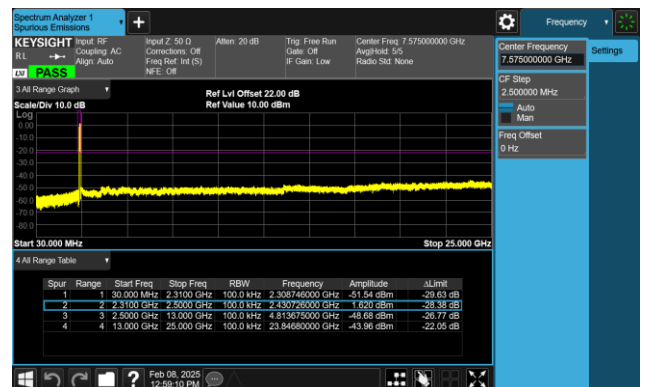


802.11 n40 CH06 (2437MHz)

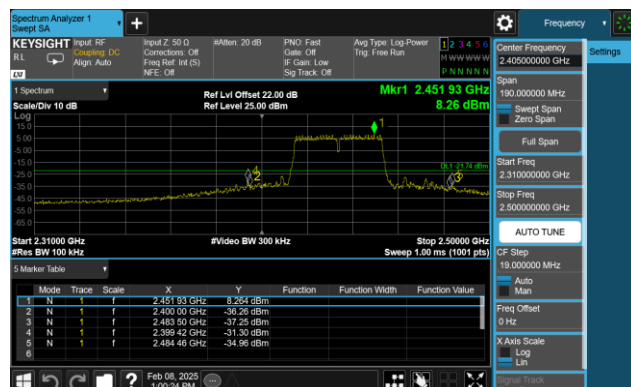


802.11 n40 CH06 (2437MHz)

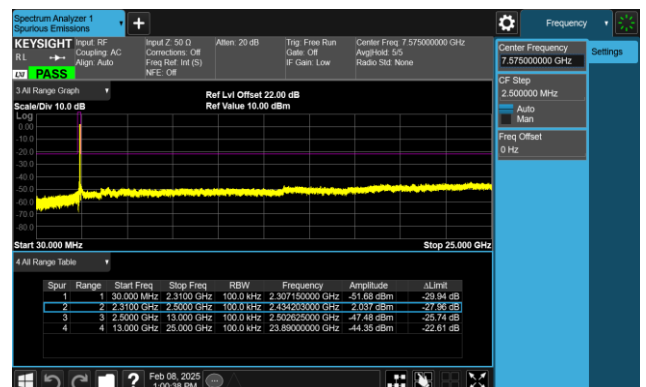

802.11 n40 CH09 (2452MHz)

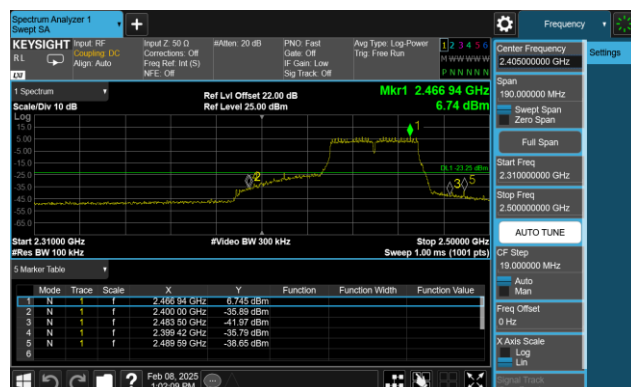


802.11 n40 CH09 (2452MHz)

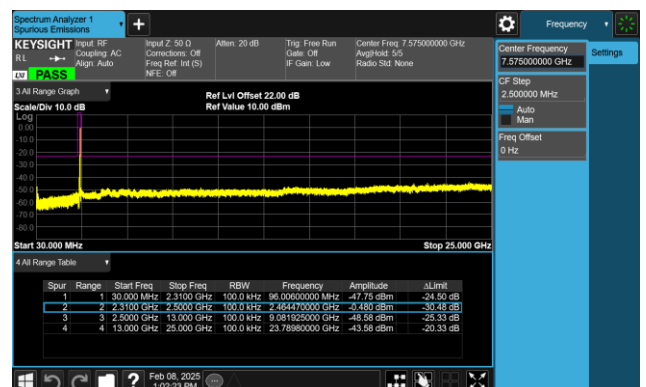


802.11 ax20 CH01 (2412MHz)




802.11 ax20 CH01 (2412MHz)

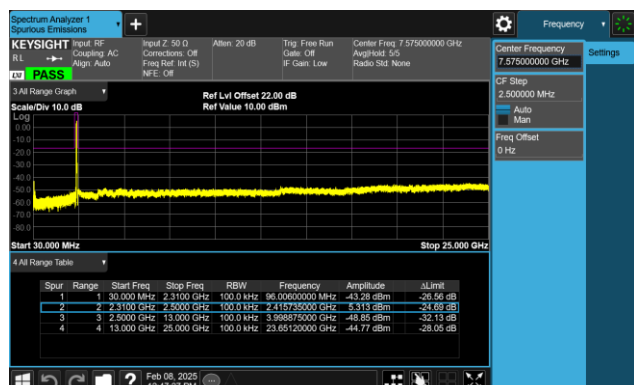


802.11 ax20 CH06 (2437MHz)

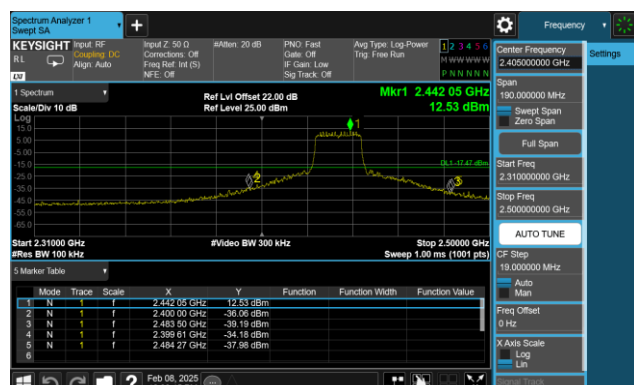


802.11 ax20 CH06 (2437MHz)

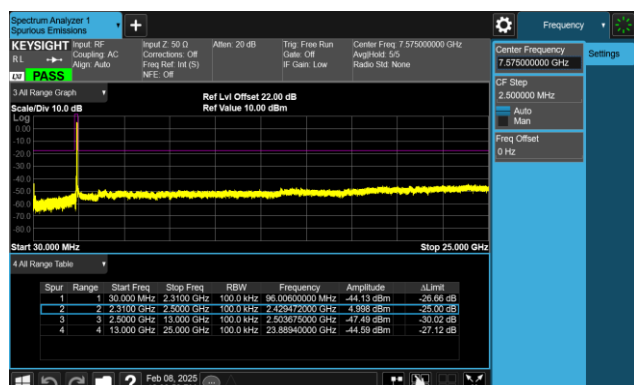

802.11 ax20 CH11 (2462MHz)

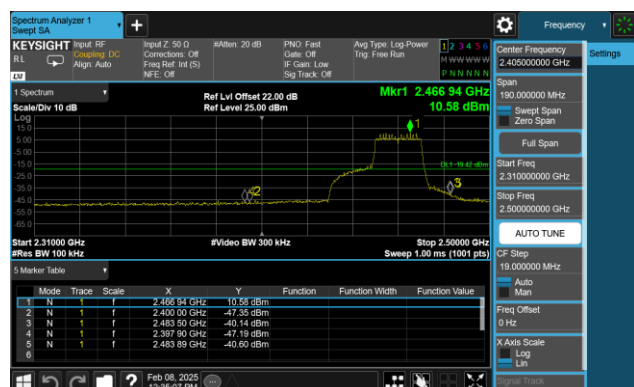


802.11 ax20 CH11 (2462MHz)

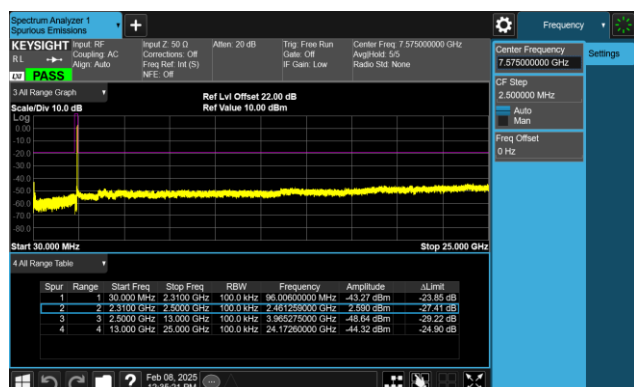


802.11 ax40 CH03 (2422MHz)




802.11 ax40 CH03 (2422MHz)

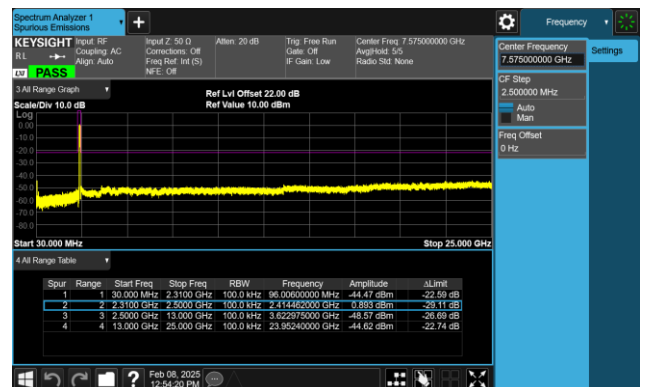


802.11 ax40 CH06 (2437MHz)

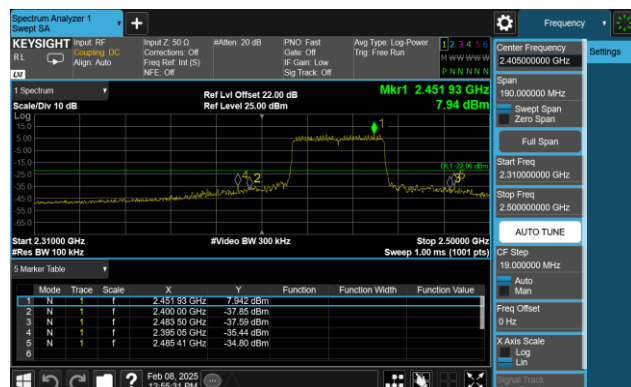


802.11 ax40 CH06 (2437MHz)

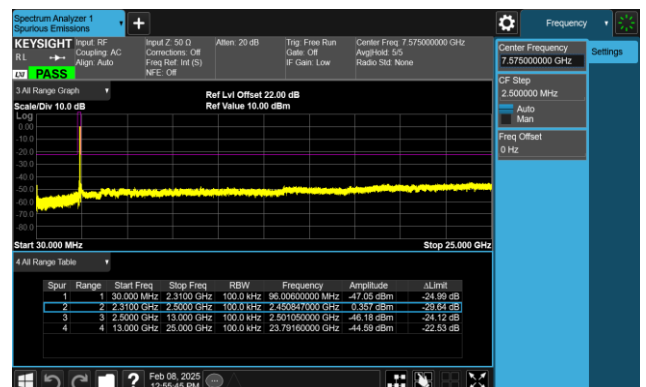

802.11 ax40 CH09 (2452MHz)

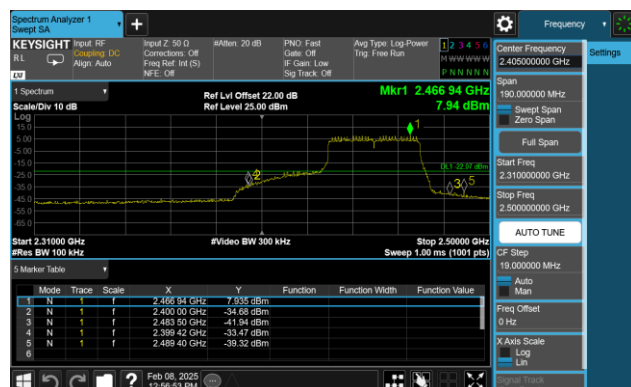


802.11 ax40 CH09 (2452MHz)

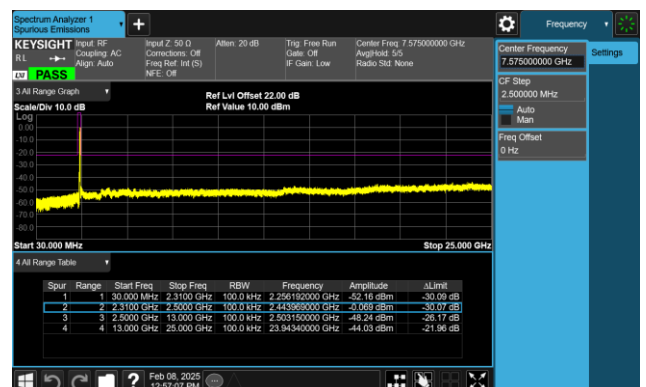


802.11 be20 CH01 (2412MHz)




802.11 be20 CH01 (2412MHz)

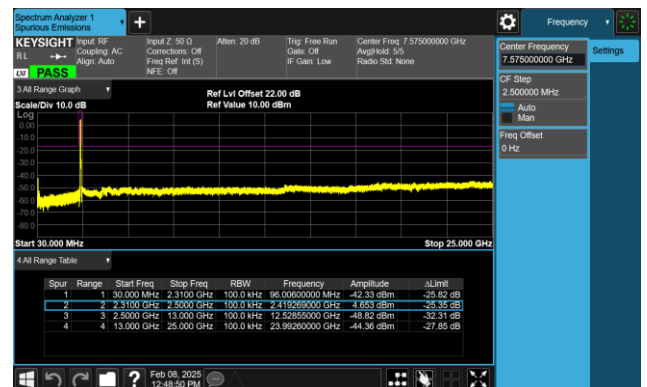


802.11 be20 CH06 (2437MHz)

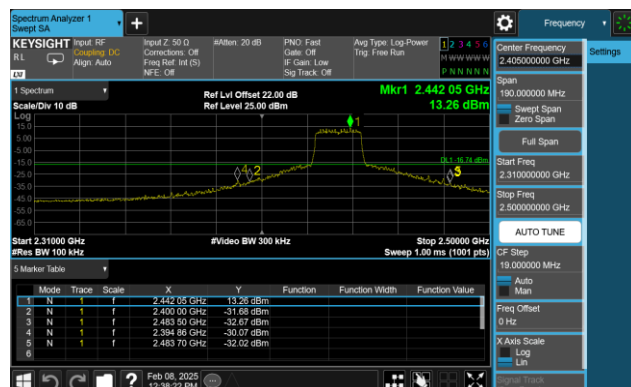


802.11 be20 CH06 (2437MHz)

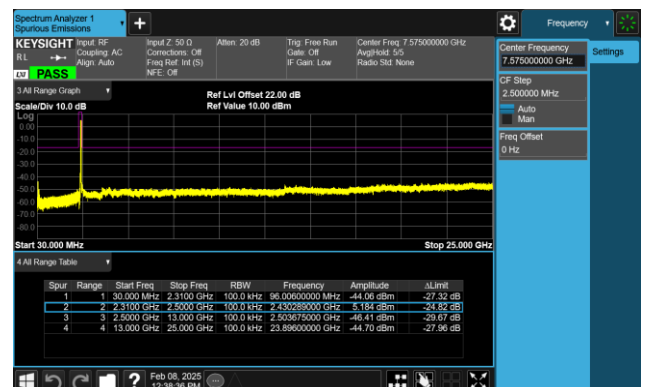


802.11 be20 CH11 (2462MHz)

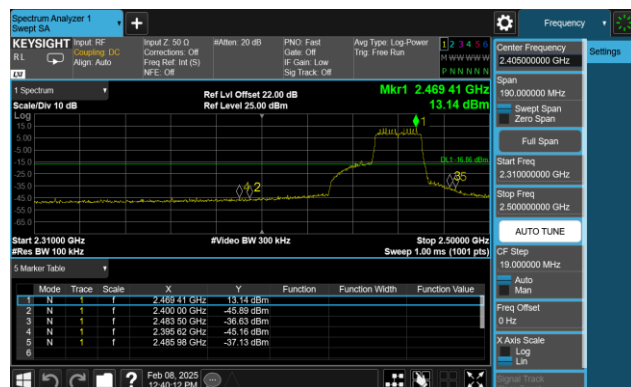


802.11 be20 CH11 (2462MHz)

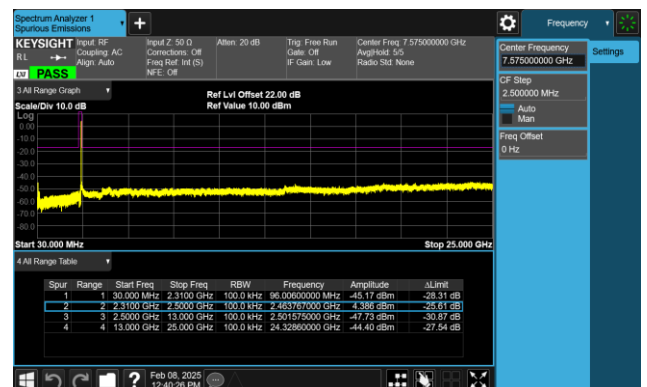


802.11 be40 CH03 (2422MHz)

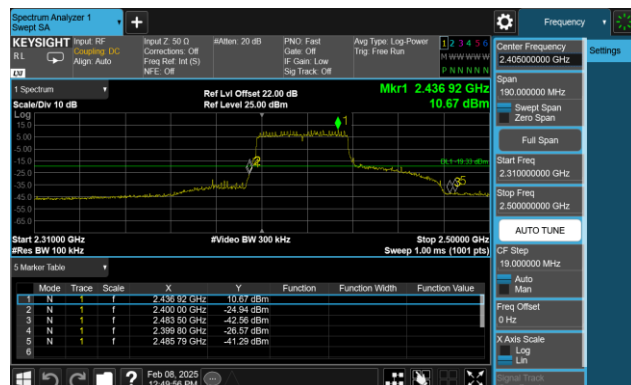


802.11 be40 CH03 (2422MHz)

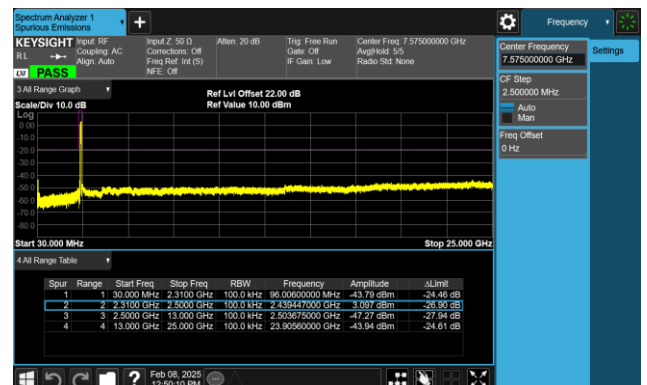


802.11 be40 CH06 (2437MHz)

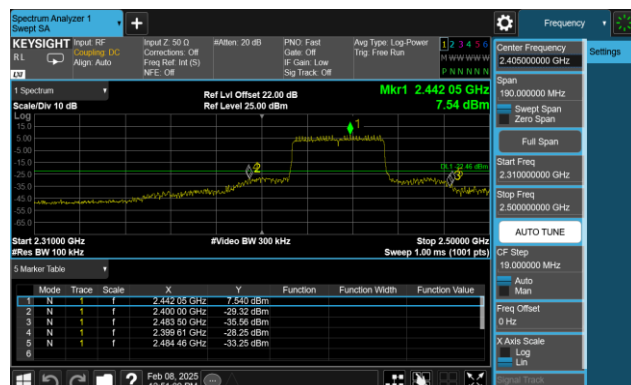


802.11 be40 CH06 (2437MHz)

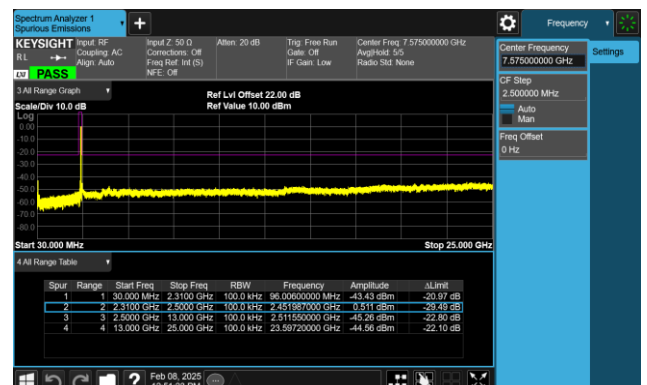

802.11 be40 CH09 (2452MHz)

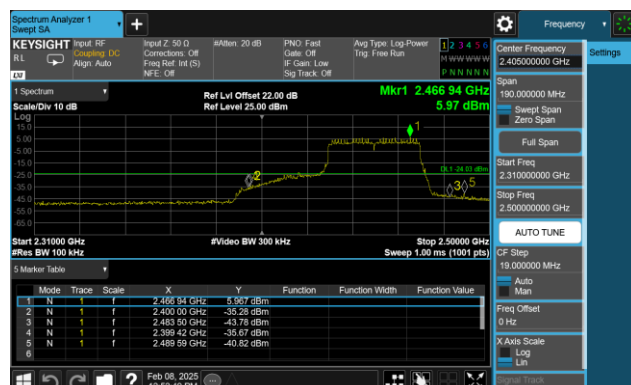

802.11 be40 CH09 (2452MHz)

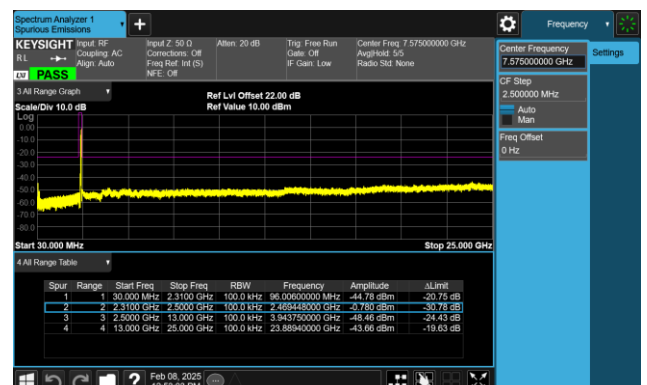

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [Uv/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4. Test Setup

Below 1GHz Test Setup:

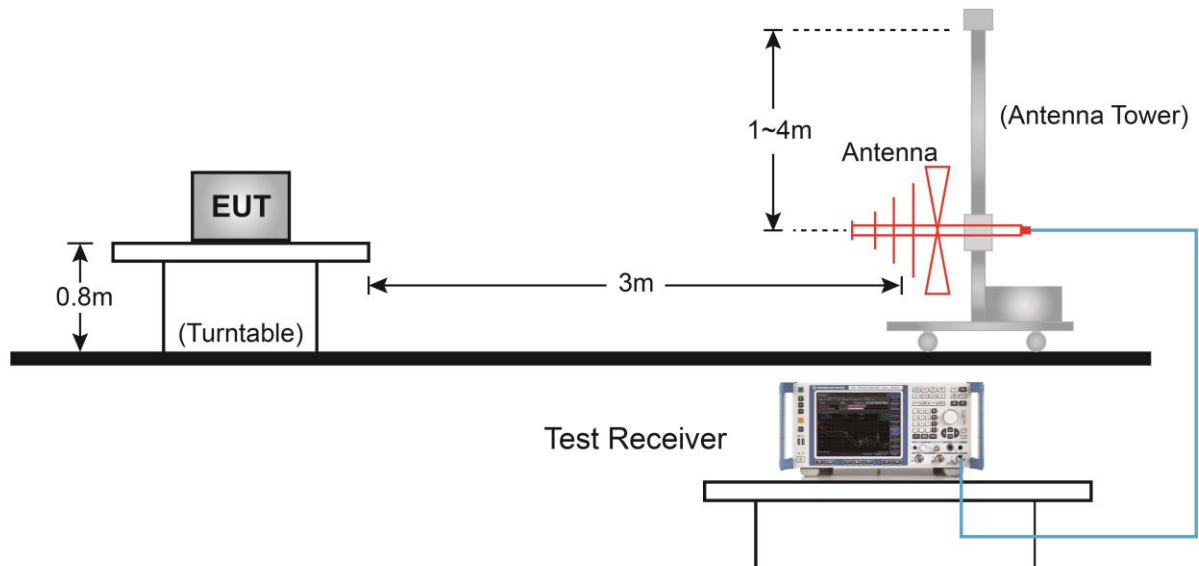


Above 1GHz Test Setup:

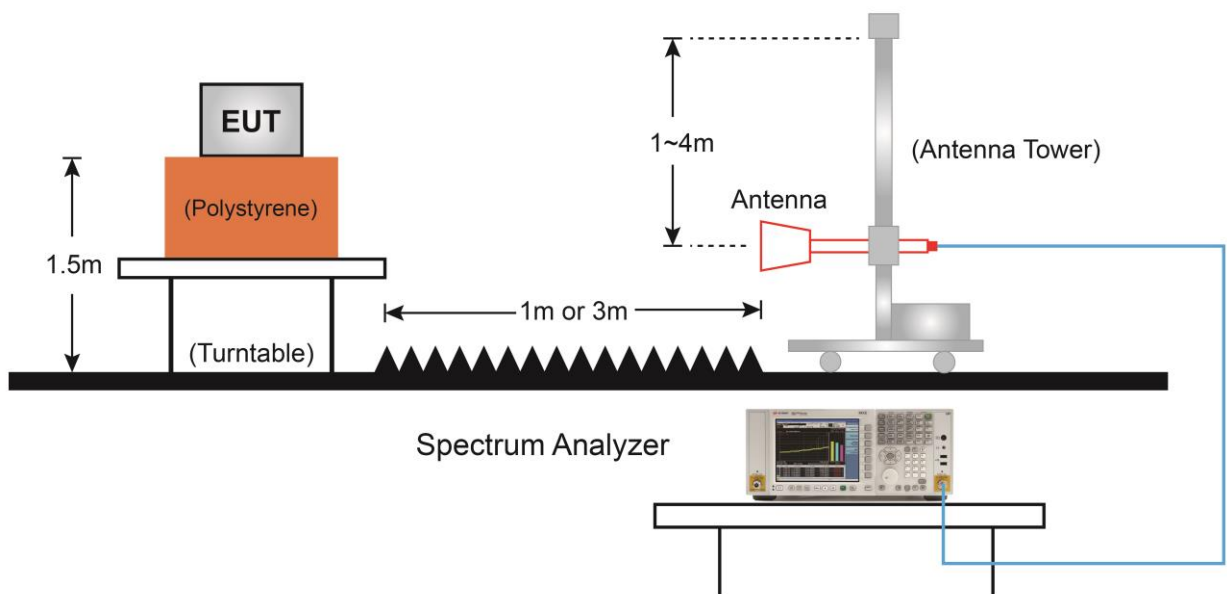

7.6.5. Test Result

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-21
Factor	VULB 9162	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

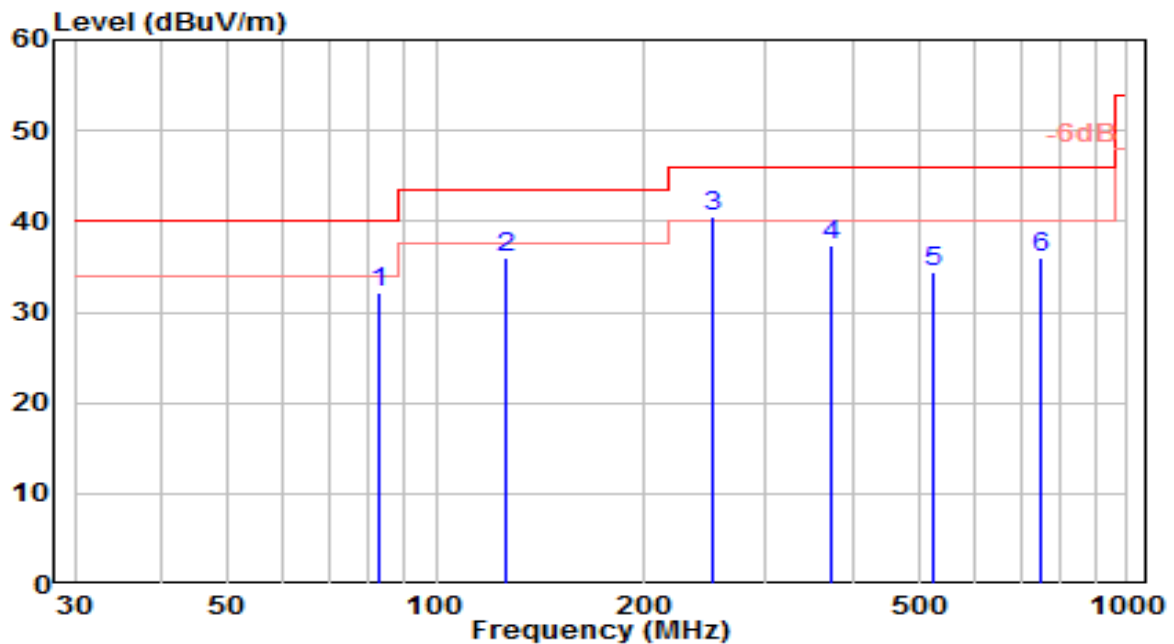


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	82.745	17.32	14.94	32.26	-7.74	40.00	150	340	QP
2	126.494	19.60	16.39	35.99	-7.51	43.50	150	45	QP
3	* 251.858	20.18	20.45	40.63	-5.37	46.00	150	225	QP
4	373.574	13.98	23.37	37.35	-8.65	46.00	100	40	QP
5	523.649	8.58	25.78	34.36	-11.64	46.00	100	175	QP
6	748.066	6.51	29.56	36.07	-9.93	46.00	150	110	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-21
Factor	VULB 9162	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

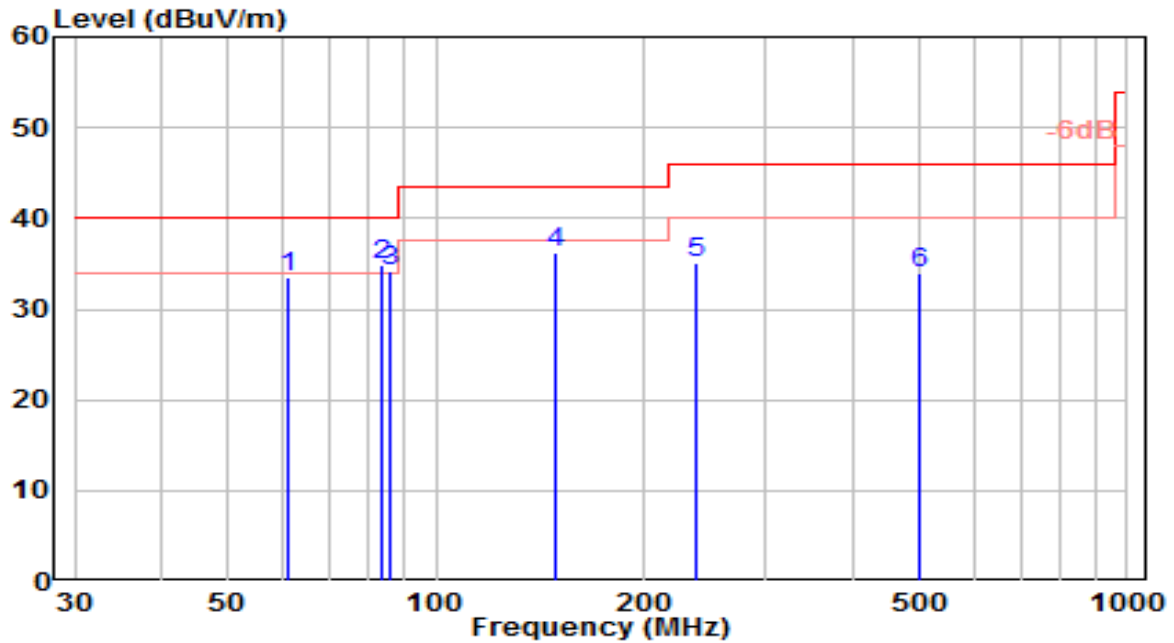


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		60.865	14.01	19.59	33.60	-6.40	40.00	100	55	QP
2	*	83.268	19.77	15.10	34.87	-5.13	40.00	100	50	QP
3		85.566	18.34	15.80	34.14	-5.86	40.00	150	5	QP
4		149.026	20.74	15.56	36.30	-7.20	43.50	100	320	QP
5		238.807	15.24	19.86	35.09	-10.91	46.00	100	165	QP
6		502.272	8.48	25.52	34.00	-12.00	46.00	100	335	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

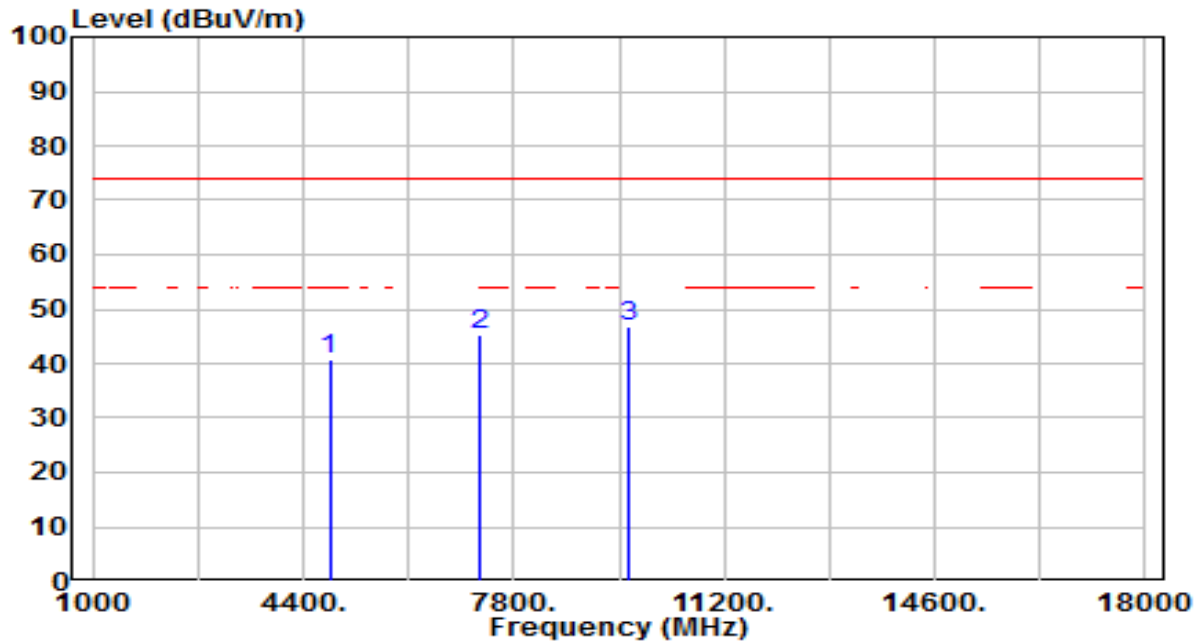


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4824.000	36.88	3.75	40.62	-33.38	74.00	100	217	Peak
2		7236.000	33.52	11.68	45.19	-28.81	74.00	100	322	Peak
3	*	9648.000	30.87	15.77	46.64	-27.36	74.00	100	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

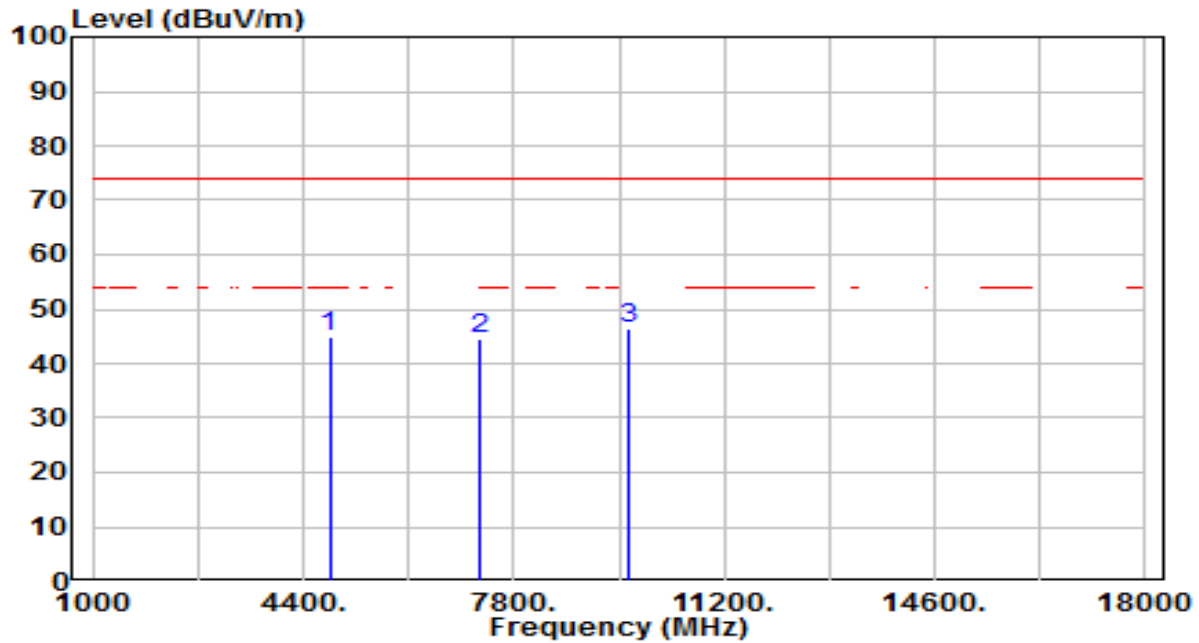


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.30	3.75	45.05	-28.95	74.00	100	42	Peak
2	7236.000	33.01	11.68	44.69	-29.31	74.00	100	360	Peak
3	* 9648.000	30.72	15.77	46.49	-27.51	74.00	100	107	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

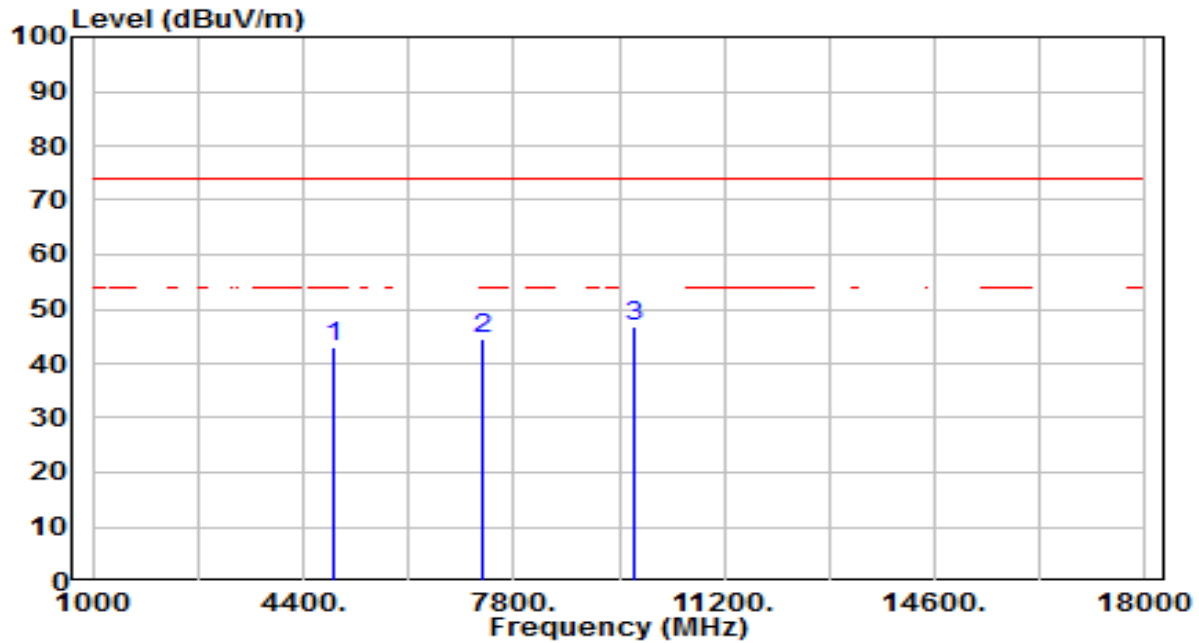


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.35	3.84	43.18	-30.82	74.00	100	199	Peak
2	7311.000	32.57	11.94	44.51	-29.49	74.00	100	307	Peak
3	* 9748.000	30.81	15.95	46.77	-27.23	74.00	100	292	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

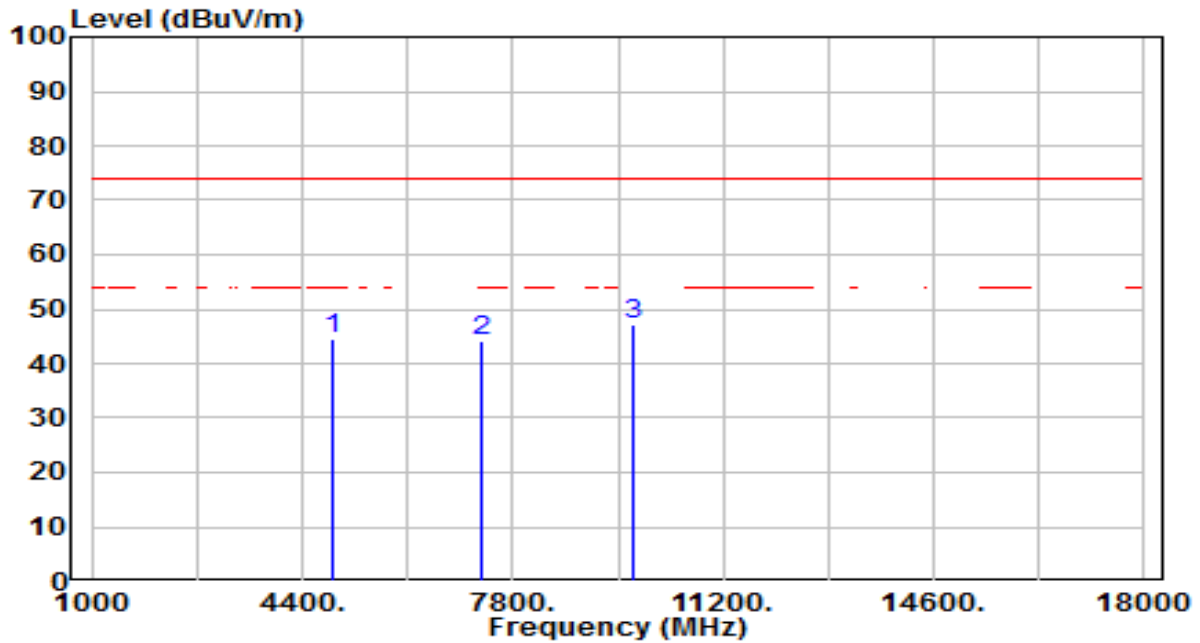


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.62	3.84	44.46	-29.54	74.00	100	32	Peak
2	7311.000	32.26	11.94	44.20	-29.80	74.00	100	68	Peak
3	* 9748.000	31.35	15.95	47.30	-26.70	74.00	100	201	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

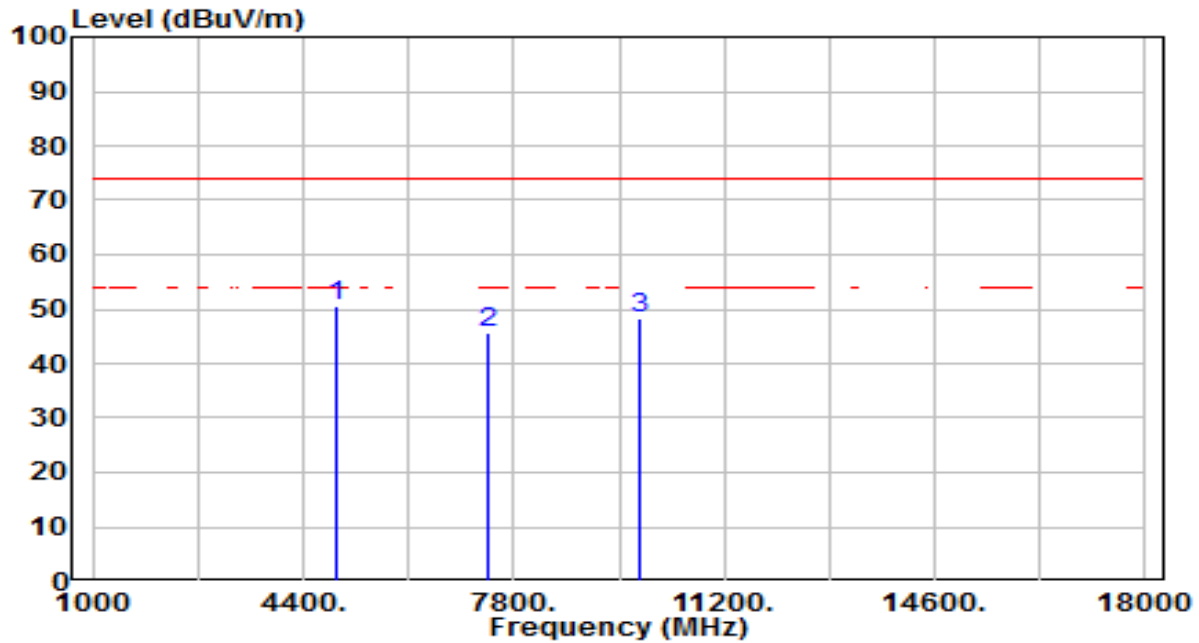


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4924.000	46.72	3.92	50.64	-23.36	74.00	100	14	Peak
2		7386.000	33.42	12.21	45.63	-28.37	74.00	100	72	Peak
3		9848.000	32.15	16.14	48.29	-25.71	74.00	100	216	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

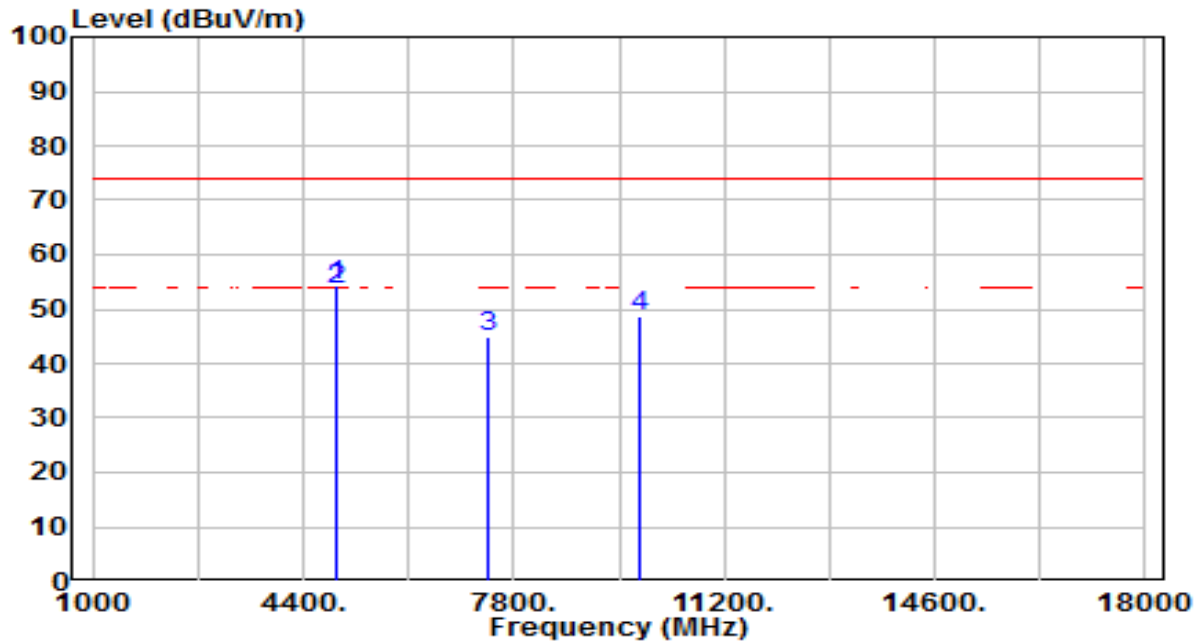


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4924.000	50.55	3.92	54.48	-19.52	74.00	100	263	Peak
2	*	4924.000	49.60	3.92	53.52	-0.48	54.00	100	263	Average
3		7386.000	32.51	12.21	44.72	-29.28	74.00	100	158	Peak
4		9848.000	32.56	16.14	48.70	-25.30	74.00	100	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

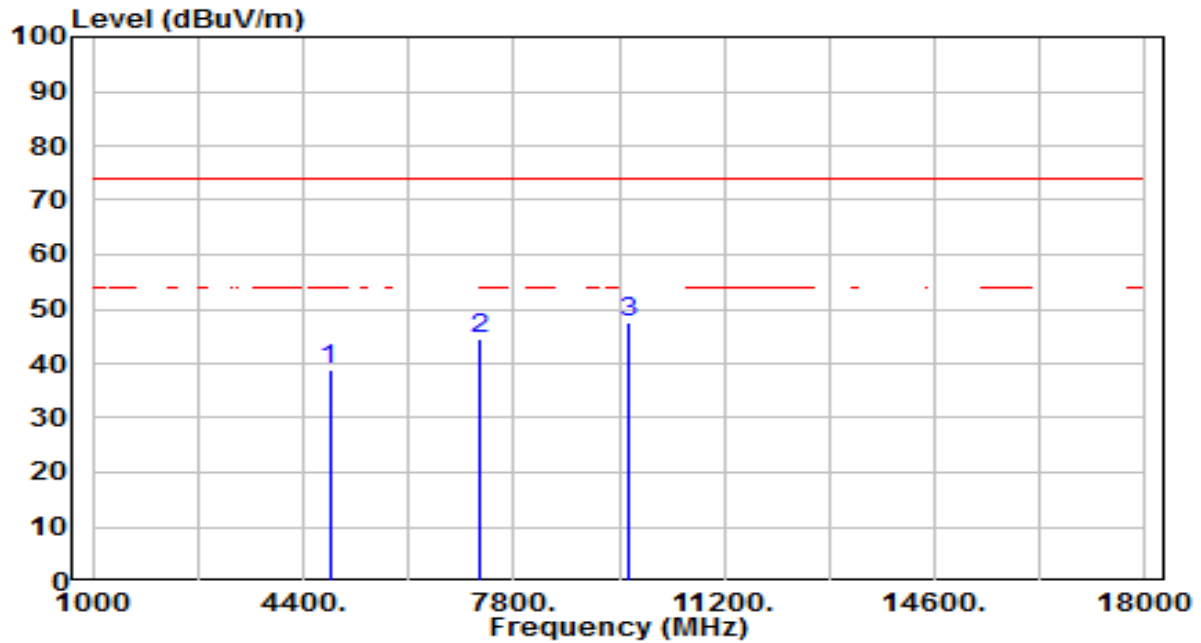


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	35.30	3.75	39.04	-34.96	74.00	100	310	Peak
2	7236.000	32.93	11.68	44.60	-29.40	74.00	100	346	Peak
3	* 9648.000	31.80	15.77	47.57	-26.43	74.00	100	199	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

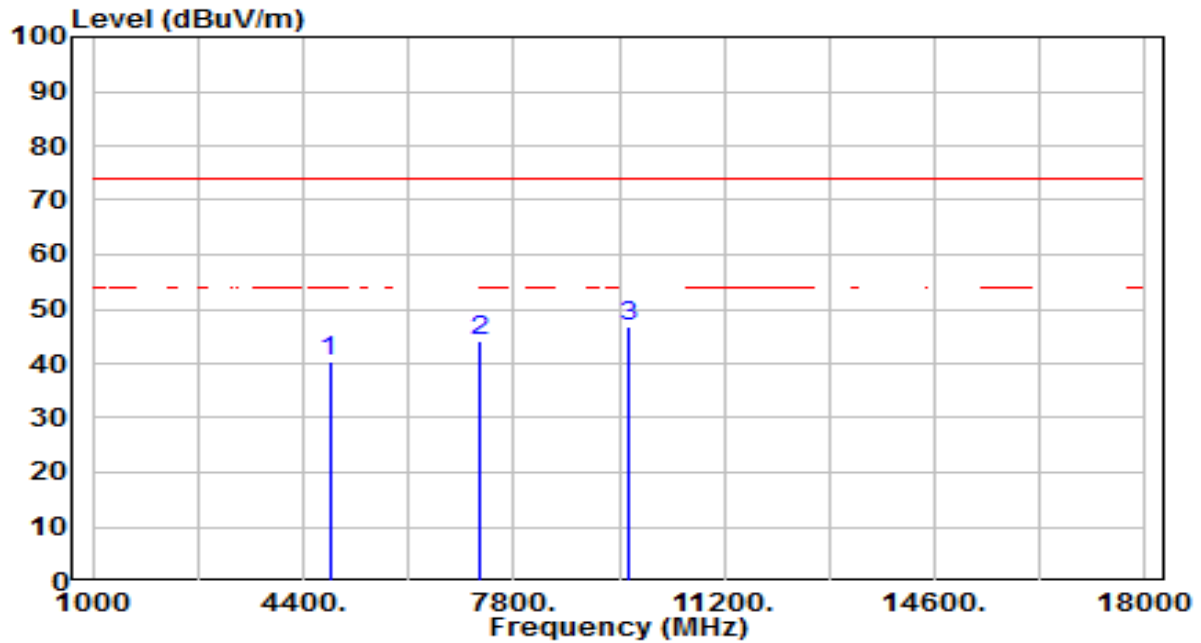


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	36.77	3.75	40.52	-33.48	74.00	100	115	Peak
2	7236.000	32.56	11.68	44.24	-29.76	74.00	100	293	Peak
3	* 9648.000	31.08	15.77	46.85	-27.15	74.00	100	119	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

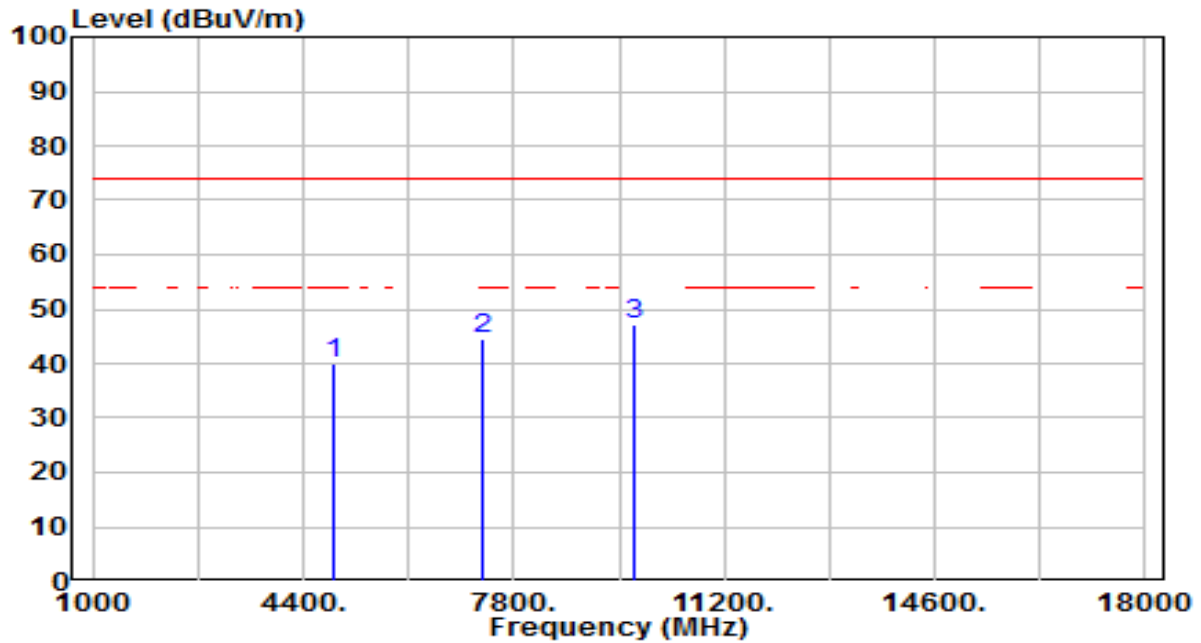


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	36.15	3.84	39.98	-34.02	74.00	100	197	Peak
2	7311.000	32.76	11.94	44.70	-29.30	74.00	100	56	Peak
3	* 9748.000	31.15	15.95	47.10	-26.90	74.00	100	41	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

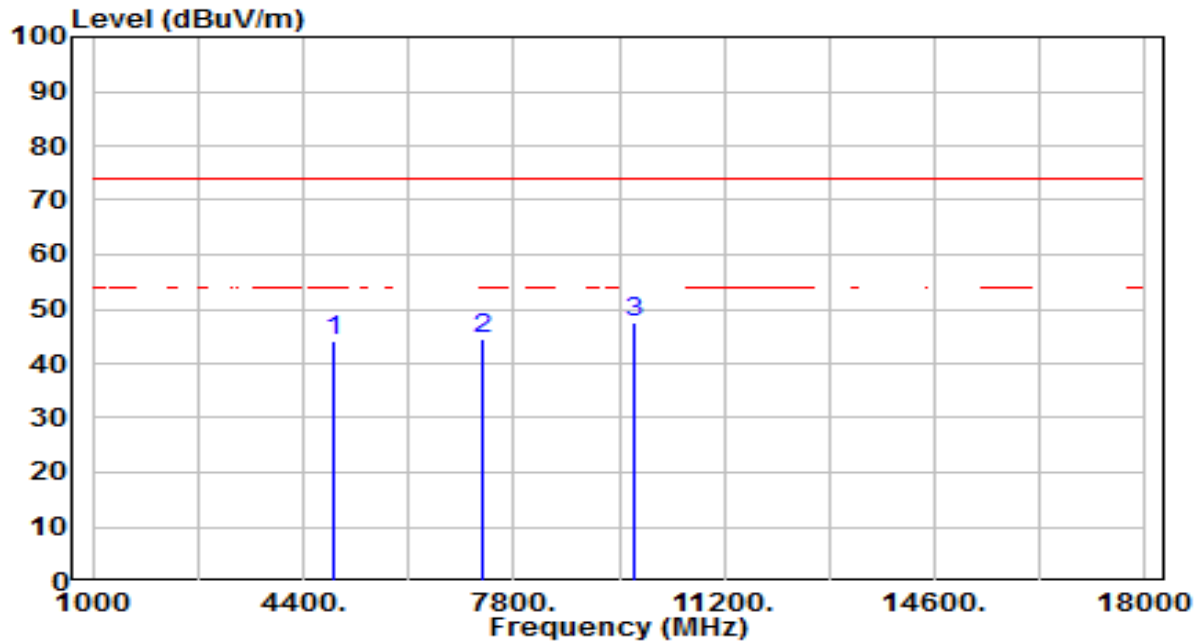


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.13	3.84	43.96	-30.04	74.00	100	53	Peak
2	7311.000	32.60	11.94	44.54	-29.46	74.00	100	90	Peak
3	* 9748.000	31.45	15.95	47.41	-26.59	74.00	100	202	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

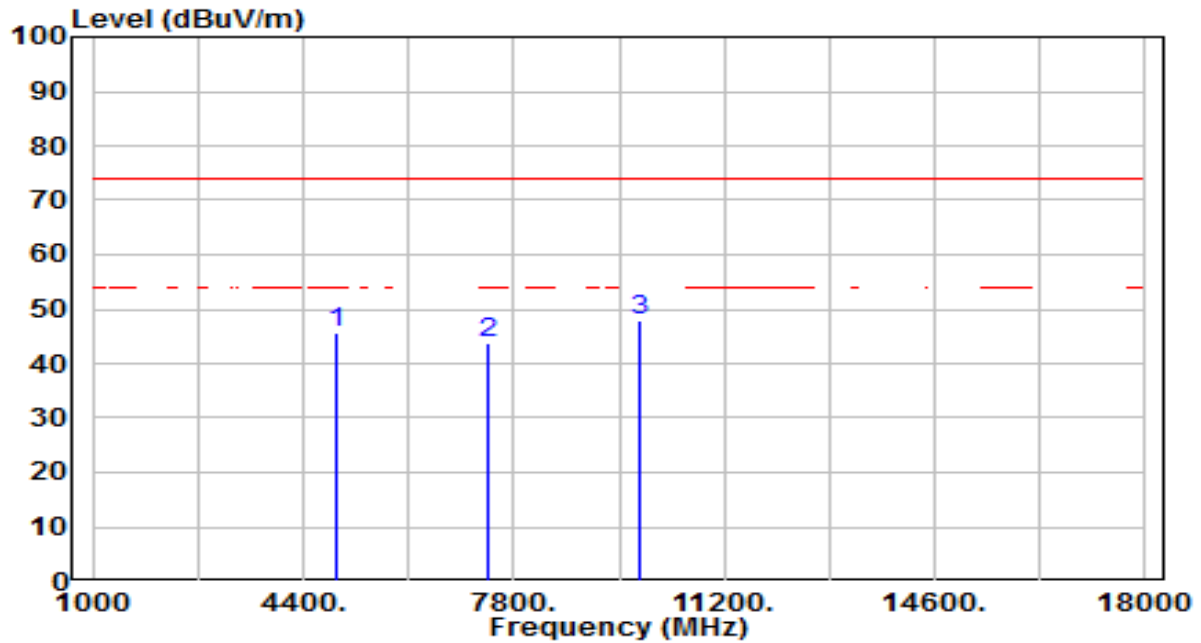


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	41.61	3.92	45.54	-28.46	74.00	100	197	Peak
2	7386.000	31.55	12.21	43.76	-30.24	74.00	100	226	Peak
3	* 9848.000	31.90	16.14	48.04	-25.96	74.00	100	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

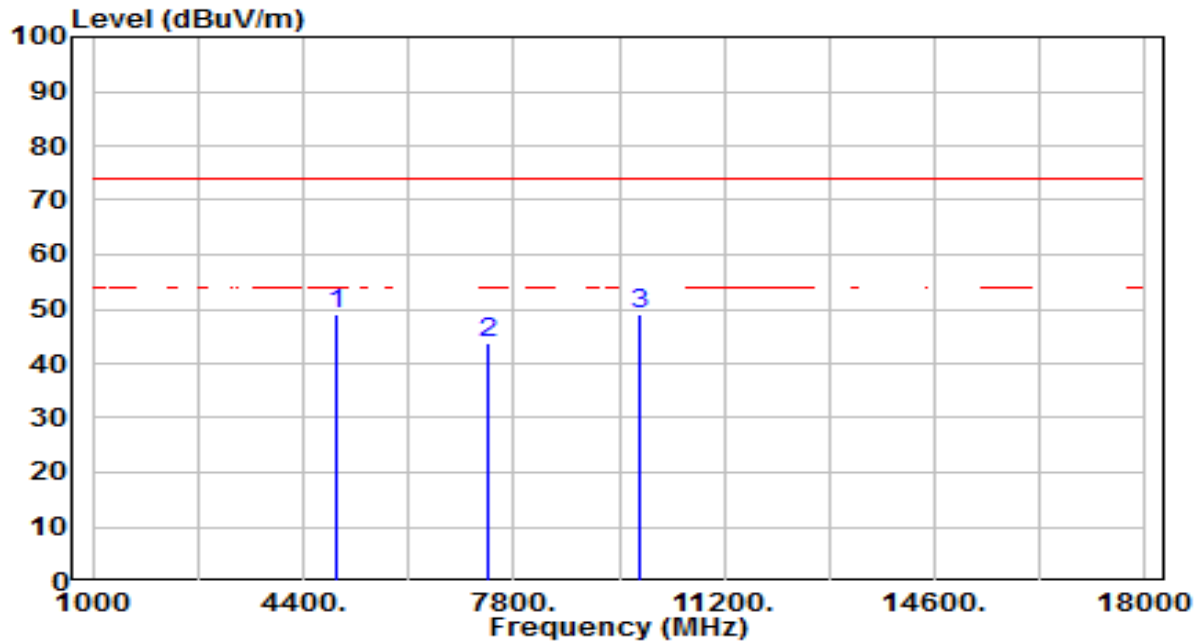


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4924.000	45.31	3.92	49.23	-24.77	74.00	100	314	Peak
2		7386.000	31.74	12.21	43.95	-30.05	74.00	100	357	Peak
3		9848.000	32.94	16.14	49.08	-24.92	74.00	100	275	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

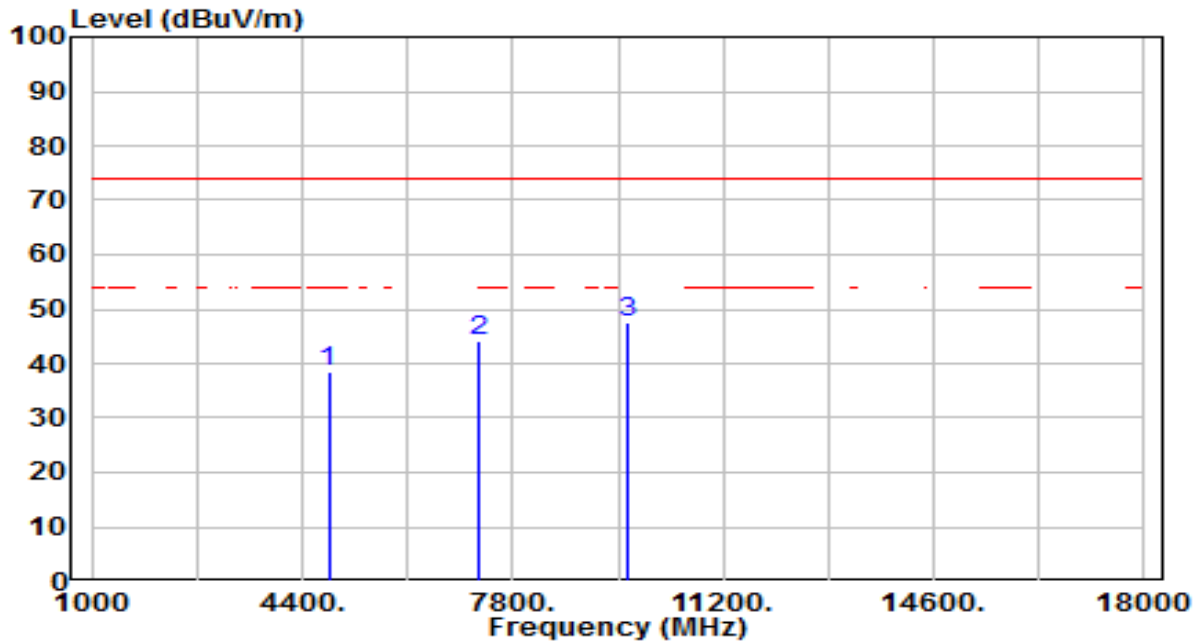


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.85	3.75	38.60	-35.40	74.00	100	184	Peak
2	7236.000	32.61	11.68	44.29	-29.71	74.00	100	46	Peak
3	* 9648.000	31.80	15.77	47.57	-26.43	74.00	100	292	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

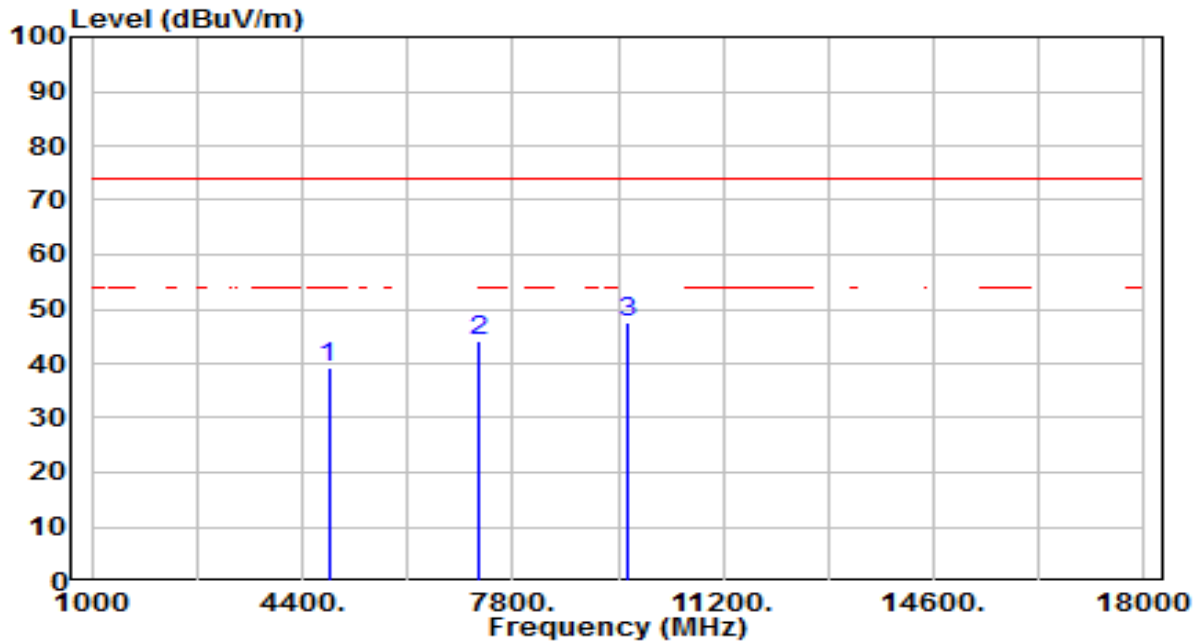


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	35.53	3.75	39.28	-34.72	74.00	100	358	Peak
2	7236.000	32.64	11.68	44.32	-29.68	74.00	100	257	Peak
3	* 9648.000	31.80	15.77	47.57	-26.43	74.00	100	146	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

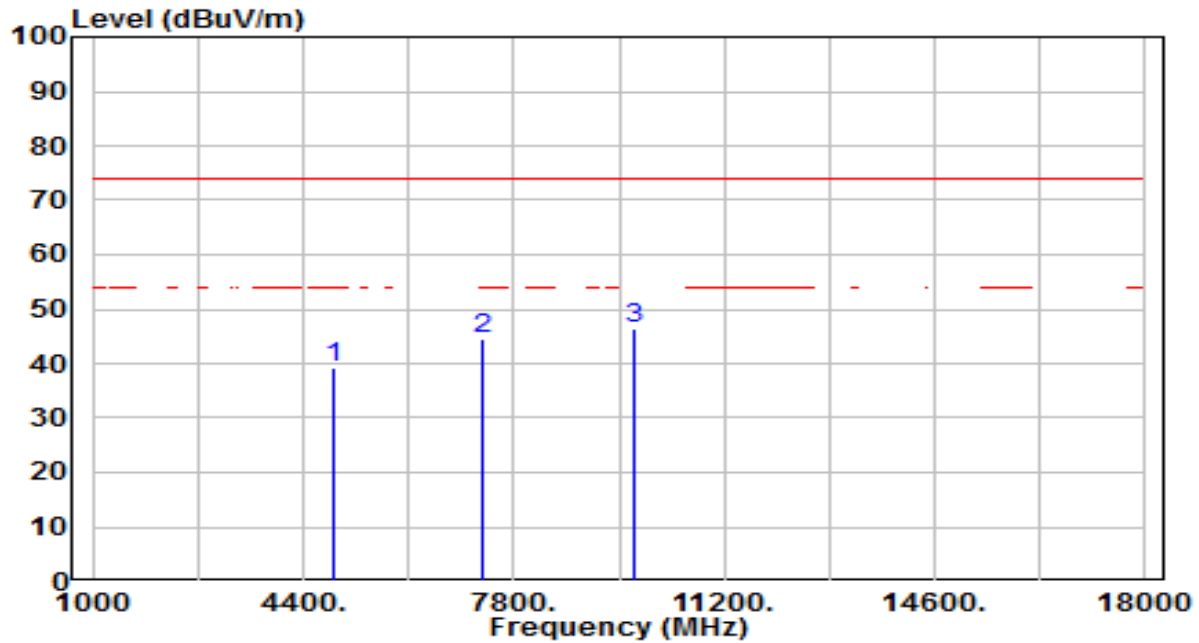


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.34	3.84	39.18	-34.82	74.00	100	299	Peak
2	7311.000	32.49	11.94	44.43	-29.57	74.00	100	0	Peak
3	* 9748.000	30.62	15.95	46.58	-27.42	74.00	100	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

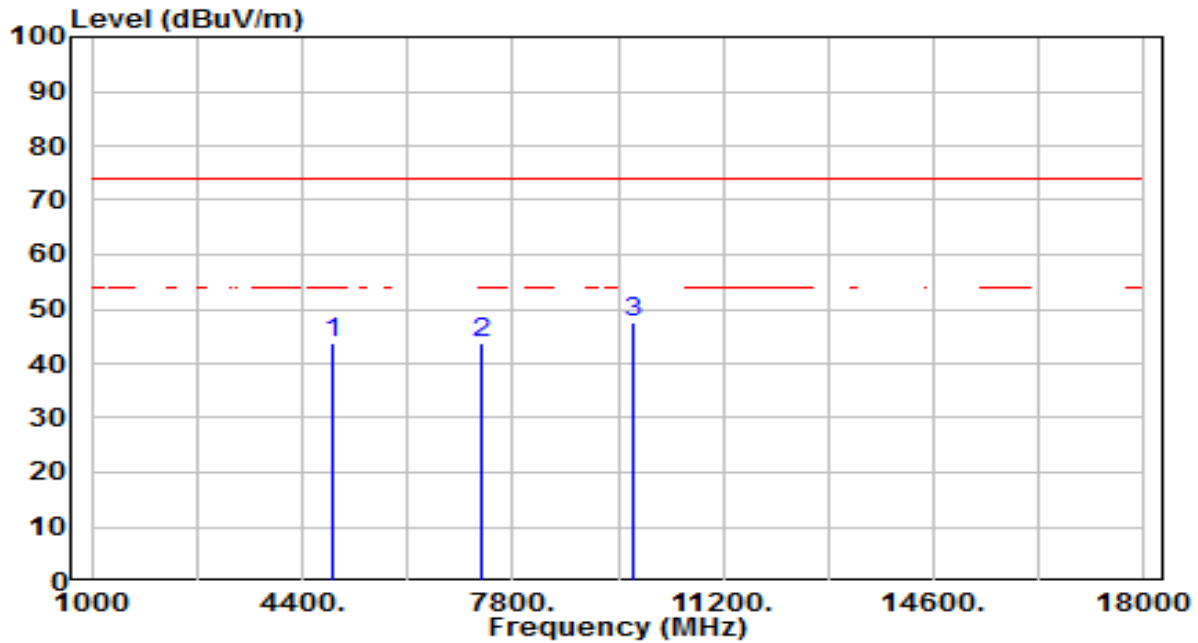


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.89	3.84	43.73	-30.27	74.00	100	43	Peak
2	7311.000	31.69	11.94	43.63	-30.37	74.00	100	184	Peak
3	* 9748.000	31.45	15.95	47.40	-26.60	74.00	100	65	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

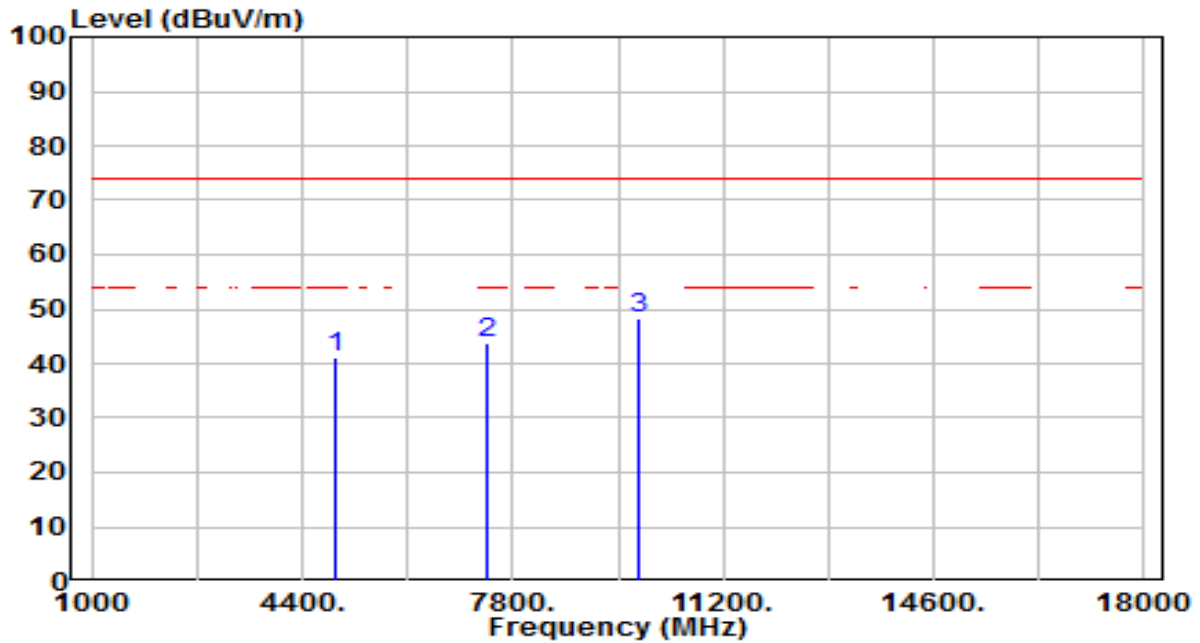


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	37.28	3.92	41.20	-32.80	74.00	100	237	Peak
2	7386.000	31.72	12.21	43.92	-30.08	74.00	100	147	Peak
3	* 9848.000	32.12	16.14	48.26	-25.74	74.00	100	223	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

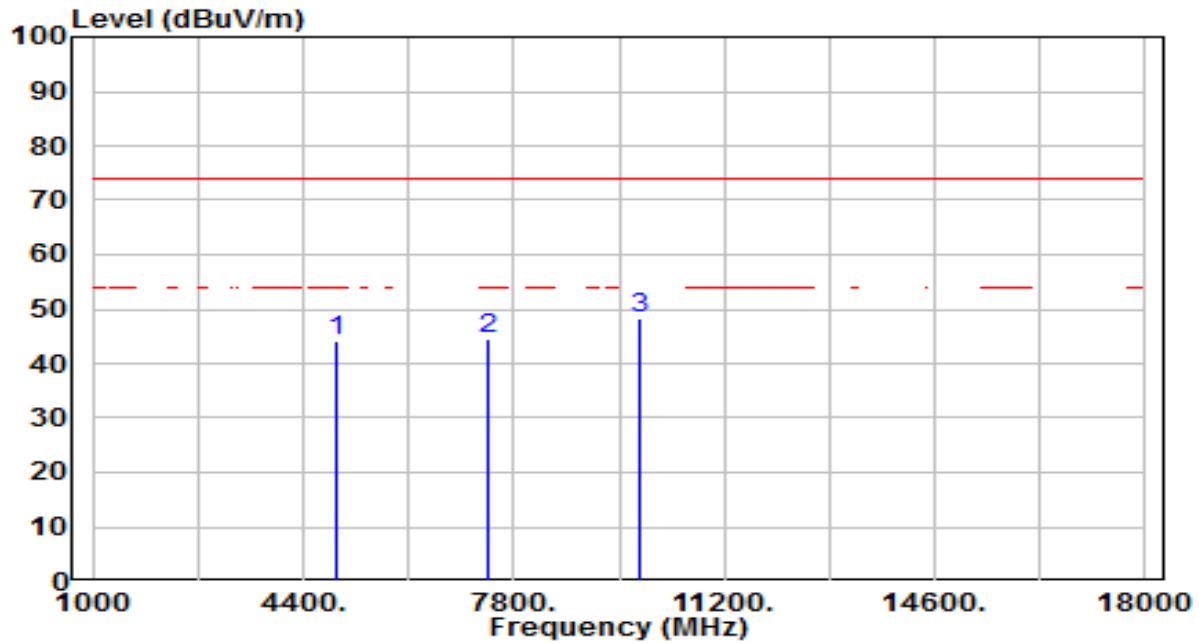


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.27	3.92	44.20	-29.80	74.00	100	263	Peak
2	7386.000	32.14	12.21	44.34	-29.66	74.00	100	42	Peak
3	* 9848.000	32.20	16.14	48.34	-25.66	74.00	100	256	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

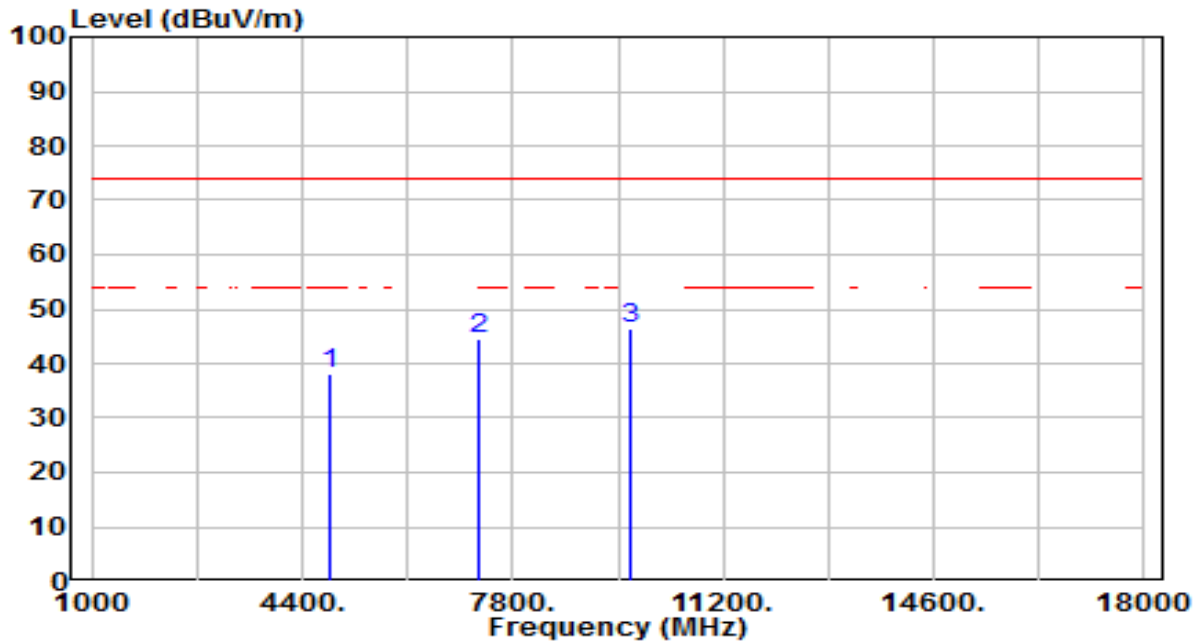


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	34.37	3.78	38.15	-35.85	74.00	100	276	Peak
2	7266.000	32.76	11.78	44.54	-29.46	74.00	100	38	Peak
3	* 9688.000	30.67	15.84	46.51	-27.49	74.00	100	38	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

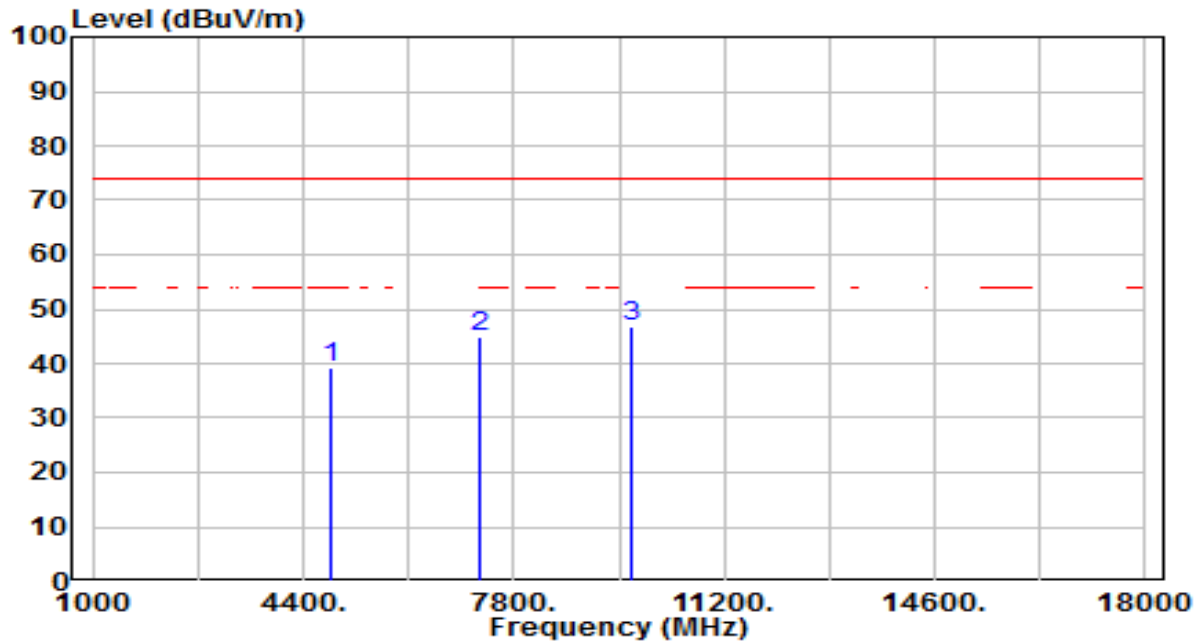


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	35.42	3.78	39.20	-34.80	74.00	100	124	Peak
2	7266.000	32.98	11.78	44.77	-29.23	74.00	100	153	Peak
3	* 9688.000	30.84	15.84	46.69	-27.31	74.00	100	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

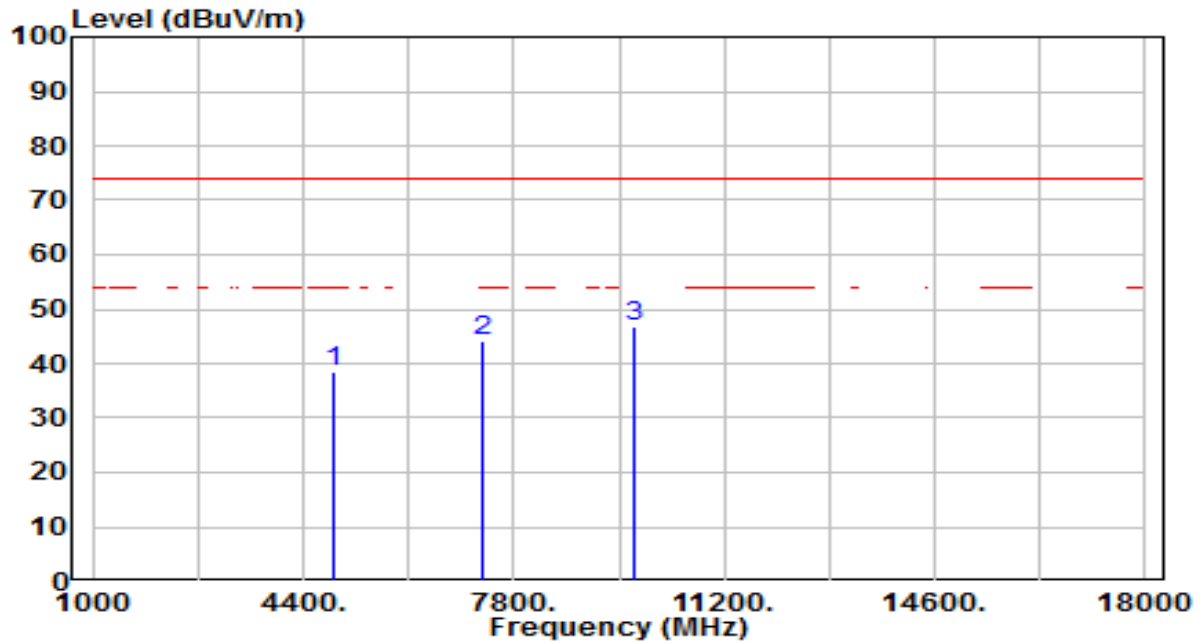


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.62	3.84	38.45	-35.55	74.00	100	192	Peak
2	7311.000	32.06	11.94	44.01	-29.99	74.00	100	354	Peak
3	* 9748.000	30.70	15.95	46.66	-27.34	74.00	100	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

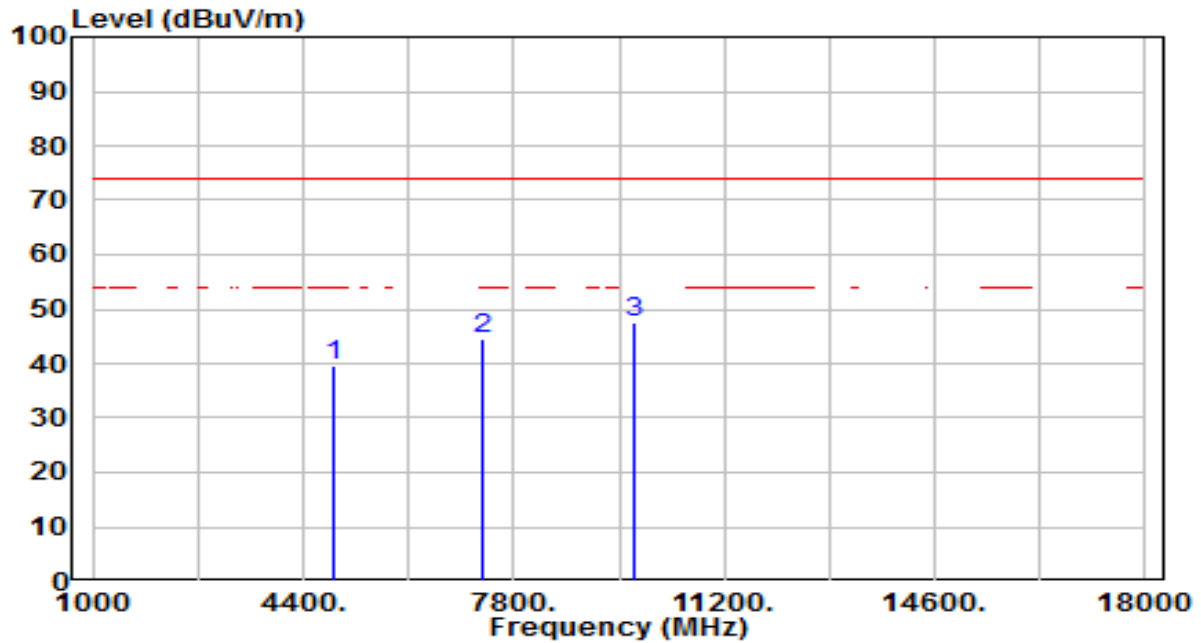


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.77	3.84	39.60	-34.40	74.00	100	46	Peak
2	7311.000	32.60	11.94	44.54	-29.46	74.00	100	317	Peak
3	* 9748.000	31.66	15.95	47.61	-26.39	74.00	100	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

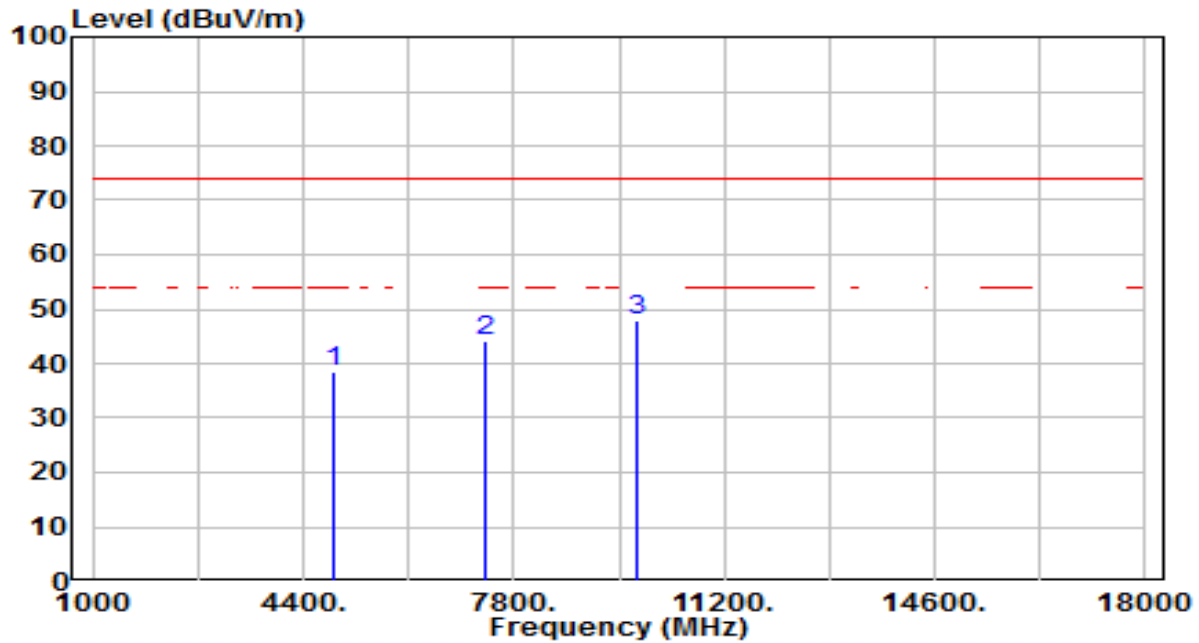


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	34.51	3.89	38.39	-35.61	74.00	100	120	Peak
2	7356.000	32.20	12.10	44.30	-29.70	74.00	100	91	Peak
3	* 9808.000	31.82	16.06	47.89	-26.11	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

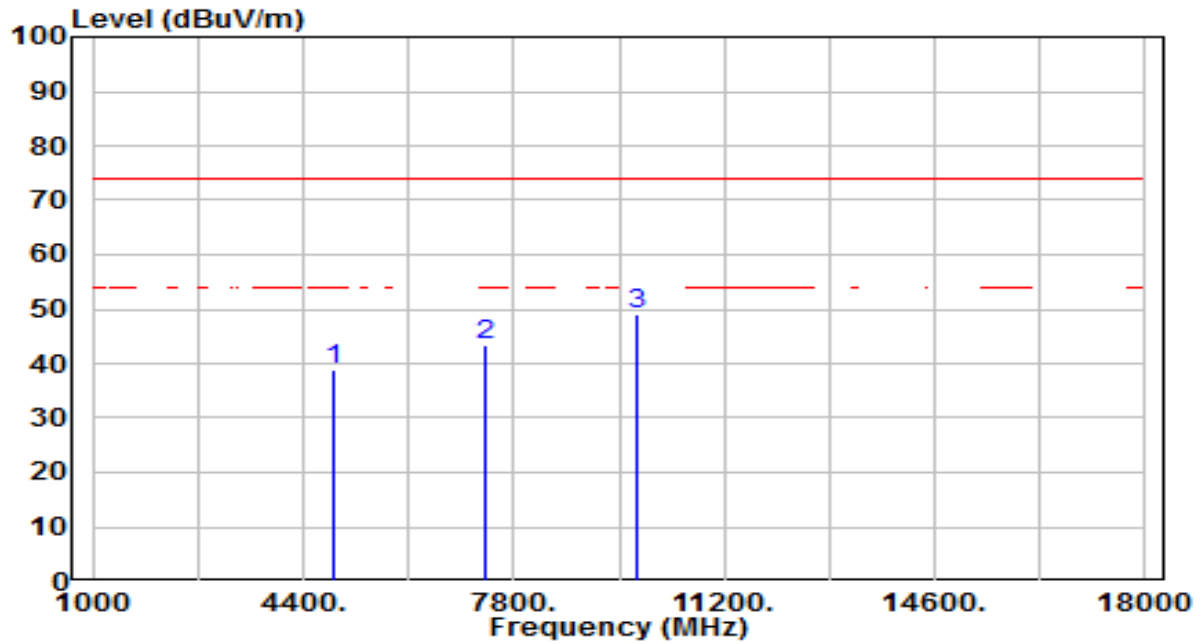


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	34.89	3.89	38.78	-35.22	74.00	100	317	Peak
2	7356.000	31.37	12.10	43.47	-30.53	74.00	100	270	Peak
3	* 9808.000	32.92	16.06	48.99	-25.01	74.00	100	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

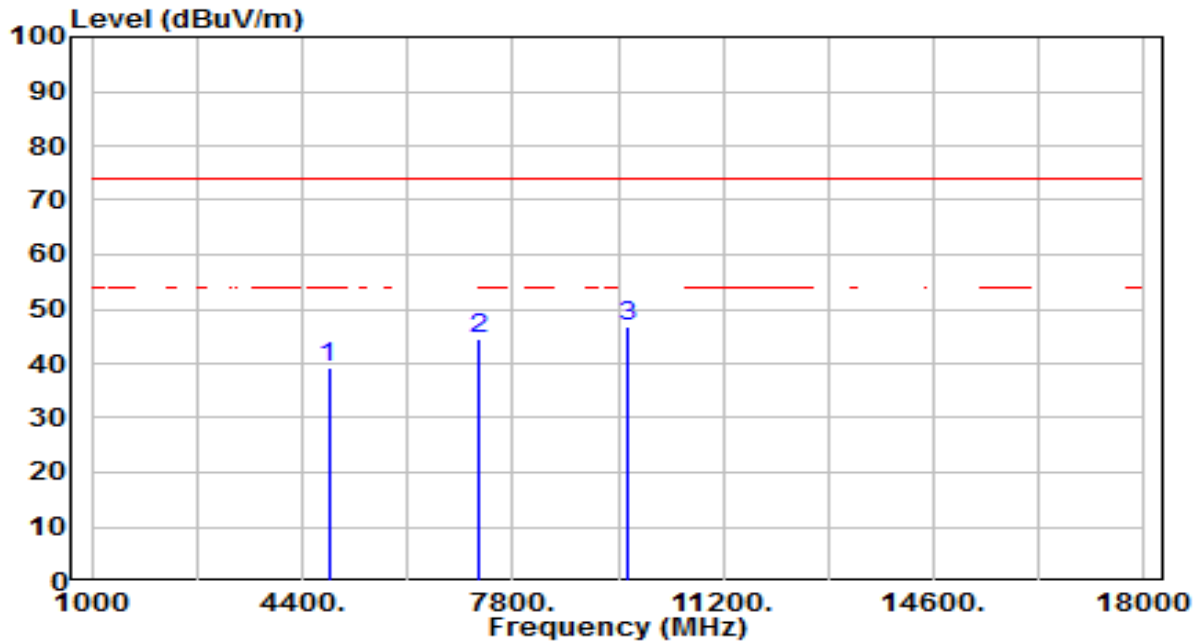


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	35.41	3.75	39.16	-34.84	74.00	100	340	Peak
2	7236.000	33.00	11.68	44.67	-29.33	74.00	100	270	Peak
3	* 9648.000	31.08	15.77	46.84	-27.16	74.00	100	131	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

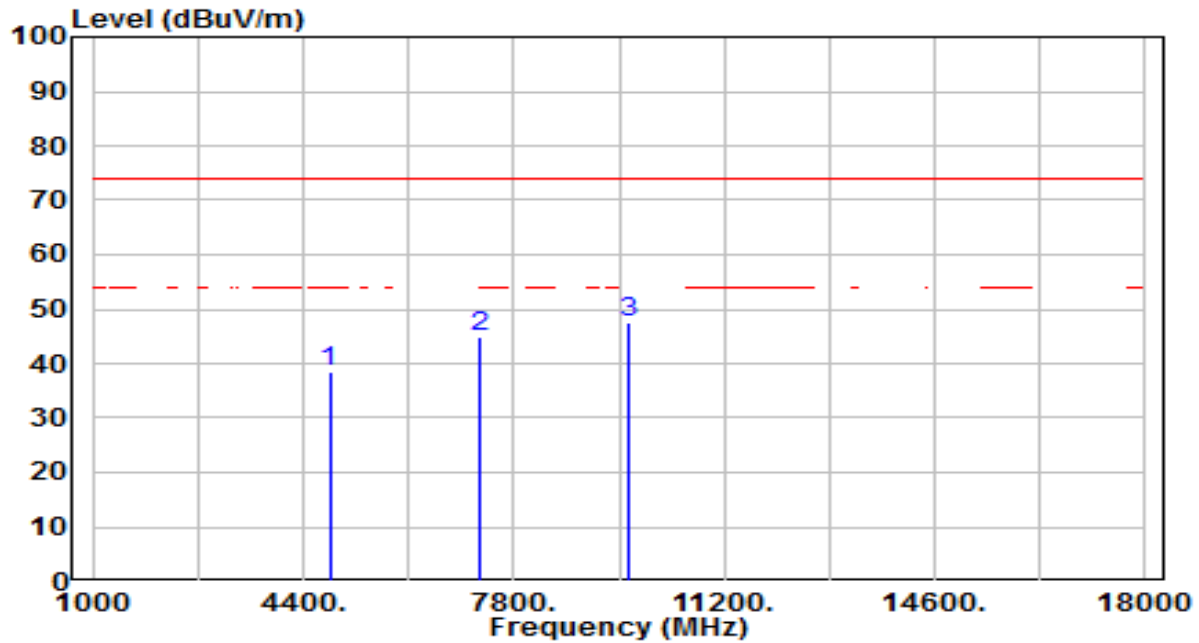


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.57	3.75	38.32	-35.68	74.00	100	160	Peak
2	7236.000	33.19	11.68	44.86	-29.14	74.00	100	105	Peak
3	* 9648.000	31.91	15.77	47.68	-26.32	74.00	100	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

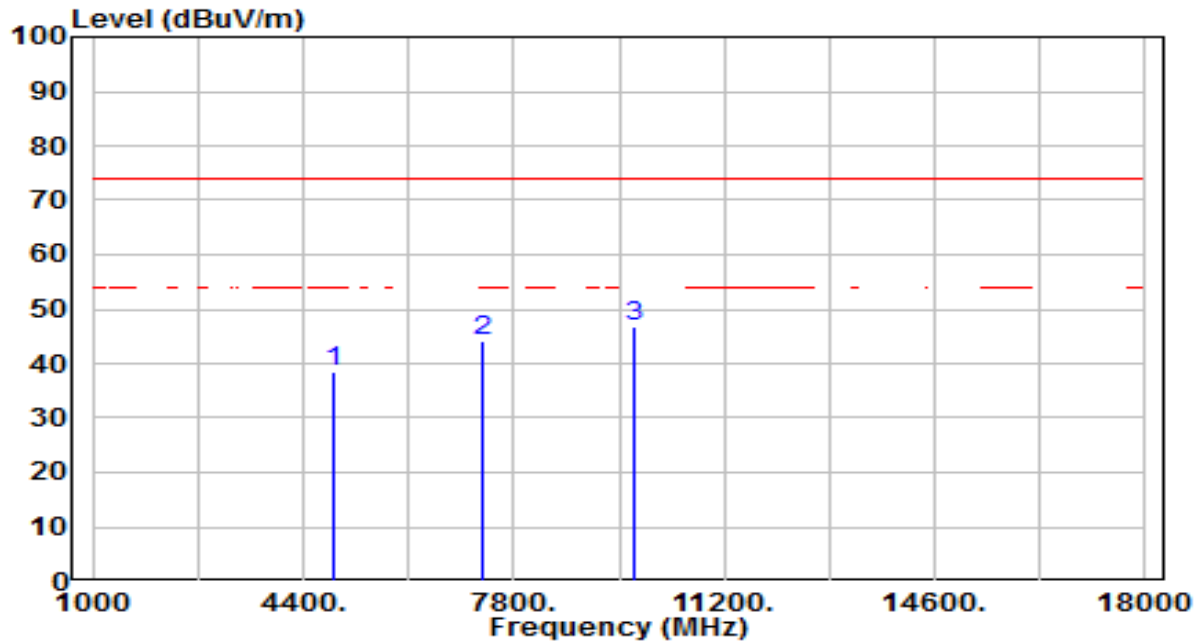


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.78	3.84	38.61	-35.39	74.00	100	248	Peak
2	7311.000	32.09	11.94	44.04	-29.96	74.00	100	332	Peak
3	* 9748.000	30.67	15.95	46.63	-27.37	74.00	100	39	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

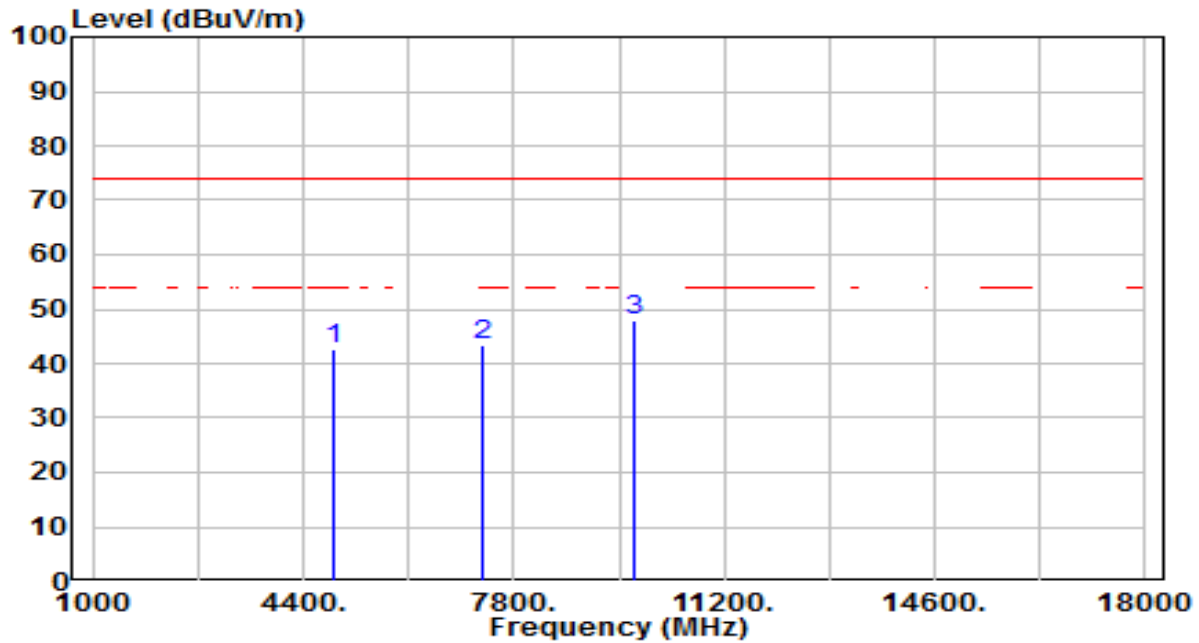


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	38.91	3.84	42.75	-31.25	74.00	100	69	Peak
2	7311.000	31.34	11.94	43.28	-30.72	74.00	100	281	Peak
3	* 9748.000	31.87	15.95	47.83	-26.17	74.00	100	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

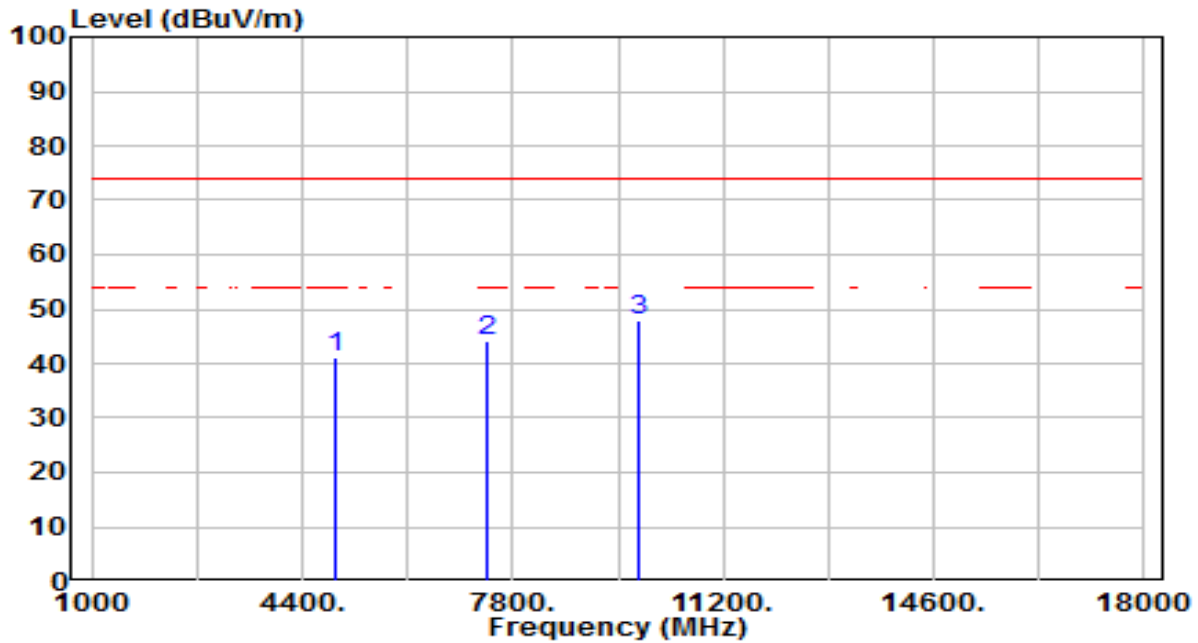


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	37.05	3.92	40.97	-33.03	74.00	100	194	Peak
2	7386.000	32.11	12.21	44.32	-29.68	74.00	100	10	Peak
3	* 9848.000	31.93	16.14	48.07	-25.93	74.00	100	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

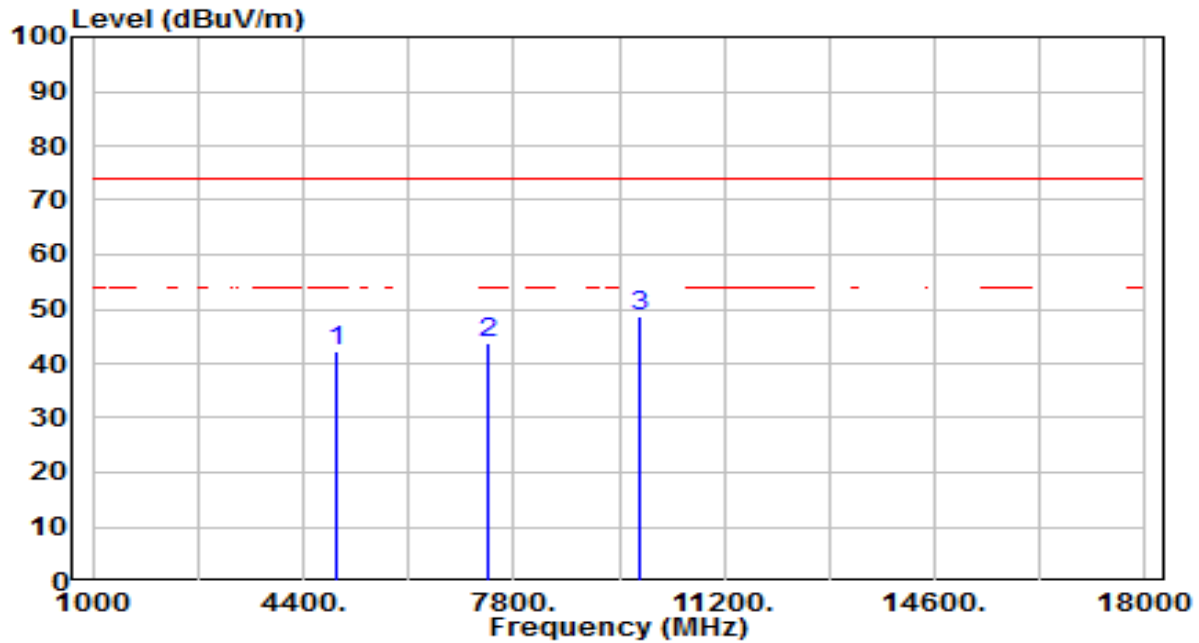


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	38.16	3.92	42.09	-31.91	74.00	100	35	Peak
2	7386.000	31.57	12.21	43.77	-30.23	74.00	100	251	Peak
3	* 9848.000	32.54	16.14	48.68	-25.32	74.00	100	174	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

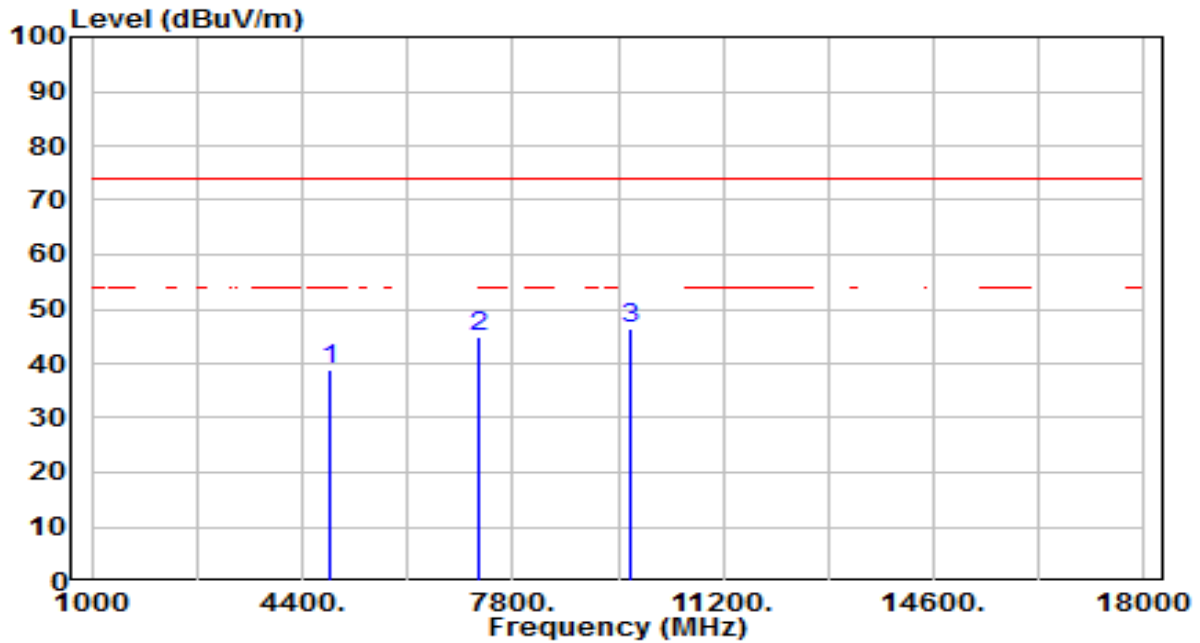


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	35.27	3.78	39.05	-34.95	74.00	100	251	Peak
2	7266.000	33.21	11.78	44.99	-29.01	74.00	100	311	Peak
3	* 9688.000	30.42	15.84	46.26	-27.74	74.00	100	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

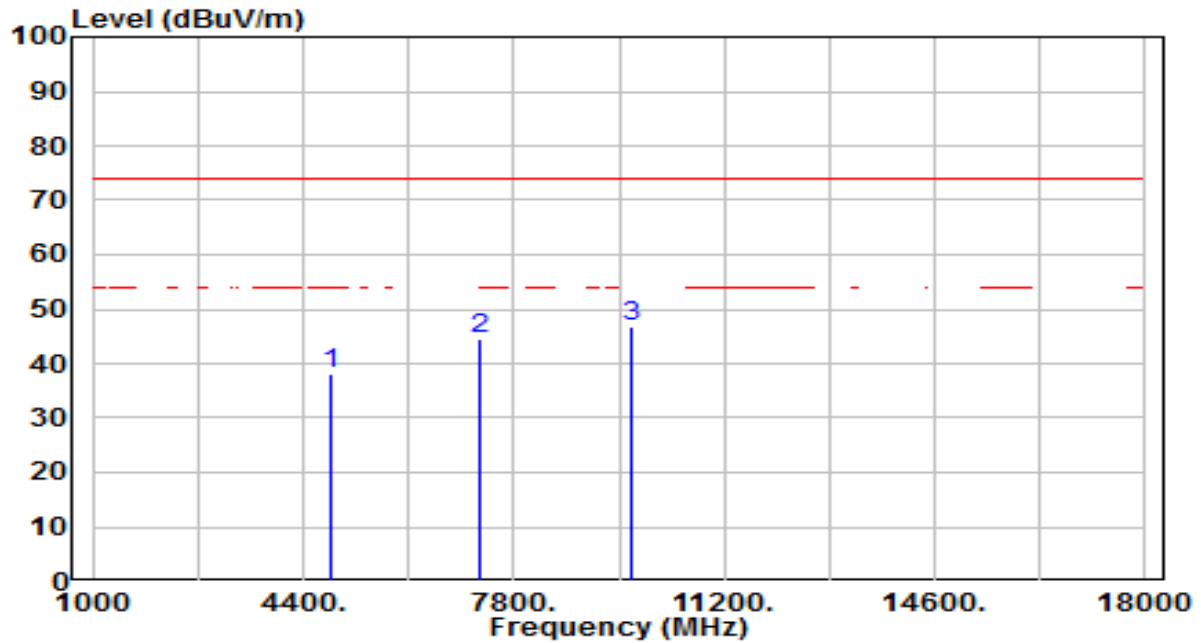


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	34.43	3.78	38.21	-35.79	74.00	100	262	Peak
2	7266.000	32.86	11.78	44.64	-29.36	74.00	100	130	Peak
3	* 9688.000	30.87	15.84	46.71	-27.29	74.00	100	116	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

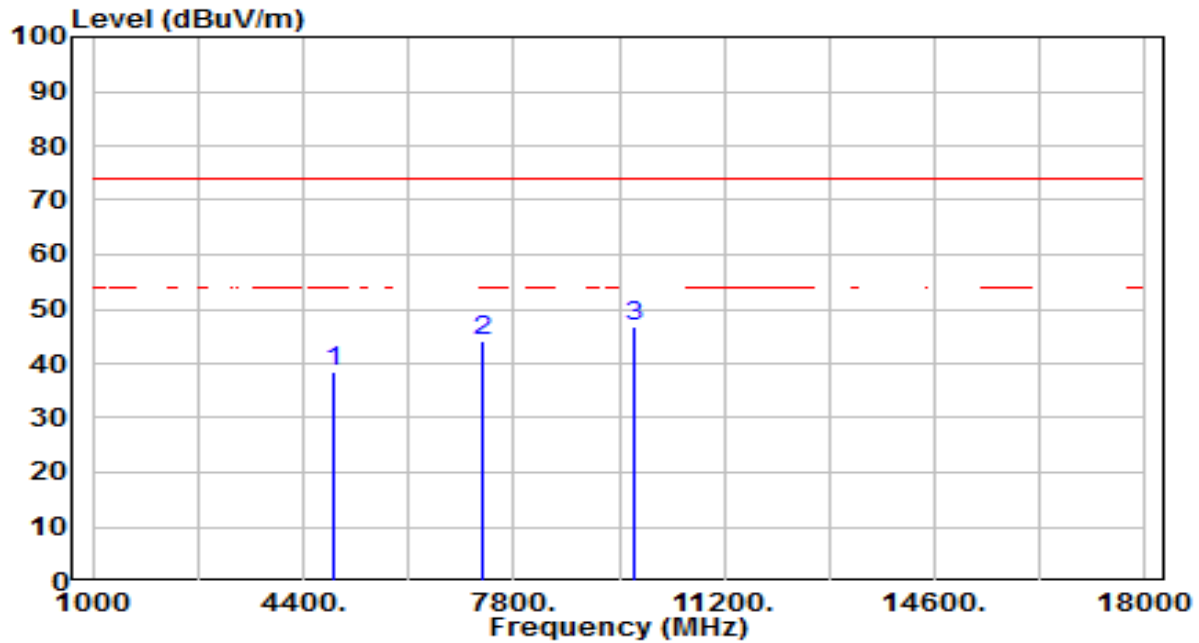


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.48	3.84	38.31	-35.69	74.00	100	242	Peak
2	7311.000	32.26	11.94	44.20	-29.80	74.00	100	253	Peak
3	* 9748.000	30.77	15.95	46.72	-27.28	74.00	100	329	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

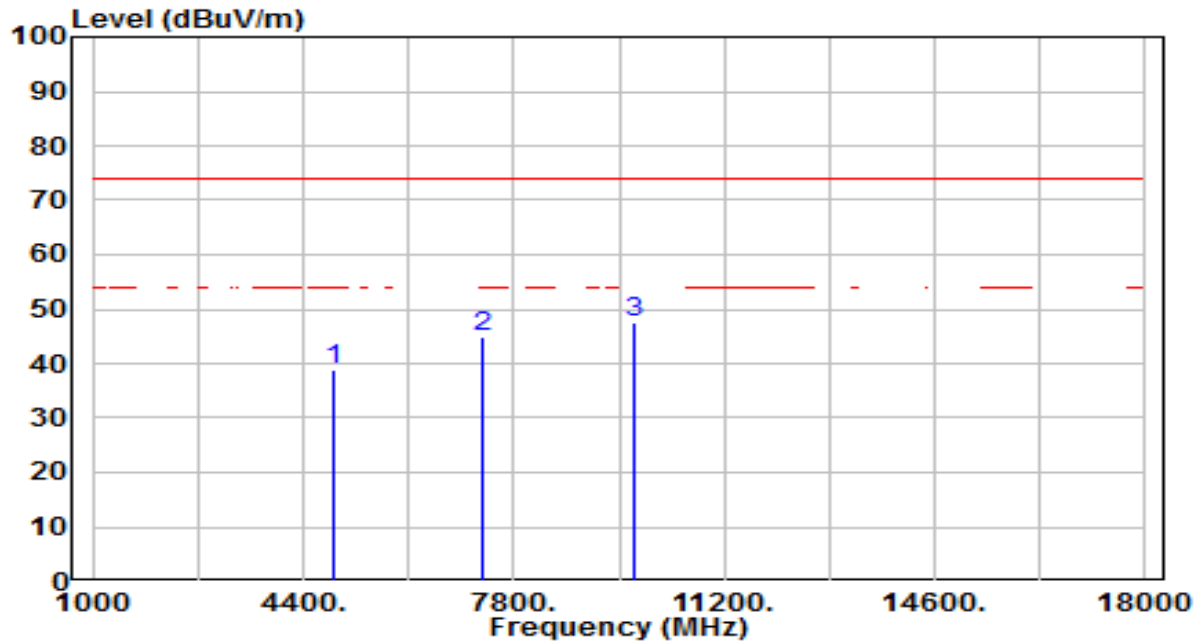


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.19	3.84	39.02	-34.98	74.00	100	318	Peak
2	7311.000	32.79	11.94	44.73	-29.27	74.00	100	277	Peak
3	* 9748.000	31.75	15.95	47.70	-26.30	74.00	100	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

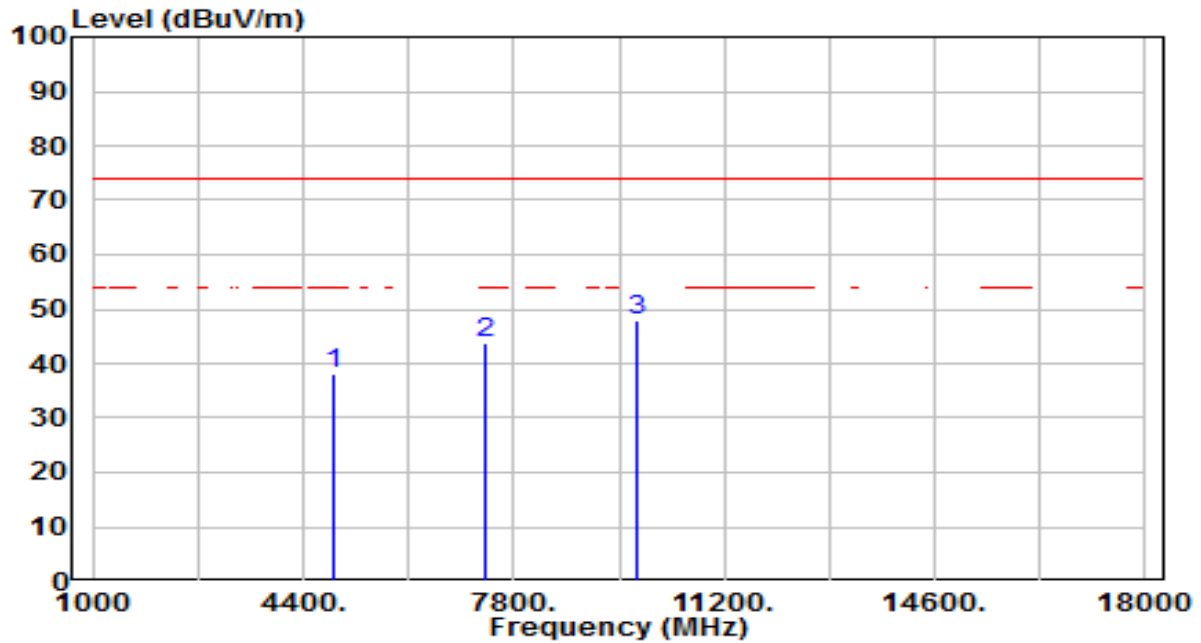


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	34.18	3.89	38.07	-35.93	74.00	100	346	Peak
2	7356.000	31.67	12.10	43.77	-30.23	74.00	100	302	Peak
3	* 9808.000	31.67	16.06	47.74	-26.26	74.00	100	82	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

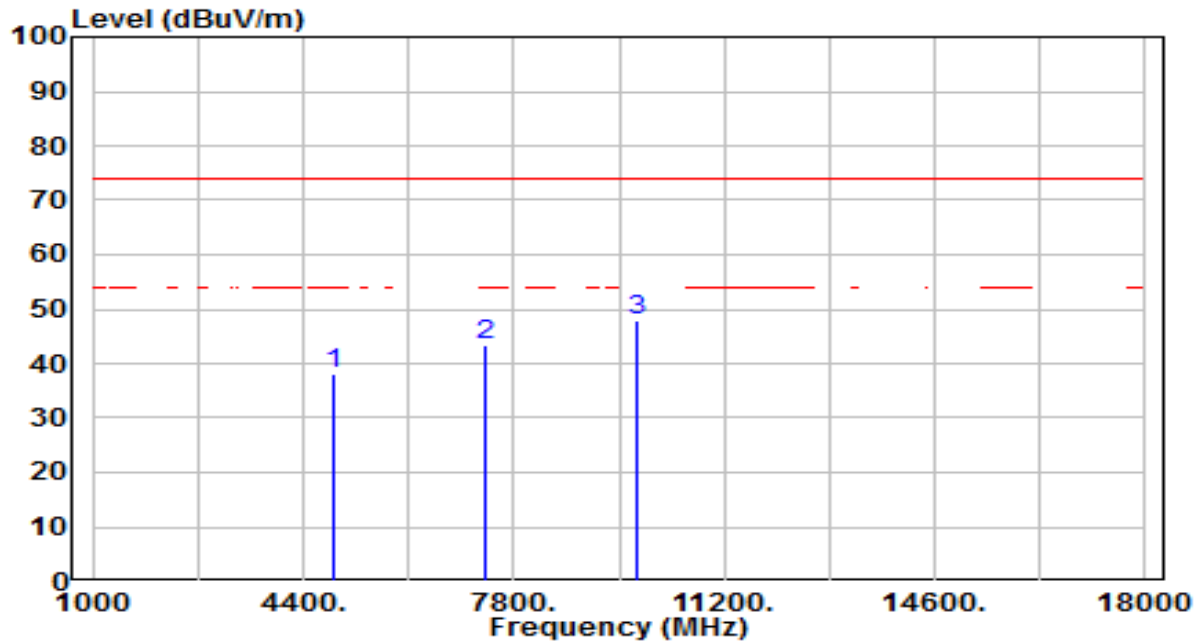


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	34.13	3.89	38.02	-35.98	74.00	100	252	Peak
2	7356.000	31.29	12.10	43.39	-30.61	74.00	100	311	Peak
3	* 9808.000	31.74	16.06	47.81	-26.19	74.00	100	179	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

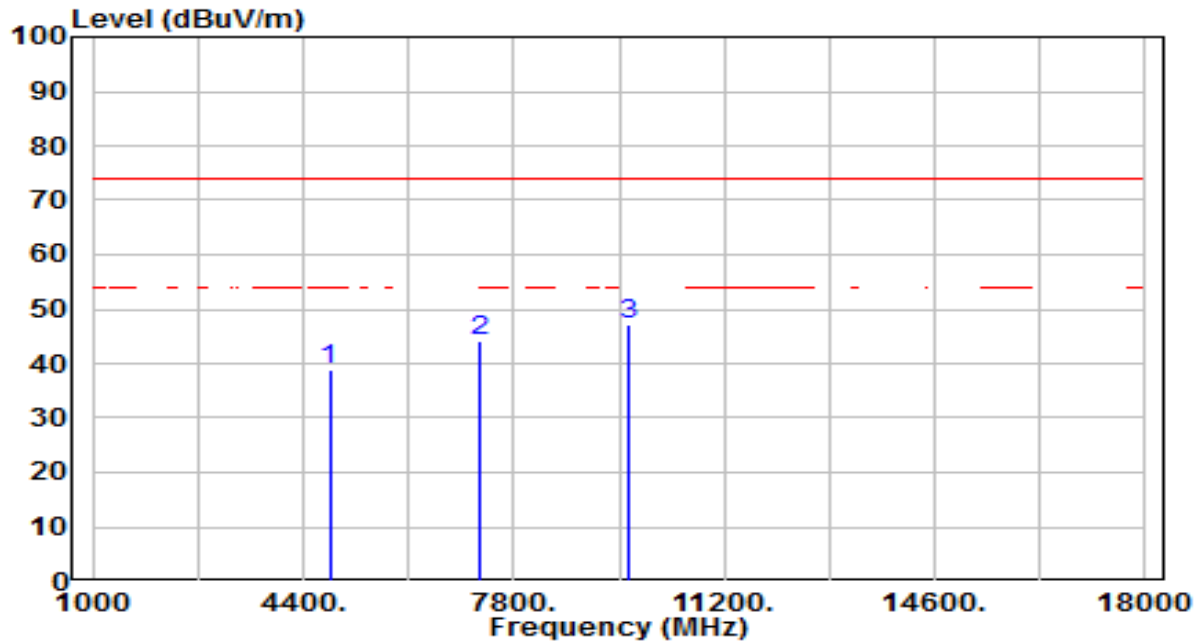


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	35.08	3.75	38.83	-35.17	74.00	100	119	Peak
2	7236.000	32.61	11.68	44.29	-29.71	74.00	100	13	Peak
3	* 9648.000	31.23	15.77	47.00	-27.00	74.00	100	144	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

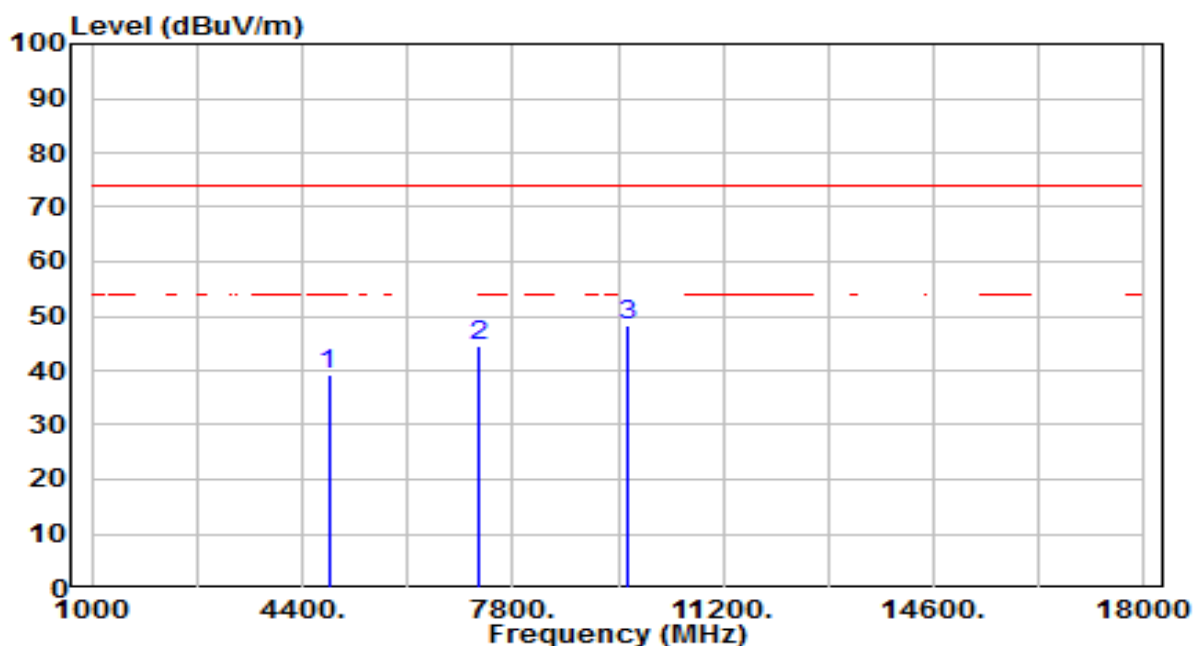


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	35.54	3.75	39.28	-34.72	74.00	100	160	Peak
2	7236.000	32.73	11.68	44.41	-29.59	74.00	100	343	Peak
3	* 9648.000	32.63	15.77	48.40	-25.60	74.00	100	94	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

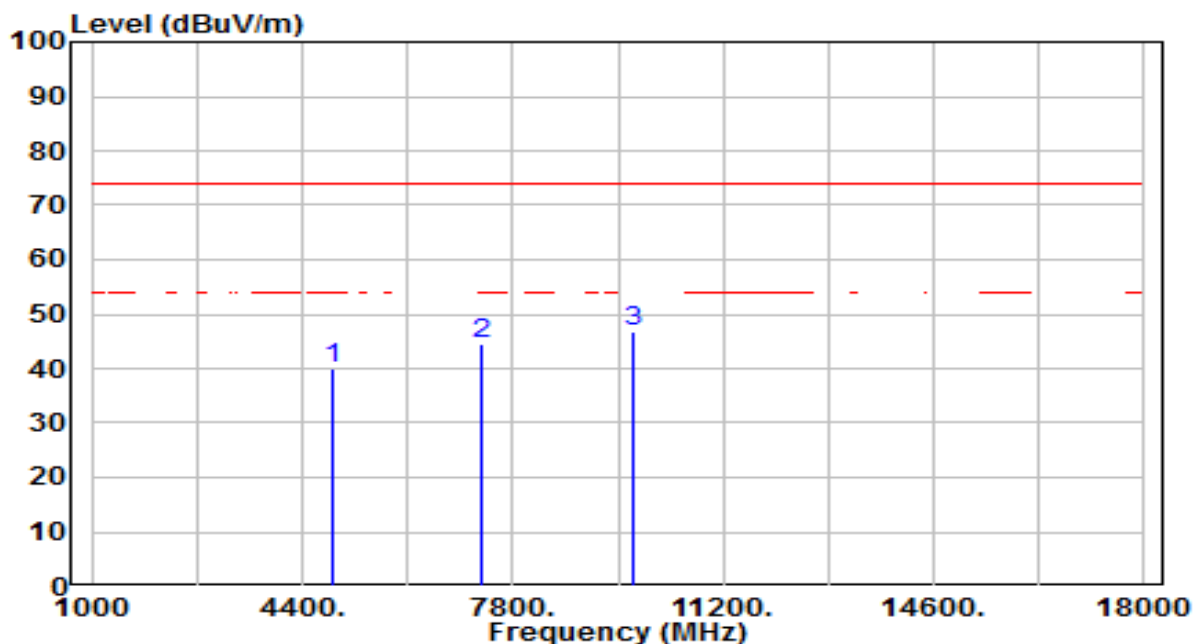


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	36.00	3.84	39.83	-34.17	74.00	100	320	Peak
2	7311.000	32.75	11.94	44.69	-29.31	74.00	100	353	Peak
3	* 9748.000	30.76	15.95	46.72	-27.28	74.00	100	108	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

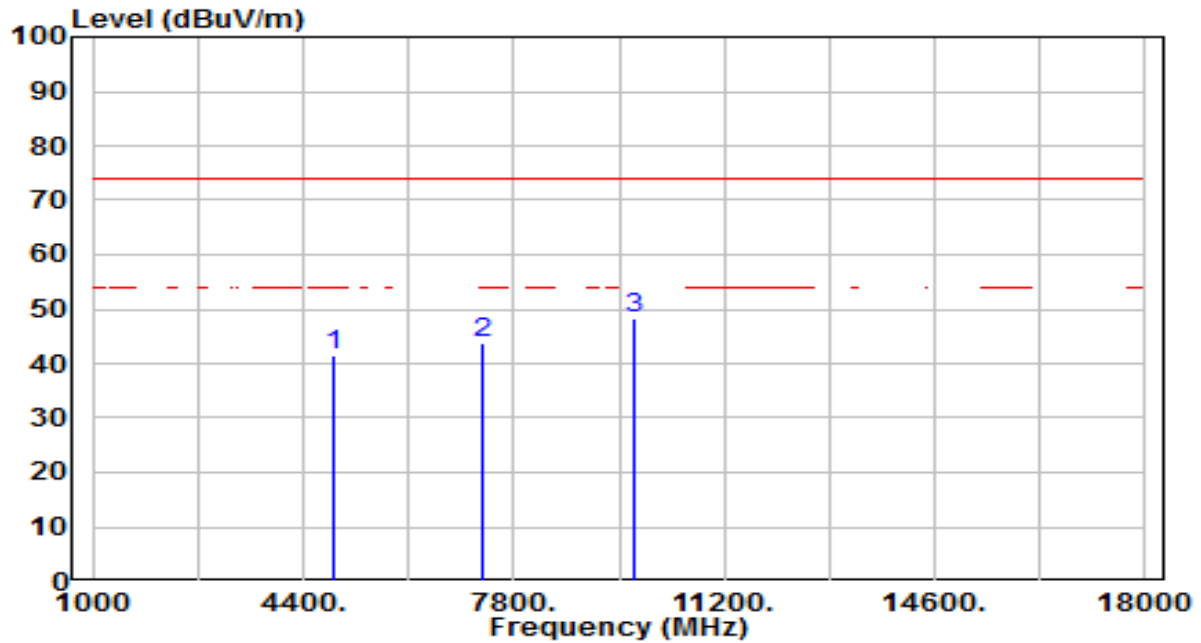


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	37.51	3.84	41.34	-32.66	74.00	100	44	Peak
2	7311.000	31.79	11.94	43.73	-30.27	74.00	100	230	Peak
3	* 9748.000	32.28	15.95	48.23	-25.77	74.00	100	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

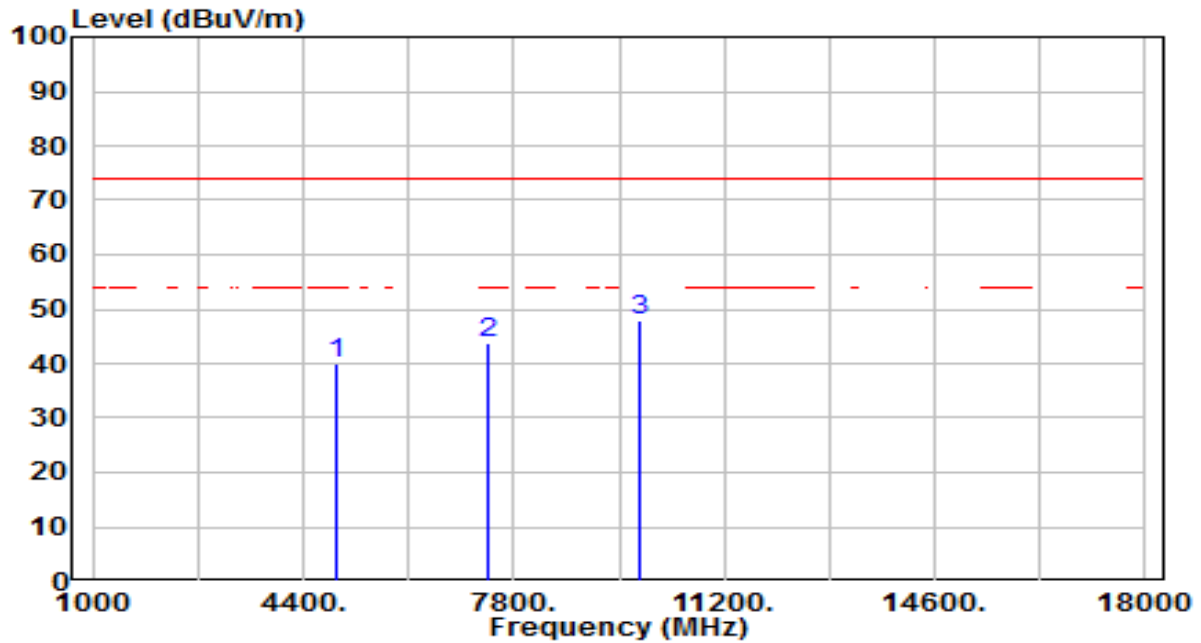


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	35.91	3.92	39.84	-34.16	74.00	100	20	Peak
2	7386.000	31.63	12.21	43.84	-30.16	74.00	100	360	Peak
3	* 9848.000	31.67	16.14	47.81	-26.19	74.00	100	218	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

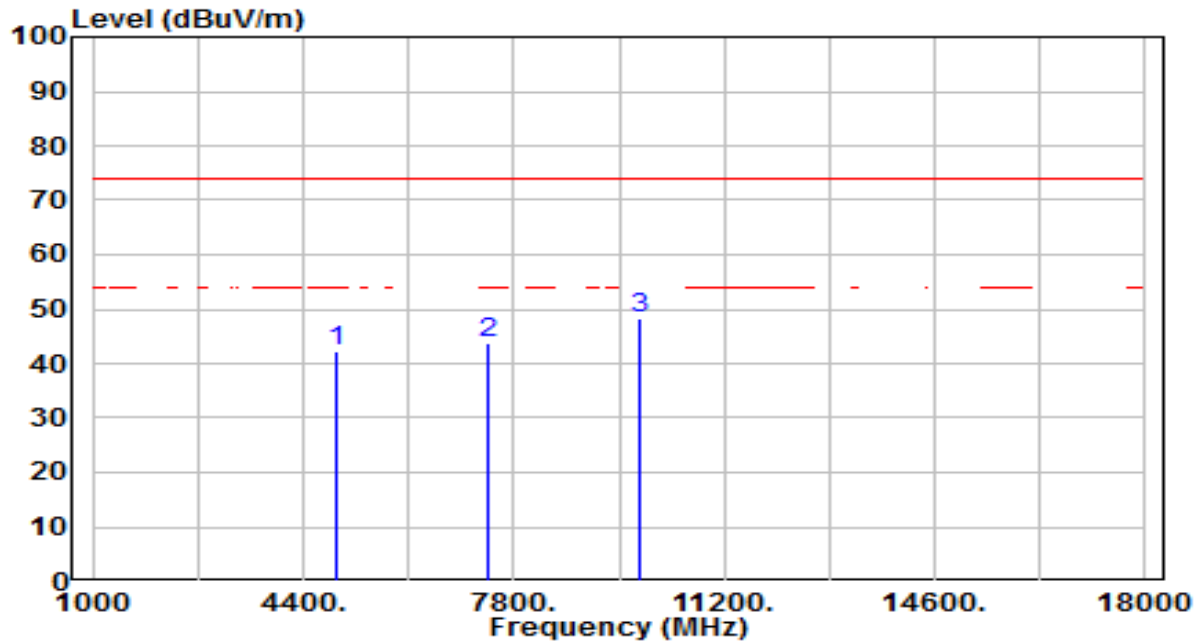


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	38.38	3.92	42.31	-31.69	74.00	100	310	Peak
2	7386.000	31.70	12.21	43.91	-30.09	74.00	100	76	Peak
3	* 9848.000	32.20	16.14	48.34	-25.66	74.00	100	42	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

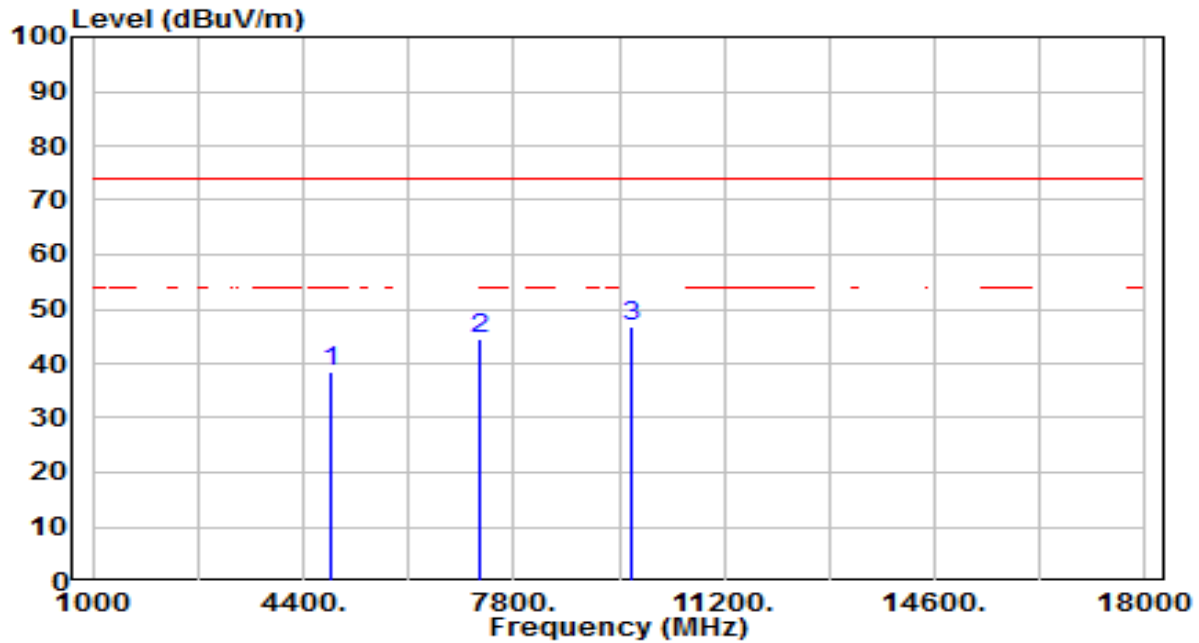


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	34.80	3.78	38.59	-35.41	74.00	100	193	Peak
2	7266.000	32.73	11.78	44.51	-29.49	74.00	100	307	Peak
3	* 9688.000	30.85	15.84	46.70	-27.30	74.00	100	68	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

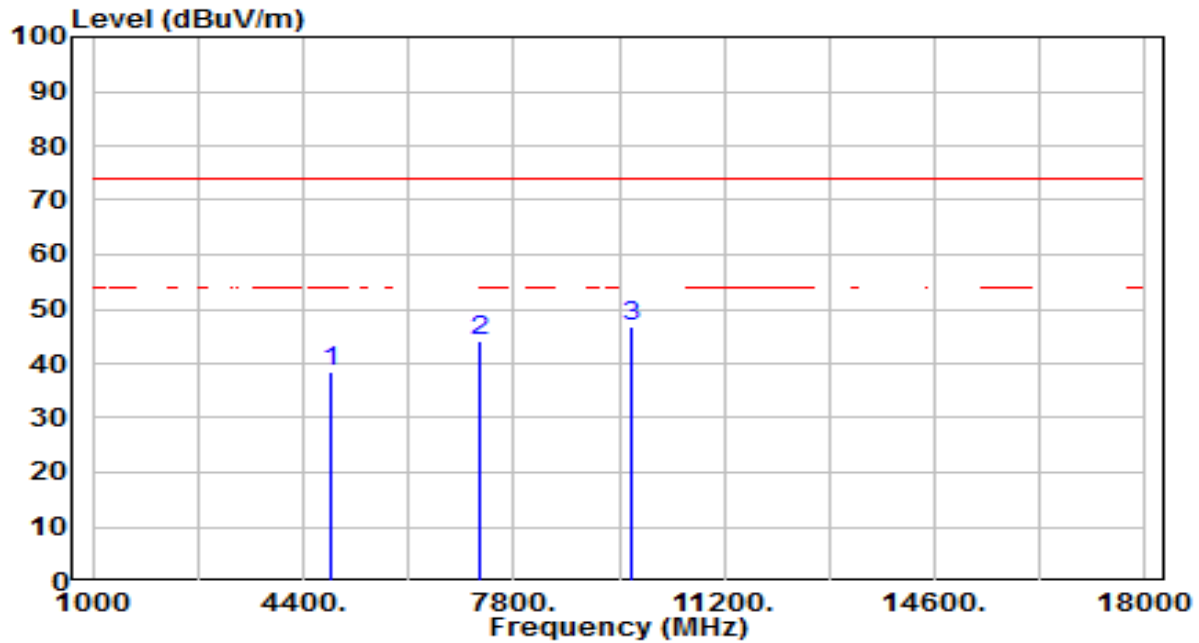


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	34.64	3.78	38.42	-35.58	74.00	100	332	Peak
2	7266.000	32.49	11.78	44.27	-29.73	74.00	100	274	Peak
3	* 9688.000	30.88	15.84	46.72	-27.28	74.00	100	183	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

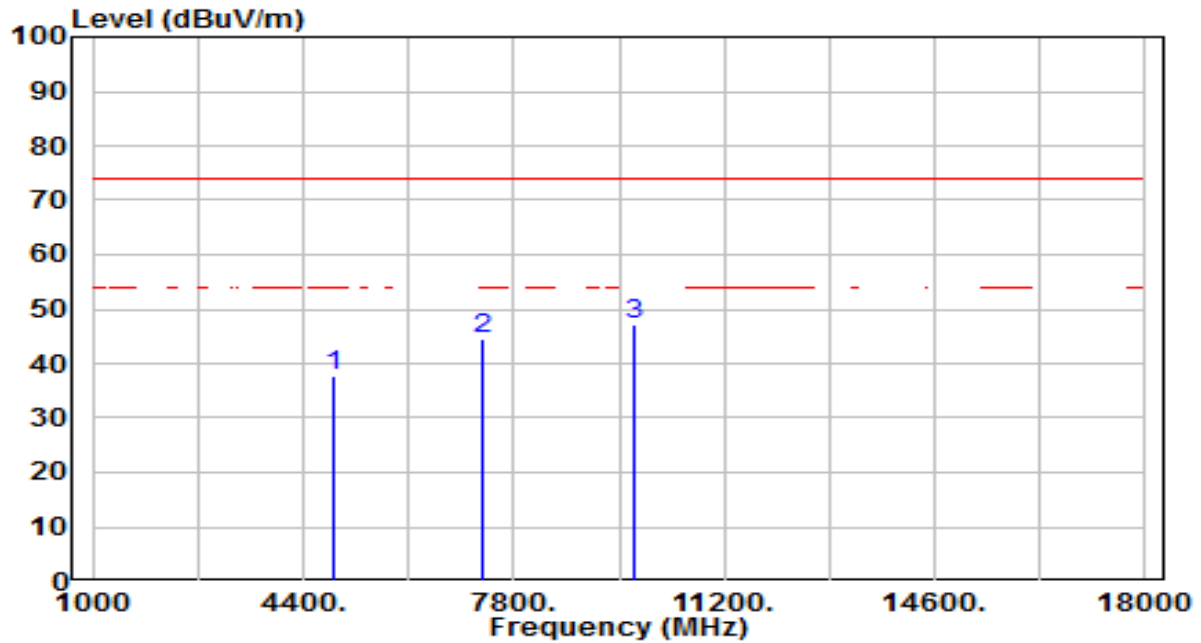


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.01	3.84	37.85	-36.15	74.00	100	295	Peak
2	7311.000	32.42	11.94	44.36	-29.64	74.00	100	181	Peak
3	* 9748.000	31.12	15.95	47.07	-26.93	74.00	100	141	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

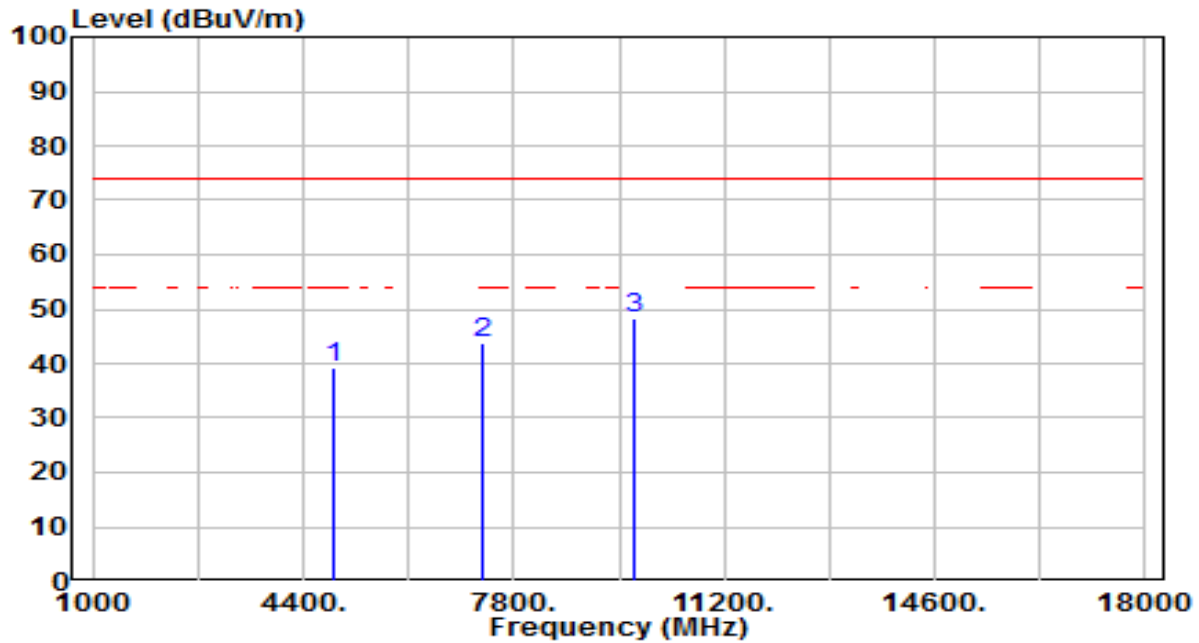


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.33	3.84	39.16	-34.84	74.00	100	125	Peak
2	7311.000	31.91	11.94	43.85	-30.15	74.00	100	336	Peak
3	* 9748.000	32.17	15.95	48.12	-25.88	74.00	100	267	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

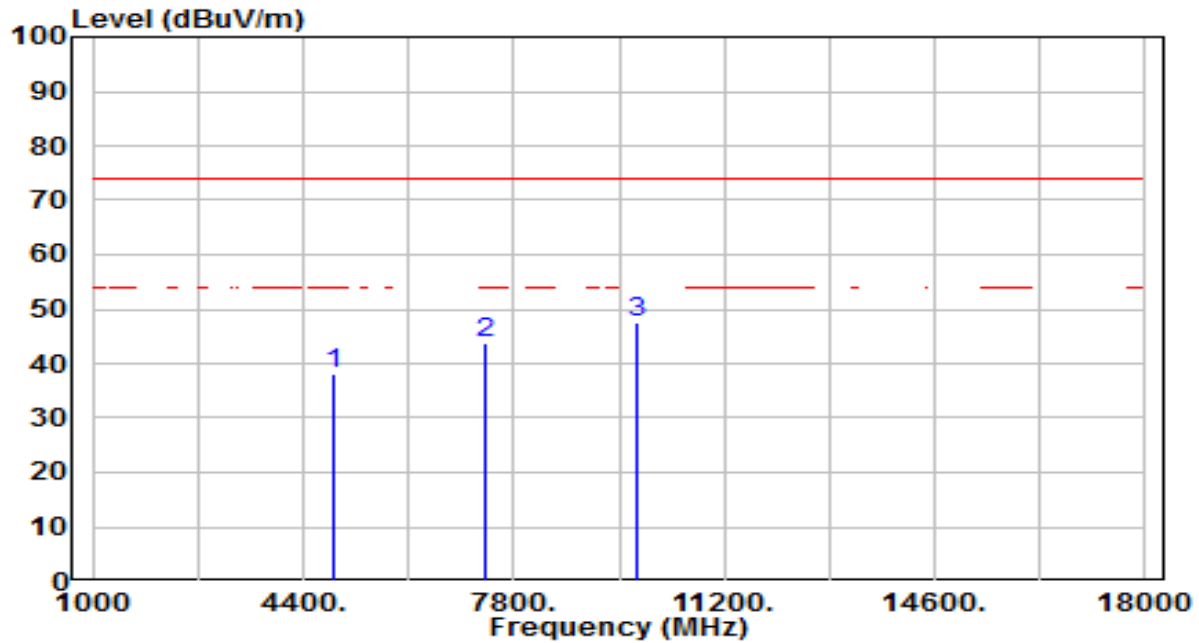


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	34.20	3.89	38.09	-35.91	74.00	100	144	Peak
2	7356.000	31.63	12.10	43.73	-30.27	74.00	100	91	Peak
3	* 9808.000	31.63	16.06	47.70	-26.30	74.00	100	47	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

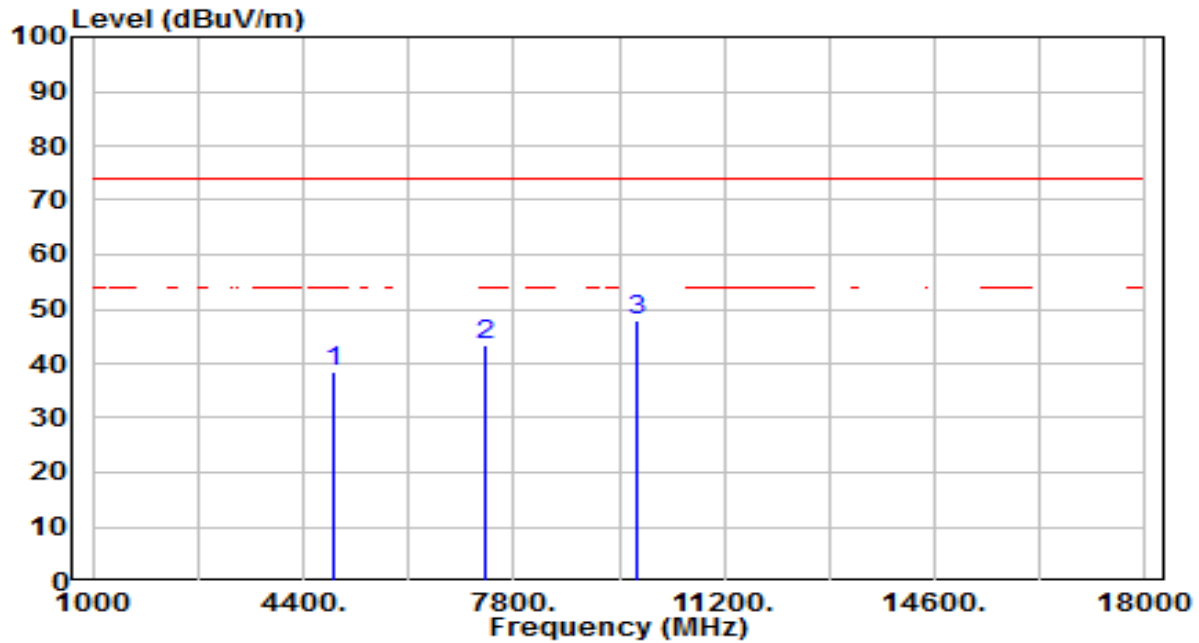


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	34.43	3.89	38.32	-35.68	74.00	100	339	Peak
2	7356.000	31.21	12.10	43.31	-30.69	74.00	100	245	Peak
3	* 9808.000	31.87	16.06	47.93	-26.07	74.00	100	271	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-02-08
Factor	BBHA 9170	Temp. / Humidity	19°C /46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

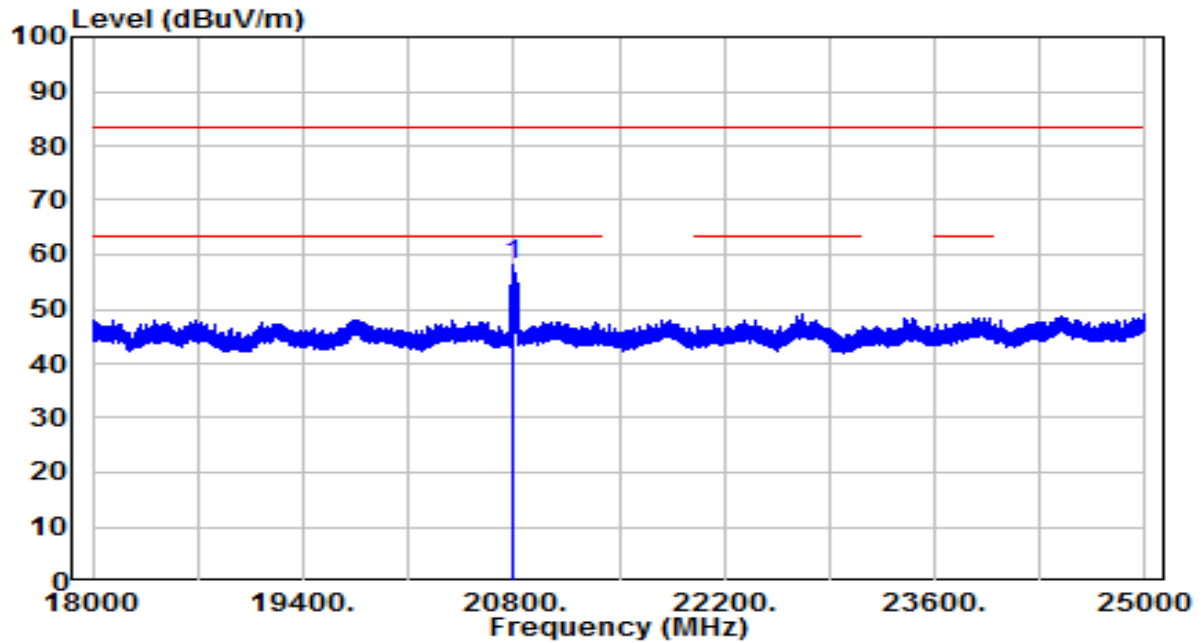


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	20796.060	47.19	10.94	58.14	-25.36	83.50	150	227	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-02-08
Factor	BBHA 9170	Temp. / Humidity	19°C /46%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

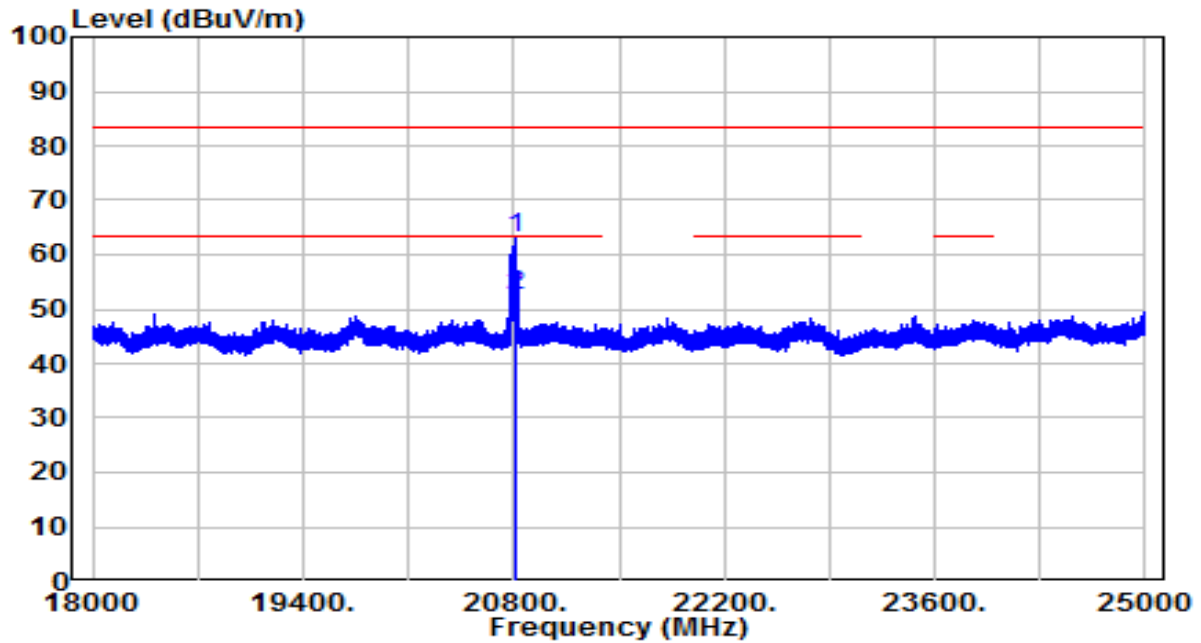

No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	20807.000	51.92	10.95	62.87	-20.63	83.50	150	332	Peak
2	*	20807.000	41.35	10.95	52.31	-11.19	63.50	150	332	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2.Test Procedure Used

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.7.3.Test Setting

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.


If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.

4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

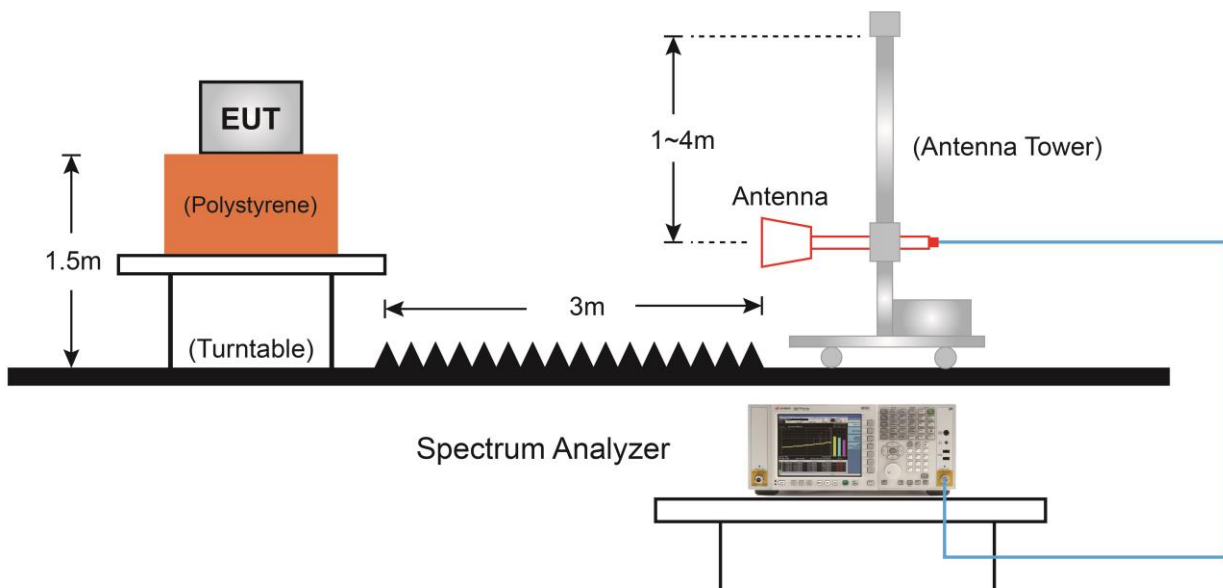7.7.4.Test Setup

7.7.5. Test Result

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

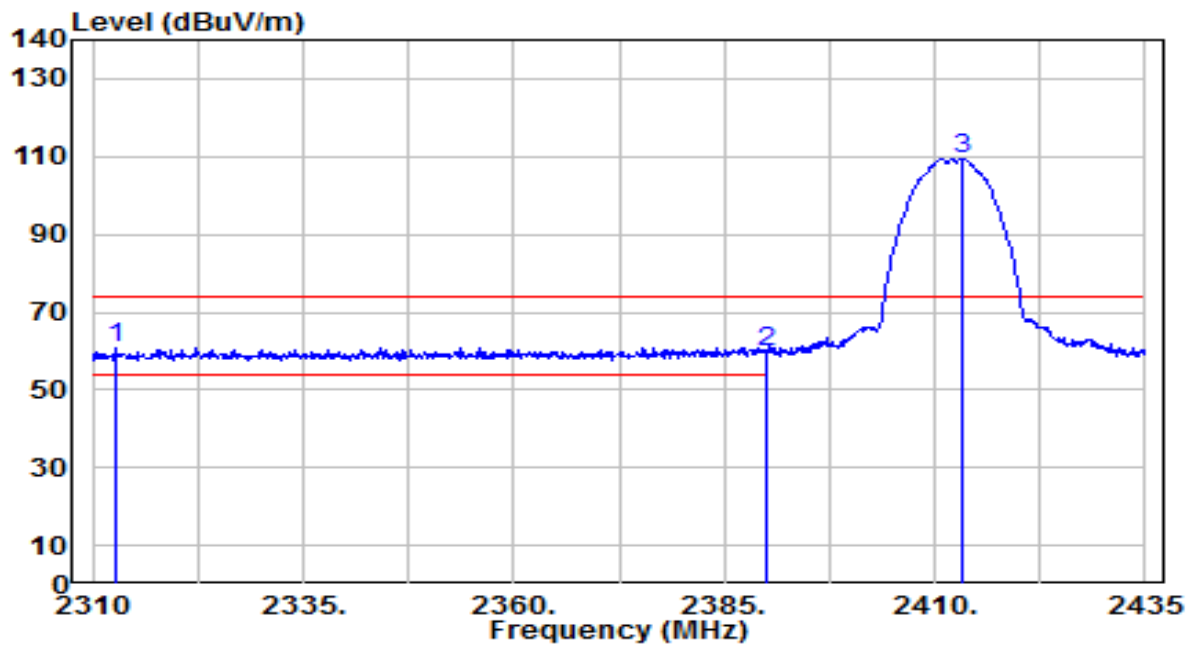


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2312.625	29.33	31.66	60.99	-13.01	74.00	135	175	Peak
2		2390.000	27.72	31.95	59.67	-14.33	74.00	135	175	Peak
3		2413.250	77.50	32.04	109.53	N/A	N/A	135	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

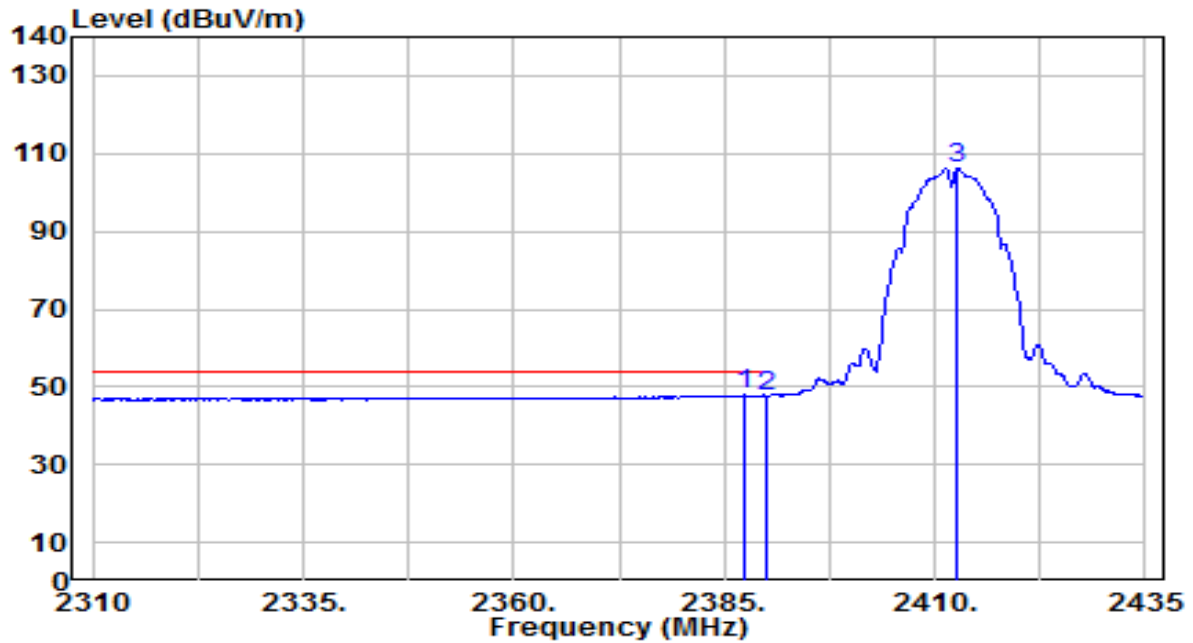


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.500	15.94	31.94	47.88	-6.12	54.00	135	175	Average
2		2390.000	15.68	31.95	47.63	-6.37	54.00	135	175	Average
3		2412.750	74.06	32.03	106.09	N/A	N/A	135	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

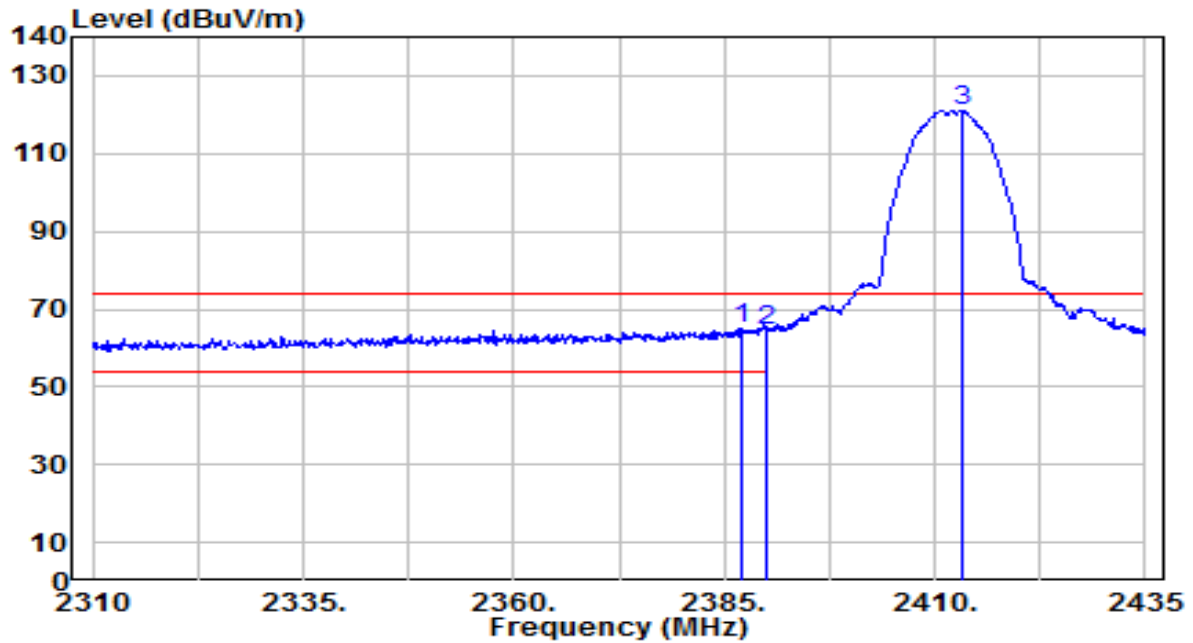


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.000	33.29	31.94	65.22	-8.78	74.00	150	180	Peak
2		2390.000	32.31	31.95	64.26	-9.74	74.00	150	180	Peak
3		2413.125	88.94	32.04	120.97	N/A	N/A	150	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

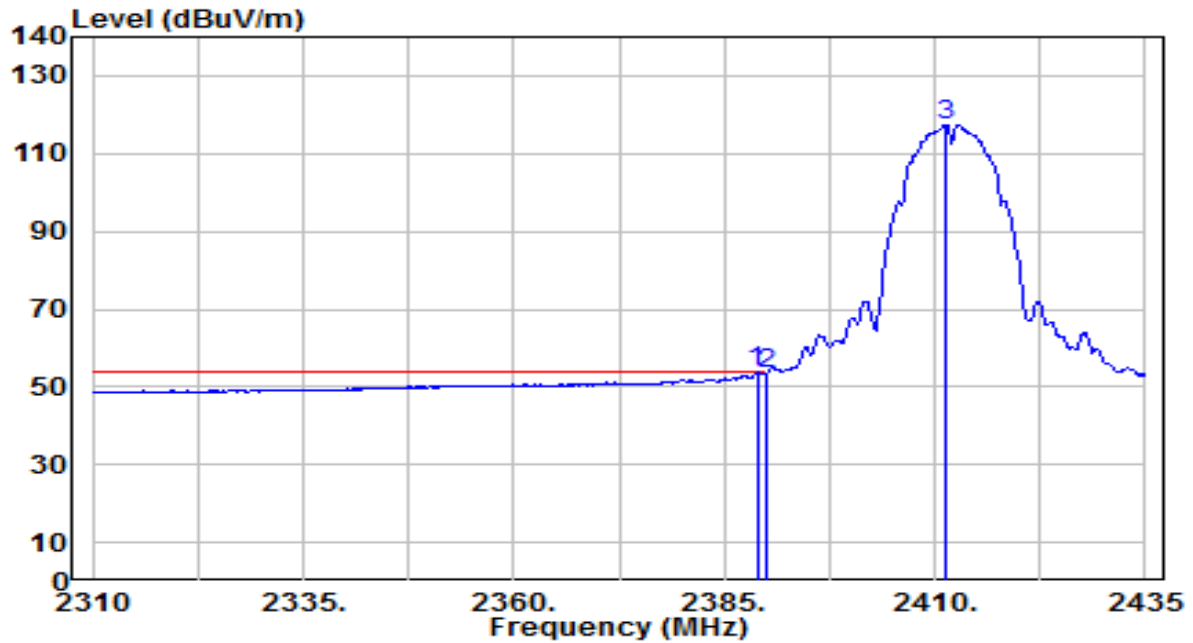


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.875	21.76	31.94	53.71	-0.29	54.00	152	180	Average
2		2390.000	21.47	31.95	53.42	-0.58	54.00	150	180	Average
3		2411.250	85.39	32.03	117.41	N/A	N/A	150	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

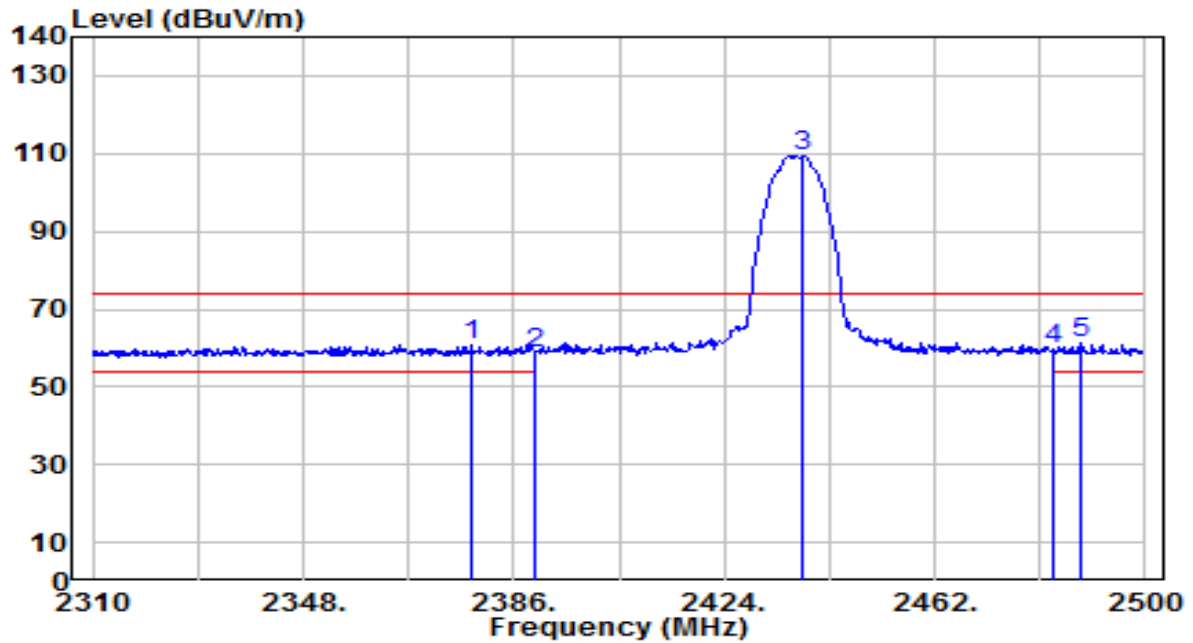


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2378.590	28.95	31.91	60.86	-13.14	74.00	155	180	Peak
2	2390.000	26.60	31.95	58.55	-15.45	74.00	155	180	Peak
3	2438.250	77.46	32.13	109.59	N/A	N/A	155	180	Peak
4	2483.500	27.28	32.30	59.58	-14.42	74.00	155	180	Peak
5	* 2488.600	28.88	32.32	61.19	-12.81	74.00	155	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

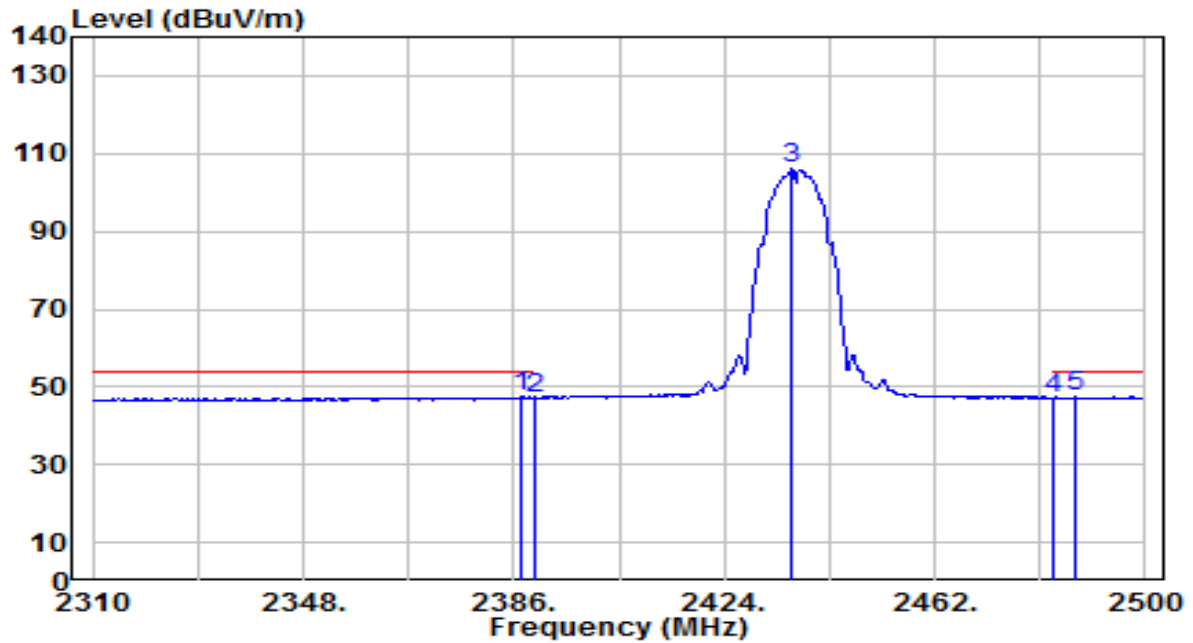


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.520	15.46	31.94	47.40	-6.60	54.00	155	180	Average
2		2390.000	15.21	31.95	47.16	-6.84	54.00	155	180	Average
3		2436.350	73.90	32.12	106.02	N/A	N/A	155	180	Average
4		2483.500	14.86	32.30	47.16	-6.84	54.00	155	180	Average
5		2487.270	15.06	32.31	47.37	-6.63	54.00	155	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

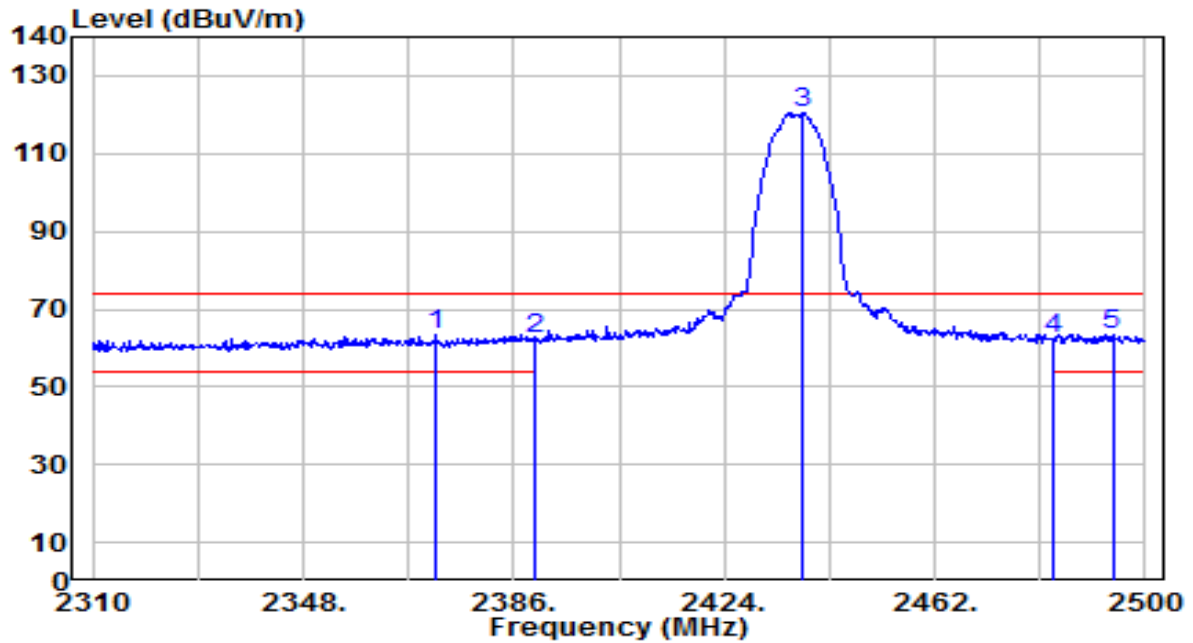


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2372.130	31.75	31.88	63.64	-10.36	74.00	180	175	Peak
2		2390.000	30.49	31.95	62.43	-11.57	74.00	180	175	Peak
3		2438.250	88.39	32.13	120.52	N/A	N/A	180	175	Peak
4		2483.500	30.22	32.30	62.52	-11.48	74.00	180	175	Peak
5		2494.110	31.21	32.34	63.55	-10.45	74.00	180	175	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

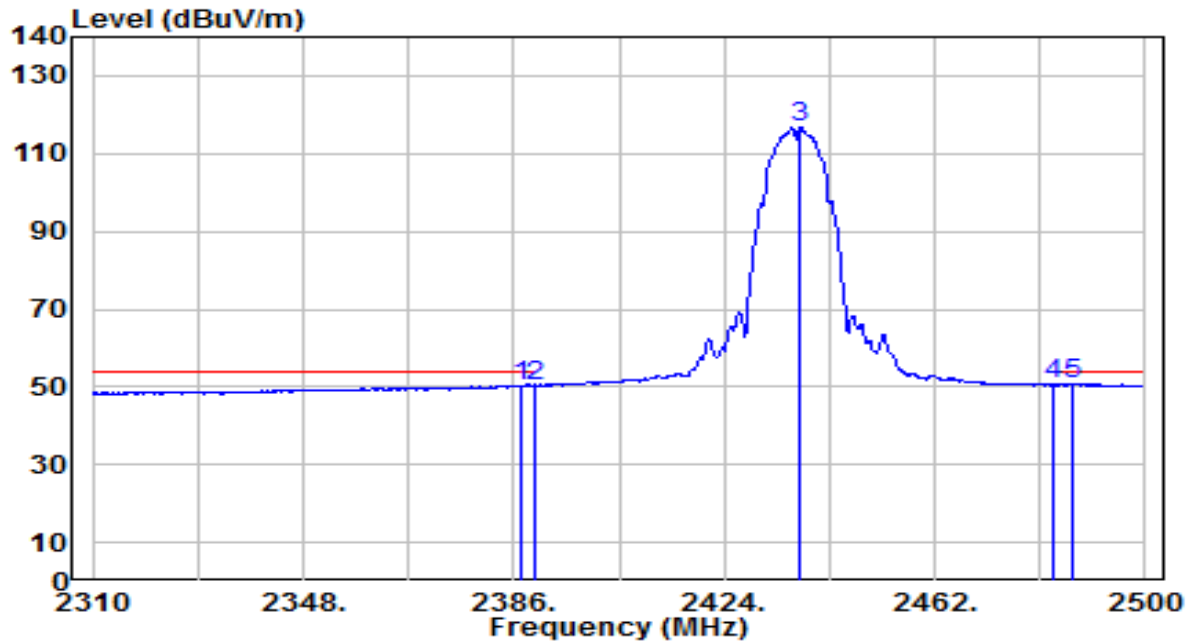


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.520	18.29	31.94	50.23	-3.77	54.00	180	175	Average
2	2390.000	18.31	31.95	50.26	-3.74	54.00	180	175	Average
3	2437.680	84.71	32.13	116.84	N/A	N/A	180	175	Average
4	2483.500	18.16	32.30	50.46	-3.54	54.00	180	175	Average
5	* 2486.890	18.39	32.31	50.70	-3.30	54.00	180	175	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

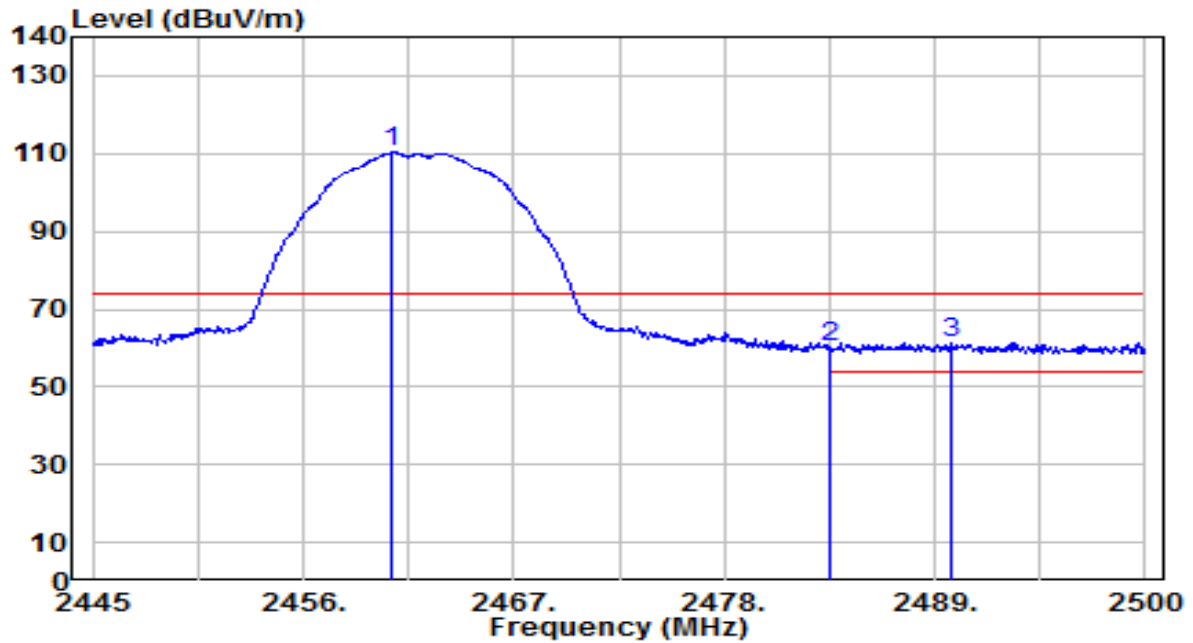


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.565	78.05	32.21	110.27	N/A	N/A	130	180	Peak
2	2483.500	27.71	32.30	60.01	-13.99	74.00	130	180	Peak
3	* 2489.880	29.00	32.32	61.32	-12.68	74.00	130	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

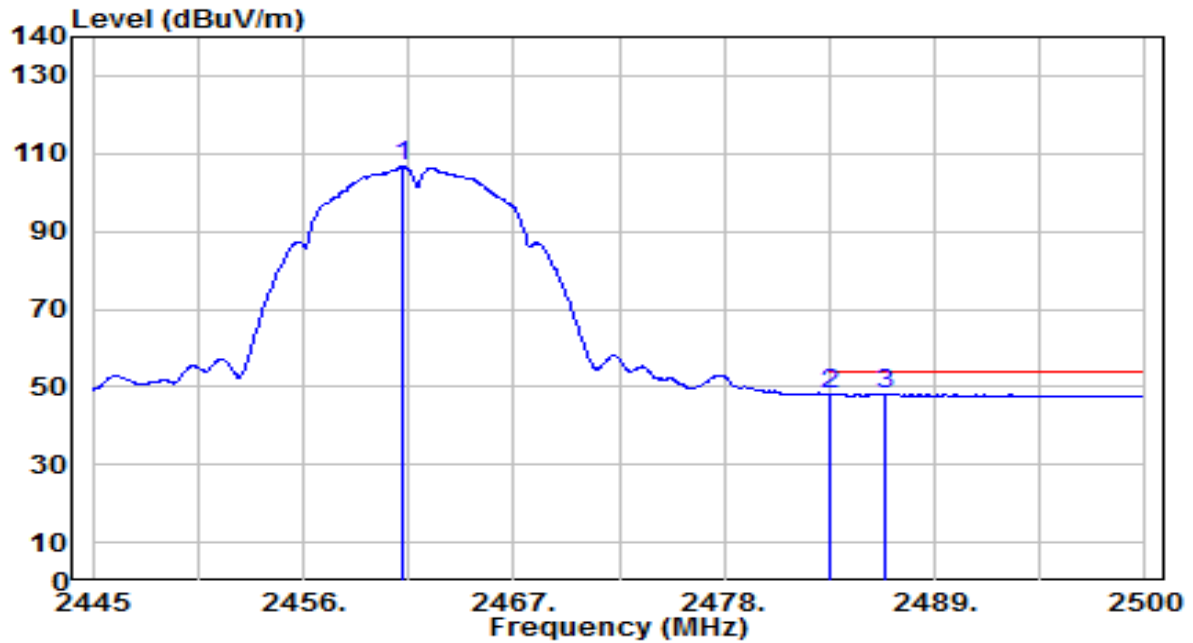


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.225	74.39	32.21	106.61	N/A	N/A	130	180	Average
2	2483.500	15.59	32.30	47.88	-6.12	54.00	130	180	Average
3	* 2486.470	15.88	32.31	48.19	-5.81	54.00	130	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

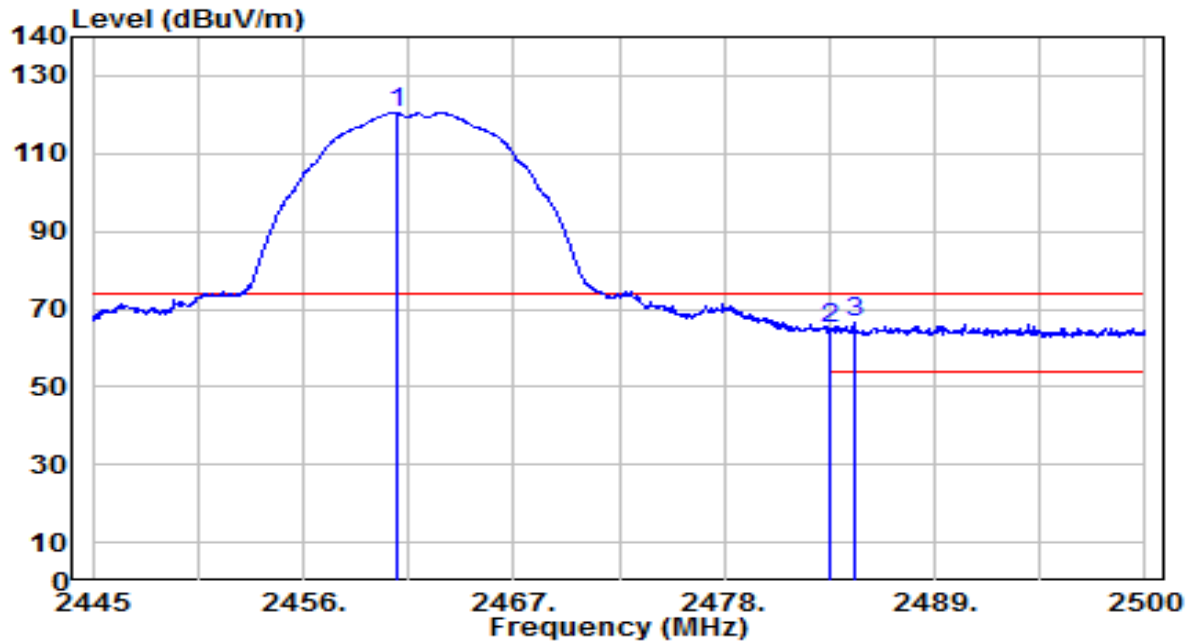


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.895	88.29	32.21	120.50	N/A	N/A	170	5	Peak
2	2483.500	32.66	32.30	64.96	-9.04	74.00	170	5	Peak
3	* 2484.765	34.15	32.30	66.45	-7.55	74.00	170	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

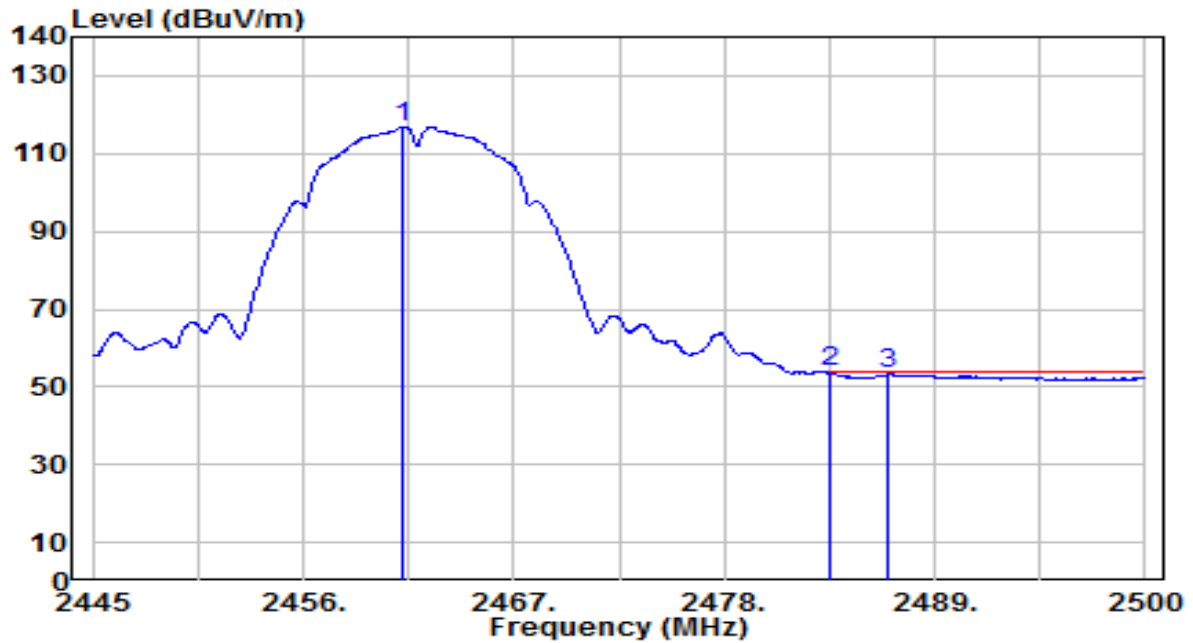


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2461.225	84.73	32.21	116.94	N/A	N/A	170	5	Average
2	*	2483.500	21.41	32.30	53.70	-0.30	54.00	170	5	Average
3		2486.525	20.98	32.31	53.29	-0.71	54.00	170	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

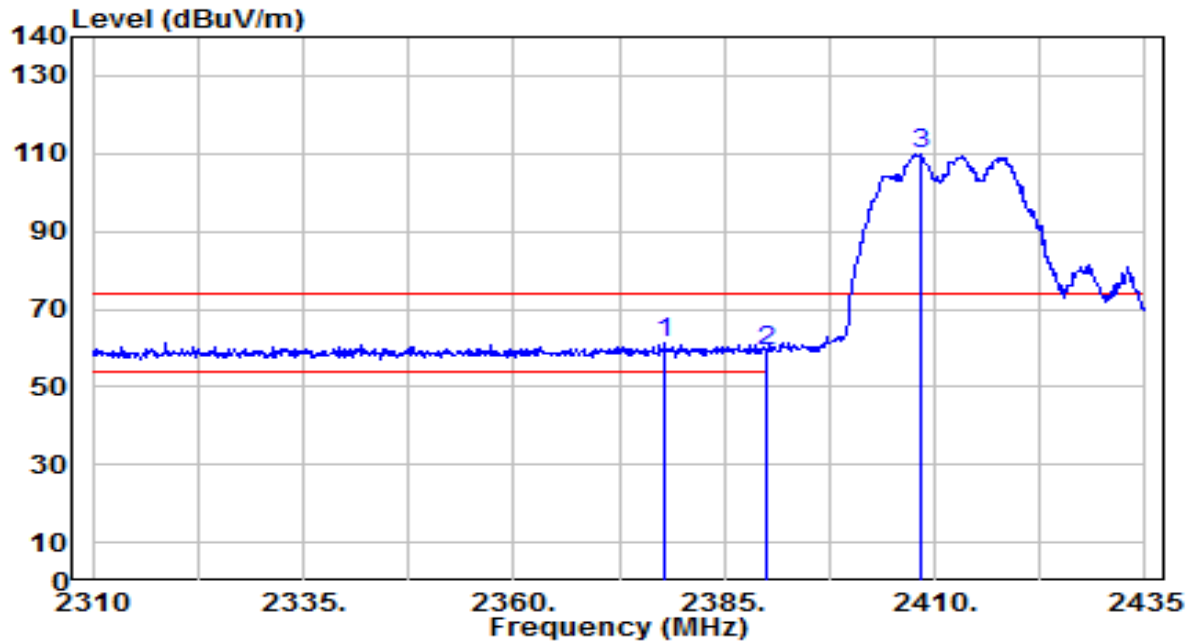


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2378.000	29.57	31.90	61.48	-12.52	74.00	150	180	Peak
2		2390.000	27.05	31.95	59.00	-15.00	74.00	150	180	Peak
3		2408.250	77.77	32.02	109.79	N/A	N/A	150	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

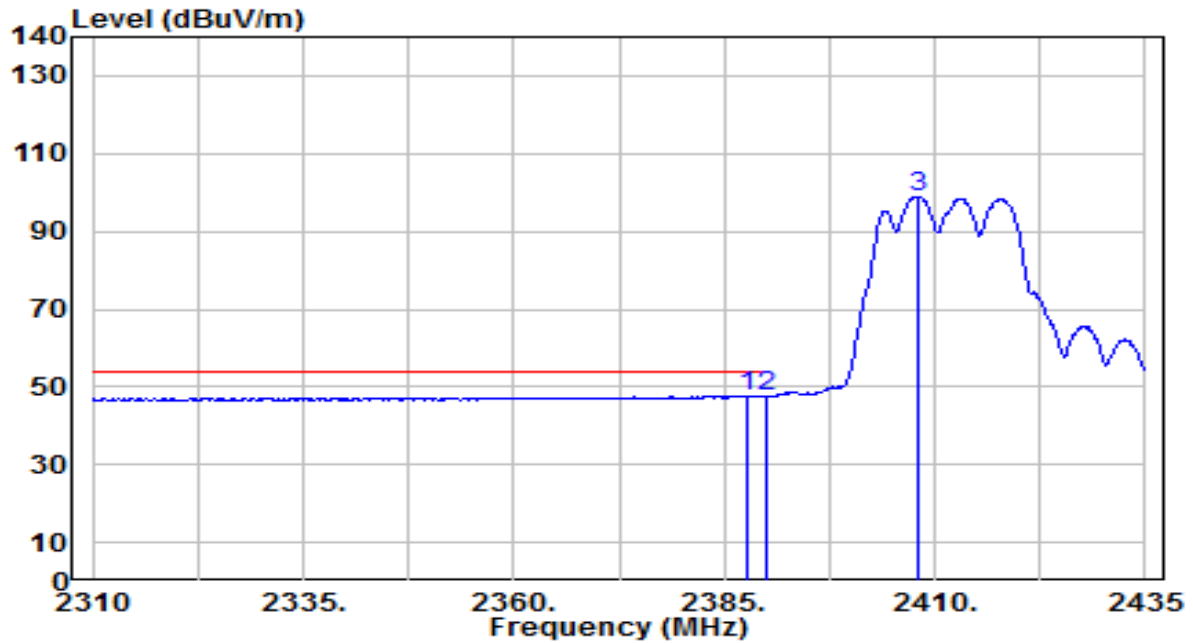


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.750	15.83	31.94	47.77	-6.23	54.00	150	180	Average
2		2390.000	15.56	31.95	47.51	-6.49	54.00	150	180	Average
3		2408.000	66.91	32.02	98.93	N/A	N/A	150	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

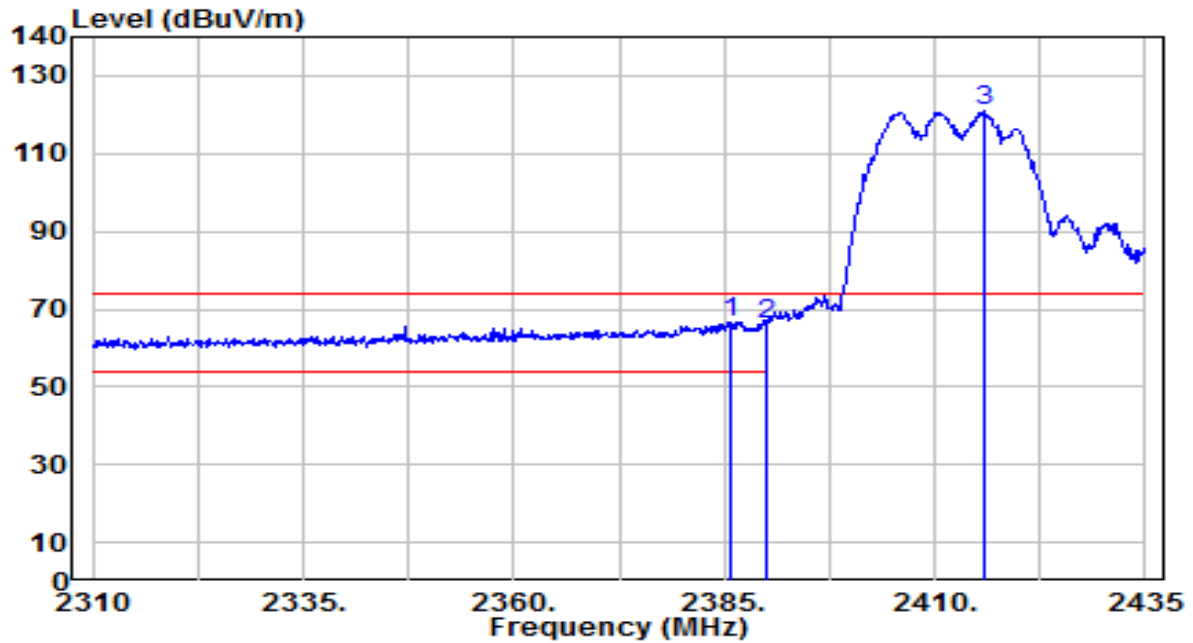


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.625	34.86	31.93	66.80	-7.20	74.00	140	160	Peak
2		2390.000	34.01	31.95	65.95	-8.05	74.00	140	160	Peak
3		2415.875	88.79	32.05	120.84	N/A	N/A	140	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

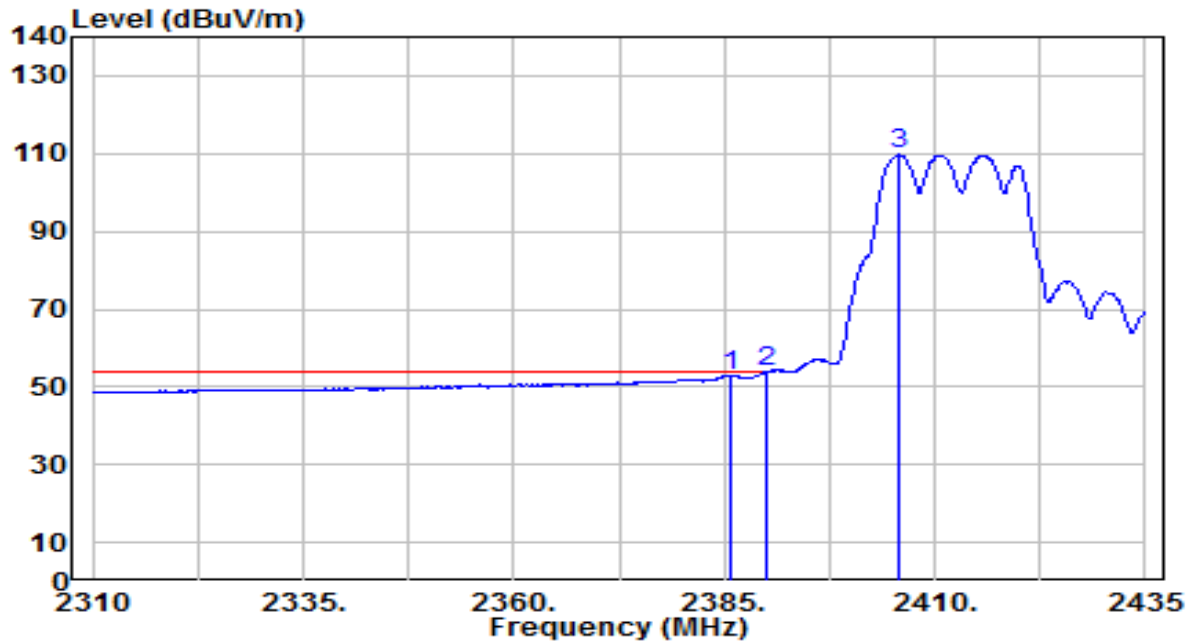


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.625	21.10	31.93	53.03	-0.97	54.00	140	160	Average
2	*	2390.000	21.86	31.95	53.81	-0.19	54.00	140	160	Average
3		2405.750	77.68	32.01	109.68	N/A	N/A	140	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

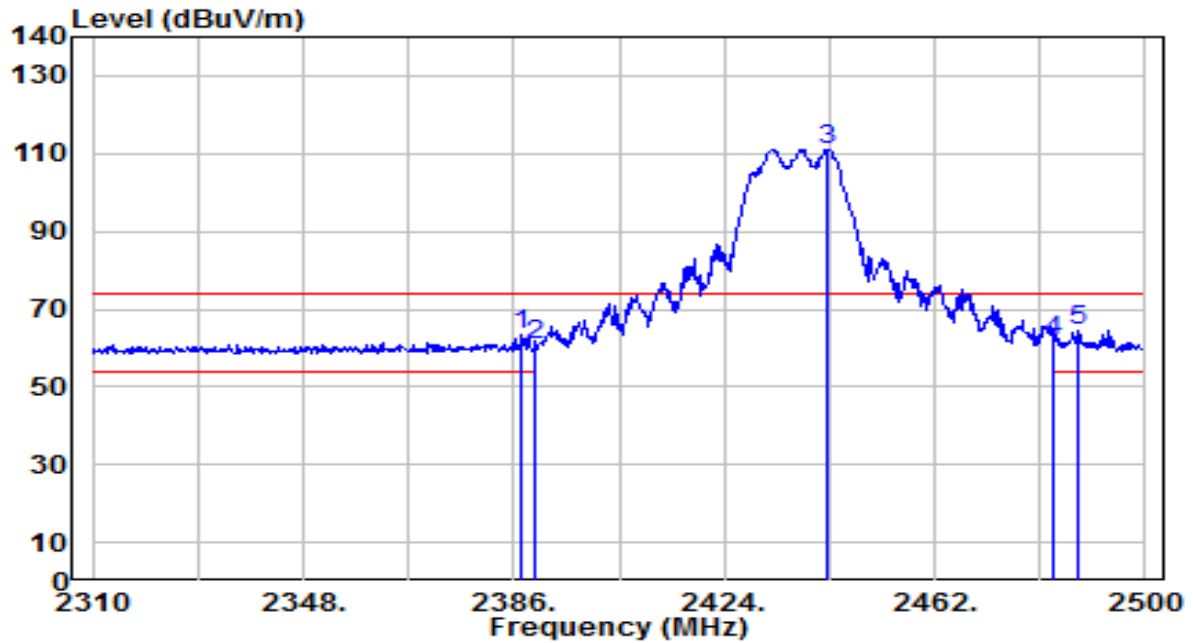


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.330	31.28	31.94	63.22	-10.78	74.00	155	180	Peak
2	2390.000	28.56	31.95	60.51	-13.49	74.00	155	180	Peak
3	2442.620	78.86	32.15	111.00	N/A	N/A	155	180	Peak
4	2483.500	29.59	32.30	61.89	-12.11	74.00	155	180	Peak
5	* 2488.030	32.19	32.32	64.51	-9.49	74.00	155	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

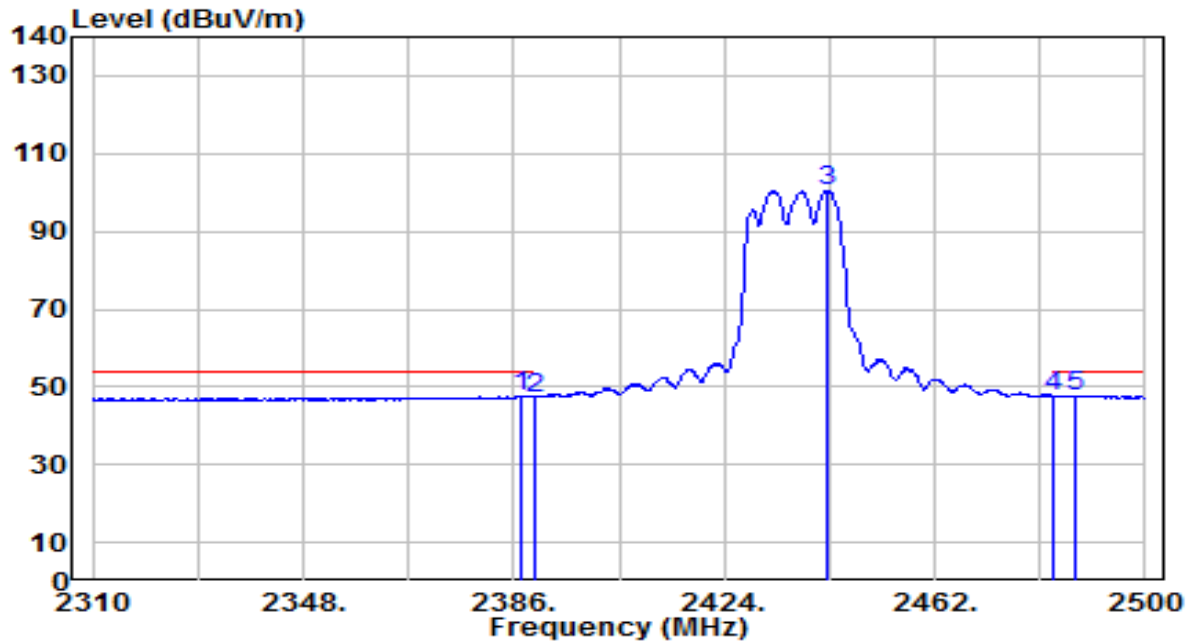


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.140	15.80	31.94	47.74	-6.26	54.00	155	180	Average
2	2390.000	15.17	31.95	47.12	-6.88	54.00	155	180	Average
3	2442.430	68.35	32.14	100.50	N/A	N/A	155	180	Average
4	2483.500	15.36	32.30	47.65	-6.35	54.00	155	180	Average
5	* 2487.460	15.43	32.31	47.75	-6.25	54.00	155	180	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

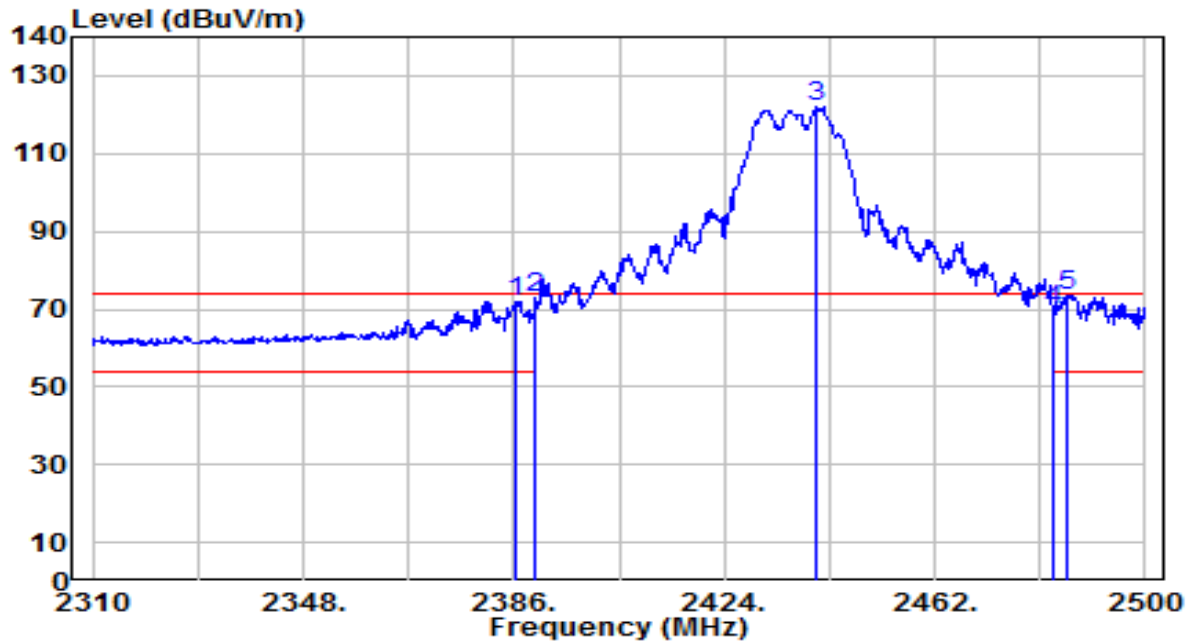


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.380	40.12	31.94	72.05	-1.95	74.00	125	170	Peak
2	2390.000	41.14	31.95	73.09	-0.91	74.00	125	170	Peak
3	2440.720	89.72	32.14	121.85	N/A	N/A	125	170	Peak
4	2483.500	37.45	32.30	69.75	-4.25	74.00	125	170	Peak
5	* 2486.130	40.97	32.31	73.28	-0.72	74.00	125	170	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

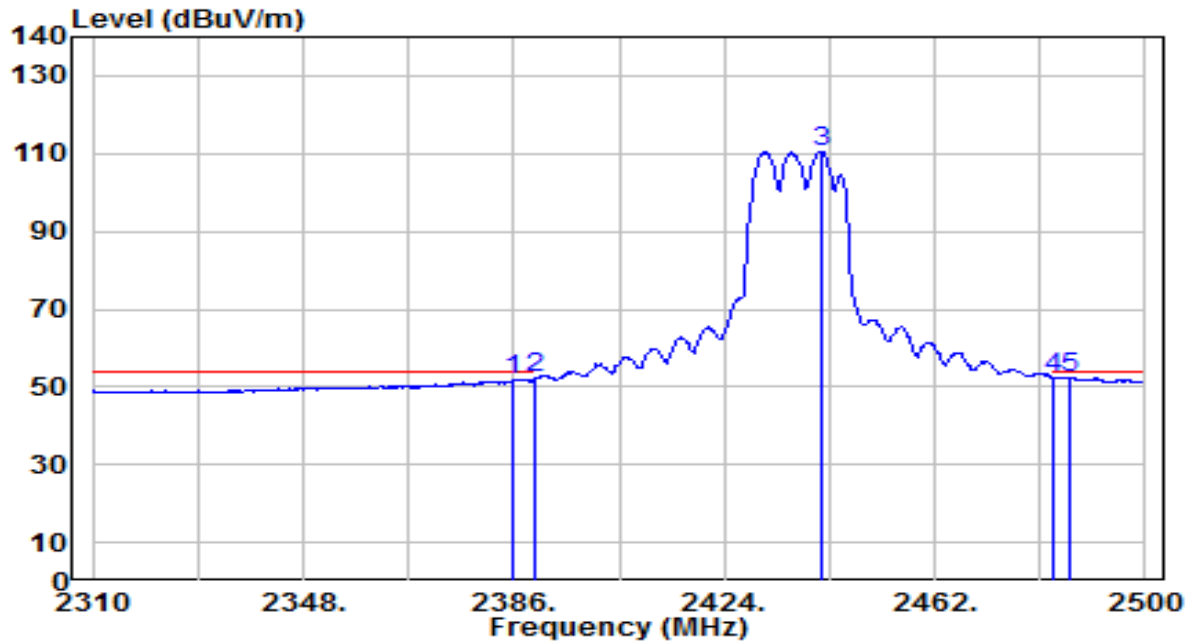


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.810	19.97	31.93	51.90	-2.10	54.00	125	170	Average
2	2390.000	20.13	31.95	52.08	-1.92	54.00	125	170	Average
3	2441.670	78.52	32.14	110.66	N/A	N/A	125	170	Average
4	2483.500	20.10	32.30	52.40	-1.60	54.00	125	170	Average
5	* 2486.320	20.25	32.31	52.56	-1.44	54.00	125	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

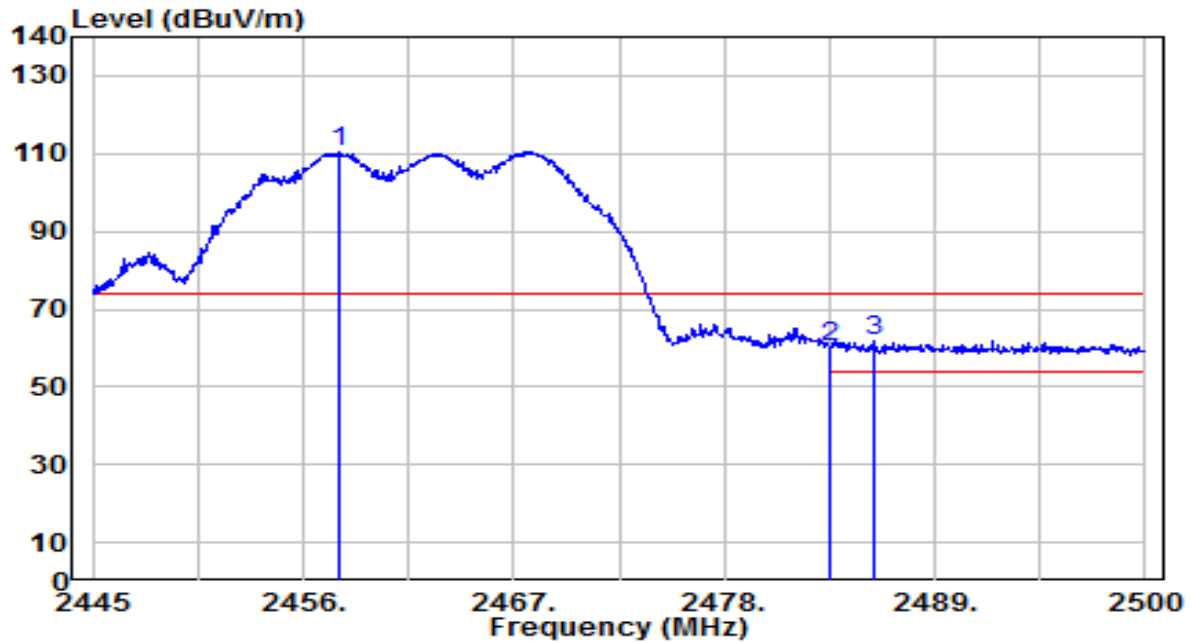


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.870	78.26	32.20	110.46	N/A	N/A	145	180	Peak
2	2483.500	28.10	32.30	60.40	-13.60	74.00	145	180	Peak
3	* 2485.865	29.73	32.31	62.03	-11.97	74.00	145	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

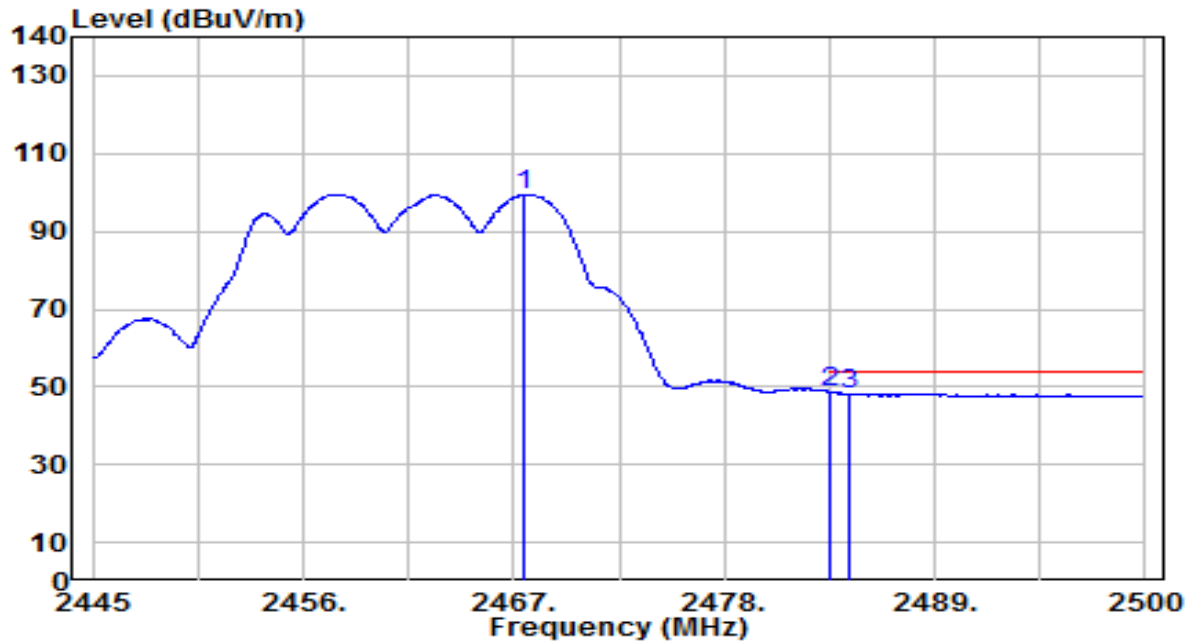


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2467.550	67.23	32.24	99.47	N/A	N/A	145	180	Average
2	*	2483.500	16.46	32.30	48.76	-5.24	54.00	145	180	Average
3		2484.490	15.98	32.30	48.29	-5.71	54.00	145	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

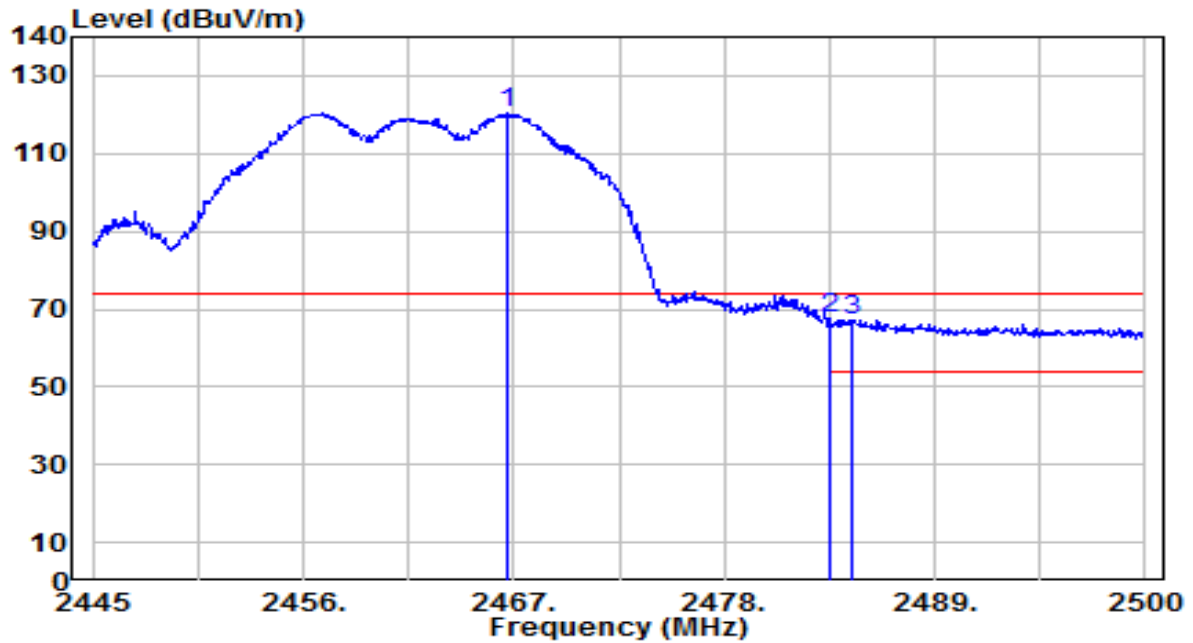


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2466.670	88.31	32.24	120.54	N/A	N/A	110	175	Peak
2	*	2483.500	35.23	32.30	67.52	-6.48	74.00	110	175	Peak
3		2484.710	34.81	32.30	67.11	-6.89	74.00	110	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

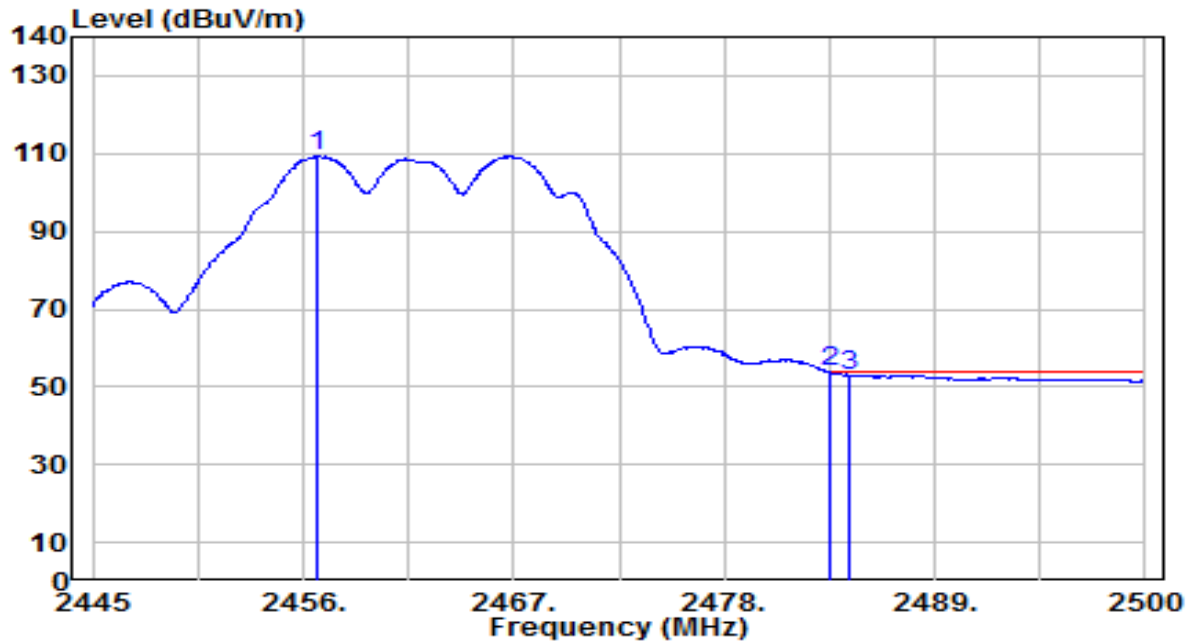


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2456.660	77.20	32.20	109.40	N/A	N/A	110	175	Average
2	*	2483.500	21.46	32.30	53.76	-0.24	54.00	110	175	Average
3		2484.600	20.75	32.30	53.05	-0.95	54.00	110	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

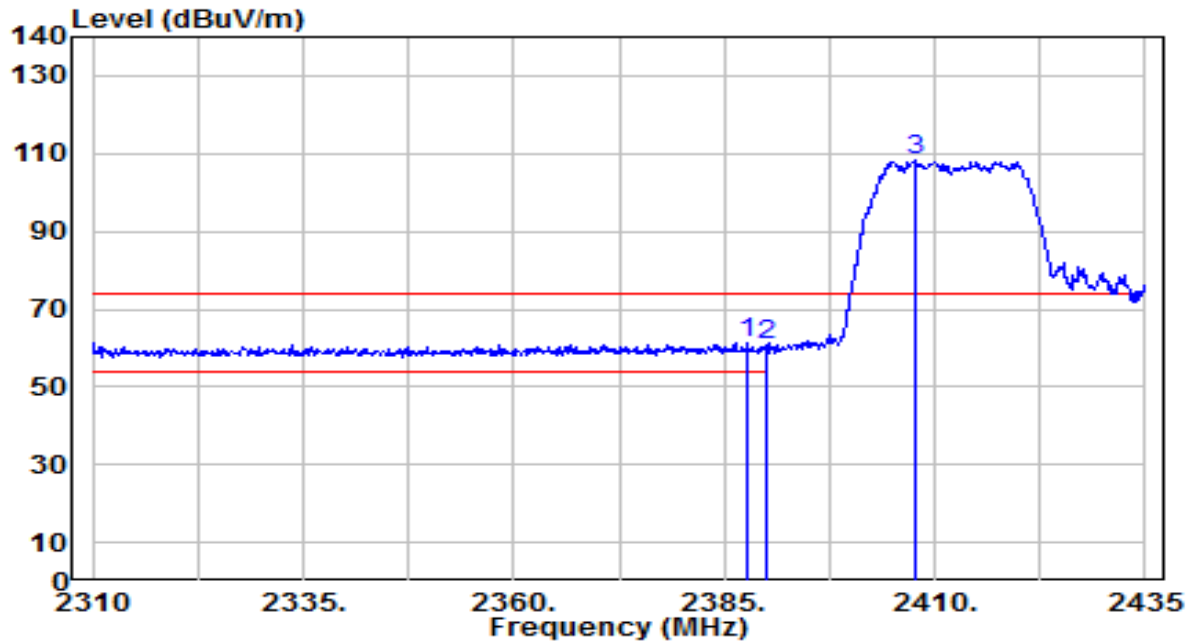


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.750	29.30	31.94	61.24	-12.76	74.00	150	180	Peak
2		2390.000	29.05	31.95	61.00	-13.00	74.00	150	180	Peak
3		2407.625	76.32	32.01	108.34	N/A	N/A	150	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

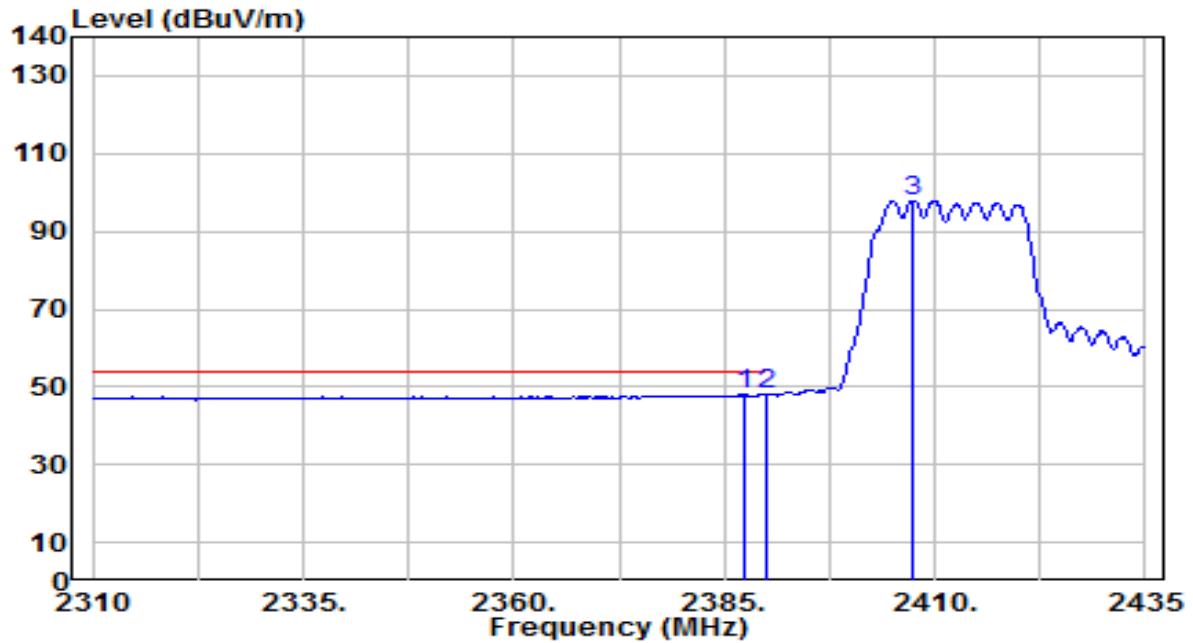


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.250	16.00	31.94	47.94	-6.06	54.00	150	180	Average
2	*	2390.000	16.14	31.95	48.09	-5.91	54.00	150	180	Average
3		2407.500	65.84	32.01	97.86	N/A	N/A	150	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

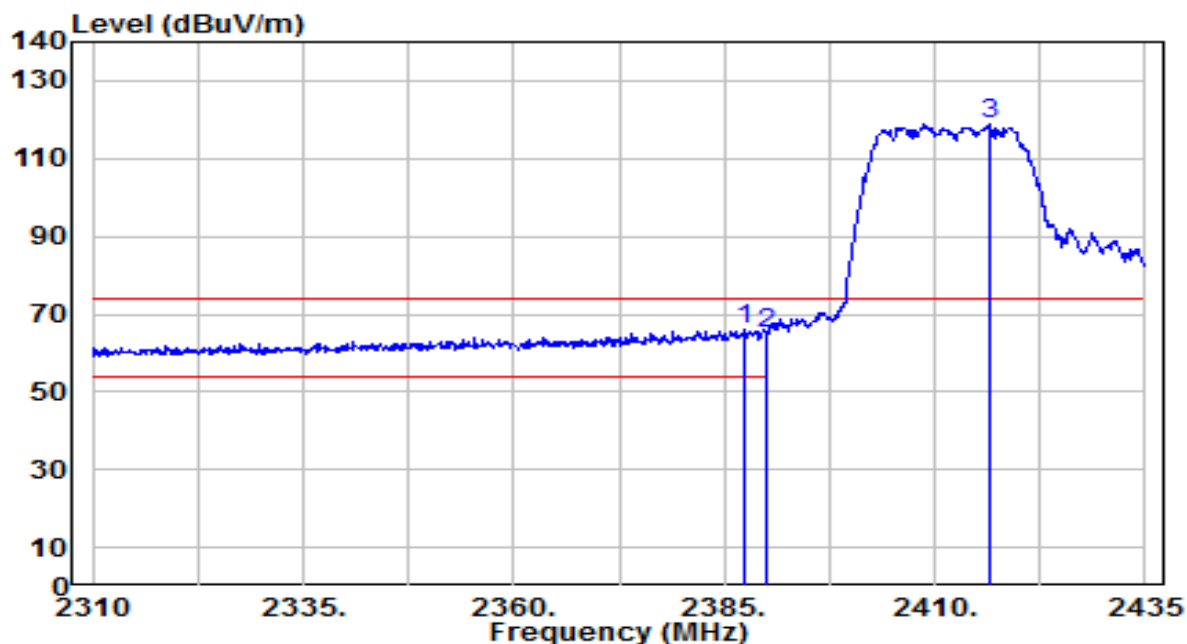


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.500	33.88	31.94	65.82	-8.18	74.00	160	155	Peak
2		2390.000	33.25	31.95	65.19	-8.81	74.00	160	155	Peak
3		2416.500	86.75	32.05	118.79	N/A	N/A	160	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

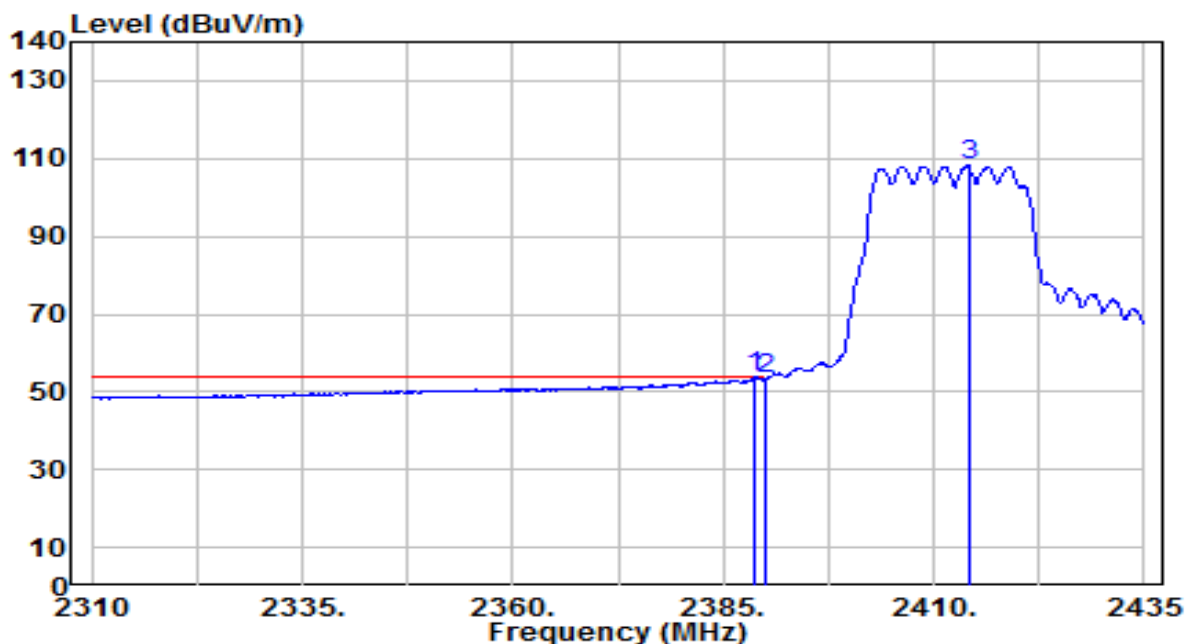


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.750	21.81	31.94	53.75	-0.25	54.00	160	155	Average
2		2390.000	21.24	31.95	53.19	-0.81	54.00	160	155	Average
3		2414.125	76.06	32.04	108.10	N/A	N/A	160	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

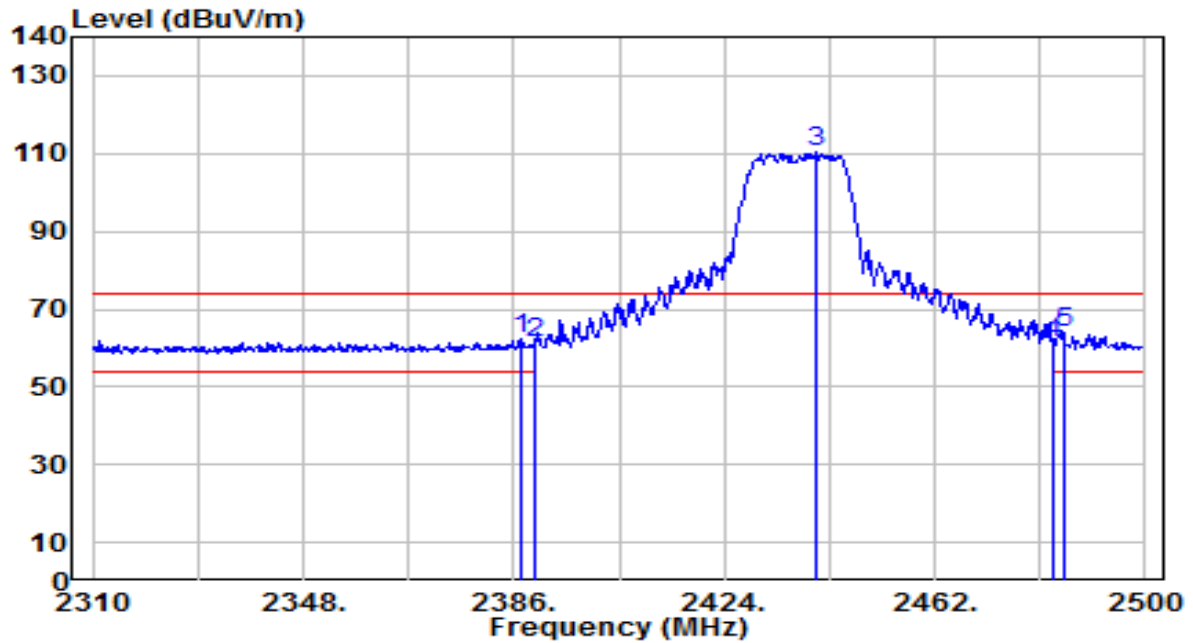


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.330	30.18	31.94	62.12	-11.88	74.00	155	180	Peak
2	2390.000	29.24	31.95	61.19	-12.81	74.00	155	180	Peak
3	2440.530	78.32	32.14	110.46	N/A	N/A	155	180	Peak
4	2483.500	29.15	32.30	61.45	-12.55	74.00	155	180	Peak
5	* 2485.180	31.76	32.30	64.06	-9.94	74.00	155	180	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

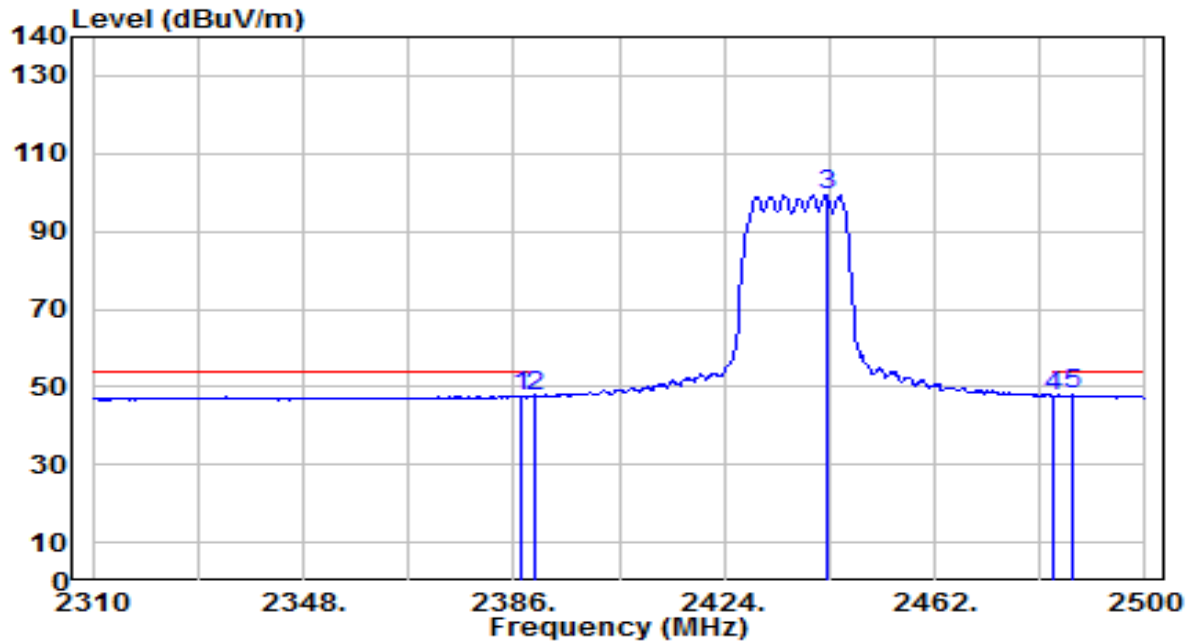


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.330	15.72	31.94	47.65	-6.35	54.00	155	180	Average
2	2390.000	15.78	31.95	47.73	-6.27	54.00	155	180	Average
3	2442.430	67.12	32.14	99.26	N/A	N/A	155	180	Average
4	2483.500	15.42	32.30	47.71	-6.29	54.00	155	180	Average
5	* 2486.890	15.60	32.31	47.91	-6.09	54.00	155	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

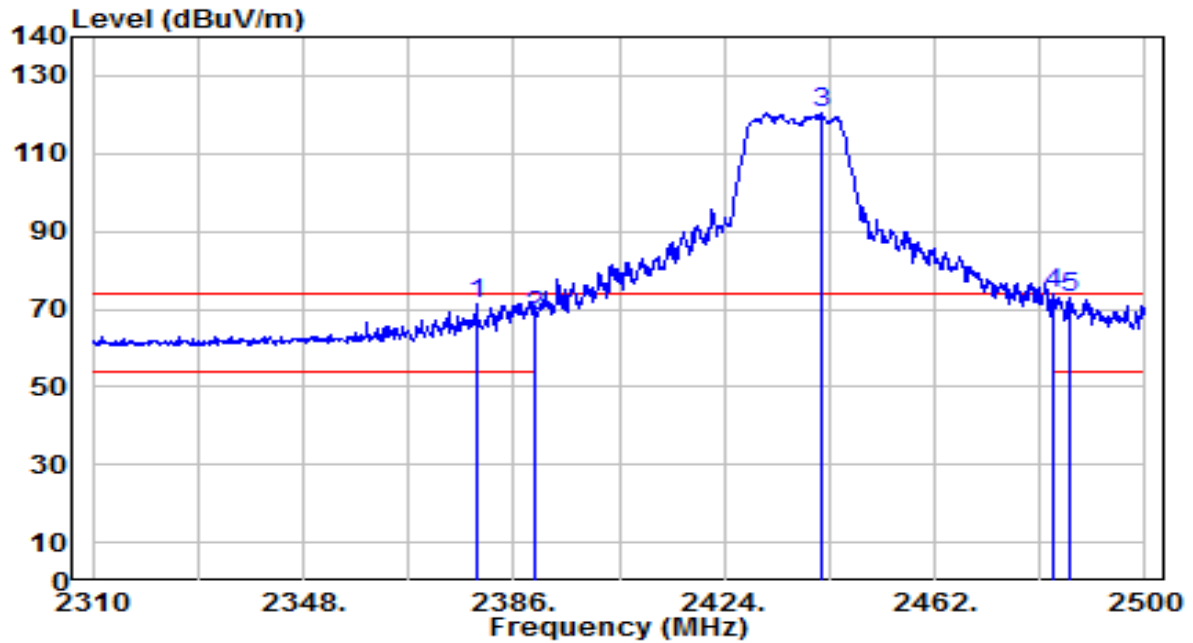


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2379.160	39.61	31.91	71.51	-2.49	74.00	155	170	Peak
2	2390.000	36.06	31.95	68.00	-6.00	74.00	155	170	Peak
3	2441.480	88.29	32.14	120.44	N/A	N/A	155	170	Peak
4	* 2483.500	41.51	32.30	73.81	-0.19	74.00	155	170	Peak
5	2486.320	40.49	32.31	72.80	-1.20	74.00	155	170	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

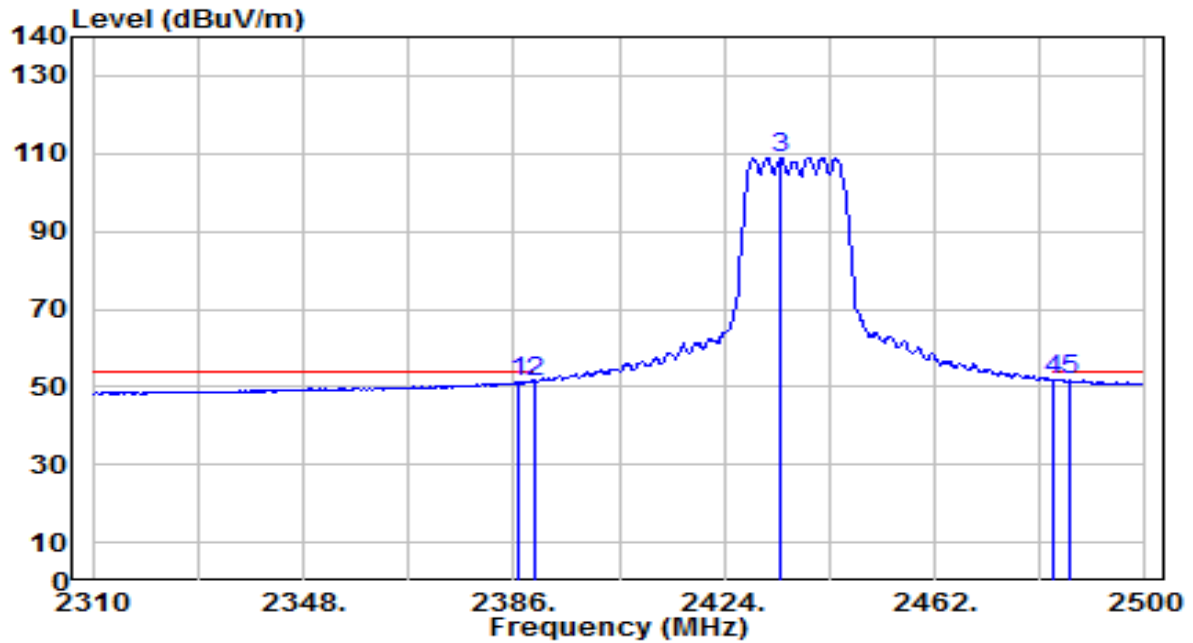


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.950	19.28	31.94	51.22	-2.78	54.00	155	170	Average
2	2390.000	19.43	31.95	51.38	-2.62	54.00	155	170	Average
3	2434.260	76.84	32.11	108.95	N/A	N/A	155	170	Average
4	* 2483.500	19.50	32.30	51.80	-2.20	54.00	155	170	Average
5	2486.510	19.32	32.31	51.63	-2.37	54.00	155	170	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

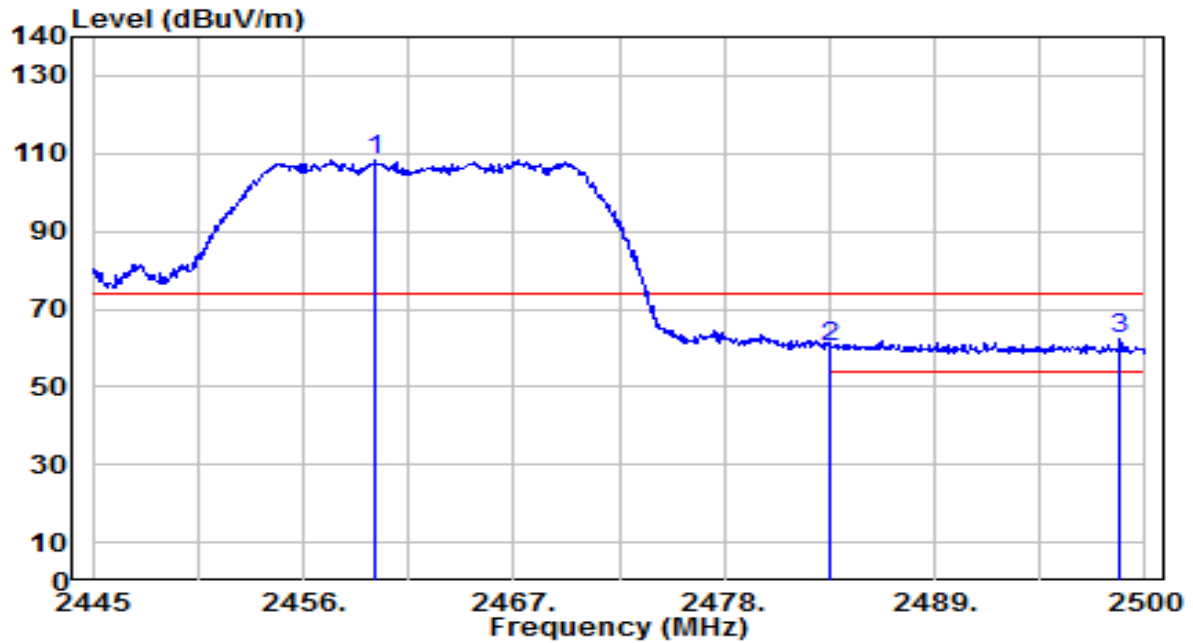


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.740	76.12	32.21	108.33	N/A	N/A	145	180	Peak
2	2483.500	27.84	32.30	60.14	-13.86	74.00	145	180	Peak
3	* 2498.680	30.12	32.36	62.47	-11.53	74.00	145	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

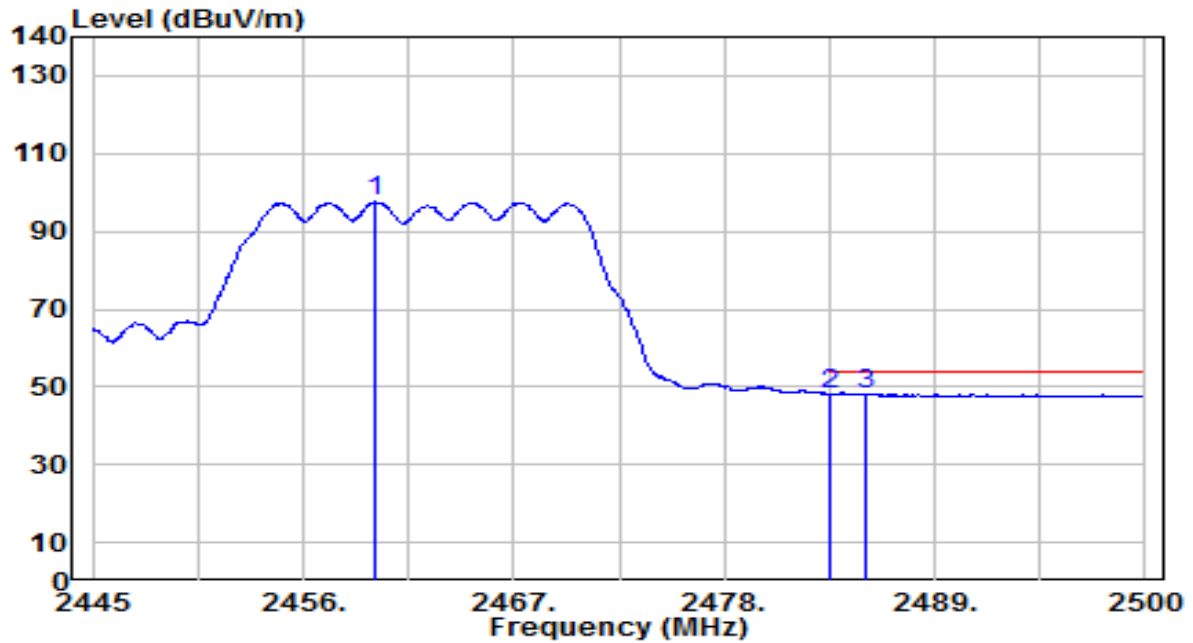


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.740	65.40	32.21	97.61	N/A	N/A	145	180	Average
2	2483.500	15.91	32.30	48.20	-5.80	54.00	145	180	Average
3	* 2485.425	15.93	32.31	48.24	-5.76	54.00	145	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

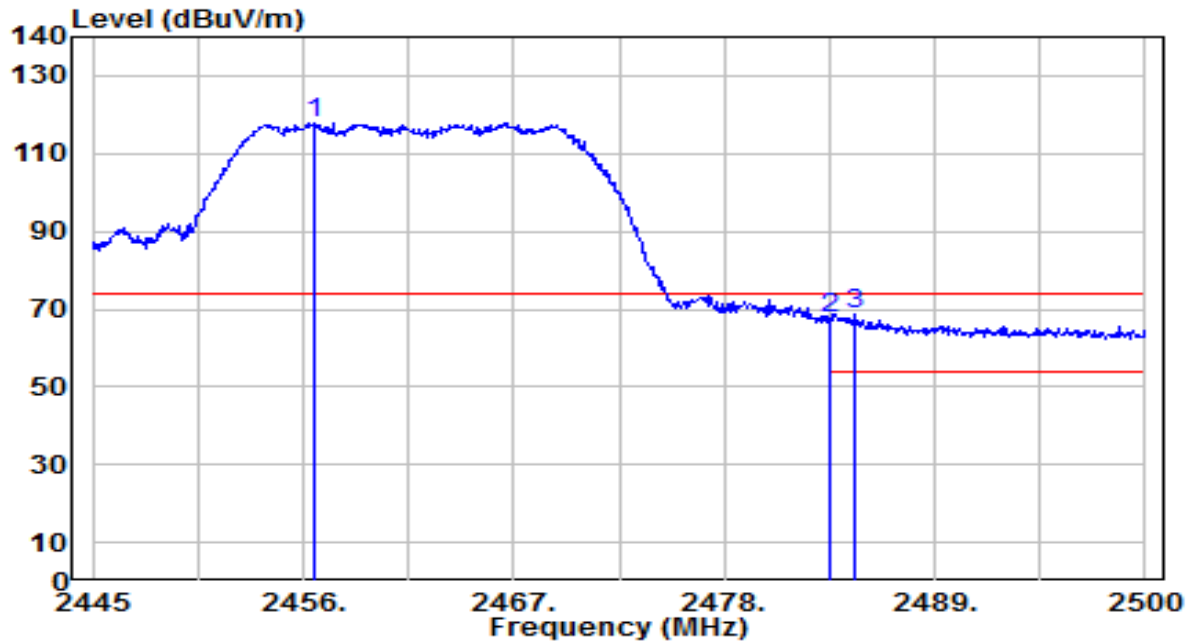


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.605	85.74	32.20	117.94	N/A	N/A	125	20	Peak
2	2483.500	35.22	32.30	67.52	-6.48	74.00	125	20	Peak
3	* 2484.765	36.53	32.30	68.83	-5.17	74.00	125	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

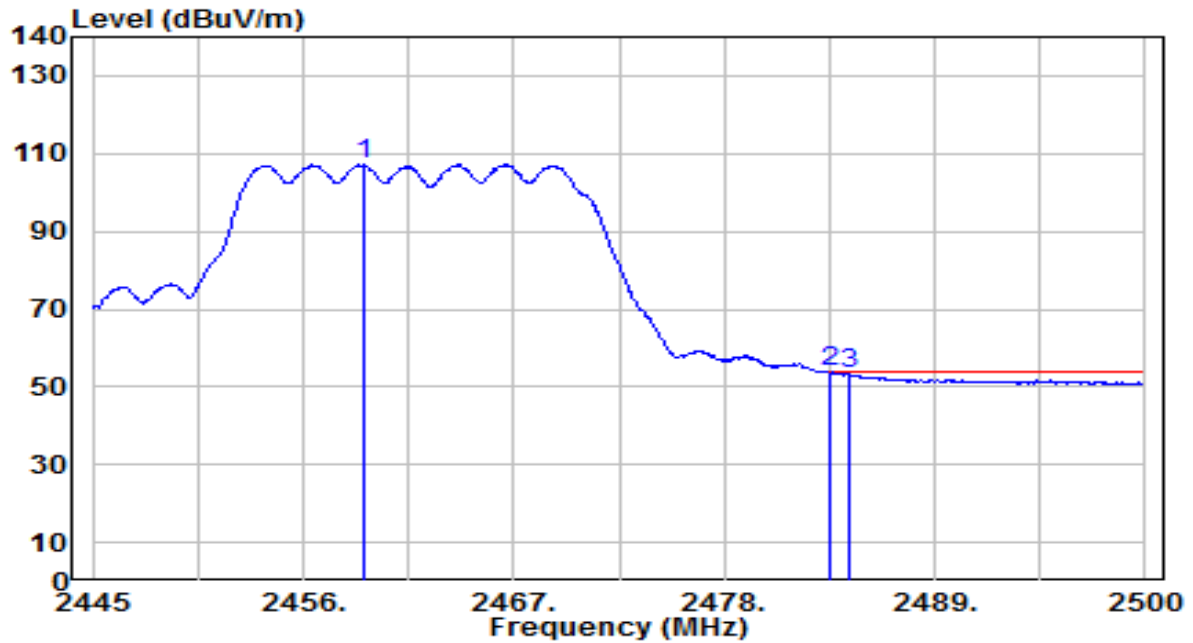


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2459.190	74.95	32.21	107.16	N/A	N/A	125	20	Average
2	*	2483.500	21.41	32.30	53.71	-0.29	54.00	125	20	Average
3		2484.490	20.89	32.30	53.19	-0.81	54.00	125	20	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

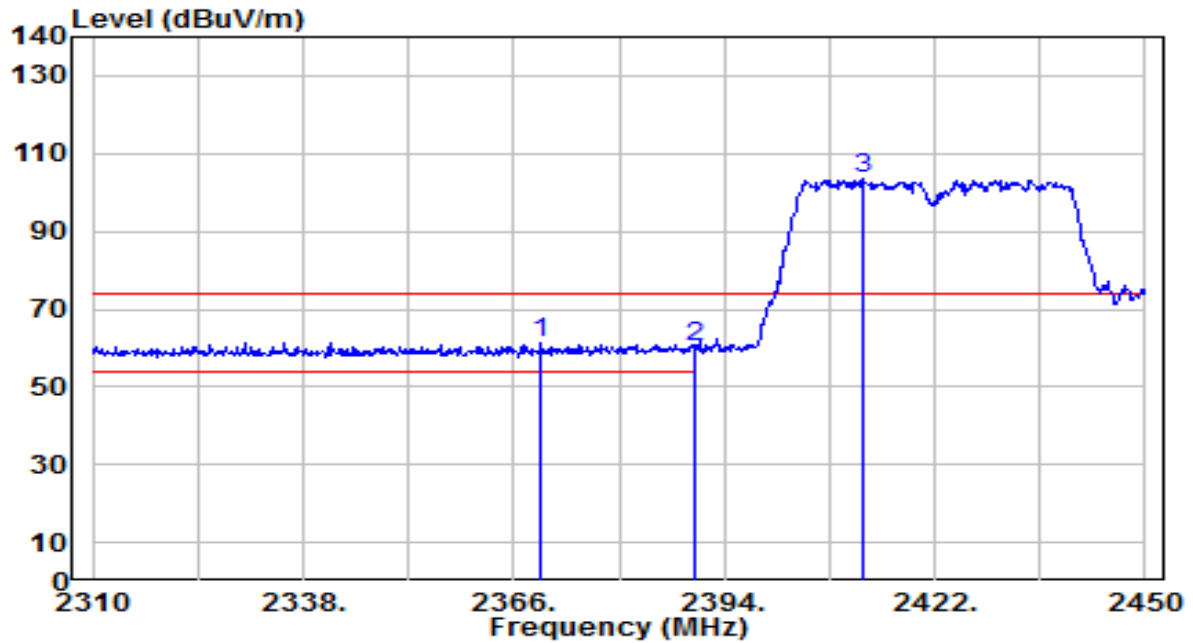


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2369.640	29.36	31.87	61.23	-12.77	74.00	150	180	Peak
2		2390.000	28.01	31.95	59.96	-14.04	74.00	150	180	Peak
3		2412.480	71.50	32.03	103.54	N/A	N/A	150	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

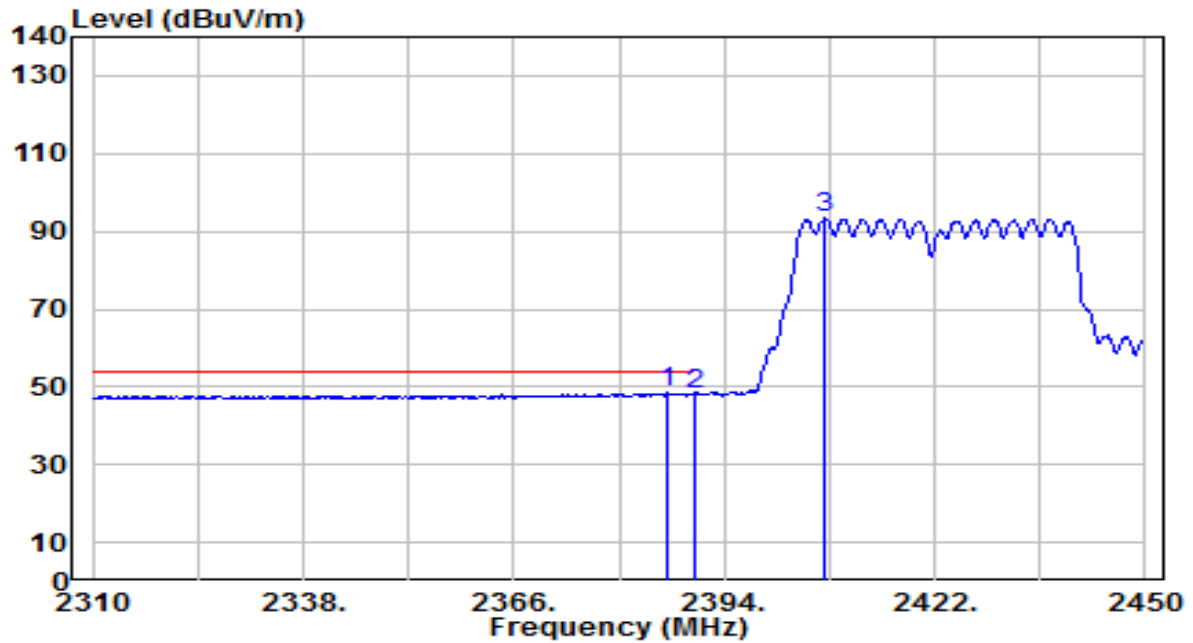


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.440	16.49	31.94	48.42	-5.58	54.00	150	180	Average
2		2390.000	16.25	31.95	48.20	-5.80	54.00	150	180	Average
3		2407.440	61.25	32.01	93.27	N/A	N/A	150	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

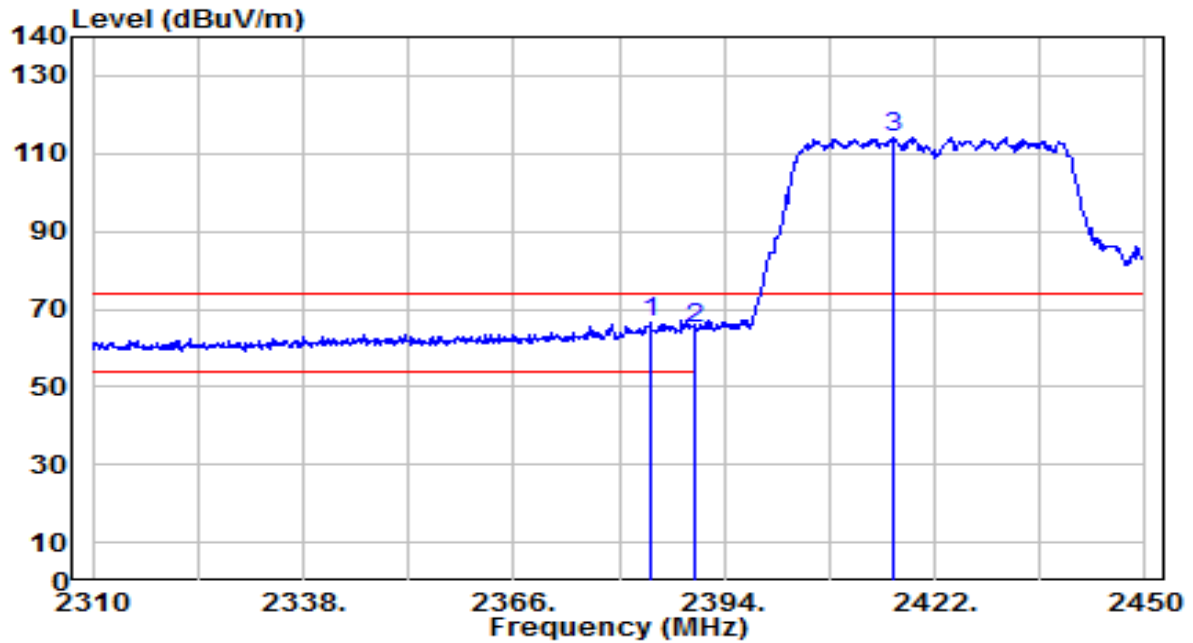


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.200	34.71	31.93	66.64	-7.36	74.00	160	155	Peak
2		2390.000	33.26	31.95	65.21	-8.79	74.00	160	155	Peak
3		2416.400	82.10	32.05	114.14	N/A	N/A	160	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

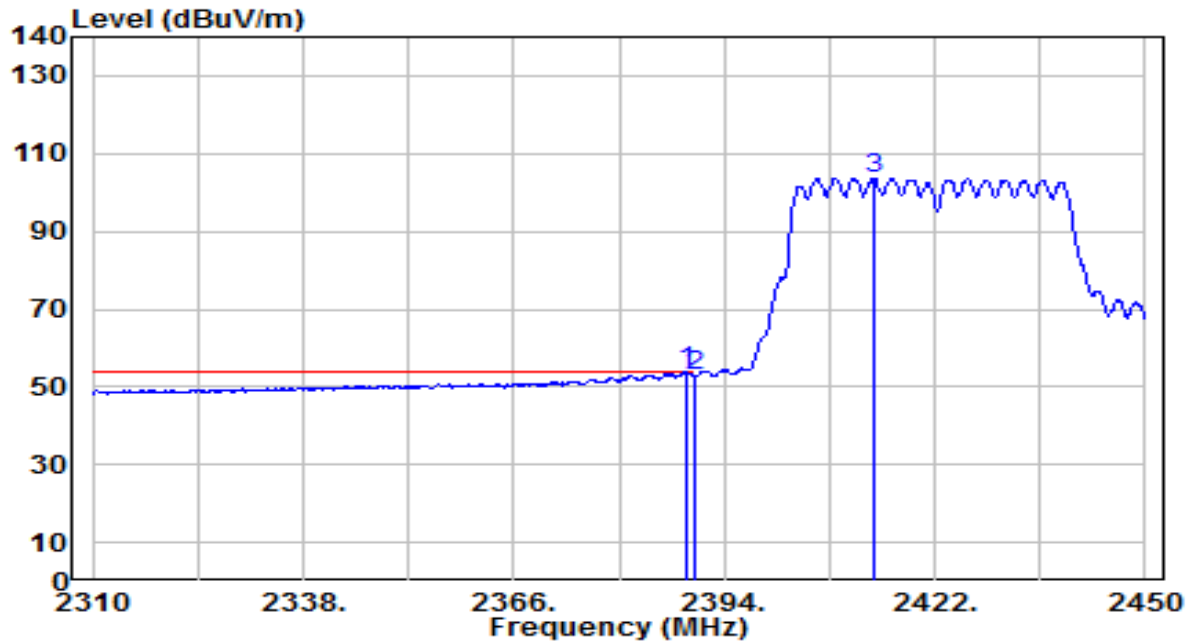


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.960	21.82	31.94	53.77	-0.23	54.00	160	155	Average
2		2390.000	20.85	31.95	52.80	-1.20	54.00	160	155	Average
3		2413.880	71.71	32.04	103.75	N/A	N/A	160	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

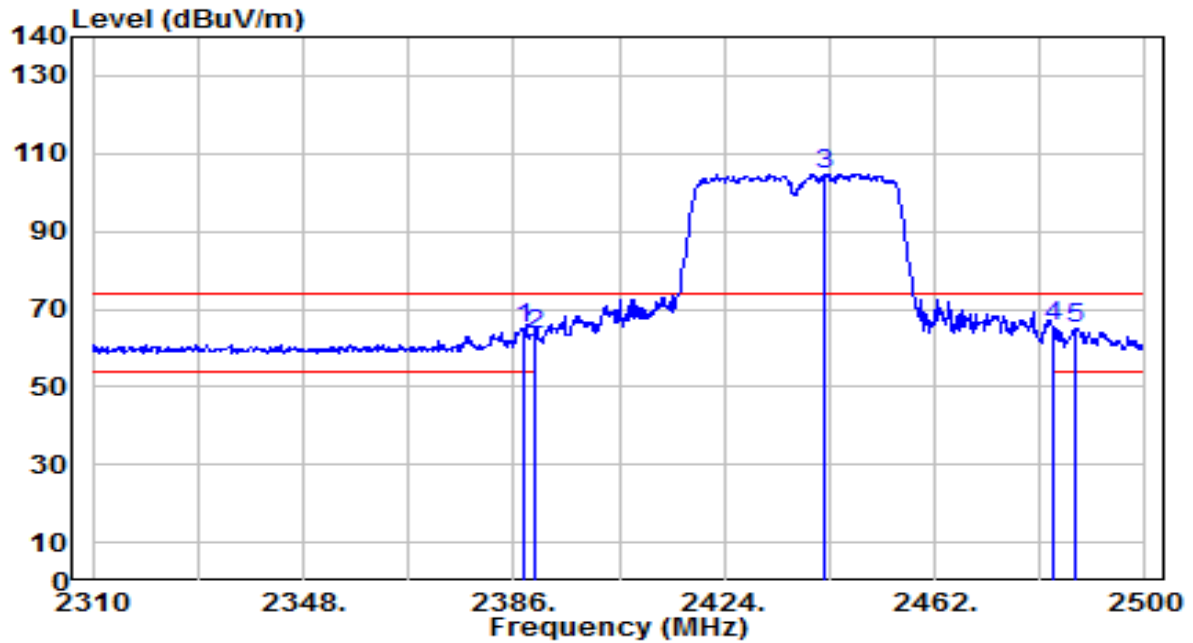


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.710	33.14	31.94	65.08	-8.92	74.00	155	180	Peak
2	2390.000	31.49	31.95	63.44	-10.56	74.00	155	180	Peak
3	2442.050	72.72	32.14	104.86	N/A	N/A	155	180	Peak
4	* 2483.500	33.36	32.30	65.66	-8.34	74.00	155	180	Peak
5	2487.460	32.92	32.31	65.24	-8.76	74.00	155	180	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

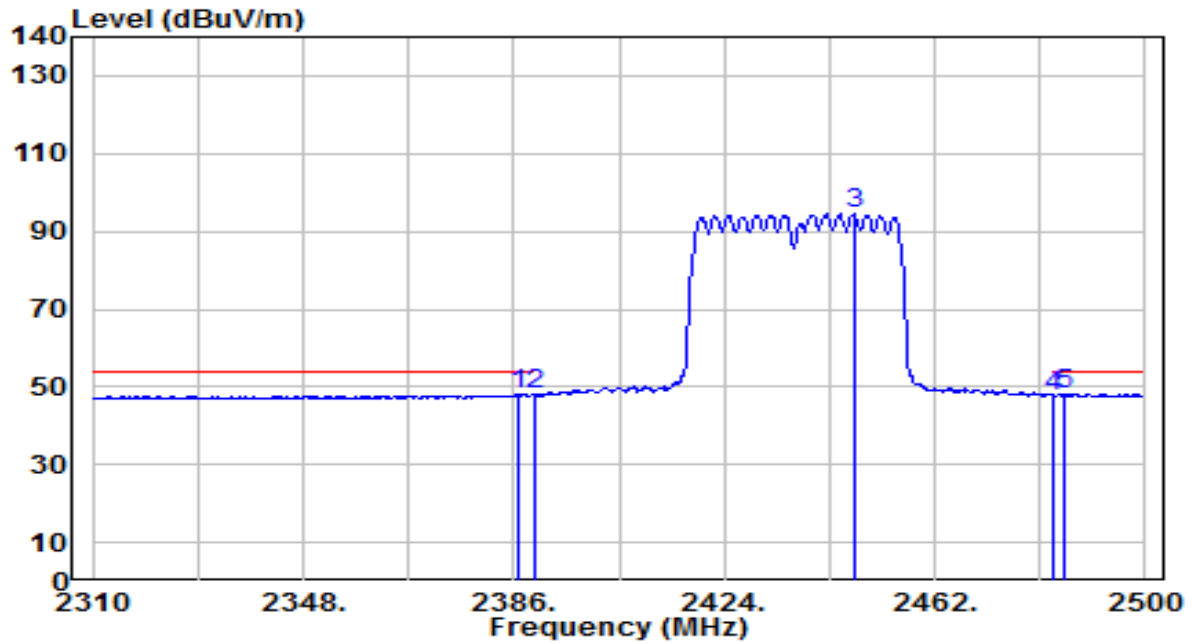


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.950	16.02	31.94	47.96	-6.04	54.00	155	180	Average
2	2390.000	16.06	31.95	48.01	-5.99	54.00	155	180	Average
3	2447.370	62.39	32.16	94.55	N/A	N/A	155	180	Average
4	2483.500	15.42	32.30	47.71	-6.29	54.00	155	180	Average
5	* 2485.370	15.89	32.31	48.20	-5.80	54.00	155	180	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

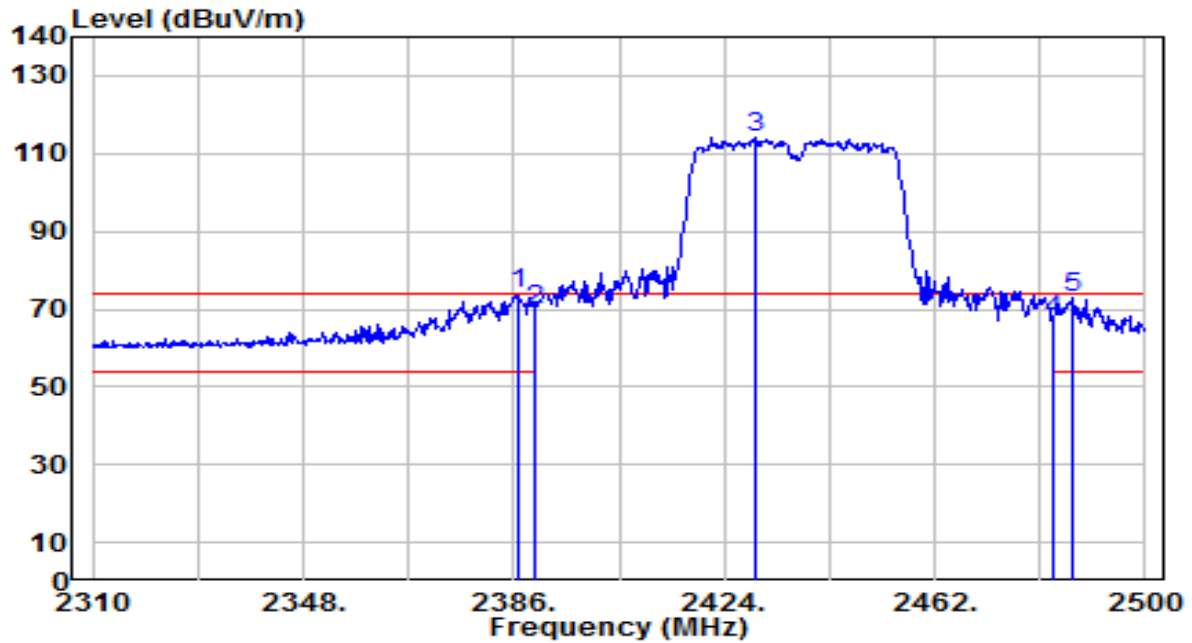


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.760	41.78	31.94	73.72	-0.28	74.00	155	170	Peak
2		2390.000	37.65	31.95	69.59	-4.41	74.00	155	170	Peak
3		2429.700	81.89	32.10	113.99	N/A	N/A	155	170	Peak
4		2483.500	34.98	32.30	67.28	-6.72	74.00	155	170	Peak
5		2486.700	40.60	32.31	72.91	-1.09	74.00	155	170	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

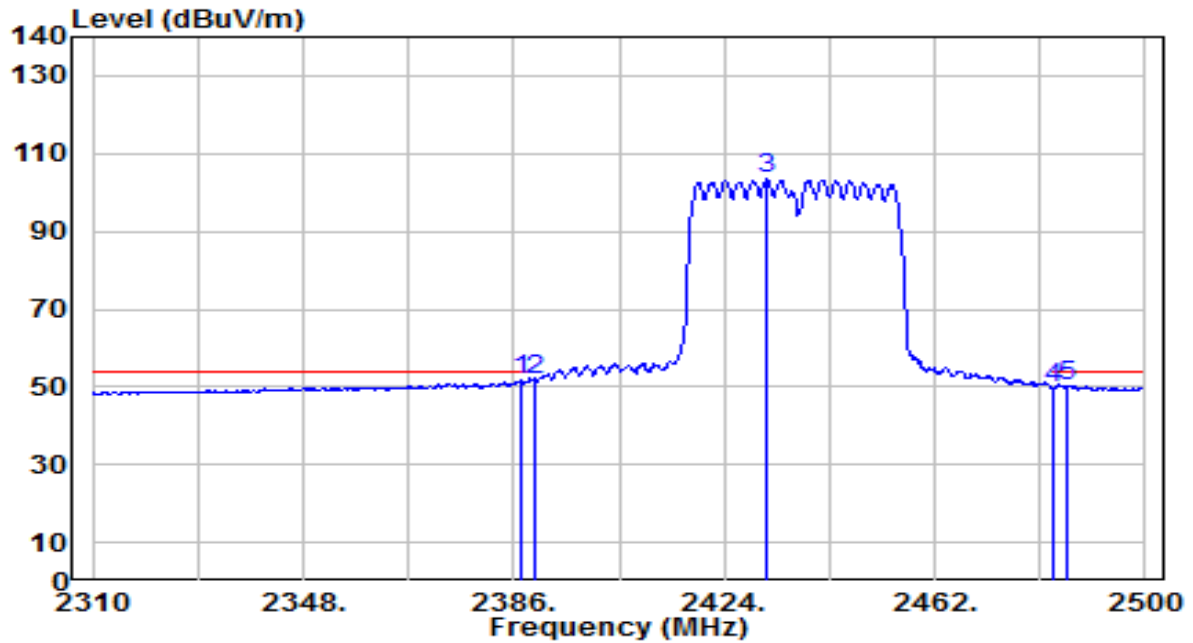


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.140	19.57	31.94	51.51	-2.49	54.00	155	170	Average
2	*	2390.000	19.88	31.95	51.83	-2.17	54.00	155	170	Average
3		2431.790	71.21	32.10	103.31	N/A	N/A	155	170	Average
4		2483.500	17.57	32.30	49.87	-4.13	54.00	155	170	Average
5		2486.130	18.01	32.31	50.31	-3.69	54.00	155	170	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

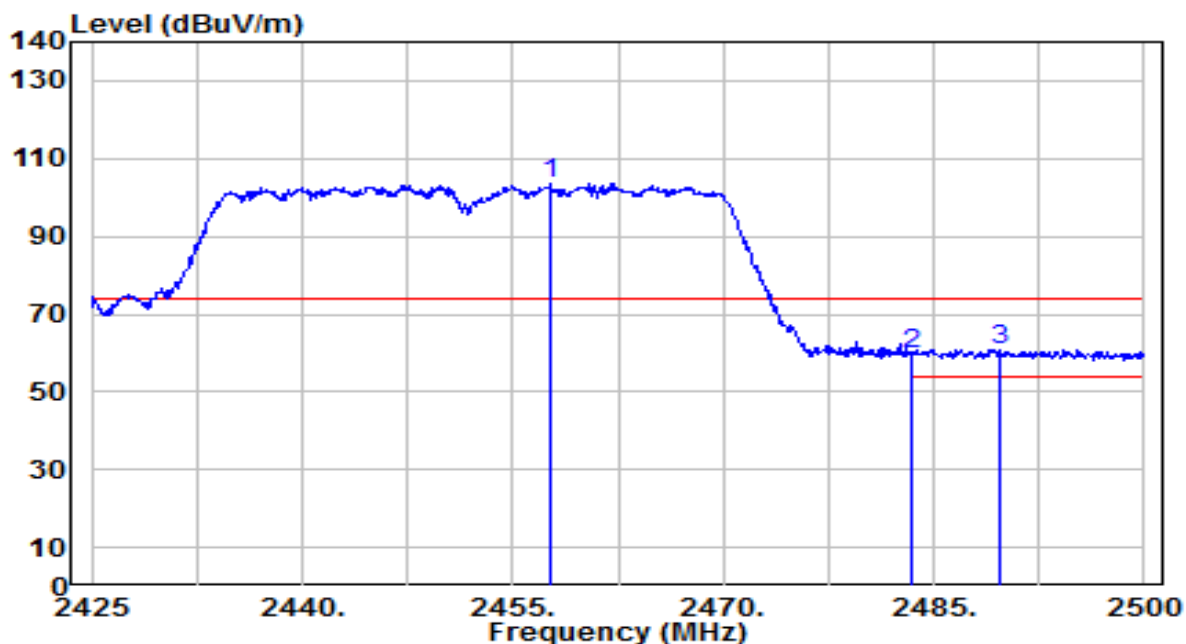


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.700	71.38	32.20	103.58	N/A	N/A	145	180	Peak
2	2483.500	27.54	32.30	59.84	-14.16	74.00	145	180	Peak
3	* 2489.800	28.63	32.32	60.95	-13.05	74.00	145	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

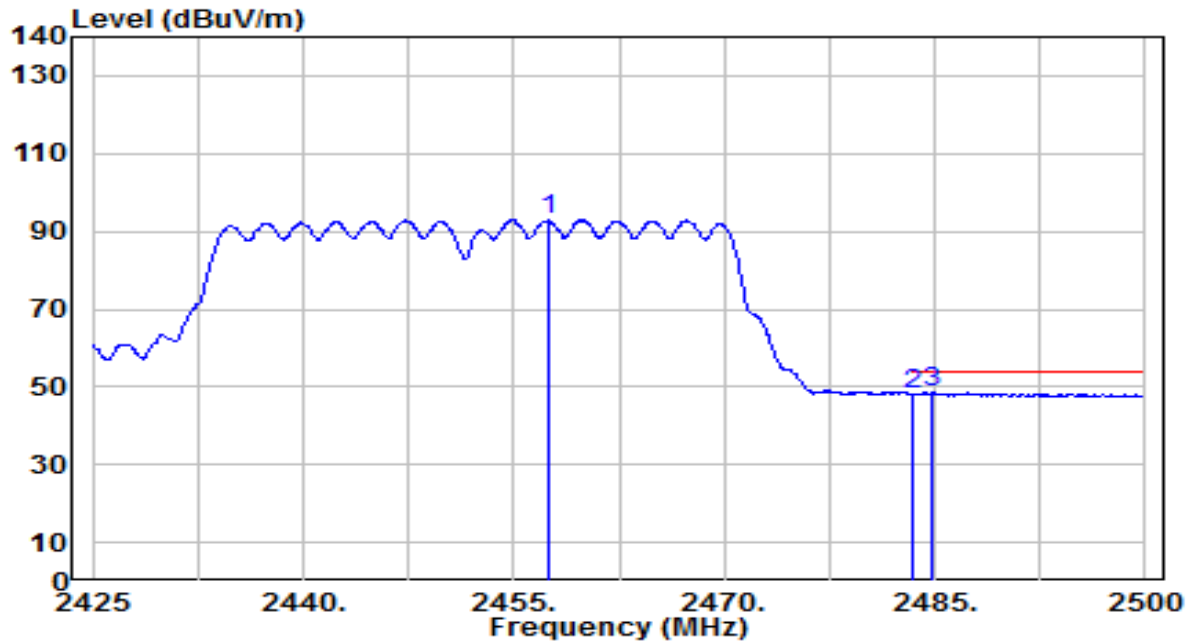


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.475	60.70	32.20	92.90	N/A	N/A	145	180	Average
2	2483.500	15.73	32.30	48.03	-5.97	54.00	145	180	Average
3	* 2484.850	16.20	32.30	48.50	-5.50	54.00	145	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

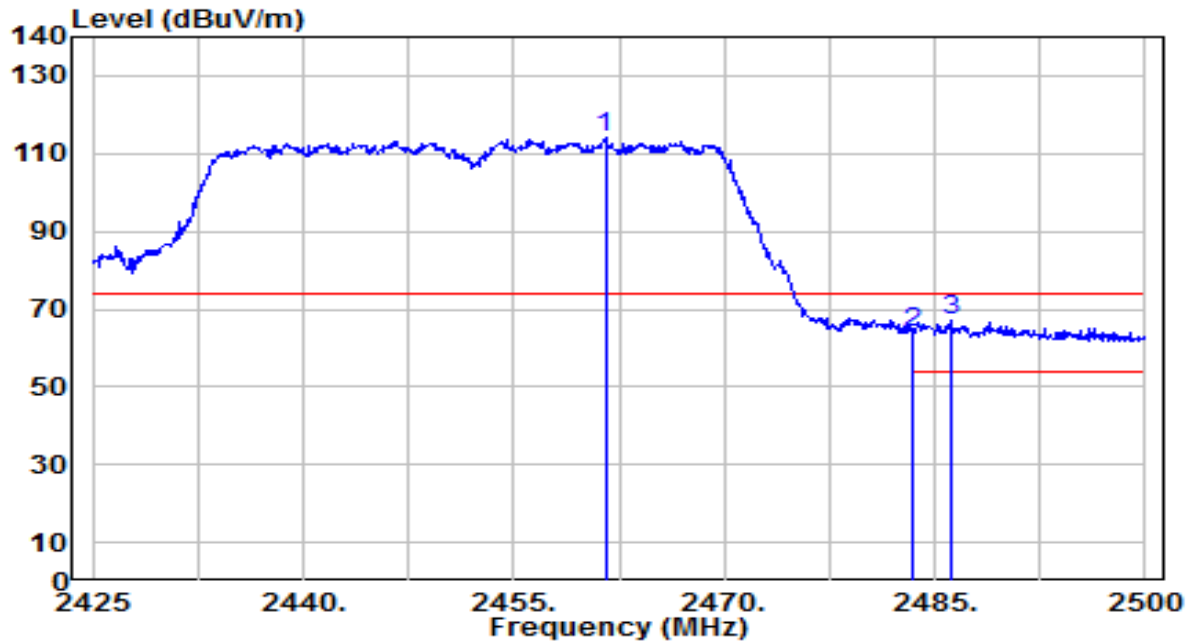


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.525	81.65	32.22	113.87	N/A	N/A	125	20	Peak
2	2483.500	31.87	32.30	64.17	-9.83	74.00	125	20	Peak
3	* 2486.125	34.60	32.31	66.91	-7.09	74.00	125	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

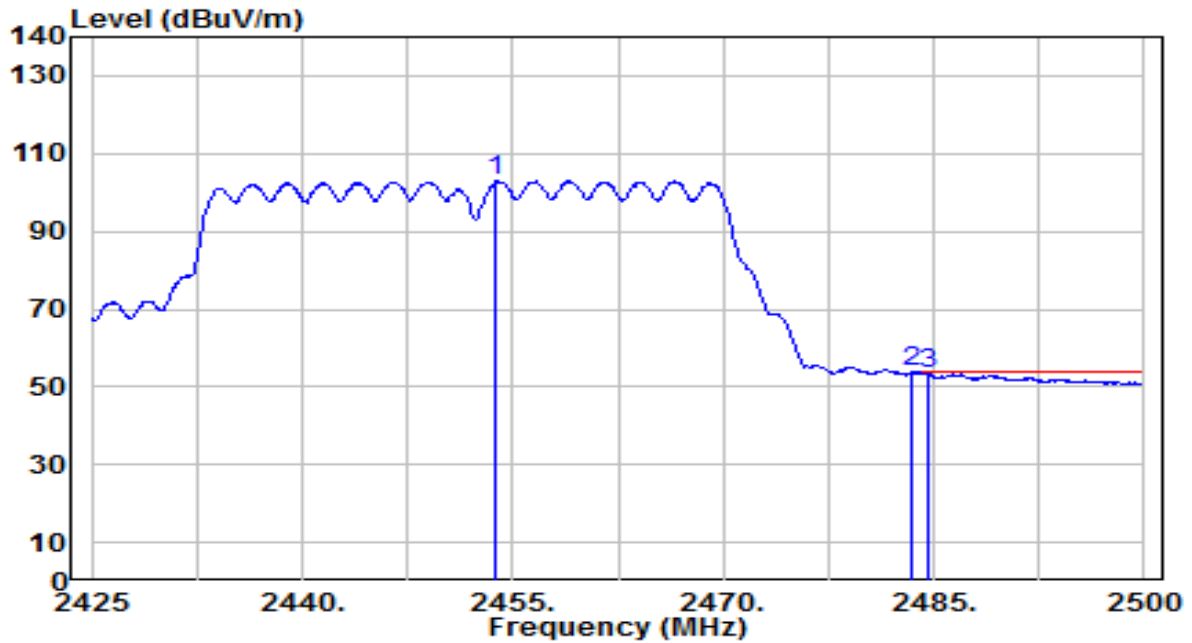


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2453.800	70.68	32.19	102.87	N/A	N/A	125	20	Average
2	*	2483.500	21.49	32.30	53.79	-0.21	54.00	125	20	Average
3		2484.625	21.01	32.30	53.32	-0.68	54.00	125	20	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

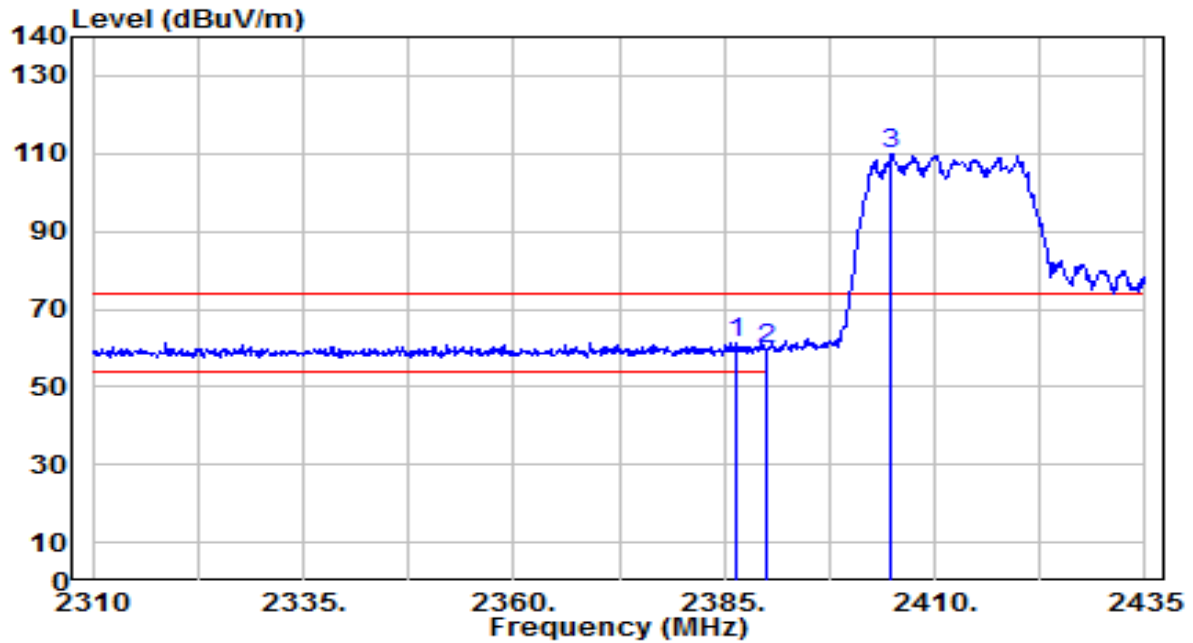


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.500	29.35	31.94	61.29	-12.71	74.00	150	180	Peak
2		2390.000	27.69	31.95	59.64	-14.36	74.00	150	180	Peak
3		2404.750	78.11	32.00	110.12	N/A	N/A	150	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

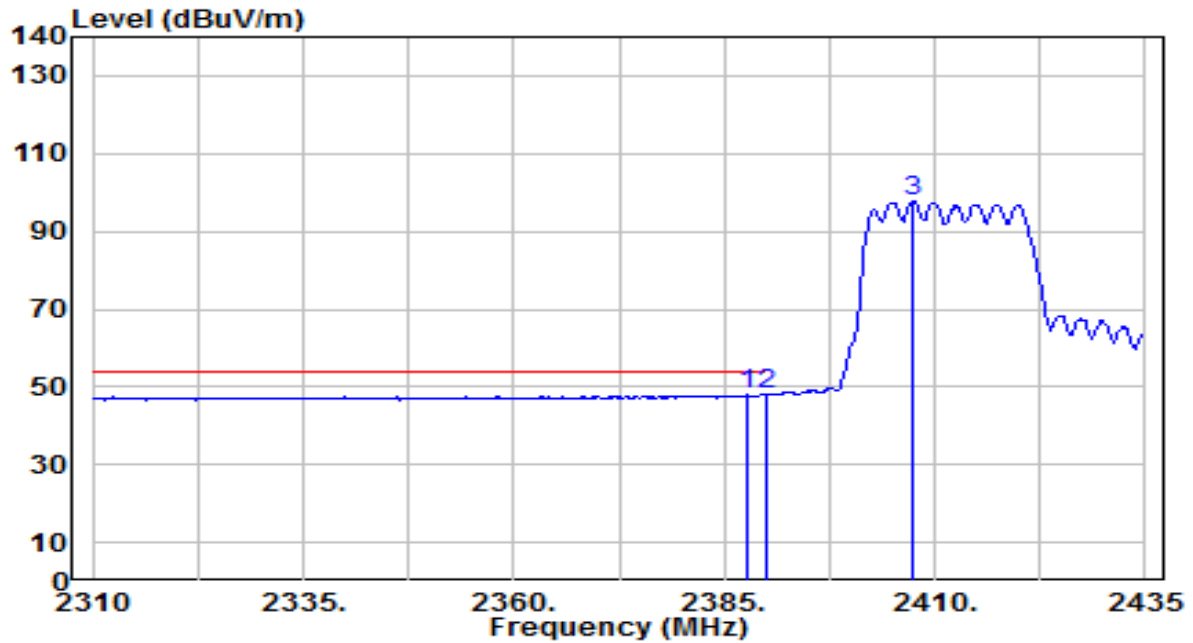


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.750	16.21	31.94	48.15	-5.85	54.00	150	180	Average
2		2390.000	16.19	31.95	48.14	-5.86	54.00	150	180	Average
3		2407.500	65.48	32.01	97.49	N/A	N/A	150	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

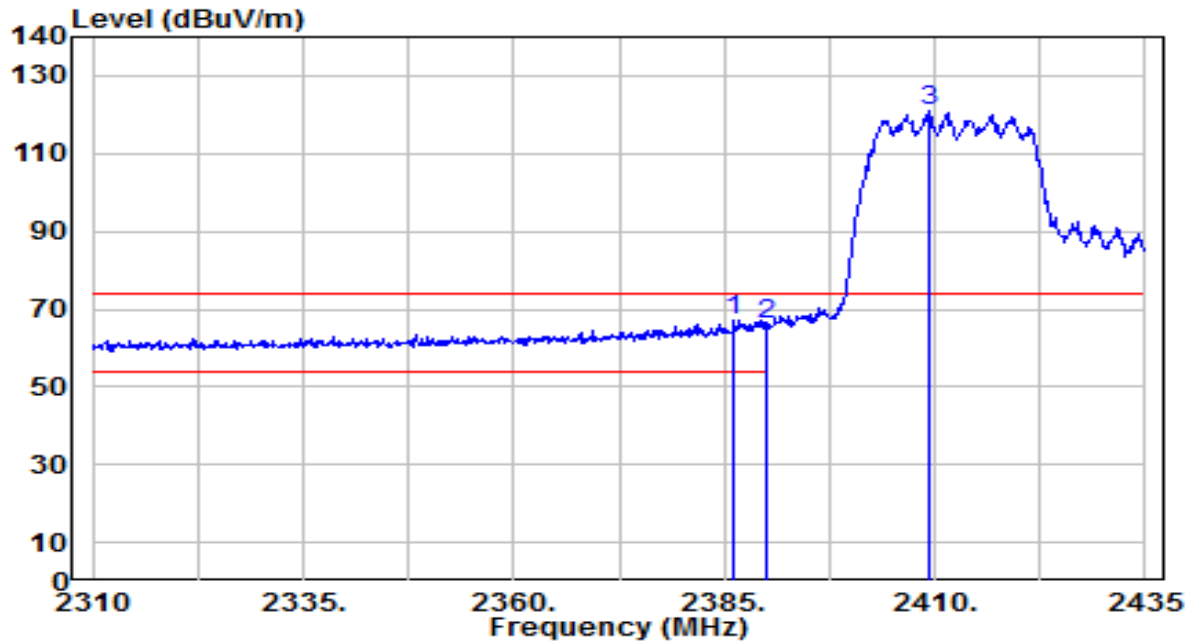


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.250	34.97	31.93	66.91	-7.09	74.00	175	165	Peak
2		2390.000	34.32	31.95	66.27	-7.73	74.00	175	165	Peak
3		2409.375	89.04	32.02	121.06	N/A	N/A	175	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

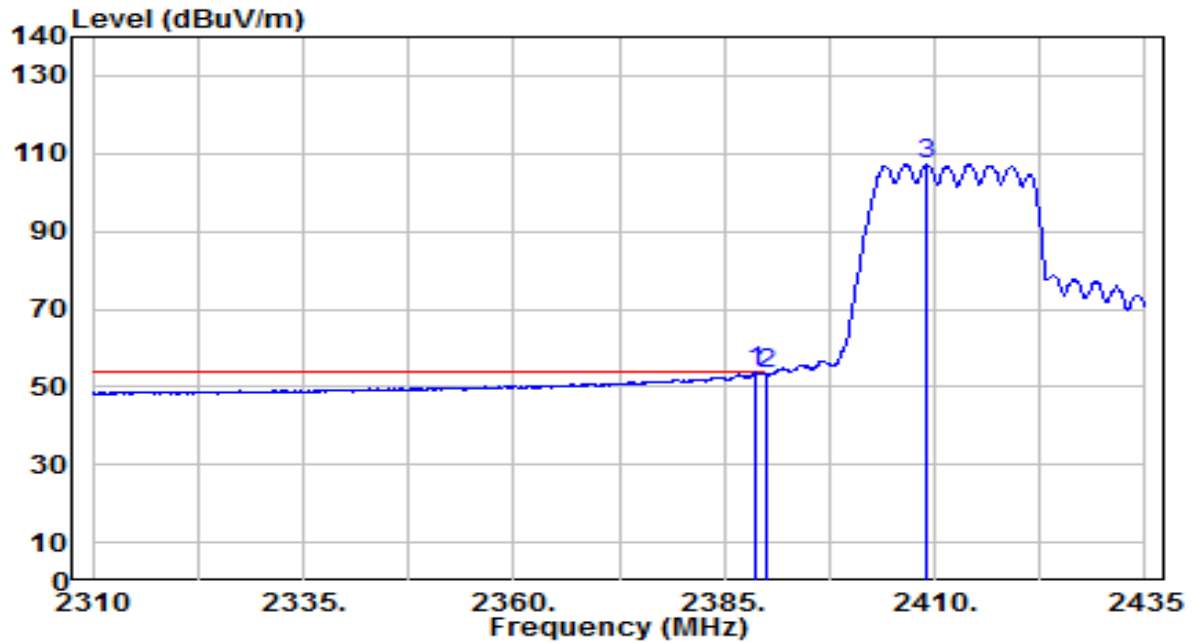


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.750	21.78	31.94	53.72	-0.28	54.00	175	165	Average
2		2390.000	21.38	31.95	53.33	-0.67	54.00	175	165	Average
3		2409.125	75.23	32.02	107.26	N/A	N/A	175	165	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

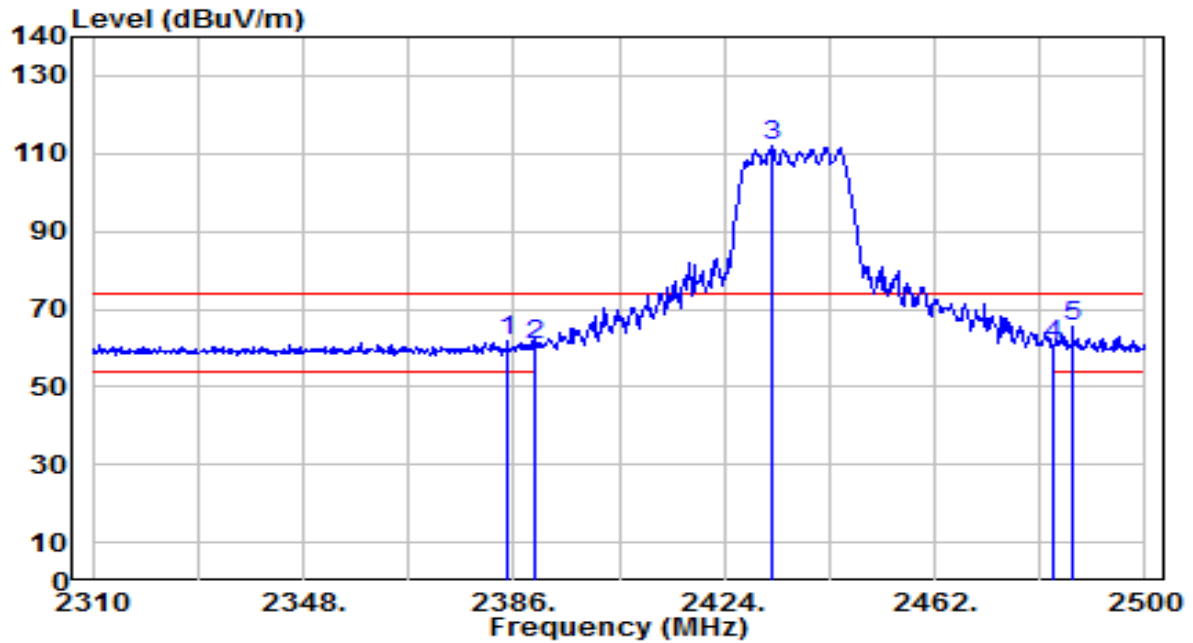


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.860	29.62	31.93	61.55	-12.45	74.00	155	180	Peak
2	2390.000	28.93	31.95	60.88	-13.12	74.00	155	180	Peak
3	2432.740	79.95	32.11	112.06	N/A	N/A	155	180	Peak
4	2483.500	28.23	32.30	60.53	-13.47	74.00	155	180	Peak
5	* 2486.890	33.03	32.31	65.34	-8.66	74.00	155	180	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

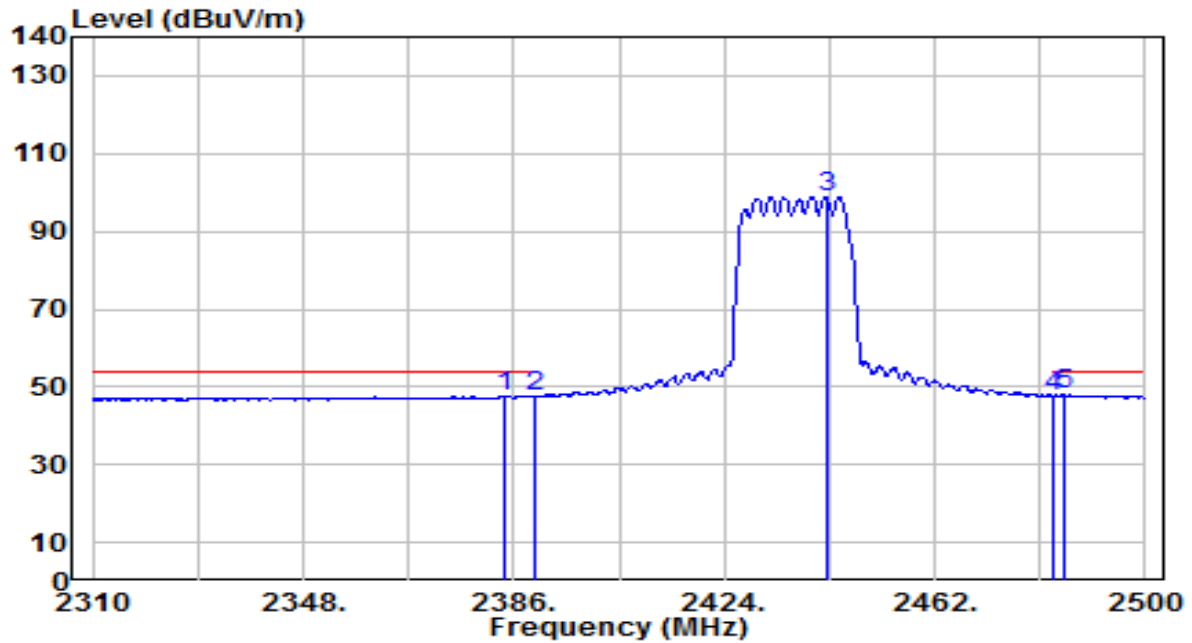


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.480	15.76	31.93	47.69	-6.31	54.00	155	180	Average
2	2390.000	15.62	31.95	47.57	-6.43	54.00	155	180	Average
3	2442.430	66.62	32.14	98.77	N/A	N/A	155	180	Average
4	2483.500	15.50	32.30	47.80	-6.20	54.00	155	180	Average
5	* 2485.180	15.81	32.30	48.11	-5.89	54.00	155	180	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

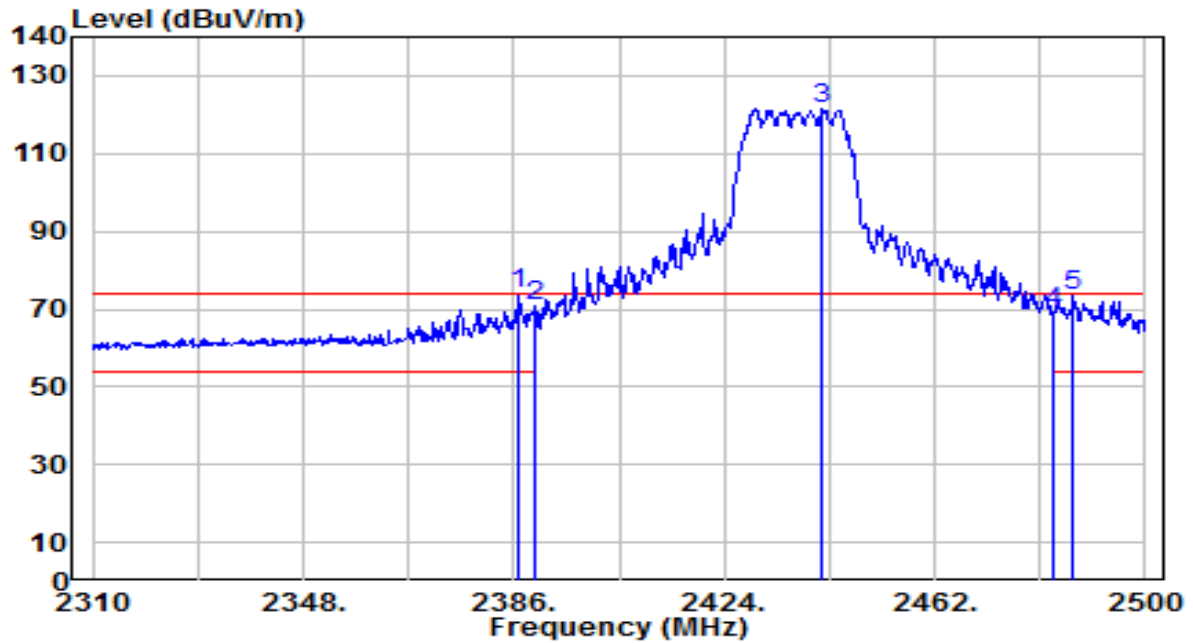


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.950	41.80	31.94	73.74	-0.26	74.00	120	10	Peak
2		2390.000	38.85	31.95	70.80	-3.20	74.00	120	10	Peak
3		2441.670	89.32	32.14	121.46	N/A	N/A	120	10	Peak
4		2483.500	36.67	32.30	68.97	-5.03	74.00	120	10	Peak
5		2487.080	40.87	32.31	73.18	-0.82	74.00	120	10	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

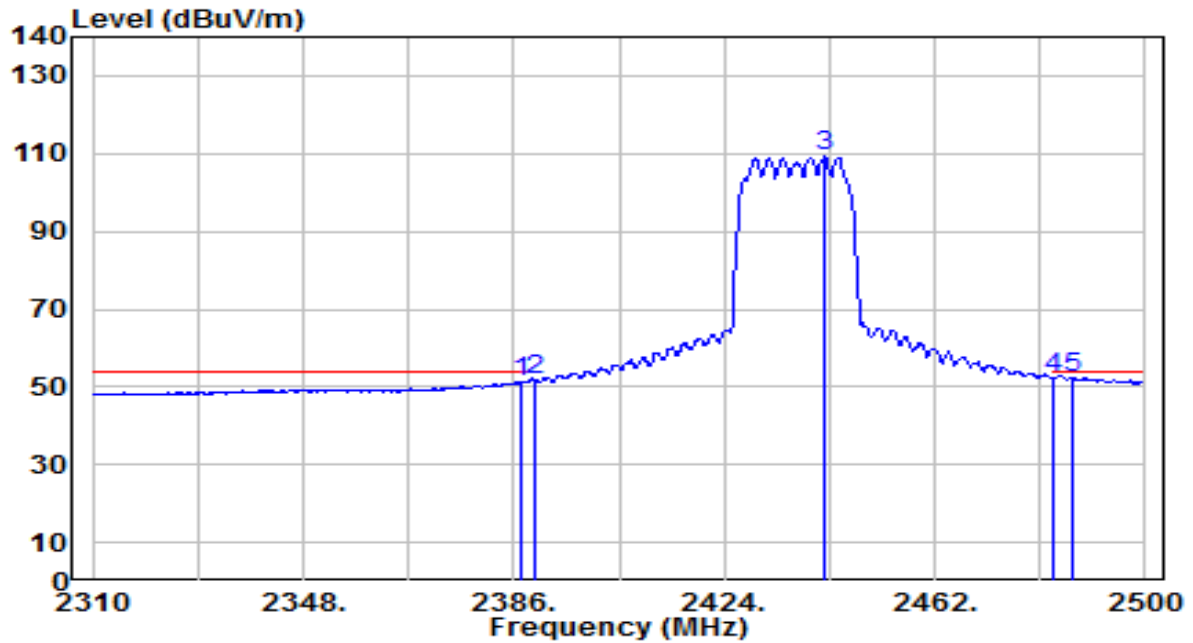


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.520	19.32	31.94	51.26	-2.74	54.00	120	10	Average
2	2390.000	19.85	31.95	51.80	-2.20	54.00	120	10	Average
3	2442.240	77.09	32.14	109.24	N/A	N/A	120	10	Average
4	2483.500	19.98	32.30	52.28	-1.72	54.00	120	10	Average
5	* 2486.890	20.22	32.31	52.53	-1.47	54.00	120	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

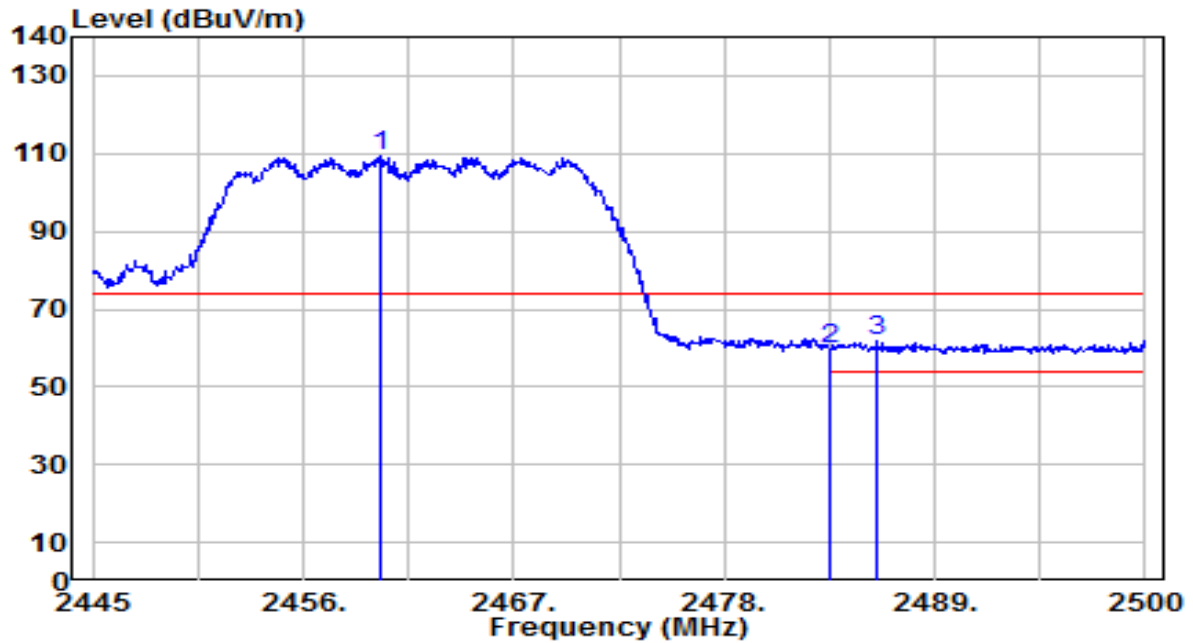


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.015	76.93	32.21	109.14	N/A	N/A	145	180	Peak
2	2483.500	27.21	32.30	59.51	-14.49	74.00	145	180	Peak
3	* 2485.975	29.51	32.31	61.82	-12.18	74.00	145	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

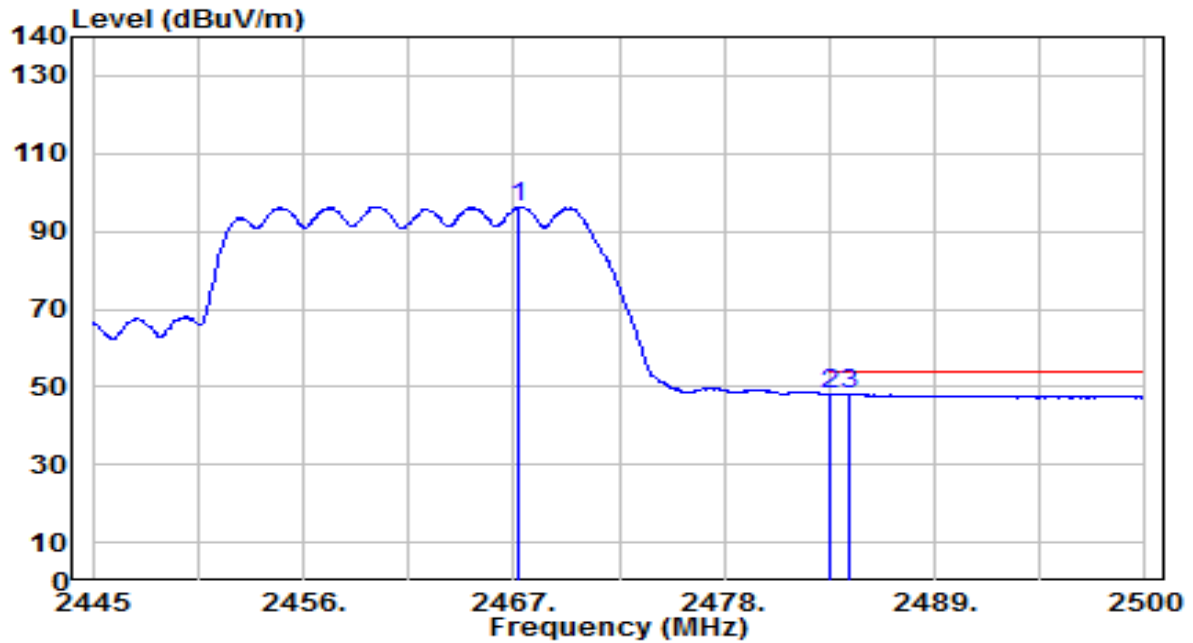


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2467.275	64.05	32.24	96.29	N/A	N/A	145	180	Average
2		2483.500	15.85	32.30	48.15	-5.85	54.00	145	180	Average
3	*	2484.490	15.98	32.30	48.28	-5.72	54.00	145	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

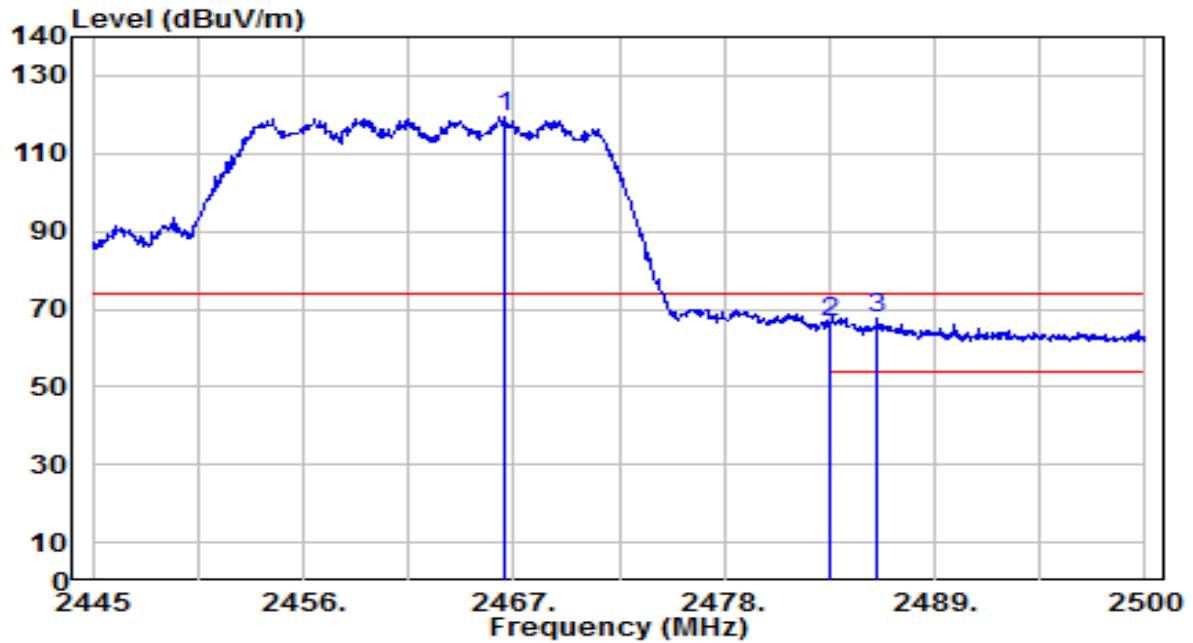


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2466.505	87.42	32.23	119.66	N/A	N/A	130	20	Peak
2	2483.500	34.03	32.30	66.33	-7.67	74.00	130	20	Peak
3	* 2486.030	35.12	32.31	67.43	-6.57	74.00	130	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

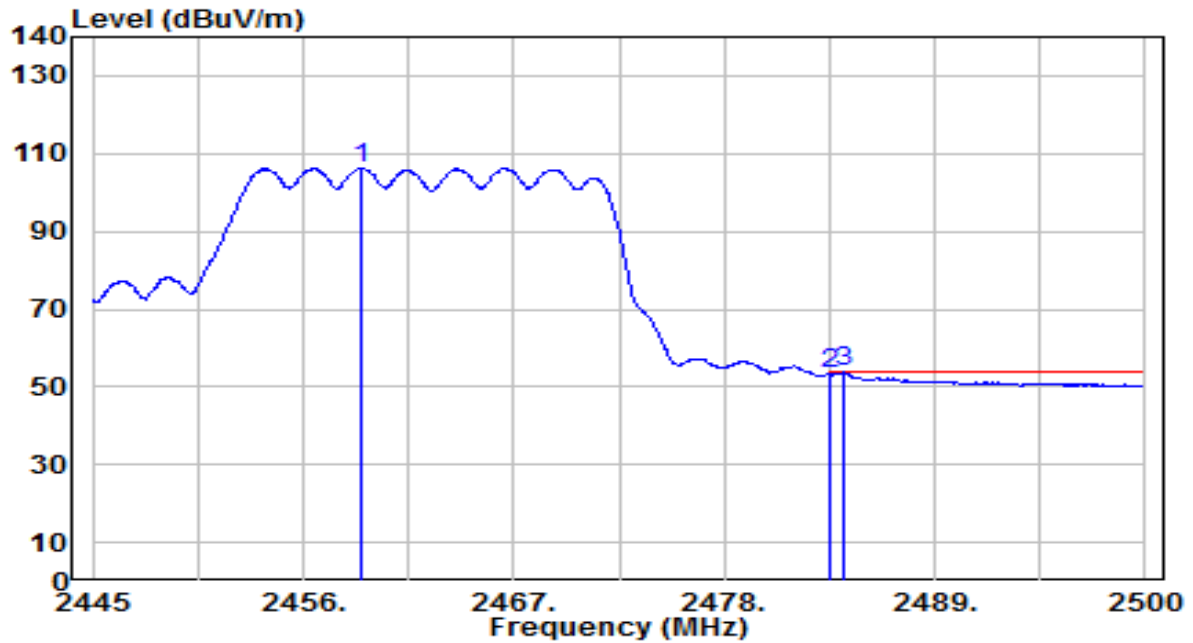


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.080	73.98	32.21	106.19	N/A	N/A	130	20	Average
2	2483.500	20.87	32.30	53.17	-0.83	54.00	130	20	Average
3	* 2484.215	21.41	32.30	53.71	-0.29	54.00	130	20	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

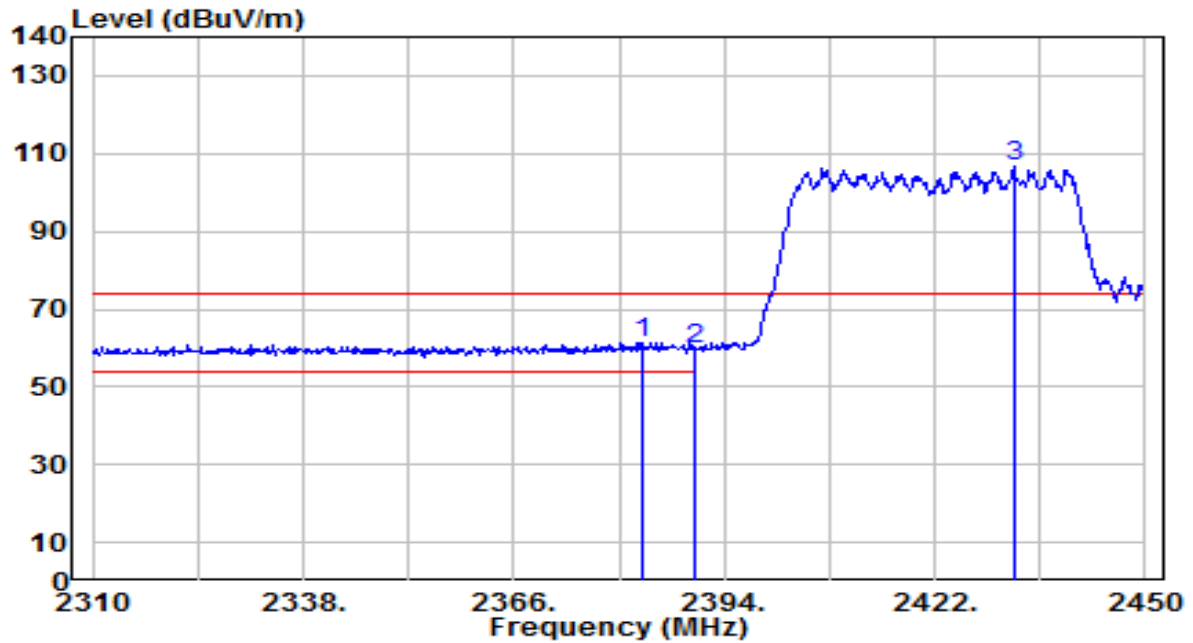


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2383.220	29.54	31.92	61.47	-12.53	74.00	150	180	Peak
2		2390.000	27.95	31.95	59.90	-14.10	74.00	150	180	Peak
3		2432.500	74.40	32.11	106.51	N/A	N/A	150	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

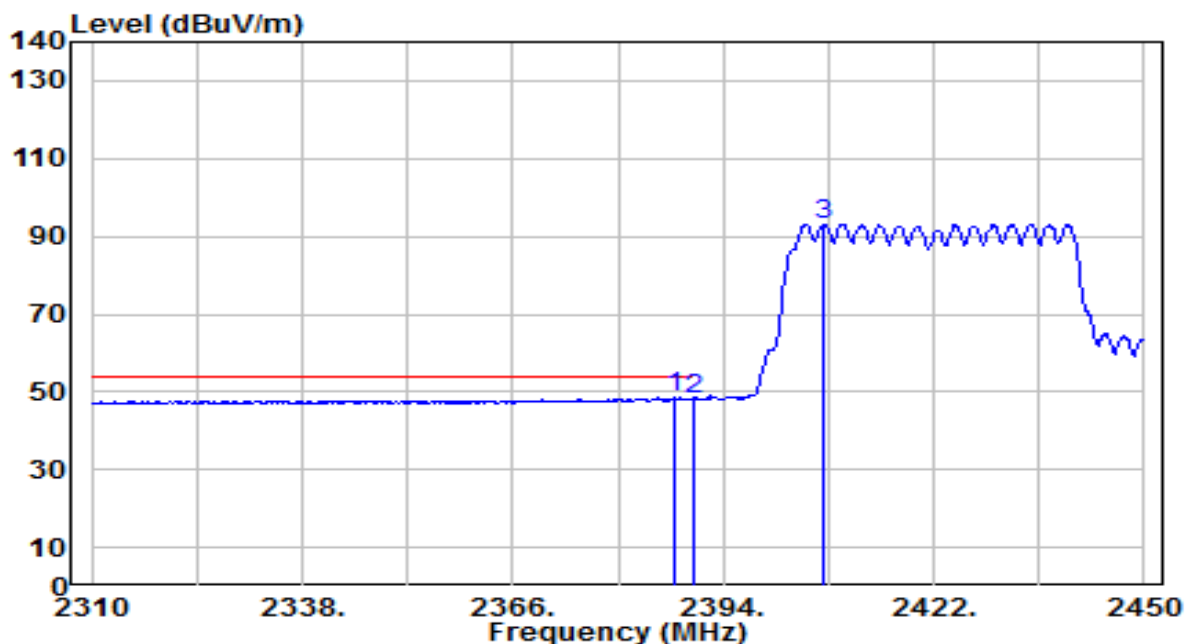


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.700	16.59	31.94	48.53	-5.47	54.00	150	180	Average
2		2390.000	16.33	31.95	48.28	-5.72	54.00	150	180	Average
3		2407.300	61.09	32.01	93.10	N/A	N/A	150	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

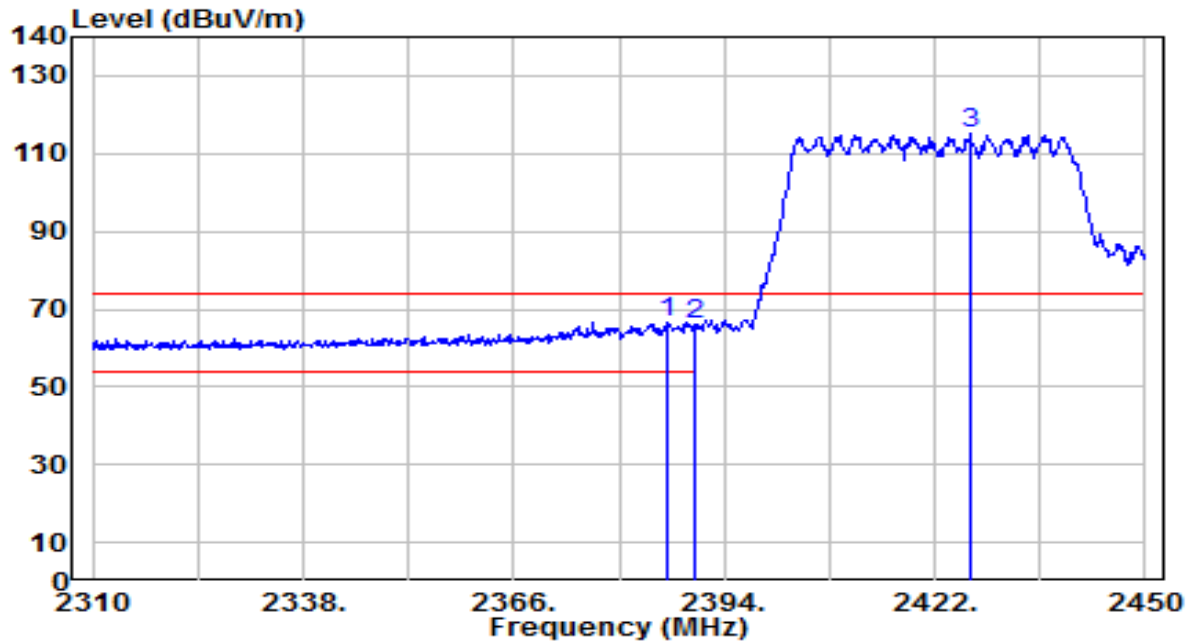


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.440	34.77	31.94	66.71	-7.29	74.00	175	165	Peak
2		2390.000	33.93	31.95	65.87	-8.13	74.00	175	165	Peak
3		2426.760	83.13	32.09	115.21	N/A	N/A	175	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

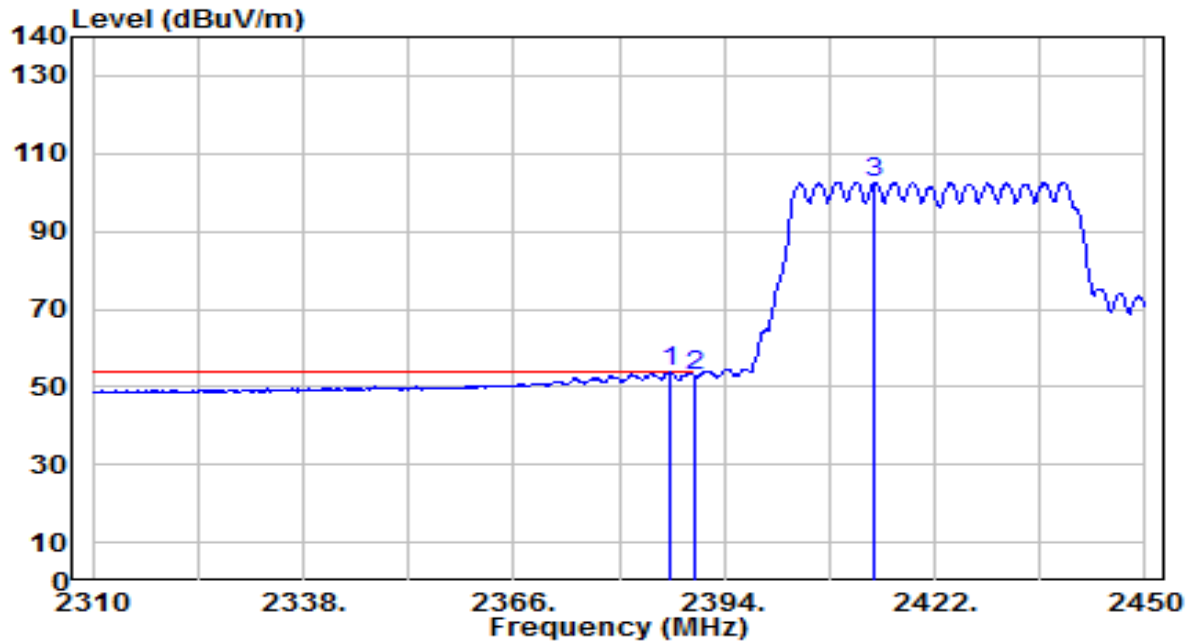


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.860	21.86	31.94	53.79	-0.21	54.00	175	165	Average
2		2390.000	21.03	31.95	52.97	-1.03	54.00	175	165	Average
3		2414.020	70.66	32.04	102.70	N/A	N/A	175	165	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

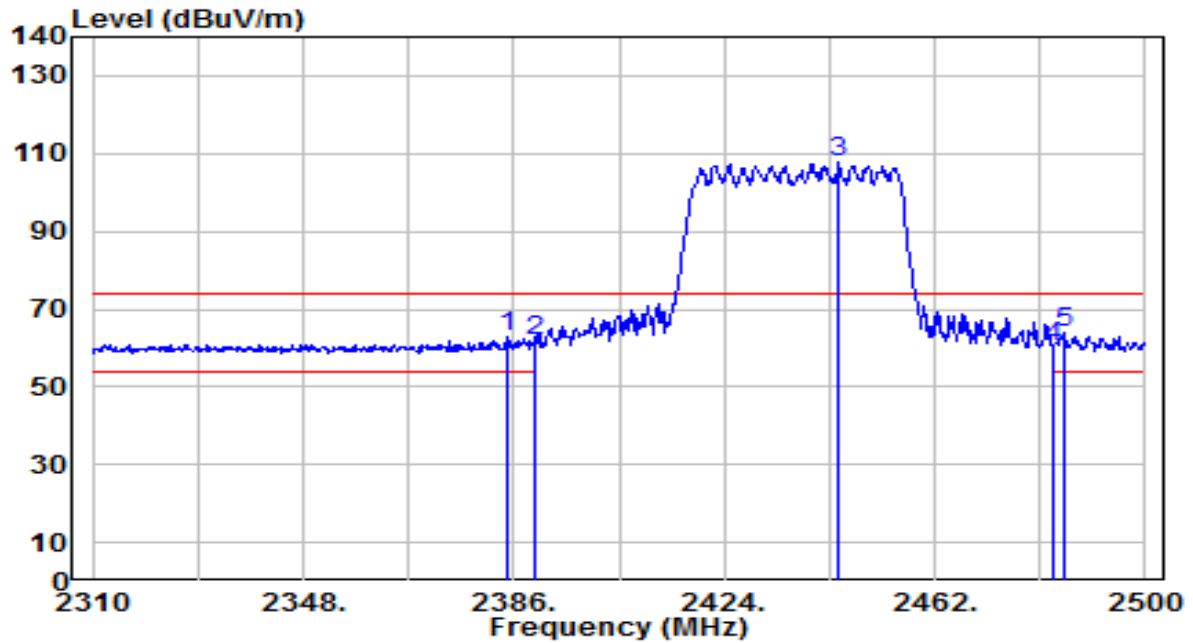


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.670	30.73	31.93	62.66	-11.34	74.00	155	180	Peak
2	2390.000	30.11	31.95	62.06	-11.94	74.00	155	180	Peak
3	2444.710	75.40	32.15	107.56	N/A	N/A	155	180	Peak
4	2483.500	28.18	32.30	60.48	-13.52	74.00	155	180	Peak
5	* 2485.370	31.69	32.31	63.99	-10.01	74.00	155	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

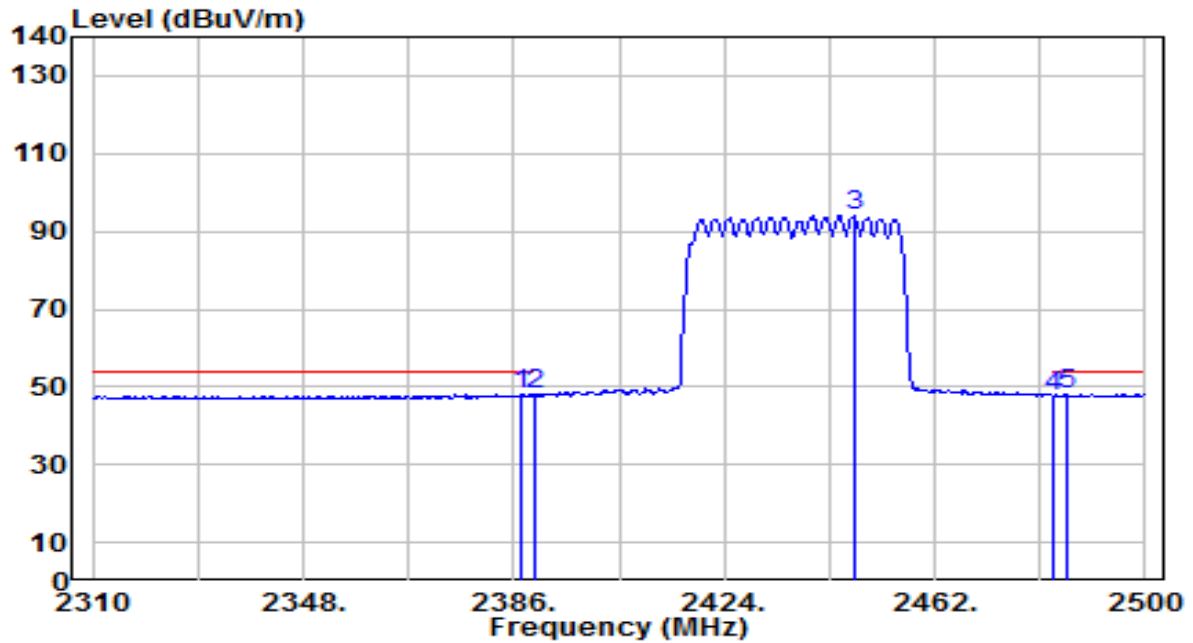


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.520	16.09	31.94	48.03	-5.97	54.00	155	180	Average
2	2390.000	15.93	31.95	47.88	-6.12	54.00	155	180	Average
3	2447.370	61.79	32.16	93.95	N/A	N/A	155	180	Average
4	2483.500	15.46	32.30	47.76	-6.24	54.00	155	180	Average
5	* 2485.940	15.86	32.31	48.17	-5.83	54.00	155	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

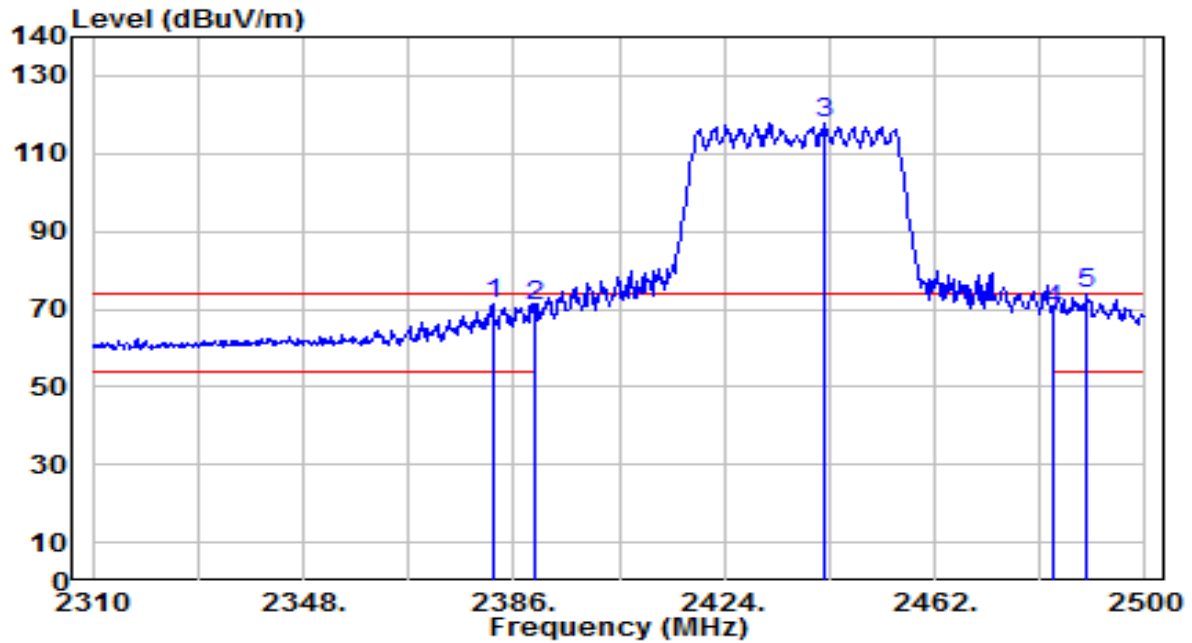


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2382.200	39.65	31.92	71.57	-2.43	74.00	120	10	Peak
2	2390.000	38.76	31.95	70.71	-3.29	74.00	120	10	Peak
3	2442.240	85.73	32.14	117.87	N/A	N/A	120	10	Peak
4	2483.500	37.70	32.30	70.00	-4.00	74.00	120	10	Peak
5	* 2489.360	41.53	32.32	73.85	-0.15	74.00	120	10	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

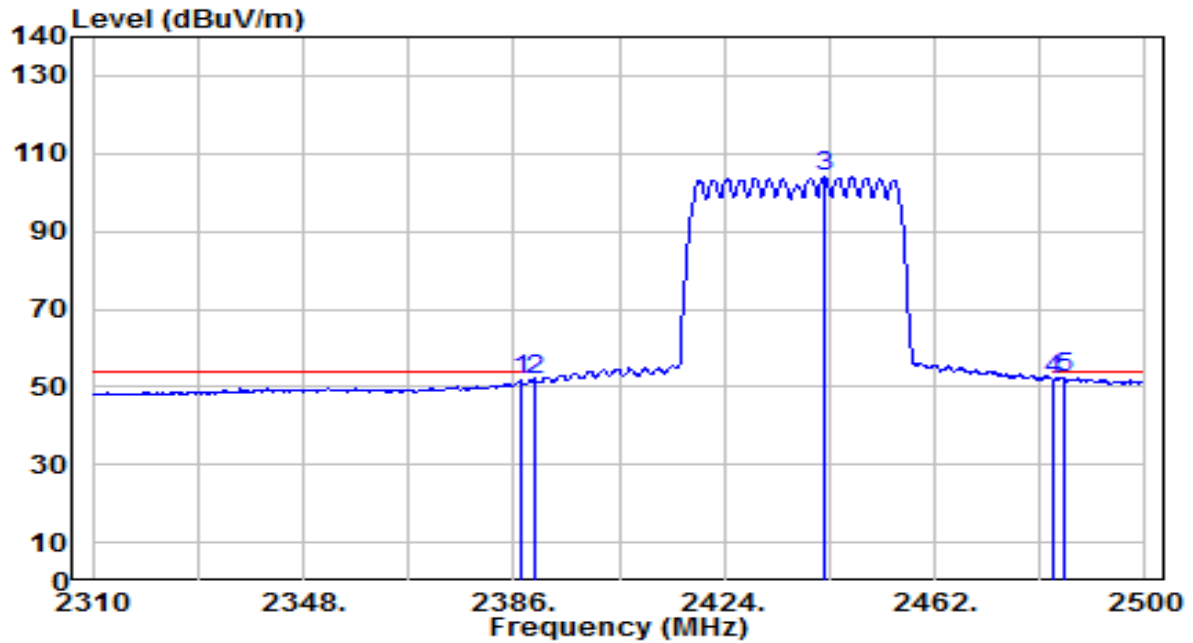


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.140	19.58	31.94	51.52	-2.48	54.00	120	10	Average
2	2390.000	19.95	31.95	51.90	-2.10	54.00	120	10	Average
3	2442.050	71.80	32.14	103.95	N/A	N/A	120	10	Average
4	2483.500	19.69	32.30	51.99	-2.01	54.00	120	10	Average
5	* 2485.370	19.86	32.31	52.17	-1.83	54.00	120	10	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

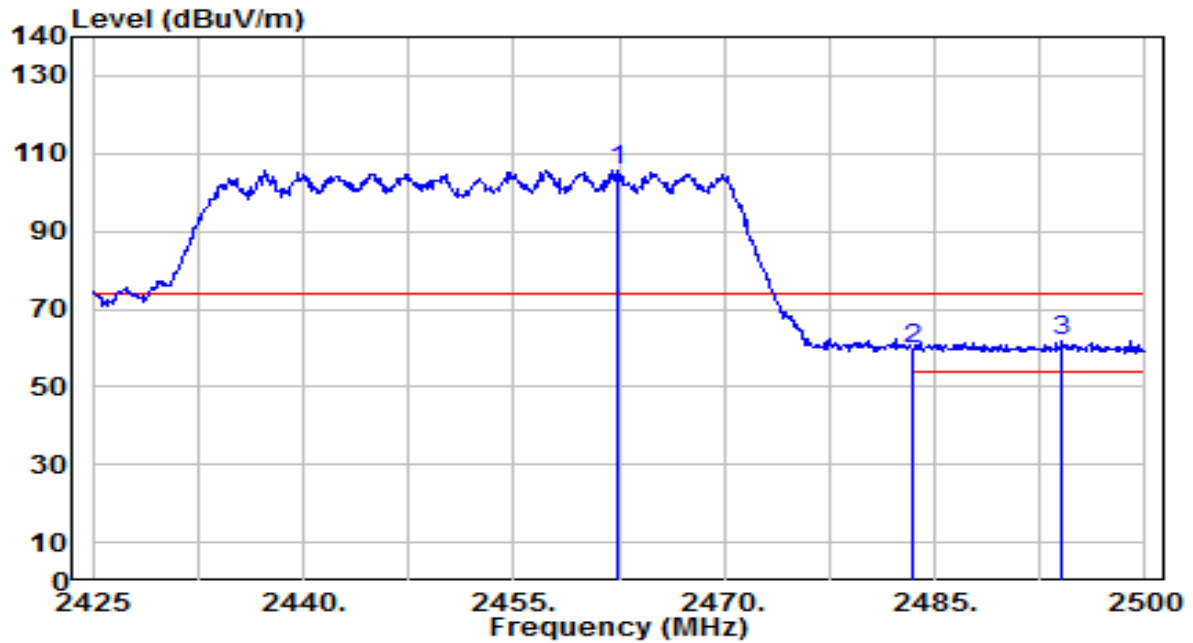


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.350	73.65	32.22	105.87	N/A	N/A	145	180	Peak
2	2483.500	27.16	32.30	59.46	-14.54	74.00	145	180	Peak
3	* 2494.075	29.63	32.34	61.96	-12.04	74.00	145	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

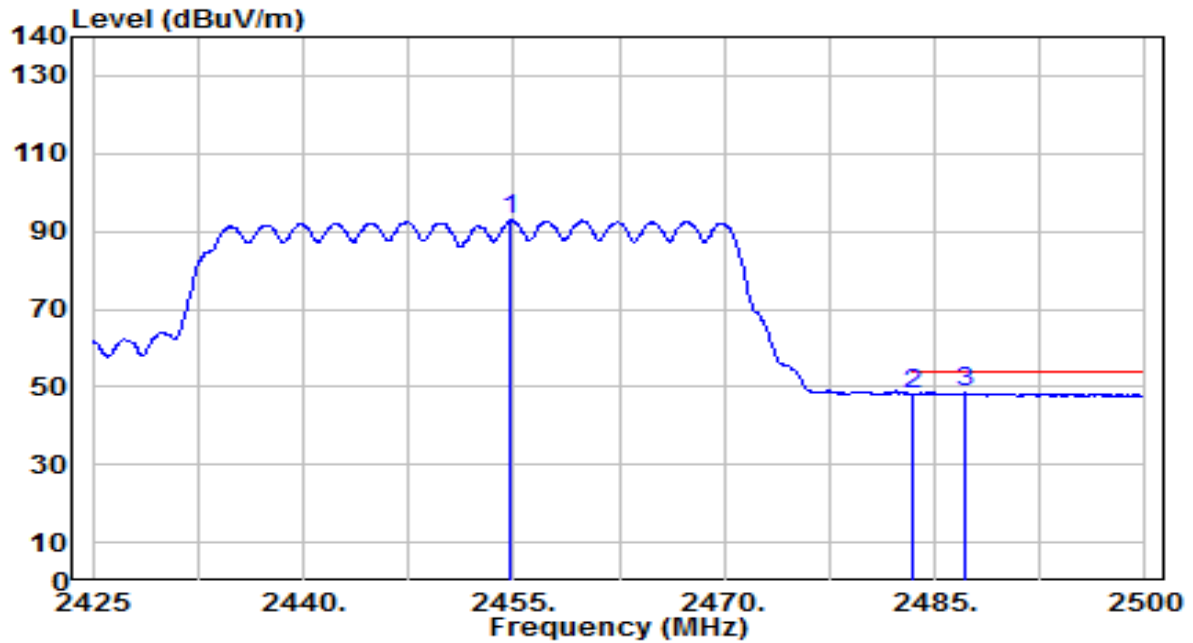


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.775	60.73	32.19	92.92	N/A	N/A	145	180	Average
2	2483.500	15.63	32.30	47.93	-6.07	54.00	145	180	Average
3	* 2487.100	16.22	32.31	48.54	-5.46	54.00	145	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

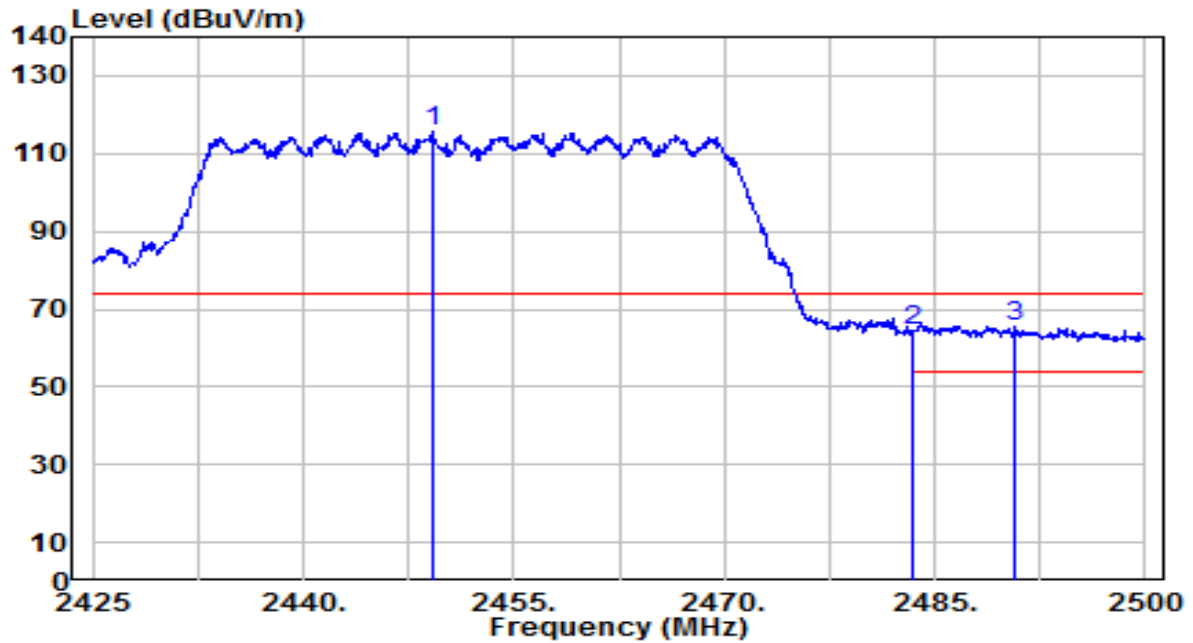


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.150	83.62	32.17	115.79	N/A	N/A	130	20	Peak
2	2483.500	32.21	32.30	64.51	-9.49	74.00	130	20	Peak
3	* 2490.700	33.25	32.33	65.57	-8.43	74.00	130	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

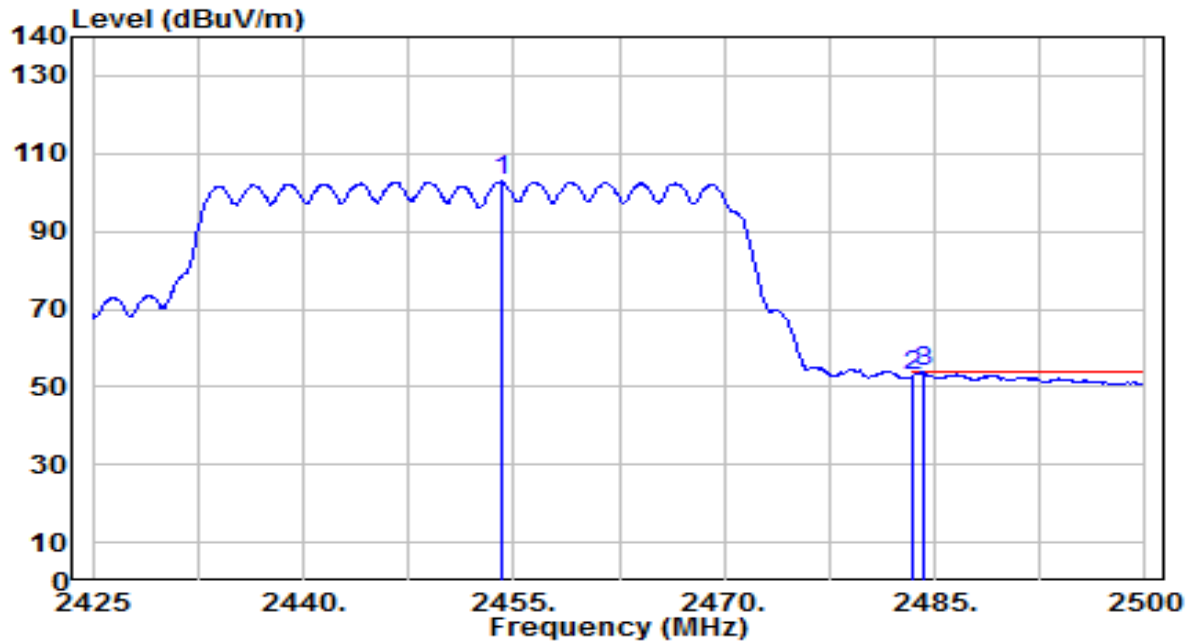


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.175	70.69	32.19	102.88	N/A	N/A	130	20	Average
2	2483.500	20.54	32.30	52.84	-1.16	54.00	130	20	Average
3	* 2484.175	21.47	32.30	53.77	-0.23	54.00	130	20	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

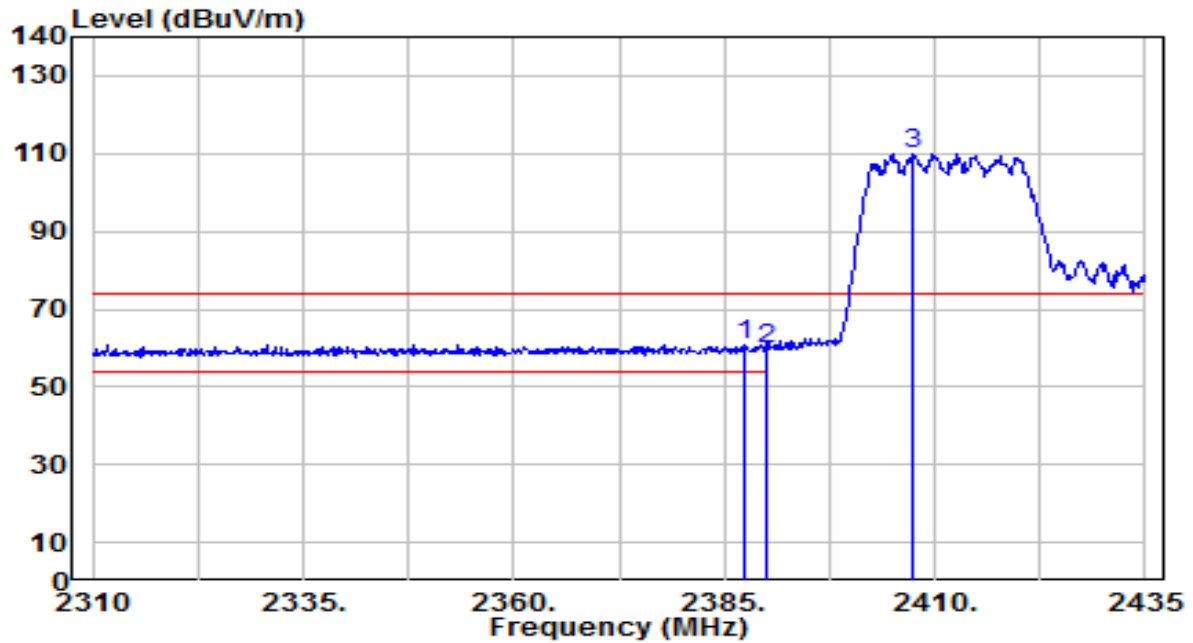


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.375	28.87	31.94	60.81	-13.19	74.00	150	180	Peak
2		2390.000	27.84	31.95	59.79	-14.21	74.00	150	180	Peak
3		2407.375	77.92	32.01	109.93	N/A	N/A	150	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

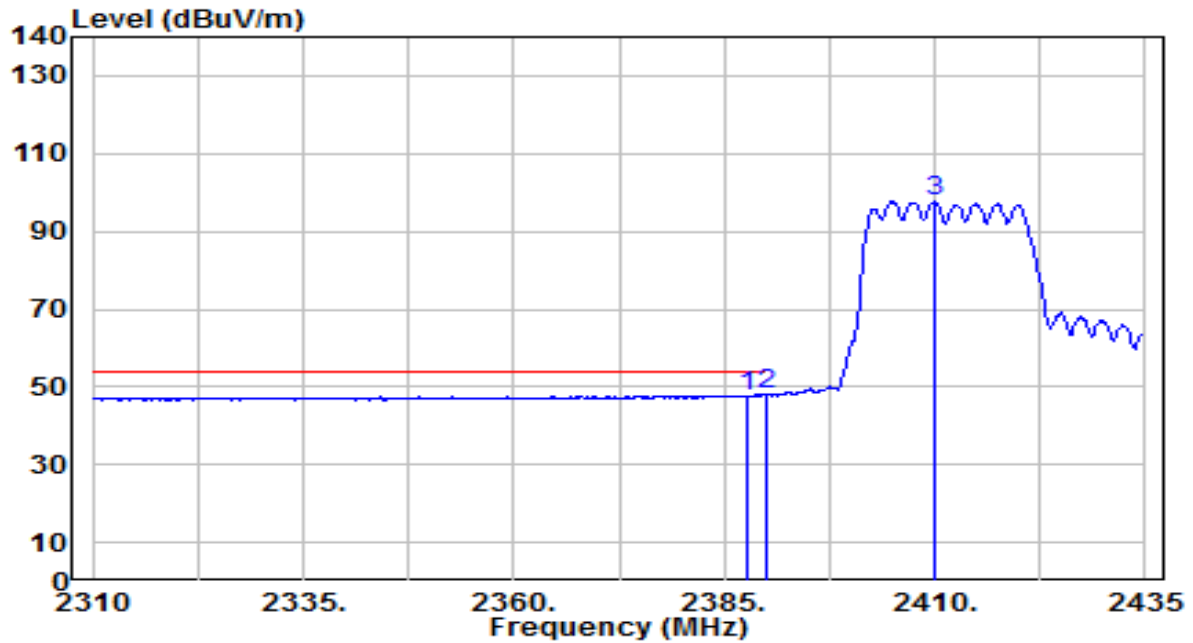


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.750	15.83	31.94	47.77	-6.23	54.00	150	180	Average
2	*	2390.000	16.04	31.95	47.99	-6.01	54.00	150	180	Average
3		2410.000	65.80	32.02	97.83	N/A	N/A	150	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

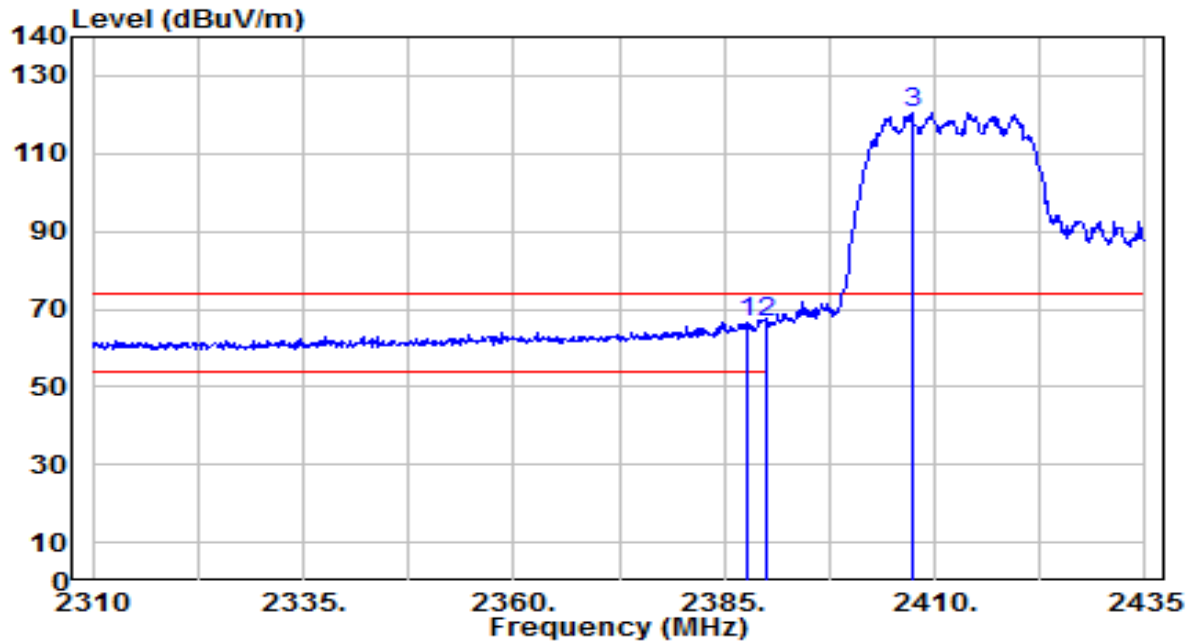


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.750	34.44	31.94	66.38	-7.62	74.00	180	175	Peak
2	*	2390.000	34.76	31.95	66.71	-7.29	74.00	180	175	Peak
3		2407.250	88.46	32.01	120.47	N/A	N/A	180	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

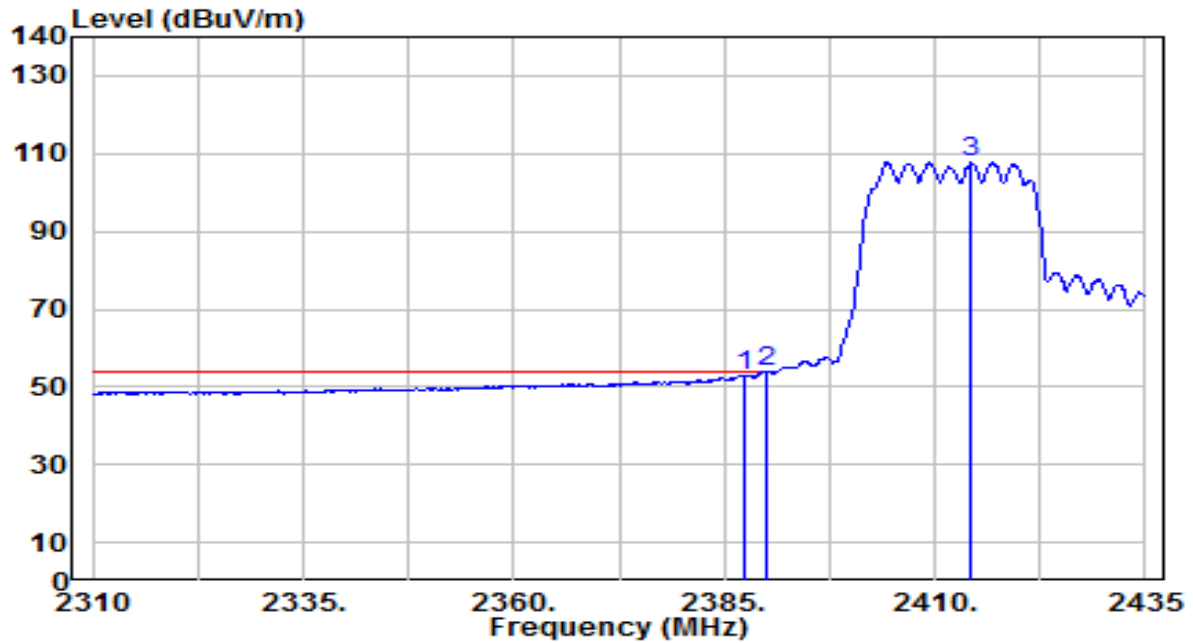


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.500	21.08	31.94	53.02	-0.98	54.00	180	175	Average
2	*	2390.000	21.89	31.95	53.84	-0.16	54.00	180	175	Average
3		2414.250	75.61	32.04	107.65	N/A	N/A	180	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

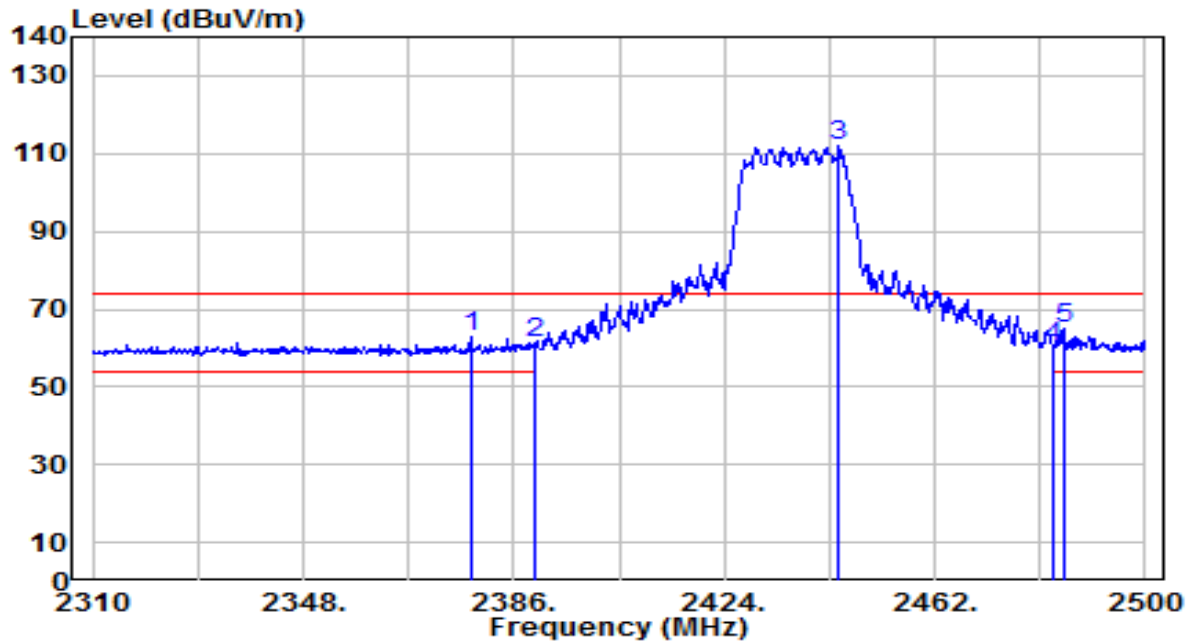


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2378.210	30.98	31.90	62.88	-11.12	74.00	155	180	Peak
2	2390.000	29.23	31.95	61.18	-12.82	74.00	155	180	Peak
3	2444.710	79.68	32.15	111.83	N/A	N/A	155	180	Peak
4	2483.500	28.05	32.30	60.34	-13.66	74.00	155	180	Peak
5	* 2485.180	32.45	32.30	64.76	-9.24	74.00	155	180	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

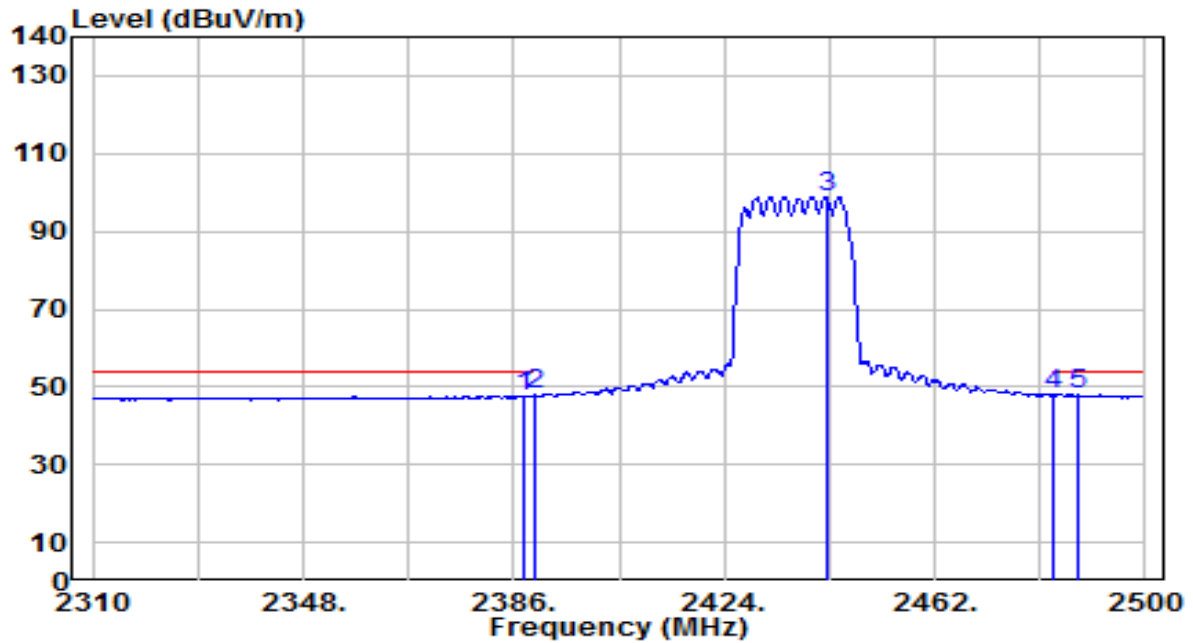


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.710	15.80	31.94	47.74	-6.26	54.00	155	180	Average
2	2390.000	15.88	31.95	47.83	-6.17	54.00	155	180	Average
3	2442.430	66.71	32.14	98.85	N/A	N/A	155	180	Average
4	2483.500	15.52	32.30	47.81	-6.19	54.00	155	180	Average
5	* 2488.030	15.62	32.32	47.94	-6.06	54.00	155	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

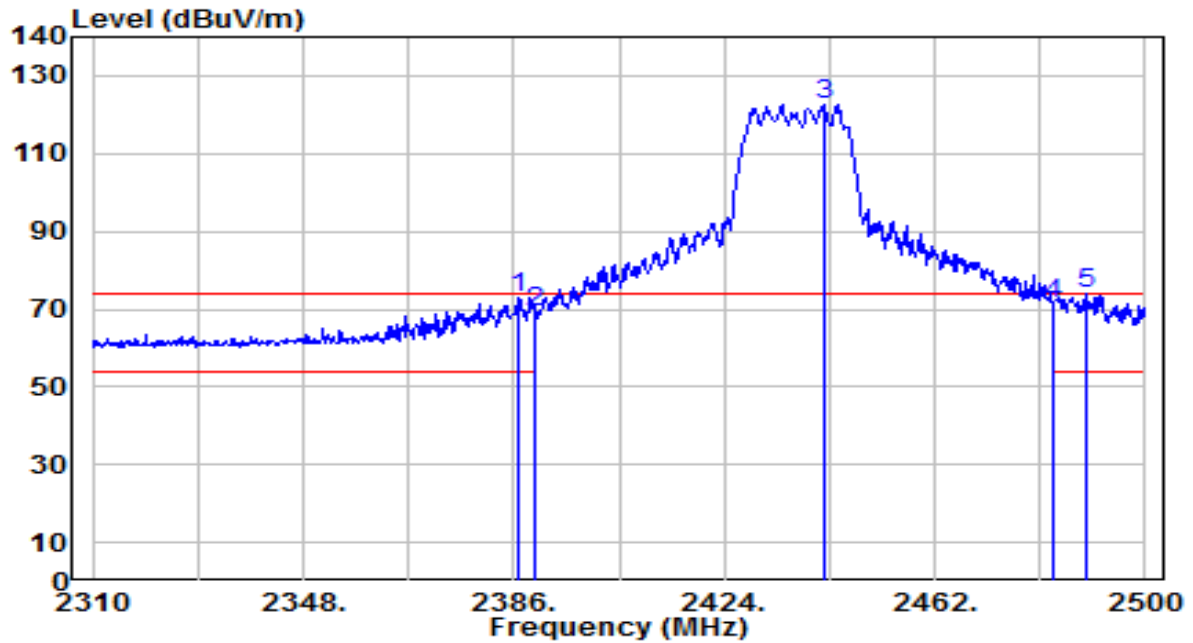


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.760	41.02	31.94	72.96	-1.04	74.00	150	175	Peak
2	2390.000	37.30	31.95	69.25	-4.75	74.00	150	175	Peak
3	2441.860	90.52	32.14	122.67	N/A	N/A	150	175	Peak
4	2483.500	39.14	32.30	71.44	-2.56	74.00	150	175	Peak
5	* 2489.550	41.40	32.32	73.72	-0.28	74.00	150	175	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

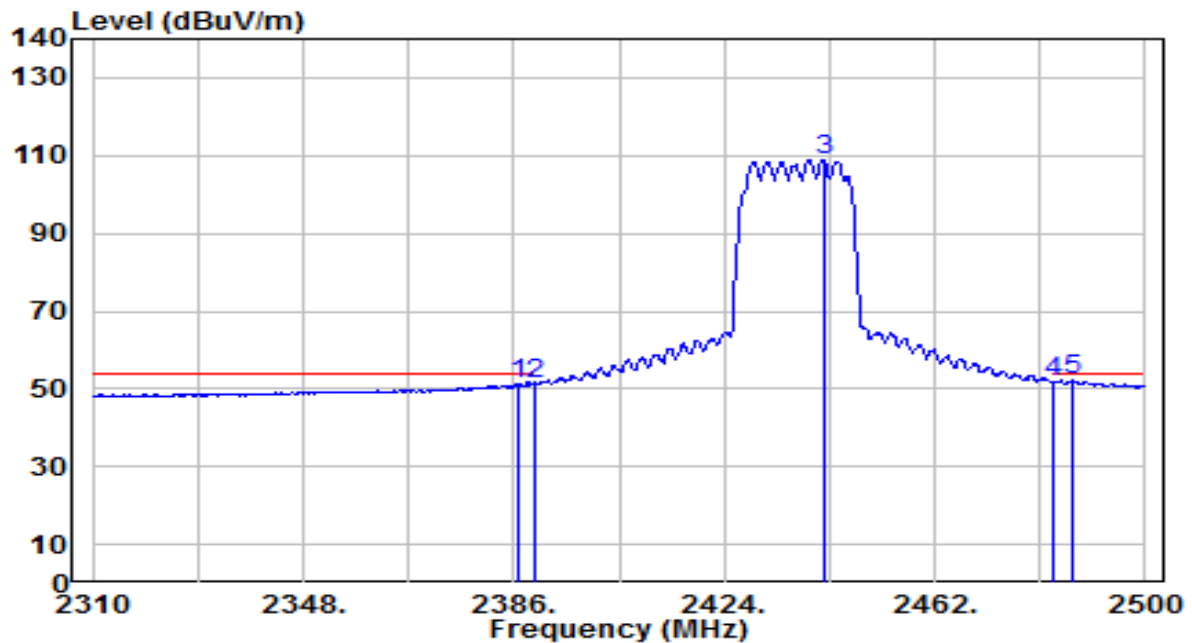


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.760	19.32	31.94	51.26	-2.74	54.00	150	175	Average
2	2390.000	19.32	31.95	51.27	-2.73	54.00	150	175	Average
3	2441.860	76.85	32.14	109.00	N/A	N/A	150	175	Average
4	2483.500	19.62	32.30	51.92	-2.08	54.00	150	175	Average
5	* 2486.700	19.73	32.31	52.04	-1.96	54.00	150	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

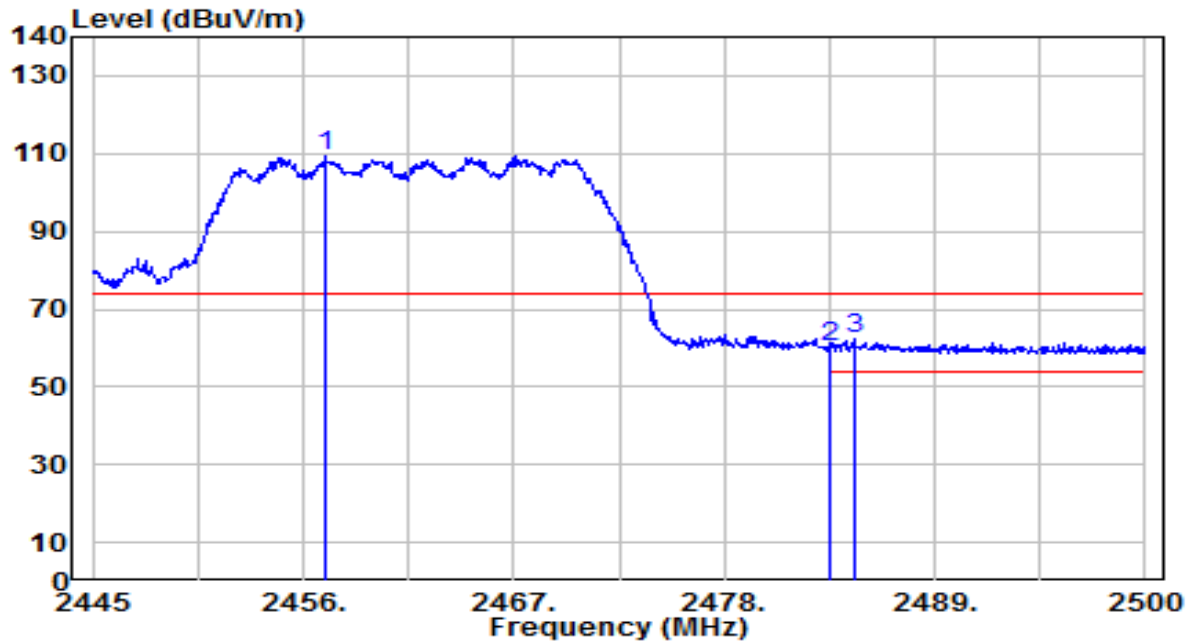


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.100	77.37	32.20	109.57	N/A	N/A	145	180	Peak
2	2483.500	27.93	32.30	60.23	-13.77	74.00	145	180	Peak
3	* 2484.765	29.97	32.30	62.27	-11.73	74.00	145	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

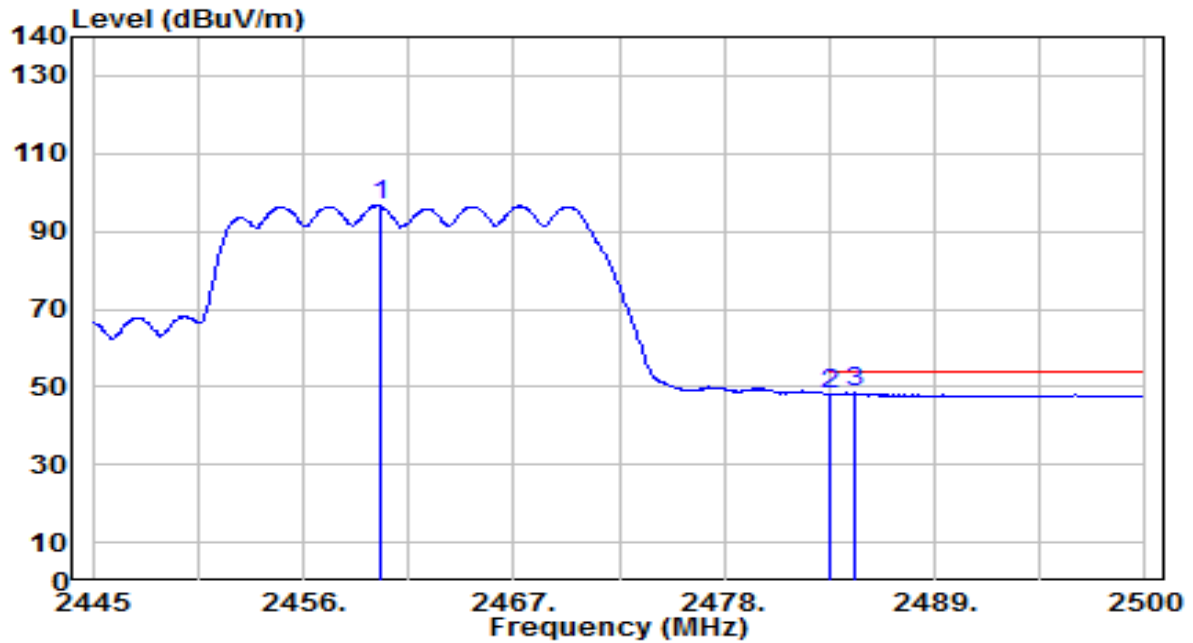


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.070	64.39	32.21	96.60	N/A	N/A	145	180	Average
2	2483.500	15.69	32.30	47.99	-6.01	54.00	145	180	Average
3	* 2484.875	16.05	32.30	48.35	-5.65	54.00	145	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

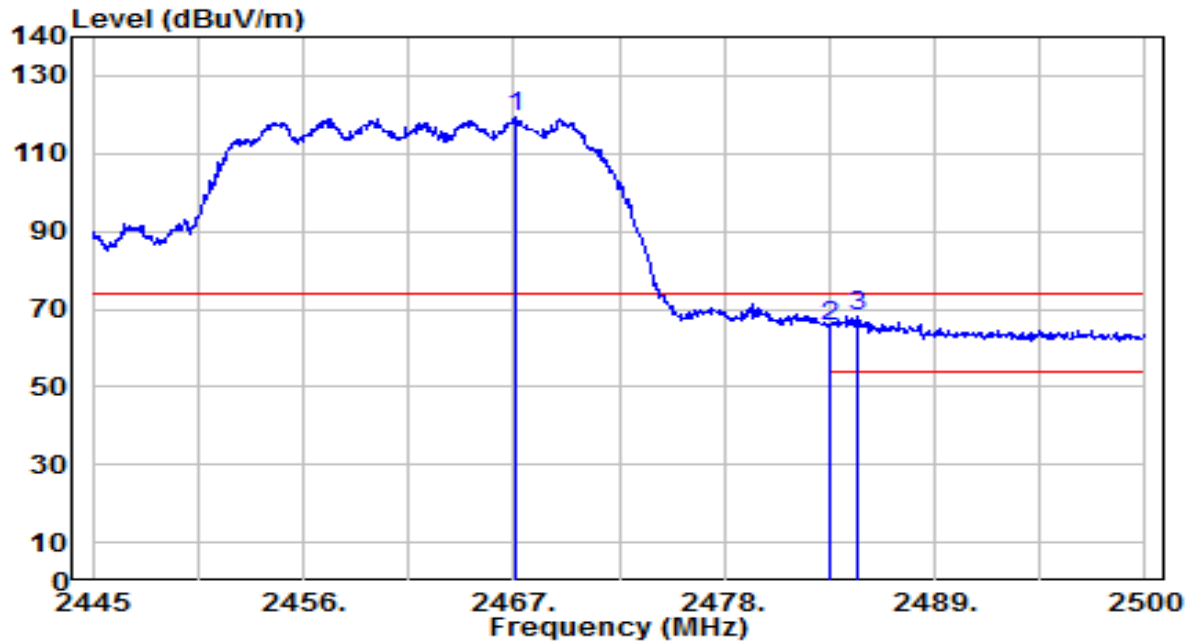


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2467.055	87.03	32.24	119.27	N/A	N/A	125	10	Peak
2	2483.500	33.15	32.30	65.44	-8.56	74.00	125	10	Peak
3	* 2484.930	35.73	32.30	68.04	-5.96	74.00	125	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

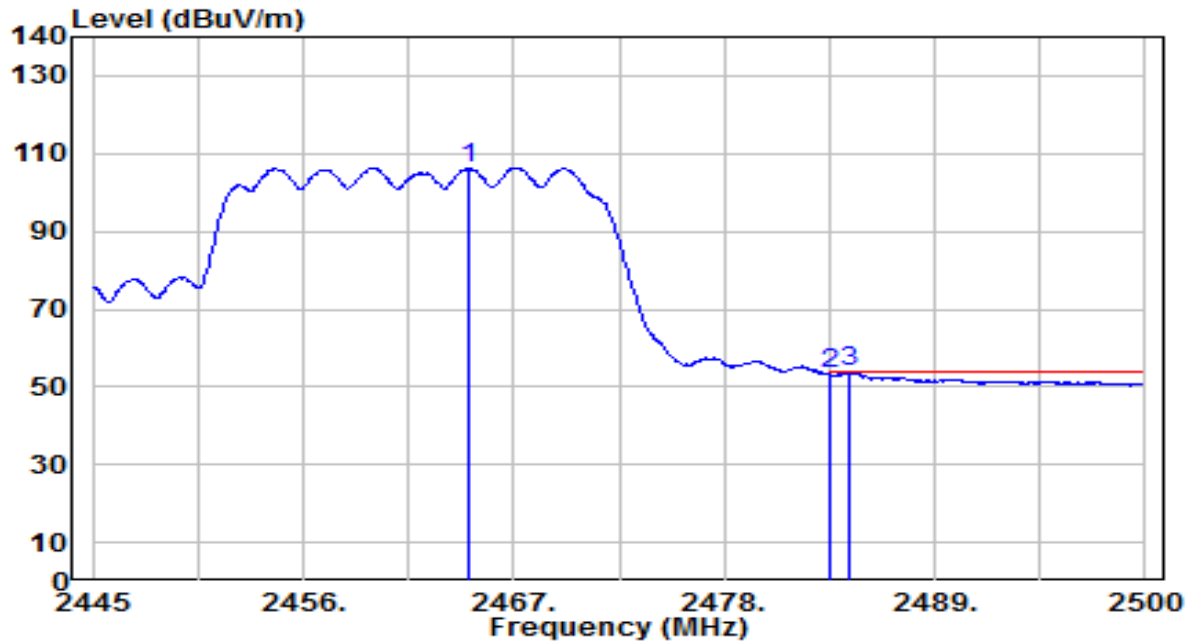


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.690	74.19	32.23	106.41	N/A	N/A	125	10	Average
2	2483.500	20.89	32.30	53.19	-0.81	54.00	125	10	Average
3	* 2484.600	21.41	32.30	53.71	-0.29	54.00	125	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

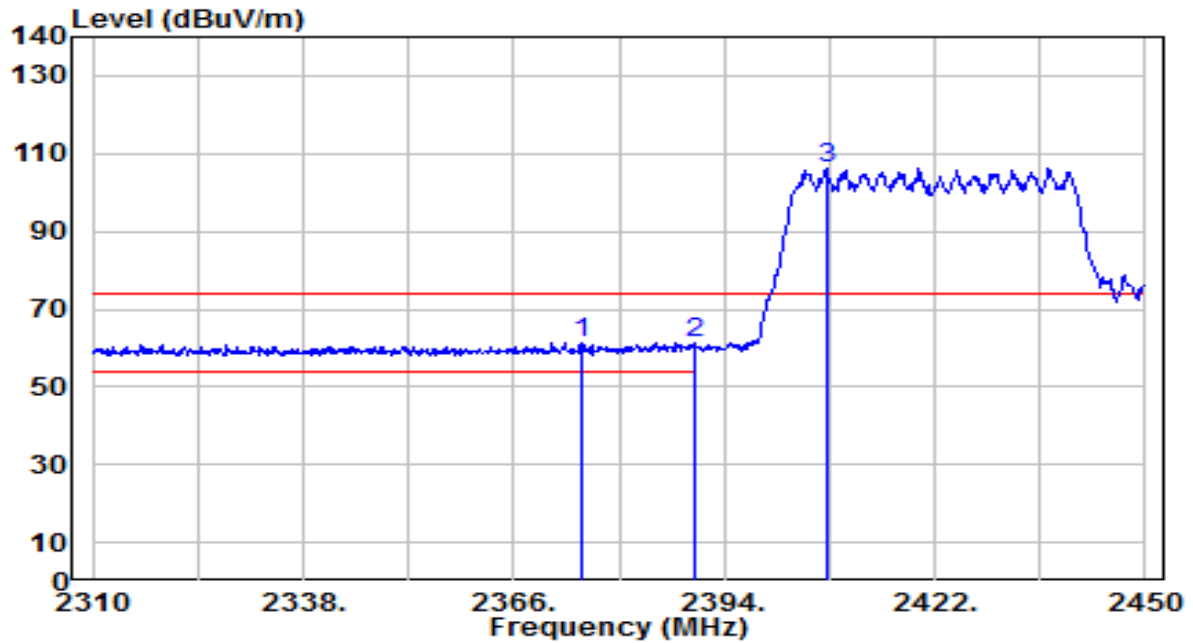


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2374.960	29.61	31.89	61.50	-12.50	74.00	150	180	Peak
2		2390.000	29.37	31.95	61.31	-12.69	74.00	150	180	Peak
3		2407.580	74.33	32.01	106.35	N/A	N/A	150	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

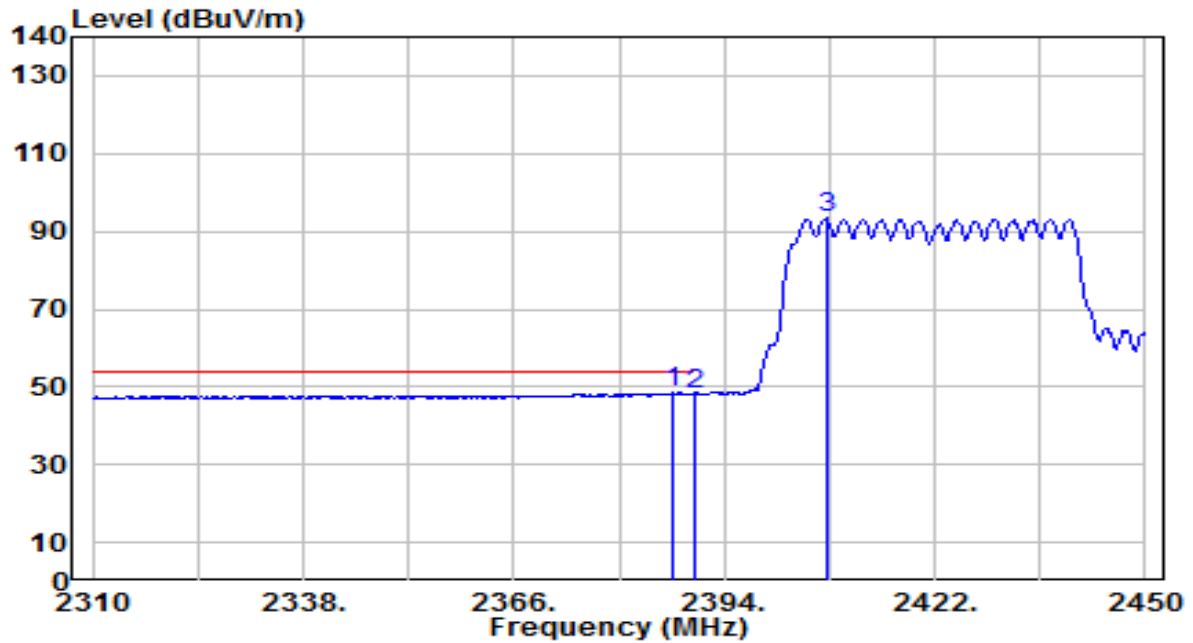


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.000	16.51	31.94	48.44	-5.56	54.00	150	180	Average
2		2390.000	16.30	31.95	48.25	-5.75	54.00	150	180	Average
3		2407.580	61.32	32.01	93.33	N/A	N/A	150	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

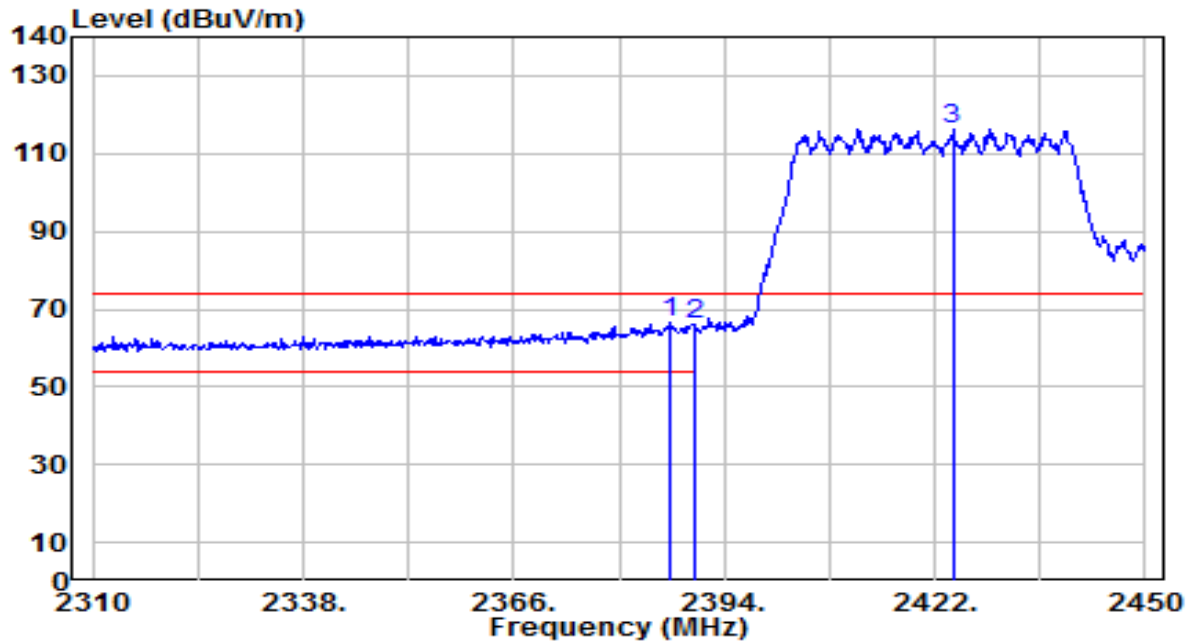


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.720	34.59	31.94	66.52	-7.48	74.00	180	175	Peak
2		2390.000	34.18	31.95	66.13	-7.87	74.00	180	175	Peak
3		2424.380	84.22	32.08	116.30	N/A	N/A	180	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

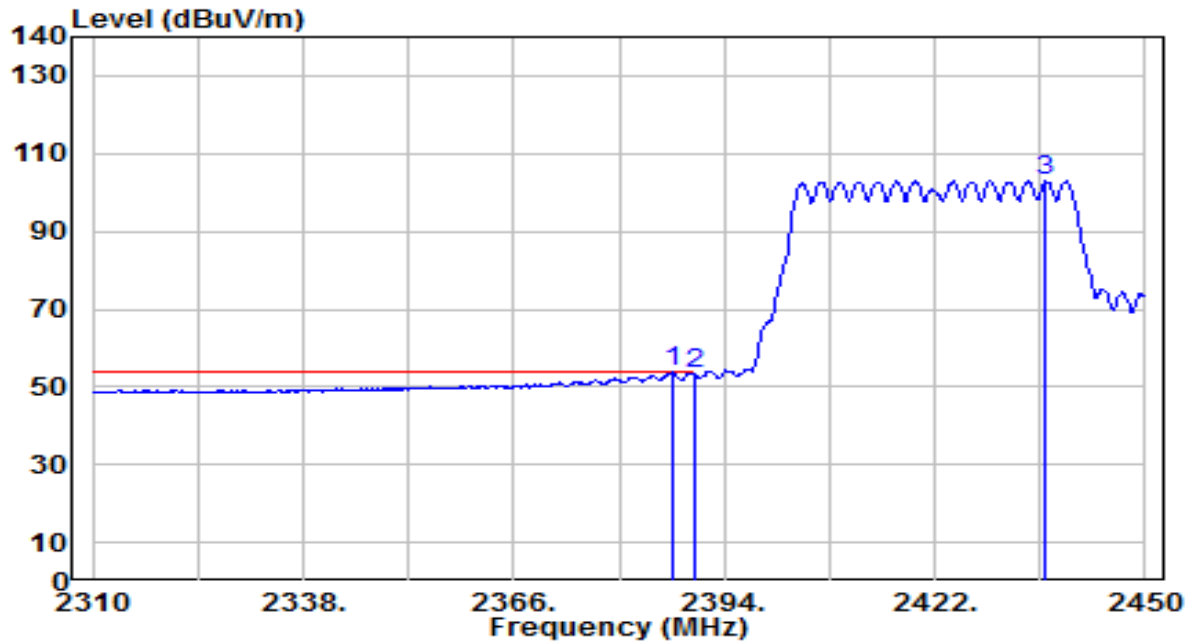


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.140	21.77	31.94	53.71	-0.29	54.00	180	175	Average
2		2390.000	21.25	31.95	53.20	-0.80	54.00	180	175	Average
3		2436.840	70.90	32.12	103.03	N/A	N/A	180	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

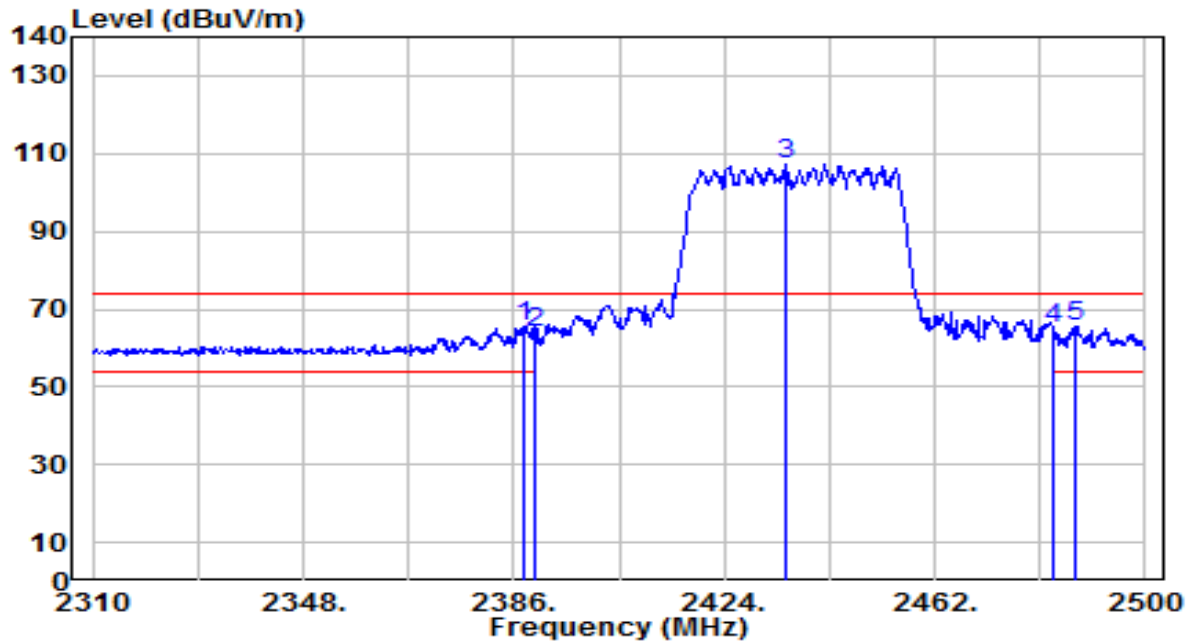


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.710	33.80	31.94	65.74	-8.26	74.00	155	180	Peak
2		2390.000	32.17	31.95	64.12	-9.88	74.00	155	180	Peak
3		2435.210	75.29	32.12	107.41	N/A	N/A	155	180	Peak
4		2483.500	32.68	32.30	64.98	-9.02	74.00	155	180	Peak
5		2487.270	33.36	32.31	65.67	-8.33	74.00	155	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

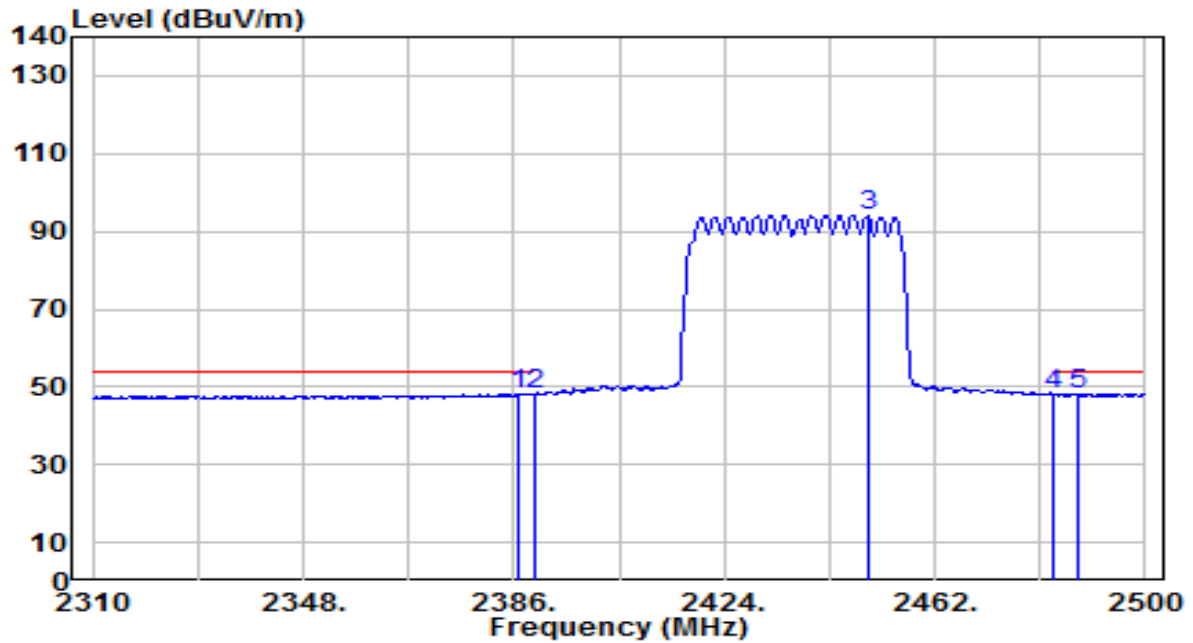


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.950	16.38	31.94	48.32	-5.68	54.00	155	180	Average
2	*	2390.000	16.38	31.95	48.33	-5.67	54.00	155	180	Average
3		2449.840	61.99	32.17	94.16	N/A	N/A	155	180	Average
4		2483.500	15.64	32.30	47.94	-6.06	54.00	155	180	Average
5		2487.840	16.01	32.31	48.32	-5.68	54.00	155	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

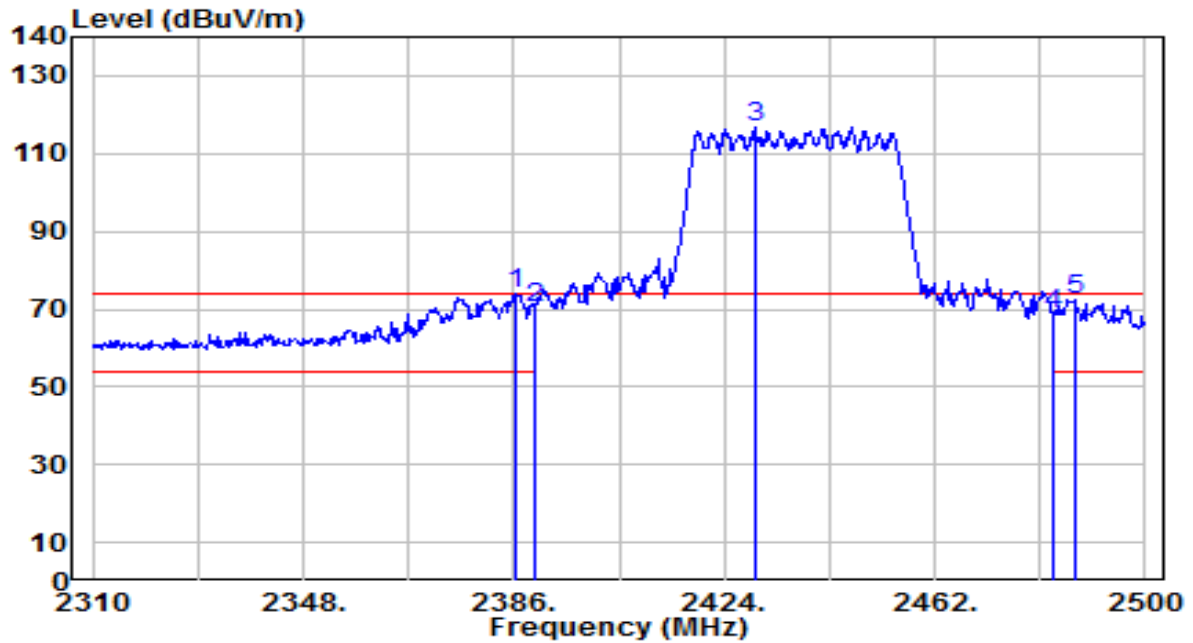


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.570	41.89	31.94	73.82	-0.18	74.00	150	175	Peak
2		2390.000	38.09	31.95	70.04	-3.96	74.00	150	175	Peak
3		2429.510	84.78	32.10	116.88	N/A	N/A	150	175	Peak
4		2483.500	36.32	32.30	68.61	-5.39	74.00	150	175	Peak
5		2487.270	40.09	32.31	72.40	-1.60	74.00	150	175	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

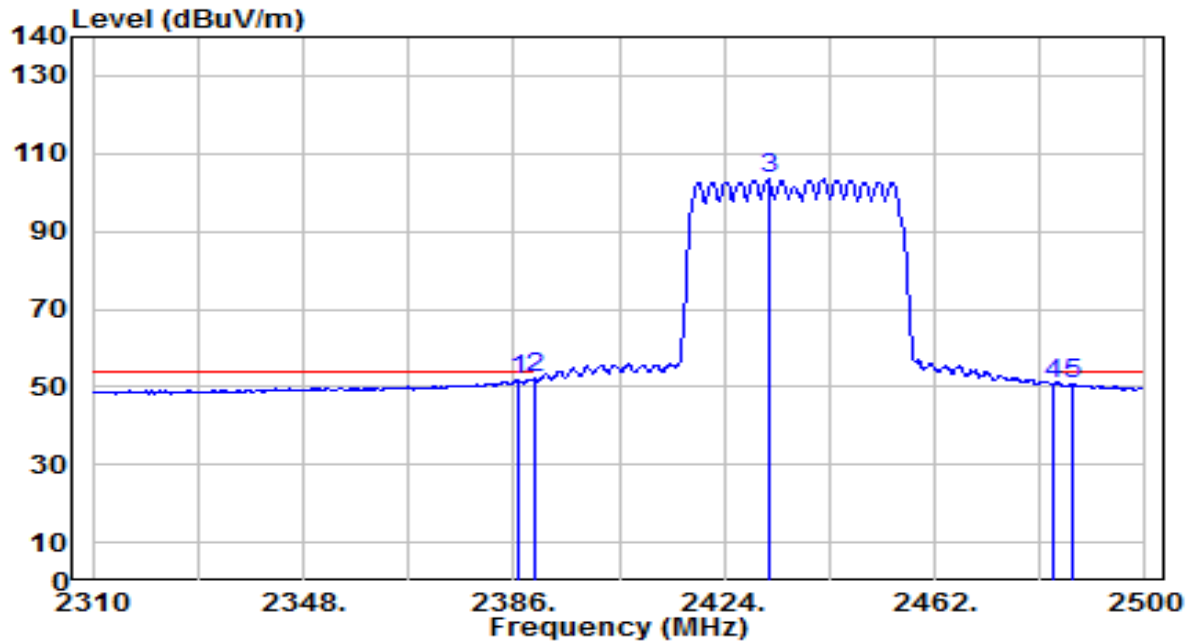


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.760	20.01	31.94	51.95	-2.05	54.00	150	175	Average
2	*	2390.000	20.10	31.95	52.05	-1.95	54.00	150	175	Average
3		2431.980	71.38	32.11	103.49	N/A	N/A	150	175	Average
4		2483.500	18.42	32.30	50.72	-3.28	54.00	150	175	Average
5		2486.890	18.45	32.31	50.76	-3.24	54.00	150	175	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

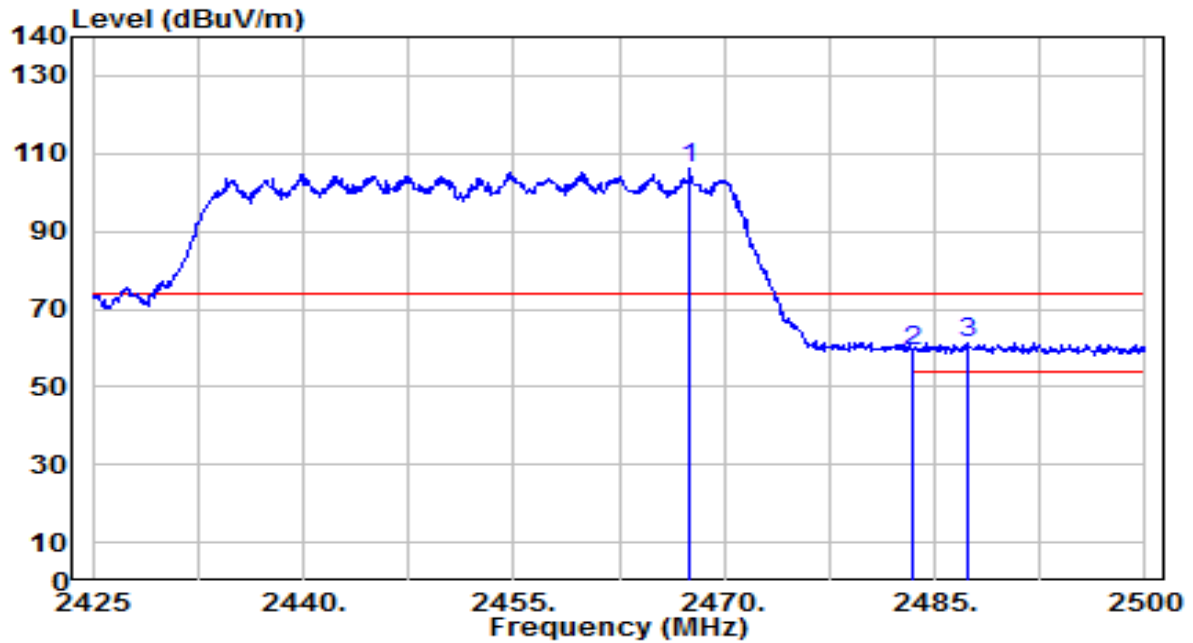


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2467.600	73.76	32.24	106.00	N/A	N/A	145	180	Peak
2	2483.500	26.77	32.30	59.07	-14.93	74.00	145	180	Peak
3	* 2487.400	29.20	32.31	61.51	-12.49	74.00	145	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

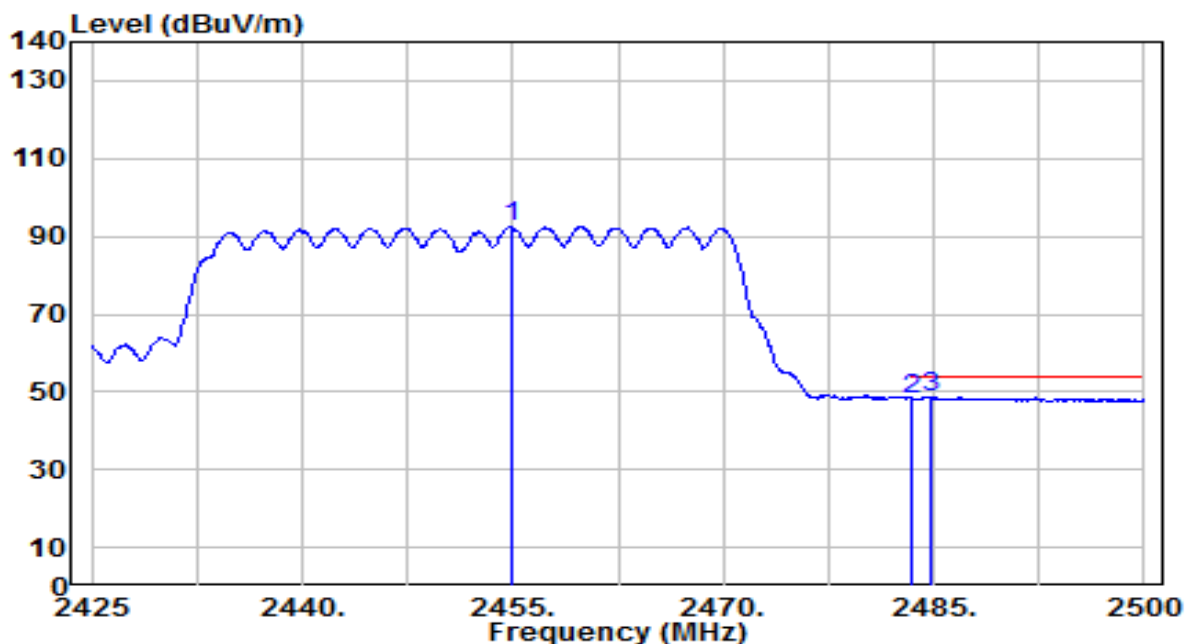


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.850	60.40	32.19	92.59	N/A	N/A	145	180	Average
2	2483.500	15.92	32.30	48.22	-5.78	54.00	145	180	Average
3	* 2484.850	16.35	32.30	48.65	-5.35	54.00	145	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

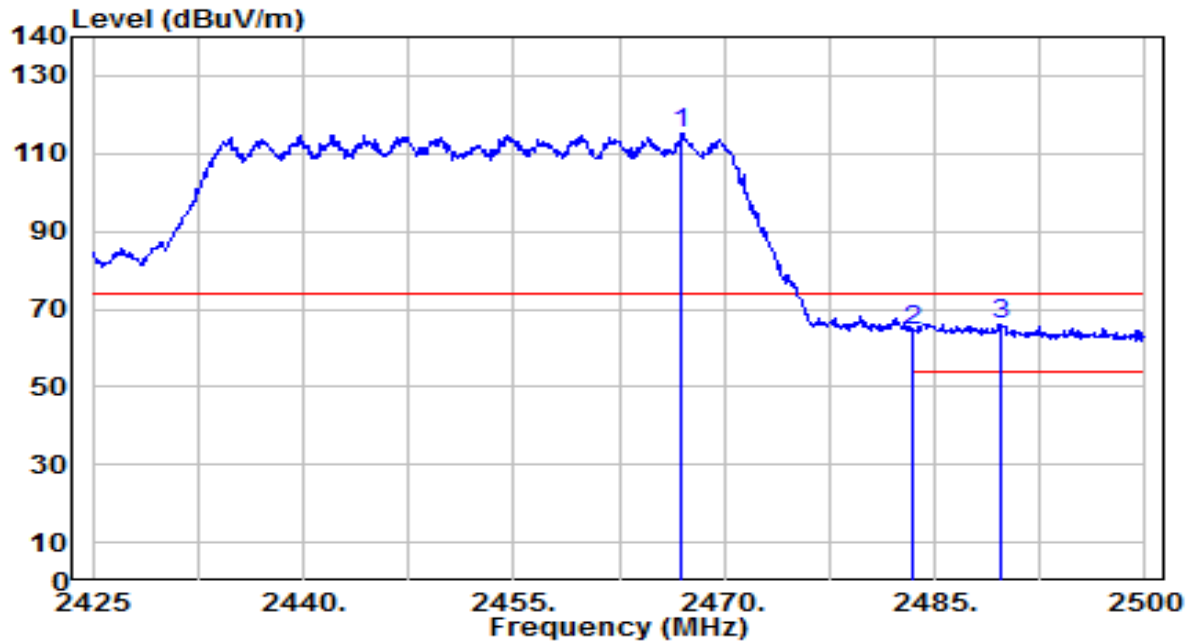


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2467.000	82.89	32.24	115.13	N/A	N/A	125	10	Peak
2	2483.500	32.07	32.30	64.36	-9.64	74.00	125	10	Peak
3	* 2489.725	33.93	32.32	66.26	-7.74	74.00	125	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-01-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /49%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

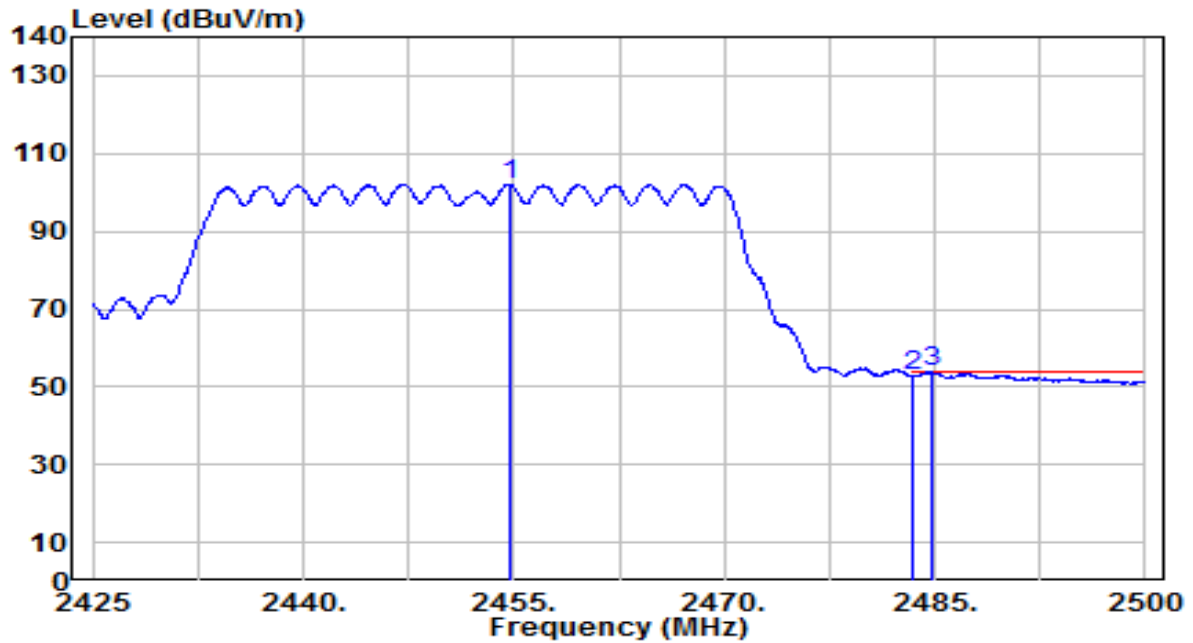

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.775	69.96	32.19	102.15	N/A	N/A	125	10	Average
2	2483.500	20.39	32.30	52.69	-1.31	54.00	125	10	Average
3	* 2484.775	21.51	32.30	53.82	-0.18	54.00	125	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

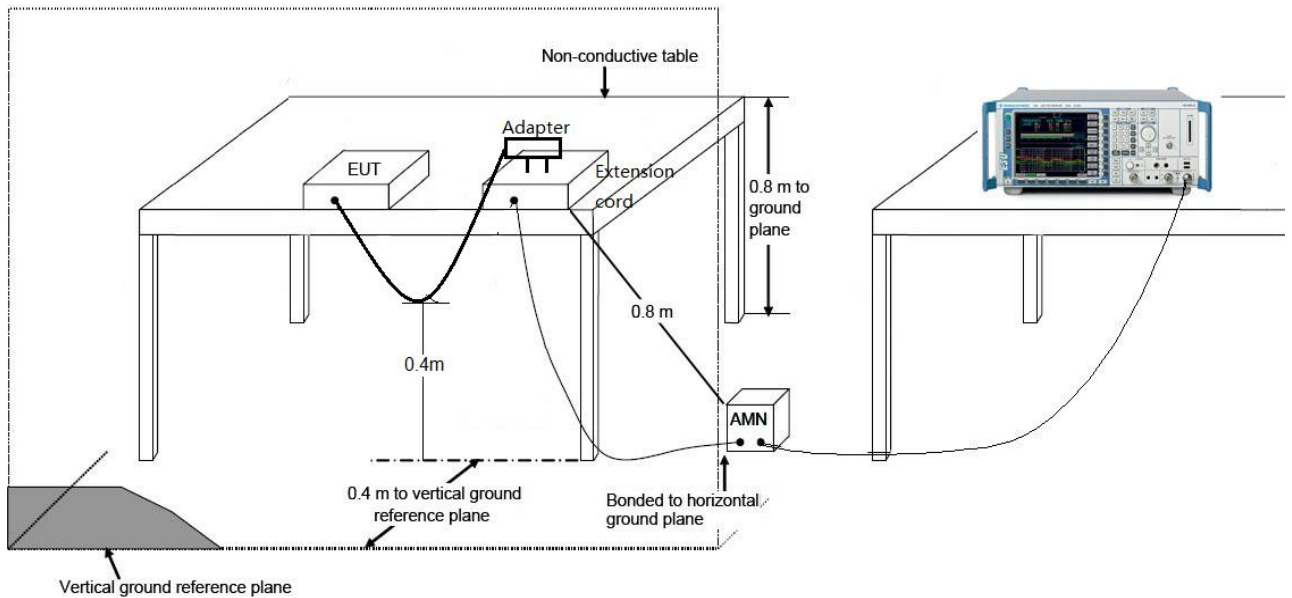

7.8.3.Test Result

EUT	BE6500 Dual-Band Wi-Fi Gaming Router	Date of Test	2025-01-23
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	21.5°C /60%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1	Test Voltage	AC 120V/60Hz

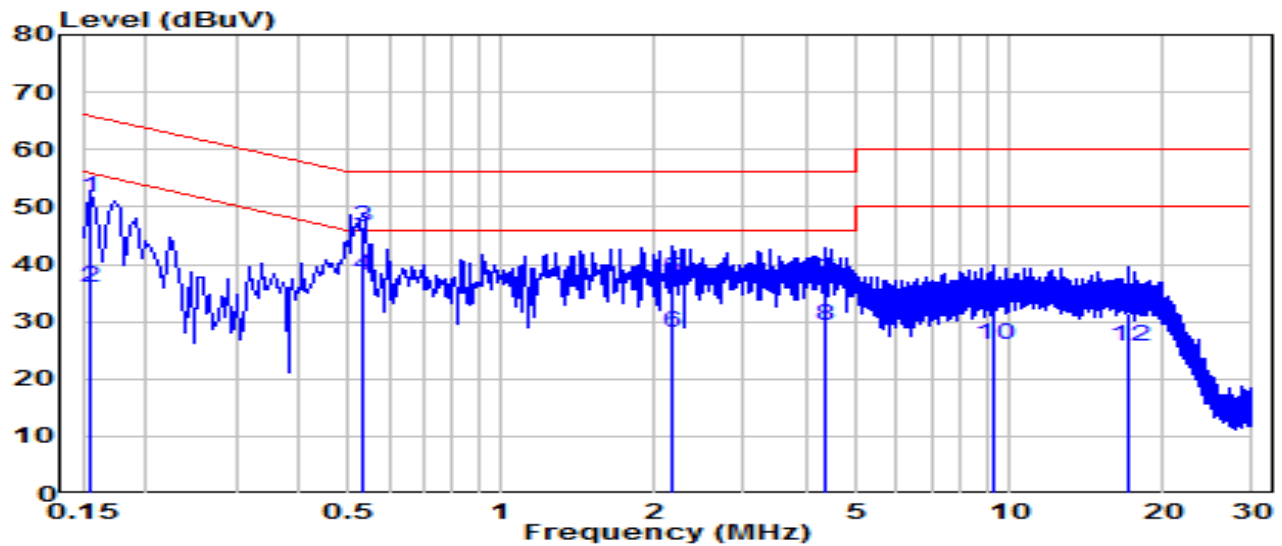


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.154	42.04	9.63	51.67	-14.09	65.75	QP
2	0.154	26.15	9.63	35.78	-19.98	55.75	Average
3	* 0.532	36.86	9.65	46.51	-9.49	56.00	QP
4	* 0.532	28.47	9.65	38.13	-7.87	46.00	Average
5	2.175	27.65	9.70	37.36	-18.64	56.00	QP
6	2.175	18.52	9.70	28.22	-17.78	46.00	Average
7	4.353	27.32	9.74	37.05	-18.95	56.00	QP
8	4.353	19.42	9.74	29.15	-16.85	46.00	Average
9	9.271	22.94	9.85	32.79	-27.21	60.00	QP
10	9.271	16.01	9.85	25.86	-24.14	50.00	Average
11	17.068	21.45	9.92	31.37	-28.63	60.00	QP
12	17.068	15.86	9.92	25.77	-24.23	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE6500 Dual-Band Wi-Fi Gaming Router	Date of Test	2025-01-23
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	21.5°C /60%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1	Test Voltage	AC 120V/60Hz

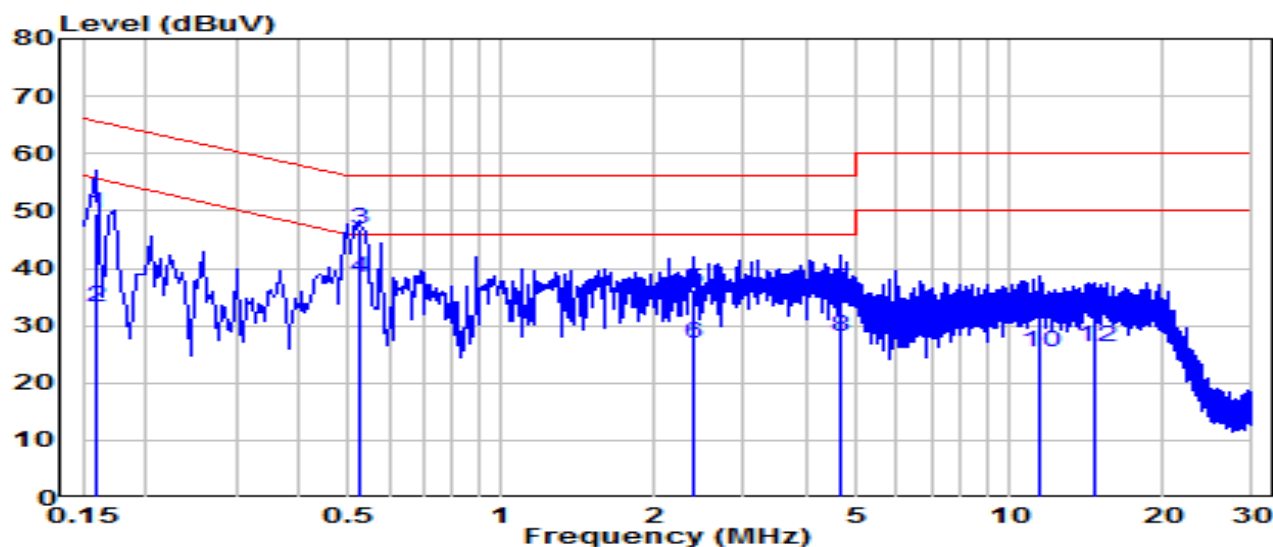

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.159	40.03	9.63	49.66	-15.86	65.52	QP
2	0.159	23.54	9.63	33.17	-22.35	55.52	Average
3	* 0.523	37.27	9.65	46.93	-9.07	56.00	QP
4	* 0.523	28.68	9.65	38.33	-7.67	46.00	Average
5	2.391	26.60	9.72	36.32	-19.68	56.00	QP
6	2.391	17.30	9.72	27.02	-18.98	46.00	Average
7	4.627	26.37	9.75	36.12	-19.88	56.00	QP
8	4.627	18.19	9.75	27.94	-18.06	46.00	Average
9	11.502	21.77	9.91	31.67	-28.33	60.00	QP
10	11.502	15.34	9.91	25.25	-24.75	50.00	Average
11	14.657	22.20	9.94	32.13	-27.87	60.00	QP
12	14.657	16.26	9.94	26.20	-23.80	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2501TW0109-UT” file.

Appendix B : External Photograph

Refer to “2501TW0109-UE” file.

Appendix C : Internal Photograph

Refer to “2501TW0109-UI” file.

_____ The End _____