

MPE REPORT

Product Name: Turbox-T95

Trade Mark: TURBOW TM

Report No.: 200801051RFC-1

Model No.: T95G-NA

Report Number: 200801051RFC-1

Test Standards: FCC 47 CFR Part 1 Subpart I

FCC ID: 2AOHHT95GNA

Test Result: PASS

Date of Issue: August 23, 2021

Prepared for:

Thundercomm Technology Co., Ltd.
Building 4, No. 99, Data Valley Middle Road Xiantao District, Yubei
District, Chongqing

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

TEL: +86-755-2823 0888 FAX: +86-755-2823 0886

Prepared by:	Gavin Xu	Reviewed by:	XIM W	
	Gavin Xu		Henry Lu	
	Project Engineer		Team Leader	
	h			
Approved by:		Date:	August 23, 2021	

Kevin Liang Assistant Manager



Version

Version No. Date		Description		
V1.0	August 23, 2021	Original		





CONTENTS

1.	Test Laboratory	4
2.	Client Information	5
2.1.	Client InformationApplicant Information	5
2.2.	Manufacturer Information	Ę
3.	Equipment Under Test (EUT) and Ancillary Equipment (AE)	6
3.1.	About EUT	
•		
4.	Power Output Test Results	
4.1.		7
4.2.	Duty cycle	7
5.	Reference Documents for FCC	
5.1.	Applicable Standards	3
5.2.		8
5.3.		
5.4.	Max. Antenna gain calculations	
5.5.	Conclusion for maximum admissible antenna gain (FCC)	




1. Test Laboratory

Company Name:	Shenzhen UnionTrust Quality and Technology Co., Ltd.		
Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng scientechnology park, Longhua district, Shenzhen, China 518109			
Postal Code:	518109		
Telephone:	+86 (0) 755 2823 0888		
Fax:	+86 (0) 755 2823 0886		

Report No.: 200801051RFC-1







2. Client Information

2.1. Applicant Information

Company Name: Thundercomm Technology Co., Ltd.

Address /Post: Building 4, No. 99, Data Valley Middle Road Xiantao District, Yubei

District, Chongqing

Telephone: /
Postcode: /

2.2. Manufacturer Information

Company Name: Thundercomm Technology Co., Ltd.

Address /Post: Building 4, No. 99, Data Valley Middle Road Xiantao District, Yubei

District, Chongqing


Telephone: /
Postcode: /



3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

EUT Description	Turbox-T95
Model name	T95G-NA
LTE Frequency Band	LTE Band 2/ Band 4/ Band 12
Antenna Type	External Antenna
FCC ID:	2AOHHT95GNA
Sample Received Date:	August 4, 2020

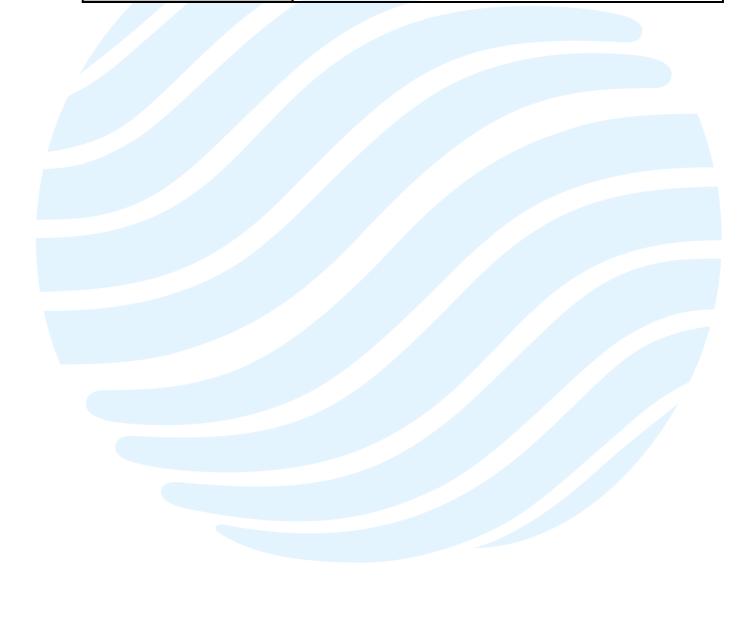



4. Power Output Test Results

4.1. RF Power Output

Frequency Band	Highest Power Output(dBm)		
LTE Band 2	26		
LTE Band 4	26		
LTE Band 12	26		

Report No.: 200801051RFC-1

4.2. Duty cycle

Mode	Duty Cycle	
LTE	1:1	



5. Reference Documents for FCC

5.1. Applicable Standards

The MPE report was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part 2.1091.

FCC CFR 47, Part 2, FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS, Oct 1, 2011

Section 2.1091 Radiofrequency radiation exposure evaluation.

5.2. Test Limits

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2m normally can be maintained between the user and the device.

Limits for Occupational / Controlled Exposure

Frequency	Electric	Field	Magnetic Fiel	ld	Power Density	Averaging
Range	Strength	(E)	Strength	(H)	(S)	Times E 2, H 2
[MHz]	[V/m]		[A/m]		[mW/cm2]	or S [miniutes]
0.3 - 3.0	614		1.63		(100)*	6
3.0 – 30	1824/f		4.89/f		(900/f)*	6
30 – 300	61.4		0.163		1.0	6
300 – 1500					F/300	6
1500 - 100000					5	6

Limits for General Population / Uncontrolled Exposure

Frequency	Electric	Field	Magnetic Field	Power Density	Averaging
Range	Strength	(E)	Strength (H)	(S)	Times E 2, H 2
[MHz]	[V/m]		[A/m]	[mW/cm2]	or S [miniutes]
0.3 – 1.34	614		1.63	(100)*	30
1.34 – 30	824/f		2.19/f	(180/f)*	30
30 – 300	27.5		0.073	0.2	30
300 – 1500				F/1500	30
1500 - 100000			-	1.0	30

Note: f=frequency in MHz; *Plane-wave equivalent power density

For the DUT, the limits for General Population / Uncontrolled Exposure are applicable.



	<u> </u>
	Cellular Radiotelephone Service (subpart H of part 22)
FCC: §1.1307	Non-building-mounted antennas: height above ground level to lowest point of antenna < 10 m and total
	power of all channels > 1000 W ERP (1640 W EIRP)
	Personal Communications Services (part 24)
FCC §1.1307	Broadband PCS (subpart E): non-building-mounted antennas: height above ground level to lowest point of
	antenna < 10 m and total power of all channels > 2000 W ERP (3280 W EIRP)
	LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)
	Table 1(B) Limits for General Population/Uncontrolled Exposure 300–1500 MHz: f/1500 mW/cm²
FCC §1.1310	1500–100,000 MHz: 1.0 mW/cm ²
	Subject to routine evaluation is required when the device operate at frequencies of 1.5 GHz or below and
	their
	office the modified discussion (EDD) is 4.5 weeks as specific to the control of free control of the control of
FCC §2.1091	effective radiated power (ERP) is 1.5 watts or more, or if they operate at frequencies above 1.5 GHz and
1 00 32.1001	their ERP is3 watts or more.(a) Base stations are limited to 1640 watts peak equivalent isotropically
	radiated power (e.i.r.p.) with an antenna
FCC §24.232	height up to 300 meters HAAT.
1 00 924.232	b) Mobile/portable stations are limited to 2 watts e.i.r.p. peak power,
FCC §27.50	(10) Portable stations (hand-held devices) are limited to 3 watts ERP; and
(C)(10)	(10) Fullable stations (name-neid devices) are limited to 3 watts ERF, and
	(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band are limited to 1
FCC §27.50(d)	watt EIRP.

5.3. Calculation Information

For conservative evaluation consideration, only maximum power of each frequency band based on the tighter limits respectively are used to calculate the boundary power density.

Based on the FCC KDB 447498 D01 and 47 CFR §2.1091, the DUT is evaluated as a mobile device.

Given
$$S = \frac{P \times G}{4\Pi d^2}$$
 Equation 1

Where

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power density in milliwatts / square centimeter



5.4. Max. Antenna gain calculations

Maximum antenna gain considerations for fixed/mobile operations for complying with limits:

Band	Highest Frame- Averaged Output Power (dBm)	Limit (mW/cm²)	Max antenna gain at 20cm (dBi)
LTE Band 2	26	1	11.01
LTE Band 4	26	1	11.01
LTE Band 12	26	0.466	7.70

Power limit according to §24.232(c), §27.50(d)(4), §27.50(c)(10):

Band	Highest Frame- Averaged Output Power (dBm)	Limit (W) (ERP/EIRP)	Max antenna gain at 20cm(dBi)
LTE Band 2	26	2	7.01
LTE Band 4	26	1	4.00
LTE Band 12	26	3	8.77



5.5. Conclusion for maximum admissible antenna gain (FCC)

Band	Maximum admissible antenna gain (dBi)
LTE Band 2	7.01
LTE Band 4	4.00
LTE Band 12	7.70





*** End of Report ***

Report No.: 200801051RFC-1

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.