

FCC - TEST REPORTReport Number : **709502279701-01A** Date of Issue: May 18, 2023Model : **Cra 3W**Product Type : **Cradle**FCC ID : **2AMG4-CRA3W**Applicant : **SHINING 3D Tech Co., Ltd.**Address : **No.1398, Xiangbin Road, Wenyan, Xiaoshan, Hangzhou,
Zhejiang, China**Manufacturer : **SHINING 3D Tech Co., Ltd.**Address : **No.1398, Xiangbin Road, Wenyan, Xiaoshan, Hangzhou,
Zhejiang, China**Test Result : ☒ **Positive** ☐ **Negative**Total pages including
Appendices : **387**

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.

1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory	3
3	Description of the Equipment under Test	4
4	Summary of Test Standards	6
5	Summary of Test Results	7
6	General Remarks	8
7	Test Setups	10
8	Systems test configuration	13
9	Technical Requirement	15
9.1	Conducted Emission	15
9.2	Emission bandwidth	18
9.3	Maximum conducted output power	20
9.4	Maximum power spectral density	23
9.5	Frequencies Stability	25
9.6	Unwanted emissions	26
10	Test Equipment List	34
11	System Measurement Uncertainty	35
12	Photographs of Test Set-ups	36
13	Photographs of EUT	37



2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1 TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai
Branch
No.16 Lane, 1951 Du Hui Road,
Shanghai 201108,
P.R. China

Telephone: +86 21 6141 0123

Fax: +86 21 6140 8600

FCC Registration No.: 820234

FCC Designation CN1183
Number:

IC Registration No.: 25988

CAB identifier: CN0101

3 Description of the Equipment under Test

Product:	Cradle
Model no.:	Cra 3W
FCC ID:	2AMG4-CRA3W
Options and accessories:	NA
Rating:	100-240V~, 50/60Hz
RF Transmission Frequency:	For 5G Wi-Fi For 802.11a/n/ac/ax: 5180~5240 MHz (U-NII-1) 5260~5320 MHz (U-NII-2A) 5500~5720 MHz (U-NII-2C) 5745~5825 MHz (U-NII-3)
No. of Operated Channel:	5180~5240 MHz (U-NII-1) 5260~5320 MHz (U-NII-2A) 5500~5720 MHz (U-NII-2C) 5745~5825 MHz (U-NII-3)
Modulation:	Orthogonal Frequency Division Multiplexing (OFDM) for 802.11a/n/ac/ax
Hardware Version:	V1.0
Software Version:	3
Data speed:	Wi-Fi: SISO: 11a 6 ~ 54Mbps, 11n HT20 6.5 ~ 72.2Mbps, 11n HT 40 13.5 ~ 150Mbps, 11ac VHT20 6.5 ~ 86.7Mbps, 11ac VHT40 13.5 ~ 200Mbps, 11ac VHT80 29.3 ~ 433.3Mbps 11ax HE20 7.313 ~ 143.382Mbps, 11ac HE40 14.625 ~ 286.765Mbps, 11ac HE80 30.625 ~ 600.490Mbps MIMO: 11a 6 ~ 54Mbps, 11n HT20 13 ~ 144.4Mbps, 11n HT 40 27 ~ 300Mbps, 11ac VHT20 13 ~ 173.3Mbps, 11ac VHT40 27 ~ 400Mbps, 11ac VHT80 58.5 ~ 866.7Mbps 11ax HE20 14.625 ~ 286.765Mbps, 11ac HE40 29.250 ~ 573.529Mbps, 11ac HE80 61.250 ~ 1200.980Mbps
Antenna Type:	FPC
Antenna Gain:	Antenna1: 1.59 dBi, Antenna2: 1.52 dBi



Directional gain: For output power: 1.59 dBi
Max. gain +array gain
Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$
For power spectral density: 4.60 dBi
 $G_{ANT} + \text{Array Gain}$
Array Gain = $10 \log(N_{ANT}/N_{ss})$ dB

Description of the EUT: The Equipment Under Test (EUT) is a Cradle with Wi-Fi Module. The EUT support Wi-Fi operated at 5GHz.

Test sample no.: SHA-724465-1

The sample's mentioned in this report is/are submitted/ supplied/ manufactured by client. The laboratory therefore assumes no responsibility for accuracy of information on the brand name, model number, origin of manufacture, consignment, antenna gain or any information supplied.



4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart E, 2021 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart E - Unlicensed National Information Infrastructure Devices

Test Method:

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

KDB 662911 D01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band

ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices

5 Summary of Test Results

Technical Requirements						
FCC Part 15 Subpart C						
Test Condition		Pages	Test Site	Test Result		
				Pass	Fail	N/A
§15.207	Conducted emission AC power port	15-17	Site 1	☒	☐	☐
§15.407(e)	Emission bandwidth	18-19	Site 1	☒	☐	☐
15.407(a)(i)	Maximum Conducted Output Power	20-22	Site 1	☒	☐	☐
15.407(a)(i)	Maximum Power Spectral Density	23-24	Site 1	☒	☐	☐
§15.407(g)	Frequencies Stability	25	Site 1	☒	☐	☐
§15.407(b)(1), 15.407(b)(2), 15.407(b)(3), 15.407(b)(4), 15.407(b)(5), 15.407(b)(6), 15.407(b)(7), 15.209	Unwanted Emissions	26-33	Site 1	☒	☐	☐
§15.203	Antenna requirement	See note 1		☒	☐	☐

Remark 1: The EUT only operation at 5G Wi-Fi UNII Band (5180MHz-5240MHz, 5260MHz-5320MHz, 5500MHz-5720MHz, 5745MHz-5825MHz). The EUT operate as Master Device.

Note 1: The EUT uses a FPC antenna, which gain is Antenna1: 1.59 dBi, Antenna2: 1.52 dBi. In accordance to §15.203, It is considered sufficiently to comply with the provisions of this section.

15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

6 General Remarks

Remarks

NOTICE: This report is a SUPPLEMENT OF PROJECT 709502279701-00A. So the report is not valid without the report of 709502279701-00A.

According to the client's declaration, the product adds 20M and 40M bandwidth at 5260~5320 MHz and 5500~5720 MHz which achieved through software.

So this report was based on the report 709502279701-00A for adding the following channels.

Test Mode	Channel (MHz)		
802.11a 802.11n HT20 802.11ac VHT20 802.11ax HE20	5G WIFI-Band 2		
	CH52 (5260MHz)	CH56 (5280MHz)	CH64 (5320MHz)
	5G WIFI-Band 3		
	CH100 (5500MHz)	CH116 (5580MHz)	CH140 (5700MHz)
	CH144 (5720MHz)		

Test Mode	Channel (MHz)		
802.11n HT40 802.11ac VHT40 802.11ax HE40	5G WIFI-Band 2		
	CH54 (5270MHz)	CH62 (5310MHz)	
	5G WIFI-Band 3		
	CH102 (5510MHz)	CH110 (5550MHz)	CH134 (5670MHz)
	CH142 (5710MHz)		

So in this test report we chose the above channels to perform all the tests except for Conducted emission AC power port and Unwanted Emissions (30M-1GHz).

This submittal(s) (test report) is intended for FCC ID: 2AMG4-CRA3W complies with Section 15.207, 15.209, 15.407 of the FCC Part 15, Subpart E Rules.

This report is only for 5GHz Wi-Fi. The TX and RX range is 5180MHz-5240MHz, 5260MHz-5320MHz, 5500MHz-5720MHz, 5745MHz-5825MHz.

SUMMARY:

All tests according to the regulations cited on page 6 were

■ - Performed

□ - Not Performed

The Equipment under Test



China

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: November 1, 2022

Testing Start Date: November 1, 2022

Testing End Date: May 17, 2023

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch

Reviewed by:

Prepared by:

Tested by:

A handwritten signature in blue ink, appearing to read 'Hui Tong', with a stylized flourish at the end.

Hui TONG
Review Engineer


A handwritten signature in blue ink, appearing to read 'Cheng Huali', with a stylized flourish at the end.

Wenqiang LU
Project Engineer

Huali CHENG
Test Engineer


7 Test Setups

7.1 AC Power Line Conducted Emission test setups

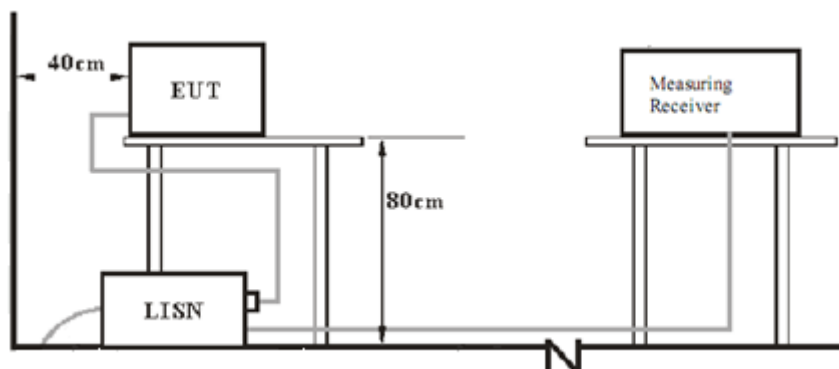


7.2 Radiated test setups


9kHz ~ 30MHz Test Setup:

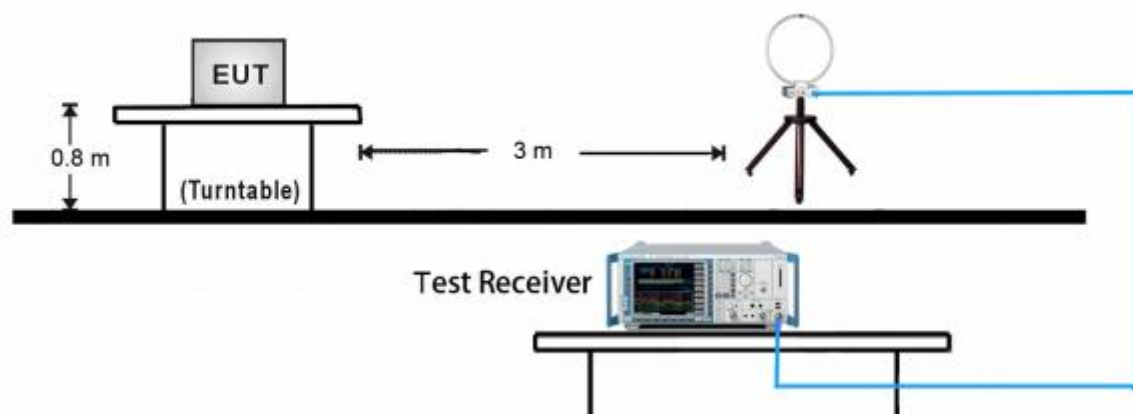

30MHz ~ 1GHz Test Setup:

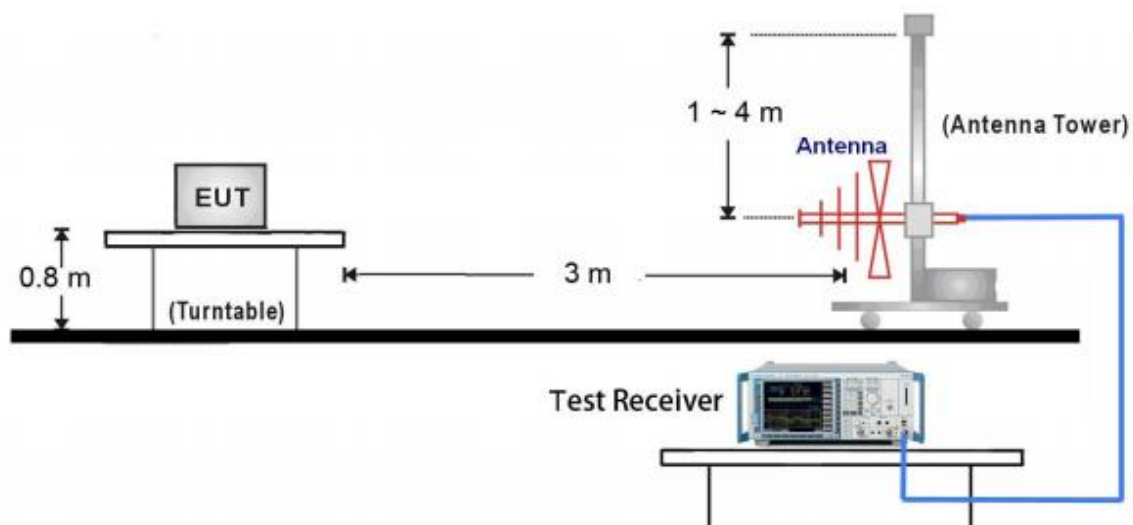


1GHz ~ 18GHz Test Setup:

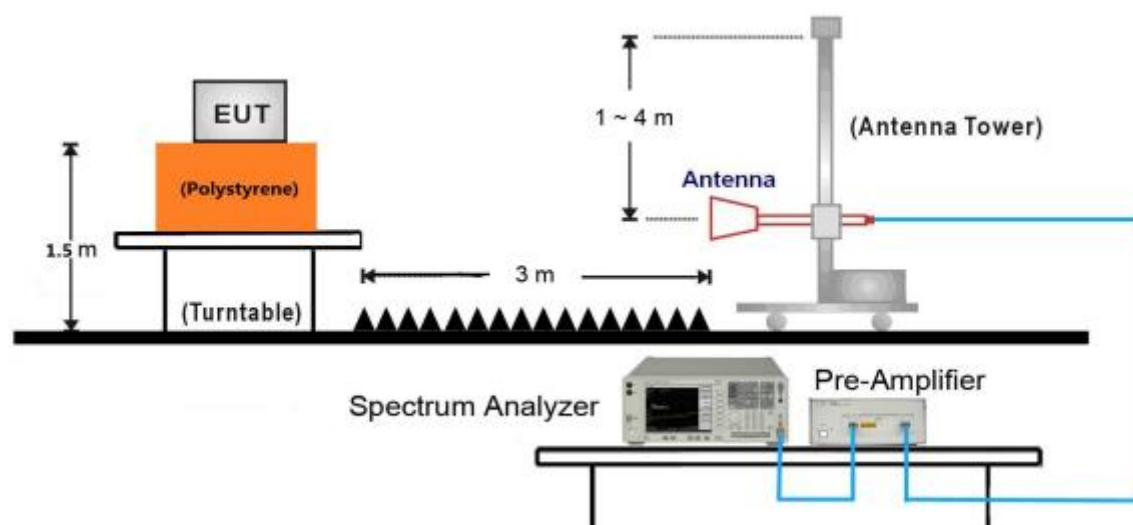




China

18GHz ~ 40GHz Test Setup:

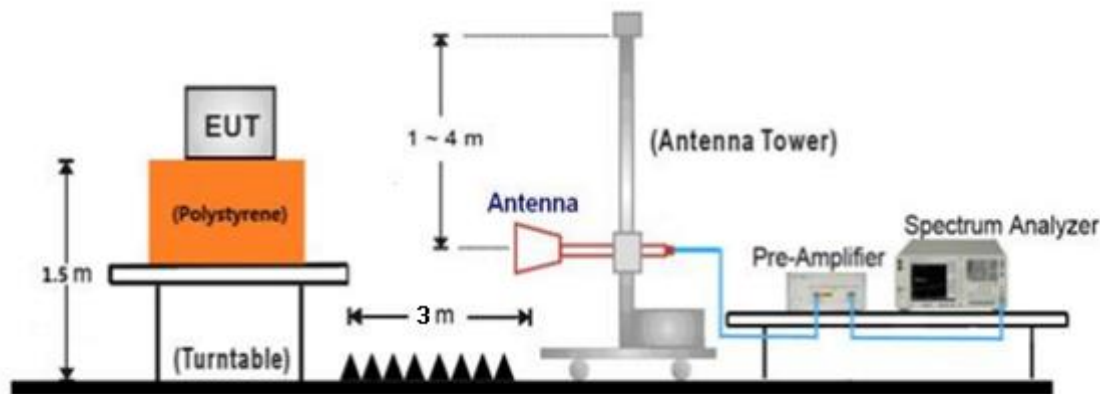

7.3 Conducted RF test setups



8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	S/N(LENGTH)
Notebook	MSI	Crossnair 15 R6E B12UEZ	--

Test software: QATool_Dbg.exe, which used to control the EUT in continues transmitting mode.
The system was configured to channel:

Test Mode	Channel (MHz)		
802.11a 802.11n HT20 802.11ac VHT20 802.11ax HE20	5G WIFI-Band 1		
	CH36 (5180MHz)	CH40 (5200MHz)	CH48 (5240MHz)
	5G WIFI-Band 2		
	CH52 (5260MHz)	CH56 (5280MHz)	CH64 (5320MHz)
	5G WIFI-Band 3		
	CH100 (5500MHz)	CH116 (5580MHz)	CH140 (5700MHz)
	CH144 (5720MHz)		
	5G WIFI-Band 4		
CH149 (5745MHz),	CH157 (5785MHz)	CH165 (5825MHz)	

Test Mode	Channel (MHz)		
802.11n HT40 802.11ac VHT40 802.11ax HE40	5G WIFI-Band 1		
	CH38 (5190MHz)	CH46 (5230MHz)	
	5G WIFI-Band 2		
	CH54 (5270MHz)	CH62 (5310MHz)	
	5G WIFI-Band 3		
	CH102 (5510MHz)	CH110 (5550MHz)	CH134 (5670MHz)
	CH142 (5710MHz)		
	5G WIFI-Band 4		
	CH151 (5755MHz)	CH159 (5795MHz)	

Test Mode	Channel (MHz)		
802.11ac VHT80 802.11ax HE80	5G WIFI-Band 1		
	CH42 (5210MHz)		
	5G WIFI-Band 2		
	CH58 (5290MHz)		
	5G WIFI-Band 3		
	CH106 (5530MHz)	CH123 (5610MHz)	CH138 (5690MHz)
	5G WIFI-Band 4		
	CH155 (5775MHz)		

The pre-test has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

	Modulation Type	Data Rate
SISO	802.11a OFDM	6Mbps
	802.11n (HT20): OFDM	MCS0 (6.5Mbps)
	802.11n (HT40): OFDM	MCS0 (13.5Mbps)
	802.11ac (VHT20): OFDM	11ac 6.5Mbps
	802.11ac (VHT40): OFDM	11ac 13.5Mbps
	802.11ac (VHT80): OFDM	11ac 29.3Mbps
	802.11ax (HE20): OFDM	11ax 7.313Mbps
	802.11ax (HE40): OFDM	11ax 14.625Mbps
	802.11ax (HE80): OFDM	11ax 30.625Mbps
	Modulation Type	Data Rate
MIMO	802.11a OFDM	6Mbps
	802.11n (HT20): OFDM	MCS0 (13Mbps)
	802.11n (HT40): OFDM	MCS0 (27Mbps)
	802.11ac (VHT20): OFDM	11ac 13Mbps
	802.11ac (VHT40): OFDM	11ac 27Mbps
	802.11ac (VHT80): OFDM	11ac 58.5Mbps
	802.11ax (HE20): OFDM	11ax 14.625Mbps
	802.11ax (HE40): OFDM	11ax 29.250Mbps
	802.11ax (HE80): OFDM	11ax 61.250Mbps

9 Technical Requirement

9.1 Conducted Emission

Test Method

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through an Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line


Limit

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

Decreasing linearly with logarithm of the frequency

Conducted Emission


Product Type : Cradle
 M/N : Cra 3W
 Operating Condition : Mode 1: Tx_802.11 a, 5320MHz MIMO
 Test Specification : L-Line
 Comment : AC 120V/60Hz for adaptor

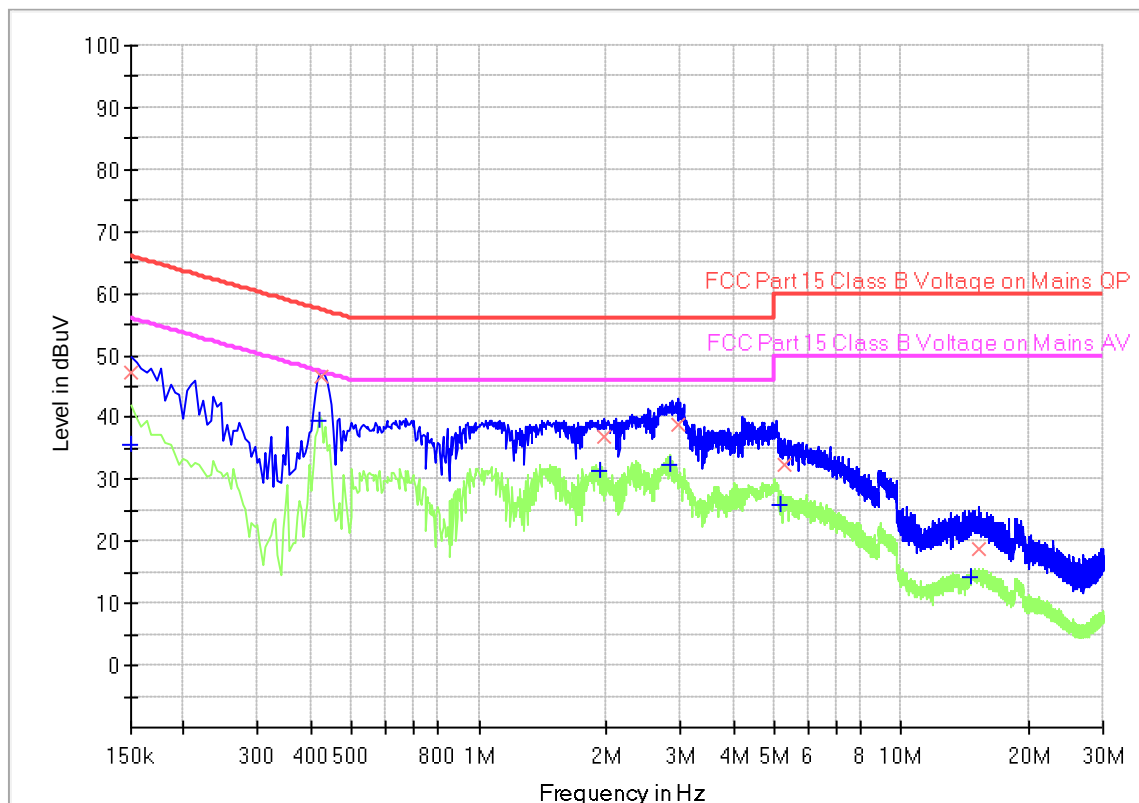

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150000	---	35.73	56.00	20.27	1000.0	9.000	L1	19.6
0.150000	47.31	---	66.00	18.69	1000.0	9.000	L1	19.6
0.420000	---	39.56	47.45	7.89	1000.0	9.000	L1	19.6
0.424500	46.46	---	57.36	10.90	1000.0	9.000	L1	19.6
1.941000	---	31.35	46.00	14.65	1000.0	9.000	L1	19.6
1.986000	36.86	---	56.00	19.14	1000.0	9.000	L1	19.6
2.832000	---	32.41	46.00	13.59	1000.0	9.000	L1	19.6
2.962500	38.76	---	56.00	17.24	1000.0	9.000	L1	19.6
5.185500	---	26.00	50.00	24.00	1000.0	9.000	L1	19.6
5.307000	32.49	---	60.00	27.51	1000.0	9.000	L1	19.6
14.563500	---	14.30	50.00	35.70	1000.0	9.000	L1	19.8
15.198000	18.86	---	60.00	41.14	1000.0	9.000	L1	19.8

Product Type : Cradle
 M/N : Cra 3W
 Operating Condition : Mode 1: Tx_802.11 a, 5320MHz MIMO
 Test Specification : N-Line
 Comment : AC 120V/60Hz for adaptor

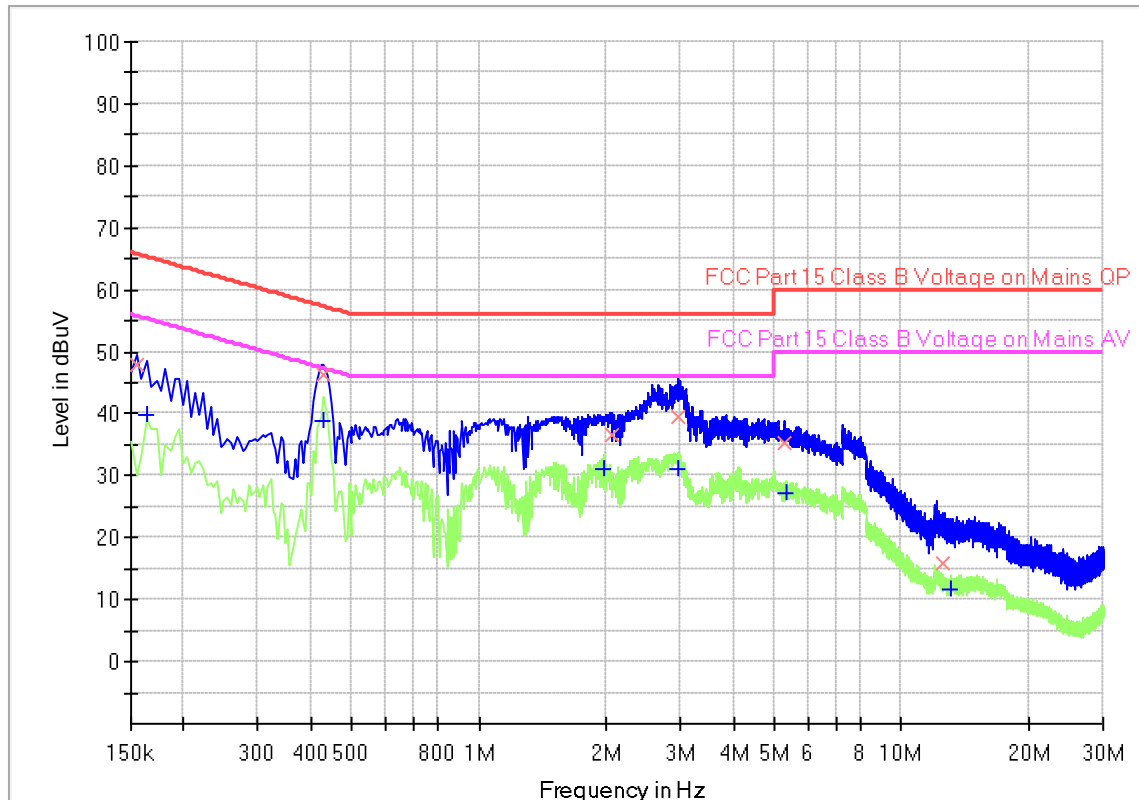

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.154500	47.81	---	65.75	17.94	1000.0	9.000	N	19.6
0.163500	---	39.76	55.28	15.52	1000.0	9.000	N	19.6
0.429000	---	38.99	47.27	8.28	1000.0	9.000	N	19.6
0.429000	46.21	---	57.27	11.06	1000.0	9.000	N	19.6
1.972500	---	30.95	46.00	15.05	1000.0	9.000	N	19.6
2.058000	36.68	---	56.00	19.32	1000.0	9.000	N	19.6
2.949000	39.63	---	56.00	16.37	1000.0	9.000	N	19.6
2.949000	---	31.01	46.00	14.99	1000.0	9.000	N	19.6
5.302500	35.37	---	60.00	24.63	1000.0	9.000	N	19.7
5.320500	---	27.28	50.00	22.72	1000.0	9.000	N	19.7
12.498000	16.02	---	60.00	43.98	1000.0	9.000	N	19.9
13.033500	---	11.69	50.00	38.31	1000.0	9.000	N	19.9

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB) + 10dB Attenuator

9.2 Emission bandwidth

1、 Test Method of 26dB Bandwidth

According to KDB789033 D02

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Limit: No limit

2、 Test Method of 6dB Bandwidth

According to KDB789033 D02

- a) Set RBW = 100KHz
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Limit: $\geq 500\text{KHz}$

3、 Test Method of 99% Bandwidth

According to KDB789033 D02

- a) Set center frequency to the nominal EUT channel center frequency
- b) Set span = 1.5 times to 5.0 times the OBW.
- c) Set RBW = 1 % to 5 % of the OBW
- d) Set VBW $\geq 3 \cdot$ RBW
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99 % power bandwidth function of the instrument (if available).
- g) If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

Limit: No limit



26dB Bandwidth Test Result:

Test data should be referred to Appendix A for 709502279701-01A.

99% Bandwidth Test Result

Test data should be referred to Appendix A for 709502279701-01A.

9.3 Maximum conducted output power

Test Method

According to C63.10, the EUT was placed on 0.8m height table, the RF output of EUT was connected to the test power meter by RF cable. The path loss was compensated to the results for each measurement.

(1) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:

The EUT is configured to transmit continuously or to transmit with a constant duty cycle.

At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.

The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

(2) If the transmitter does not transmit continuously, measure the duty cycle, x , of the transmitter output signal as described in II.B.

(3) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

(4) Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25%).

Limits:

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz.

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

Maximum conducted output power Test Result:

IEEE 802.11a modulation Test Result

Band	Channel	Frequency (MHz)	Max Conducted Power (dBm)			Max Conducted Power Limit(dBm)
			Ant1	Ant2	Sum	
5.2G Band	Low	5260	14.31	14.49	17.41	24
	Middle	5300	14.95	14.37	17.68	24
	High	5320	15.25	14.67	17.98	24
5.5G Band	Low	5500	13.90	12.66	16.33	24
	Middle	5600	14.31	14.37	17.35	24
	High	5700	14.87	13.46	17.23	24
	High	5720	14.35	14.16	17.27	24

IEEE 802.11n HT20_MIMO modulation Test Result

Band	Channel	Frequency (MHz)	Max Conducted Power (dBm)			Max Conducted Power Limit(dBm)
			Ant1	Ant2	Sum	
5.2G Band	Low	5260	13.67	14.7	17.23	24
	Middle	5300	14.62	14.91	17.78	24
	High	5320	14.28	14.16	17.23	24
5.5G Band	Low	5500	12.95	12.90	15.94	24
	Middle	5600	13.37	13.17	16.28	24
	High	5700	14.43	13.90	17.18	24
	High	5720	14.52	13.63	17.11	24

IEEE 802.11n HT40_MIMO modulation Test Result

Band	Channel	Frequency (MHz)	Max Conducted Power (dBm)			Max Conducted Power Limit(dBm)
			Ant1	Ant2	Sum	
5.2G Band	Low	5270	13.51	14.01	16.78	24
	High	5310	14.49	14.31	17.41	24
5.5G Band	Low	5510	12.50	11.63	17.11	24
	Middle	5590	13.80	12.87	16.37	24
	High	5670	14.79	13.58	17.24	24
	High	5710	14.16	13.90	17.04	24

IEEE 802.11ac-VHT20 MIMO modulation Test Result

Band	Channel	Frequency (MHz)	Max Conducted Power (dBm)			Max Conducted Power Limit(dBm)
			Ant1	Ant2	Sum	
5.2G Band	Low	5260	13.82	13.32	16.59	24
	Middle	5300	14.90	14.73	17.83	24
	High	5320	14.68	14.85	17.78	24
5.5G Band	Low	5500	12.50	11.97	15.25	24
	Middle	5600	13.63	13.27	16.46	24
	High	5700	14.73	13.59	17.21	24
	High	5720	14.30	13.56	16.96	24

IEEE 802.11ac-VHT40 MIMO modulation Test Result

Band	Channel	Frequency (MHz)	Max Conducted Power (dBm)			Max Conducted Power Limit(dBm)
			Ant1	Ant2	Sum	
5.2G Band	Low	5270	13.36	13.73	16.56	24
	High	5310	14.27	14.09	17.19	24
5.5G Band	Low	5510	12.63	11.30	15.03	24
	Middle	5590	12.56	12.78	15.68	24
	High	5670	14.35	13.47	16.94	24
	High	5710	13.83	13.57	16.71	24

IEEE 802.11ax-HE20 MIMO modulation Test Result

Band	Channel	Frequency (MHz)	Max Conducted Power (dBm)			Max Conducted Power Limit(dBm)
			Ant1	Ant2	Sum	
5.2G Band	Low	5260	13.48	14.42	16.99	24
	Middle	5300	14.37	14.28	17.34	24
	High	5320	14.92	14.80	17.87	24
5.5G Band	Low	5500	12.70	11.60	15.20	24
	Middle	5600	14.07	13.65	16.88	24
	High	5700	15.01	13.52	17.34	24
	High	5720	14.58	13.38	17.03	24

IEEE 802.11ax-HE40 MIMO modulation Test Result

Band	Channel	Frequency (MHz)	Max Conducted Power (dBm)			Max Conducted Power Limit(dBm)
			Ant1	Ant2	Sum	
5.2G Band	Low	5270	13.46	13.85	16.67	24
	High	5310	14.49	13.93	17.23	24
5.5G Band	Low	5510	12.51	11.41	15.01	24
	Middle	5590	12.73	12.88	15.82	24
	High	5670	14.38	13.47	16.96	24
	High	5710	14.20	13.53	16.89	24

9.4 Maximum power spectral density

Test Method

According to C63.10, the EUT was placed on 0.8m height table, the RF output of EUT was connected to the test power meter by RF cable. The path loss was compensated to the results for each measurement.

1. Create an average power spectrum for the EUT operating mode being tested by following the instructions in II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...." (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
2. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
3. Make the following adjustments to the peak value of the spectrum, if applicable:
 - a) If Method SA-2 or SA-2 Alternative was used, add $10 \log (1/x)$, where x is the duty cycle, to the peak of the spectrum.
 - b) If Method SA-3 Alternative was used and the linear mode was used in II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
4. The result is the Maximum PSD over 1 MHz reference bandwidth.
5. For devices operating in the bands 5.15–5.25 GHz, 5.25–5.35 GHz, and 5.47–5.725 GHz, the preceding procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in Section 15.407(a)(5). For devices operating in the band 5.725–5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:
 - a) Set $RBW \geq 1/T$, where T is defined in II.B.I.a).
 - b) Set $VBW \geq 3 RBW$.
 - c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500 \text{ kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
 - d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
 - e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the II.F.5.c) and II.F.5.d), since $RBW=100 \text{ kHz}$ is available on nearly all spectrum analyzers.



Limit: The maximum power spectral density shall not exceed 11dBm for the 5.15-5.25GHz, 5.25-5.35GHz, 5.47-5.725 GHz Band in any 1 megahertz band.
For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30dBm in any 1 500kHz band.

Test Result:

Test data should be referred to Appendix A for 709502279701-01A.

9.5 Frequencies Stability

Test Method

1. Connect the UUT to the spectrum analyzer
2. Set Centre Frequency of the channel under test.
3. Set Detector PEAK
4. Set RBW: 10KHz, VBW: 3RBW
5. Set Span: Encompass the entire emissions bandwidth (EBW) of the signal.
6. Allow the trace to stabilize, find the peak value of the power envelope and record the frequency, then calculated the frequency drift.

The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.

User manual temperature is 10 to 40 °C.

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

Limit: 20ppm

Test Results (All conditions and all modes were performed, only list Worst-Case in the report)

Remark: NV is normal Voltage: 120V~, 60Hz, HV is High Voltage: 240V~, 50Hz, LV is Low Voltage: 100V~, 60Hz, NT is normal Temperature: +20 °C.

Test Result:

Test data should be referred to Appendix A for 709502279701-01A.

9.6 Unwanted emissions

Transmitting spurious emission test result as below:

Test Method

Radiated Mode:

1. The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned
5. Use the following spectrum analyzer settings According to C63.10:
For Above 1GHz
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 1MHz, VBW $\geq$ RBW for peak measurement and VBW = 10Hz for average measurement, Sweep = auto, Detector function = peak, Trace = max hold.
For Below 1GHz
Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 KHz, VBW $\geq$ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average ((duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor (20log(1/duty cycle)).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.

Limit

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

According to part 15.407(b), the radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.

Frequency MHz	Field Strength uV/m	Field Strength dBμV/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

The only worse case (which is subject to the maximum EIRP, 802.11ax 20 mode listed in the report.

Transmitting spurious emission worse case test result:

Transmitting spurious emission test result as below:

802.11ax 20 Modulation 5260MHz MIMO							
Frequency Range MHz	Frequency MHz	Antenna Polarization	Emission Level(dBm)	Detector	Limit (dBm)	Margin (dB)	Result
1000-7000	--	Horizontal	--	PK	74	--	Pass
1000-7000	--	Vertical	--	PK	74	--	Pass
7000-40000	10520	Horizontal	48.64	PK	68.2	19.56	Pass
7000-40000	10520	Vertical	51.49	PK	68.2	16.71	Pass

802.11ax 20 Modulation 5300MHz MIMO							
Frequency Range MHz	Frequency MHz	Antenna Polarization	Emission Level(dBm)	Detector	Limit (dBm)	Margin (dB)	Result
1000-7000	--	Horizontal	--	PK	74	--	Pass
1000-7000	--	Vertical	--	PK	74	--	Pass
7000-40000	10600	Horizontal	49.25	PK	68.2	18.95	Pass
7000-40000	10600	Vertical	52.32	PK	68.2	15.88	Pass

802.11ax 20 Modulation 5320MHz MIMO							
Frequency Range MHz	Frequency MHz	Antenna Polarization	Emission Level(dBm)	Detector	Limit (dBm)	Margin (dB)	Result
1000-7000	--	Horizontal	--	PK	74	--	Pass
1000-7000	--	Vertical	--	PK	74	--	Pass
7000-40000	10640	Horizontal	49.8	PK	74	24.2	Pass
7000-40000	10640	Vertical	51.65	PK	74	22.35	Pass

802.11ax 20 Modulation 5500MHz MIMO							
Frequency Range MHz	Frequency MHz	Antenna Polarization	Emission Level(dBm)	Detector	Limit (dBm)	Margin (dB)	Result
1000-7000	--	Horizontal	--	PK	74	--	Pass
1000-7000	--	Vertical	--	PK	74	--	Pass
7000-40000	11000	Horizontal	53.1	PK	74	20.9	Pass
7000-40000	11000	Horizontal	48.4	AV	54	5.6	Pass
7000-40000	11000	Vertical	48.68	PK	74	25.32	Pass
7000-40000	11000	Vertical	50	AV	54	4	Pass

802.11ax 20 Modulation 5600MHz MIMO							
Frequency Range MHz	Frequency MHz	Antenna Polarization	Emission Level(dBm)	Detector	Limit (dBm)	Margin (dB)	Result
1000-7000	--	Horizontal	--	PK	74	--	Pass
1000-7000	--	Vertical	--	PK	74	--	Pass
7000-40000	11200	Horizontal	53.43	PK	74	20.57	Pass
7000-40000	11200	Horizontal	48.1	AV	54	5.9	Pass
7000-40000	11200	Vertical	54.65	PK	74	19.35	Pass
7000-40000	11200	Vertical	49.8	AV	54	4.2	Pass

802.11ax 20 Modulation 5700MHz MIMO							
Frequency Range MHz	Frequency MHz	Antenna Polarization	Emission Level(dBm)	Detector	Limit (dBm)	Margin (dB)	Result
1000-7000	--	Horizontal	--	PK	74	--	Pass
1000-7000	--	Vertical	--	PK	74	--	Pass
7000-40000	11400	Horizontal	53.72	PK	74	20.28	Pass
7000-40000	11400	Horizontal	49	AV	54	5	Pass
7000-40000	11400	Vertical	60.21	PK	74	13.79	Pass
7000-40000	11400	Vertical	52.9	AV	54	1.1	Pass

802.11ax 20 Modulation 5720MHz MIMO							
Frequency Range MHz	Frequency MHz	Antenna Polarization	Emission Level(dBm)	Detector	Limit (dBm)	Margin (dB)	Result
1000-7000	--	Horizontal	--	PK	74	--	Pass
1000-7000	--	Vertical	--	PK	74	--	Pass
7000-40000	11440	Horizontal	54.61	PK	74	19.39	Pass
7000-40000	11440	Horizontal	49.2	AV	54	4.8	Pass
7000-40000	11440	Vertical	59.39	PK	74	14.61	Pass
7000-40000	11440	Vertical	53	AV	54	1	Pass

Remark:

- (1) Above 1GHz Corrector factor= Antenna Factor +Cable Loss - Amp. Factor.
- (2) Below 1GHz Corrector factor= Antenna Factor +Cable Loss.
- (3) “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.
- (4) We test all modes and only the worst case for each bandwidth recorded in the report.



China


- (5) Testing is carried out with frequency rang 30MHz to 40GHz, which data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) The Low frequency, which start from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

Transmitting spurious emission test result as below:

The worst case of Radiated Emission below 1GHz:

Site: 3 meter chamber	Time: 2023/05/16 - 11:12
Limit: FCC Part15.209_RE(3m)_ClassB	Engineer: Wenqiang LU
Probe: VULB9168	Polarity: Horizontal
EUT: Cradle, Model no: Cra 3W	Power: 120VAC, 60Hz for adaptor
Note: Transmit by at 802.11a channel 5320MHz MIMO.	
Note: Pre-scan with three orthogonal axis and the worst case as X axis.	

RE_VULB9168_pre_Cont_30-1000

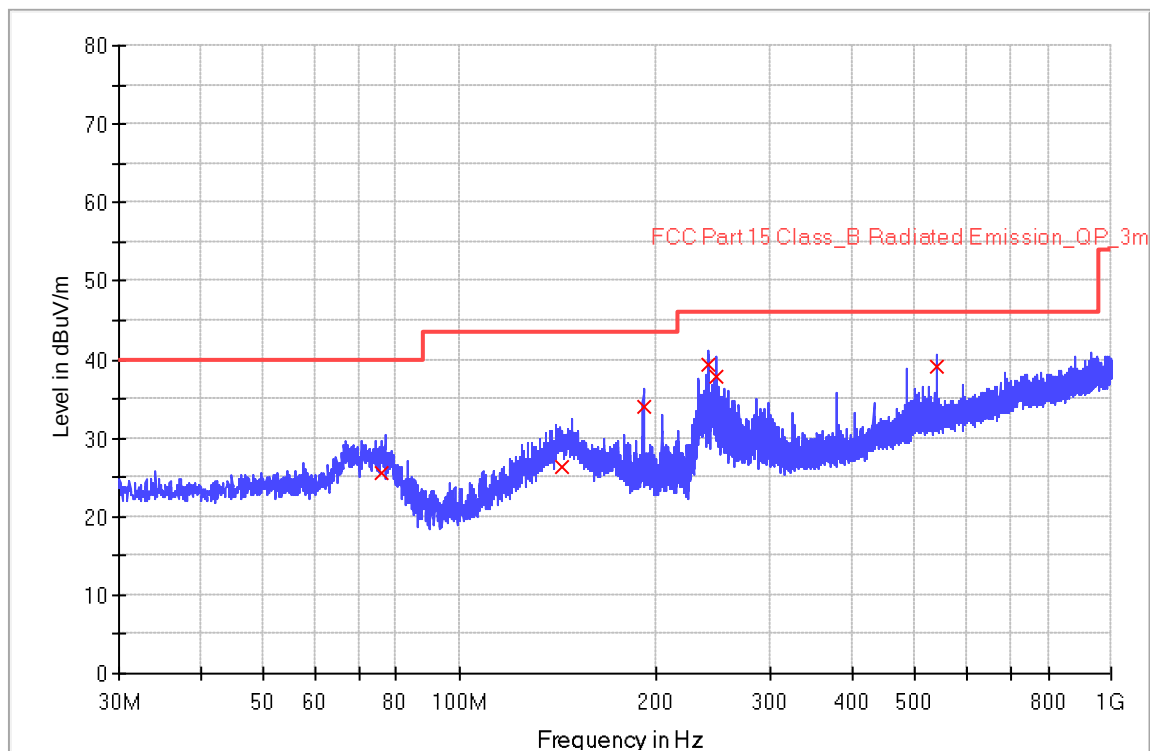
**Limit and Margin**

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
75.920000	25.6	1000.0	120.000	200.0	H	105.0	17.3	14.5	40.0
143.120000	26.3	1000.0	120.000	200.0	H	314.0	20.6	17.2	43.5
191.320000	33.9	1000.0	120.000	184.0	H	238.0	18.4	9.6	43.5
240.000000	39.3	1000.0	120.000	100.0	H	143.0	19.6	6.7	46.0
247.520000	37.8	1000.0	120.000	100.0	H	21.0	19.9	8.2	46.0
539.960000	39.2	1000.0	120.000	100.0	H	74.0	27.2	6.8	46.0

The worst case of Radiated Emission below 1GHz:

Site: 3 meter chamber	Time: 2023/05/16 - 13:47
Limit: FCC_Part15.209_RE(3m)_ClassB	Engineer: Wenqiang LU
Probe: VULB9168	Polarity: Vertical
EUT: Cradle, Model no: Cra 3W	Power: 120VAC, 60Hz for adaptor
Note: Transmit by at 802.11a channel 5320MHz MIMO.	
Note: Pre-scan with three orthogonal axis and the worst case as X axis.	

RE_VULB9168_pre_Cont_30-1000

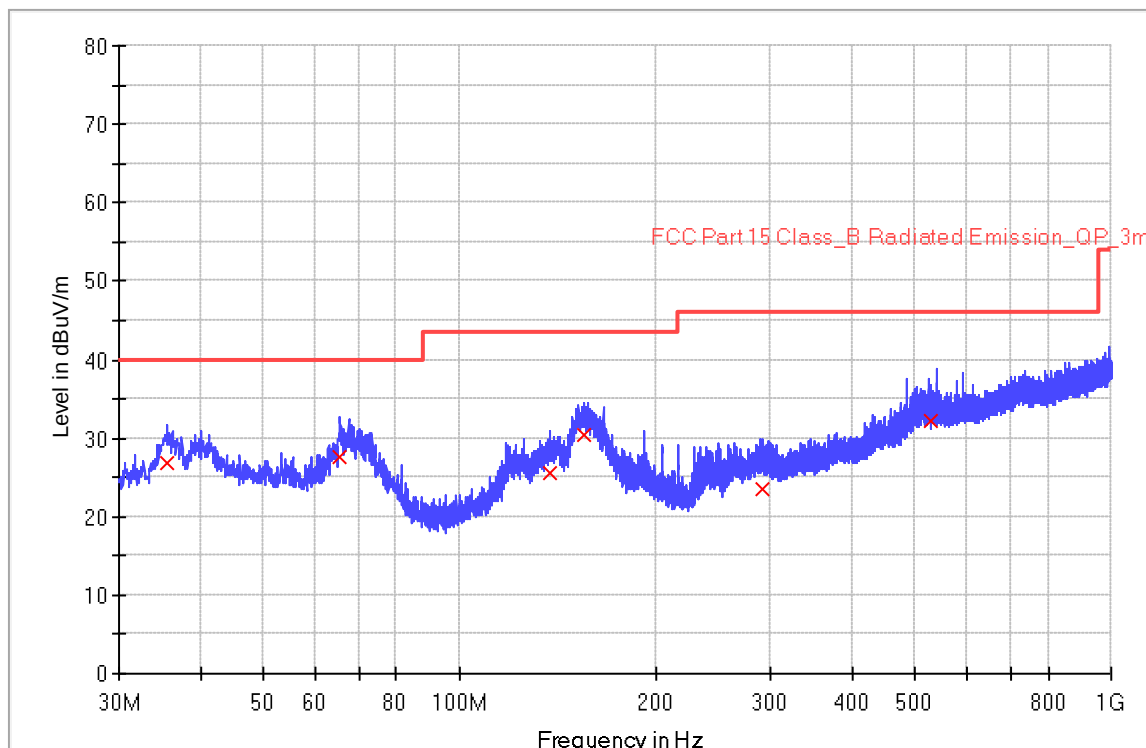

Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
35.560000	26.8	1000.0	120.000	100.0	V	125.0	19.6	13.2	40.0
65.560000	27.7	1000.0	120.000	100.0	V	73.0	19.3	12.3	40.0
137.440000	25.4	1000.0	120.000	100.0	V	241.0	20.1	18.1	43.5
155.280000	30.3	1000.0	120.000	100.0	V	12.0	21.0	13.2	43.5
292.480000	23.6	1000.0	120.000	200.0	V	306.0	21.3	22.4	46.0
528.080000	32.3	1000.0	120.000	100.0	V	190.0	27.0	13.7	46.0

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

Conducted Spurious Emission Test Method:

According to KDB789033 D02

1. The EUT was placed on 0.8m height table, the RF output of EUT was connected to the test receiver by RF cable. The path loss was compensated to the results for each measurement.
2. For transmitters with operation frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.
Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5359 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.
 - a) Set RBW $\geq$ between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth)
 - b) Set VBW $\geq$ 3 RBW.

Limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Conducted Spurious Emission

Test data should be referred to Appendix A for 709502279701-01A.

Band edge measurements

Test data should be referred to Appendix A for 709502279701-01A.

10 Test Equipment List

List of Test Instruments
Test Site1

	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DATE	CAL. DUE DATE
C	Wideband Radio Communication Tester	R&S	CMW500	S2110416b-YQ-EMC	2021-11-24	2023-11-23
	Vector signal generator	Agilent	N5182A	S2110417b-YQ-EMC	2021-11-24	2023-11-23
	RF automatic control unit	MWRFTest	MW100-RFCB	S2110418b-YQ-EMC	2022-9-30	2023-9-29
	Temperature Chamber	Shanghai HUCAN	HTT-100AP	S2201430b-YQ-EMC	2022-3-3	2024-3-2
	Signal Analyzer	R & S	FSV40	S1503003-YQ-EMC	2022-8-1	2023-7-31
RE	EMI Test Receiver	Rohde & Schwarz	ESR3	101906	2022-8-1	2023-7-31
	Signal Analyzer	Rohde & Schwarz	FSV40	101091	2022-8-1	2023-7-31
	Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9168	961	2021-9-23	2024-9-22
	Horn Antenna	Rohde & Schwarz	HF907	102393	2021-4-13	2024-4-12
	Pre-amplifier	Rohde & Schwarz	SCU-18D	19006451	2022-8-1	2023-7-31
	Loop antenna	Rohde & Schwarz	HFH2-Z2	100443	2022-6-13	2023-6-12
	DOUBLE-RIDGED WAVEGUIDE HORN WITH PRE-AMPLIFIER (18 GHZ - 40 GHZ)	ETS-Lindgren	3116C-PA	002222727	2020-9-23	2023-9-22
	3m Semi-anechoic chamber	TDK	9X6X6	----	2021-5-8	2024-5-7
CE	EMI Test Receiver	Rohde & Schwarz	ESR3	101907	2022-8-1	2023-7-31
	LISN	Rohde & Schwarz	ENV216	101924	2022-8-1	2023-7-31

Measurement Software Information			
Test Item	Software	Manufacturer	Version
C	MTS 8310	MWRFTest	2.0.0.0
RE	EMC 32	Rohde & Schwarz	V10.50.40
CE	EMC 32	Rohde & Schwarz	V10.50.40

C - Conducted RF tests

- Conducted peak output power
- 6dB Occupied Bandwidth
- Power spectral density*
- Conducted Band Edge and Out-of-Band Emissions

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

Items	Extended Uncertainty
Conducted Disturbance at Mains Terminals	150kHz to 30MHz, LISN, $\pm 3.16\text{dB}$
Radiated Disturbance	30MHz to 1GHz, $\pm 5.03\text{dB}$ (Horizontal) $\pm 5.12\text{dB}$ (Vertical) 1GHz to 18GHz, $\pm 5.15\text{dB}$ (Horizontal) $\pm 5.12\text{dB}$ (Vertical) 18GHz to 25GHz, $\pm 4.76\text{dB}$

Measurement Uncertainty Decision Rule:

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2021, clause 4.4.3 and 4.5.1.



12 Photographs of Test Set-ups

Refer to the < Test Setup photos >.



13 Photographs of EUT

Refer to the < External Photos > & < Internal Photos >.

THE END