

FCC Test Report

Report No.: AGC07434241006FR03

FCC ID : 2ARXB-B4A

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Smart Label Printer

BRAND NAME : NIIMBOT

MODEL NAME : NIIMBOT B4

APPLICANT : Wuhan Jingchen Intelligent Identification Technology Co.,

Ltd.

DATE OF ISSUE : Nov. 14, 2024

STANDARD(S) : FCC Part 15 Subpart C §15.225

REPORT VERSION: V1.0

Attestation of Global Colonge (Shenzhen) Co., Ltd



Page 2 of 42

Report Revise Record


Report Version	Revise Time	Issued Date	Valid Version	Notes	
V1.0	/	Nov. 14, 2024	Valid	Initial Release	



Table of Contents


1. General Information	5
2. Product Information	б
2.1 Product Technical Description	6
2.2 Test Frequency List	6
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Special Accessories	7
2.6 Equipment Modifications	7
2.7 Antenna Requirement	7
3. Test Environment	8
3.1 Address of The Test Laboratory	8
3.2 Test Facility	8
3.3 Environmental Conditions	9
3.4 Measurement Uncertainty	9
3.5 List of Equipment Used	10
4. System Test Configuration	11
4.1 EUT Configuration	11
4.2 EUT Exercise	11
4.3 Configuration of Tested System	11
4.4 Equipment Used in Tested System	
4.5 Summary of Test Results	
5. Description of Test Modes	13
6. Field Strength of Fundamental	14
6.1 Provisions Applicable	14
6.2 Measurement Procedure	
6.3 Measurement Setup (Block Diagram of Configuration)	16
6.4 Measurement Result	17
7. Radiated Spurious Emissions	19
7.1 Provisions Applicable	19
7.2 Measurement Procedure	19
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Result	22
8. 20dB Bandwidth Measurement	
8.1 Provisions Applicable	34
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	
8.4 Measurement Result	
9. Frequency Stability Measurement	36
9.1 Provisions Applicable	36
9.2 Measurement Procedure. Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Insp	36 ection

Stamp" is deemed to be invalid. Copying or excepting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





9.3 Measurement Setup (Block Diagram of Configuration)	36
9.4 Measurement Result	37
10. AC Power Line Conducted Emission Test	38
10.1 Measurement Limit	38
10.2 Measurement Setup (Block Diagram of Configuration)	38
10.3 Preliminary Procedure of Line Conducted Emission Test	39
10.4 Final Procedure of Line Conducted Emission Test	39
10.5 Measurement Result	39
Appendix I: Photographs of Test Setup	42
Appendix II: Photographs of Test EUT	42





1. General Information

Applicant	Wuhan Jingchen Intelligent Identification Technology Co., Ltd.				
Address	No. 5, Creative Workshop, Creative World, Yezhihu West Road, Hongshan				
	District, Wuhan, China				
Manufacturer	Wuhan Jingchen Intelligent Identification Technology Co., Ltd.				
Address	No. 5, Creative Workshop, Creative World, Yezhihu West Road, Hongshan				
	District, Wuhan, China				
Factory	Dongxihu branch of Wuhan Jingchen Intelligent Identification Technology Co., Ltd.				
Address	No. 20, Xincheng Shiba Road, Changqing Street, Dongxihu District, Wuhan,				
rtaareee	Hubei Province, China				
Product Designation	Smart Label Printer				
Brand Name	NIIMBOT				
Test Model	NIIMBOT B4				
Series Model(s)	N/A				
Difference Description	N/A				
Date of receipt of test item	Oct. 16, 2024				
Date of Test	Oct. 16, 2024~Nov. 14, 2024				
Deviation from Standard	No any deviation from the test method				
Condition of Test Sample	Normal				
Test Result	Pass				
Test Report Form No	AGCER-FCC-NFC-V1				

Note: The test results of this report relate only to the tested sample identified in this report.

Cici Li
(Project Engineer)

Reviewed By

Calvin Liu
(Reviewer)

Angela Li
(Authorized Officer)

Nov. 14, 2024



Page 6 of 42

2. Product Information

2.1 Product Technical Description

Equipment Category	Near Field Communication (NFC)
Operation Frequency	13.56MHz
Hardware Version	B01
Software Version	1.04
Modulation Type	ASK
Field Strength of Fundamental	65.00dBµV/m (Peak)
Antenna Designation	Induction Coil Antenna
Antenna Gain	0dBi
Power Supply	DC 7.4V by battery or DC 5V by adapter

2.2 Test Frequency List

Frequency Band	Channel Number	Frequency	
13.110~14.010 MHz	01	13.56 MHz	



Page 7 of 42

2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: 2ARXB-B4A, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	o. Identity Document Title				
1	FCC 47 CFR Part 2 Frequency allocations and radio treaty matters; general rules and regula				
2	FCC 47 CFR Part 15	Radio Frequency Devices			
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices			

2.5 Special Accessories

Not available for this EUT intended for grant.

2.6 Equipment Modifications

Not available for this EUT intended for grant.

2.7 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 0dBi.



Page 8 of 42

3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 9 of 42

3.3 Environmental Conditions

	Normal Conditions	Extreme Conditions				
Temperature range (℃)	15 - 35	-20 - 50				
Relative humidity range	20 % - 75 %	20 % - 75 %				
Pressure range (kPa)	86 - 106	86 - 106				
Power supply	DC5V	LV:DC4.5V/HV:DC5.5V				
Notes The Cytrome Temperature and Cytrome Voltages declared by the manufacturer						

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty		
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$		
Uncertainty of Radiated Emission below 150kHz	$U_c = \pm 4.2 \text{ dB}$		
Uncertainty of Radiated Emission below 30MHz	$U_c = \pm 3.8 \text{ dB}$		
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$		
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$		
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$		
Uncertainty of spurious emissions, conducted	U _c = ±2 %		
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2.7 \%$		



Page 10 of 42

3.5 List of Equipment Used

• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23	
\boxtimes	AGC-ER-E075	Small Environmental Tester	SH-242	ESPEC	93008290	2024-07-24	2026-07-23	
\boxtimes	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	

A	AC Power Line Conducted Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27	
\boxtimes	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08	
\boxtimes	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27	

Test Software							
Used	Used Equipment No. Test Equipment Manufacturer Model No. Version Information						
\boxtimes	AGC-EM-S003	RE Test System	FARA	EZ-EMC	V.RA-03A		
\boxtimes	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71		



Page 11 of 42

4. System Test Configuration

4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:



4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Model No.	Manufacturer Specification Information		Cable
1	Adapter	Huawei	HW-200440C00		

☐ Test Accessories Come From The Manufacturer

No.	Equipment	Model No.	Manufacturer	cturer Specification Information	
1				-	



Page 12 of 42

4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203	Antenna Equipment	Pass
2	15.225(a)(b)(c)	Field Strength of Fundamental	Pass
3	§15.209	Radiated Spurious Emissions	Pass
4	§15.215(c)	20dB Bandwidth	Pass
5	§15.205(a)	Restricted Bands of Operation	Pass
6	§15.225(e)	Frequency Stability	Pass
7	§15.207	AC Power Line Conducted Emission	Pass

Note: There are two prototypes (Prototype 1 and Prototype 2). They are only different from the motor. In response to this difference, both prototypes were tested for Radiated Spurious Emissions as a difference test and the data was recorded in the report.



Page 13 of 42

5. Description of Test Modes

Summary table of Test Cases				
Test Item	Equipment category / Modulation			
iest item	Near Field Communication / ASK			
Radiated & Conducted Test Cases	Mode 1: NFC TX _13.56 MHz(Battery powered or AC/DC adapter)			
AC Conducted Emission	Mode 2: NFC TX _13.56 MHz (Connect adapter)			

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.



Page 14 of 42

6. Field Strength of Fundamental

6.1 Provisions Applicable

Rules and specifications	FCC CFR 47 Part 15 section 15.225					
Description	Compliance v	vith the spectrum ma	sk is tested with RBV	V set to 9kHz.		
Freq. of Emission (MHz)	Field Strength (dBμV/m) at 30m Field Strength (dBμV/m) at 30m (dBμV/m) at 10m (dBμV/m)					
1.705~13.110	30	29.5	48.58	69.5		
13.110~13.410	106	40.5	59.58	80.5		
13.410~13.553	334	50.5	69.58	90.5		
13.553~13.567	15848	84.0	103.08	124.0		
13.567~13.710	334	50.5	69.58	90.5		
13.710~14.010	106	40.5	59.58	80.5		
14.010~30.000	30	29.5	48.58	69.5		

6.2 Measurement Procedure

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the



Page 15 of 42


pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting		
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP		
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP		
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average		


Receiver Parameter	Setting	
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP	
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP	
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP	






6.3 Measurement Setup (Block Diagram of Configuration)

Radiated Emission Test Setup 9kHz-30MHz

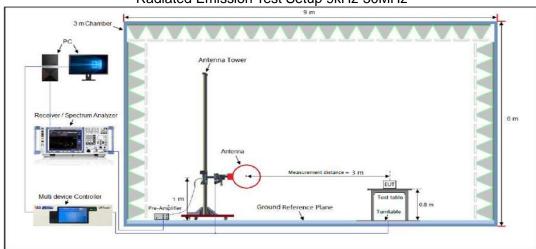


Radiated Emission Test Setup 30MHz-1000MHz

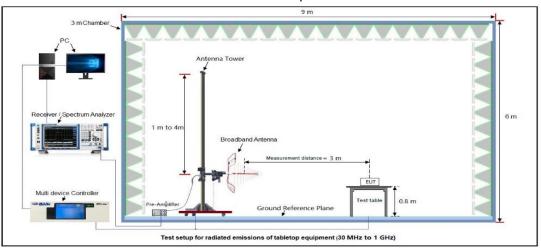



6.4 Measurement Result

EUT Name	Smart Label Printer	Model Name	NIIMBOT B4
Temperature	22.6°C	Relative Humidity	56.3%
Pressure	960hPa	Test Voltage	DC 7.4V
Test Mode	Mode 1	Antenna Polarity	Face

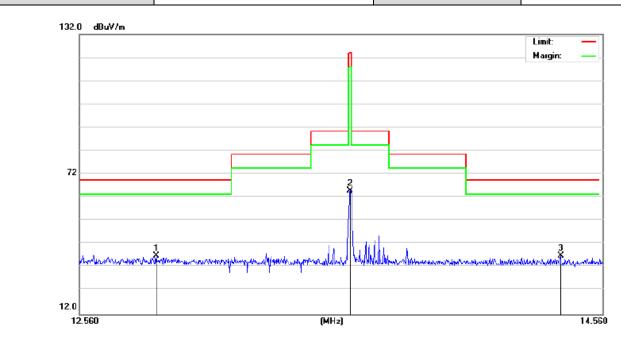


No. Mk.	Freq.		Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	12.8360	7.03	29.89	36.92	69.50	-32.58	peak
2	13.5600	35.09	29.91	65.00	124.0	-59.00	peak
3 *	14.3900	7.13	29.93	37.06	69.50	-32.44	peak

RESULT: Pass



EUT Name	Smart Label Printer	Model Name	NIIMBOT B4
Temperature	22.6°C	Relative Humidity	56.3%
Pressure	960hPa	Test Voltage	DC 7.4V
Test Mode	Mode 1	Antenna Polarity	Side

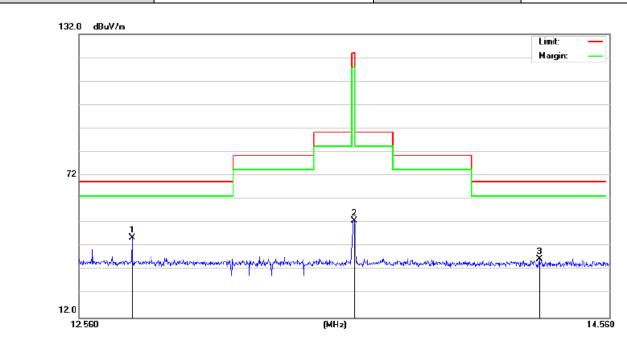

No. M	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1 *	12.7480	16.01	29.88	45.89	69.50	-23.61	peak
2	13.5620	22.93	29.91	52.84	124.0	-71.16	peak
3	14.2800	6.84	29.93	36.77	69.50	-32.73	peak

RESULT: Pass

- 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.
- 2. The "Factor" value can be calculated automatically by software of measurement system.



Page 19 of 42

7. Radiated Spurious Emissions

7.1 Provisions Applicable

According to 15.35, on any frequency or frequencies below or equal to 1000 MHz, the limits Shown are based on measuring equipment employing a CISPR quasi-peak detector function and related measurement bandwidths, unless otherwise specified the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test.

The field strength of any emissions which appear outside of 13.110 ~14.010MHz band shall not exceed the general radiated emissions limits.

15.209 Limit in the below table has to be followed:

Frequency	Distance	Field Strengths Limit		
(MHz)	Meters	μV/m	dB(μV)/m	
0.009 ~ 0.490	300	2400/F(kHz)		
0.490 ~ 1.705	30	24000/F(kHz)		
1.705 ~ 30	1.705 ~ 30 30			
30 ~ 88	3	100	40.0	
88 ~ 216	3	150	43.5	
216 ~ 960	3	200	46.0	
960 ~ 1000	3	500 54.0		
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)		

Remark.

- (1) Emission level $dB\mu V = 20 \log Emission level \mu V/m$
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

7.2 Measurement Procedure

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Page 20 of 42


antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting		
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP		
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP		
Start ~Stop Frequency	1GHz~26.5GHz		
Start ~Stop i requericy	1MHz/3MHz for Peak, 1MHz/3MHz for Average		


Receiver Parameter	Setting		
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP		
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP		







7.3 Measurement Setup (Block Diagram of Configuration)

Radiated Emission Test Setup 9kHz-30MHz

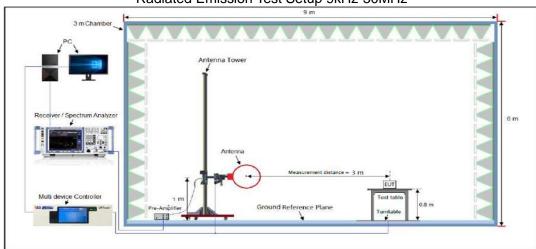

Radiated Emission Test Setup 30MHz-1000MHz

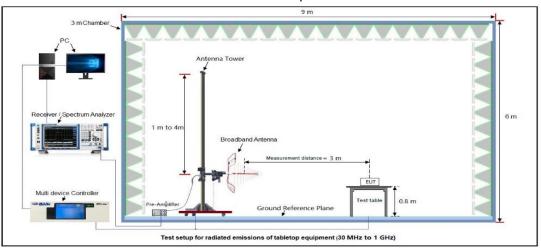







7.4 Measurement Result

RADIATED EMISSION FROM 9kHz-150kHz (Prototype1)

EUT	Smart Label Printer	Model Name	NIIMBOT B4	
Temperature	22.9℃	Relative Humidity	59.7%	
Pressure	960hPa	Test Voltage	DC 7.4V by battery	
Test Mode	Mode 1	Antenna	Face	

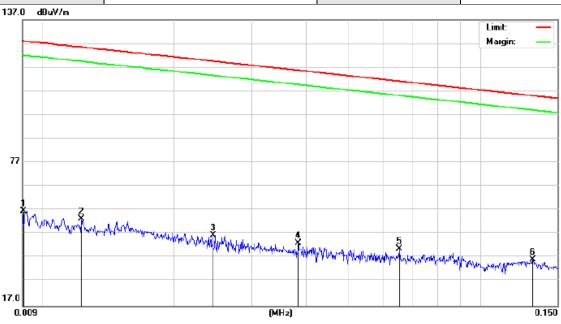


No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	0.0091	12.72	44.11	56.83	128.21	-71.38	peak
2	0.0123	11.00	42.31	53.31	125.61	-72.30	peak
3	0.0246	9.68	36.91	46.59	119.63	-73.04	peak
4	0.0383	8.71	34.59	43.30	115.80	-72.50	peak
5	0.0651	7.99	32.87	40.86	111.22	-70.36	peak
6 *	0.1318	3.93	32.30	36.23	105.13	-68.90	peak






EUT	Smart Label Printer	Model Name	NIIMBOT B4
Temperature	22.9℃	Relative Humidity	59.7%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 1	Antenna	Side

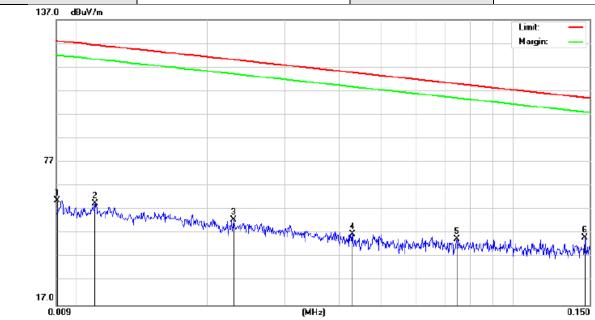


No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	0.0091	16.87	44.11	60.98	128.21	-67.23	peak
2	0.0111	16.69	42.99	59.68	126.50	-66.82	peak
3	0.0229	15.67	37.30	52.97	120.24	-67.27	peak
4	0.0429	12.82	34.14	46.96	114.82	-67.86	peak
5	0.0743	12.07	32.58	44.65	110.08	-65.43	peak
6 *	0.1461	12.97	32.37	45.34	104.25	-58.91	peak






RADIATED EMISSION FROM 150kHz-30MHz (Prototype1)

EUT	Smart Label Printer	Model Name	NIIMBOT B4
Temperature	22.9℃	Relative Humidity	59.7%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 1	Antenna	Face

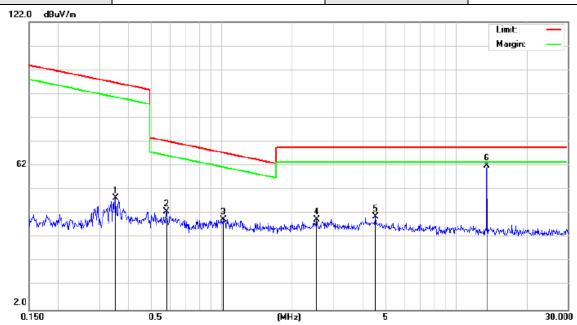


No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	0.3502	16.18	32.36	48.54	96.70	-4 8.16	peak
2	0.5792	10.68	32.19	42.87	72.35	-29.48	peak
3	1.0100	7.70	32.00	39.70	67.52	-27.82	peak
4	2.5400	8.32	31.36	39.68	69.54	-29.86	peak
5	4.5254	10.90	29.92	40.82	69.54	-28.72	peak
6 *	13.5600	32.38	29.91	62.29	69.54	-7.25	peak






EUT Smart Label Printer Model Name NIIMBOT B4 **Relative Humidity** 59.7% **Temperature** 22.9℃ **Pressure** 960hPa **Test Voltage** DC 7.4V by battery **Test Mode** Mode 1 **Antenna** Side

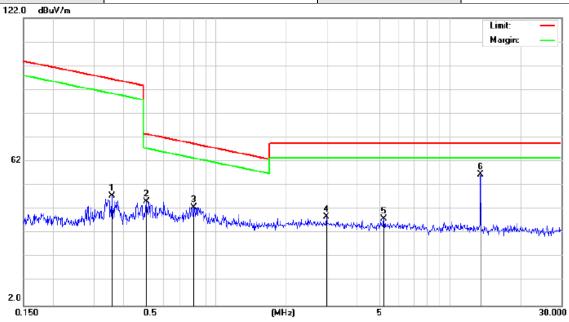


No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	0.3577	15.43	32.35	47.78	96.52	-48.74	peak
2	0.5047	13.07	32.21	45.28	73.54	-28.26	peak
3	0.8044	10.93	32.14	43.07	69.49	-26.42	peak
4	2.9618	7.71	31.24	38.95	69.54	-30.59	peak
5	5.2213	8.97	29.27	38.24	69.54	-31.30	peak
6 *	13.5600	26.88	29.91	56.79	69.54	-12.75	peak





Radiated Emission From 30MHz to 1000MHz (Prototype1)

EUT Name	Smart Label Printer	Model Name	NIIMBOT B4
Temperature	22.6° C	Relative Humidity	56.3%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 1	Antenna Polarity	Horizontal

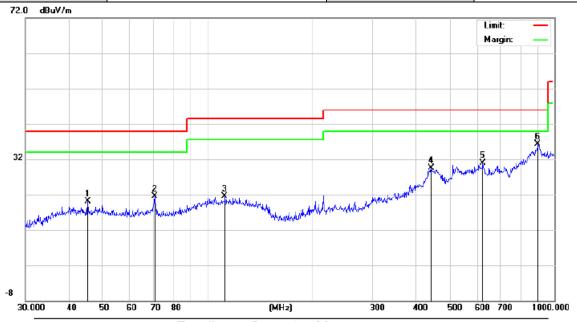


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		45.3755	6.63	13.52	20.15	40.00	-19.85	peak
2		70.8315	8.71	12.82	21.53	40.00	-18.47	peak
3		112.5243	5.12	16.33	21.45	43.50	-22.05	peak
4		441.7425	4.54	25.04	29.58	46.00	-16.42	peak
5		622.8899	5.99	24.93	30.92	46.00	-15.08	peak
6	*	896.9964	4.84	31.42	36.26	46.00	-9.74	peak

RESULT: PASS




EUT Name	Smart Label Printer	Model Name	NIIMBOT B4
Temperature	22.6° C	Relative Humidity	56.3%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 1	Antenna Polarity	Vertical

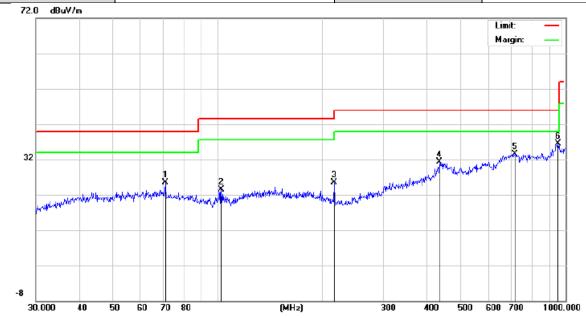

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		70.5836	8.44	16.99	25.43	40.00	-14.57	peak
2		102.3597	8.88	14.61	23.49	43.50	-20.01	peak
3		216.0240	8.81	16.70	25.51	46.00	-20.49	peak
4		434.0650	6.13	25.15	31.28	46.00	-14.72	peak
5		716.6820	4.86	28.68	33.54	46.00	-12.46	peak
6	*	952.0937	6.08	30.52	36.60	46.00	-9.40	peak


RESULT: Pass






RADIATED EMISSION FROM 9kHz-150kHz (Prototype2)

	····							
EUT	Smart Label Printer	Model Name	NIIMBOT B4					
Temperature	22.9℃	Relative Humidity	59.7%					
Pressure	960hPa	Test Voltage	DC 7.4V by battery					
Test Mode	Mode 1	Antenna	Face					

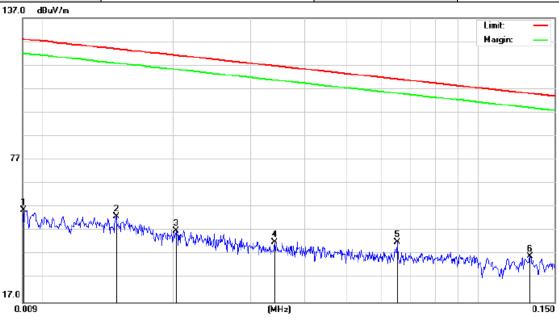


No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	0.0091	11.72	44.11	55.83	128.21	-72.38	peak
2	0.0148	12.26	40.90	53.16	124.01	-70.85	peak
3	0.0202	9.36	37.93	47.29	121.33	-74.04	peak
4	0.0342	7.31	35.12	42.43	116.78	-74.35	peak
5 *	0.0651	9.49	32.87	42.36	111.22	-68.86	peak
6	0.1318	3.93	32.30	36.23	105.13	-68.90	peak






EUT	Smart Label Printer	Model Name	NIIMBOT B4
Temperature	22.9℃	Relative Humidity	59.7%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 1	Antenna	Side

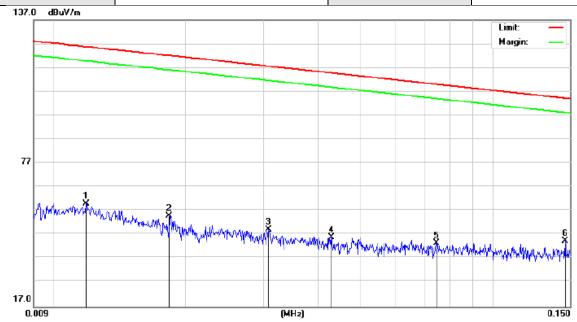


No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	0.0119	17.57	42.54	60.11	125.89	-65.78	peak
2	0.0183	15.96	38.94	54.90	122.18	-67.28	peak
3	0.0309	13.78	35.54	49.32	117.66	-68.34	peak
4	0.0429	11.82	34.14	45.96	114.82	-68.86	peak
5	0.0743	11.07	32.58	43.65	110.08	-66.43	peak
6 *	0.1461	11.97	32.37	44.34	104.25	-59.91	peak






RADIATED EMISSION FROM 150kHz-30MHz (Prototype2)

EUT Smart Label Printer		Model Name	NIIMBOT B4
Temperature	22.9℃	Relative Humidity	59.7%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 1	Antenna	Face

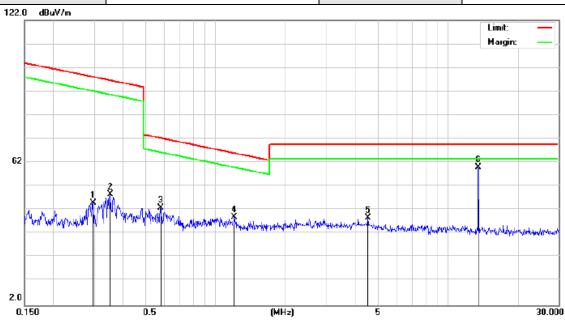


No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	0.2953	12.74	32.42	45.16	98.17	-53.01	peak
2	0.3502	16.18	32.36	48.54	96.70	-4 8.16	peak
3	0.5792	10.68	32.19	42.87	72.35	-29.48	peak
4	1.2034	7.19	31.90	39.09	66.00	-26.91	peak
5	4.5254	8.90	29.92	38.82	69.54	-30.72	peak
6 *	13.5600	30.12	29.91	60.03	69.54	-9.51	peak






EUT	Smart Label Printer	Model Name	NIIMBOT B4
Temperature	22.9℃	Relative Humidity	59.7%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 1	Antenna	Side

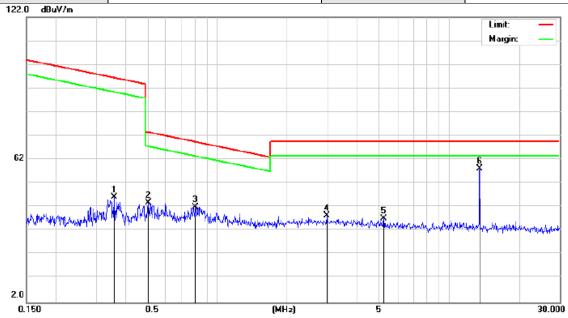


No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	0.3577	13.93	32.35	46.28	96.52	-50.24	peak
2	0.5047	11.57	32.21	43.78	73.54	-29.76	peak
3	0.8044	9.93	32.14	42.07	69.49	-27.42	peak
4	2.9618	7.21	31.24	38.45	69.54	-31.09	peak
5	5.2213	7.97	29.27	37.24	69.54	-32.30	peak
6 *	13.5600	28.38	29.91	58.29	69.54	-11.25	peak






Radiated Emission From 30MHz to 1000MHz (Prototype2)

EUT Name	Smart Label Printer	Model Name	NIIMBOT B4
Temperature	22.9℃	Relative Humidity	59.7%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 1	Antenna Polarity	Horizontal

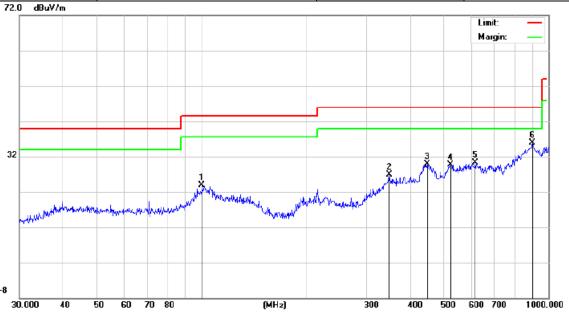


1 100.5806 7.76 16.21 23.97 43.50 -19.53 peak 2 348.0274 9.58 17.30 26.88 46.00 -19.12 peak 3 447.9821 4.99 24.82 29.81 46.00 -16.19 peak 4 522.7179 4.67 25.02 29.69 46.00 -16.31 peak 5 616.3718 5.20 25.18 30.38 46.00 -15.62 peak	No. Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
2 348.0274 9.58 17.30 26.88 46.00 -19.12 peak 3 447.9821 4.99 24.82 29.81 46.00 -16.19 peak 4 522.7179 4.67 25.02 29.69 46.00 -16.31 peak 5 616.3718 5.20 25.18 30.38 46.00 -15.62 peak		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
3 447.9821 4.99 24.82 29.81 46.00 -16.19 peak 4 522.7179 4.67 25.02 29.69 46.00 -16.31 peak 5 616.3718 5.20 25.18 30.38 46.00 -15.62 peak	1	100.5806	7.76	16.21	23.97	43.50	-19.53	peak
4 522.7179 4.67 25.02 29.69 46.00 -16.31 peak 5 616.3718 5.20 25.18 30.38 46.00 -15.62 peak	2	348.0274	9.58	17.30	26.88	46.00	-19.12	peak
5 616.3718 5.20 25.18 30.38 46.00 -15.62 peak	3	447.9821	4.99	24.82	29.81	46.00	-16.19	peak
	4	522.7179	4.67	25.02	29.69	46.00	-16.31	peak
6 * 900.1473 4.03 31.78 35.81 46.00 -10.19 peak	5	616.3718	5.20	25.18	30.38	46.00	-15.62	peak
	6 *	900.1473	4.03	31.78	35.81	46.00	-10.19	peak

RESULT: PASS





EUT Name	Smart Label Printer	Model Name	NIIMBOT B4
Temperature	22.9℃	Relative Humidity	59.7%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 1	Antenna Polarity	Vertical

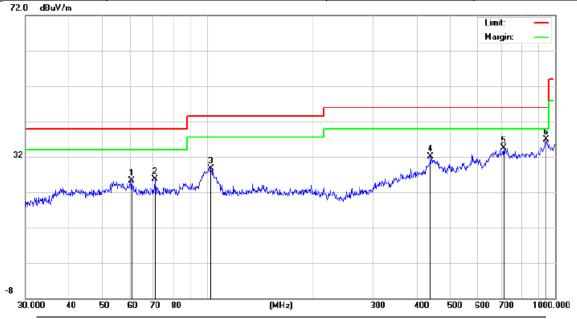

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		60.4919	8.25	17.10	25.35	40.00	-14.65	peak
2		70.8315	8.76	16.99	25.75	40.00	-14.25	peak
3	1	102.3597	14.04	14.61	28.65	43.50	-14.85	peak
4	4	138.6554	6.29	25.88	32.17	46.00	-13.83	peak
5	1	711.6734	6.05	28.51	34.56	46.00	-11.44	peak
6	* (942.1305	5.95	30.91	36.86	46.00	-9.14	peak

RESULT: PASS

- 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.
- 2. The "Factor" value can be calculated automatically by software of measurement system.



Page 34 of 42

8. 20dB Bandwidth Measurement

8.1 Provisions Applicable

Intentional radiators must be designed to ensure that the 20dB and 99% emission bandwidth in the specific band 13.553~13.567MHz.


8.2 Measurement Procedure


Set the parameters of SPA as below:

- 1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
- 2. Centre frequency = Operation Frequency
- 3. The resolution bandwidth of 10 kHz and the video bandwidth of 30 kHz were used.
- 4. Span: 100kHz, Sweep time: Auto
- Set the EUT to continue transmitting mode. Allow the trace to stabilize. Use the "N dB down" function of SPA to define the bandwidth.
- 6. Measured the spectrum width with power higher than 20dB below carrier.
- 7. Measured the 99% OBW.
- 8. Record the plots and reported.

Note: Since the measured signal is CW-like, it is not practical to adjust the RBW according to C63.10, as the measured bandwidth will always follow the RBW, resulting in approximately twice the RBW

8.3 Measurement Setup (Block Diagram of Configuration)

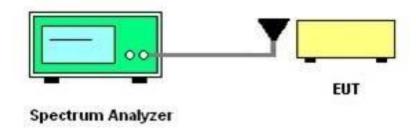






8.4 Measurement Result

Test Data of Bandwidth Measurement					
Test Channel (MHz)	Modulation	99% Occupied Bandwidth (kHz)	-20dB Bandwidth (kHz)	Limits (kHz)	Pass or Fail
13.56	ASK	22.798	26.87	N/A	Pass

Test Graphs of Occupied Bandwidth and -20dB Bandwidth

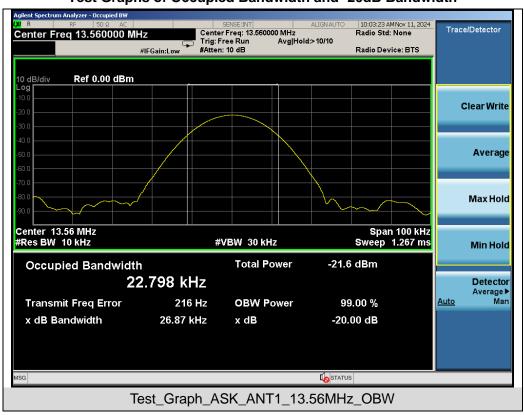



Page 36 of 42

9. Frequency Stability Measurement


9.1 Provisions Applicable

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

9.2 Measurement Procedure

- 1. The spectrum analyzer connected via a receive antenna placed near the EUT.
- 2. EUT have transmitted signal and fixed channelize.
- 3. Set the spectrum analyzer span to view the entire emissions bandwidth.
- 4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and max hold settings.
- 5. The fc is declaring of channel frequency. Then the frequency error formula is $(fc-f)/fc \times 106$ ppm and the limit is less than ± 100 ppm.
- 6. Extreme temperature rule is -20°C~50°C.

9.3 Measurement Setup (Block Diagram of Configuration)

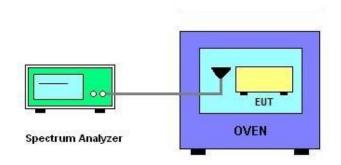



Page 37 of 42

9.4 Measurement Result

Test Data of Frequency Stability Measurement					
Test Channel (MHz)	Measurement Conditions Voltage Temperature		Measurement Result (ppm)	Limits	Pass or Fail
(1711 12)	(V)	(°C)	(PPIII)	(ppm)	
	5.0	-20	34	±100	Pass
		-10	35	±100	Pass
		0	41	±100	Pass
		10	29	±100	Pass
		25	28	±100	Pass
13.56		30	25	±100	Pass
		40	22	±100	Pass
		50	32	±100	Pass
	5.0	25	26	±100	Pass
	4.25	25	29	±100	Pass
	5.75	25	42	±100	Pass



10. AC Power Line Conducted Emission Test


10.1 Measurement Limit

Fraguenay Dange	Maximum RF Line Voltage		
Frequency Range	Q.P. (dBµV)	Average (dBµV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

10.2 Measurement Setup (Block Diagram of Configuration)

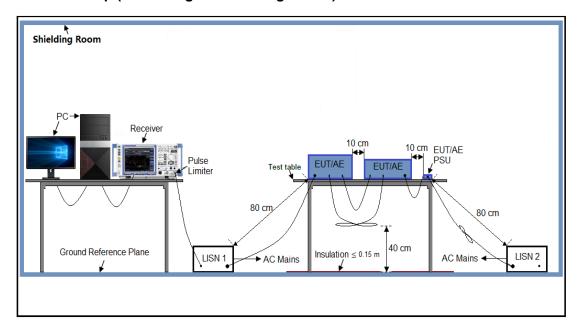



Page 39 of 42

10.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

10.4 Final Procedure of Line Conducted Emission Test

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

10.5 Measurement Result



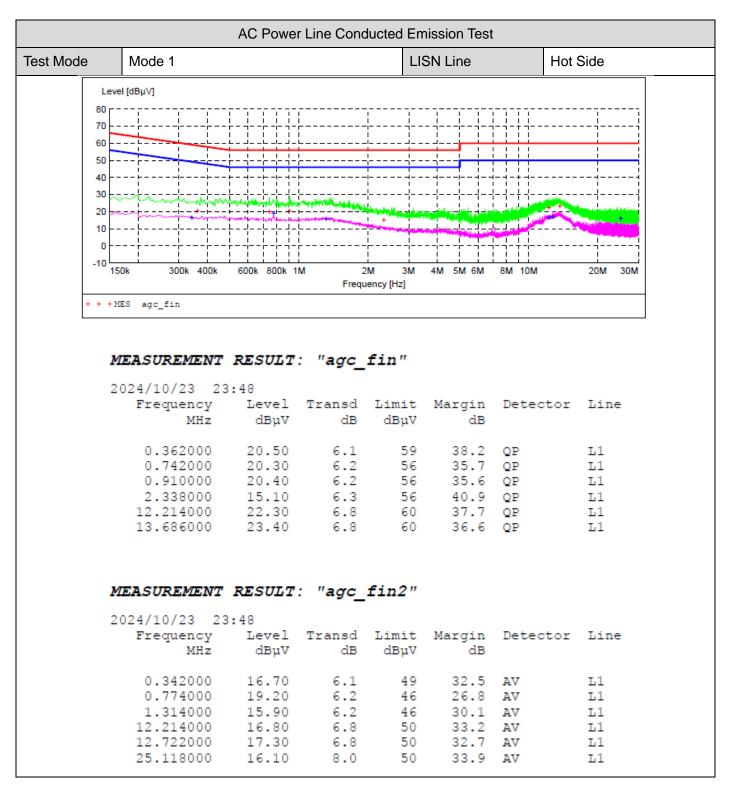


RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



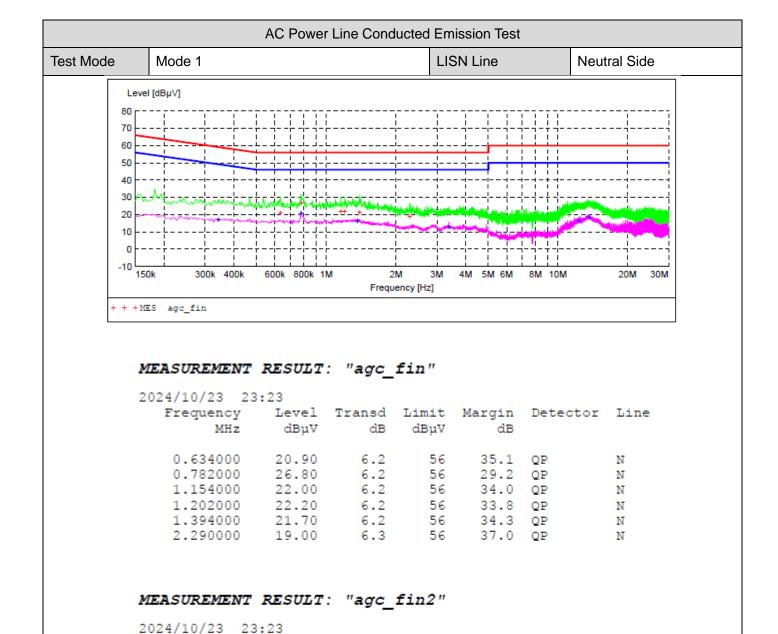

RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Frequency

0.342000

0.778000

1.362000

3.382000

12.290000

13.566000

MHz

Level

dBuV

17.00

21.20

16.00

12.90

16.50

18.50

Transd

dΒ

6.1

6.2

6.2

6.3

6.8

6.8

Limit

dBuV

49

46

46

46

50

50

Margin

dΒ

24.8 AV

32.2

30.0

33.1

33.5

31.5

Detector

ΑV

ΑV

ΑV

ΑV

ΑV

Line

Ν

N

Ν

Ν

Ν

Ν



Page 42 of 42

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC07434241006AP02

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC07434241006AP03

----End of Report----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.