




Radio Technology = WLAN ac 20 MHz, Operating Frequency = low, Measurement range =
1GHz - 26GHz, Subband = U-NII-3
(S01_AD02)

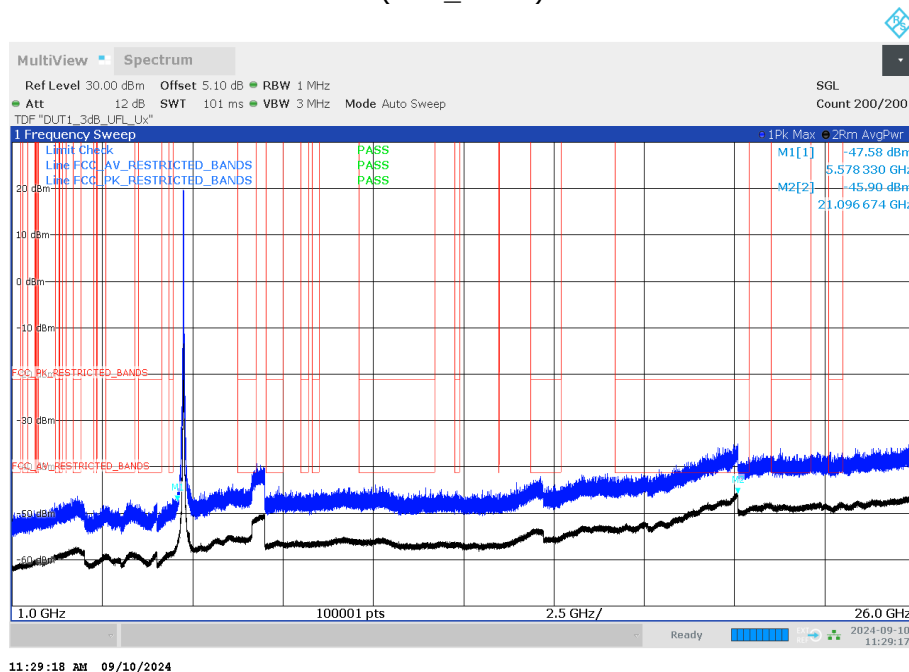


Radio Technology = WLAN ac 20 MHz, Operating Frequency = high, Measurement range =
1GHz - 26GHz, Subband = U-NII-3
(S01_AD02)

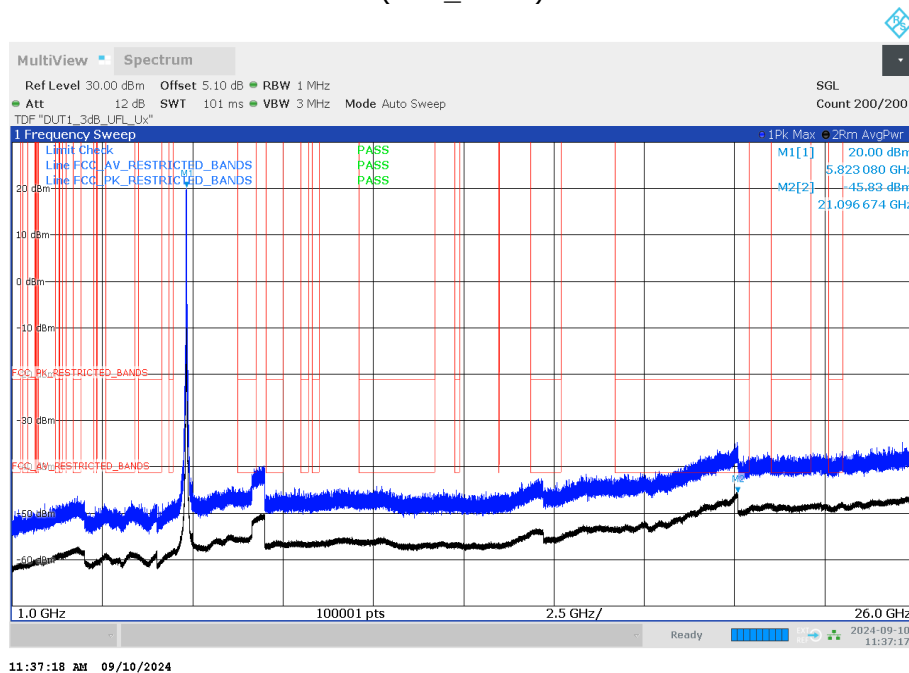


Radio Technology = WLAN ax 20 MHz, Operating Frequency = low, Measurement range = 1GHz - 26GHz, Subband = U-NII-1 (S01_AD02)

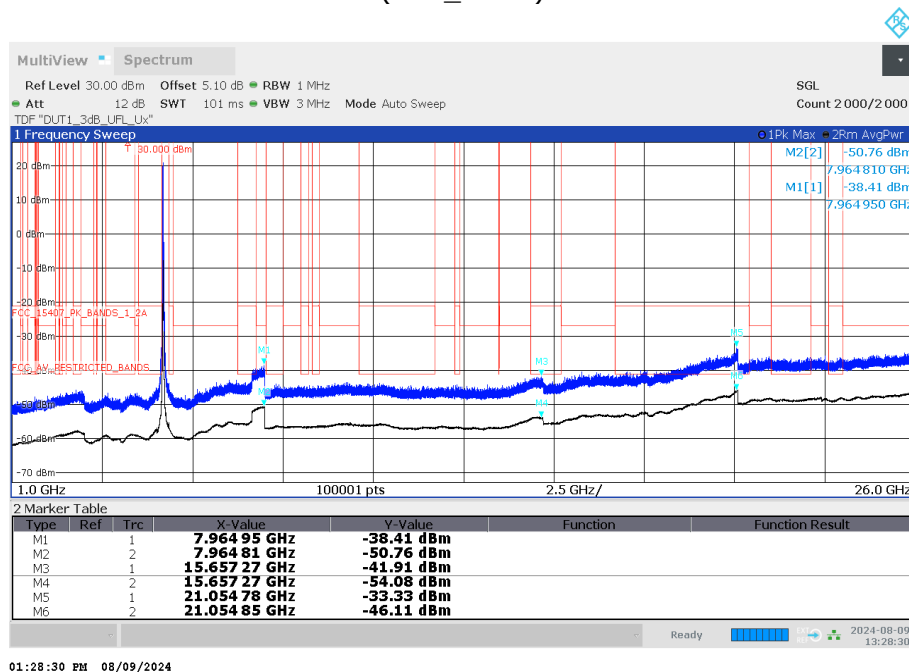


Radio Technology = WLAN ax 20 MHz, Operating Frequency = mid, Measurement range = 1GHz - 26GHz, Subband = U-NII-1 (S01_AD02)

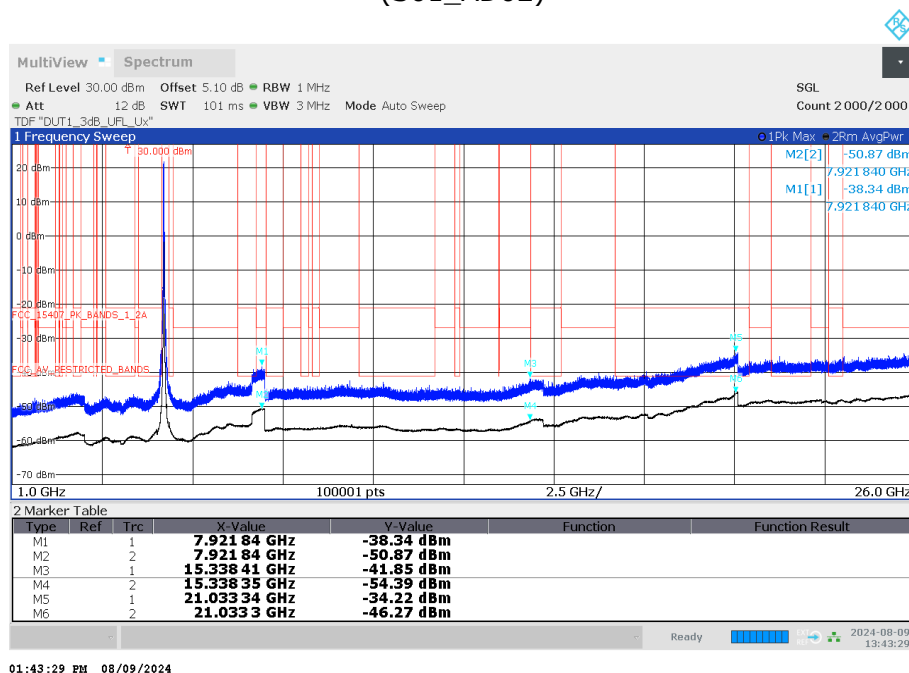


Radio Technology = WLAN ax 20 MHz, Operating Frequency = high, Measurement range = 1GHz - 26GHz, Subband = U-NII-1 (S01_AD02)

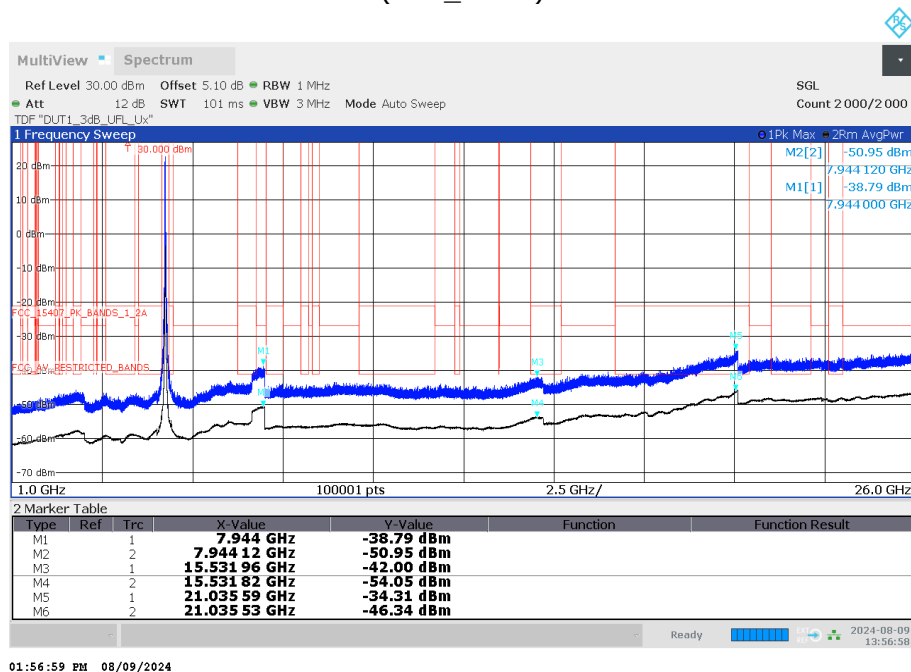


Radio Technology = WLAN ax 20 MHz, Operating Frequency = low, Measurement range = 1GHz - 26GHz, Subband = U-NII-2A (S01_AD02)

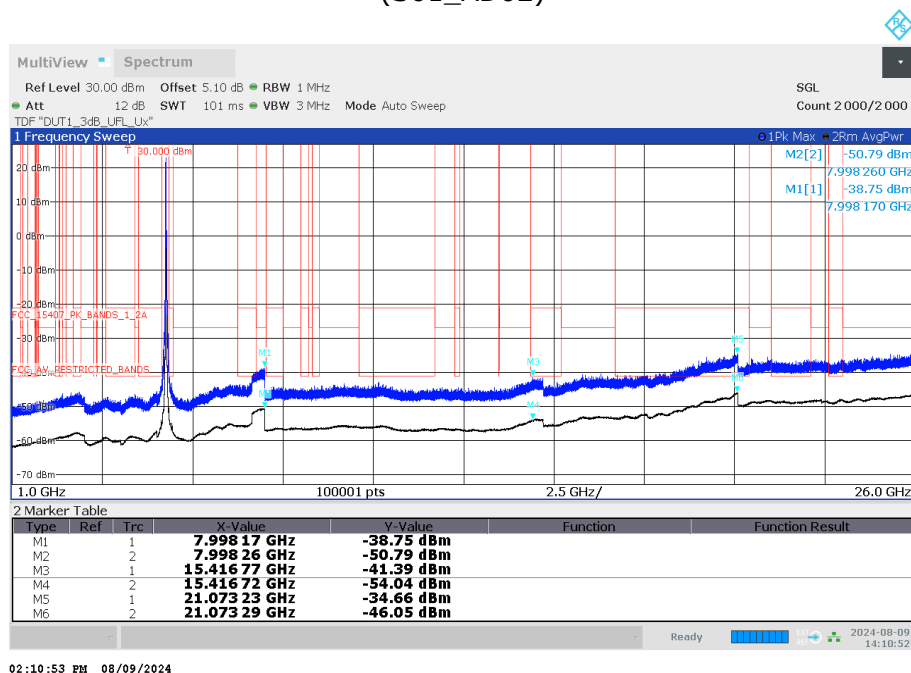


Radio Technology = WLAN ax 20 MHz, Operating Frequency = mid, Measurement range =
1GHz - 26GHz, Subband = U-NII-2A
(S01_AD02)

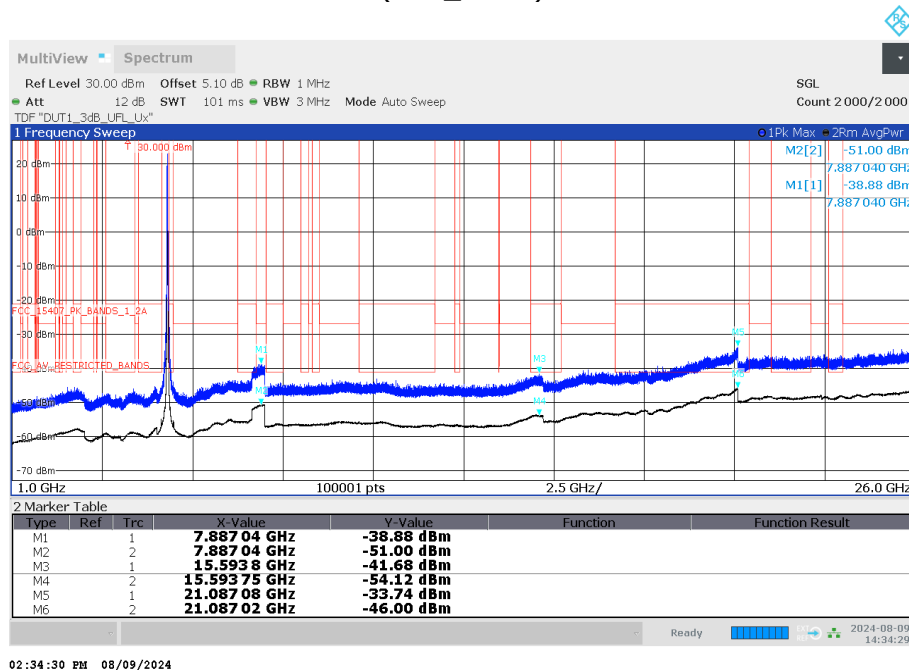


Radio Technology = WLAN ax 20 MHz, Operating Frequency = high, Measurement range =
1GHz - 26GHz, Subband = U-NII-2A
(S01_AD02)

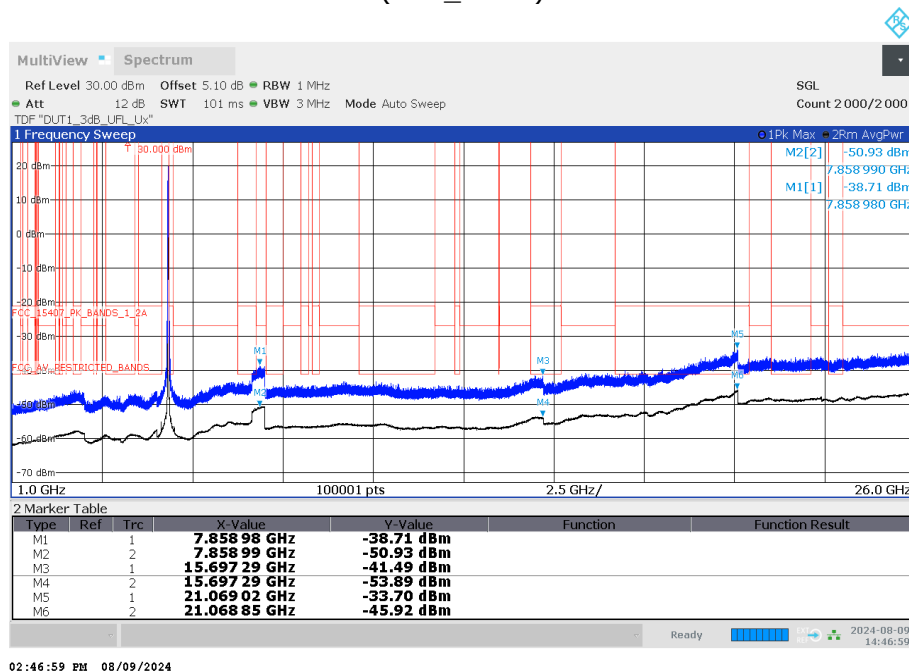


Radio Technology = WLAN ax 20 MHz, Operating Frequency = low, Measurement range =
1GHz - 26GHz, Subband = U-NII-2C
(S01_AD02)

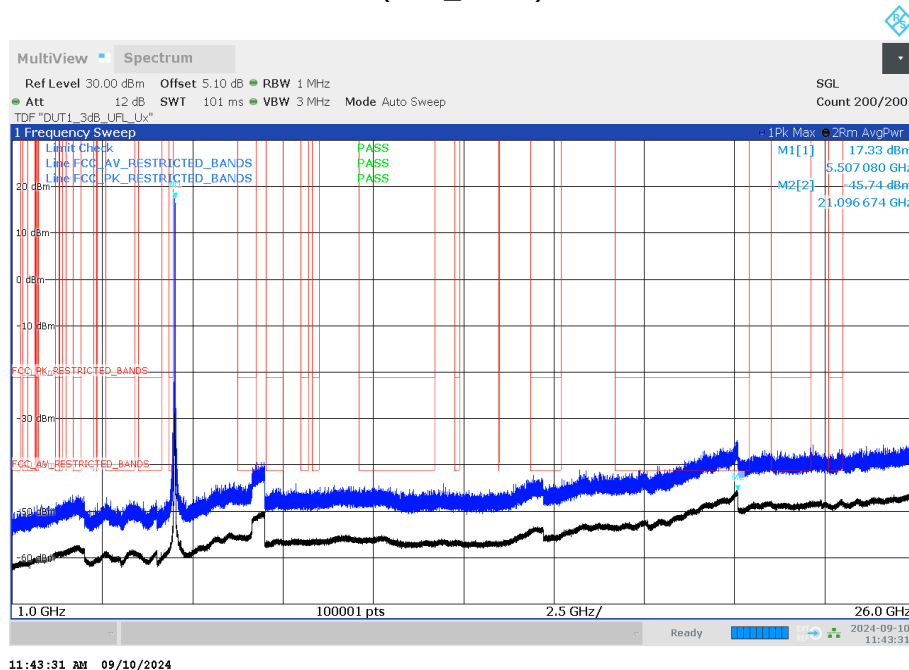


Radio Technology = WLAN ax 20 MHz, Operating Frequency = mid, Measurement range =
1GHz - 26GHz, Subband = U-NII-2C
(S01_AD02)

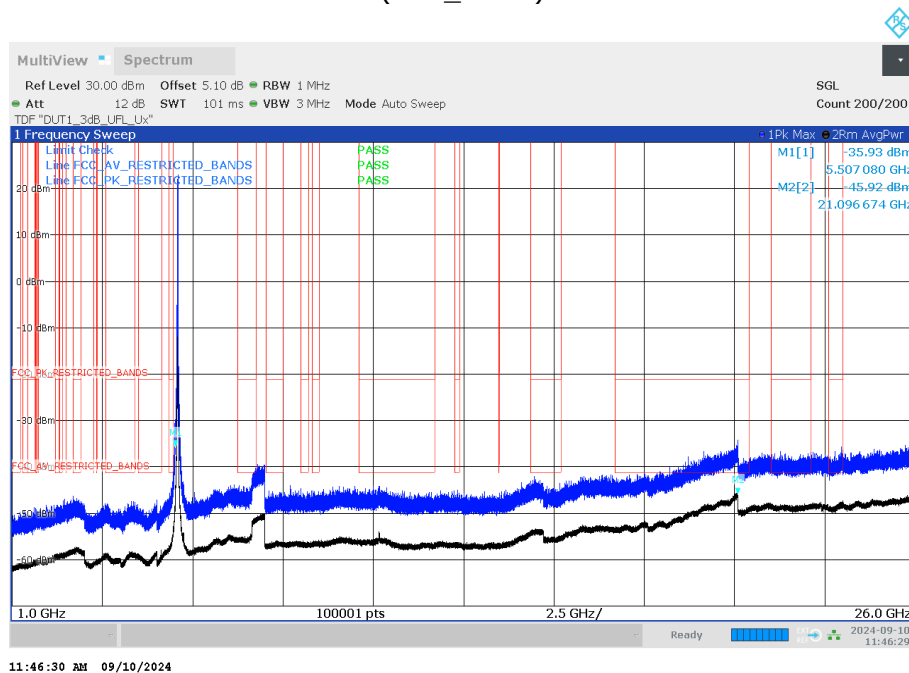


Radio Technology = WLAN ax 20 MHz, Operating Frequency = high, Measurement range =
1GHz - 26GHz, Subband = U-NII-2C
(S01_AD02)

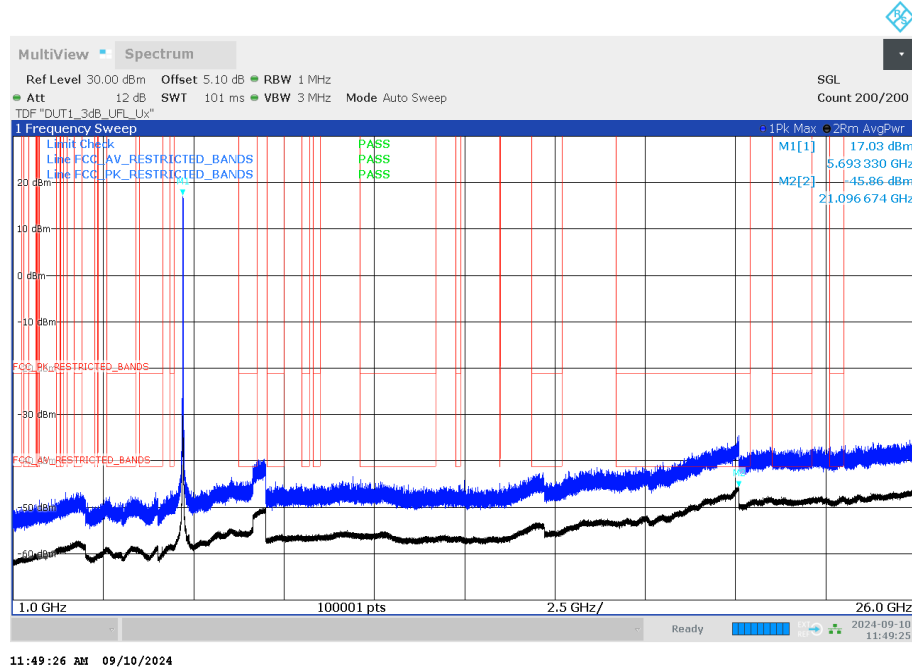


Radio Technology = WLAN ax 20 MHz, Operating Frequency = low, Measurement range =
1GHz - 26GHz, Subband = U-NII-3
(S01_AD02)

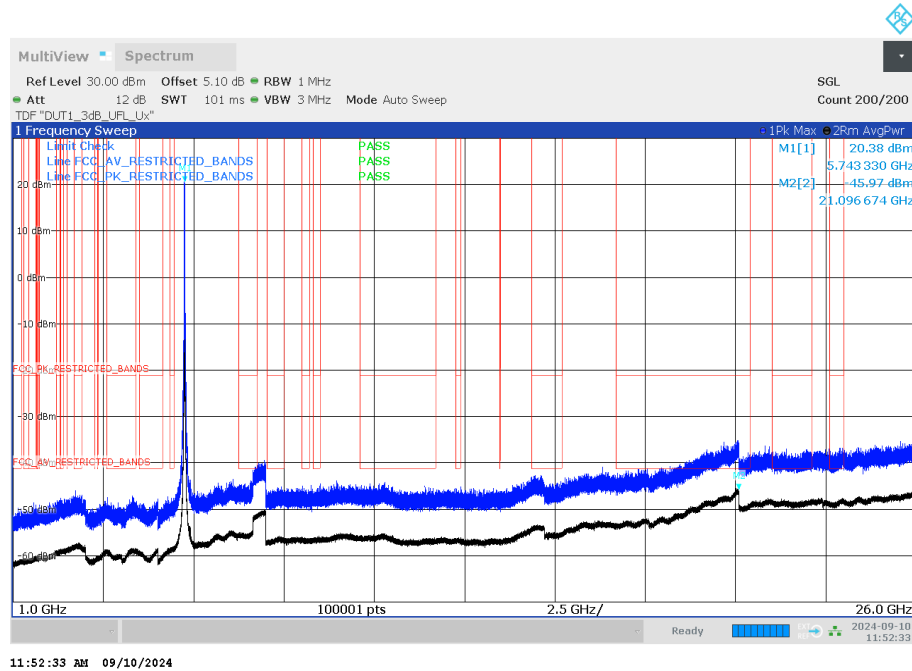


Radio Technology = WLAN ax 20 MHz, Operating Frequency = mid, Measurement range =
1GHz - 26GHz, Subband = U-NII-3
(S01_AD02)

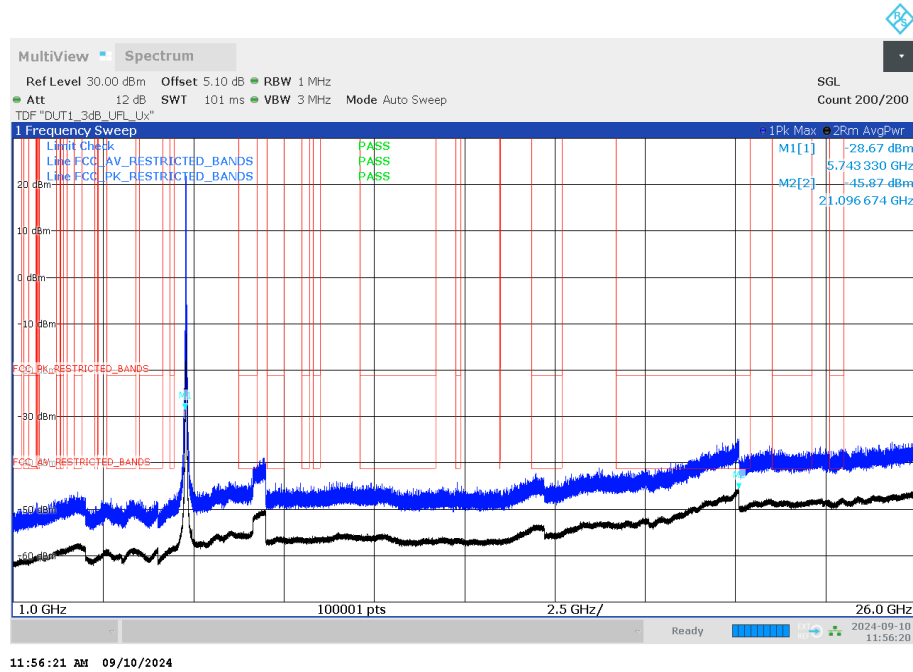

Radio Technology = WLAN ax 20 MHz, Operating Frequency = high, Measurement range =
1GHz - 26GHz, Subband = U-NII-3
(S01_AD02)

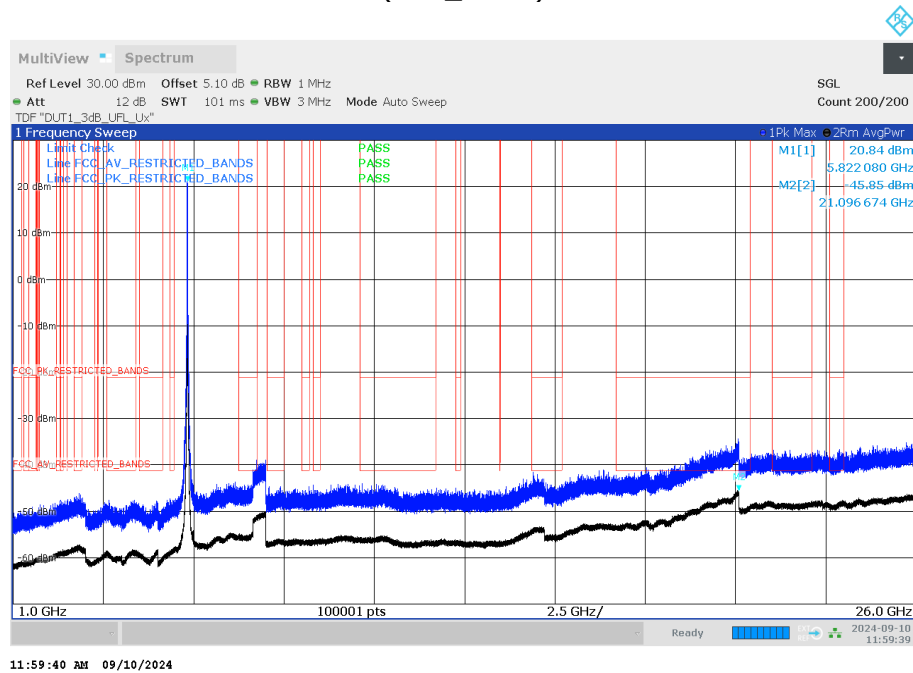


Radio Technology = WLAN ac 40 MHz, Operating Frequency = low, Measurement range =
1GHz - 26GHz, Subband = U-NII-1
(S01_AD02)

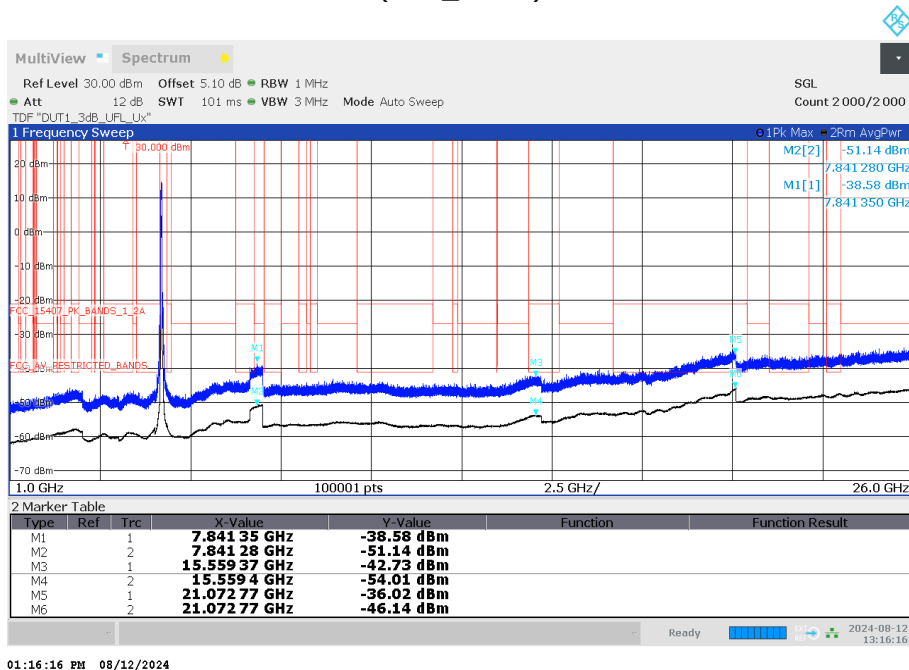


01:16:16 PM 08/12/2024

Radio Technology = WLAN ac 40 MHz, Operating Frequency = high, Measurement range =
1GHz - 26GHz, Subband = U-NII-1
(S01_AD02)

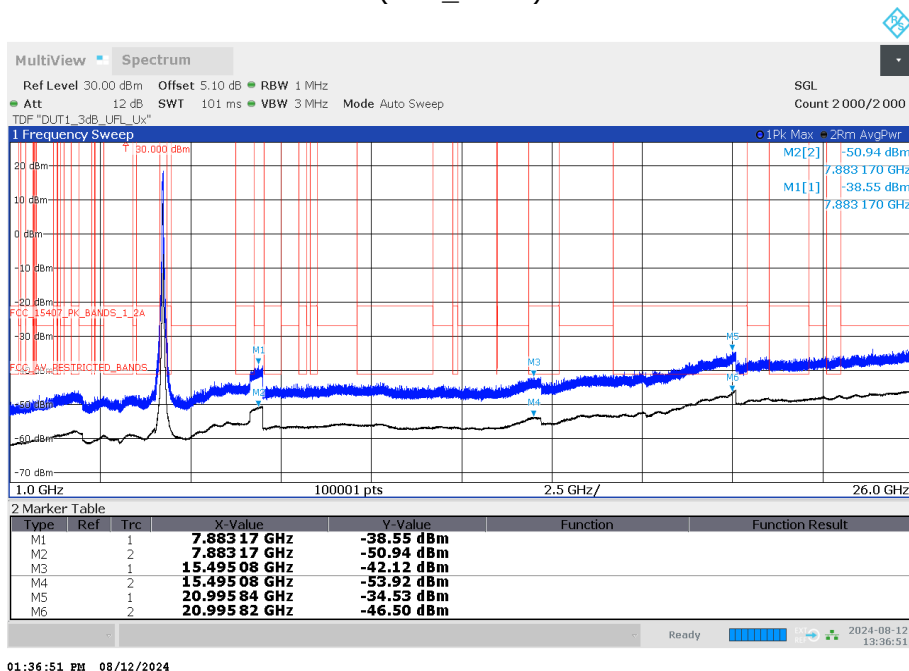


01:36:51 PM 08/12/2024

Radio Technology = WLAN ac 40 MHz, Operating Frequency = low, Measurement range =
1GHz - 26GHz, Subband = U-NII-2A
(S01_AD02)

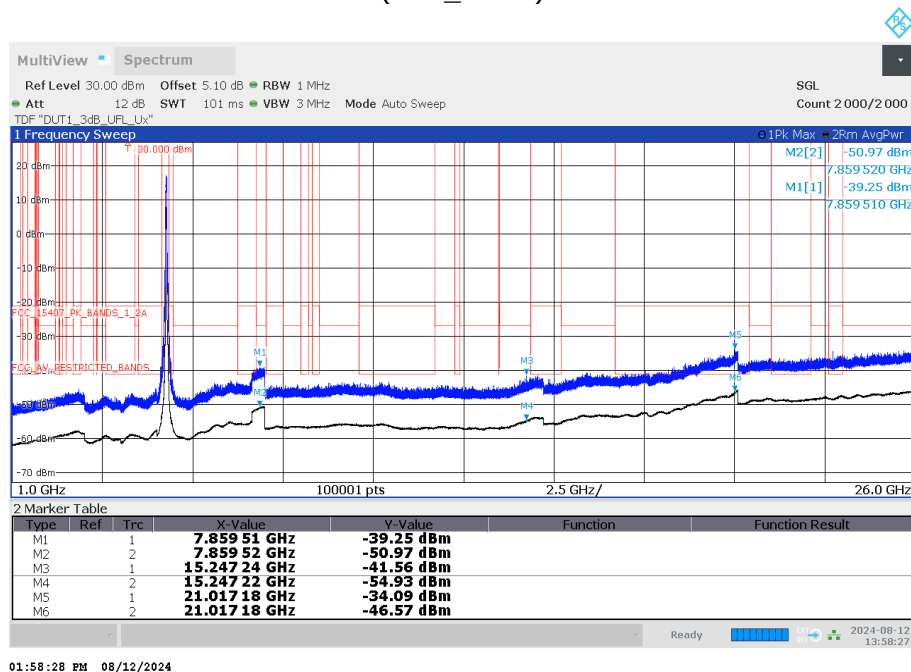


01:58:28 PM 08/12/2024

Radio Technology = WLAN ac 40 MHz, Operating Frequency = high, Measurement range =
1GHz - 26GHz, Subband = U-NII-2A
(S01_AD02)

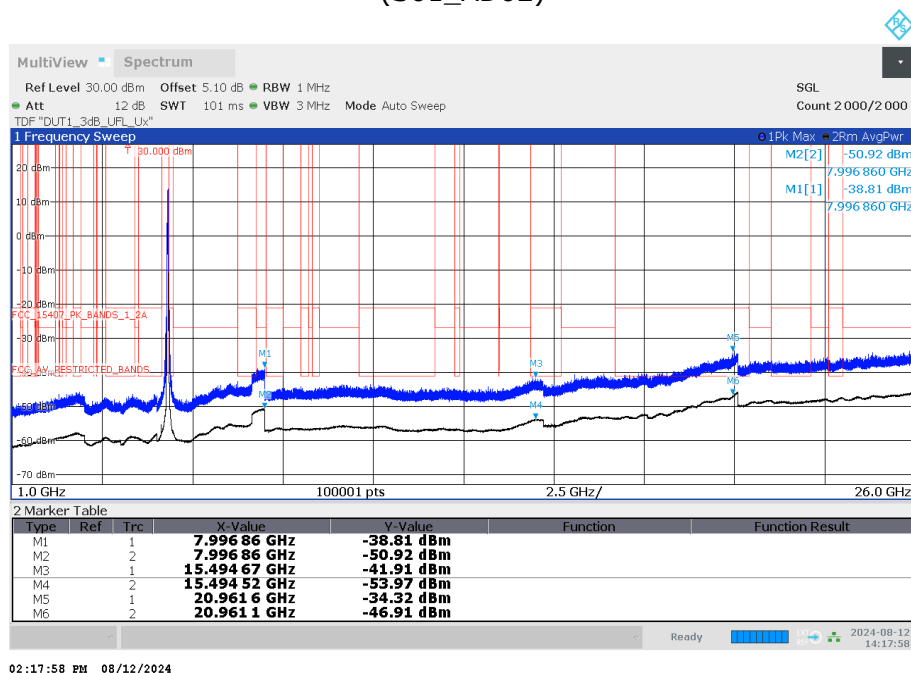


02:17:58 PM 08/12/2024


Radio Technology = WLAN ac 40 MHz, Operating Frequency = low, Measurement range =
1GHz - 26GHz, Subband = U-NII-2C
(S01_AD02)

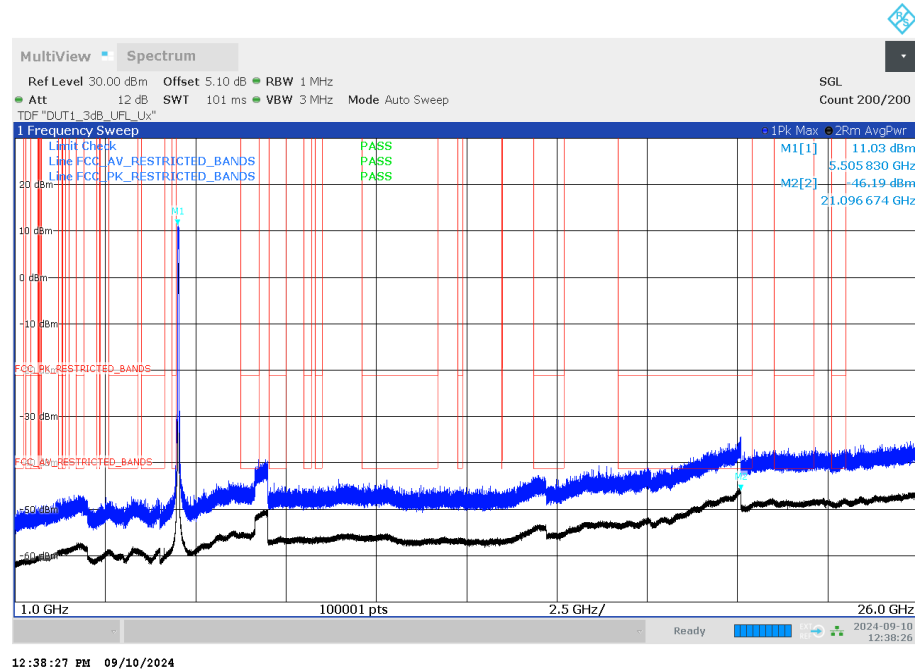


Radio Technology = WLAN ac 40 MHz, Operating Frequency = high, Measurement range =
1GHz - 26GHz, Subband = U-NII-2C
(S01_AD02)

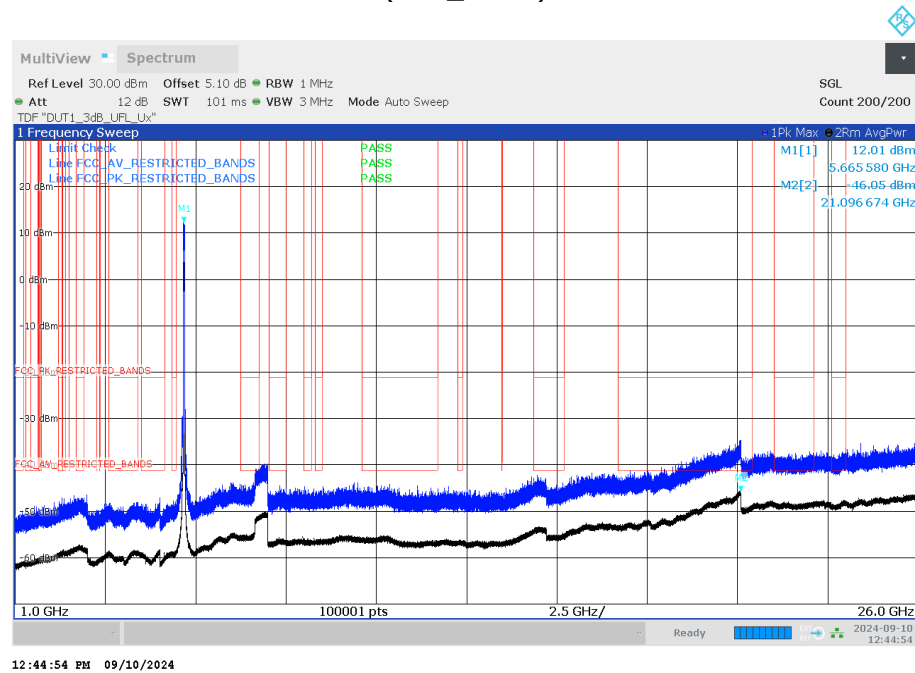


Radio Technology = WLAN ax 40 MHz, Operating Frequency = low, Measurement range =
1GHz - 26GHz, Subband = U-NII-1
(S01_AD02)

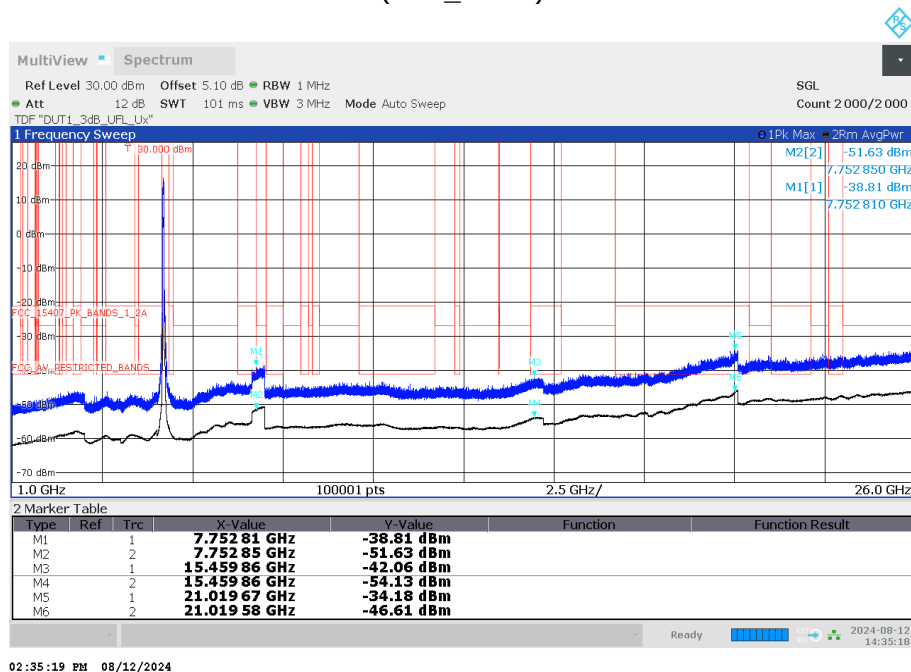


Radio Technology = WLAN ax 40 MHz, Operating Frequency = high, Measurement range =
1GHz - 26GHz, Subband = U-NII-1
(S01_AD02)

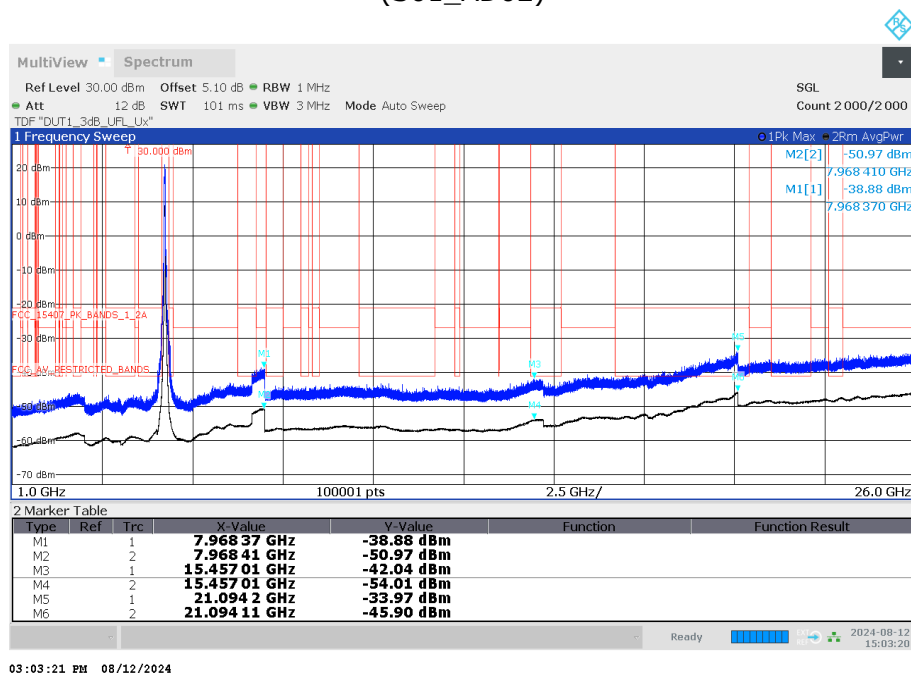


Radio Technology = WLAN ax 40 MHz, Operating Frequency = low, Measurement range =
1GHz - 26GHz, Subband = U-NII-2A
(S01_AD02)

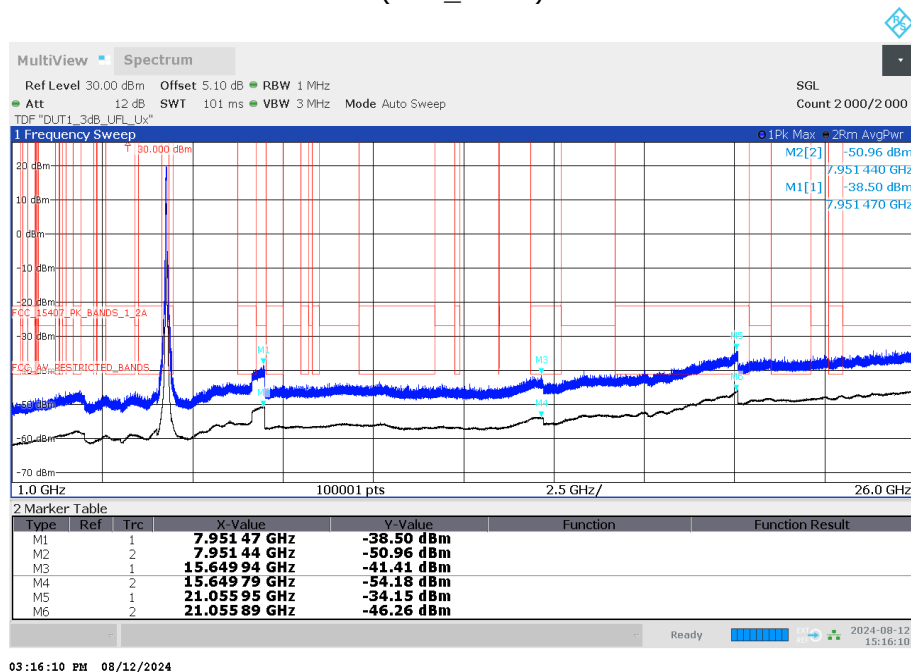


Radio Technology = WLAN ax 40 MHz, Operating Frequency = high, Measurement range =
1GHz - 26GHz, Subband = U-NII-2A
(S01_AD02)

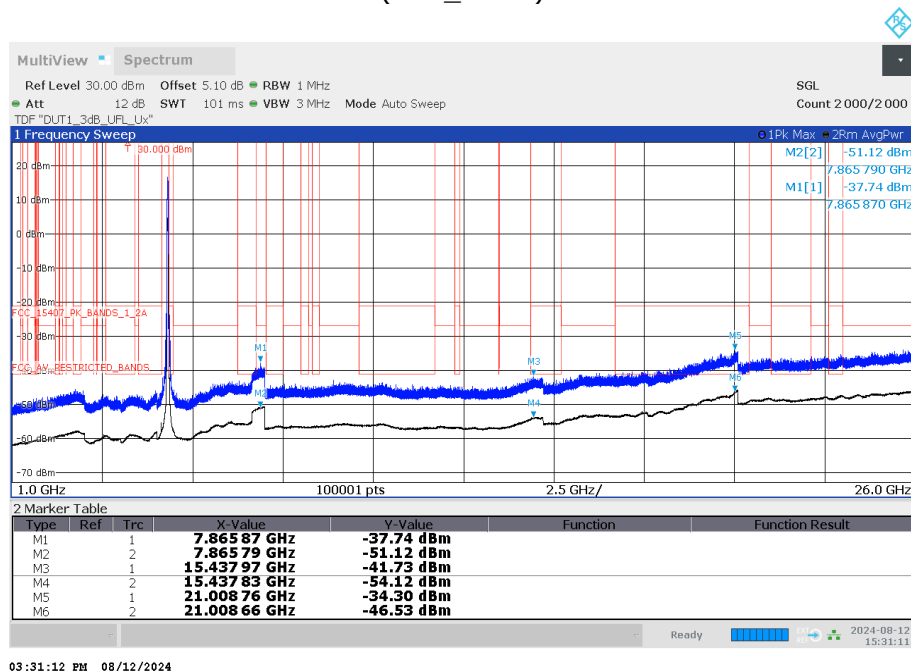


Radio Technology = WLAN ax 40 MHz, Operating Frequency = low, Measurement range =
1GHz - 26GHz, Subband = U-NII-2C
(S01_AD02)

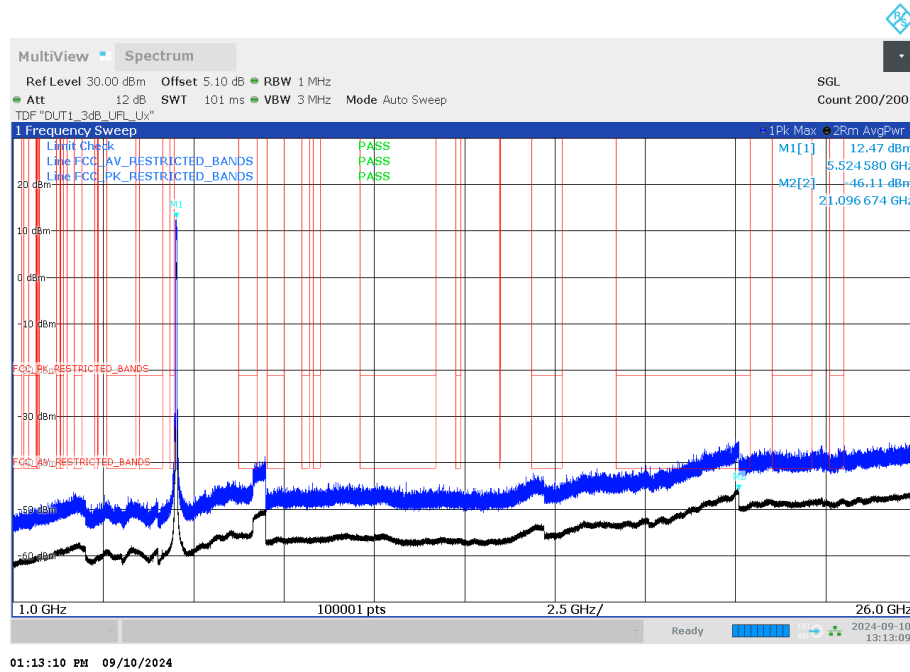

Radio Technology = WLAN ax 40 MHz, Operating Frequency = high, Measurement range =
1GHz - 26GHz, Subband = U-NII-2C
(S01_AD02)

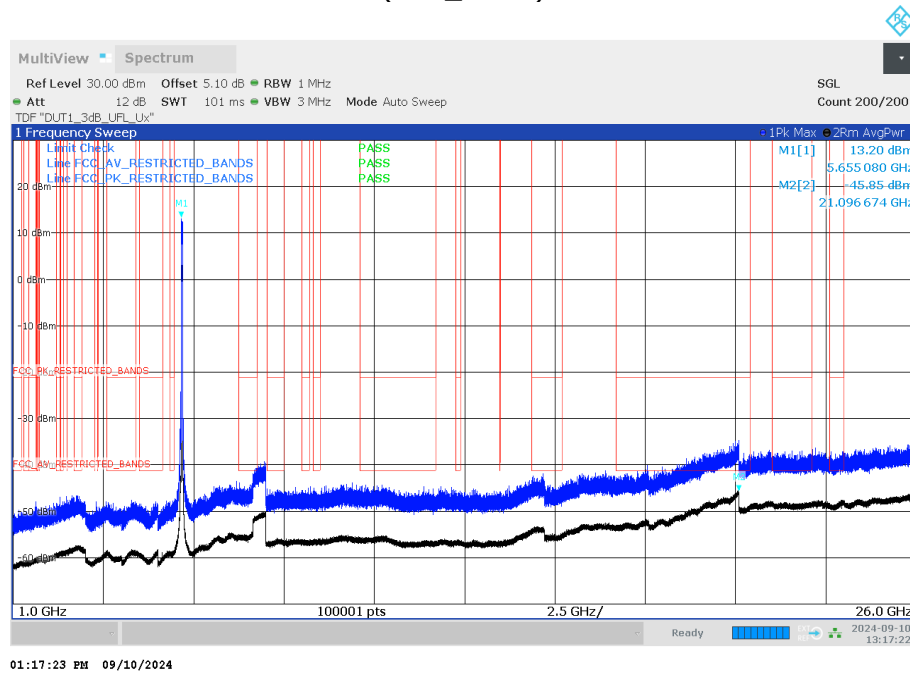


Radio Technology = WLAN n 20 MHz, Operating Frequency = low, Measurement range = 1GHz
- 26GHz, Subband = U-NII-1
(S01_AD02)

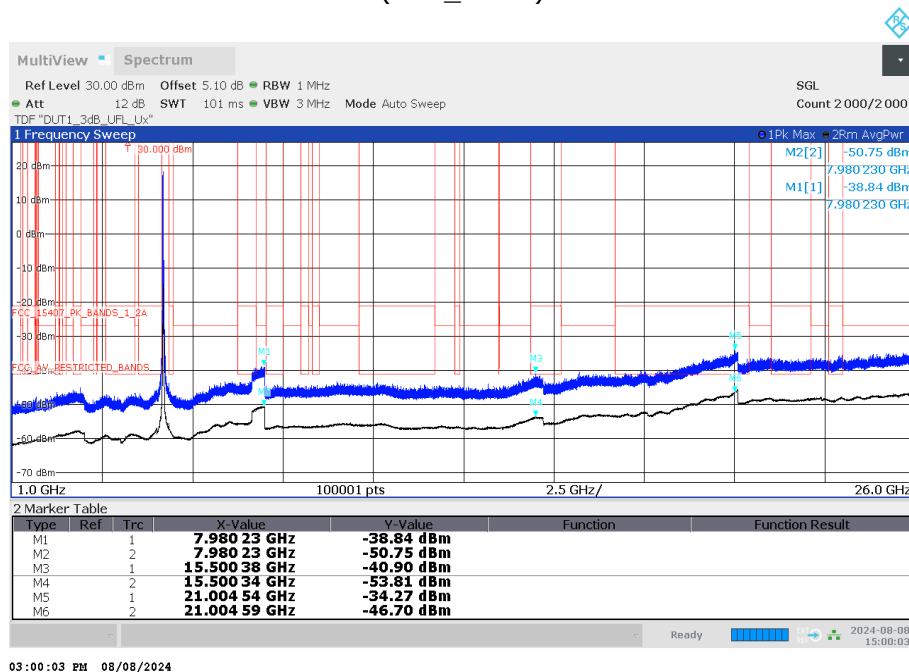


03:00:03 PM 08/08/2024

Radio Technology = WLAN n 20 MHz, Operating Frequency = mid, Measurement range = 1GHz
- 26GHz, Subband = U-NII-1
(S01_AD02)

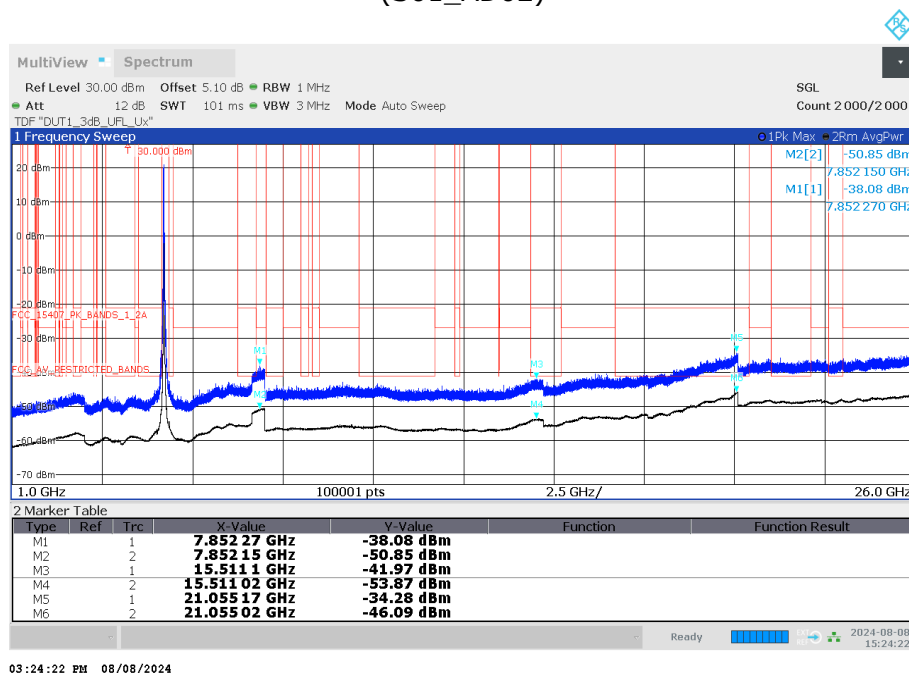


03:24:22 PM 08/08/2024


Radio Technology = WLAN n 20 MHz, Operating Frequency = high, Measurement range = 1GHz - 26GHz, Subband = U-NII-1 (S01_AD02)

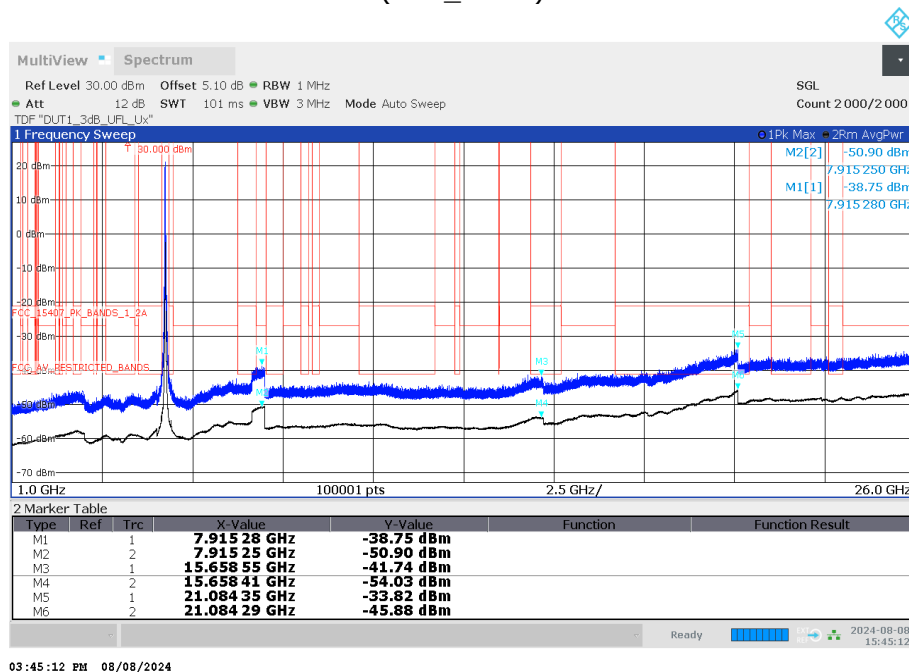

Radio Technology = WLAN n 20 MHz, Operating Frequency = low, Measurement range = 1GHz - 26GHz, Subband = U-NII-2A (S01_AD02)

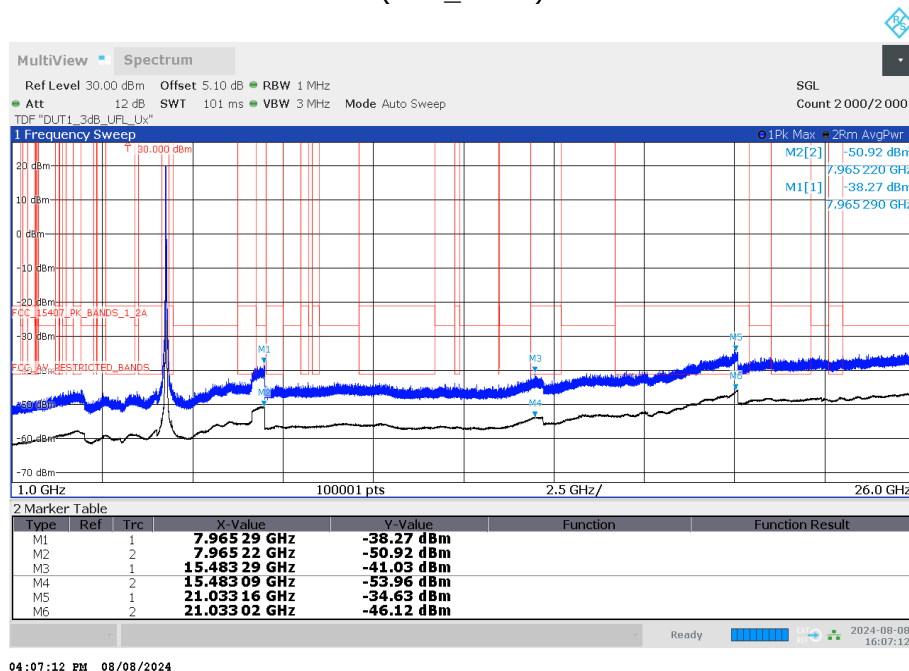


Radio Technology = WLAN n 20 MHz, Operating Frequency = mid, Measurement range = 1GHz
 - 26GHz, Subband = U-NII-2A
 (S01_AD02)

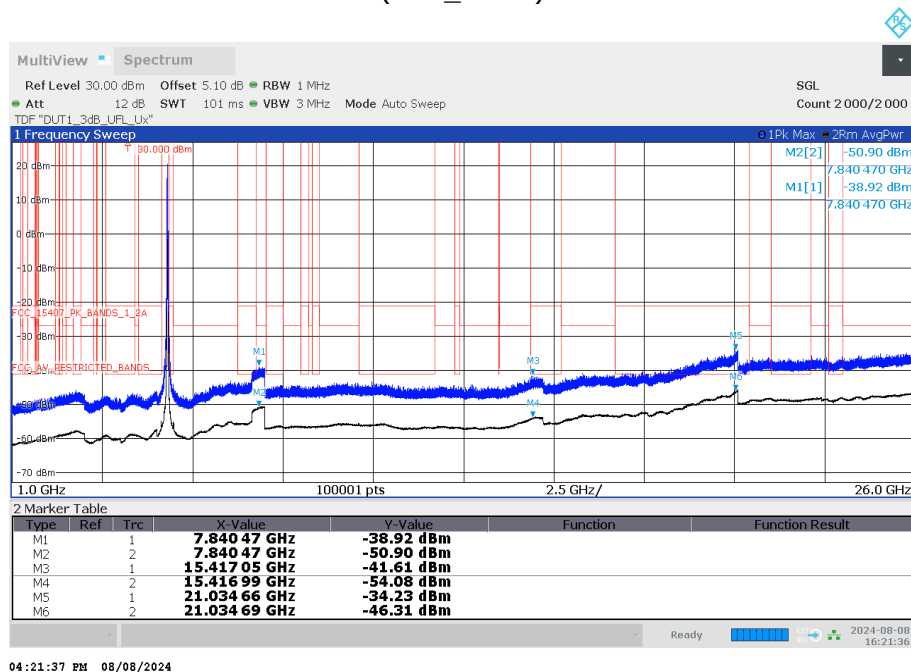


04:21:37 PM 08/08/2024

Radio Technology = WLAN n 20 MHz, Operating Frequency = low, Measurement range = 1GHz
 - 26GHz, Subband = U-NII-2C
 (S01_AD02)

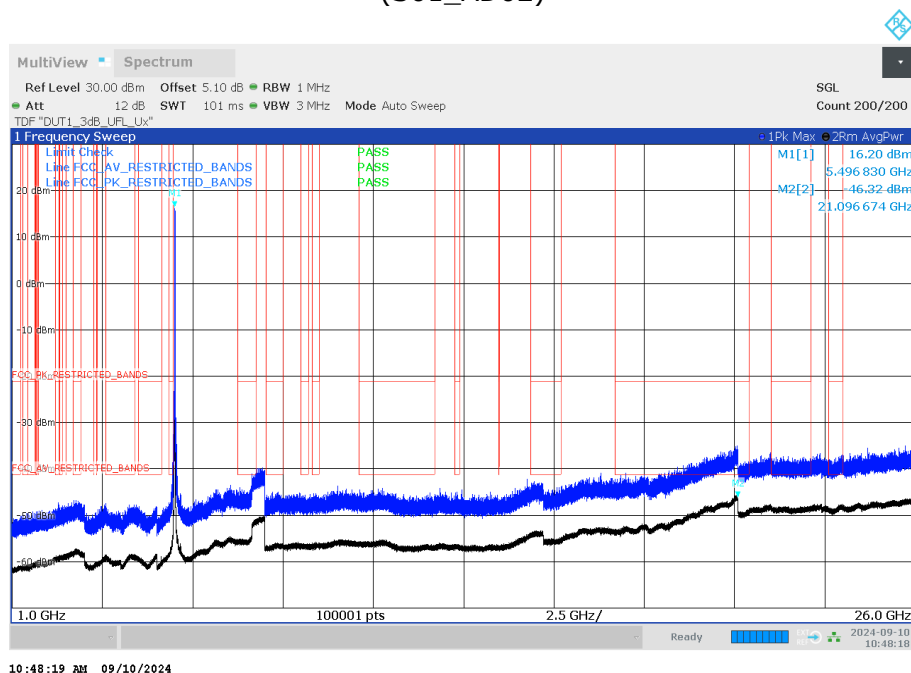


10:48:19 AM 09/10/2024


Radio Technology = WLAN n 20 MHz, Operating Frequency = mid, Measurement range = 1GHz
- 26GHz, Subband = U-NII-2C
(S01_AD02)

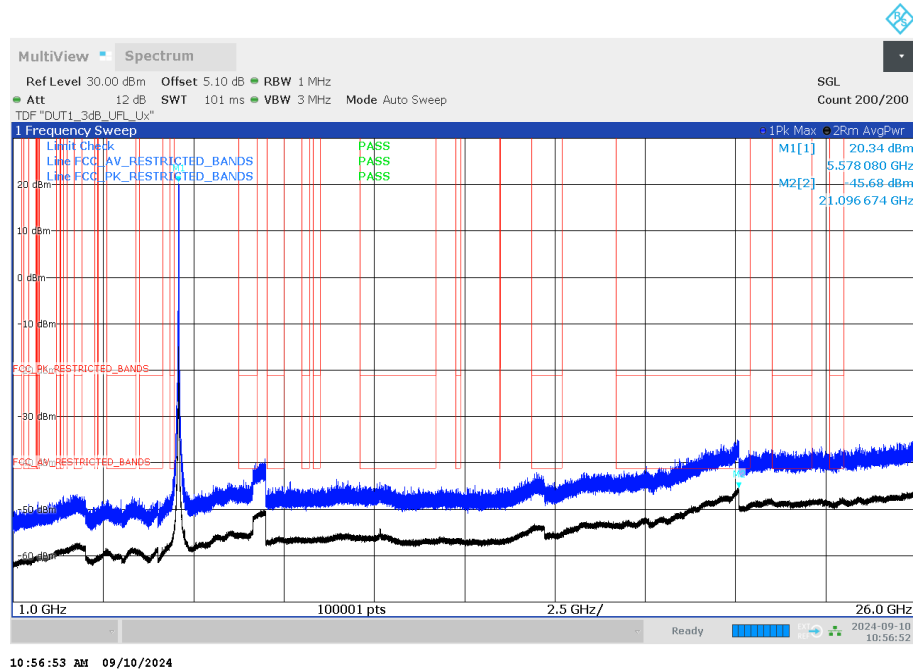


Radio Technology = WLAN n 20 MHz, Operating Frequency = high, Measurement range =
1GHz - 26GHz, Subband = U-NII-2C
(S01_AD02)

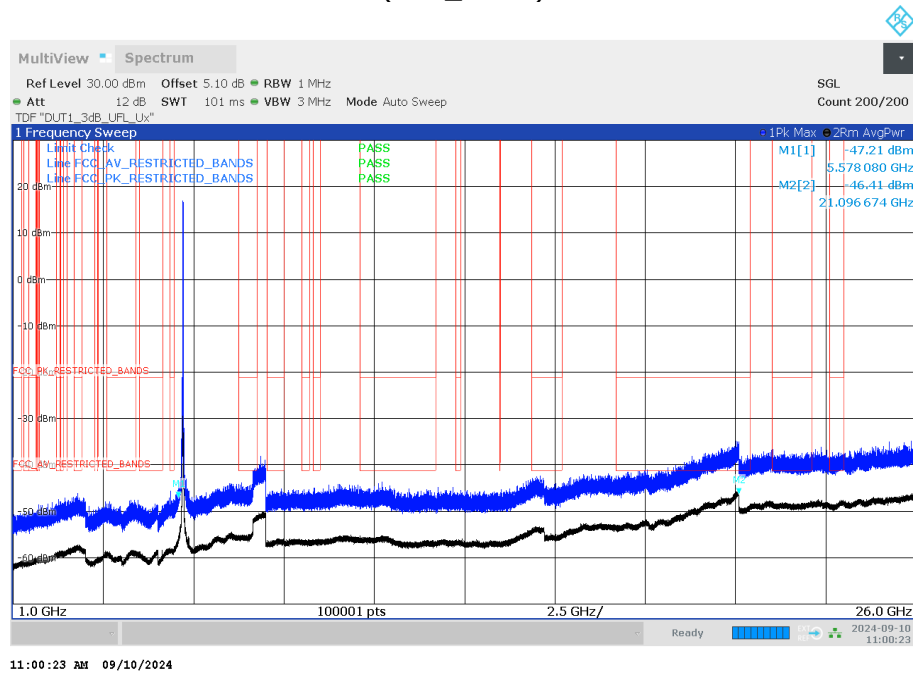


Radio Technology = WLAN n 20 MHz, Operating Frequency = low, Measurement range = 1GHz
- 26GHz, Subband = U-NII-3
(S01_AD02)

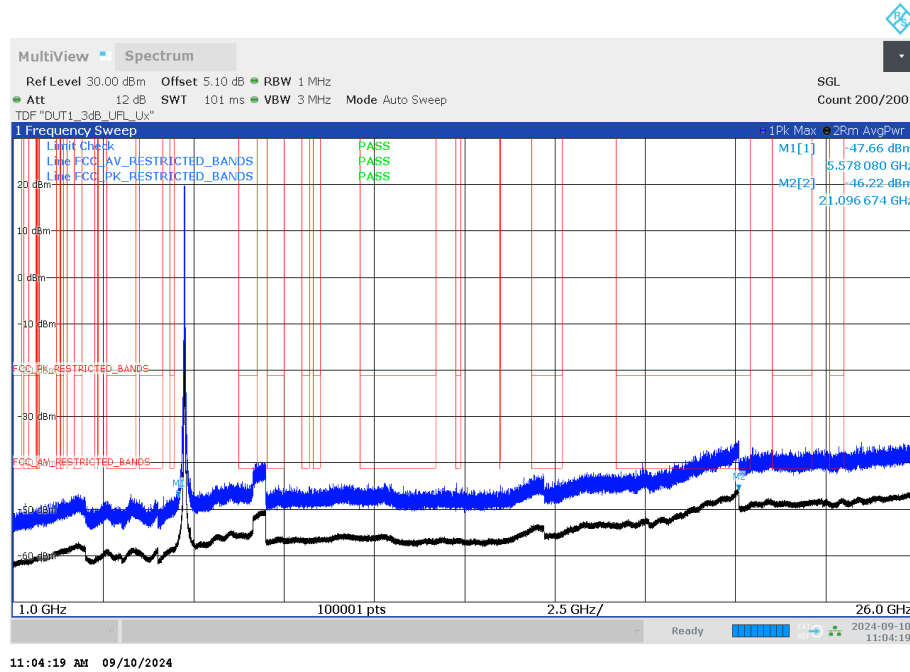


Radio Technology = WLAN n 20 MHz, Operating Frequency = mid, Measurement range = 1GHz
- 26GHz, Subband = U-NII-3
(S01_AD02)

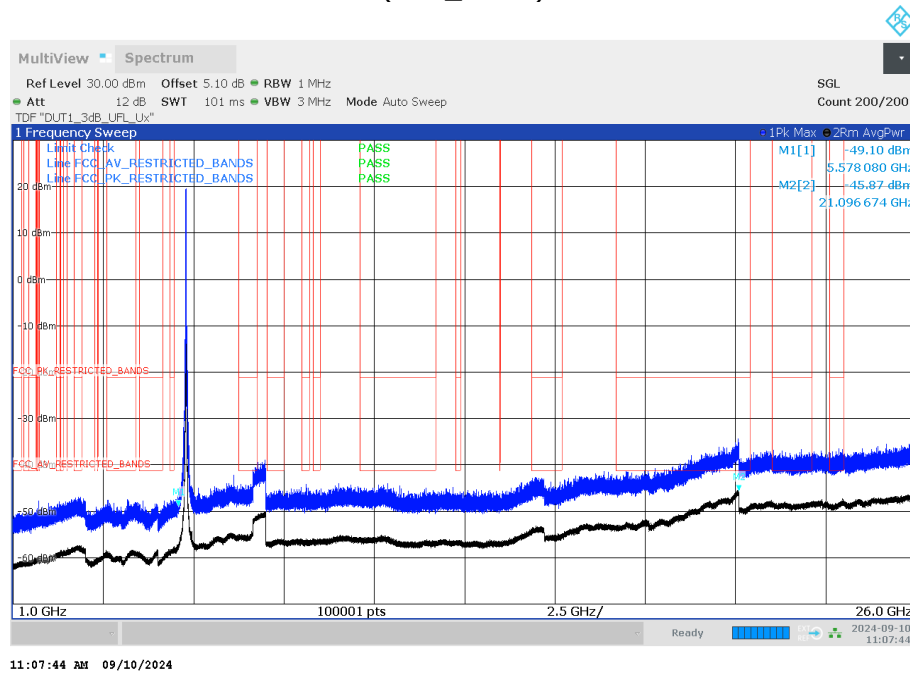


Radio Technology = WLAN n 20 MHz, Operating Frequency = high, Measurement range =
1GHz - 26GHz, Subband = U-NII-3
(S01_AD02)

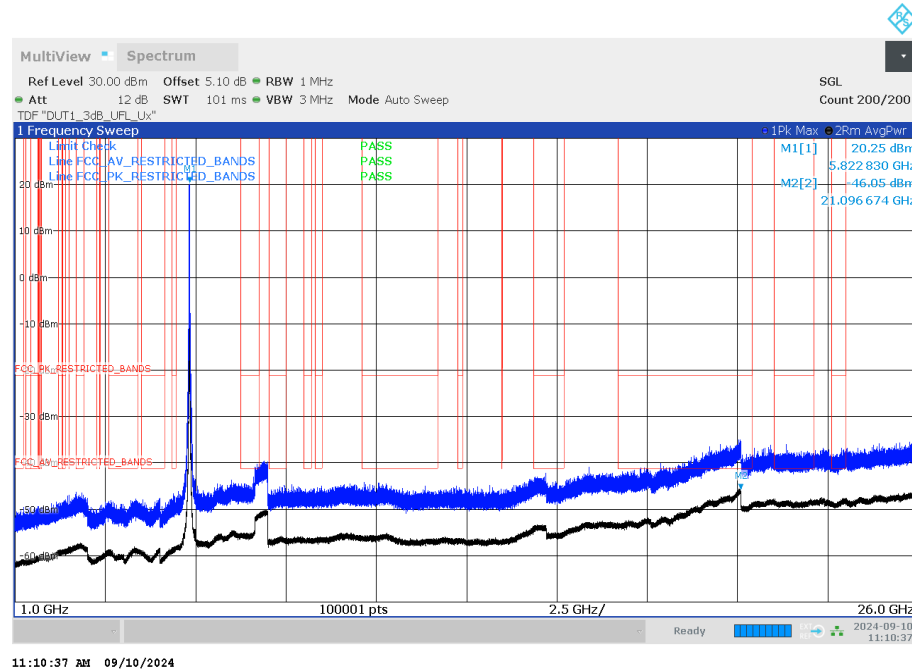

Radio Technology = WLAN ac 80 MHz, Operating Frequency = mid, Measurement range =
1GHz - 26GHz, Subband = U-NII-1
(S01_AD02)

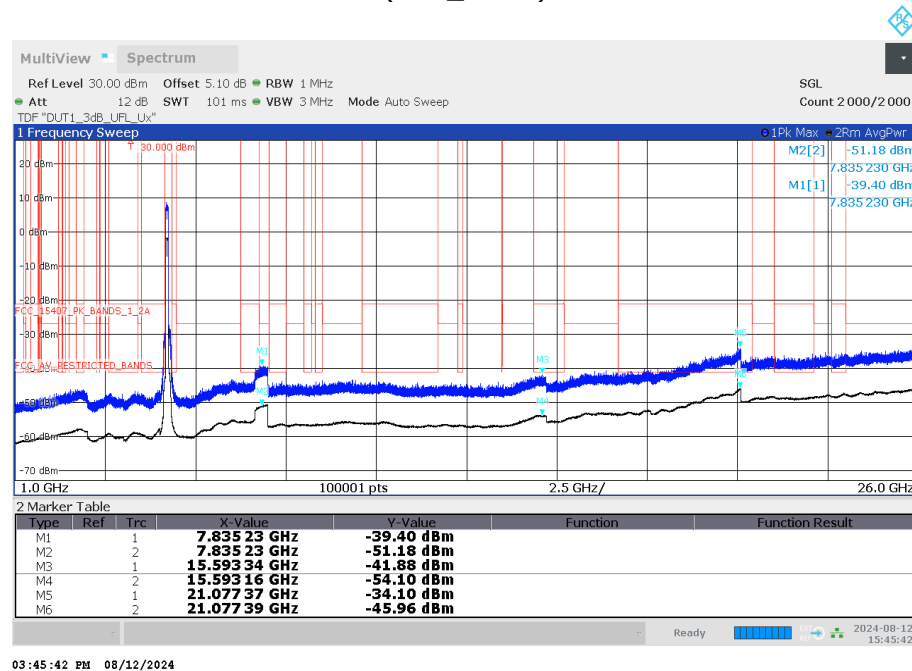


Radio Technology = WLAN ax 80 MHz, Operating Frequency = mid, Measurement range = 1GHz - 26GHz, Subband = U-NII-1 (S01_AD02)

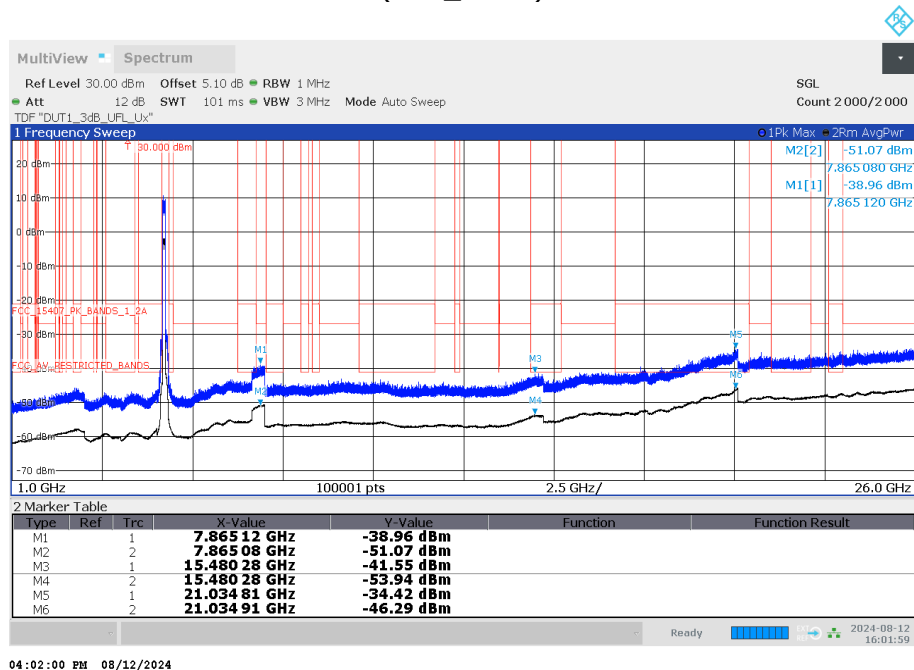


04:02:00 PM 08/12/2024

Radio Technology = WLAN n 40 MHz, Operating Frequency = low, Measurement range = 1GHz - 26GHz, Subband = U-NII-1 (S01_AD02)

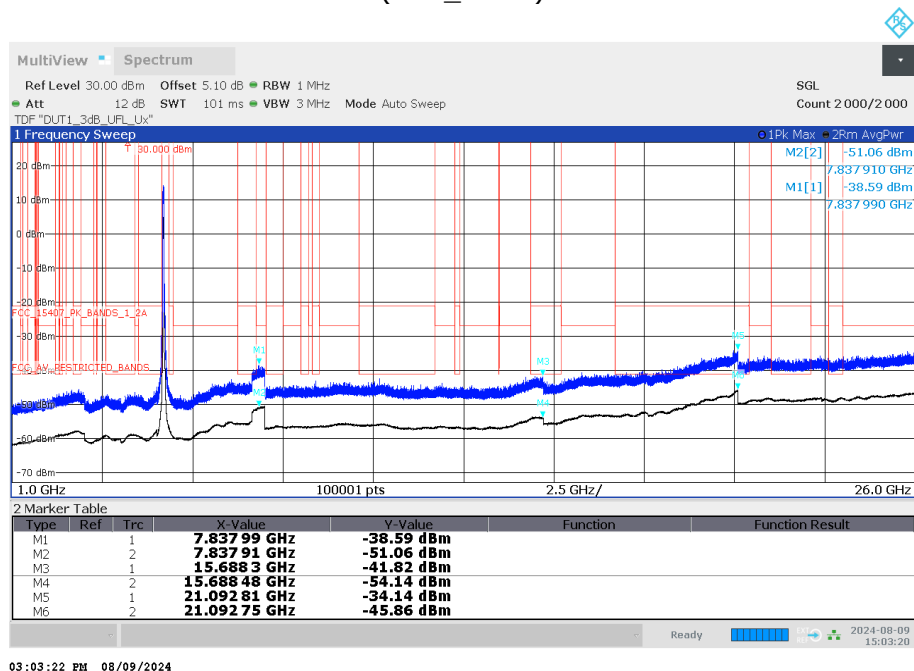


03:03:22 PM 08/09/2024

Radio Technology = WLAN n 40 MHz, Operating Frequency = high, Measurement range = 1GHz - 26GHz, Subband = U-NII-1 (S01_AD02)

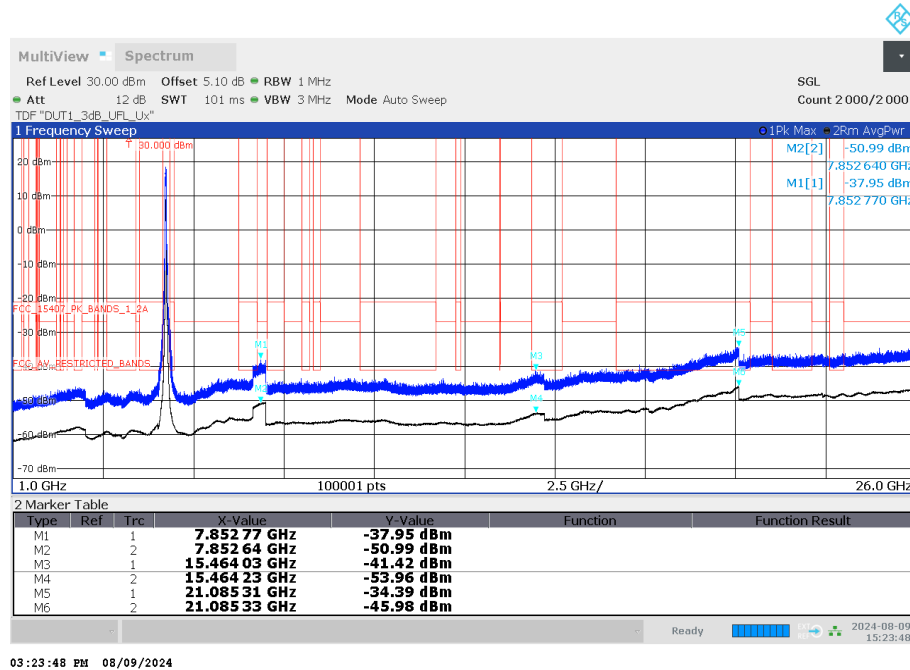


03:23:48 PM 08/09/2024

Radio Technology = WLAN n 40 MHz, Operating Frequency = low, Measurement range = 1GHz - 26GHz, Subband = U-NII-2A (S01_AD02)

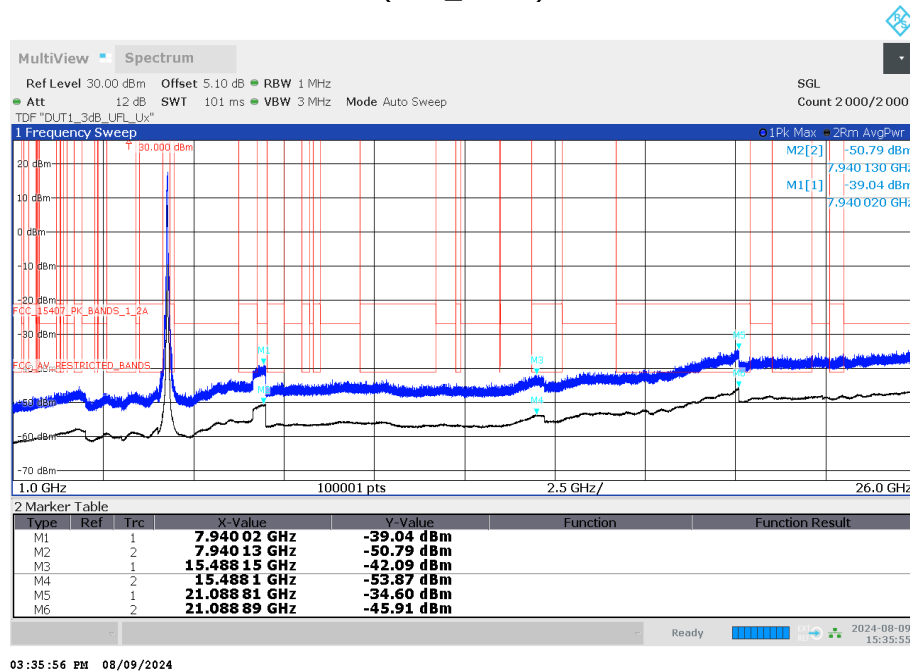


03:35:56 PM 08/09/2024


Radio Technology = WLAN n 40 MHz, Operating Frequency = high, Measurement range = 1GHz - 26GHz, Subband = U-NII-2A (S01_AD02)

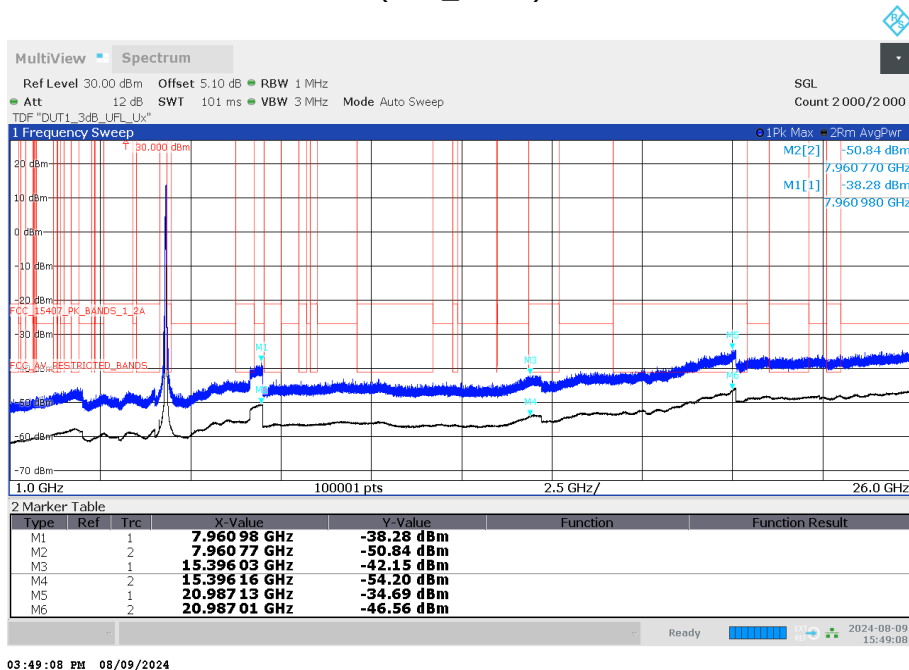

Radio Technology = WLAN n 40 MHz, Operating Frequency = low, Measurement range = 1GHz - 26GHz, Subband = U-NII-2C (S01_AD02)

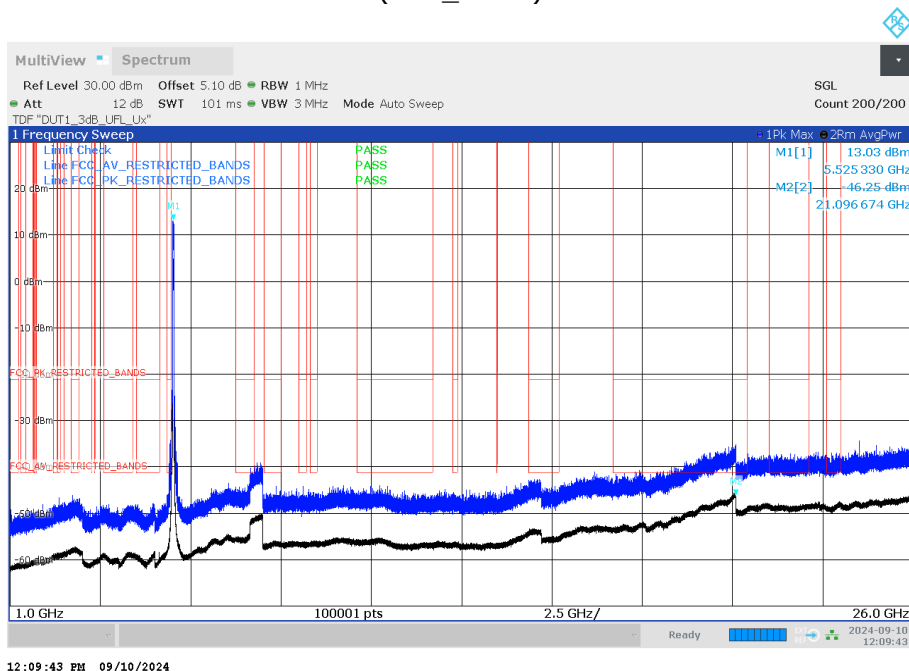

Radio Technology = WLAN n 40 MHz, Operating Frequency = high, Measurement range =
1GHz - 26GHz, Subband = U-NII-2C
(S01_AD02)

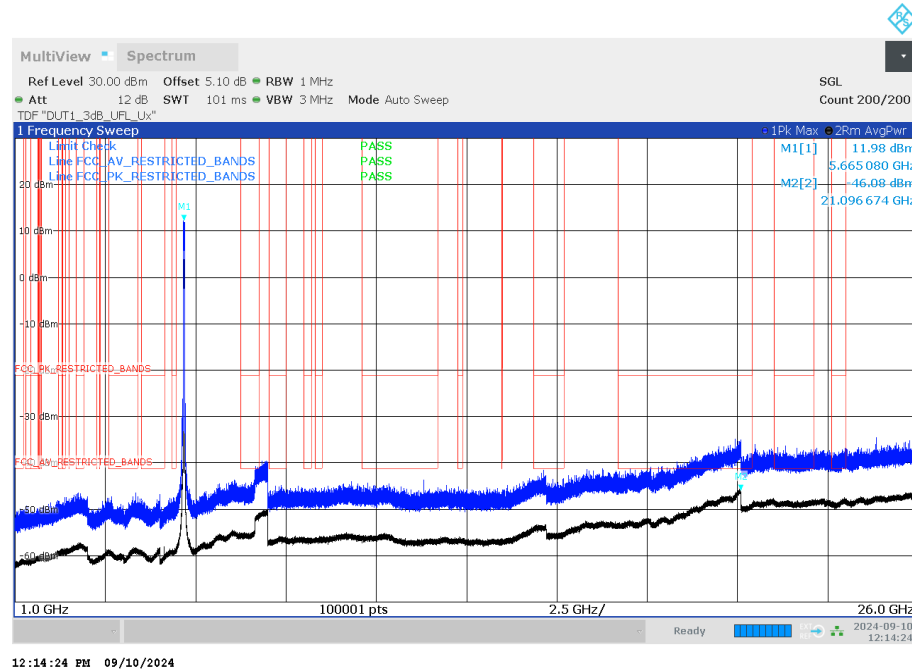

5.7.5 TEST EQUIPMENT USED

- Radiated Emissions SAC H-Field
- Radiated Emissions FAR 5 GHz FCC
- Radiated Emissions SAC up to 1 GHz
- R&S TS8997

5.8 BAND EDGE

Standard **FCC Part 15 Subpart E**

The test was performed according to:

ANSI C63.10, chapter 6.6.5

5.8.1 TEST DESCRIPTION


The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The measurements were performed according the following sub-chapter of ANSI C63.10:

- Chapter 6.10.5

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only (procedure according ANSI C63.10, chapter 6.6.5).

3. Measurement above 1 GHz

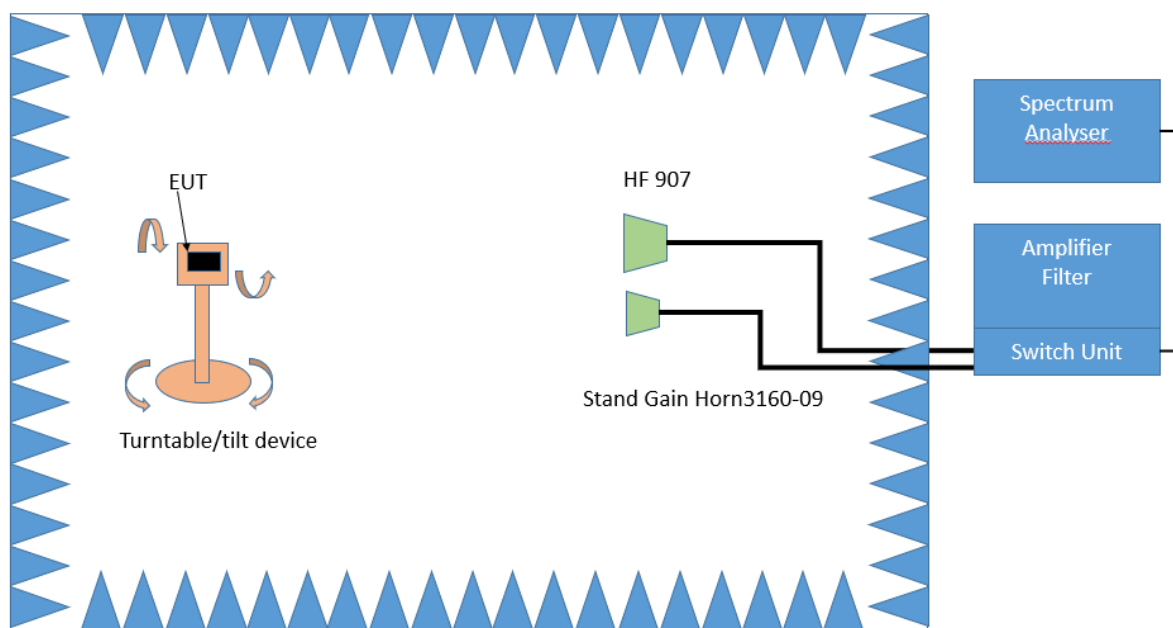

Test Setup; Spurious Emission Radiated (FAC), 1 GHz-26.5 GHz

Step 1:

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 90 °.

The turn table step size (azimuth angle) for the preliminary measurement is 45 °.

Spectrum analyser settings:

- Detector: Peak, Average
- RBW = 1 MHz
- VBW = 3 MHz

Step 2:

The turn table azimuth will slowly vary by $\pm 22.5^\circ$.

The elevation angle will slowly vary by $\pm 45^\circ$

Spectrum analyser settings:

- Detector: Peak

Step 3:



Spectrum analyser settings for step 3:

- Detector: Peak / CISPR Average
- Measured frequencies: in step 1 determined frequencies
- RBW = 1 MHz
- VBW = 3 MHz
- Measuring time: 1 s

Conducted Measurements at antenna ports

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

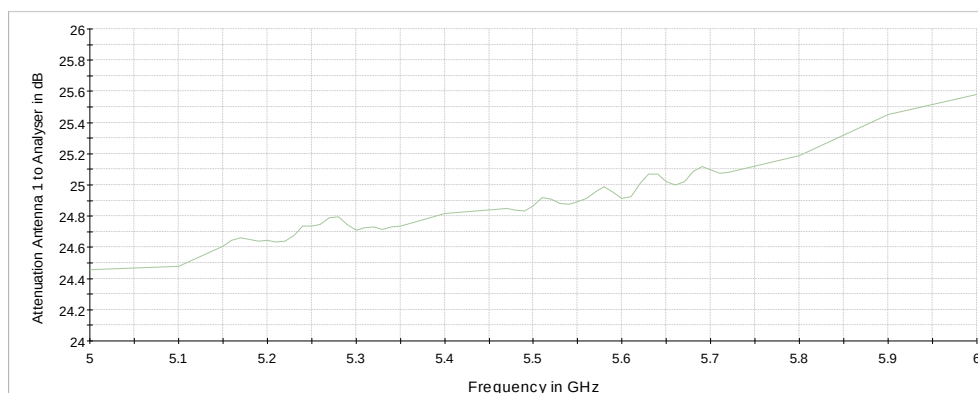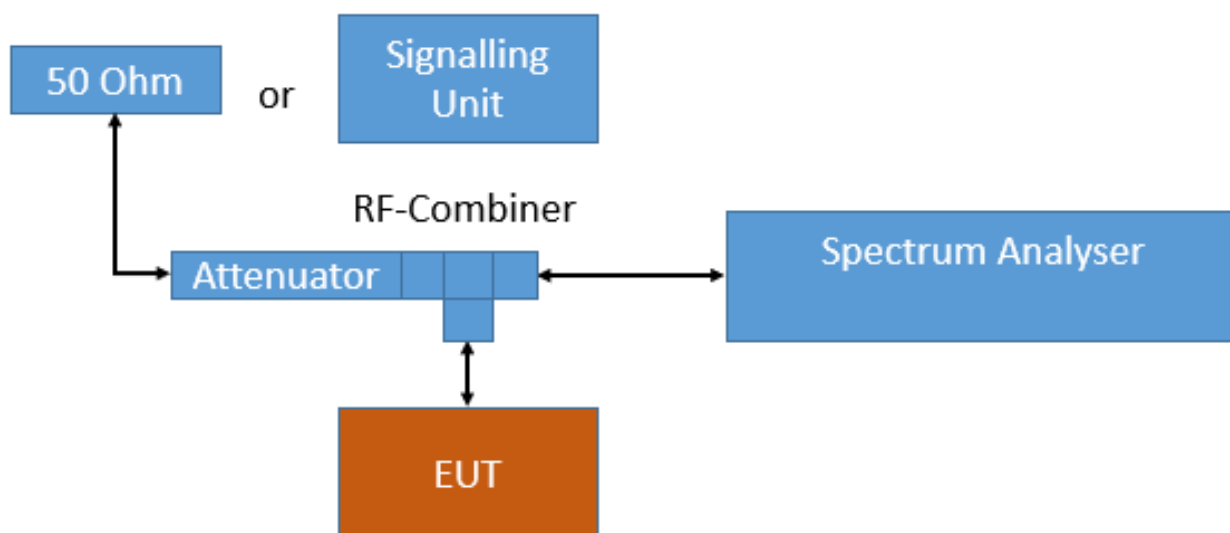

Analyser settings:

- Frequency range: 5100 – 5400 MHz (U-NII band 1/2A)
- 5430 – 5530 MHz (U-NII band 2C low BE)
- 5655 – 5755 MHz (U-NII band 2C high BE)

5611 – 5811 MHz (U-NII band 3 low BE)
 5765 – 5965 MHz (U-NII band 3 high BE)

- Resolution Bandwidth (RBW): 1000 kHz
- Video Bandwidth (VBW): 3000 kHz
- Trace: Maxhold, Average Power
- Sweeps: 10000
- Sweep Time: coupled
- Detector: Peak, RMS

For the conducted emissions in restricted bands the Value is measured in dBm and then converted to dBμV/m as given in KDB 558074:

1. Measure the conducted output power in dBm.
2. Add the maximum antenna gain in dBi. (Included in measurement result by offset)
3. Add the appropriate ground reflection factor (0 for measured range)
 - 6 dB for frequencies ≤ 30 MHz;
 - 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive; and
 - 0 dB for frequencies > 1000 MHz).
4. Convert the resultant EIRP level to an equivalent electric field strength level using the following relationship:
 - $E = \text{EIRP} - 20 \log D + 104.8$
 - Where E is the electric field strength in dBμV/m,
 - EIRP is the equivalent isotropically radiated power in dBm
 - D is the specified measurement distance in m

Value [dBμV/m] = Measured value [dBm] (including gain and ground reflection factor) – 20 log D + 104.8

5.8.2 TEST REQUIREMENTS / LIMITS

A) FCC

FCC Part 15 Subpart E, §15.407 (b)(1)

For transmitters operating in the 5150–5250 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E, §15.407 (b)(2)

For transmitters operating in the 5250–5350 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E, §15.407 (b)(3)

For transmitters operating in the 5470–5725 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5470–5725 MHz.

FCC Part 15 Subpart E, §15.407 (b)(4)

For transmitters operating in the 5725–5850 MHz band:

Limit: –27 dBm/MHz at 75 MHz or more above or below the band edge
 increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge
 increasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edge
 increasing linearly to 27 dBm/MHz at the band edge.

FCC Part 15 Subpart E, §15.407 (b) (5)

For transmitters operating within the 5.925–7.125 GHz band:

Limit: -27 dBm/MHz EIRP outside of the band 5.925-7.125 GHz.

FCC Part 15 Subpart E, §15.407 (b) (6)

For transmitters operating within the 5.925-7.125 GHz bands:

Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

B) IC

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1.2, Emissions outside the band 5150-5250 MHz, indoor operation only:

Limit: -27 dBm/MHz EIRP outside of the band 5150-5250 MHz.

RSS-247, 6.2.2.2, Emissions outside the band 5250-5350 MHz:

Limit: -27 dBm/MHz EIRP outside of the band 5250-5350 MHz.

RSS-247, 6.2.3.2, Emissions outside the bands 5470-5600 MHz and 5650-5725 MHz:

Limit: -27 dBm/MHz EIRP outside of the band 5470-5725 MHz.

However, devices with bandwidth overlapping the band edge of 5725 MHz can meet the emission limit of -27 dBm/MHz e.i.r.p. at 5850 MHz instead of 5725 MHz.

Note: No operation is permitted for the frequency range 5600-5650 MHz.

RSS-247, 6.2.4.2, Emissions outside the band 5725-5850 MHz:

- 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 Bm/MHz at 5 MHz above or below the band edges;
- 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- 27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

C) FCC & IC

For band edges connected to a restricted band, the limits are specified in Section 15.209(a)

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
------------------	--------------	--------------------------	-----------------

30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 - 26000	500@3m	3	54.0@3m
26000 - 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: $\text{Limit (dB}\mu\text{V/m)} = 20 \log (\text{Limit } (\mu\text{V/m})/1\mu\text{V/m})$

5.8.3 TEST PROTOCOL

Ambient temperature: 30 °C
 Air Pressure: 1000 hPa
 Humidity: 51 %
 WLAN a-Mode; 20 MHz; 6 Mbit/s
 Applied duty cycle correction (AV): 0.1 dB

U-NII-Subband	Meas. Method	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detec-tor	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	Radiated	5180	5150.0	56.3	PEAK	1000	74.0	17.7	BE-RB	FCC&IC
1	Radiated	5180	5150.0	43.8	AV	1000	54.0	10.2	BE-RB	FCC&IC
2A	Radiated	5320	5350.0	57.3	PEAK	1000	74.0	16.7	BE-RB	FCC&IC
2A	Radiated	5320	5350.0	44.1	AV	1000	54.0	9.9	BE-RB	FCC&IC
2C	Radiated	5500	5460.0	57.4	PEAK	1000	74.0	16.6	BE-RB	FCC&IC
2C	Radiated	5500	5460.0	44.6	AV	1000	54.0	9.4	BE-RB	FCC&IC
2C	Radiated	5500	5470.0	57.5	PEAK	1000	68.2	10.7	BE-UE	FCC&IC
2C	Radiated	5700	5725.0	57.0	PEAK	1000	68.2	11.2	BE-UE	FCC&IC
3	Radiated	5825	5850.0	60.9	PEAK	1000	120.3	59.4	BE-UE	FCC&IC

WLAN ac-Mode; 80 MHz; MCS 0; SISO
 Applied duty cycle correction (AV): 0.1 dB

U-NII-Subband	Meas. Method	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detec-tor	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
3	Radiated	5775	5725.0	58.0	PEAK	1000	121.9	63.9	BE-UE	FCC&IC
3	Radiated	5775	5850.0	57.6	PEAK	1000	108.9	51.3	BE-UE	FCC&IC

Ambient temperature: 22 - 27 °C
 Air Pressure: 1001 - 1015 hPa
 Humidity: 39 - 56 %
 WLAN a-Mode; 20 MHz; 6 Mbit/s
 Applied duty cycle correction (AV): 0.1 dB

U-NII-Subband	Meas. Method	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detec-tor	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	Conducted	5180	5150.0	64.3	PEAK	1000	74.0	9.7	BE-RB	FCC&IC
1	Conducted	5180	5150.0	47.0	AV	1000	54.0	7.0	BE-RB	FCC&IC
2A	Conducted	5320	5350.0	71.4	PEAK	1000	74.0	2.6	BE-RB	FCC&IC
2A	Conducted	5320	5350.0	51.0	AV	1000	54.0	3.0	BE-RB	FCC&IC
2C	Conducted	5500	5460.0	61.7	PEAK	1000	74.0	12.3	BE-RB	FCC&IC
2C	Conducted	5500	5460.0	43.5	AV	1000	54.0	10.5	BE-RB	FCC&IC
2C	Conducted	5500	5470.0	63.8	PEAK	1000	68.2	4.4	BE-UE	FCC&IC
2C	Conducted	5520	5460.0	63.6	PEAK	1000	74.0	10.4	BE-RB	FCC&IC
2C	Conducted	5520	5460.0	46.4	AV	1000	54.0	7.6	BE-RB	FCC&IC
2C	Conducted	5520	5470.0	67.5	PEAK	1000	68.2	0.7	BE-UE	FCC&IC
2C	Conducted	5540	5460.0	60.8	PEAK	1000	74.0	13.2	BE-RB	FCC&IC
2C	Conducted	5540	5460.0	46.0	AV	1000	54.0	8.0	BE-RB	FCC&IC
2C	Conducted	5540	5470.0	61.8	PEAK	1000	68.2	6.4	BE-UE	FCC&IC
2C	Conducted	5680	5725.0	64.7	PEAK	1000	68.2	3.5	BE-UE	FCC&IC
2C	Conducted	5700	5725.0	66.6	PEAK	1000	68.2	1.6	BE-UE	FCC&IC
3	Conducted	5745	5725.0	83.7	PEAK	1000	122.2	38.5	BE-UE	FCC&IC
3	Conducted	5825	5850.0	77.8	PEAK	1000	122.2	44.4	BE-UE	FCC&IC

WLAN n-Mode; 20 MHz; MCS 0; SISO
Applied duty cycle correction (AV): 0 dB

U-NII-Subband	Meas. Method	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	Conducted	5180	5150.0	68.9	PEAK	1000	74.0	5.1	BE-RB	FCC&IC
1	Conducted	5180	5150.0	48.0	AV	1000	54.0	6.0	BE-RB	FCC&IC
2A	Conducted	5320	5350.0	67.5	PEAK	1000	74.0	6.5	BE-RB	FCC&IC
2A	Conducted	5320	5350.0	47.1	AV	1000	54.0	6.9	BE-RB	FCC&IC
2C	Conducted	5500	5460.0	62.8	PEAK	1000	74.0	11.2	BE-RB	FCC&IC
2C	Conducted	5500	5460.0	43.8	AV	1000	54.0	10.2	BE-RB	FCC&IC
2C	Conducted	5500	5470.0	64.4	PEAK	1000	68.2	3.8	BE-UE	FCC&IC
2C	Conducted	5520	5460.0	63.7	PEAK	1000	74.0	10.3	BE-RB	FCC&IC
2C	Conducted	5520	5460.0	44.2	AV	1000	54.0	9.8	BE-RB	FCC&IC
2C	Conducted	5520	5470.0	66.8	PEAK	1000	68.2	1.4	BE-UE	FCC&IC
2C	Conducted	5540	5460.0	62.0	PEAK	1000	74.0	12.0	BE-RB	FCC&IC
2C	Conducted	5540	5460.0	46.0	AV	1000	54.0	8.0	BE-RB	FCC&IC
2C	Conducted	5540	5470.0	65.7	PEAK	1000	68.2	2.5	BE-UE	FCC&IC
2C	Conducted	5660	5725.0	62.1	PEAK	1000	68.2	6.1	BE-UE	FCC&IC
2C	Conducted	5680	5725.0	65.6	PEAK	1000	68.2	2.6	BE-UE	FCC&IC
2C	Conducted	5700	5725.0	67.6	PEAK	1000	68.2	0.6	BE-UE	FCC&IC
3	Conducted	5745	5725.0	83.4	PEAK	1000	122.2	38.8	BE-UE	FCC&IC
3	Conducted	5825	5850.0	81.1	PEAK	1000	122.2	41.1	BE-UE	FCC&IC

WLAN n-Mode; 40 MHz; MCS 0; SISO
Applied duty cycle correction (AV): 0 dB

U-NII-Subband	Meas. Method	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	Conducted	5190	5150.0	72.5	PEAK	1000	74.0	1.5	BE-RB	FCC&IC
1	Conducted	5190	5150.0	52.8	AV	1000	54.0	1.2	BE-RB	FCC&IC
2A	Conducted	5310	5350.0	70.7	PEAK	1000	74.0	3.3	BE-RB	FCC&IC
2A	Conducted	5310	5350.0	53.2	AV	1000	54.0	0.8	BE-RB	FCC&IC
2C	Conducted	5510	5460.0	64.9	PEAK	1000	74.0	9.1	BE-RB	FCC&IC
2C	Conducted	5510	5460.0	47.6	AV	1000	54.0	6.4	BE-RB	FCC&IC
2C	Conducted	5510	5470.0	67.3	PEAK	1000	68.2	0.9	BE-UE	FCC&IC
2C	Conducted	5670	5725.0	60.7	PEAK	1000	68.2	7.5	BE-UE	FCC&IC
3	Conducted	5755	5725.0	86.4	PEAK	1000	122.2	35.8	BE-UE	FCC&IC
3	Conducted	5795	5850.0	74.1	PEAK	1000	122.2	48.1	BE-UE	FCC&IC

WLAN ac-Mode; 20 MHz; MCS 0; SISO
Applied duty cycle correction (AV): 0 dB

U-NII-Subband	Meas. Method	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	Conducted	5180	5150.0	70.0	PEAK	1000	74.0	4.0	BE-RB	FCC&IC
1	Conducted	5180	5150.0	48.2	AV	1000	54.0	5.8	BE-RB	FCC&IC
2A	Conducted	5320	5350.0	68.0	PEAK	1000	74.0	6.0	BE-RB	FCC&IC
2A	Conducted	5320	5350.0	47.4	AV	1000	54.0	6.6	BE-RB	FCC&IC
2C	Conducted	5500	5460.0	64.5	PEAK	1000	74.0	9.5	BE-RB	FCC&IC
2C	Conducted	5500	5460.0	45.5	AV	1000	54.0	8.5	BE-RB	FCC&IC
2C	Conducted	5500	5470.0	65.3	PEAK	1000	68.2	2.9	BE-UE	FCC&IC
2C	Conducted	5520	5460.0	65.1	PEAK	1000	74.0	8.9	BE-RB	FCC&IC
2C	Conducted	5520	5460.0	44.7	AV	1000	54.0	9.3	BE-RB	FCC&IC
2C	Conducted	5520	5470.0	67.4	PEAK	1000	68.2	0.8	BE-UE	FCC&IC
2C	Conducted	5540	5460.0	62.4	PEAK	1000	74.0	11.6	BE-RB	FCC&IC
2C	Conducted	5540	5460.0	46.0	AV	1000	54.0	8.0	BE-RB	FCC&IC
2C	Conducted	5540	5470.0	65.1	PEAK	1000	68.2	3.1	BE-UE	FCC&IC
2C	Conducted	5660	5725.0	62.0	PEAK	1000	68.2	6.2	BE-UE	FCC&IC
2C	Conducted	5680	5725.0	66.1	PEAK	1000	68.2	2.1	BE-UE	FCC&IC
2C	Conducted	5700	5725.0	66.5	PEAK	1000	68.2	1.7	BE-UE	FCC&IC
3	Conducted	5745	5725.0	85.2	PEAK	1000	122.2	37.0	BE-UE	FCC&IC
3	Conducted	5825	5850.0	115.8	PEAK	1000	122.2	6.4	BE-UE	FCC&IC

WLAN ac-Mode; 40 MHz; MCS 0; SISO

Applied duty cycle correction (AV): 0 dB

U-NII-Subband	Meas. Method	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	Conducted	5190	5150.0	71.0	PEAK	1000	74.0	3.0	BE-RB	FCC&IC
1	Conducted	5190	5150.0	52.9	AV	1000	54.0	1.1	BE-RB	FCC&IC
2A	Conducted	5310	5350.0	68.0	PEAK	1000	74.0	6.0	BE-RB	FCC&IC
2A	Conducted	5310	5350.0	51.1	AV	1000	54.0	2.9	BE-RB	FCC&IC
2C	Conducted	5510	5460.0	64.1	PEAK	1000	74.0	9.9	BE-RB	FCC&IC
2C	Conducted	5510	5460.0	47.6	AV	1000	54.0	6.4	BE-RB	FCC&IC
2C	Conducted	5510	5470.0	67.8	PEAK	1000	68.2	0.4	BE-UE	FCC&IC
2C	Conducted	5670	5725.0	60.5	PEAK	1000	68.2	7.7	BE-UE	FCC&IC
3	Conducted	5755	5725.0	85.5	PEAK	1000	122.2	36.7	BE-UE	FCC&IC
3	Conducted	5795	5850.0	79.1	PEAK	1000	122.2	43.1	BE-UE	FCC&IC

WLAN ac-Mode; 80 MHz; MCS 0; SISO

Applied duty cycle correction (AV): 0.1 dB

U-NII-Subband	Meas. Method	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	Conducted	5210	5150.0	66.8	PEAK	1000	74.0	7.2	BE-RB	FCC&IC
1	Conducted	5210	5150.0	51.2	AV	1000	54.0	2.8	BE-RB	FCC&IC
2A	Conducted	5290	5350.0	67.9	PEAK	1000	74.0	6.1	BE-RB	FCC&IC
2A	Conducted	5290	5350.0	49.3	AV	1000	54.0	4.7	BE-RB	FCC&IC
2C	Conducted	5530	5460.0	65.9	PEAK	1000	74.0	8.1	BE-RB	FCC&IC
2C	Conducted	5530	5460.0	51.7	AV	1000	54.0	2.3	BE-RB	FCC&IC
2C	Conducted	5530	5470.0	67.3	PEAK	1000	68.2	0.9	BE-UE	FCC&IC
2C	Conducted	5530	5725.0	52.9	PEAK	1000	68.2	15.3	BE-UE	FCC&IC
3	Conducted	5775	5725.0	73.5	PEAK	1000	122.2	48.7	BE-UE	FCC&IC
3	Conducted	5775	5850.0	72.5	PEAK	1000	122.2	49.7	BE-UE	FCC&IC

WLAN ax-Mode; 20 MHz; MCS 0; SISO

Applied duty cycle correction (AV): 0 dB

U-NII-Subband	Meas. Method	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	Conducted	5180	5150.0	69.8	PEAK	1000	74.0	4.2	BE-RB	FCC&IC
1	Conducted	5180	5150.0	46.8	AV	1000	54.0	7.2	BE-RB	FCC&IC
2A	Conducted	5320	5350.0	70.7	PEAK	1000	74.0	3.3	BE-RB	FCC&IC
2A	Conducted	5320	5350.0	48.4	AV	1000	54.0	5.6	BE-RB	FCC&IC
2C	Conducted	5500	5460.0	63.9	PEAK	1000	74.0	10.1	BE-RB	FCC&IC
2C	Conducted	5500	5460.0	44.3	AV	1000	54.0	9.7	BE-RB	FCC&IC
2C	Conducted	5500	5470.0	65.8	PEAK	1000	68.2	2.4	BE-UE	FCC&IC
2C	Conducted	5520	5460.0	65.6	PEAK	1000	74.0	8.4	BE-RB	FCC&IC
2C	Conducted	5520	5460.0	43.7	AV	1000	54.0	10.3	BE-RB	FCC&IC
2C	Conducted	5520	5470.0	65.6	PEAK	1000	68.2	2.6	BE-UE	FCC&IC
2C	Conducted	5540	5460.0	62.8	PEAK	1000	74.0	11.2	BE-RB	FCC&IC
2C	Conducted	5540	5460.0	46.7	AV	1000	54.0	7.3	BE-RB	FCC&IC
2C	Conducted	5540	5470.0	64.9	PEAK	1000	68.2	3.3	BE-UE	FCC&IC
2C	Conducted	5660	5725.0	62.3	PEAK	1000	68.2	5.9	BE-UE	FCC&IC
2C	Conducted	5680	5725.0	63.5	PEAK	1000	68.2	4.7	BE-UE	FCC&IC
2C	Conducted	5700	5725.0	67.0	PEAK	1000	68.2	1.2	BE-UE	FCC&IC
3	Conducted	5745	5725.0	87.6	PEAK	1000	122.2	34.6	BE-UE	FCC&IC
3	Conducted	5825	5850.0	118.1	PEAK	1000	122.2	4.1	BE-UE	FCC&IC

WLAN ax-Mode; 40 MHz; MCS 0; SISO

Applied duty cycle correction (AV): 0 dB

U-NII-Subband	Meas. Method	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	Conducted	5190	5150.0	67.6	PEAK	1000	74.0	6.4	BE-RB	FCC&IC
1	Conducted	5190	5150.0	52.0	AV	1000	54.0	2.0	BE-RB	FCC&IC
2A	Conducted	5310	5350.0	67.5	PEAK	1000	74.0	6.5	BE-RB	FCC&IC
2A	Conducted	5310	5350.0	49.9	AV	1000	54.0	4.1	BE-RB	FCC&IC
2C	Conducted	5510	5460.0	65.5	PEAK	1000	74.0	8.5	BE-RB	FCC&IC
2C	Conducted	5510	5460.0	48.7	AV	1000	54.0	5.3	BE-RB	FCC&IC
2C	Conducted	5510	5470.0	67.0	PEAK	1000	68.2	1.2	BE-UE	FCC&IC
2C	Conducted	5670	5725.0	59.7	PEAK	1000	68.2	8.5	BE-UE	FCC&IC
3	Conducted	5755	5725.0	86.2	PEAK	1000	122.2	36.0	BE-UE	FCC&IC
3	Conducted	5795	5850.0	77.3	PEAK	1000	122.2	44.9	BE-UE	FCC&IC

WLAN ax-Mode; 80 MHz; MCS 0; SISO

Applied duty cycle correction (AV): 0.1 dB

U-NII-Subband	Meas. Method	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	Conducted	5210	5150.0	66.4	PEAK	1000	74.0	7.6	BE-RB	FCC&IC
1	Conducted	5210	5150.0	51.8	AV	1000	54.0	2.2	BE-RB	FCC&IC
2A	Conducted	5290	5350.0	62.8	PEAK	1000	74.0	11.2	BE-RB	FCC&IC
2A	Conducted	5290	5350.0	49.7	AV	1000	54.0	4.3	BE-RB	FCC&IC
2C	Conducted	5530	5460.0	67.9	PEAK	1000	74.0	6.1	BE-RB	FCC&IC
2C	Conducted	5530	5460.0	52.3	AV	1000	54.0	1.7	BE-RB	FCC&IC
2C	Conducted	5530	5470.0	66.0	PEAK	1000	68.2	2.2	BE-UE	FCC&IC
2C	Conducted	5530	5725.0	53.2	PEAK	1000	68.2	15.0	BE-UE	FCC&IC
3	Conducted	5775	5725.0	74.3	PEAK	1000	122.2	47.9	BE-UE	FCC&IC
3	Conducted	5775	5850.0	72.3	PEAK	1000	122.2	49.9	BE-UE	FCC&IC

Remark: Please see next sub-clause for the measurement plot.


The correction factor of the conducted measurements contains the path attenuation and the antenna gain.

The values in the table are then calculated by adding 95.2 dB.

Radiated Band Edge was performed at 18 dBm for 20 MHz BW and 17 dBm for 80 MHz BW (worse case compared to final power for some cases).

5.8.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Radio Technology = WLAN a, Operating Frequency = low, Subband = U-NII-1 (S02_AC02)

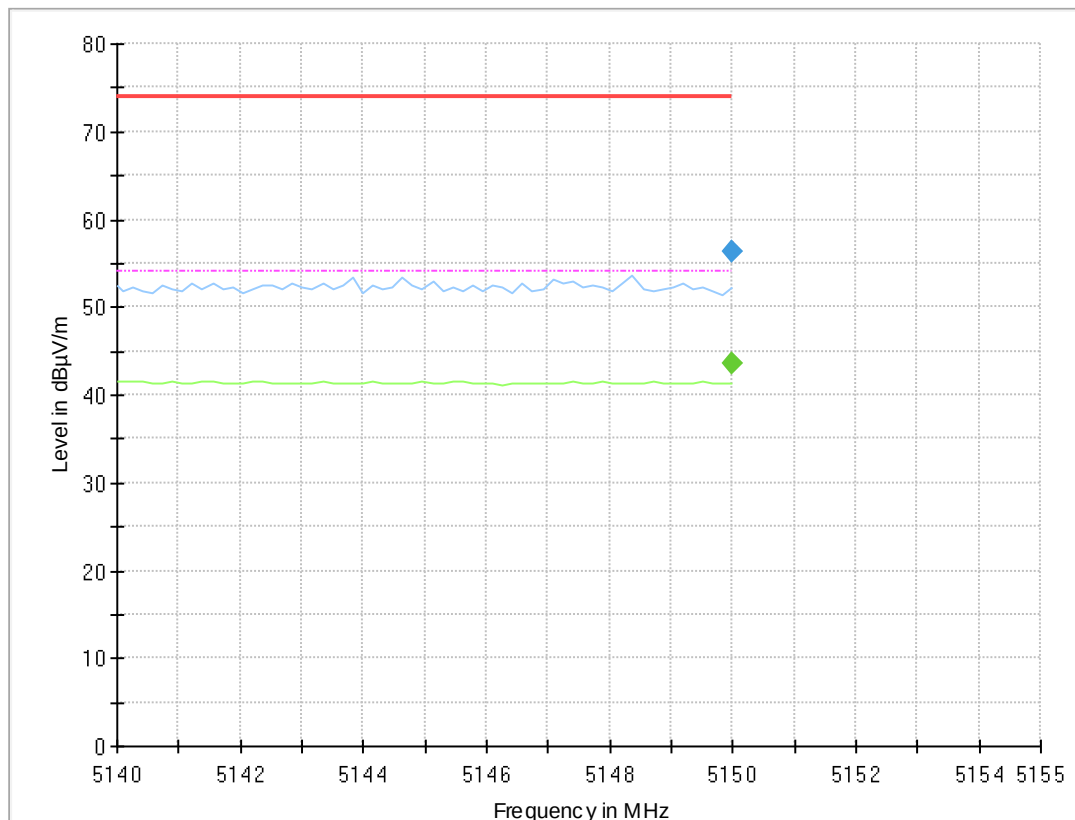

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
5150.000	56.3	---	74.00	17.70	1000.0	1000.000	150.0	V	-53.0	105.0	15.0
5150.000	---	43.7	54.00	10.33	1000.0	1000.000	150.0	V	-53.0	105.0	15.0
10363.638	---	40.5	---	---	1000.0	1000.000	150.0	H	46.0	91.0	-8.7
10363.638	54.8	---	68.20	13.45	1000.0	1000.000	150.0	H	46.0	91.0	-8.7


Radio Technology = WLAN a, Operating Frequency = high, Subband = U-NII-2A
(S02_AC02)

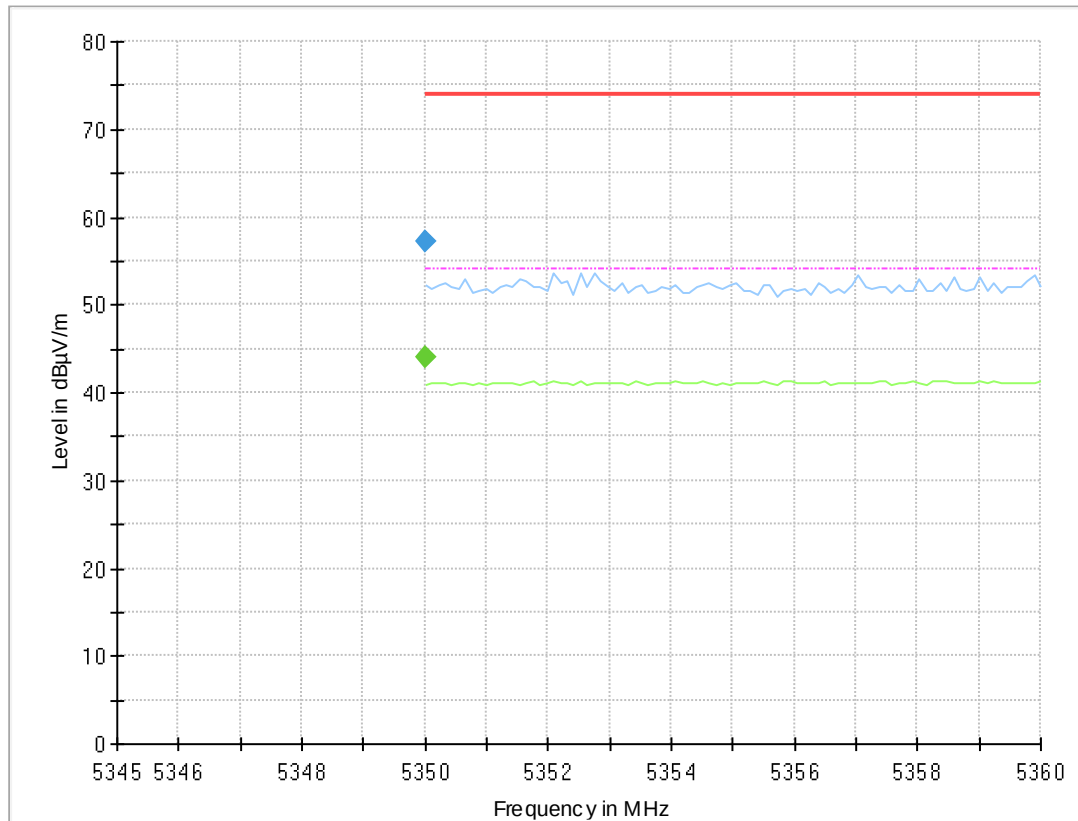

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
5350.000	---	44.0	54.00	10.04	1000.0	1000.000	150.0	H	-51.0	15.0	15.3
5350.000	57.3	---	74.00	16.72	1000.0	1000.000	150.0	H	-51.0	15.0	15.3
10637.000	---	37.9	54.00	16.06	1000.0	1000.000	150.0	H	44.0	105.0	-9.6
10637.000	52.0	---	74.00	22.01	1000.0	1000.000	150.0	H	44.0	105.0	-9.6


Radio Technology = WLAN a, Operating Frequency = low, Subband = U-NII-2C
(S02_AC02)

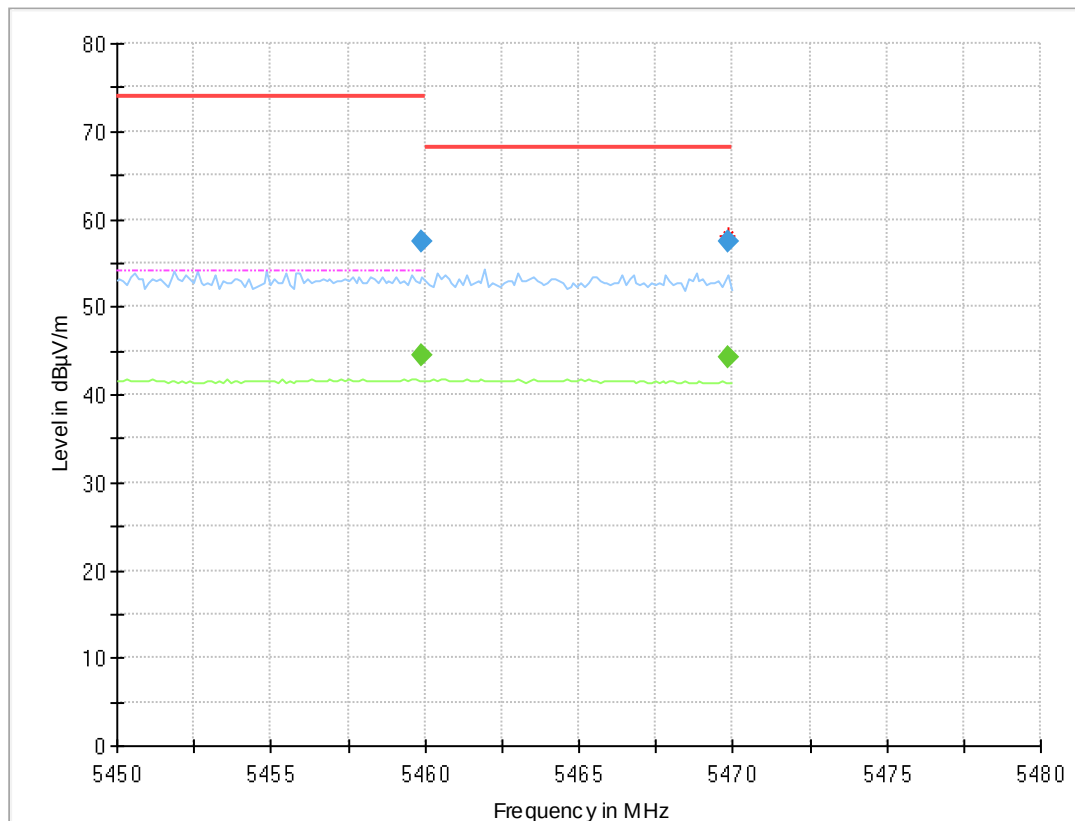

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
5459.920	---	44.5	54.00	9.50	1000.0	1000.000	150.0	H	-140.0	10.0	15.9
5459.920	57.4	---	74.00	16.57	1000.0	1000.000	150.0	H	-140.0	10.0	15.9
5469.880	---	44.3	---	---	1000.0	1000.000	150.0	V	-10.0	15.0	15.7
5469.880	57.5	---	68.20	10.66	1000.0	1000.000	150.0	V	-10.0	15.0	15.7
10996.610	---	37.4	54.00	16.63	1000.0	1000.000	150.0	V	-34.0	80.0	-8.2
10996.610	51.3	---	74.00	22.72	1000.0	1000.000	150.0	V	-34.0	80.0	-8.2


Radio Technology = WLAN a, Operating Frequency = high, Subband = U-NII-3
(S02_AE02)

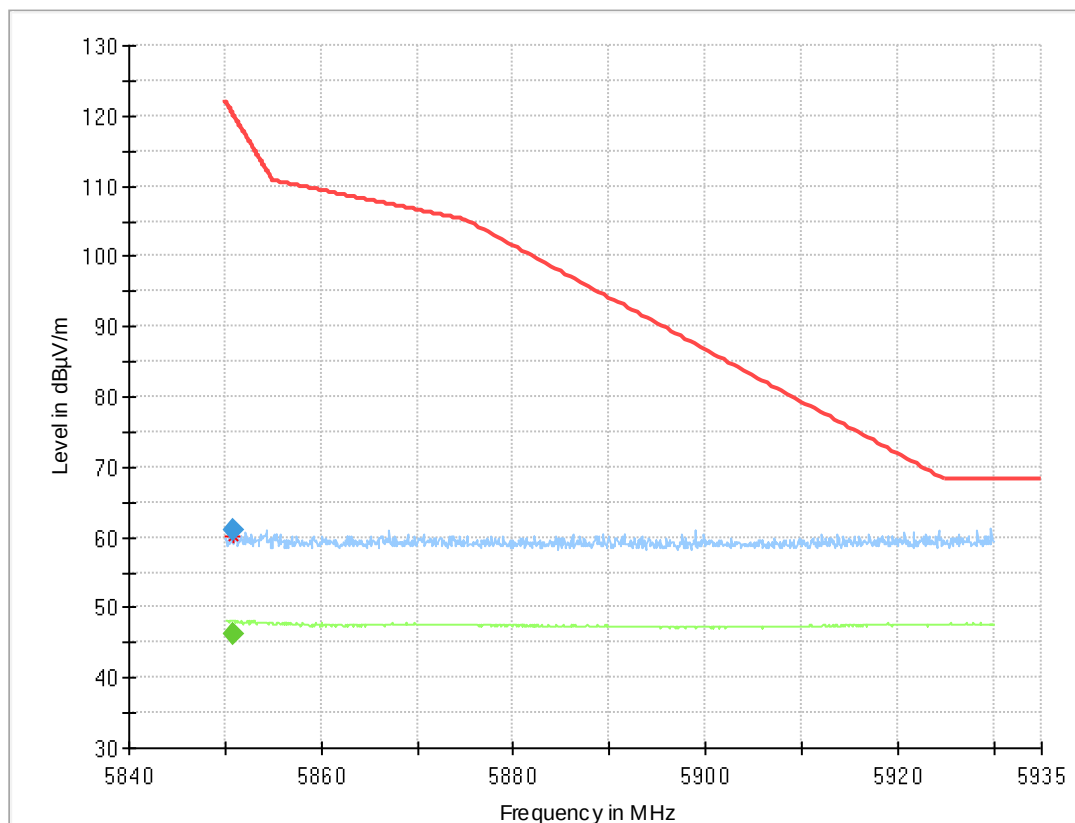

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
5850.800	---	46.3	---	---	1000.0	1000.000	150.0	H	44.0	-15.0	15.8
5850.800	60.9	---	120.3	59.43	1000.0	1000.000	150.0	H	44.0	-15.0	15.8


Radio Technology = WLAN a, Operating Frequency = high, Subband = U-NII-2C
 (S02_AC02)

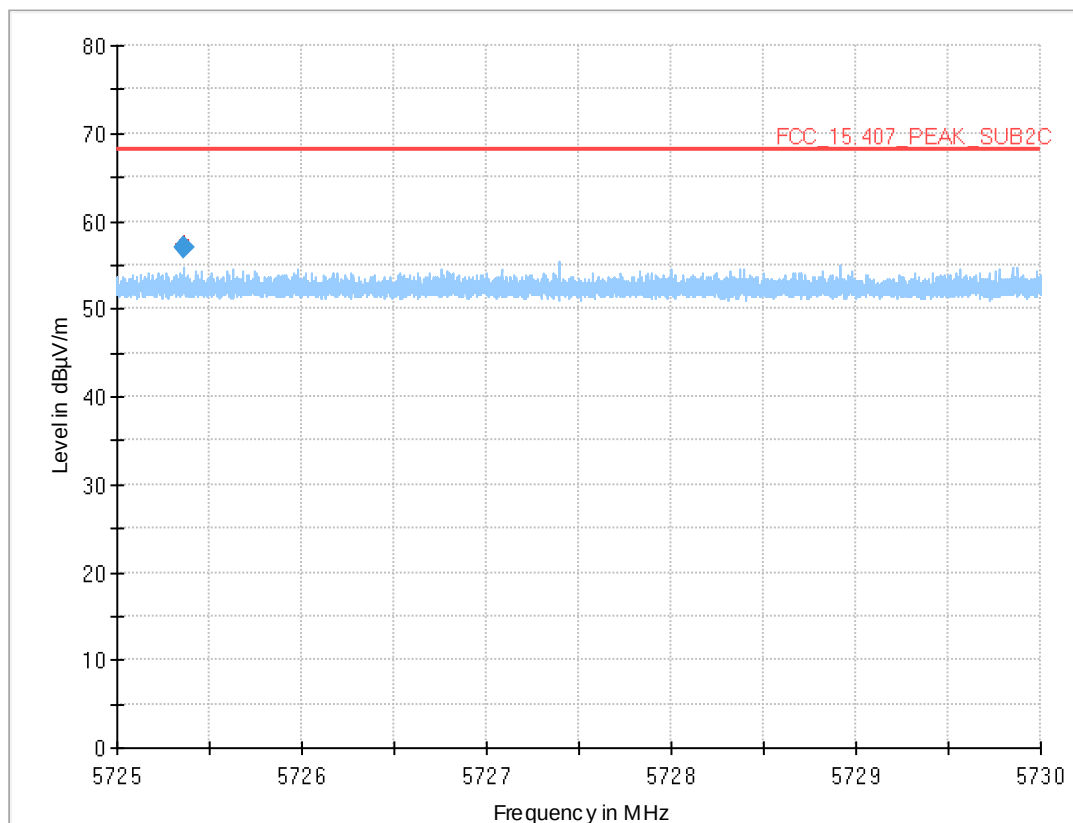


Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
5725.361	57.0	---	68.20	11.19	1000.0	1000.000	150.0	V	130.0	15.0	15.6


Radio Technology = WLAN a, Operating Frequency = low, Subband = U-NII-1
(S01_AD02)

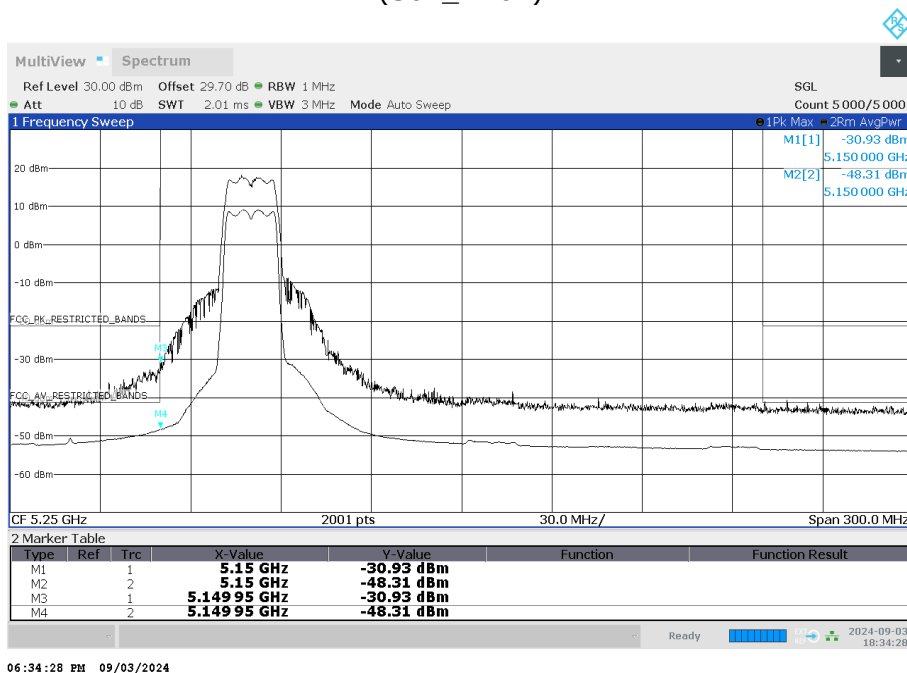


Radio Technology = WLAN a, Operating Frequency = high, Subband = U-NII-2A
(S01_AD02)

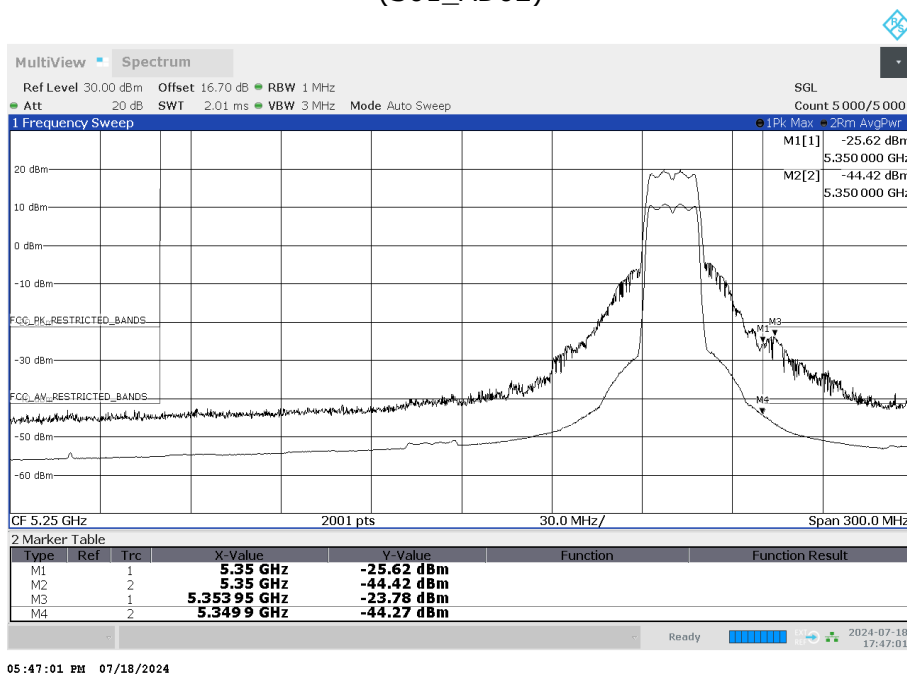


Radio Technology = WLAN a, Operating Frequency = low, Subband = U-NII-2C
(S01_AD02)

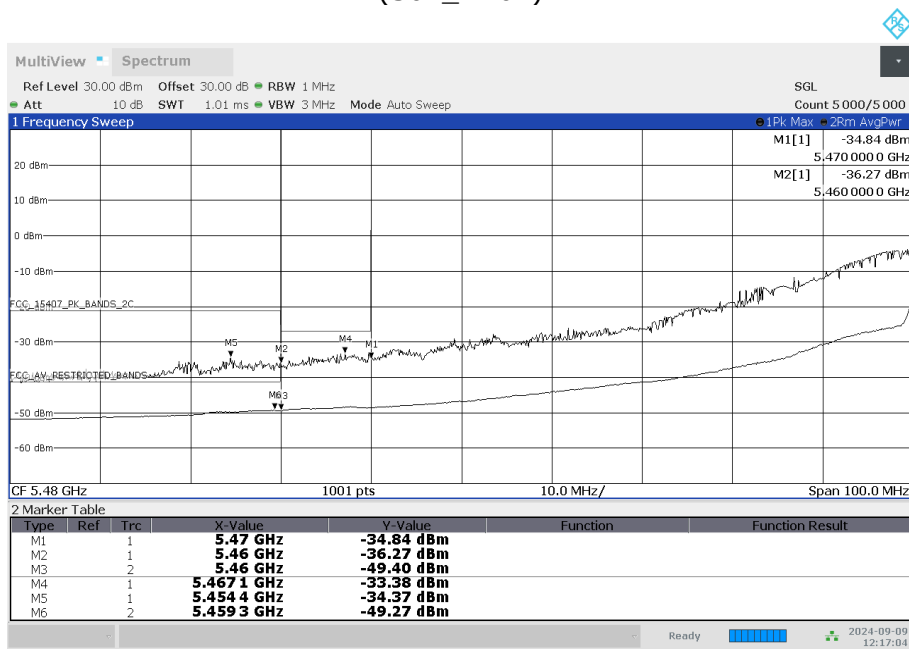


12:17:05 PM 09/09/2024

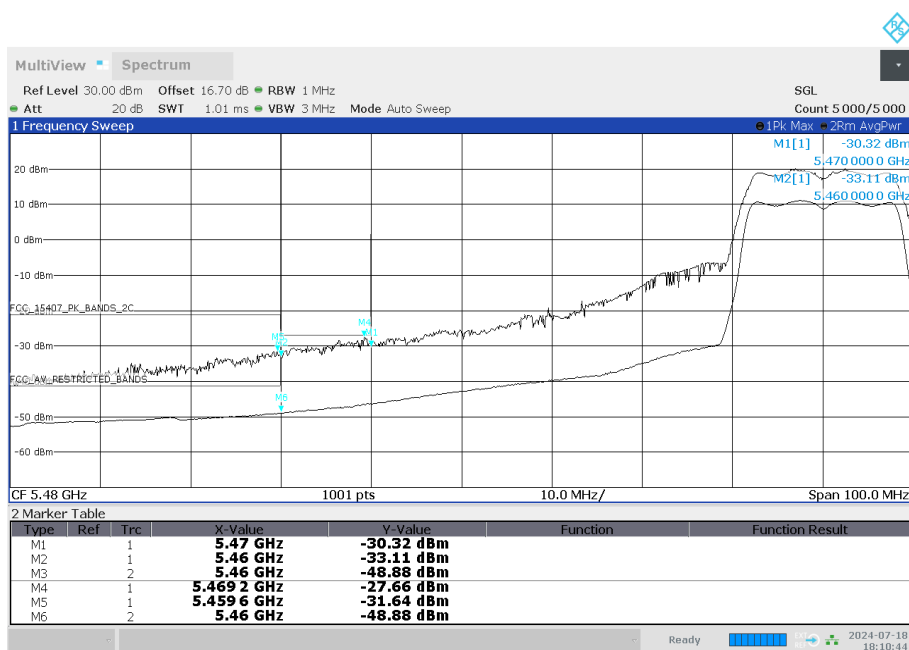


06:10:44 PM 07/18/2024

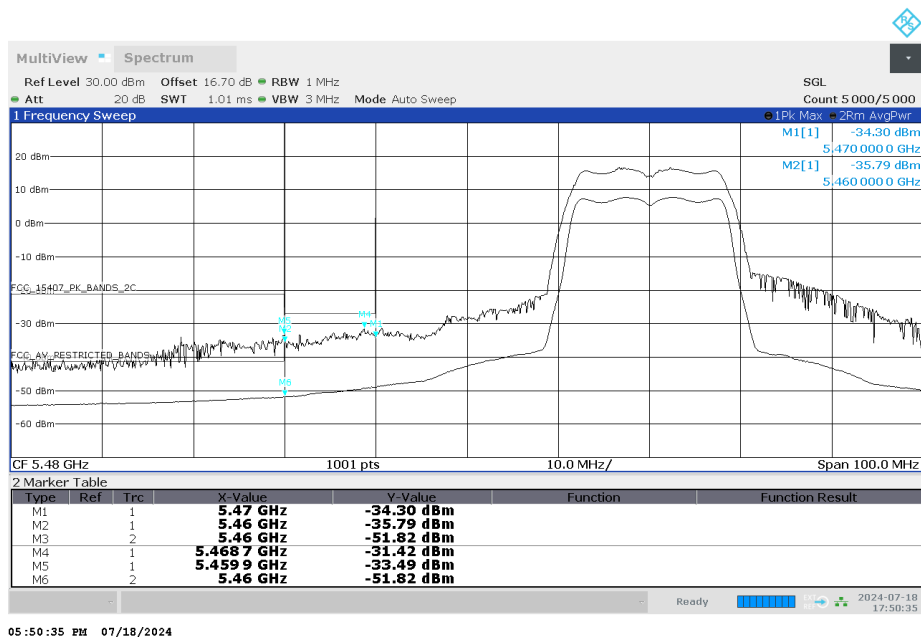


Radio Technology = WLAN a, Operating Frequency = high, Subband = U-NII-2C (S01_AD02)

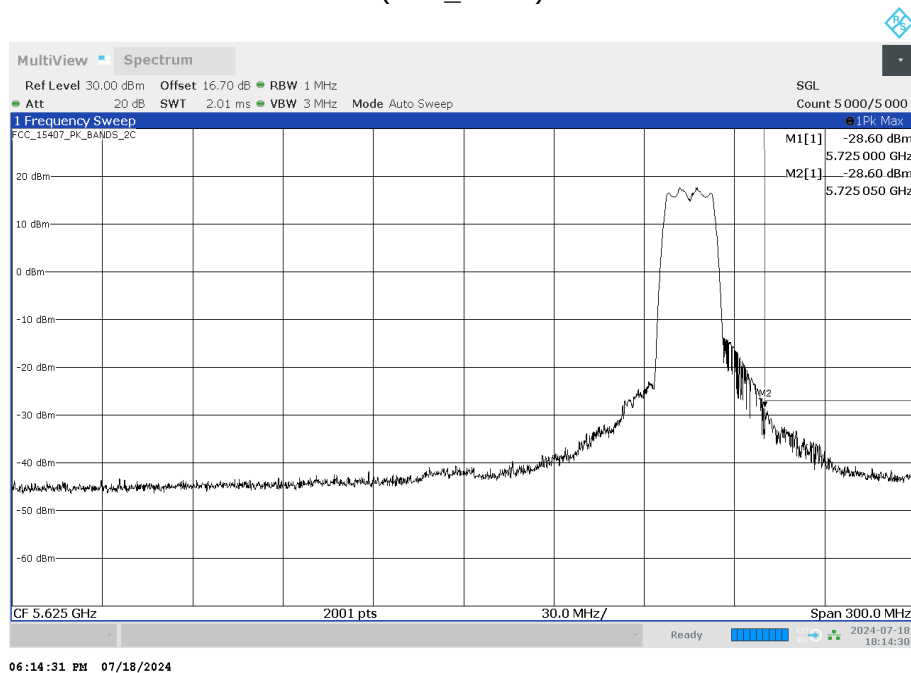


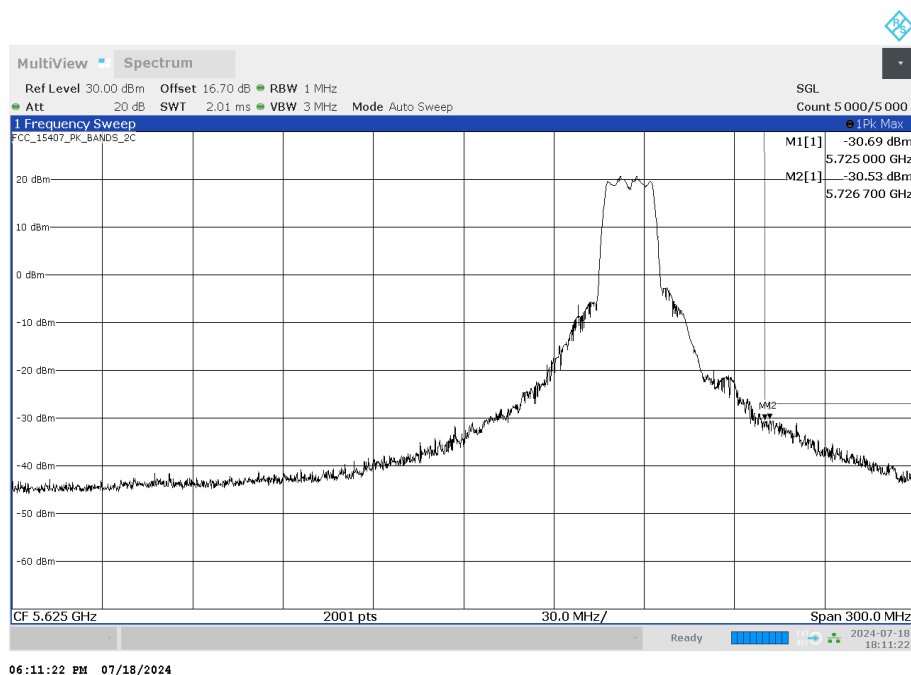


Radio Technology = WLAN a, Operating Frequency = low, Subband = U-NII-3 (S01_AD02)

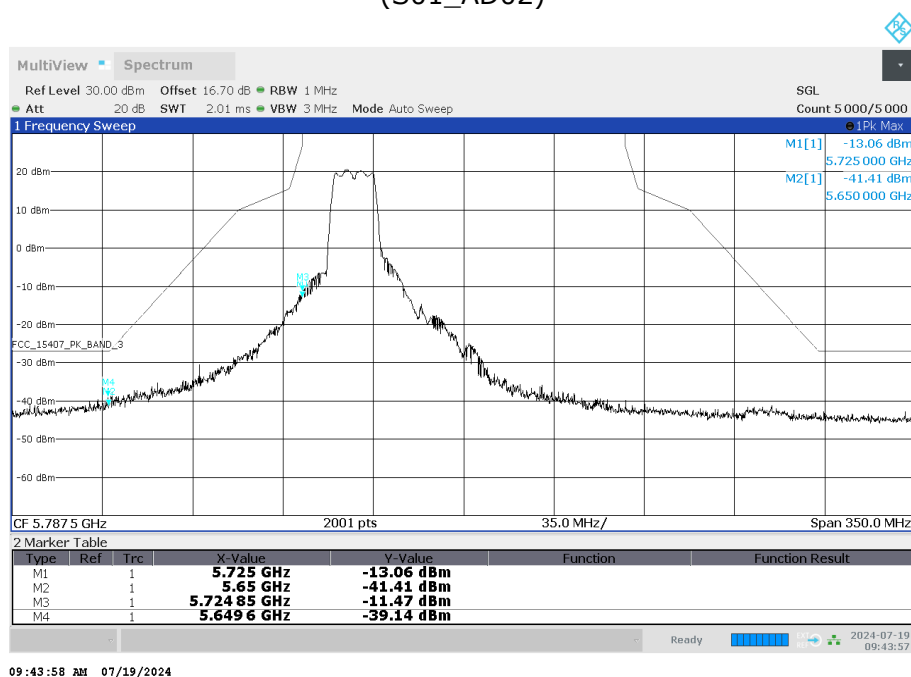


Radio Technology = WLAN a, Operating Frequency = high, Subband = U-NII-3
(S01_AD02)

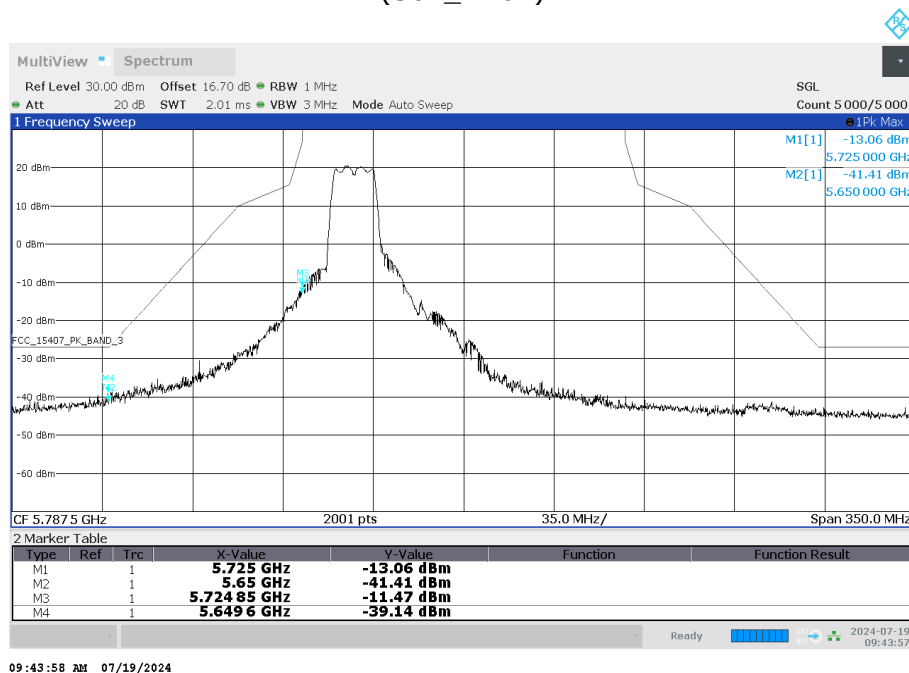


Radio Technology = WLAN n 20 MHz, Operating Frequency = low, Subband = U-NII-1
(S01_AD02)

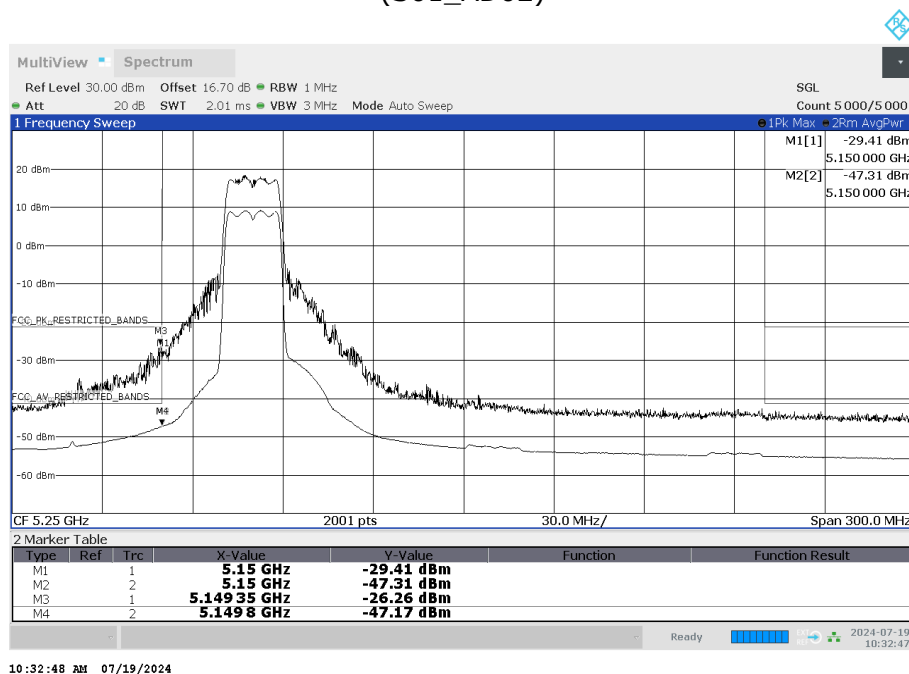


Radio Technology = WLAN n 20 MHz, Operating Frequency = high, Subband = U-NII-2A (S01_AD02)

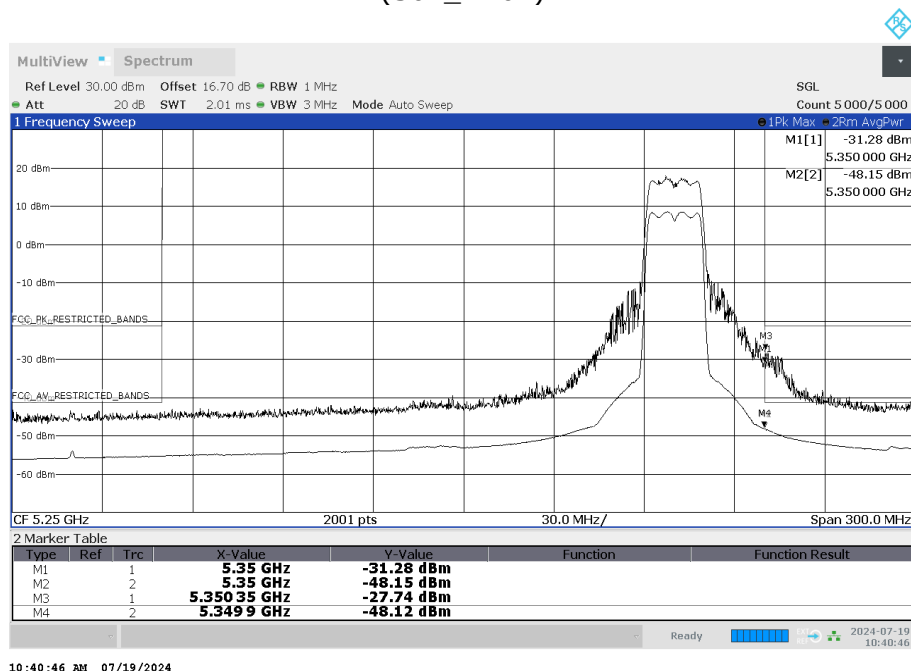


Radio Technology = WLAN n 20 MHz, Operating Frequency = low, Subband = U-NII-2C (S01_AD02)

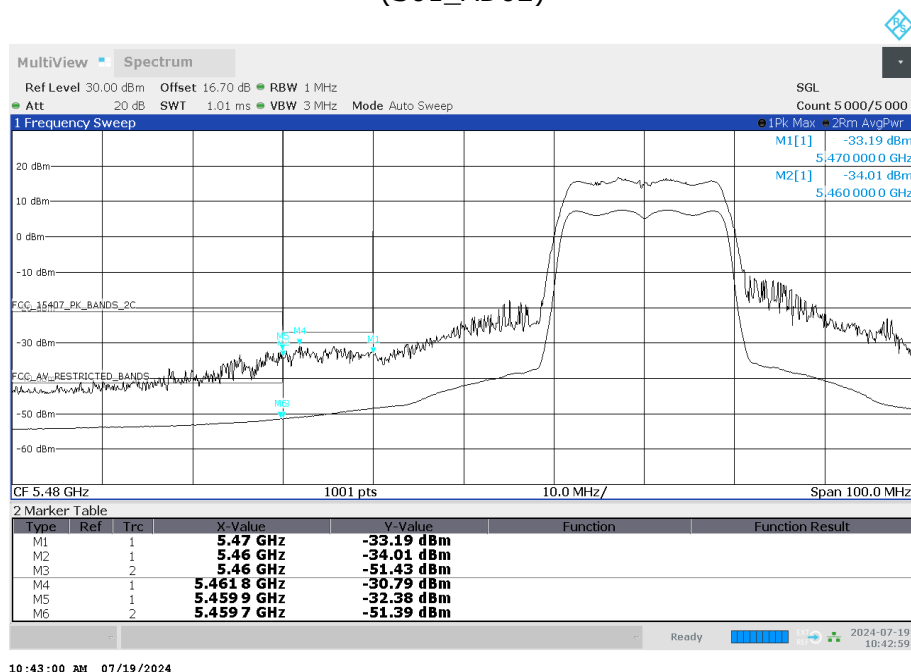


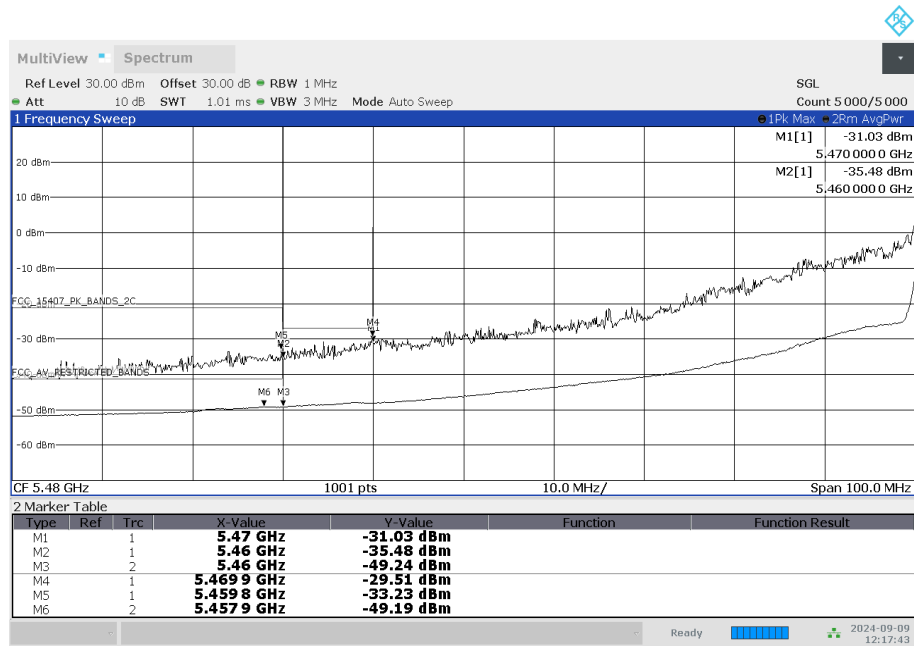



12:17:44 PM 09/09/2024

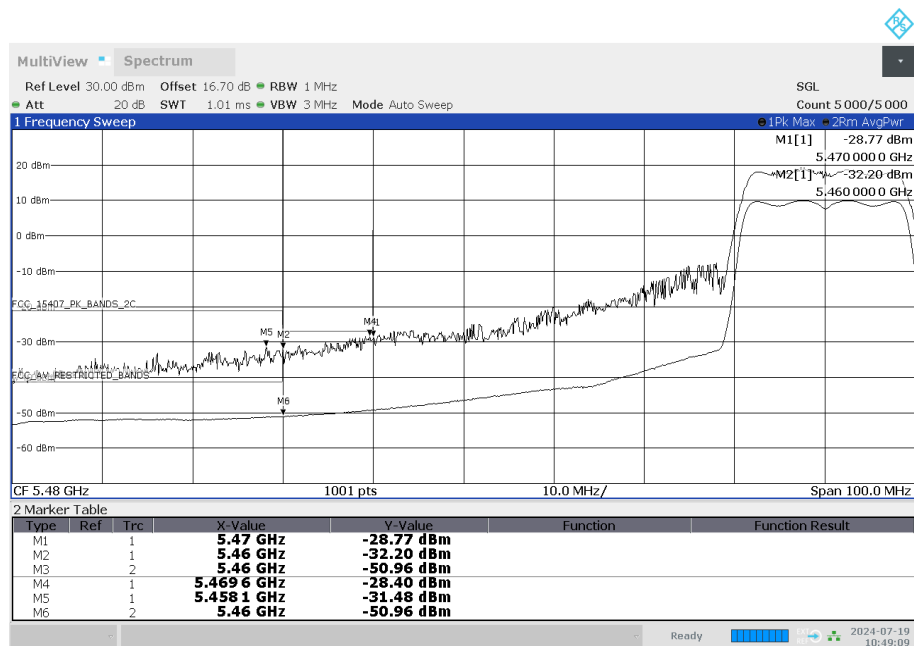


10:49:10 AM 07/19/2024

Radio Technology = WLAN n 20 MHz, Operating Frequency = high, Subband = U-NII-2C (S01_AD02)

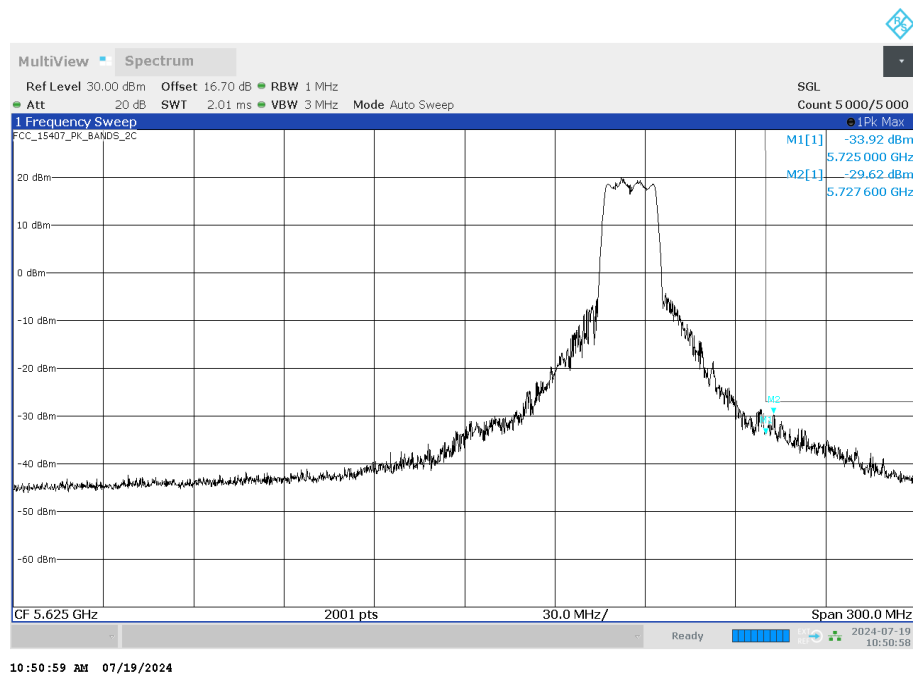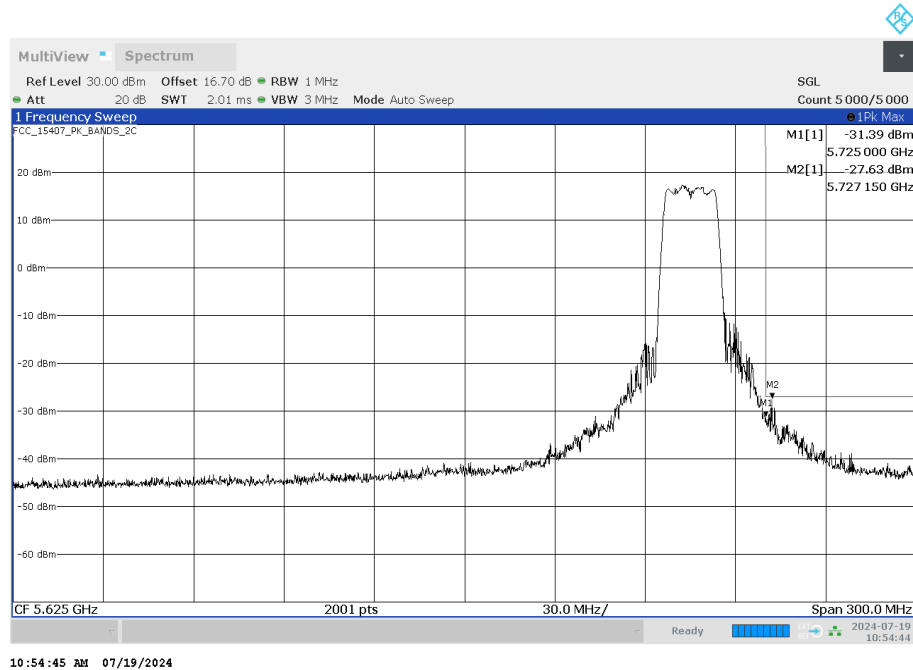


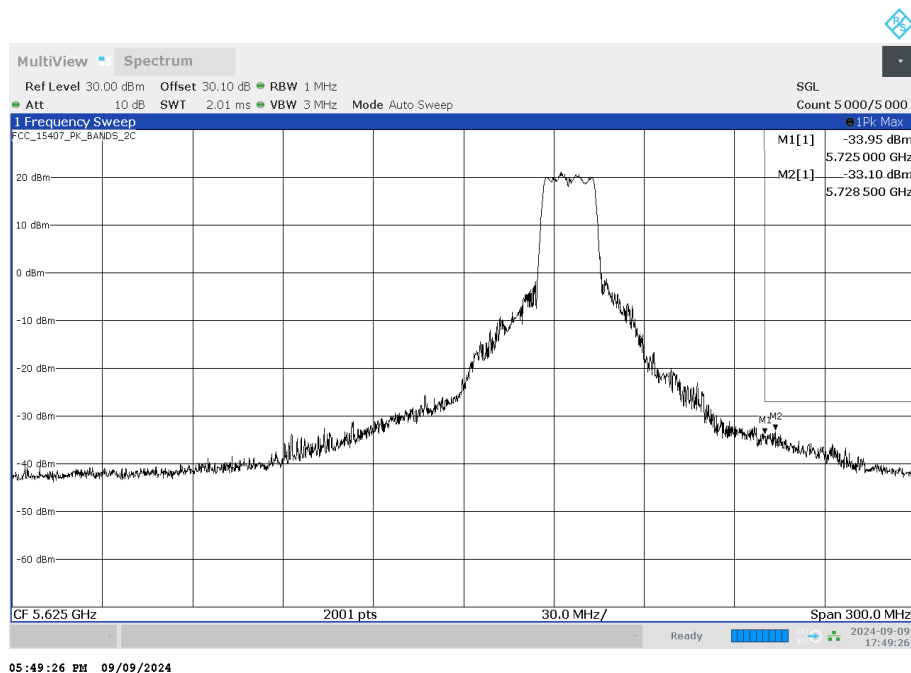


Radio Technology = WLAN n 20 MHz, Operating Frequency = low, Subband = U-NII-3 (S01_AD02)

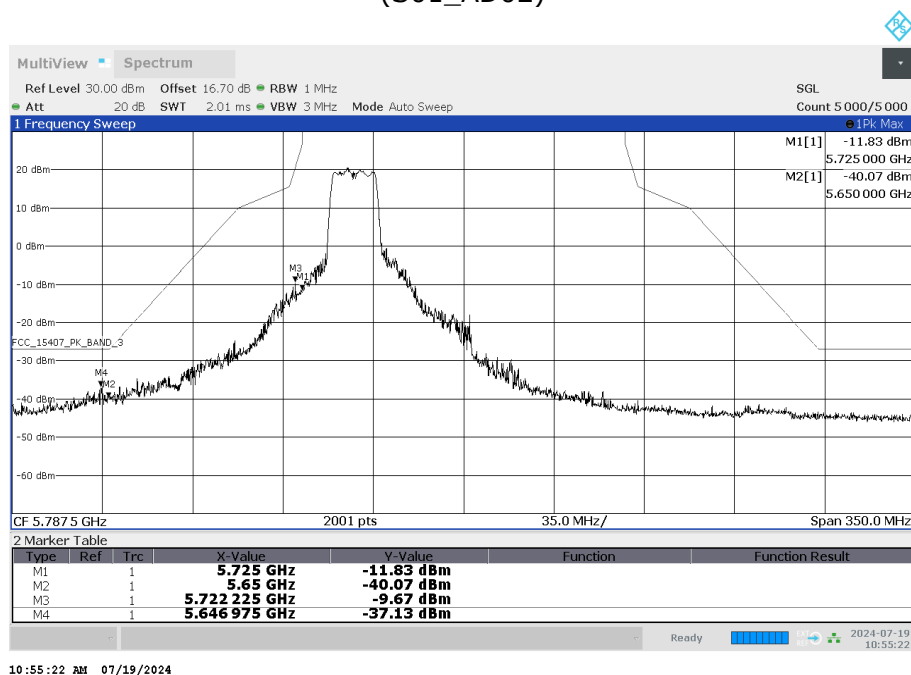


Radio Technology = WLAN n 20 MHz, Operating Frequency = high, Subband = U-NII-3
(S01_AD02)

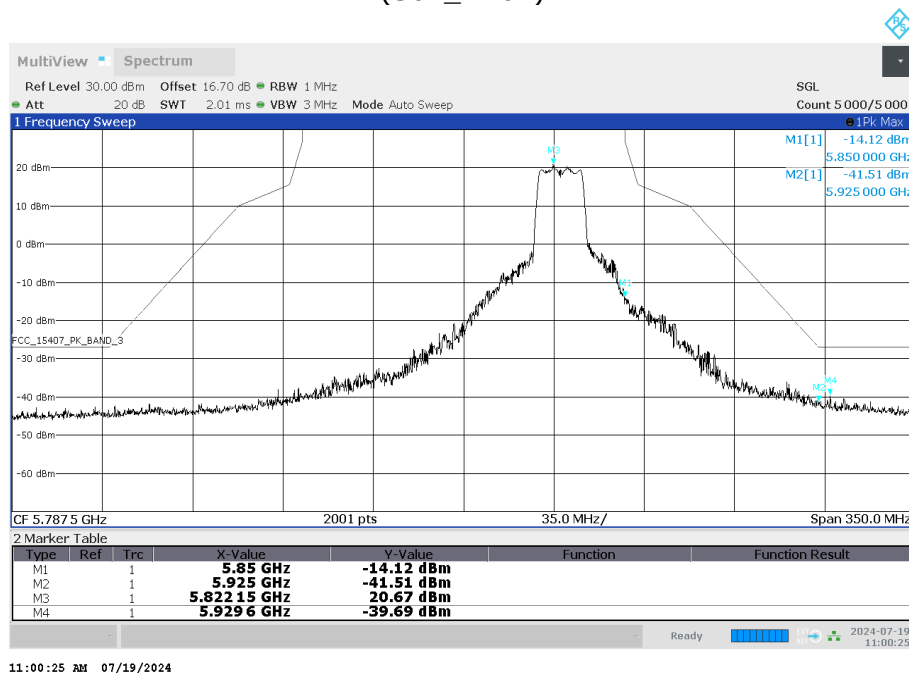


Radio Technology = WLAN n 40 MHz, Operating Frequency = low, Subband = U-NII-1
(S01_AD02)

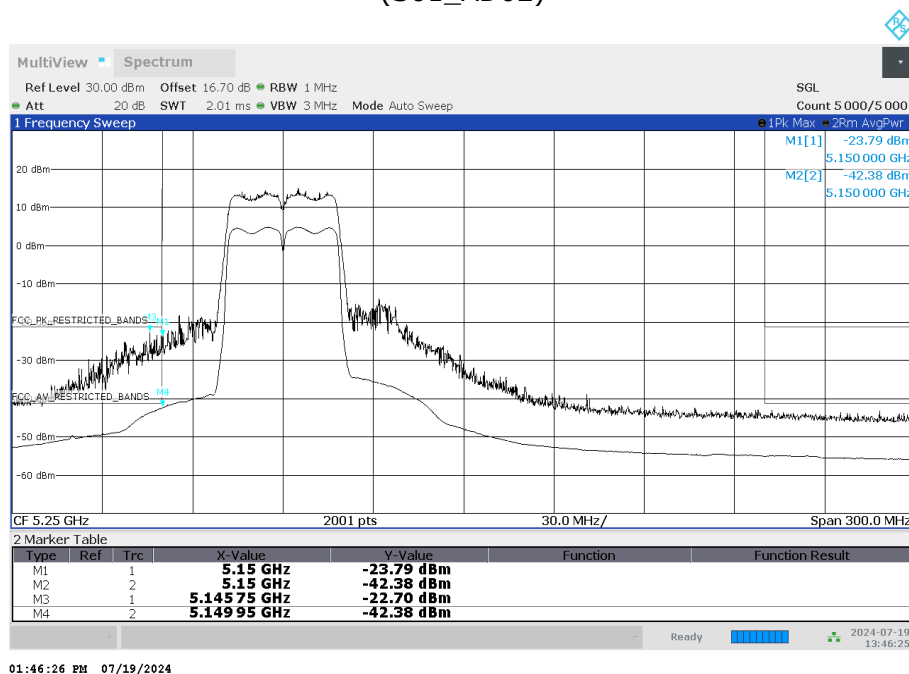


Radio Technology = WLAN n 40 MHz, Operating Frequency = high, Subband = U-NII-2A
(S01_AD02)

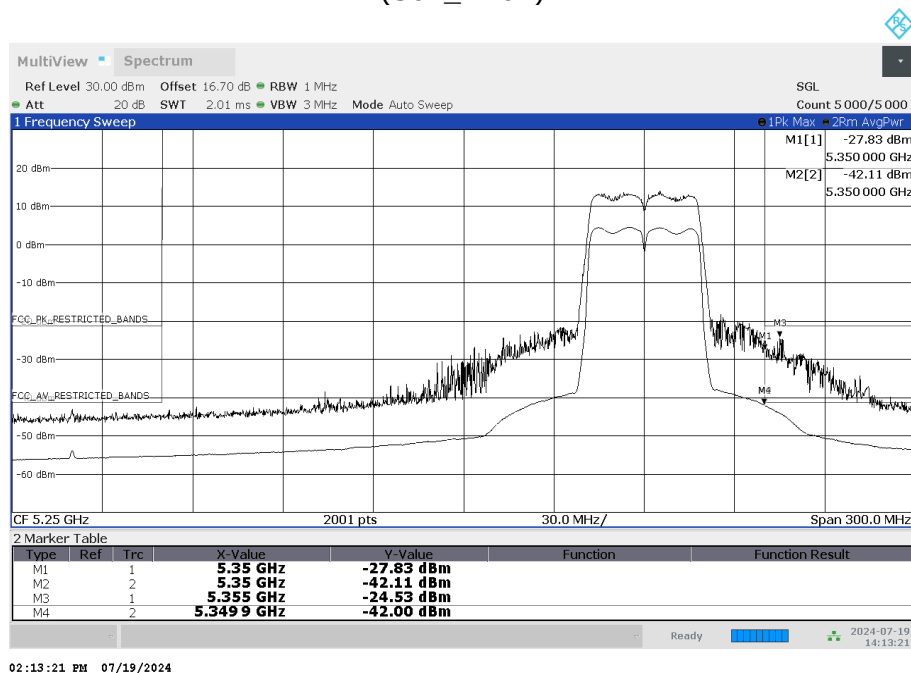


Radio Technology = WLAN n 40 MHz, Operating Frequency = low, Subband = U-NII-2C
(S01_AD02)

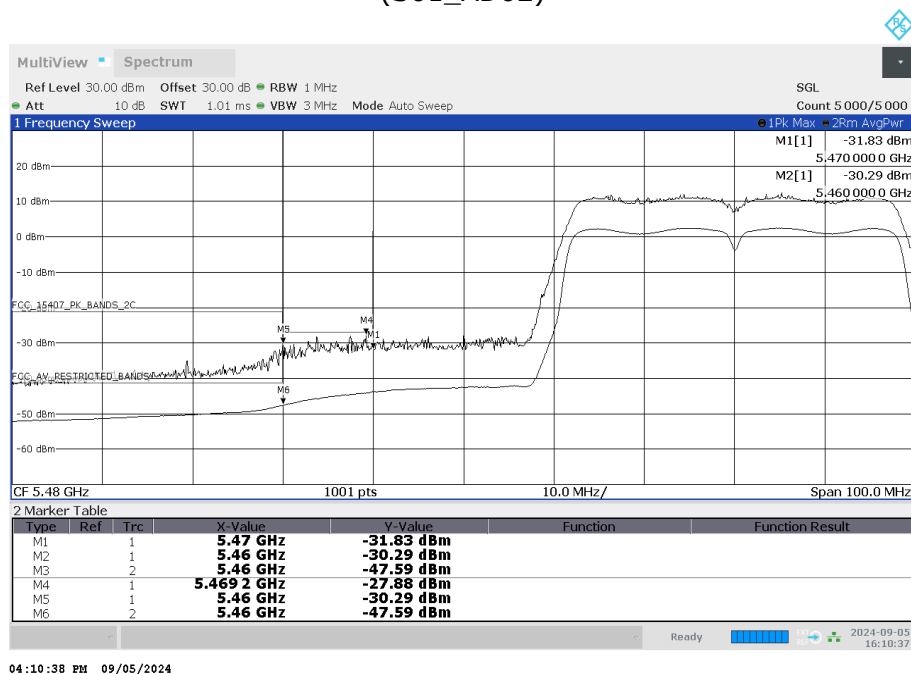


Radio Technology = WLAN n 40 MHz, Operating Frequency = high, Subband = U-NII-2C
(S01_AD02)

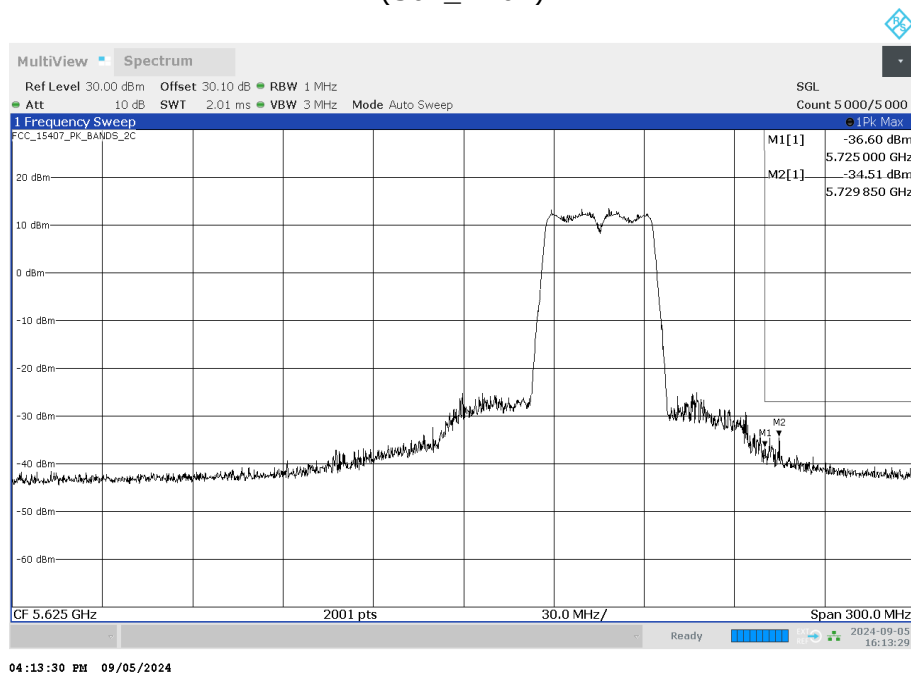

Radio Technology = WLAN n 40 MHz, Operating Frequency = high, Subband = U-NII-3
(S01_AD02)

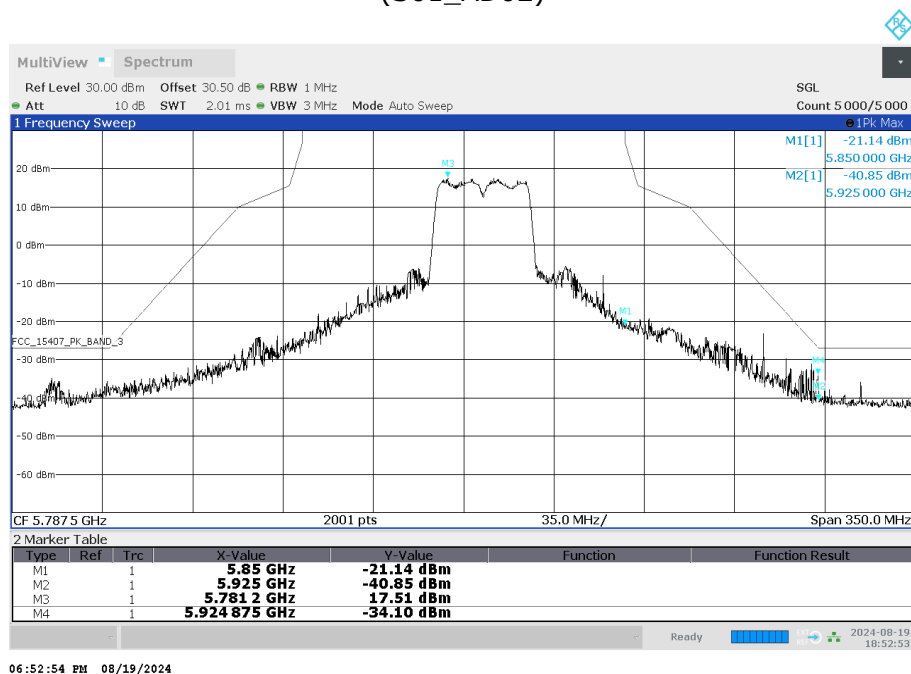


Radio Technology = WLAN ac 20 MHz, Operating Frequency = low, Subband = U-NII-1
(S01_AD02)

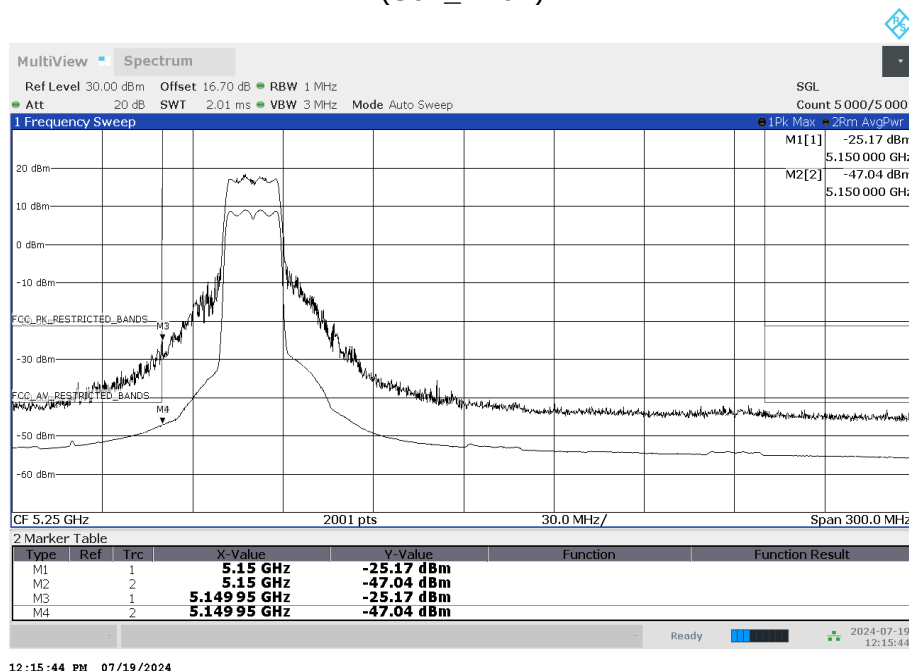


12:15:44 PM 07/19/2024

Radio Technology = WLAN ac 20 MHz, Operating Frequency = high, Subband = U-NII-2A
(S01_AD02)

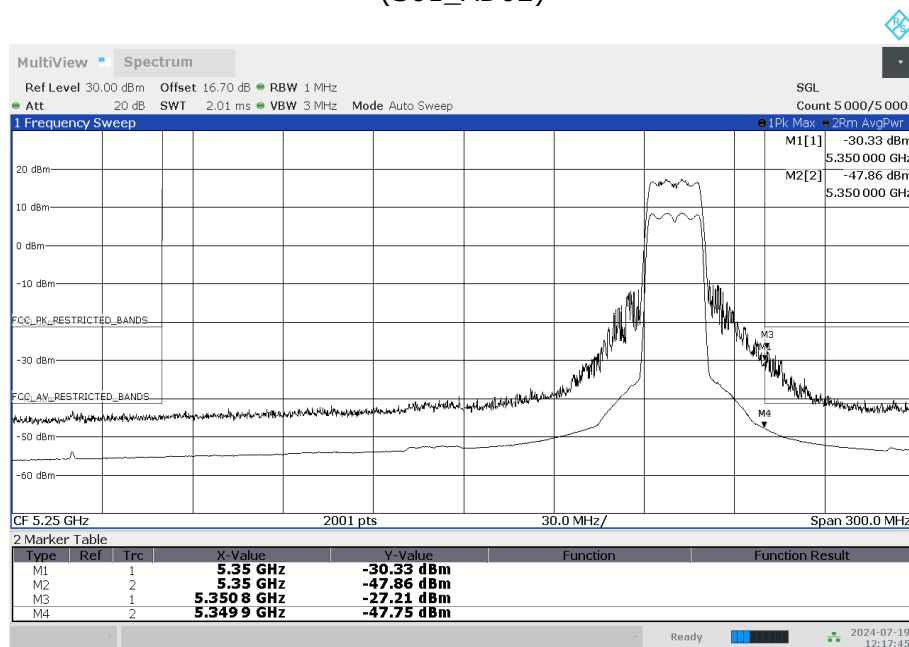


12:17:46 PM 07/19/2024

Radio Technology = WLAN ac 20 MHz, Operating Frequency = low, Subband = U-NII-2C
(S01_AD02)


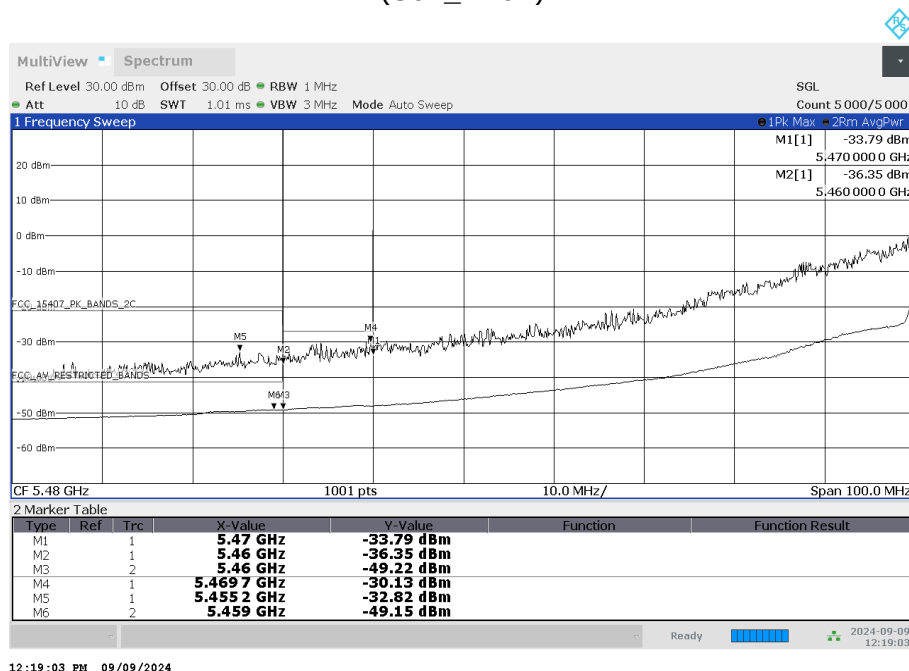


12:19:03 PM 09/09/2024

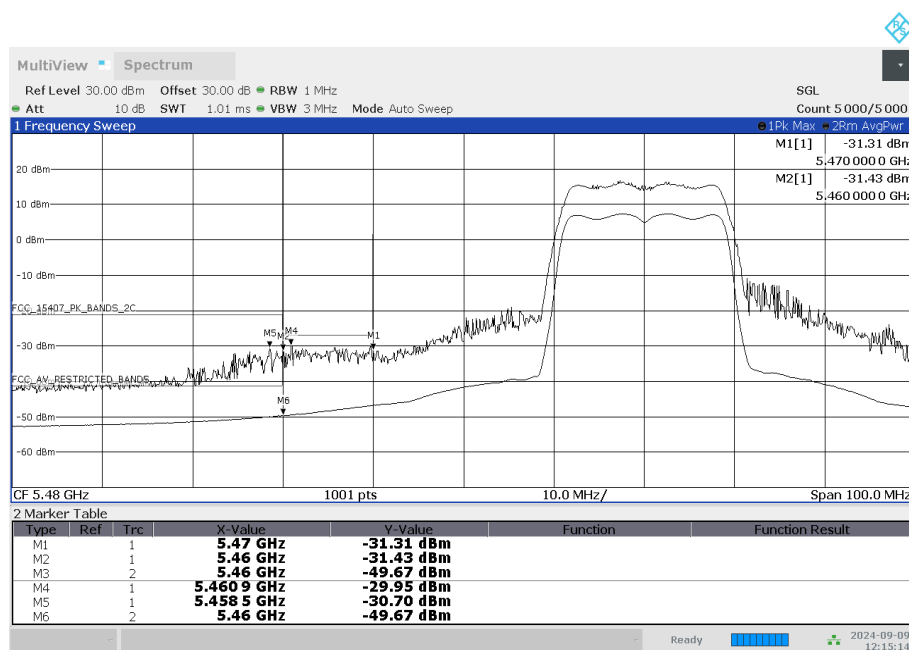


12:15:15 PM 09/09/2024


Radio Technology = WLAN ac 20 MHz, Operating Frequency = high, Subband = U-NII-2C (S01_AD02)

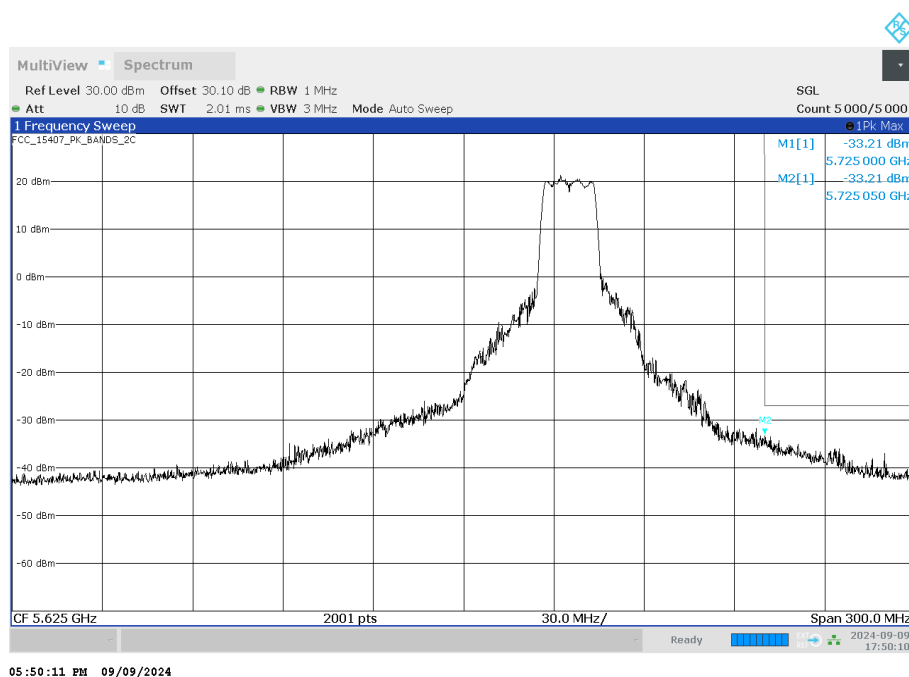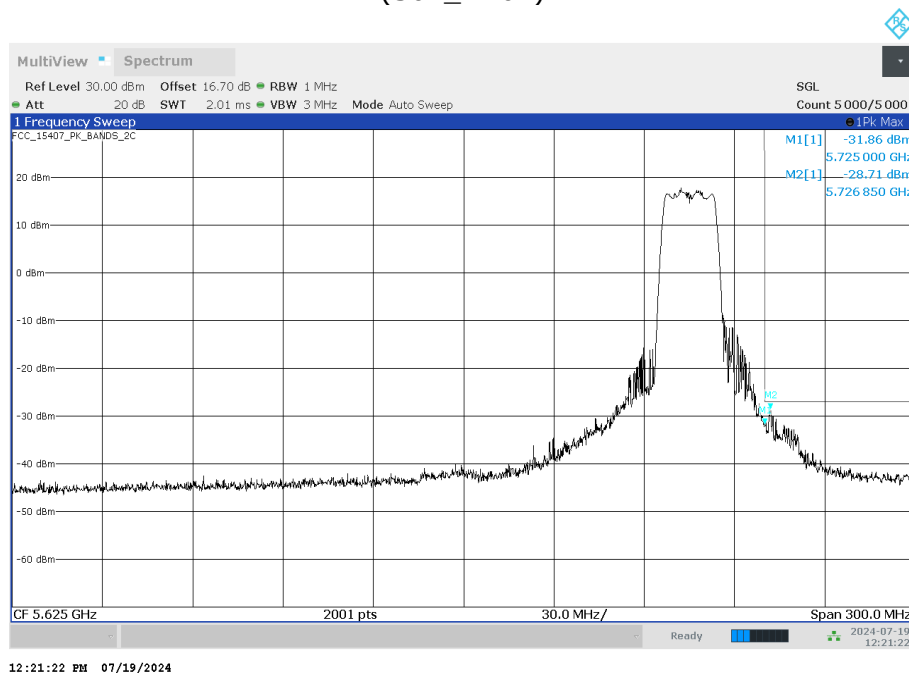


Radio Technology = WLAN ac 20 MHz, Operating Frequency = low, Subband = U-NII-3
(S01_AD02)

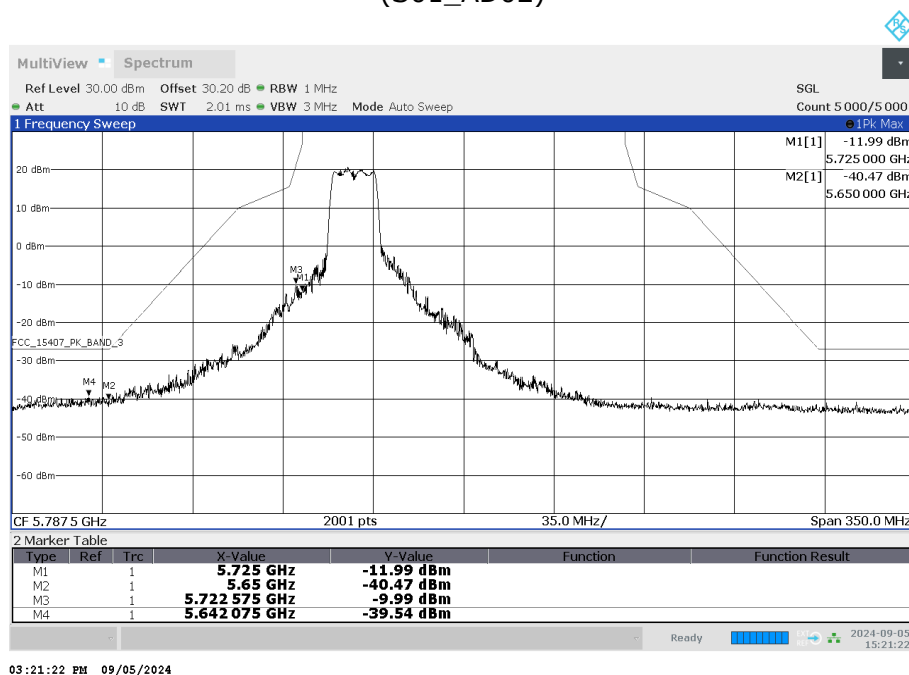


Radio Technology = WLAN ac 20 MHz, Operating Frequency = high, Subband = U-NII-3
(S01_AD02)

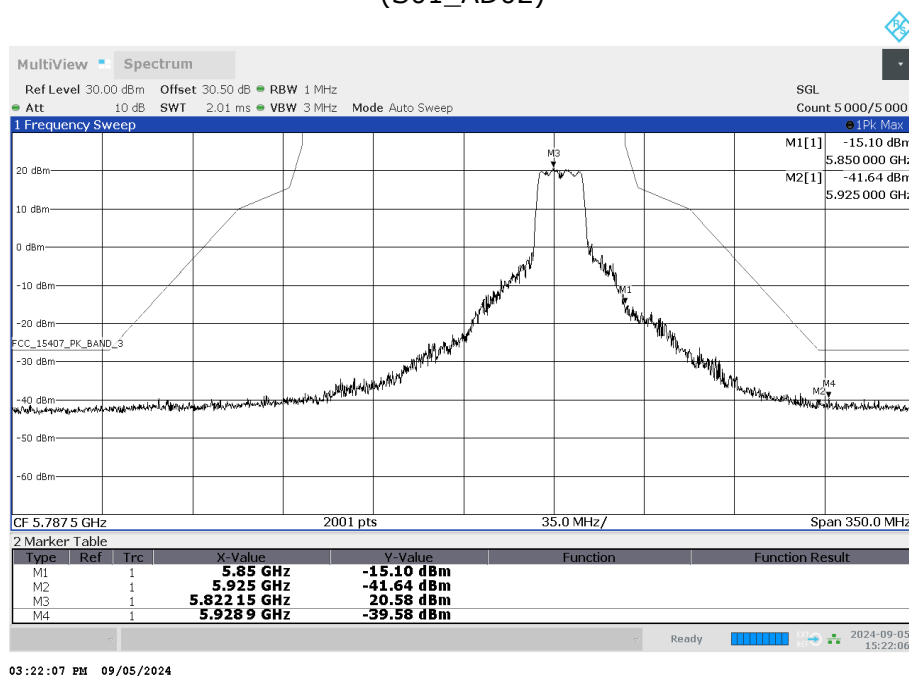


Radio Technology = WLAN ac 40 MHz, Operating Frequency = low, Subband = U-NII-1
(S01_AD02)

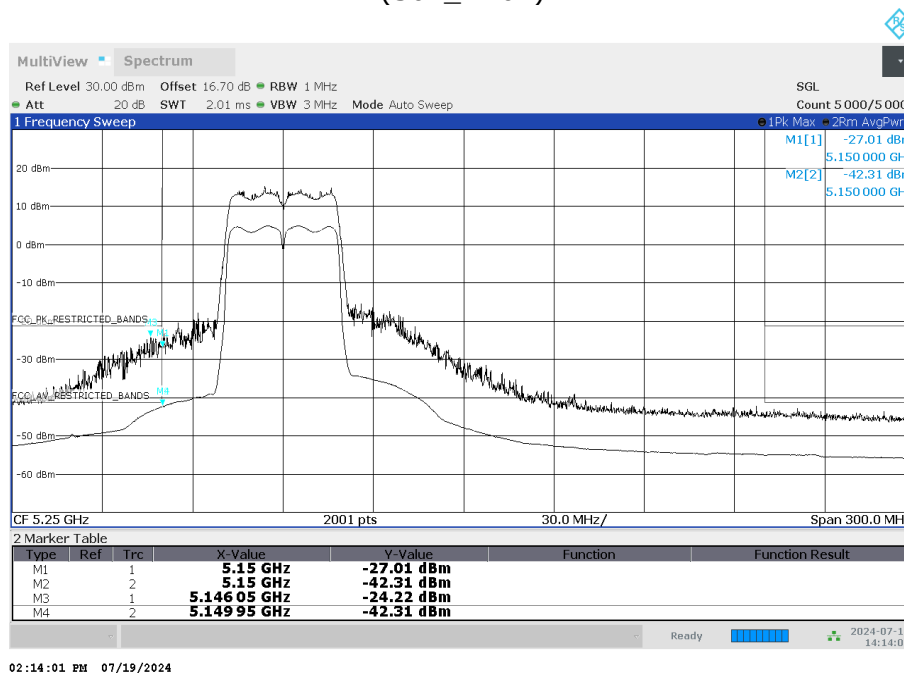


Radio Technology = WLAN ac 40 MHz, Operating Frequency = high, Subband = U-NII-2A
(S01_AD02)

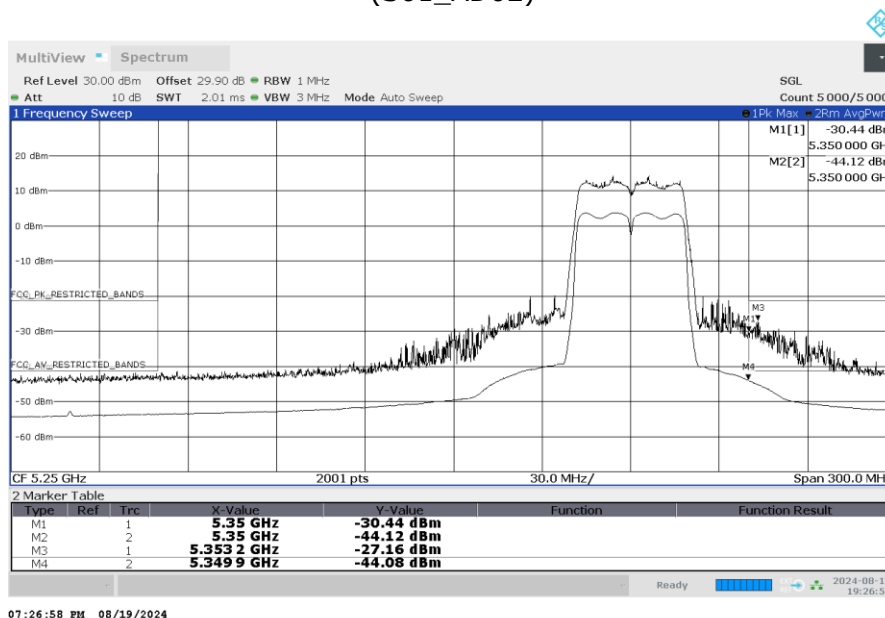


Radio Technology = WLAN ac 40 MHz, Operating Frequency = low, Subband = U-NII-2C
(S01_AD02)

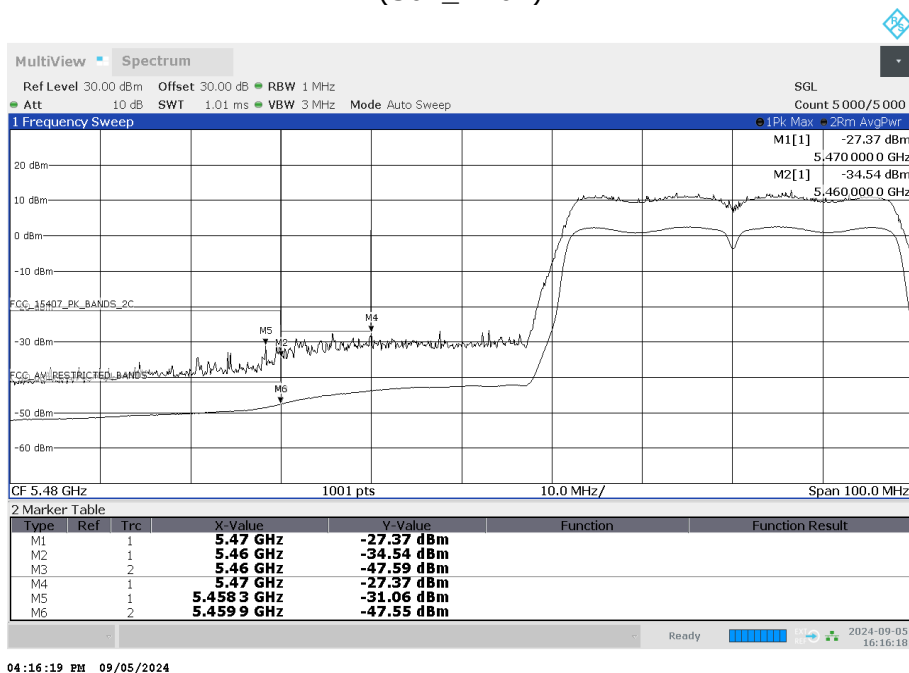


Radio Technology = WLAN ac 40 MHz, Operating Frequency = high, Subband = U-NII-2C
(S01_AD02)

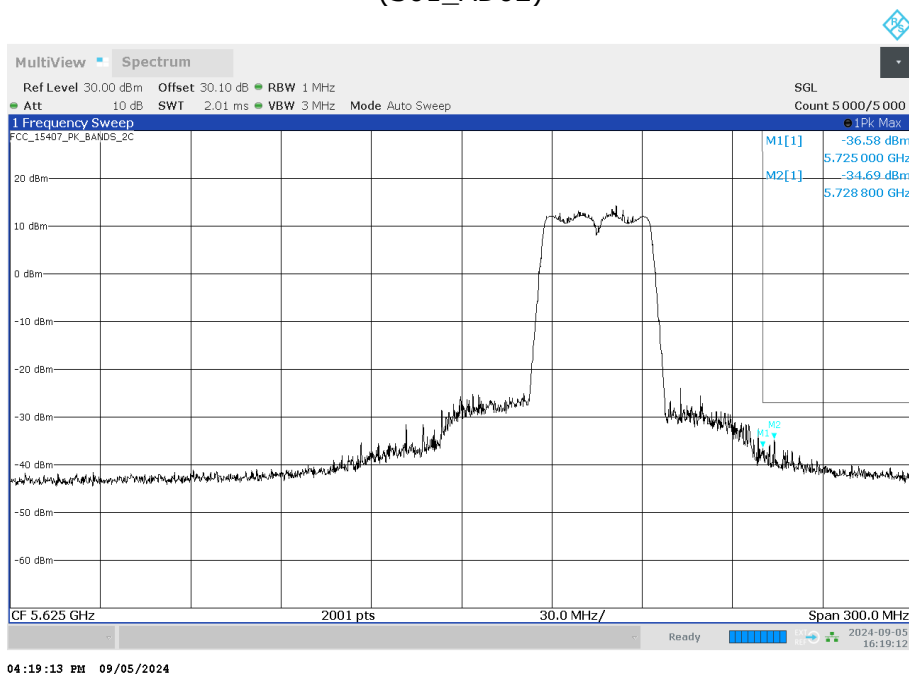


Radio Technology = WLAN ac 40 MHz, Operating Frequency = low, Subband = U-NII-3 (S01_AD02)

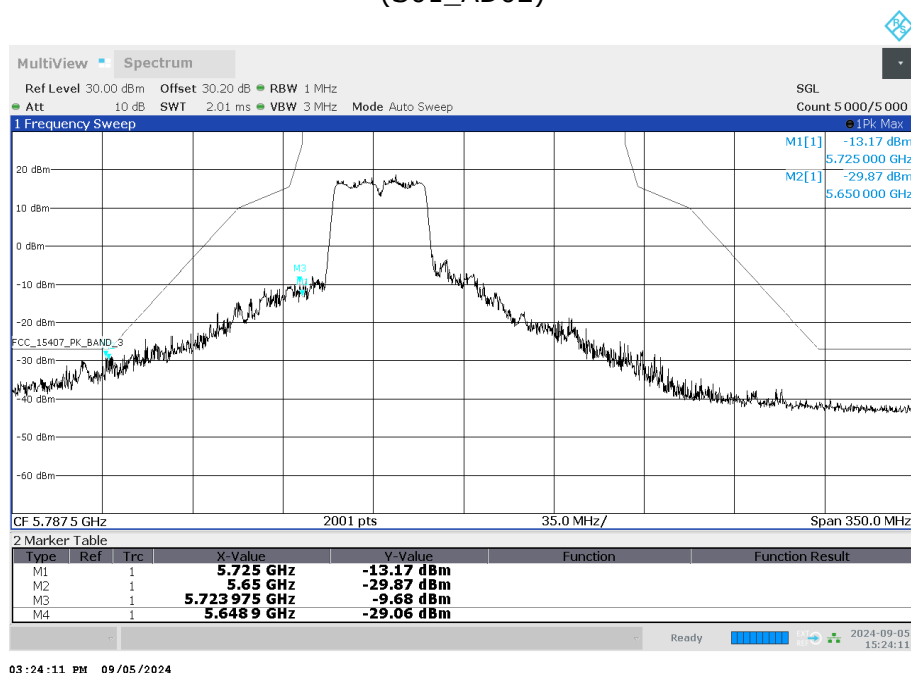

Radio Technology = WLAN ac 40 MHz, Operating Frequency = high, Subband = U-NII-3 (S01_AD02)

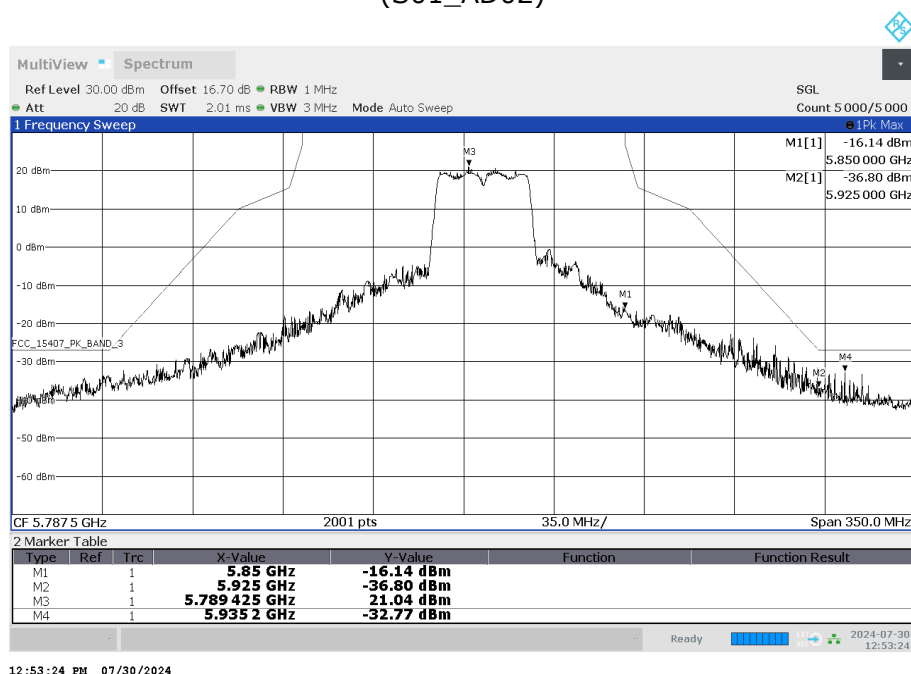

Radio Technology = WLAN ac 80 MHz, Operating Frequency = mid, Subband = U-NII-3
(S02_AC02)

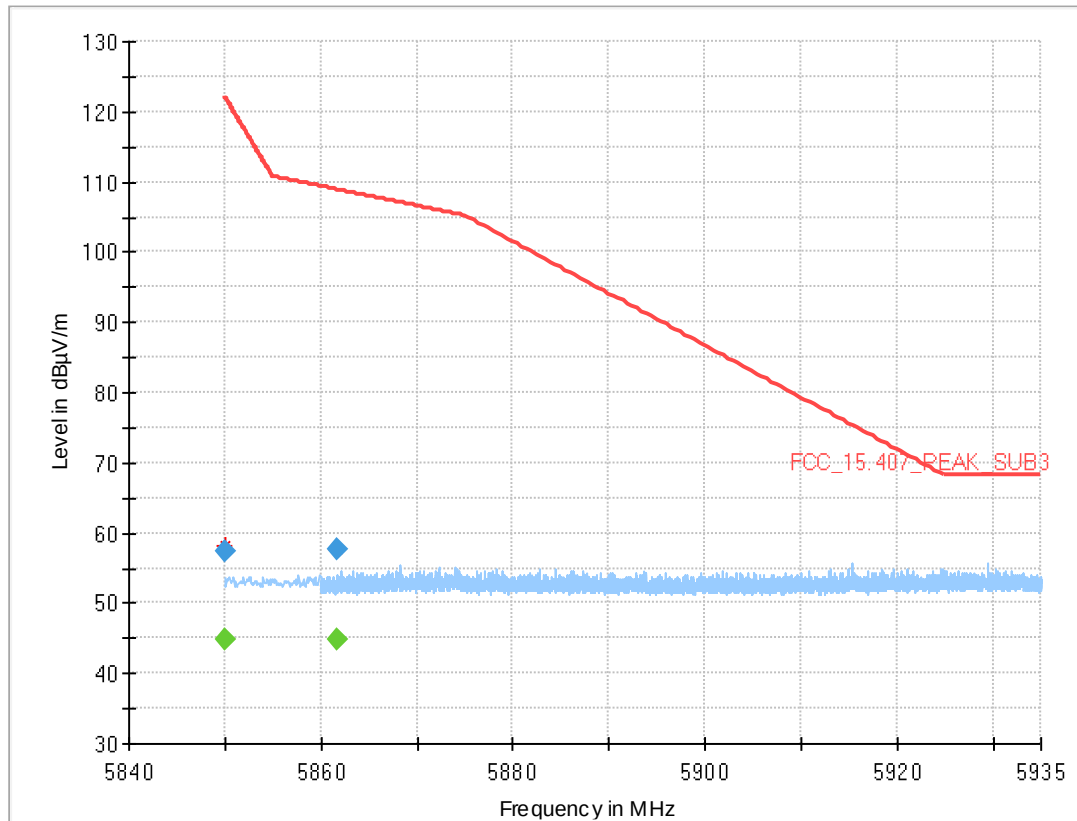


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
5850.000	58.2	---	122.2	63.98	---	---	150.0	V	145.0	105.0	15.8
5861.680	57.7	---	108.9	51.22	---	---	150.0	H	-185.0	10.0	16.0


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
5850.000	---	44.9	---	---	1000.0	1000.000	150.0	V	146.0	105.0	15.8
5850.000	57.4	---	122.2	64.77	1000.0	1000.000	150.0	V	146.0	105.0	15.8
5861.680	---	44.8	---	---	1000.0	1000.000	150.0	H	-185.0	10.0	16.0
5861.680	57.6	---	108.9	51.36	1000.0	1000.000	150.0	H	-185.0	10.0	16.0


Radio Technology = WLAN ac 80 MHz, Operating Frequency = mid, Subband = U-NII-1
(S01_AD02)

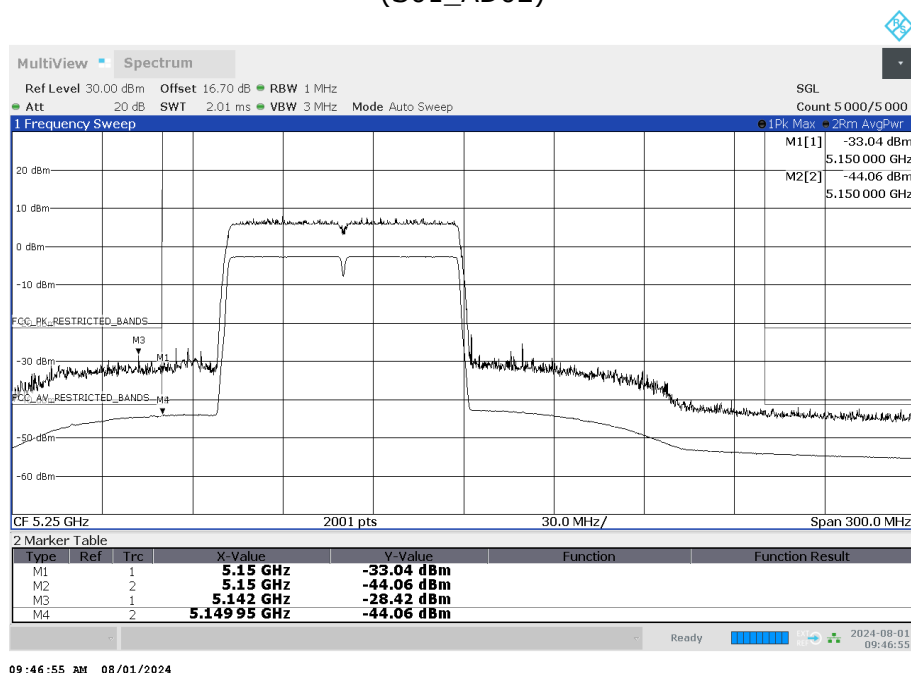


Radio Technology = WLAN ac 80 MHz, Operating Frequency = mid, Subband = U-NII-2A
(S01_AD02)

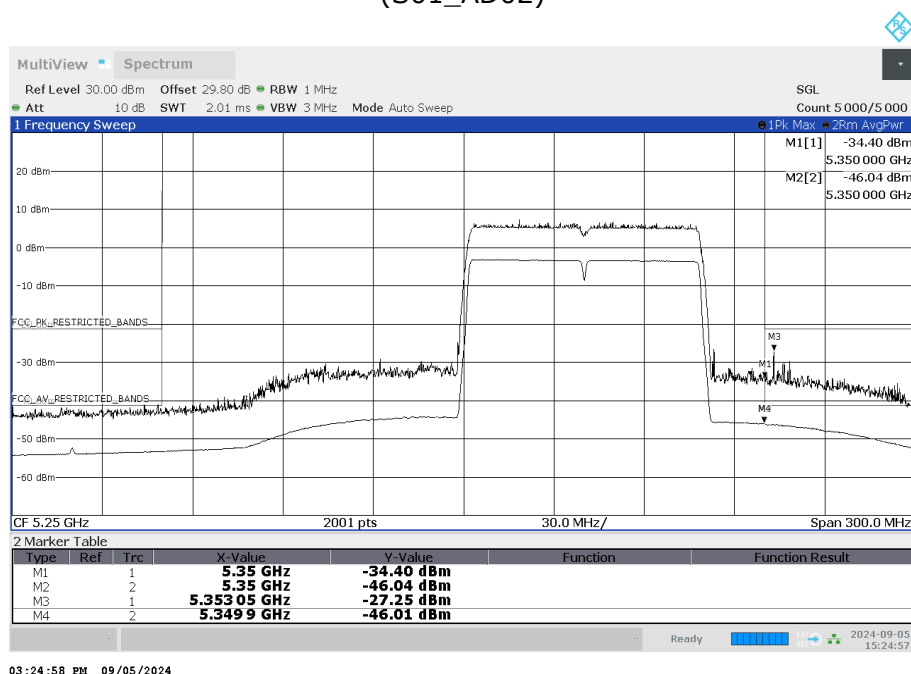


Radio Technology = WLAN ac 80 MHz, Operating Frequency = low, Subband = U-NII-2C
(S01_AD02)

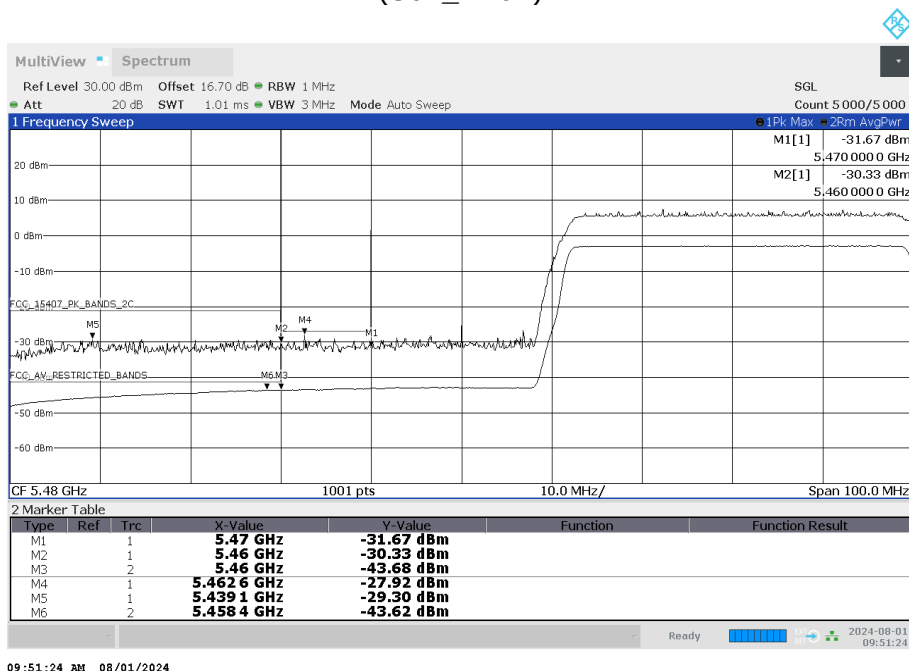


Radio Technology = WLAN ac 80 MHz, Operating Frequency = high, Subband = U-NII-2C
(S01_AD02)

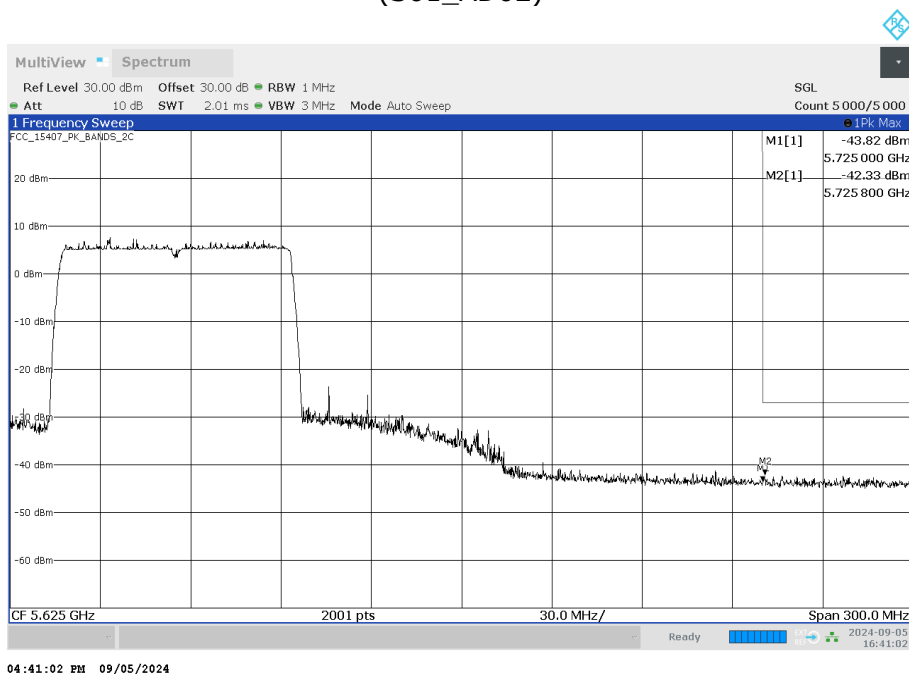

Radio Technology = WLAN ac 80 MHz, Operating Frequency = mid, Subband = U-NII-3
(S01_AD02)

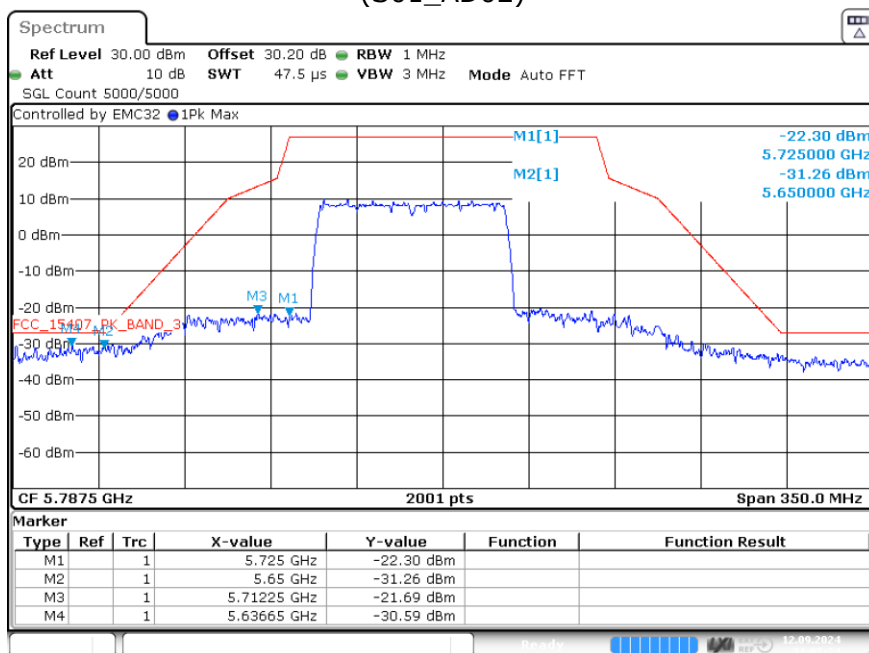


Date: 12.SEP.2024 21:05:24

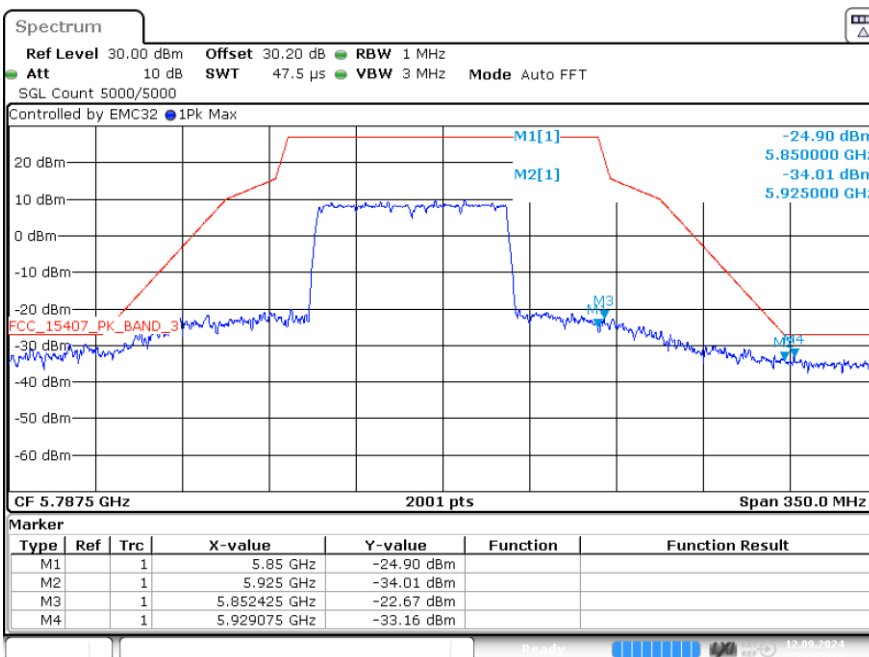


Date: 12.SEP.2024 21:07:26



Radio Technology = WLAN ax 20 MHz, Operating Frequency = low, Subband = U-NII-1
(S01_AD02)

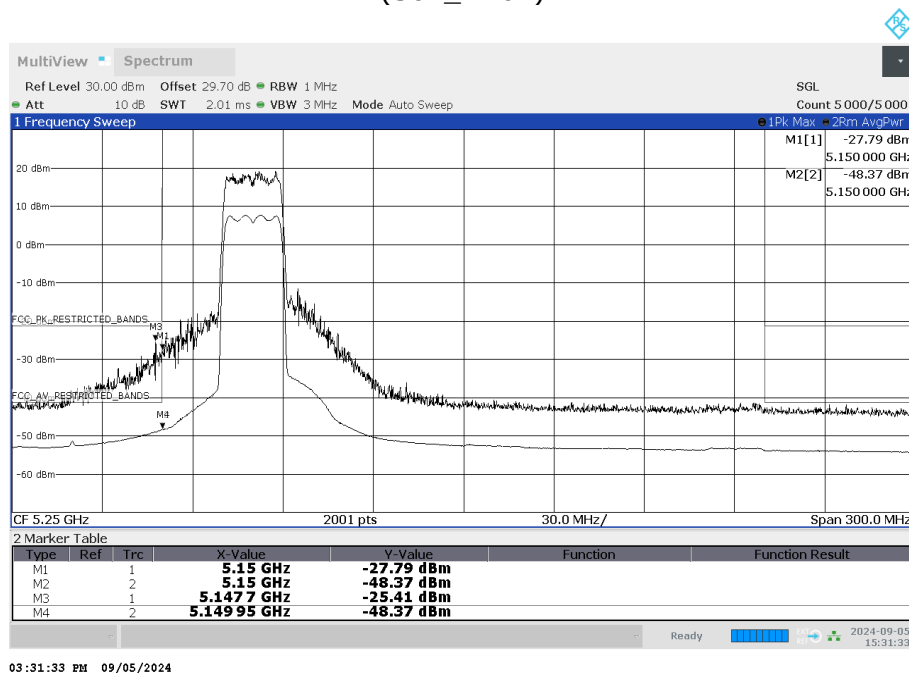


Radio Technology = WLAN ax 20 MHz, Operating Frequency = high, Subband = U-NII-2A
(S01_AD02)

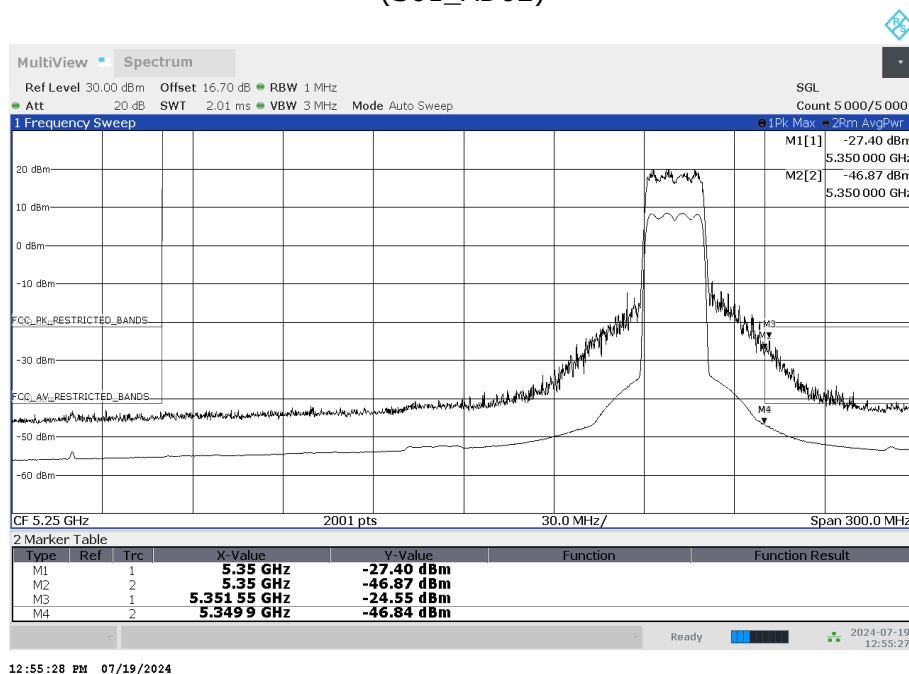


Radio Technology = WLAN ax 20 MHz, Operating Frequency = low, Subband = U-NII-2C (S01_AD02)

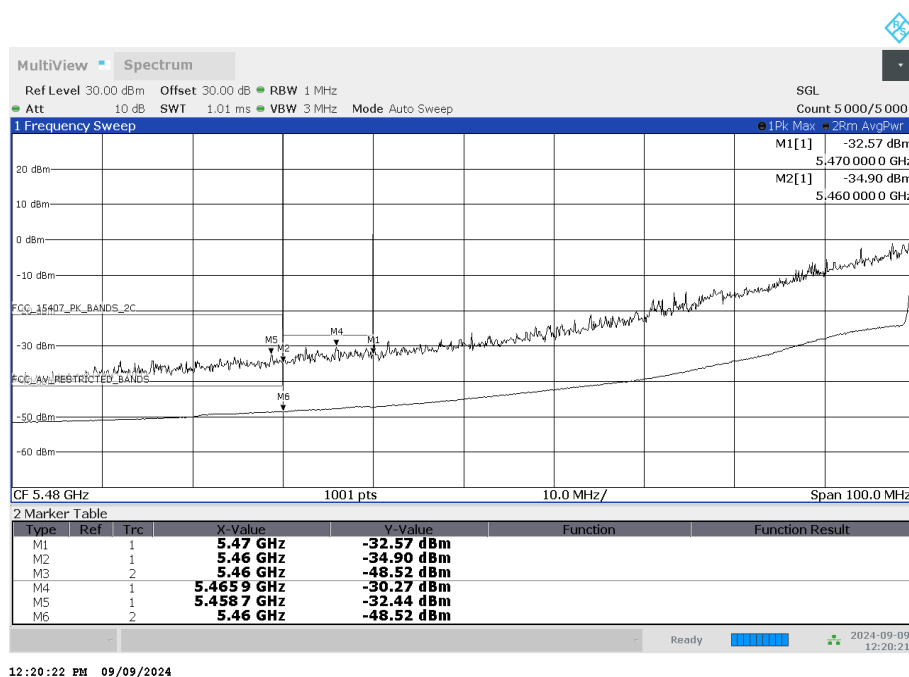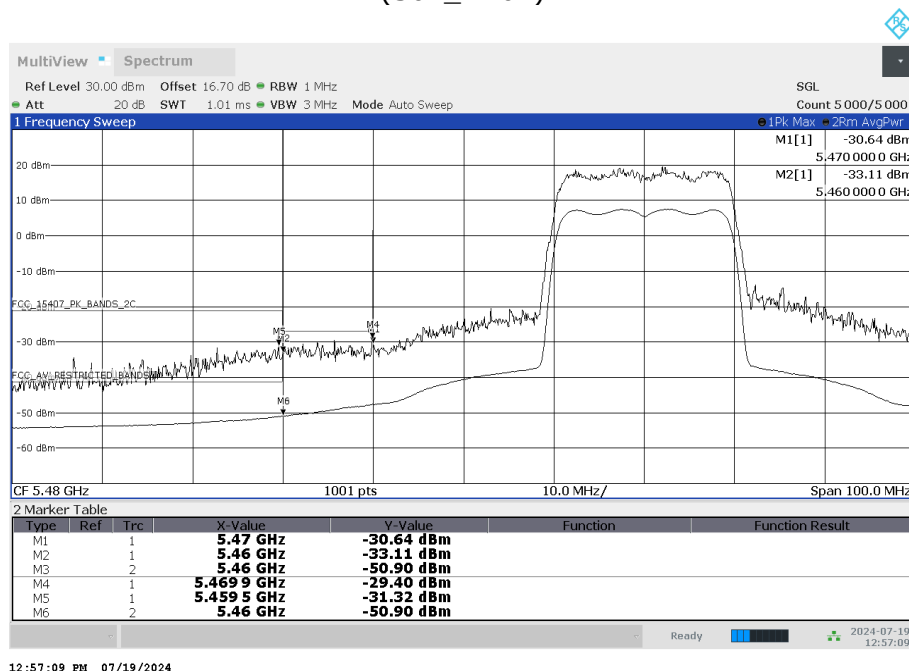


Radio Technology = WLAN ax 20 MHz, Operating Frequency = high, Subband = U-NII-2C (S01_AD02)

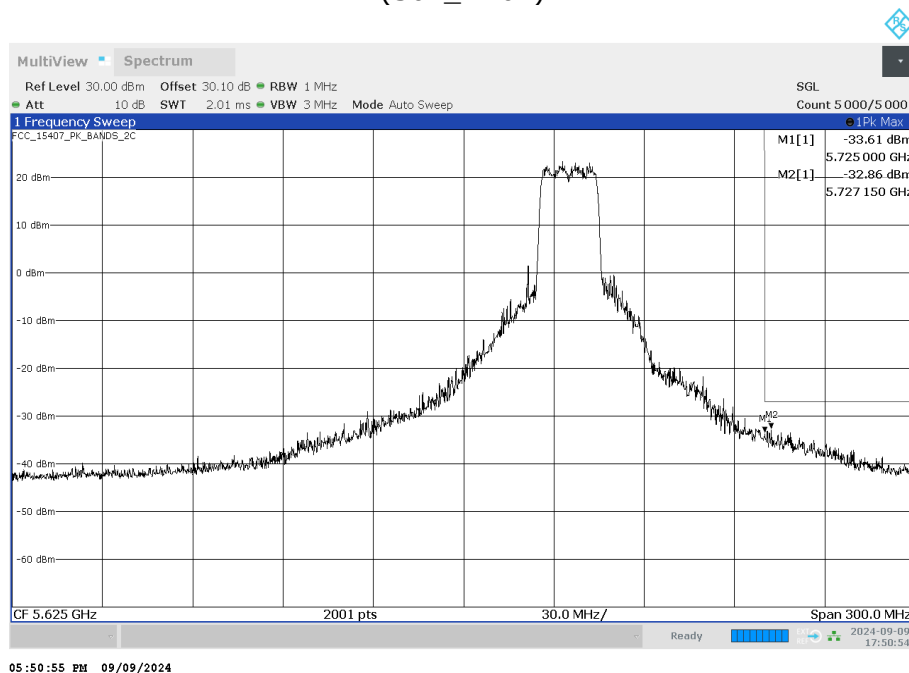


Radio Technology = WLAN ax 20 MHz, Operating Frequency = low, Subband = U-NII-3
(S01_AD02)

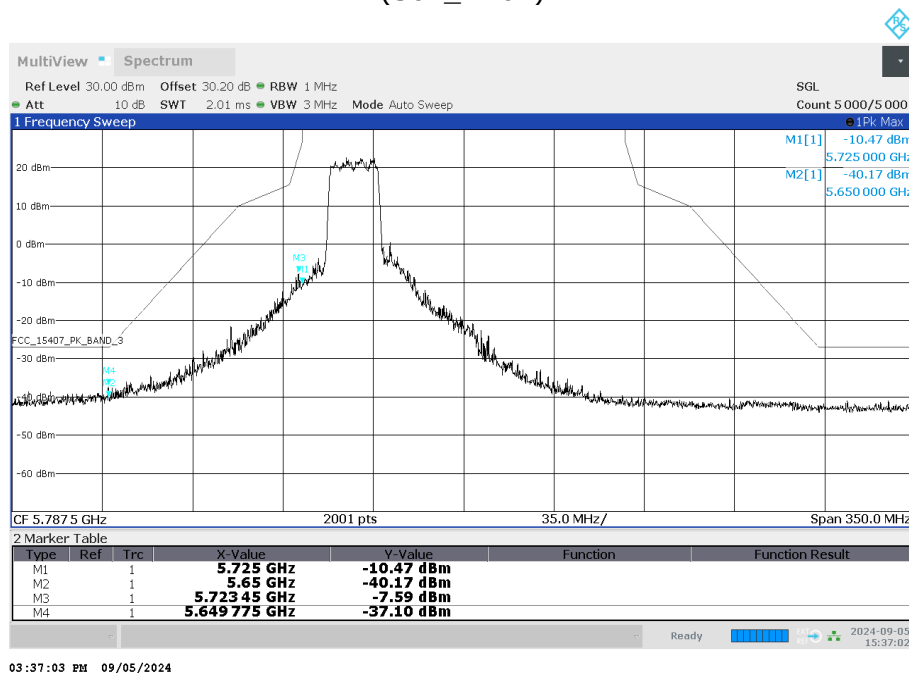


Radio Technology = WLAN ax 20 MHz, Operating Frequency = high, Subband = U-NII-3
(S01_AD02)

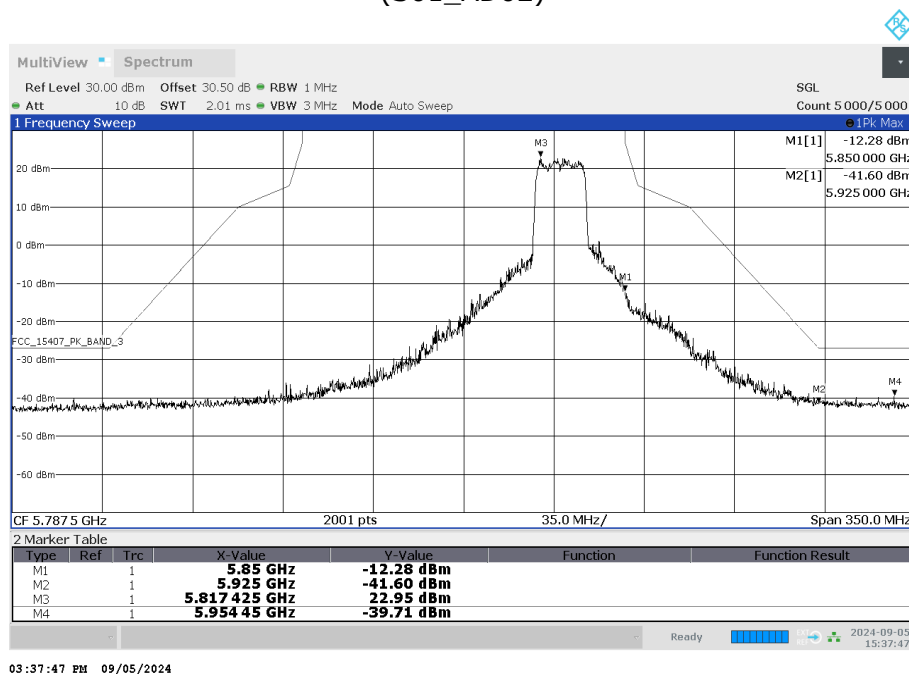


Radio Technology = WLAN ax 40 MHz, Operating Frequency = low, Subband = U-NII-1
(S01_AD02)

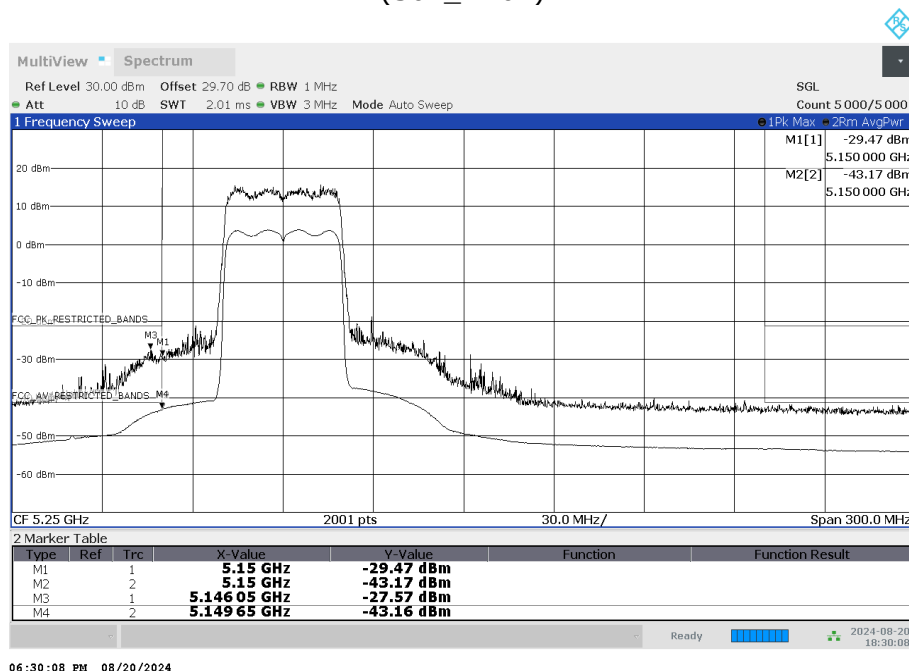


Radio Technology = WLAN ax 40 MHz, Operating Frequency = high, Subband = U-NII-2A
(S01_AD02)

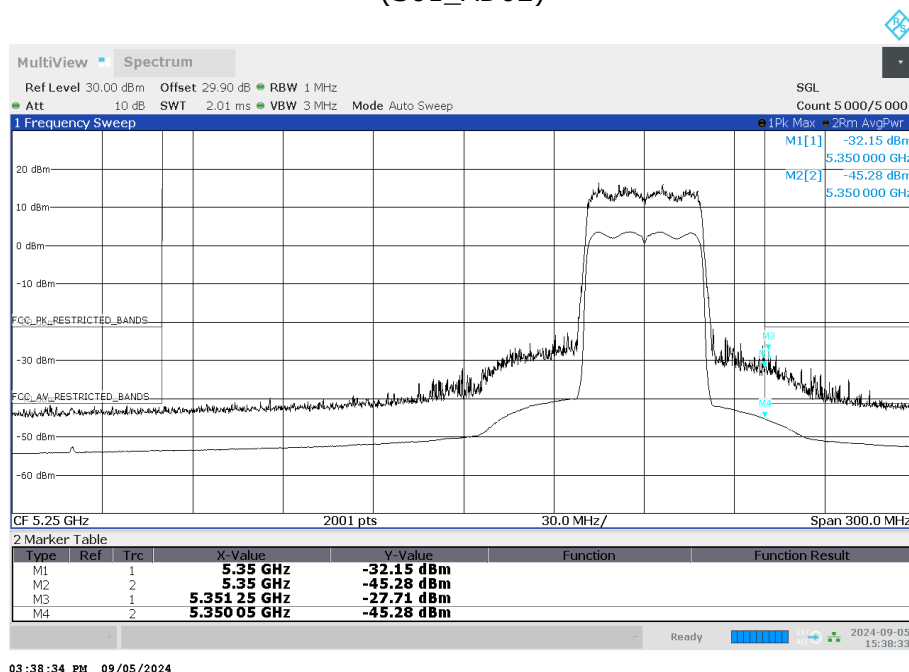


Radio Technology = WLAN ax 40 MHz, Operating Frequency = low, Subband = U-NII-3
(S01_AD02)

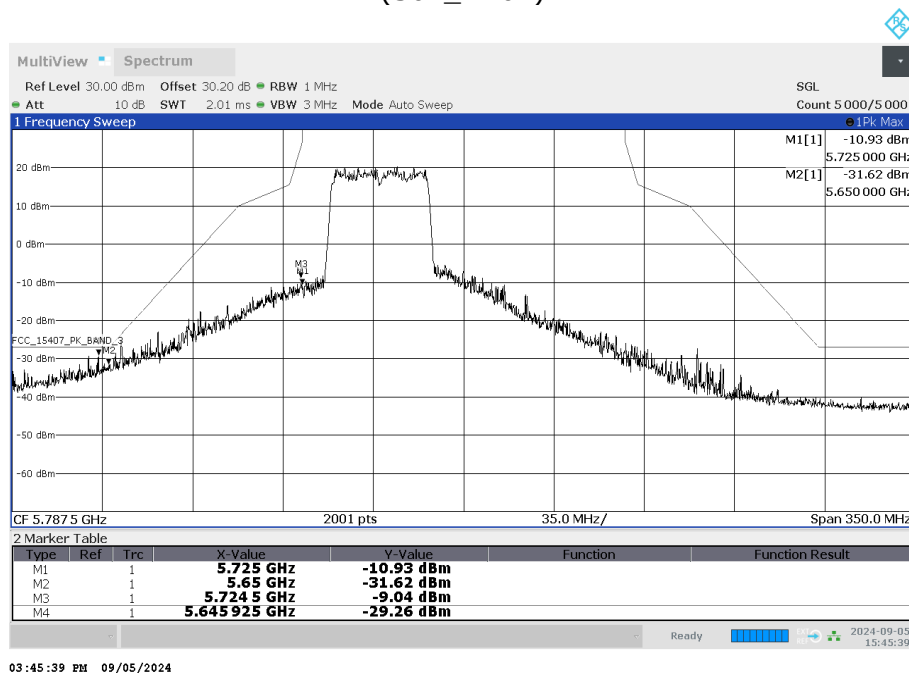


Radio Technology = WLAN ax 40 MHz, Operating Frequency = high, Subband = U-NII-3
(S01_AD02)

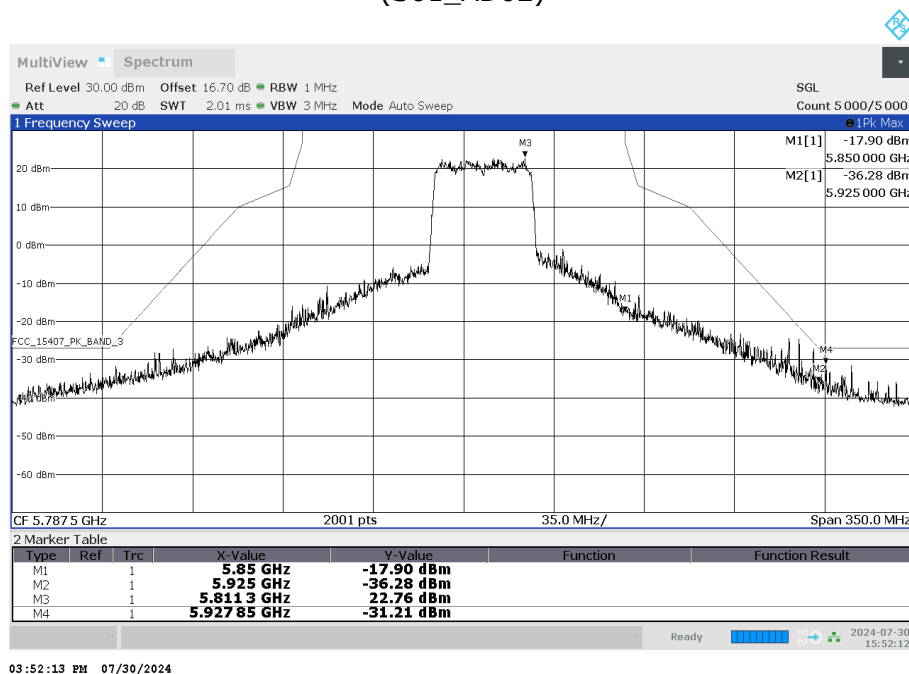


Radio Technology = WLAN ax 80 MHz, Operating Frequency = mid, Subband = U-NII-1
(S01_AD02)

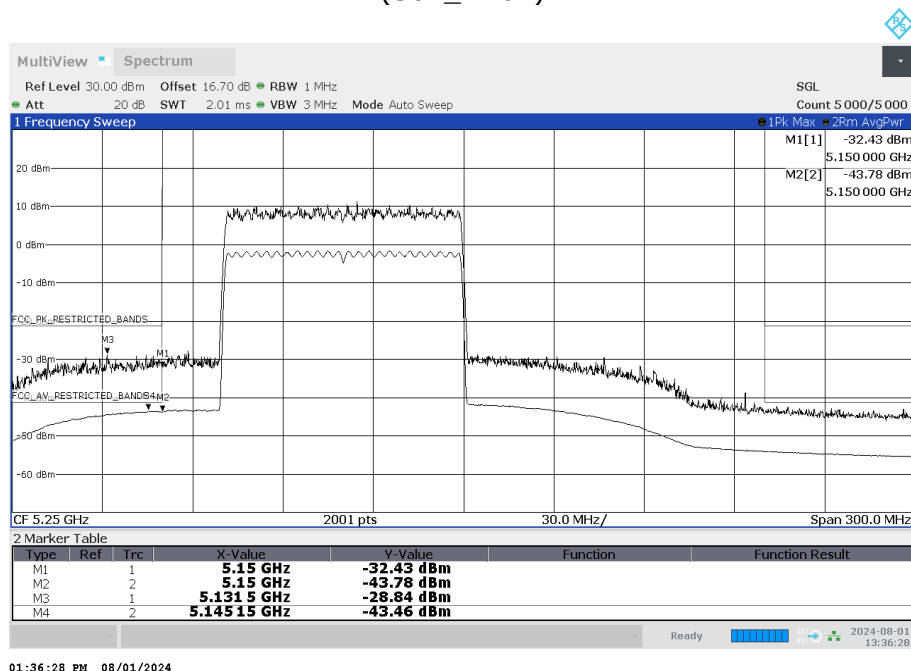


Radio Technology = WLAN ax 80 MHz, Operating Frequency = mid, Subband = U-NII-2A
(S01_AD02)

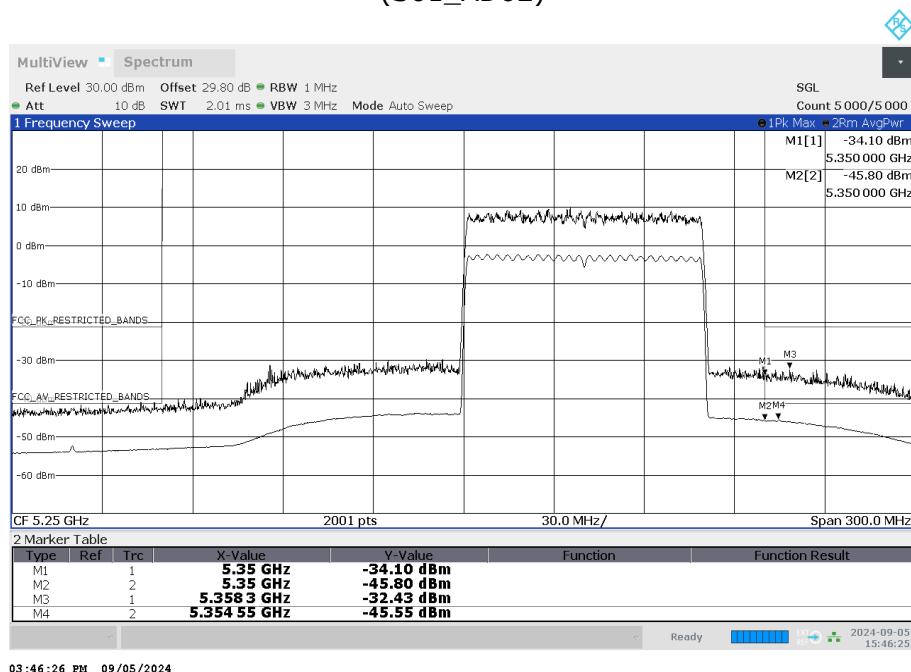


Radio Technology = WLAN ax 80 MHz, Operating Frequency = low, Subband = U-NII-2C (S01_AD02)

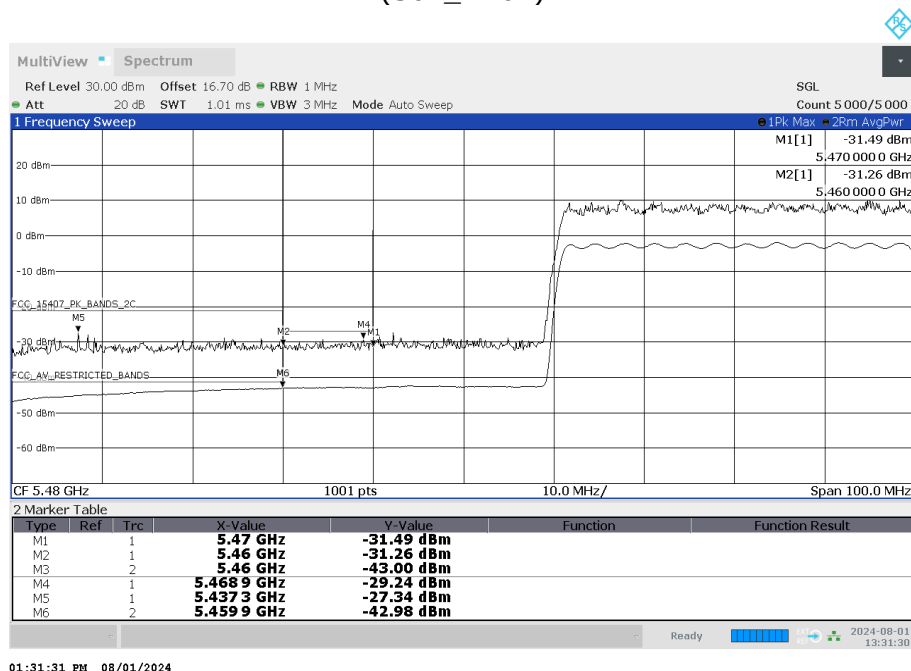


Radio Technology = WLAN ax 80 MHz, Operating Frequency = high, Subband = U-NII-2C (S01_AD02)

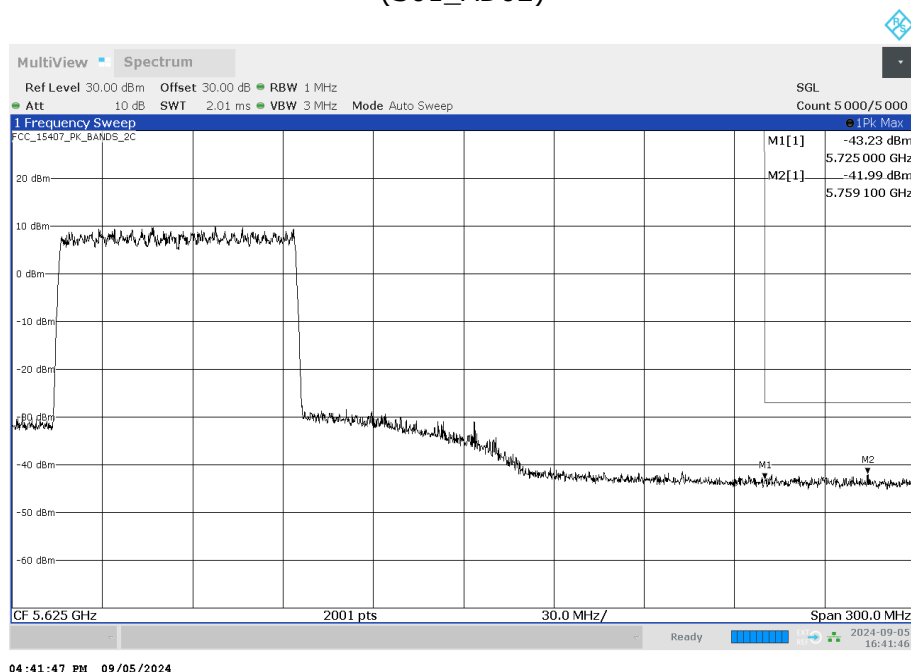

Radio Technology = WLAN ax 80 MHz, Operating Frequency = mid, Subband = U-NII-3
(S01_AD02)

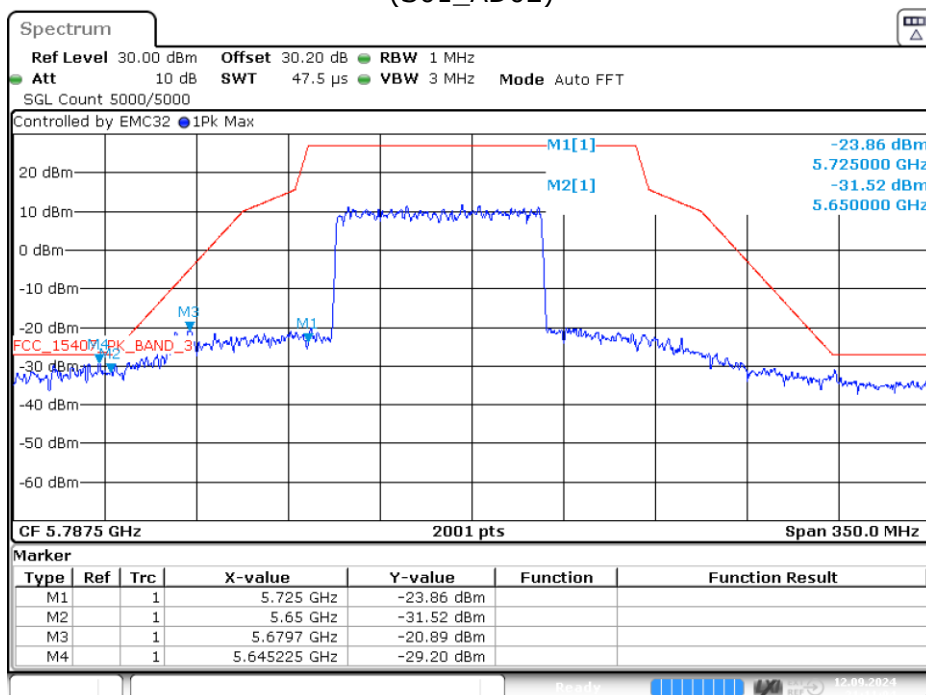

Date: 12.SEP.2024 21:11:04

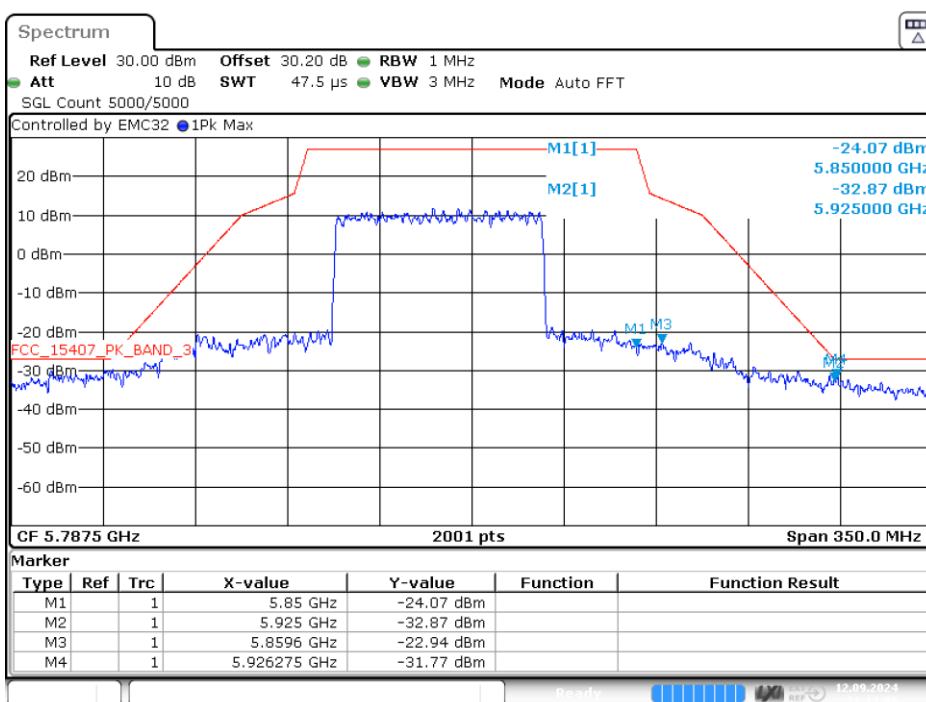

Date: 12.SEP.2024 21:13:06

5.8.5 TEST EQUIPMENT USED

- Radiated Emissions FAR 5 GHz FCC
- R&S TS8997


5.9 DYNAMIC FREQUENCY SELECTION - IN-SERVICE MONITORING FOR CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD

Standard **FCC Part 15 Subpart E**

The test was performed according to:
 KDB 905462

5.9.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up in a shielded room for the DFS measurements. Since the EUT is a slave device without radar detection, it was connected to another device acting as master with radar detection.

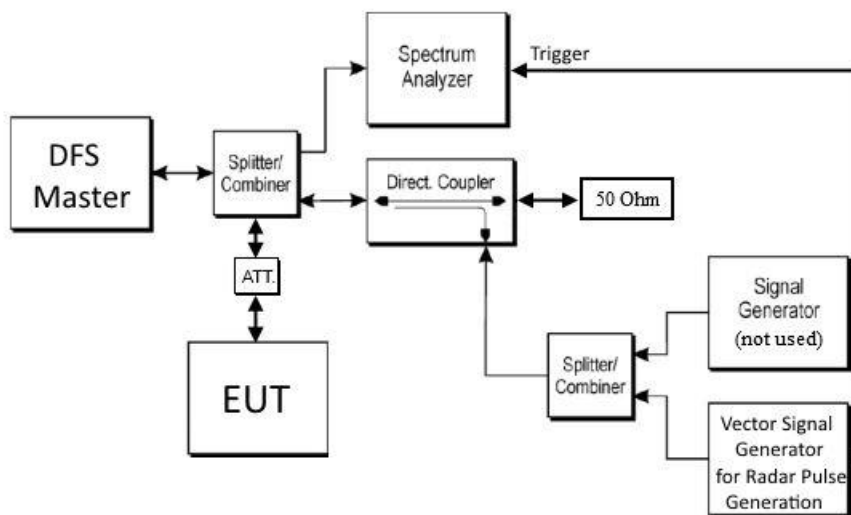

After setting up a connection to the Master using the maximum supported bandwidth of the EUT, a radar pulse of type 0 was sent from the vector signal generator.

At the same time the spectrum analyzer is triggered by the vector signal generator and a trace is recorded:

Analyzer settings:

- Resolution Bandwidth (RBW): 3 MHz
- Video Bandwidth (VBW): 3 MHz
- Trace: Clear/Write
- Sweeps: Single Sweep
- Sweep time: 20 s
- Detector: Peak
- Trigger: External

In addition to the plot also the trace data is recorded to calculate the Channel Closing Time.

Afterwards the test is repeated with a sweep time of 32 minutes to monitor the Non-occupancy period.

5.9.2 TEST REQUIREMENTS / LIMITS

Limits according KDB 905462 D02 UNII DFS Compliance Procedures New Rules

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
Note 1: <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel</i> move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.	

5.9.3 TEST PROTOCOL

Ambient temperature: 24 °C
 Air Pressure: 1006 hPa
 Humidity: 48 %


Operational Mode	Radio Technology	TX Frequency [MHz]	Radar Test Signal #	Channel Closing Transmission Time following the first 200 ms[ms]	Limit [ms]	Channel Move Time [s]	Limit [s]	Transmissions in Non Occupancy Period?
Client without Radar Detection	WLAN ax 80 MHz	5530	Type 0	1.5	60	0.443	10	No

Remark: Please see next sub-clause for the measurement plot.

5.9.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Radio Technology = WLAN ax 80 MHz
(S04_AD02)

Channel Move Time first 200ms

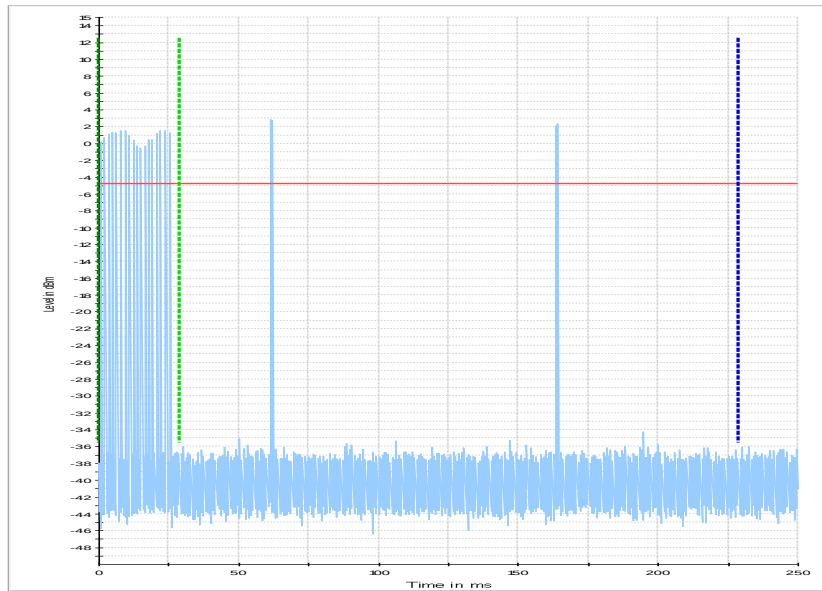


First 200 ms.

Channel Move Time

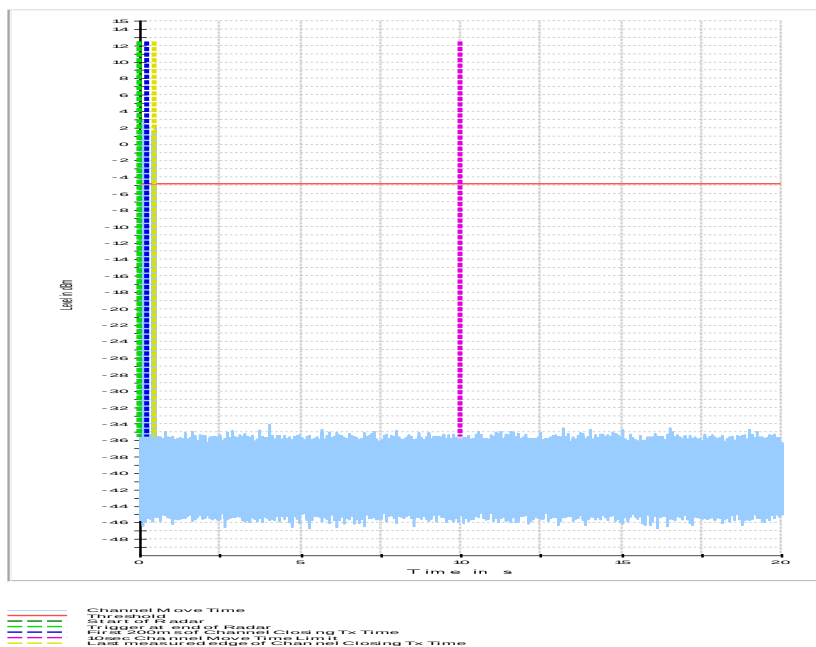

Channel Move Time.

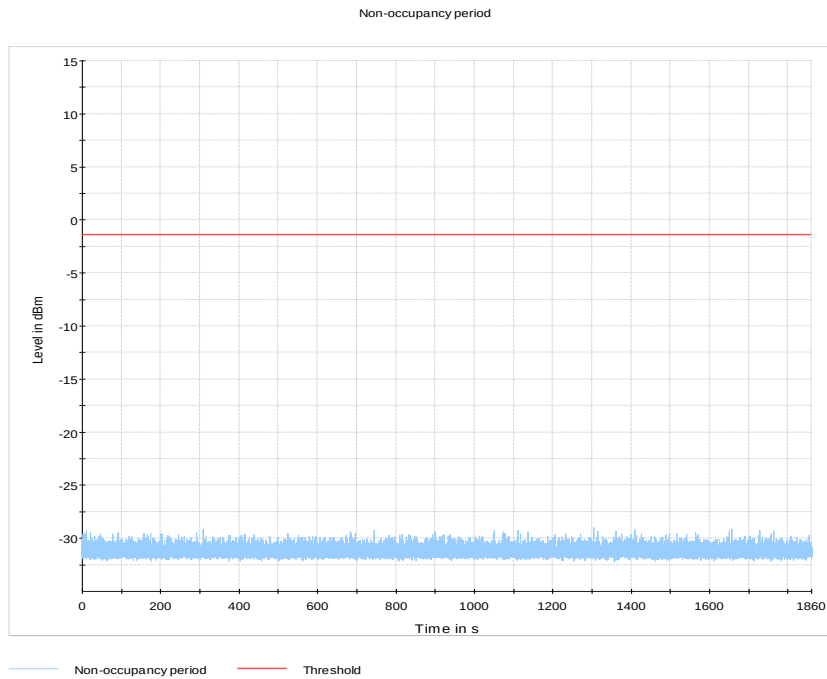

Non Occupancy Period.

5.9.5 TEST EQUIPMENT USED

- R&S TS8997

6 TEST EQUIPMENT

6.1 TEST EQUIPMENT HARDWARE

- 1 Conducted Emissions FCC
Conducted Emissions AC Mains for FCC standards

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.1	Opus10 TPR (8253.00)	T/P Logger 13	Lufft Mess- und Regeltechnik GmbH	13936	2023-12	2025-12
1.2	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2023-08	2025-08
1.3	Chroma 6404	AC Source	Chroma ATE INC.	64040001304	N/A	N/A
1.4	Shielded Room 02	Shielded Room 4m x 3m	Frankonia Germany EMC Solution GmbH	-	N/A	N/A
1.5	ESH3-Z5	Two-Line V-Network (EUT)	Rohde & Schwarz GmbH & Co. KG	829996/002	2023-09	2025-09
1.6	ESR 7	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz	101424	2023-01	2025-01
1.7	Opus10 THI (8152.00)	T/H Logger 02	Lufft Mess- und Regeltechnik GmbH	7489	2023-12	2025-12
1.8	CS-RUB6	Rubidium Frequency Standard	Rohde & Schwarz GmbH & Co. KG	100321	2023-10	2024-10

- 2 R&S TS8997
2.4 and 5 GHz Bands Conducted Test Lab

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.1	Opus10 TPR (8253.00)	T/P Logger 13	Lufft Mess- und Regeltechnik GmbH	13936	2023-12	2025-12
2.2	SMF100A	Signal Generator	Rohde & Schwarz GmbH & Co. KG	104275	2023-08	2026-08
2.3	SMB100A	Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz	107695	2024-07	2027-07
2.4	EX520	Digital Multimeter 12	Extech Instruments Corp	05157876		
2.5	FSV30	Signal Analyzer 10 Hz - 30 GHz	Rohde & Schwarz	103005	2023-08	2025-08
2.6	Temperature Chamber VT 4002	Temperature Chamber Vötsch 03	Vötsch	58566002150010	2024-07	2026-07
2.7	FSW43	Signal Analyser	Rohde & Schwarz GmbH & Co. KG	102013	2023-07	2025-07
2.8	Opus10 THI (8152.00)	T/H Logger 14	Lufft Mess- und Regeltechnik GmbH	13993	2023-12	2025-12
2.9	HMP2020	Programmable Power Supply	Rohde & Schwarz GmbH & Co. KG	101992	N/A	N/A
2.10	SMBV100A	Vector Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz	259291	2023-01	2026-01

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.11	OSP120	Contains Power Meter and Switching Unit OSP-B157W8 PLUS	Rohde & Schwarz	101158	2021-08 2024-08	2024-08 2027-08
2.12	CS-RUB6	Rubidium Frequency Standard	Rohde & Schwarz GmbH & Co. KG	100321	2023-10	2024-10

3 Radiated Emissions FAR 5 GHz FCC
Radiated Emissions Tests for 5 GHz bands in a fully anechoic room

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
3.1	Opus10 TPR (8253.00)	T/P Logger 13	Lufft Mess- und Regeltechnik GmbH	13936	2023-12	2025-12
3.2	Innco Systems CO3000	Controller for bore sight mast FAC	innco systems GmbH	CO3000/1460/54 740522/P	N/A	N/A
3.3	AMF-7D00101800-30-10P-R	Broadband Amplifier 100 MHz - 18 GHz	Miteq		N/A	N/A
3.4	Anechoic Chamber 03	FAR, 8.80m x 4.60m x 4.05m (l x w x h)	Albatross Projects	P26971-647-001-PRB	N/A	N/A
3.5	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2023-08	2025-08
3.6	JS4-18002600-32-5P	Broadband Amplifier 18 GHz - 26 GHz	Miteq	849785	N/A	N/A
3.7	FSW43	Spectrum Analyzer	Rohde & Schwarz GmbH & Co. KG	103779	2023-04	2025-04
3.8	EP 1200/B, NA/B1	AC Source, Amplifier with integrated variable Oscillator	Spitzenberger & Spies GmbH & Co. KG	B6278	N/A	N/A
3.9	3160-09	Standard Gain / Pyramidal Horn Antenna 26.5 GHz	EMCO Elektronik GmbH	00083069	N/A	N/A
3.10	WHKX 7.0/18G-8SS	High Pass Filter	Wainwright Instruments GmbH	09	N/A	N/A
3.11	MA3000/0800-XP-ET-compact	Bore Sight Antenna Mast	innco systems GmbH	9210522	N/A	N/A
3.12	TT 1.5 WI	Turn Table	Maturo GmbH	-	N/A	N/A
3.13	3160-10	Standard Gain / Pyramidal Horn Antenna 40 GHz	EMCO Elektronik GmbH	00086675	N/A	N/A
3.14	Opus 20 THI (8120.00)	ThermoHygro Datalogger	Lufft Mess- und Regeltechnik GmbH	115.0318.0802.033	2023-08	2025-08
3.15	TD1.5-10kg	EUT Tilt Device (Rohacell)	Maturo GmbH	TD1.5-10kg/024/3790709	N/A	N/A

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
3.16	AFS42-00101800-25-S-42	Broadband Amplifier 25 MHz - 18 GHz	Miteq	2035324	N/A	N/A
3.17	HF 907	Double-ridged horn	Rohde & Schwarz	102444	2021-09	2024-09

4 Radiated Emissions SAC H-Field
Radiated emission tests in the H-Field in a semi anechoic room

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
4.1	N5000/NP	Filter for EUT, 2 Lines, 250 V, 16 A	ETS-LINDGREN	241515	N/A	N/A
4.2	Opus10 TPR (8253.00)	T/P Logger 13	Lufft Mess- und Regeltechnik GmbH	13936	2023-12	2025-12
4.3	ESW44	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz GmbH & Co. KG	101603	2024-03	2026-03
4.4	Anechoic Chamber 01	SAC/FAR, 10.58 m x 6.38 m x 6.00 m	Frankonia Germany EMC Solution GmbH	none	N/A	N/A
4.5	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2023-08	2025-08
4.6	Opus10 THI (8152.00)	T/H Logger 10	Lufft Mess- und Regeltechnik GmbH	12488	2023-12	2025-12
4.7	EP 1200/B, NA/B1	AC Source, Amplifier with integrated variable Oscillator	Spitzenberger & Spies GmbH & Co. KG	B6278	N/A	N/A
4.8	DS 420S	Turn Table 2 m diameter	HD GmbH	420/573/99	N/A	N/A
4.9	HFH2-Z2	Loop Antenna + 3 Axis Tripod	Rohde & Schwarz GmbH & Co. KG	829324/006		
4.10	CS-RUB6	Rubidium Frequency Standard	Rohde & Schwarz GmbH & Co. KG	100321	2023-10	2024-10

5 Radiated Emissions SAC up to 1 GHz
Radiated emission tests up to 1 GHz in a semi anechoic room

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
5.1	N5000/NP	Filter for EUT, 2 Lines, 250 V, 16 A	ETS-LINDGREN	241515	N/A	N/A
5.2	Opus10 TPR (8253.00)	T/P Logger 13	Lufft Mess- und Regeltechnik GmbH	13936	2023-12	2025-12
5.3	ESW44	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz GmbH & Co. KG	101603	2024-03	2026-03

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
5.4	Anechoic Chamber 01	SAC/FAR, 10.58 m x 6.38 m x 6.00 m	Frankonia Germany EMC Solution GmbH	none	N/A	N/A
5.5	HL 562 ULTRALOG	Biconical-log-per antenna (30 MHz - 3 GHz) with HL 562E biconicals	Rohde & Schwarz GmbH & Co. KG	830547/003	2021-09	2024-09
5.6	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2023-08	2025-08
5.7	Opus10 THI (8152.00)	T/H Logger 10	Lufft Mess- und Regeltechnik GmbH	12488	2023-12	2025-12
5.8	EP 1200/B, NA/B1	AC Source, Amplifier with integrated variable Oscillator	Spitzenberger & Spies GmbH & Co. KG	B6278	N/A	N/A
5.9	DS 420S	Turn Table 2 m diameter	HD GmbH	420/573/99	N/A	N/A
5.10	CS-RUB6	Rubidium Frequency Standard	Rohde & Schwarz GmbH & Co. KG	100321	2023-10	2024-10
5.11	AM 4.0	Antenna Mast 4 m	Maturo GmbH	AM4.0/180/1192 0513	N/A	N/A

The calibration interval is the time interval between "Last Calibration" and "Calibration Due"

6.2 TEST EQUIPMENT SOFTWARE

Semi-Anechoic Chamber:	
Software	Version
EMC32 Measurement Software	10.60.10
INNCO Mast Controller	1.02.62
MATURO Mast Controller	12.19
MATURO Turn-Table Controller	30.10
Fully-Anechoic Chamber:	
Software	Version
EMC32 Measurement Software	10.60.10
MATURO Turn-Unit Controller	11.10
MATURO Mast Controller	12.10
MATURO Turntable Controller	12.11
INNCO Mast Controller	1.02.62
TS 8997	
WMC32 Measurement Software	11.40.00
Conducted AC Emissions:	
Software	Version
EMC32 Measurement Software	10.60.20

7 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

7.1 LISN R&S ESH3-Z5 (150 KHZ – 30 MHZ)

Frequency		Corr.	LISN insertion loss ESH3-Z5	cable loss (incl. 10 dB atten- uator)
MHz		dB	dB	dB
0.15		10.1	0.1	10.0
5		10.3	0.1	10.2
7		10.5	0.2	10.3
10		10.5	0.2	10.3
12		10.7	0.3	10.4
14		10.7	0.3	10.4
16		10.8	0.4	10.4
18		10.9	0.4	10.5
20		10.9	0.4	10.5
22		11.1	0.5	10.6
24		11.1	0.5	10.6
26		11.2	0.5	10.7
28		11.2	0.5	10.7
30		11.3	0.5	10.8

Sample calculation

$$U_{\text{LISN}} (\text{dB } \mu\text{V}) = U (\text{dB } \mu\text{V}) + \text{Corr. (dB)}$$

U = Receiver reading

LISN Insertion loss = Voltage Division Factor of LISN

Corr. = sum of single correction factors of used LISN, cables, switch units (if used)

Linear interpolation will be used for frequencies in between the values in the table.

7.2 ANTENNA R&S HFH2-Z2 (9 KHZ – 30 MHZ)

Frequency	AF HFH- Z2)	Corr.	cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-40 dB/ decade)	d _{Limit} (meas. distance (limit)	d _{used} (meas. distance (used)
MHz	dB (1/m)	dB	dB	dB	dB	dB	dB	m	m
0.009	20.50	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.01	20.45	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.015	20.37	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.02	20.36	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.025	20.38	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.03	20.32	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.05	20.35	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.08	20.30	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.1	20.20	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.2	20.17	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.3	20.14	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.49	20.12	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.490001	20.12	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.5	20.11	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.8	20.10	-39.6	0.1	0.1	0.1	0.1	-40	30	3
1	20.09	-39.6	0.1	0.1	0.1	0.1	-40	30	3
2	20.08	-39.6	0.1	0.1	0.1	0.1	-40	30	3
3	20.06	-39.6	0.1	0.1	0.1	0.1	-40	30	3
4	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
5	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
6	20.02	-39.5	0.2	0.1	0.1	0.1	-40	30	3
8	19.95	-39.5	0.2	0.1	0.1	0.1	-40	30	3
10	19.83	-39.4	0.2	0.1	0.2	0.1	-40	30	3
12	19.71	-39.4	0.2	0.1	0.2	0.1	-40	30	3
14	19.54	-39.4	0.2	0.1	0.2	0.1	-40	30	3
16	19.53	-39.3	0.3	0.1	0.2	0.1	-40	30	3
18	19.50	-39.3	0.3	0.1	0.2	0.1	-40	30	3
20	19.57	-39.3	0.3	0.1	0.2	0.1	-40	30	3
22	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
24	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
26	19.54	-39.3	0.3	0.1	0.2	0.1	-40	30	3
28	19.46	-39.2	0.3	0.1	0.3	0.1	-40	30	3
30	19.73	-39.1	0.4	0.1	0.3	0.1	-40	30	3

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-40 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values

7.3 ANTENNA R&S HL562 (30 MHz – 1 GHz)

($d_{\text{Limit}} = 3 \text{ m}$)

Frequency	AF R&S HL562	Corr.
MHz	dB (1/m)	dB
30	18.6	0.6
50	6.0	0.9
100	9.7	1.2
150	7.9	1.6
200	7.6	1.9
250	9.5	2.1
300	11.0	2.3
350	12.4	2.6
400	13.6	2.9
450	14.7	3.1
500	15.6	3.2
550	16.3	3.5
600	17.2	3.5
650	18.1	3.6
700	18.5	3.6
750	19.1	4.1
800	19.6	4.1
850	20.1	4.4
900	20.8	4.7
950	21.1	4.8
1000	21.6	4.9

cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-20 dB/ decade)	d_{Limit} (meas. distance (limit))	d_{used} (meas. distance (used))
dB	dB	dB	dB	dB	m	m
0.29	0.04	0.23	0.02	0.0	3	3
0.39	0.09	0.32	0.08	0.0	3	3
0.56	0.14	0.47	0.08	0.0	3	3
0.73	0.20	0.59	0.12	0.0	3	3
0.84	0.21	0.70	0.11	0.0	3	3
0.98	0.24	0.80	0.13	0.0	3	3
1.04	0.26	0.89	0.15	0.0	3	3
1.18	0.31	0.96	0.13	0.0	3	3
1.28	0.35	1.03	0.19	0.0	3	3
1.39	0.38	1.11	0.22	0.0	3	3
1.44	0.39	1.20	0.19	0.0	3	3
1.55	0.46	1.24	0.23	0.0	3	3
1.59	0.43	1.29	0.23	0.0	3	3
1.67	0.34	1.35	0.22	0.0	3	3
1.67	0.42	1.41	0.15	0.0	3	3
1.87	0.54	1.46	0.25	0.0	3	3
1.90	0.46	1.51	0.25	0.0	3	3
1.99	0.60	1.56	0.27	0.0	3	3
2.14	0.60	1.63	0.29	0.0	3	3
2.22	0.60	1.66	0.33	0.0	3	3
2.23	0.61	1.71	0.30	0.0	3	3

($d_{\text{Limit}} = 10 \text{ m}$)

30	18.6	-9.9
50	6.0	-9.6
100	9.7	-9.2
150	7.9	-8.8
200	7.6	-8.6
250	9.5	-8.3
300	11.0	-8.1
350	12.4	-7.9
400	13.6	-7.6
450	14.7	-7.4
500	15.6	-7.2
550	16.3	-7.0
600	17.2	-6.9
650	18.1	-6.9
700	18.5	-6.8
750	19.1	-6.3
800	19.6	-6.3
850	20.1	-6.0
900	20.8	-5.8
950	21.1	-5.6
1000	21.6	-5.6

0.29	0.04	0.23	0.02	-10.5	10	3
0.39	0.09	0.32	0.08	-10.5	10	3
0.56	0.14	0.47	0.08	-10.5	10	3
0.73	0.20	0.59	0.12	-10.5	10	3
0.84	0.21	0.70	0.11	-10.5	10	3
0.98	0.24	0.80	0.13	-10.5	10	3
1.04	0.26	0.89	0.15	-10.5	10	3
1.18	0.31	0.96	0.13	-10.5	10	3
1.28	0.35	1.03	0.19	-10.5	10	3
1.39	0.38	1.11	0.22	-10.5	10	3
1.44	0.39	1.20	0.19	-10.5	10	3
1.55	0.46	1.24	0.23	-10.5	10	3
1.59	0.43	1.29	0.23	-10.5	10	3
1.67	0.34	1.35	0.22	-10.5	10	3
1.67	0.42	1.41	0.15	-10.5	10	3
1.87	0.54	1.46	0.25	-10.5	10	3
1.90	0.46	1.51	0.25	-10.5	10	3
1.99	0.60	1.56	0.27	-10.5	10	3
2.14	0.60	1.63	0.29	-10.5	10	3
2.22	0.60	1.66	0.33	-10.5	10	3
2.23	0.61	1.71	0.30	-10.5	10	3

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

7.4 ANTENNA R&S HF907 (1 GHZ – 18 GHZ)

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
1000	24.4	-19.4
2000	28.5	-17.4
3000	31.0	-16.1
4000	33.1	-14.7
5000	34.4	-13.7
6000	34.7	-12.7
7000	35.6	-11.0

cable loss 1 (relay + cable inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit, atten- uator & pre-amp)	cable loss 4 (to receiver)		
dB	dB	dB	dB		
0.99	0.31	-21.51	0.79		
1.44	0.44	-20.63	1.38		
1.87	0.53	-19.85	1.33		
2.41	0.67	-19.13	1.31		
2.78	0.86	-18.71	1.40		
2.74	0.90	-17.83	1.47		
2.82	0.86	-16.19	1.46		

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
3000	31.0	-23.4
4000	33.1	-23.3
5000	34.4	-21.7
6000	34.7	-21.2
7000	35.6	-19.8

cable loss 1 (relay inside chamber)	cable loss 2 (inside chamber)	cable loss 3 (outside chamber)	cable loss 4 (switch unit, atten- uator & pre-amp)	cable loss 5 (to receiver)	used for FCC 15.247
dB	dB	dB	dB	dB	
0.47	1.87	0.53	-27.58	1.33	
0.56	2.41	0.67	-28.23	1.31	
0.61	2.78	0.86	-27.35	1.40	
0.58	2.74	0.90	-26.89	1.47	
0.66	2.82	0.86	-25.58	1.46	

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
7000	35.6	-57.3
8000	36.3	-56.3
9000	37.1	-55.3
10000	37.5	-56.2
11000	37.5	-55.3
12000	37.6	-53.7
13000	38.2	-53.5
14000	39.9	-56.3
15000	40.9	-54.1
16000	41.3	-54.1
17000	42.8	-54.4
18000	44.2	-54.7

cable loss 1 (relay inside chamber)	cable loss 2 (High Pass)	cable loss 3 (pre- amp)	cable loss 4 (inside chamber)	cable loss 5 (outside chamber)	cable loss 6 (to receiver)
dB	dB	dB	dB	dB	dB
0.56	1.28	-62.72	2.66	0.94	1.46
0.69	0.71	-61.49	2.84	1.00	1.53
0.68	0.65	-60.80	3.06	1.09	1.60
0.70	0.54	-61.91	3.28	1.20	1.67
0.80	0.61	-61.40	3.43	1.27	1.70
0.84	0.42	-59.70	3.53	1.26	1.73
0.83	0.44	-59.81	3.75	1.32	1.83
0.91	0.53	-63.03	3.91	1.40	1.77
0.98	0.54	-61.05	4.02	1.44	1.83
1.23	0.49	-61.51	4.17	1.51	1.85
1.36	0.76	-62.36	4.34	1.53	2.00
1.70	0.53	-62.88	4.41	1.55	1.91

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

7.5 ANTENNA EMCO 3160-09 (18 GHZ – 26.5 GHZ)

Frequency	AF EMCO 3160-09	Corr.	cable loss 1 (inside chamber)	cable loss 2 (pre- amp)	cable loss 3 (inside chamber)	cable loss 4 (switch unit)	cable loss 5 (to receiver)
MHz	dB (1/m)	dB	dB	dB	dB	dB	dB
18000	40.2	-23.5	0.72	-35.85	6.20	2.81	2.65
18500	40.2	-23.2	0.69	-35.71	6.46	2.76	2.59
19000	40.2	-22.0	0.76	-35.44	6.69	3.15	2.79
19500	40.3	-21.3	0.74	-35.07	7.04	3.11	2.91
20000	40.3	-20.3	0.72	-34.49	7.30	3.07	3.05
20500	40.3	-19.9	0.78	-34.46	7.48	3.12	3.15
21000	40.3	-19.1	0.87	-34.07	7.61	3.20	3.33
21500	40.3	-19.1	0.90	-33.96	7.47	3.28	3.19
22000	40.3	-18.7	0.89	-33.57	7.34	3.35	3.28
22500	40.4	-19.0	0.87	-33.66	7.06	3.75	2.94
23000	40.4	-19.5	0.88	-33.75	6.92	3.77	2.70
23500	40.4	-19.3	0.90	-33.35	6.99	3.52	2.66
24000	40.4	-19.8	0.88	-33.99	6.88	3.88	2.58
24500	40.4	-19.5	0.91	-33.89	7.01	3.93	2.51
25000	40.4	-19.3	0.88	-33.00	6.72	3.96	2.14
25500	40.5	-20.4	0.89	-34.07	6.90	3.66	2.22
26000	40.5	-21.3	0.86	-35.11	7.02	3.69	2.28
26500	40.5	-21.1	0.90	-35.20	7.15	3.91	2.36

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

7.6 ANTENNA EMCO 3160-10 (26.5 GHZ – 40 GHZ)

Frequency GHz	AF EMCO 3160-10 dB (1/m)	Corr. dB	cable loss 1 (inside chamber) dB	cable loss 2 (outside chamber) dB	cable loss 3 (switch unit) dB	cable loss 4 (to receiver) dB	distance corr. (-20 dB/ decade) dB	d _{Limit} (meas. distance (limit) m	d _{used} (meas. distance (used) m
26.5	43.4	-11.2	4.4				-9.5	3	1.0
27.0	43.4	-11.2	4.4				-9.5	3	1.0
28.0	43.4	-11.1	4.5				-9.5	3	1.0
29.0	43.5	-11.0	4.6				-9.5	3	1.0
30.0	43.5	-10.9	4.7				-9.5	3	1.0
31.0	43.5	-10.8	4.7				-9.5	3	1.0
32.0	43.5	-10.7	4.8				-9.5	3	1.0
33.0	43.6	-10.7	4.9				-9.5	3	1.0
34.0	43.6	-10.6	5.0				-9.5	3	1.0
35.0	43.6	-10.5	5.1				-9.5	3	1.0
36.0	43.6	-10.4	5.1				-9.5	3	1.0
37.0	43.7	-10.3	5.2				-9.5	3	1.0
38.0	43.7	-10.2	5.3				-9.5	3	1.0
39.0	43.7	-10.2	5.4				-9.5	3	1.0
40.0	43.8	-10.1	5.5				-9.5	3	1.0

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

distance correction = $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$


Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

8 MEASUREMENT UNCERTAINTIES

Test Case	Parameter	Uncertainty
AC Power Line	Power	± 3.4 dB
Field Strength of spurious radiation	Power	± 5.5 dB
6 dB / 26 dB / 99% Bandwidth	Power Frequency	± 2.9 dB ± 11.2 kHz
Conducted Output Power	Power	± 2.2 dB
Band Edge Compliance	Power Frequency	± 2.2 dB ± 11.2 kHz
Frequency Stability	Frequency	± 25 Hz
Power Spectral Density	Power	± 2.2 dB

The measurement uncertainties for all parameters are calculated with an expansion factor (coverage factor) $k = 1.96$. This means, that the true value is in the corresponding interval with a probability of 95 %.

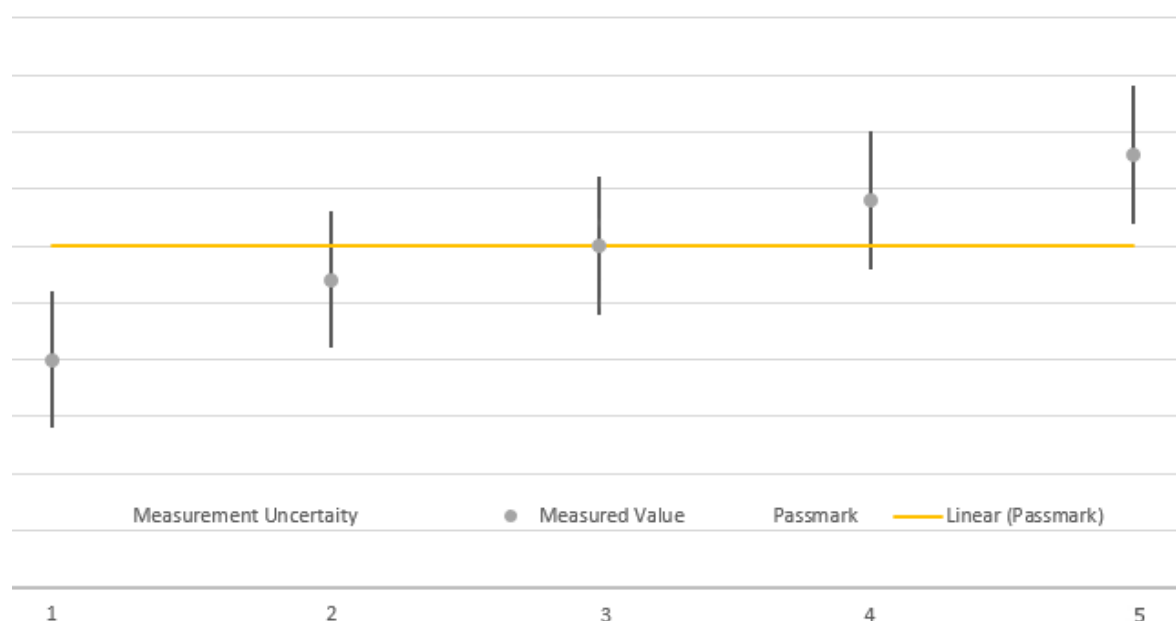

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	on pass mark	within pass mark	Passed
4	above pass mark	within pass mark	Failed
5	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.

9 PHOTO REPORT

Please see separate photo report.

*****END OF TEST REPORT*****