



REPORT No.: SZ25040036S02

Annex D Plots of Maximum SAR Test Results



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

[Http://www.morlab.cn](http://www.morlab.cn)

Fax: 86-755-36698525

E-mail: service@morlab.cn

Date: 2025.04.22

5G NR n2_20MHz_DFT-S-QPSK_1RB_1Offset_Right Cheek_Ch376000_ANT 1

Communication System: UID 0, 5G NR (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 39.813$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.6, 7.6, 7.6) @ 1880 MHz; Calibrated: 2024.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2024.07.05
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch376000/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.21 W/kg

Ch376000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.06 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 0.702 W/kg; SAR(10 g) = 0.324 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 47.4%

Maximum value of SAR (measured) = 1.32 W/kg

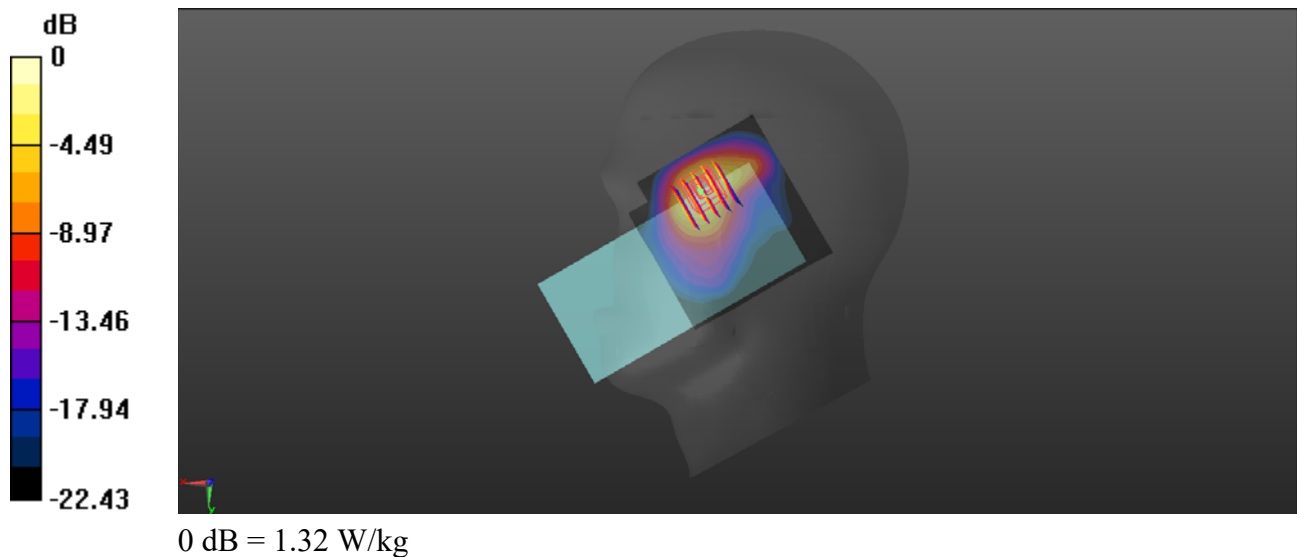

Date: 2025.04.21

5G NR n5_20MHz_DFT-S-QPSK_1RB 1offset_Left Cheek_Ch167300_ANT 0

Communication System: UID 0, UMTS-FDD (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: HSL_900 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 41.412$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(9.39, 9.39, 9.39) @ 836.5 MHz; Calibrated: 2024.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2024.07.05
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch167300/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.290 W/kg

Ch167300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.243 V/m; Power Drift = 0.05 dB



Peak SAR (extrapolated) = 0.314 W/kg

SAR(1 g) = 0.332 W/kg; SAR(10 g) = 0.105 W/kg

Smallest distance from peaks to all points 3 dB

Ratio of SAR at M2 to SAR at M1 = 81.7%

Maximum value of SAR (measured) = 0.290 W/kg

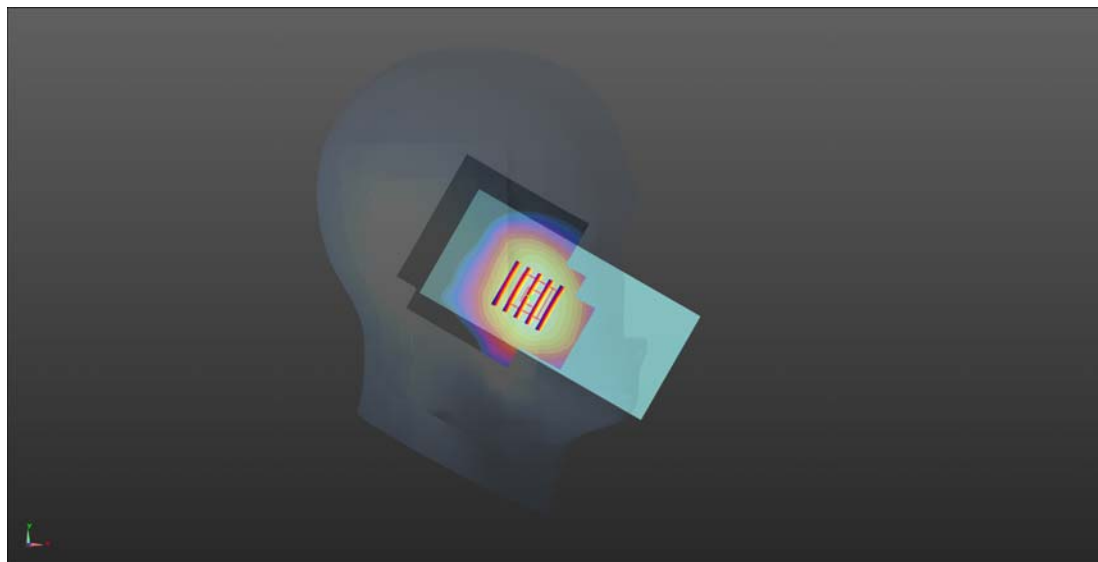

0 dB = 0.290 W/kg

Date: 2025.04.26

5G NR n7_20MHz_DFT-S-QPSK_1RB 1offset_Left Cheek_Ch512000_ANT 0

Communication System: UID 0, LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.982$ S/m; $\epsilon_r = 36.828$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.09, 7.09, 7.09) @ 2560 MHz; Calibrated: 2024.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2024.07.05
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch512000/Area Scan (71x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.473 W/kg

Ch512000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.282 V/m; Power Drift = 0.1 dB



Peak SAR (extrapolated) = 0.610 W/kg

SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.196 W/kg

Smallest distance from peaks to all points 3 dB below = 14.7 mm

Ratio of SAR at M2 to SAR at M1 = 57.2%

Maximum value of SAR (measured) = 0.478 W/kg

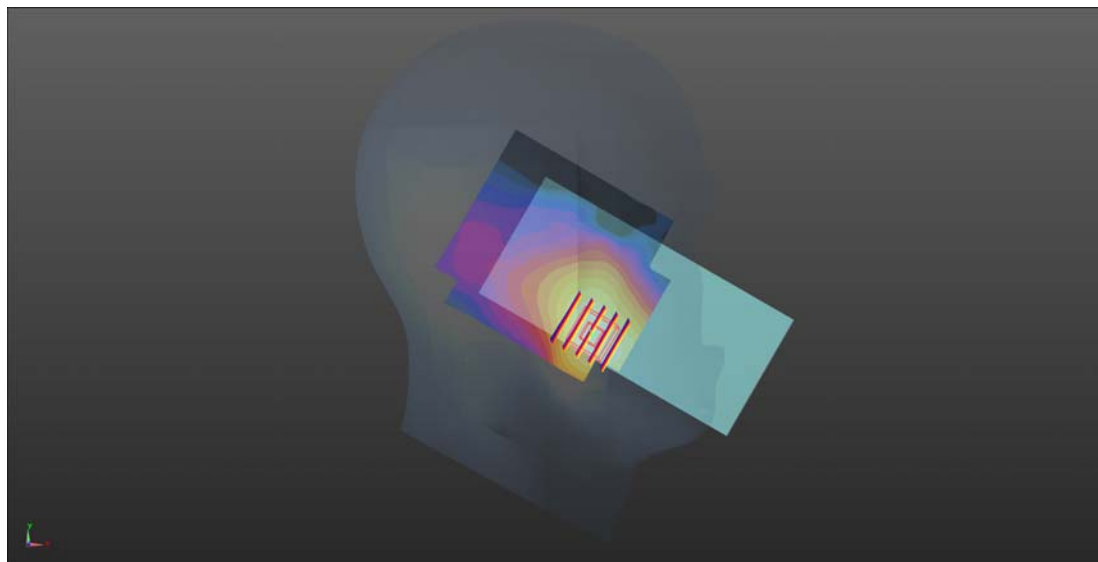

0 dB = 0.473 W/kg

Date: 2025.04.22

5G NR n25_40MHz_DFT-S-QPSK_1RB_1offset_Right Cheek_Ch376500_ANT 1

Communication System: UID 0, 5G NR (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 39.833$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.6, 7.6, 7.6) @ 1900 MHz; Calibrated: 2024.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2024.07.05
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch376500/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.24 W/kg

Ch376500/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.77 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.673 W/kg; SAR(10 g) = 0.375 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 45.8%

Maximum value of SAR (measured) = 1.33 W/kg

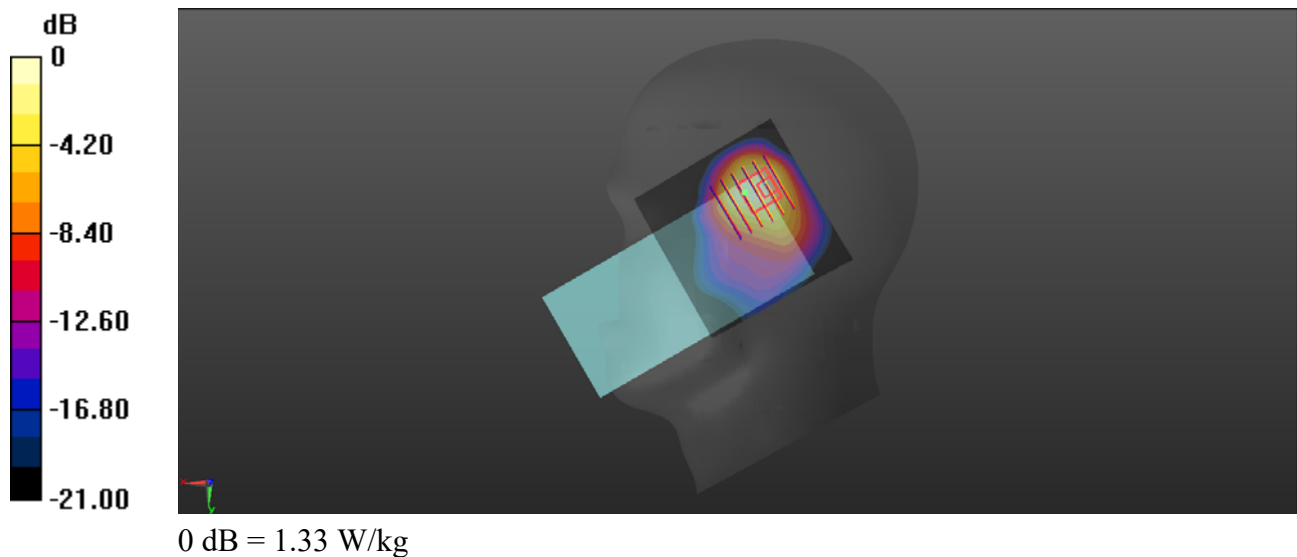

Date: 2025.04.26

5G NR n41_100MHz_DFT-S-QPSK_1RB 1offset_Left Cheek_Ch518598_ANT 0

Communication System: UID 0, LTE (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.957$ S/m; $\epsilon_r = 39.17$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.09, 7.09, 7.09) @ 2593 MHz; Calibrated: 2024.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2024.07.05
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch518598/Area Scan (71x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0670 W/kg

Ch518598/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.284 V/m; Power Drift = -0.04 dB



Peak SAR (extrapolated) = 0.0830 W/kg

SAR(1 g) = 0.348 W/kg; SAR(10 g) = 0.127 W/kg

Smallest distance from peaks to all points 3 dB

Ratio of SAR at M2 to SAR at M1 = 57.7%

Maximum value of SAR (measured) = 0.670 W/kg

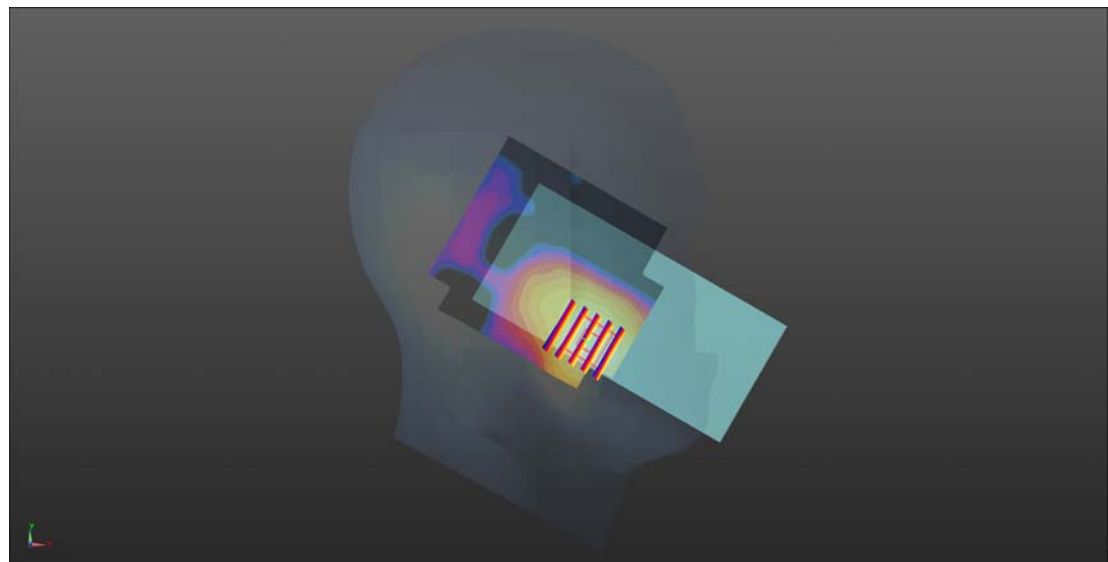

0 dB = 0.670 W/kg

Date: 2025.04.22

5G NR n66_40MHz_DFT-S-QPSK_1RB_1offset_Left Cheek_Ch349000_ANT 1

Communication System: UID 0, 5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL_1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.386$ S/m; $\epsilon_r = 40.632$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.95, 7.95, 7.95) @ 1760 MHz; Calibrated: 2024.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2024.07.05
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch349000/Area Scan (81x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.41 W/kg

Ch349000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.752 V/m; Power Drift = 0.02 dB



Peak SAR (extrapolated) = 2.02 W/kg

SAR(1 g) = 0.687 W/kg; SAR(10 g) = 0.348 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 49.6%

Maximum value of SAR (measured) = 1.52 W/kg

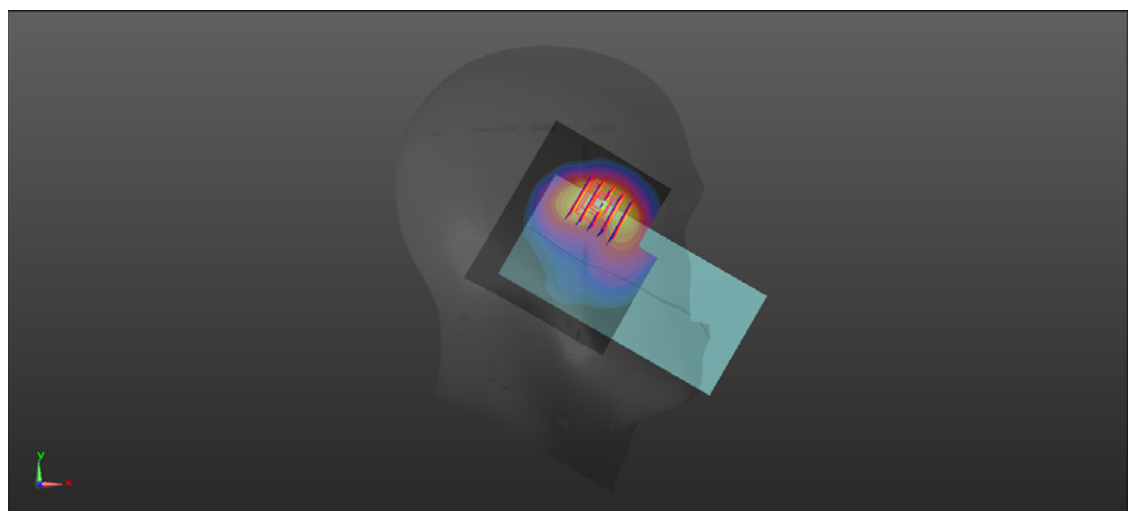

0 dB = 1.52 W/kg

Date: 2025.04.21

5G NR n71_20MHz_DFT-S-QPSK_1RB 1offset_Left Cheek_Ant 0

Communication System: UID 0, LTE (0); Frequency: 673 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 673$ MHz; $\sigma = 0.811$ S/m; $\epsilon_r = 41.34$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(9.39, 9.39, 9.39) @ 673 MHz; Calibrated: 2024.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2024.07.05
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch134600/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.245 W/kg

Ch134600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.477 V/m; Power Drift = 0.03 dB



Peak SAR (extrapolated) = 0.263 W/kg

SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.161 W/kg

Smallest distance from peaks to all points 3 dB below = 21.2 mm

Ratio of SAR at M2 to SAR at M1 = 78%

Maximum value of SAR (measured) = 0.236 W/kg

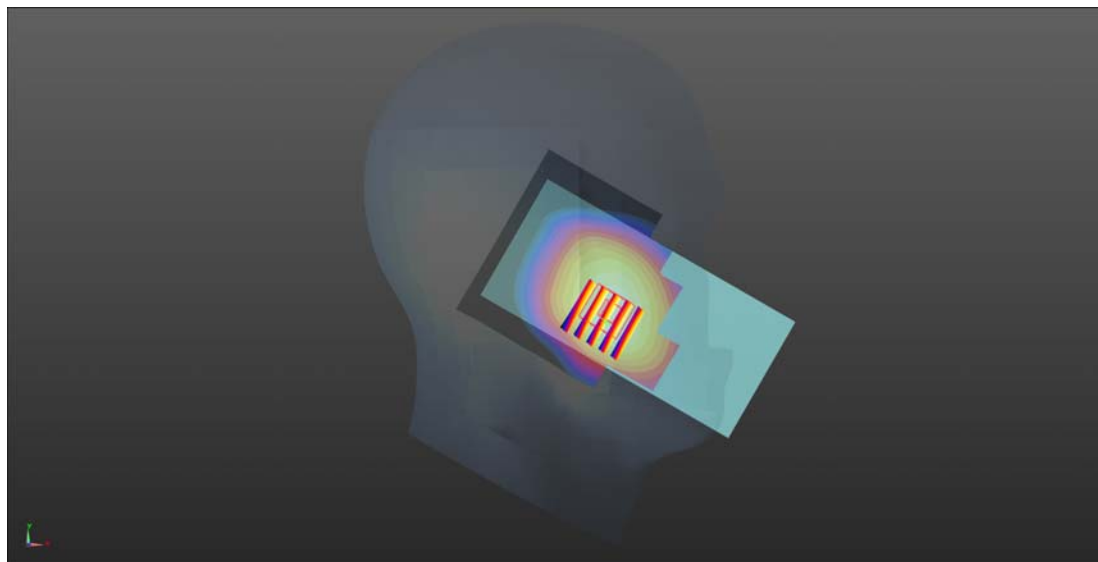

0 dB = 0.245 W/kg

Date: 2025.04.28

5G NR n77_100MHz_DFT-S-QPSK_1RB_1offset_Left Cheek_Ch656000_ANT 4

Communication System: UID 0, WLAN 5GHz (0); Frequency: 3500 MHz; Duty Cycle: 1:1
Medium: HSL_3500 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.863$ S/m; $\epsilon_r = 37.801$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(6.54, 6.54, 6.54) @ 35000 MHz; Calibrated: 2024.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2024.07.05
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch656000/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.79 W/kg

Ch656000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.16 V/m; Power Drift = -0.01 dB



Peak SAR (extrapolated) = 1.6 W/kg

SAR(1 g) = 0.638 W/kg; SAR(10 g) = 0.354 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 57.6%

Maximum value of SAR (measured) = 1.41 W/kg

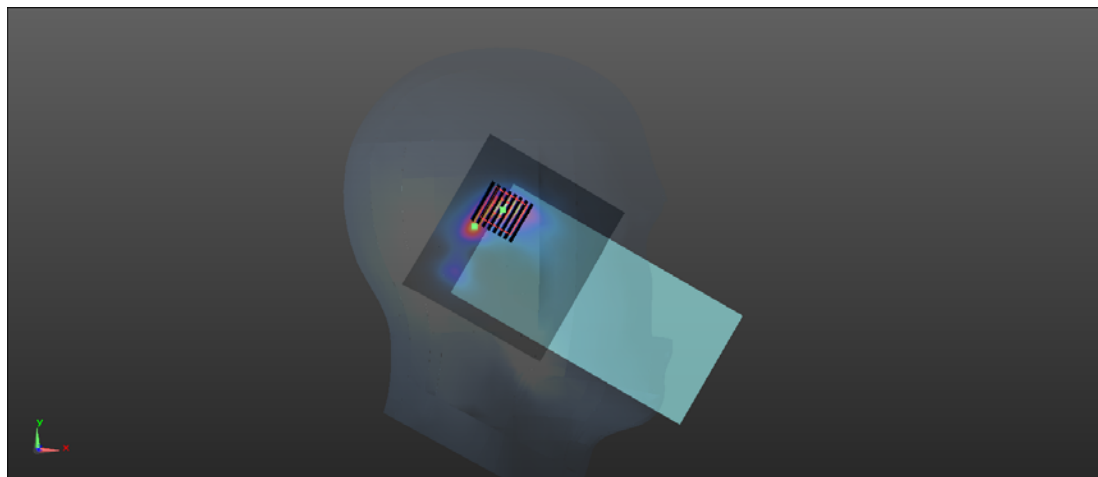

Date: 2025.04.28

5G NR n78_100MHz_DFT-S-QPSK_135RB_67offset_Left Cheek_Ch650000_ANT 4

Communication System: UID 0, WLAN 5GHz (0); Frequency: 3750 MHz; Duty Cycle: 1:1
Medium: HSL_3700 Medium parameters used: $f = 3750$ MHz; $\sigma = 3.11$ S/m; $\epsilon_r = 37.074$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(6.21, 6.21, 6.21) @ 3750 MHz; Calibrated: 2024.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2024.07.05
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch650000/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.52 W/kg

Ch650000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.77 V/m; Power Drift = 0.10 dB



Peak SAR (extrapolated) = 8.02 W/kg

SAR(1 g) = 0.529 W/kg; SAR(10 g) = 0.307 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 54.9%

Maximum value of SAR (measured) = 1.91 W/kg

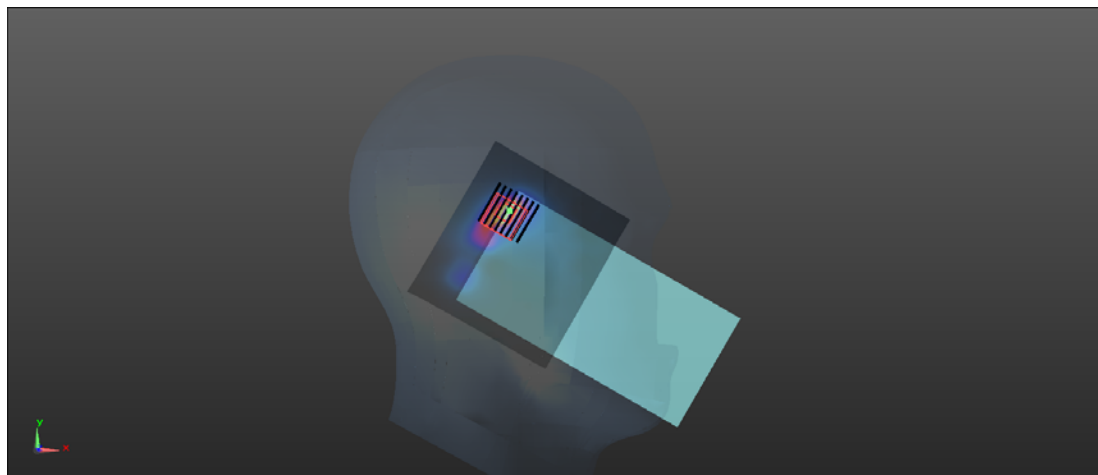

Date: 2025.04.22

5G NR n2_20MHz_DFT-S-QPSK_1RB_1Offset_Back Side_10mm_Ch376000_ANT 1

Communication System: UID 0, 5G NR (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f=1880$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 39.813$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.6, 7.6, 7.6) @ 1900 MHz; Calibrated: 2024.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2024.07.05
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch376000/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.994 W/kg

Ch376000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.954 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.860 W/kg

SAR(1 g) = 0.710 W/kg; SAR(10 g) = 0.306 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 63.3%

Maximum value of SAR (measured) = 0.922 W/kg

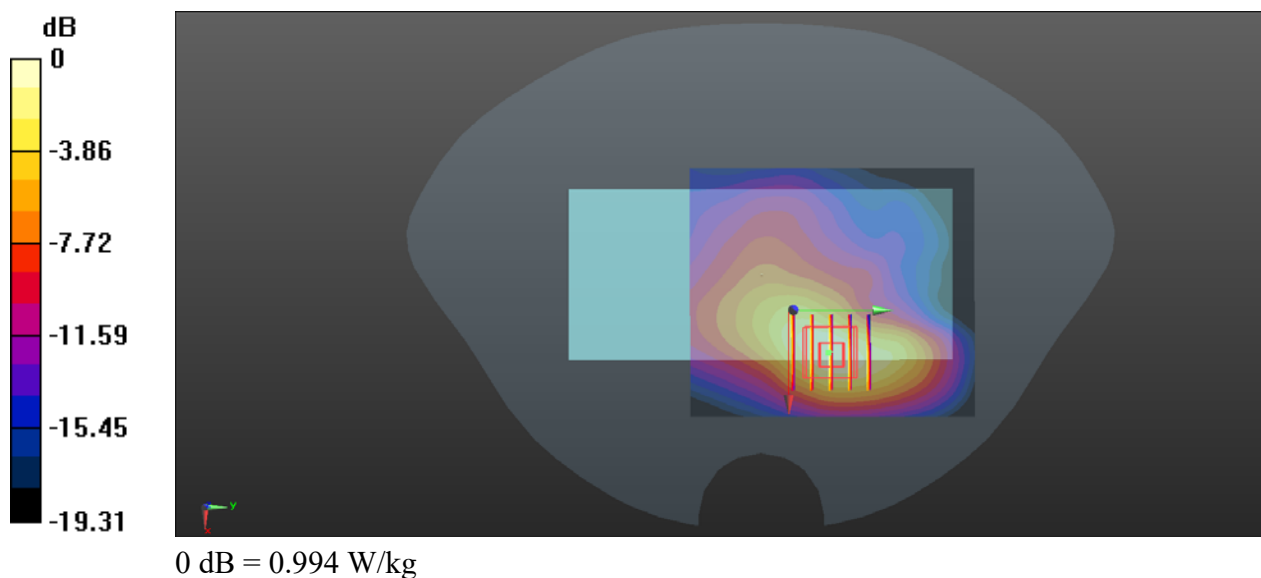

Date: 2024/9/25

5G NR n5_20MHz_DFT-S-QPSK_1RB_1Offset_Back Side_10mm_Ch167300_Ant 0


Communication System: UID 0, 5G NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: HSL900 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.479$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(9.51, 9.51, 9.51) @ 836.5 MHz; Calibrated: 2023/9/14
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2024/7/5
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch167300/Area Scan (71x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.845 W/kg

Ch167300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 16.47 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 1.17 W/kg
SAR(1 g) = 0.642 W/kg; SAR(10 g) = 0.387 W/kg
Smallest distance from peaks to all points 3 dB below = 11.6 mm
Ratio of SAR at M2 to SAR at M1 = 57.7%
Maximum value of SAR (measured) = 0.873 W/kg

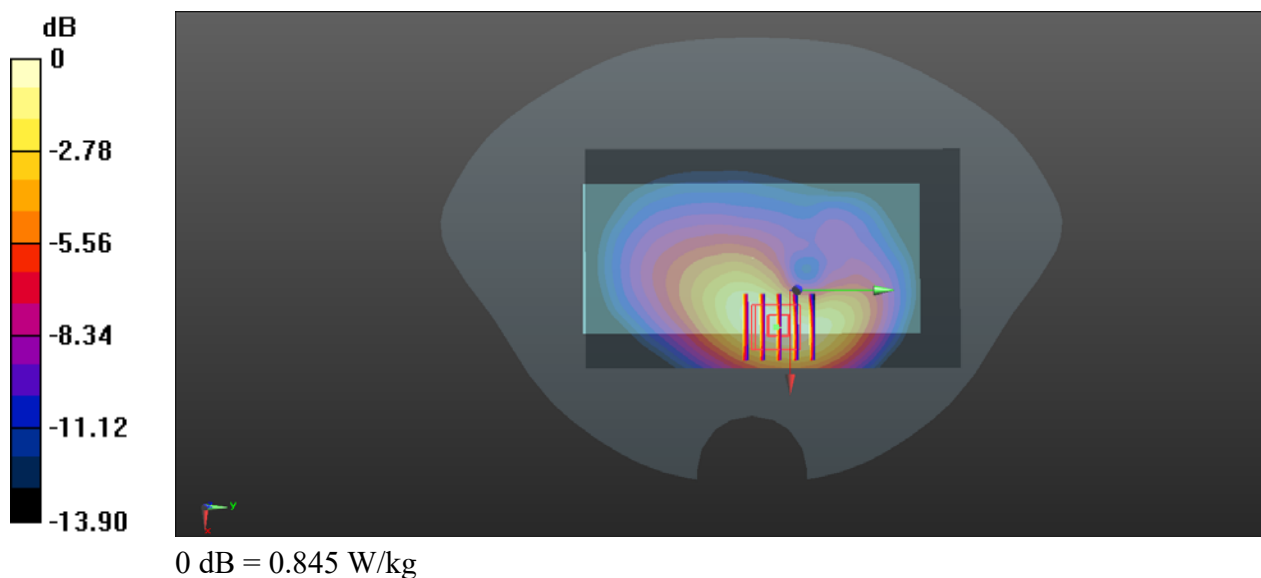

Date: 2025.04.21

5G NR n5_20MHz_DFT-S-QPSK_1RB 1offset_Back Side_10mm_Ch167300_ANT 0


Communication System: UID 0, UMTS-FDD (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: HSL_900 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 41.412$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(9.39, 9.39, 9.39) @ 836.4 MHz; Calibrated: 2024.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2024.07.05
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch167300/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.06 W/kg

Ch167300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.25 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.28 W/kg
SAR(1 g) = 0.643 W/kg; SAR(10 g) = 0.343 W/kg
Smallest distance from peaks to all points 3 dB below = 10.7 mm
Ratio of SAR at M2 to SAR at M1 = 63.2%
Maximum value of SAR (measured) = 0.961 W/kg

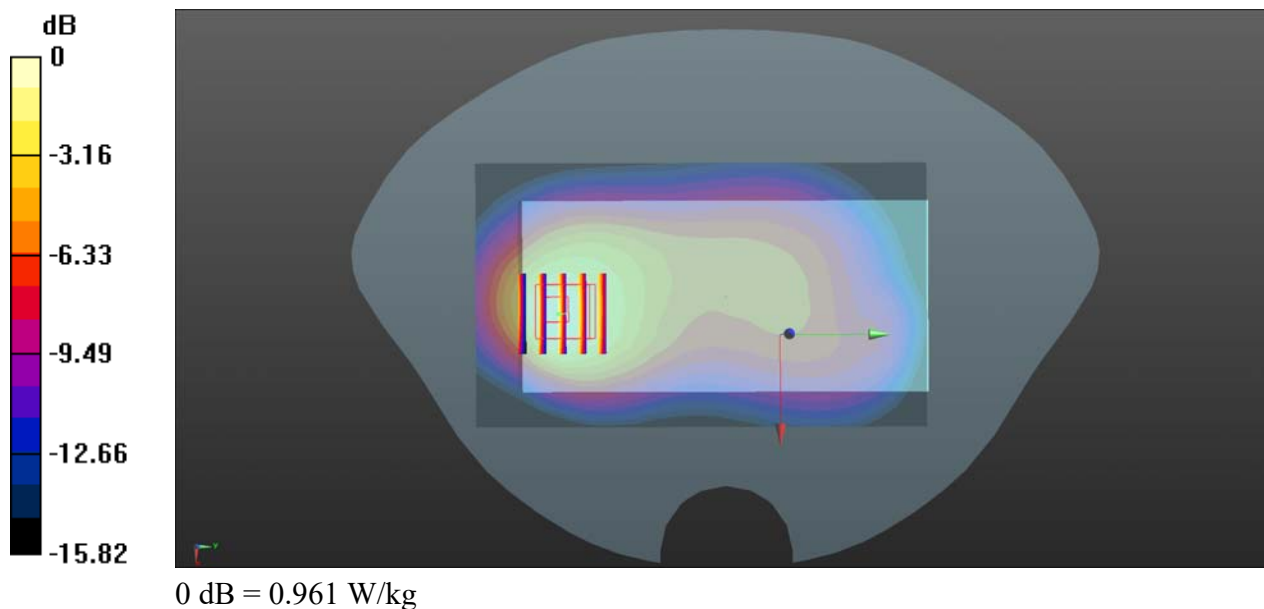

Date: 2025.04.26

5G NR n7_20MHz_DFT-S-QPSK_1RB 1offset_Back Side_10mm_Ch512000_ANT 0

Communication System: UID 0, LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.982$ S/m; $\epsilon_r = 36.828$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.09, 7.09, 7.09) @ 2560 MHz; Calibrated: 2024.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2024.07.05
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch512000/Area Scan (71x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.18 W/kg

Ch512000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.11 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 5.19 W/kg

SAR(1 g) = 0.539 W/kg; SAR(10 g) = 0.223 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 50.3%

Maximum value of SAR (measured) = 1.85 W/kg

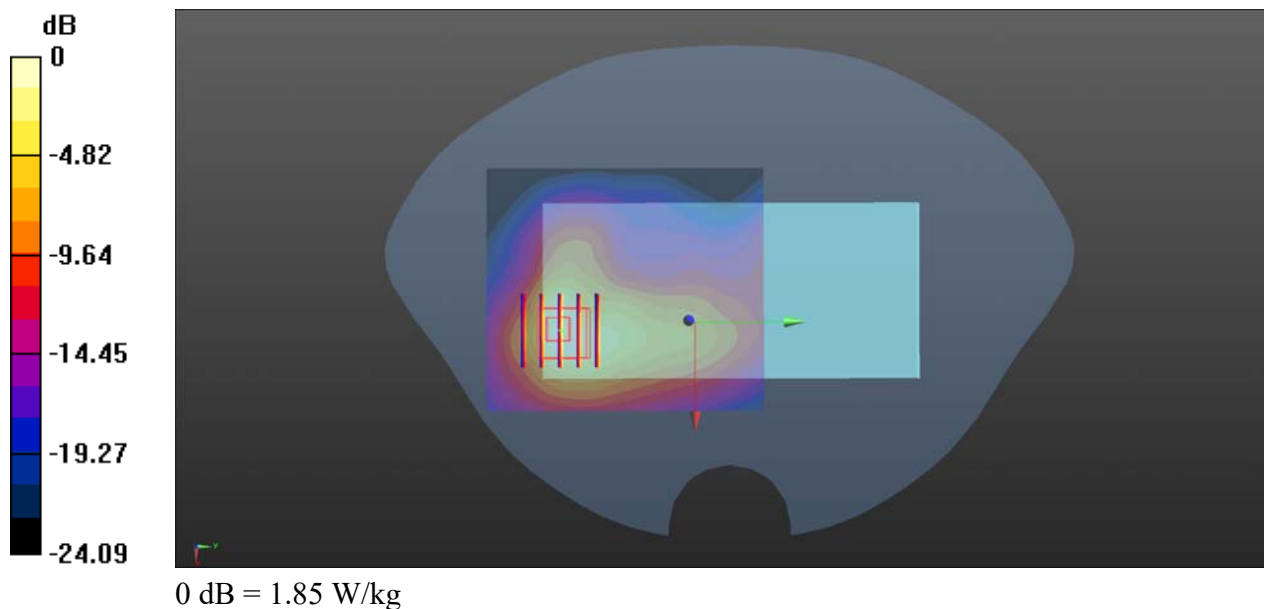

Date: 2025.04.22

5G NR n25_40MHz_DFT-S-QPSK_1RB_1Offset_Bottom Side_10mm_Ch376500_ANT 1


Communication System: UID 0, 5G NR (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium: HSL1900 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 39.833$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.6, 7.6, 7.6) @ 1900 MHz; Calibrated: 2024.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2024.07.05
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch376500/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.22 W/kg

Ch376500/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.33 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.40 W/kg
SAR(1 g) = 0.603 W/kg; SAR(10 g) = 0.327 W/kg
Smallest distance from peaks to all points 3 dB below = 11.2 mm
Ratio of SAR at M2 to SAR at M1 = 64.1%
Maximum value of SAR (measured) = 1.19 W/kg

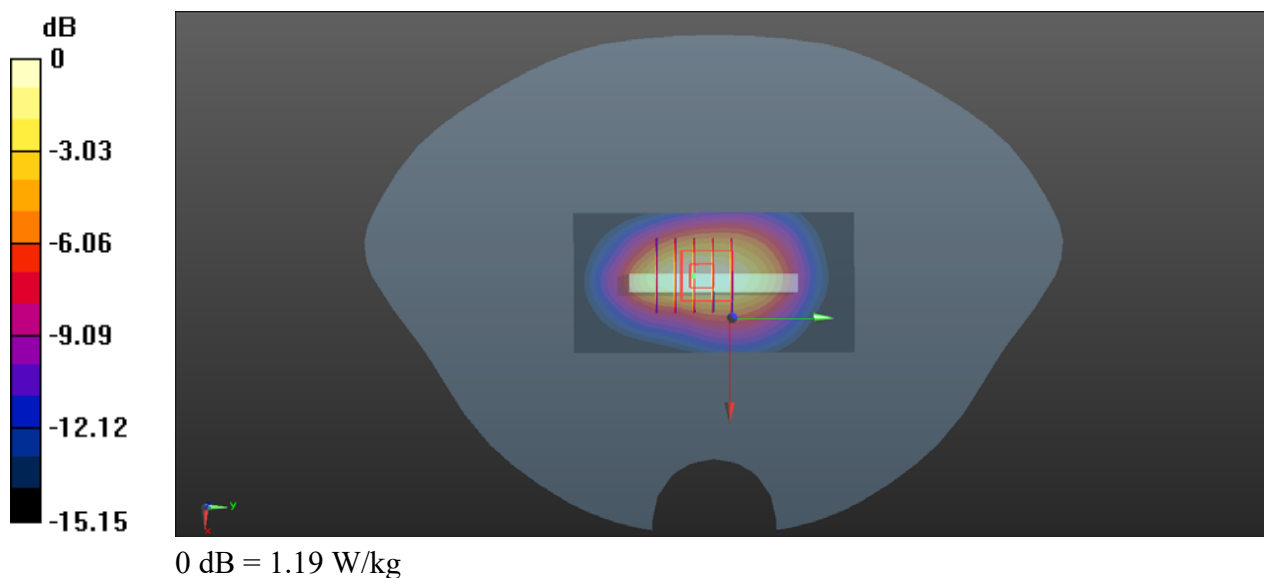

Date: 2025.04.26

5G NR n41_100MHz_DFT-S-QPSK_1RB 1offset_Back Side_10mm_Ch518598_ANT 0

Communication System: UID 0, LTE (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.957$ S/m; $\epsilon_r = 39.17$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.09, 7.09, 7.09) @ 2595 MHz; Calibrated: 2024.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2024.07.05
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch518598/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.35 W/kg

Ch518598/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.575 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 2.29 W/kg

SAR(1 g) = 0.684 W/kg; SAR(10 g) = 0.374 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 50.1%

Maximum value of SAR (measured) = 1.19 W/kg

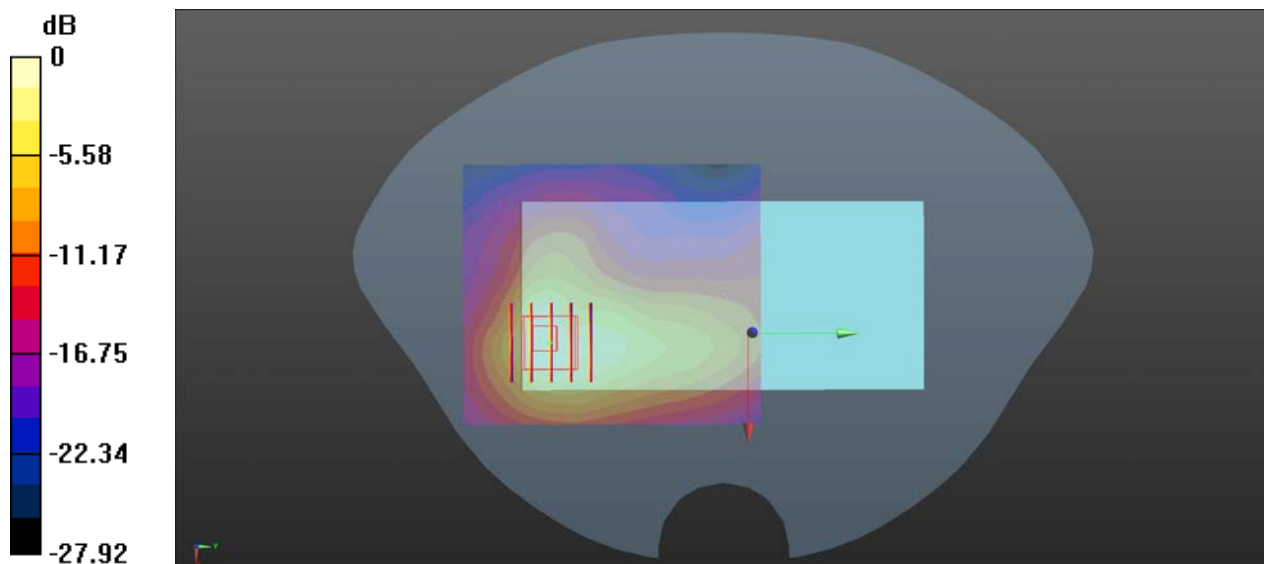

0 dB = 1.19 W/kg

Date: 2025.04.22

5G NR n66_40MHz_DFT-S-QPSK_1RB_1Offset_Left Side_10mm_Ch349000_ANT 1

Communication System: UID 0, 5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL_1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.386$ S/m; $\epsilon_r = 40.632$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.95, 7.95, 7.95) @ 1760 MHz; Calibrated: 2024.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2024.07.05
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch349000/Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.30 W/kg

Ch349000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.16 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.656 W/kg; SAR(10 g) = 0.344 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 65.9%

Maximum value of SAR (measured) = 1.30 W/kg

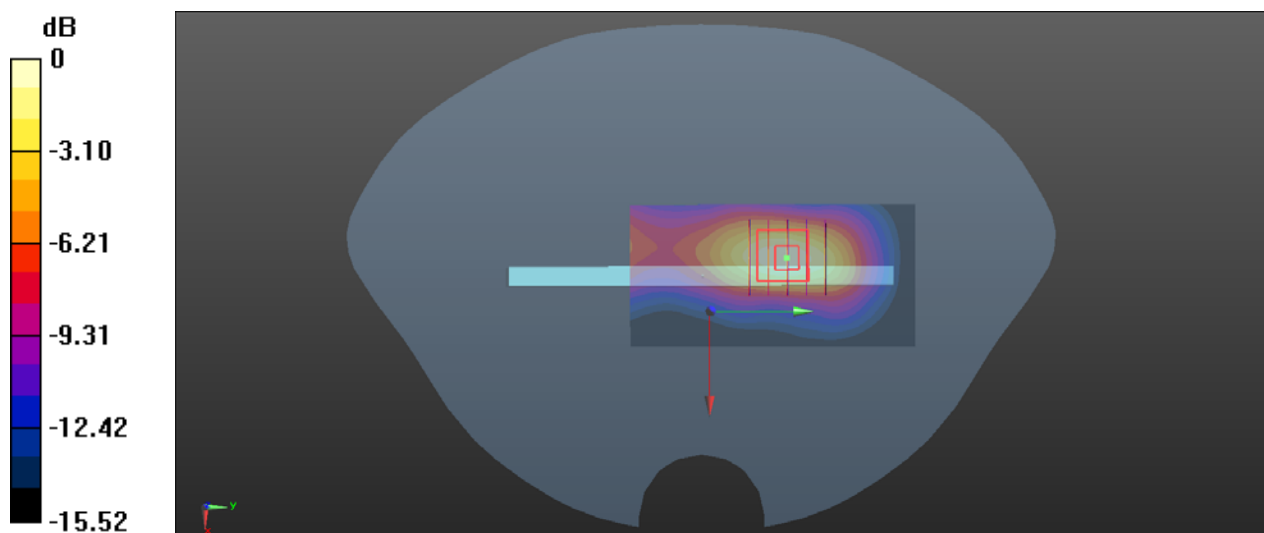

0 dB = 1.30 W/kg

Date: 2025.04.21

5G NR n71_20MHz_DFT-S-QPSK_1RB 1offset_Back Side_10mm_Ch134600_ANT 0

Communication System: UID 0, LTE (0); Frequency: 673 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 673$ MHz; $\sigma = 0.811$ S/m; $\epsilon_r = 41.34$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(9.39, 9.39, 9.39) @ 673 MHz; Calibrated: 2024.11.111
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2024.07.05
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch134600/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.635 W/kg

Ch134600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.59 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.813 W/kg

SAR(1 g) = 0.423 W/kg; SAR(10 g) = 0.243 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 57.4%

Maximum value of SAR (measured) = 0.555 W/kg

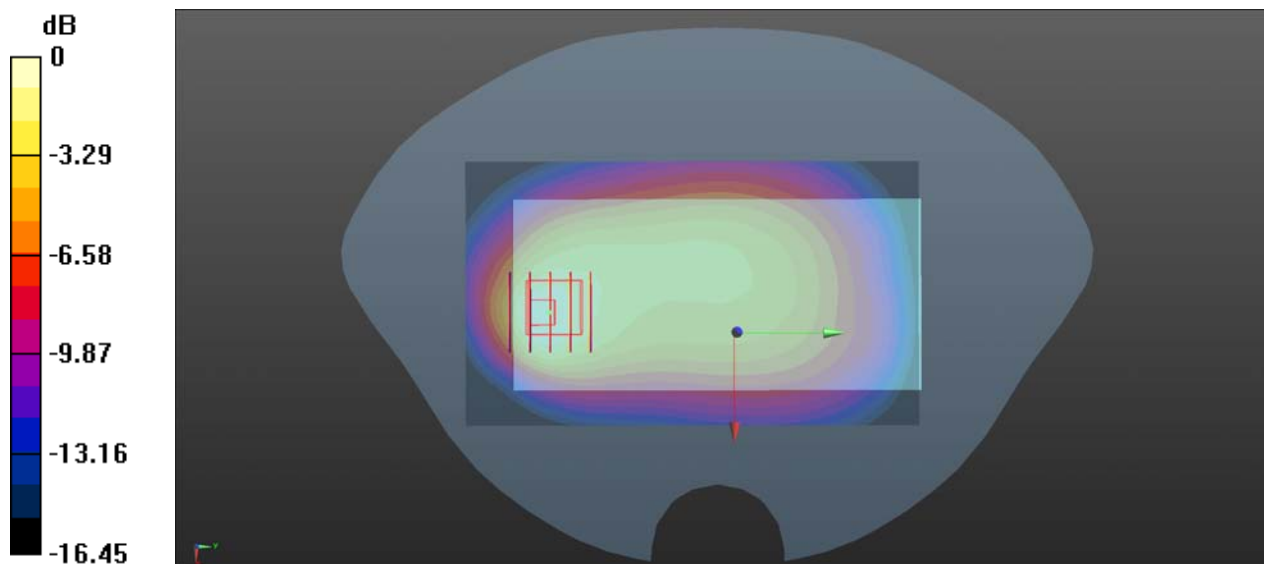

0 dB = 0.555 W/kg

Date: 2025.04.28

5G NR n77_100MHz_DFT-S-QPSK_1RB_1offset_Back Side_10mm_Ch656000_ANT 4

Communication System: UID 0, LTE (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL_3500 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.863$ S/m; $\epsilon_r = 37.801$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(6.54, 6.54, 6.54) @ 35000 MHz; Calibrated: 2024.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2024.07.05
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch656000/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.90 W/kg

Ch656000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.72 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 0.249 W/kg; SAR(10 g) = 0.195 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 56.7%

Maximum value of SAR (measured) = 1.73 W/kg

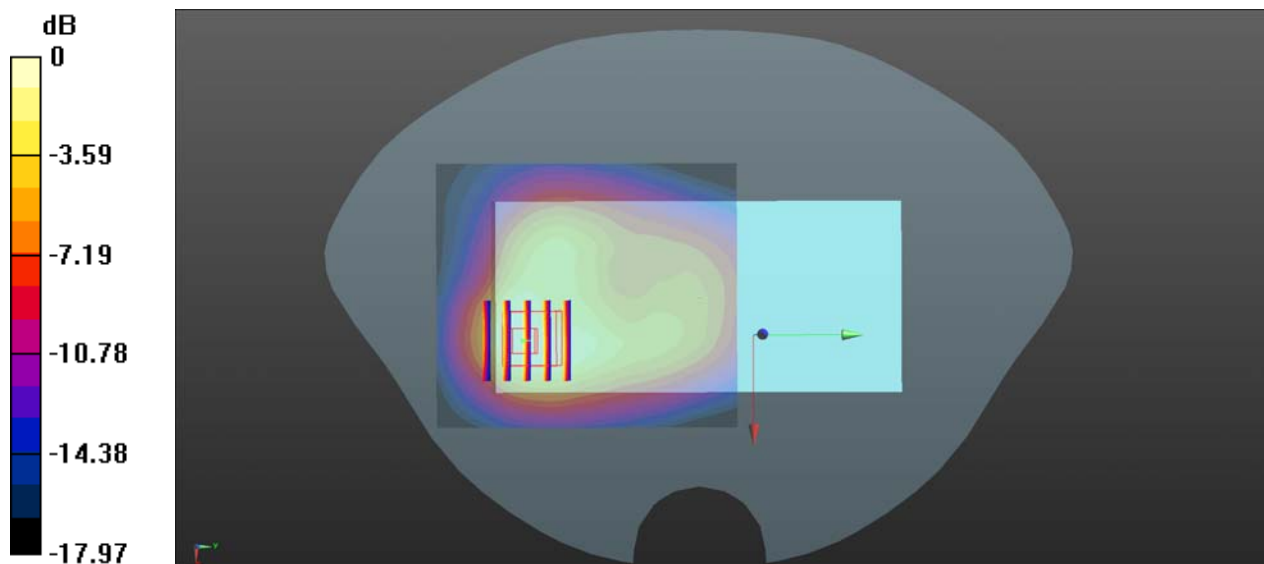

0 dB = 1.73 W/kg

Date: 2025.04.28

5G NR n78_100MHz_DFT-S-QPSK_1RB_1offset_Back Side_10mm_Ch650000_ANT 4

Communication System: UID 0, LTE (0); Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: HSL_3700 Medium parameters used: $f = 3750$ MHz; $\sigma = 3.11$ S/m; $\epsilon_r = 37.074$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(6.21, 6.21, 6.21) @ 3750 MHz; Calibrated: 2024.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2024.07.05
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch650000/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.05 W/kg

Ch650000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.18 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.273 W/kg; SAR(10 g) = 0.161 W/kg

Smallest distance from peaks to all points 3 dB below = 16.7 mm

Ratio of SAR at M2 to SAR at M1 = 60.2%

Maximum value of SAR (measured) = 1.01 W/kg

