



FCC RADIO TEST REPORT

Applicant : Ubiquiti Inc.

Address : 685 Third Avenue, New York, New York 10017, USA

Equipment : UniFi Protect G3 mini

Model No. : UVC-G3-mini

Trade Name : UBIQUITI

FCC ID. : SWX-UVCG3MI

I HEREBY CERTIFY THAT :

The sample was received on Jul. 20, 2020 and the testing was completed on Jul. 29, 2020 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





Contents

1. Summary of Test Procedure and Test Results.....	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test.....	6
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channels.....	7
2.3 Test Mode and Test Software.....	8
2.4 Description of Test System.....	8
2.5 General Information of Test.....	9
2.6 Measurement Uncertainty	9
3. Test Equipment and Ancillaries Used for Tests	10
4. Antenna Requirements.....	12
4.1 Standard Applicable	12
4.2 Antenna Construction and Directional Gain.....	12
5. Test of AC Power Line Conducted Emission	13
5.1 Test Limit	13
5.2 Test Procedures	13
5.3 Typical Test Setup	14
5.4 Test Result and Data.....	15
5.5 Test Photographs	17
6. Test of Spurious Emission (Radiated)	18
6.1 Test Limit	18
6.2 Test Procedures	18
6.3 Typical Test Setup	19
6.4 Test Result and Data (9kHz ~ 30MHz).....	20
6.5 Test Result and Data (30MHz ~ 1GHz).....	20
6.6 Test Result and Data (1GHz ~ 25GHz).....	22
6.7 Restricted Bands of Operation	34
6.8 Test Photographs (30MHz ~ 1GHz)	35
6.9 Test Photographs (1GHz ~ 25GHz)	36
7. Test of Spurious Emission (Conducted).....	38
7.1 Test Limit	38
7.2 Test Procedure	38
7.3 Test Setup Layout	38
7.4 Test Result and Data.....	38
8. On Time, Duty Cycle and Measurement methods	43
8.1 Test Limit	43
8.2 Test Procedure	43
8.3 Test Setup Layout	43
8.4 Test Result and Data.....	43
9. 6dB Bandwidth Measurement Data	45
9.1 Test Limit	45



9.2	Test Procedures	45
9.3	Test Setup Layout	45
9.4	Test Result and Data	45
10.	Maximum Peak and Average Output Power	47
10.1	Test Limit	47
10.2	Test Procedures	47
10.3	Test Setup Layout	47
10.4	Test Result and Data	48
11.	Power Spectral Density	49
11.1	Test Limit	49
11.2	Test Procedures	49
11.3	Test Setup Layout	49
11.4	Test Result and Data	49
12.	Radio Frequency Exposure	51
12.1	Applicable Standards	51
12.2	EUT Specification	51
12.3	Test Results	52
12.4	Calculation	52
12.5	Maximum Permissible Exposure	53



History of this test report

Report No.	Issue Date	Description
TEFQ2007197	Aug. 06, 2020	Original



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	PASS
15.207	AC Power Line Conducted Emission	PASS
15.209 15.205	Radiated Spurious Emission	PASS
15.247(d)	Conducted Spurious Emission	PASS
15.247(a)(2)	6dB Bandwidth	PASS
15.247(b)	Maximum Peak Output Power	PASS
15.247(e)	Power Spectral Density	PASS

*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement.

*This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report(TEFD2007197).



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Frequency Range	BT / BLE: 2400-2483.5MHz 802.11b/g/n: 2400-2483.5MHz 802.11a/n/ac: 5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5850MHz
Modulation Type	BT: GFSK, $\pi/4$ -DQPSK, 8DPSK BLE: GFSK 802.11b: CCK, DQPSK, DBPSK 802.11g/n/a: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM
Modulation Technology	DSSS, OFDM, FHSS, DTS
Data Rate	BT: GFSK: 1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK: 3Mbps BLE: GFSK: 1Mbps, GFSK: 2Mbps WLAN: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS7, HT20/40 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11ac: MCS0 – MCS9, VHT20/40/80
Antenna Type	Internal Antenna
Antenna Gain	For BT/BLE: 2402-2480MHz ANT A: 2.60dBi For WLAN 2.4G: 2412-2462MHz ANT A: 2.60dBi For WLAN 5G: 5150-5850MHz ANT A: 4.60dBi
USB TYPE-C Cable	Brand: N/A Model: N/A
Adapter	Brand: Ubiquiti Model: NY-PW0H1-05002000
Serial Number	2027A FCECDAFF2B64

Note:

1. WLAN and BT can simultaneously transmission.
2. EUT supports DFS Client Mode, without radar detection.
3. For more details, please refer to the User's manual of the EUT.



2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
*00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	*19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	*39	2480
12	2426	26	2454	--	--
13	2428	27	2456	--	--

Note: Channels remarked * are selected to perform test.



2.3 Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- b. The complete test system included Notebook and EUT for RF test.
- c. An executive program, " hcitool command" under Windows OS system was executed to transmit and receive data via Bluetooth.
- d. The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	GFSK (1Mbps)
2	GFSK (2Mbps)
caused "Test Mode 2" generated the worst case, it was reported as the final data.	
Radiation Emissions (30MHz ~ 1GHz)	
Test Mode	Operating Description
1	GFSK (1Mbps)
2	GFSK (2Mbps)
caused "Test Mode 2" generated the worst case, it was reported as the final data.	
Radiation Emissions (1GHz ~ 25GHz)	
Test Mode	Operating Description
1	GFSK (1Mbps)
2	GFSK (2Mbps)
caused "Test Mode 1, 2" generated the worst case, they were reported as the final data.	

2.4 Description of Test System

N/A



2.5 General Information of Test

Test Site	CerpPASS Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881	
	FCC	TW1439, TW1079
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication test C-4663 for Conducted emission test R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

Test Item	Test Site	Finish Date	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2020/07/29	25°C / 58%	Vic Yeh
Radiated Emissions	3M02-NK	2020/07/29	25°C / 39%	Leon Huang
AC Power Line Conducted Emission	CON01-NK	2020/07/27	27°C / 50%	Leon Huang

2.6 Measurement Uncertainty

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±1.60dB
Radiated Spurious Emission(9KHz~30MHz)	±3.404dB
Radiated Spurious Emission(30MHz~1GHz)	±5.686dB
Radiated Spurious Emission(1GHz~25GHz)	±6.597dB
Conducted Spurious Emission	±2.022dB
6dB Bandwidth	±4.482%
20dB Bandwidth	±4.40%
Occupied Bandwidth	±4.40%
Peak Output Power(Conducted Power Meter)	±1.02dB
Dwell Time	±3.49%
Power Spectral Density	±1.963dB
Duty Cycle	±3.47%



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	275	2019/09/24	2020/09/23
Active Loop Antenna	EMCO	6507	40855	2020/05/21	2021/05/20
Horn Antenna	EMCO	3115	31589	2020/03/26	2021/03/25
Horn Antenna	EMCO	3116	31974	2019/09/17	2020/09/16
EMI Receiver	ROHDE & SCHWARZ	ESCI	100821	2019/09/16	2020/09/15
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2019/08/02	2020/08/01
Preamplifier	EM Electronics corp.	EM330	60660	2020/03/16	2021/03/15
Preamplifier	EMC INSTRUMENTS	EMC051845SE	980333	2019/09/20	2020/09/19
Preamplifier	Agilent	8449B	3008A01954	2020/03/16	2021/03/15
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2019/11/07	2020/11/06
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2020/04/07	2021/04/06
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1316	2019/09/20	2020/09/19
Cable-0.5m(1G-18G)	HUBER SUHNER	SUCOFLEX 100	805443/4	2020/05/27	2021/05/26
Cable-3m(1G-18G)	HUBER SUHNER	SUCOFLEX 100	805796/4	2020/05/27	2021/05/26
Cable-8m(1G-18G)	HUBER SUHNER	SUCOFLEX 100	805795/4	2020/05/27	2021/05/26
Cable-0.5m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	28420/2	2020/04/01	2021/03/31
Cable-3m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	MY2608/2	2020/04/01	2021/03/31
Cable-0.5m(1G-40G)	Rapidtek	40GHZ 50CM	38MS-38MS50314	2020/04/09	2021/04/08
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA

Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	101329	2020/07/07	2021/07/06
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2020/04/07	2021/04/06
CAX Signal Analyzer	KEYSIGHT	N9000B	MY57100339	2019/11/25	2020/11/24
Attenuator	KEYSIGHT	8491B	MY39250703	2020/04/17	2021/04/16
TEMP & HUMIDITY CHAMBER	T-MACHINE	TMJ-9712	T-12-040111	2019/08/28	2020/08/27
Power Meter	Anritsu	ML2495A	1224005	2020/04/17	2021/04/16
Power Sensor	Anritsu	MA2411B	1207295	2020/04/17	2021/04/16



Test Item	AC Power Line Conducted Emission				
Test Site	CON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESCI	100821	2019/09/16	2020/09/15
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127-516	2019/09/19	2020/09/18
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	101933	2019/09/11	2020/09/10
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130605	2019/09/11	2020/09/10
E3	AUDIX	v8.2014-8-6	RK-000531	NA	NA



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna Type	Internal Antenna
Antenna Gain	2.60 dBi



5. Test of AC Power Line Conducted Emission

The power supply is DC source, so this item doesn't require testing.

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.4-2014. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3 Typical Test Setup

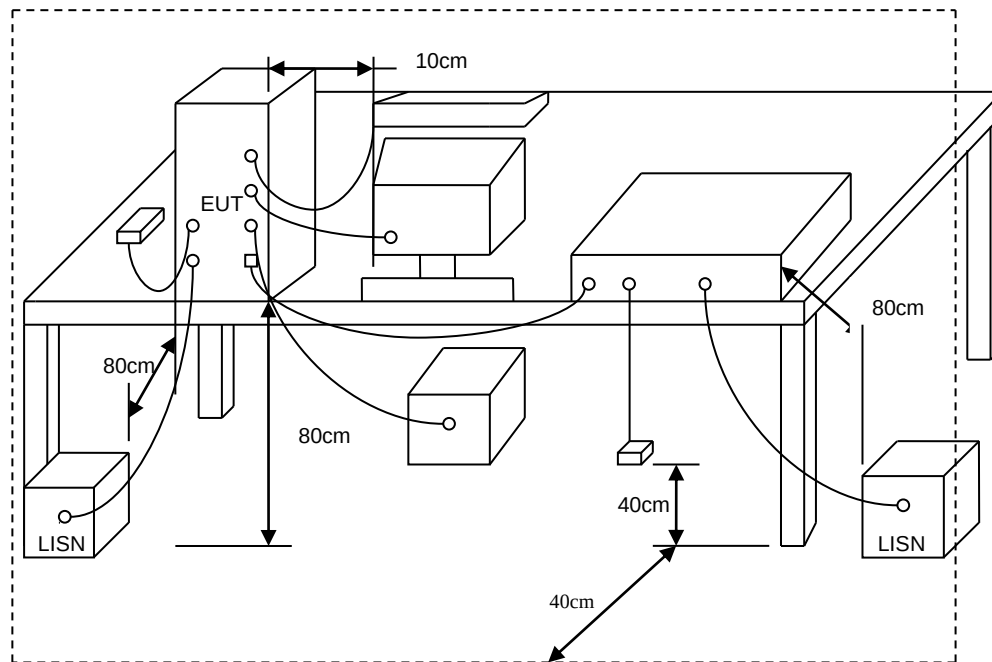



5.4 Test Result and Data

Power	: AC 120V / 60HZ	Pol/Phase	: LINE
Test Mode	: Mode 2		:

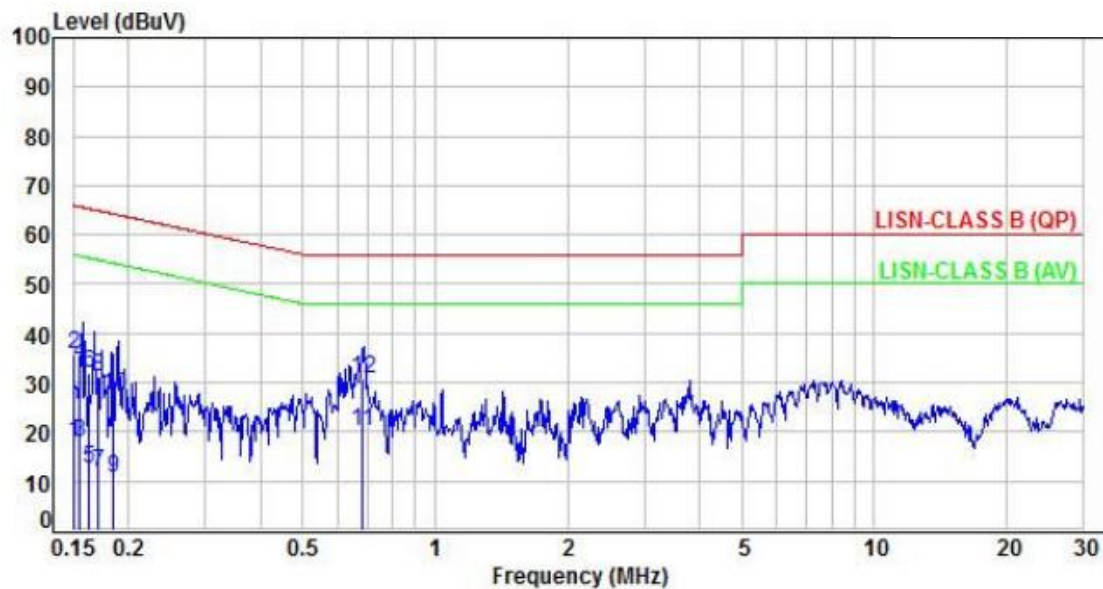

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.15	9.92	7.83	17.75	55.94	-38.19	Average	P
2	0.15	9.92	25.87	35.79	65.94	-30.15	QP	P
3	0.15	9.92	8.03	17.95	55.76	-37.81	Average	P
4	0.15	9.92	23.81	33.73	65.76	-32.03	QP	P
5	0.16	9.92	2.58	12.50	55.36	-42.86	Average	P
6	0.16	9.92	22.12	32.04	65.36	-33.32	QP	P
7	0.17	9.92	1.72	11.64	54.95	-43.31	Average	P
8	0.17	9.92	21.41	31.33	64.95	-33.62	QP	P
9	0.19	9.92	0.72	10.64	54.23	-43.59	Average	P
10	0.19	9.92	17.38	27.30	64.23	-36.93	QP	P
11	0.68	9.95	10.31	20.26	46.00	-25.74	Average	P
12	0.68	9.95	20.70	30.65	56.00	-25.35	QP	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power	: AC 120V / 60HZ	Pol/Phase	: NEUTRAL
Test Mode	: Mode 2		:

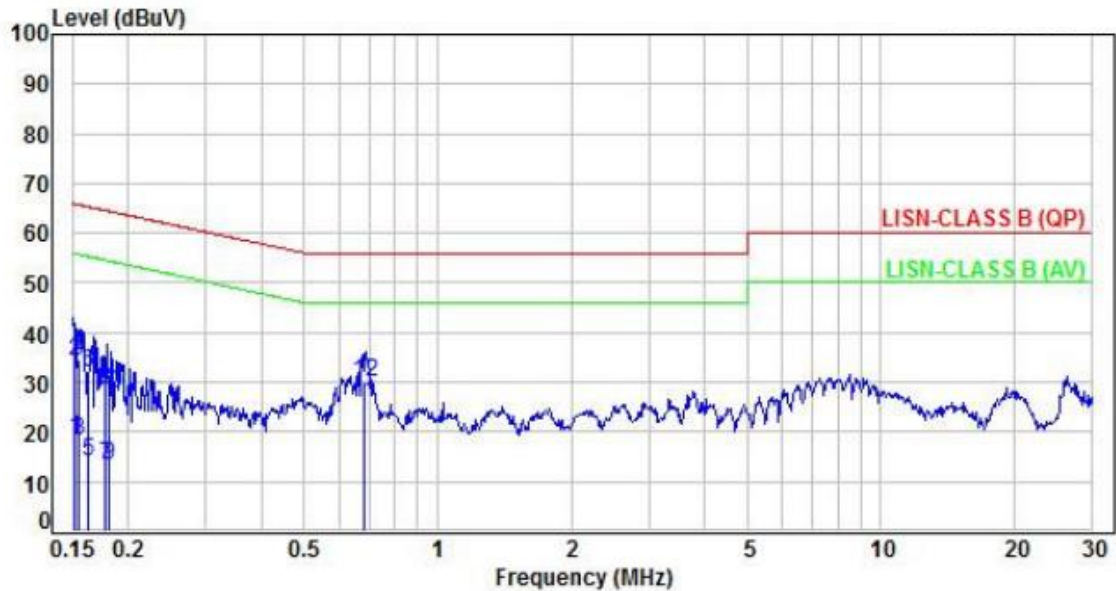

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.15	9.95	8.54	18.49	55.89	-37.40	Average	P
2	0.15	9.95	24.38	34.33	65.89	-31.56	QP	P
3	0.15	9.95	8.45	18.40	55.77	-37.37	Average	P
4	0.15	9.95	24.50	34.45	65.77	-31.32	QP	P
5	0.16	9.95	4.06	14.01	55.32	-41.31	Average	P
6	0.16	9.95	21.99	31.94	65.32	-33.38	QP	P
7	0.18	9.95	3.52	13.47	54.57	-41.10	Average	P
8	0.18	9.95	18.53	28.48	64.57	-36.09	QP	P
9	0.18	9.95	3.36	13.31	54.44	-41.13	Average	P
10	0.18	9.95	17.86	27.81	64.44	-36.63	QP	P
11	0.68	9.97	15.97	25.94	46.00	-20.06	Average	P
12	0.68	9.97	20.07	30.04	56.00	-25.96	QP	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



6. Test of Spurious Emission (Radiated)

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


6.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.




6.3 Typical Test Setup


Below 30MHz test setup

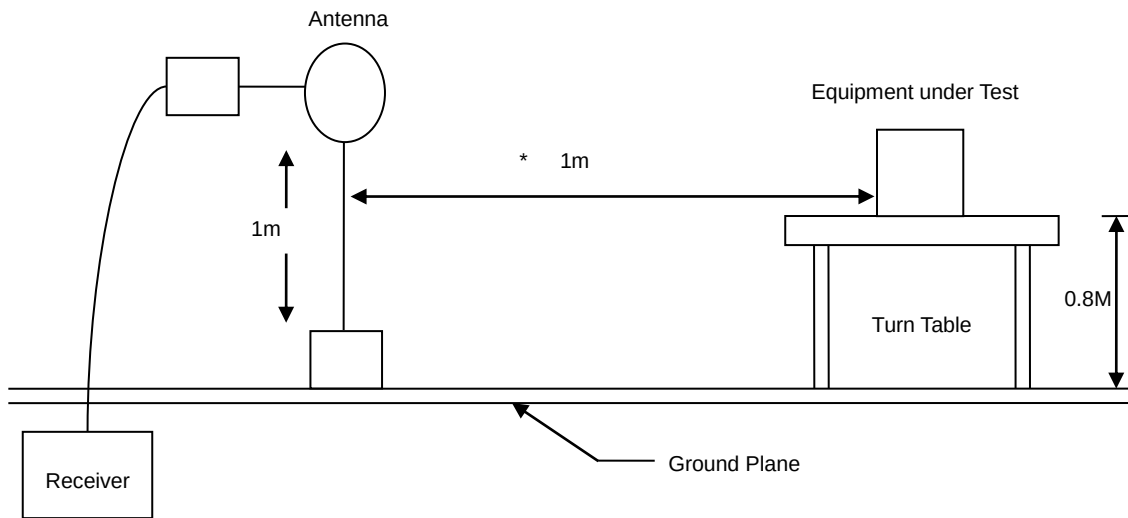

30MHz- 1GHz Test Setup

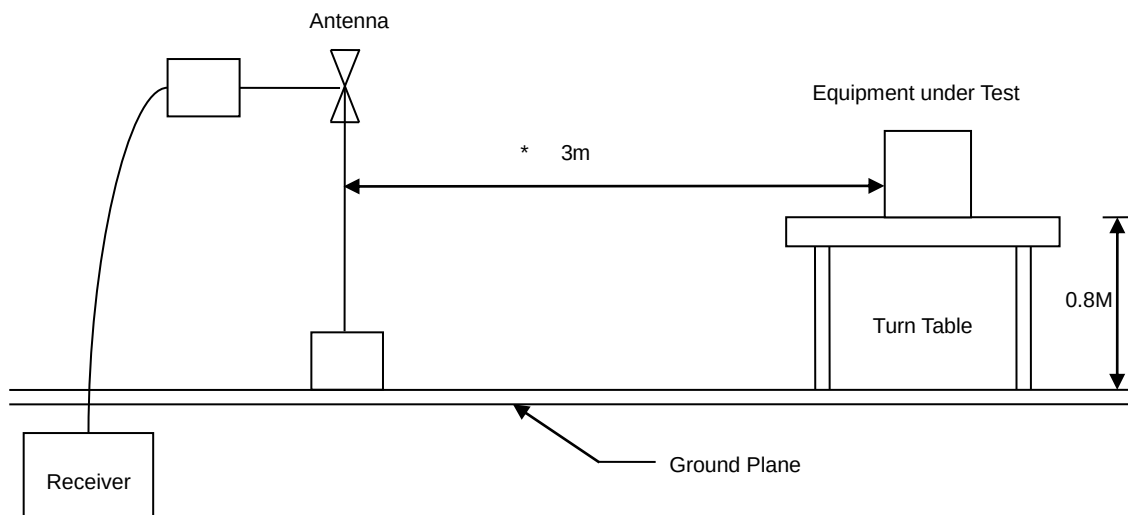

Above 1GHz Test Setup

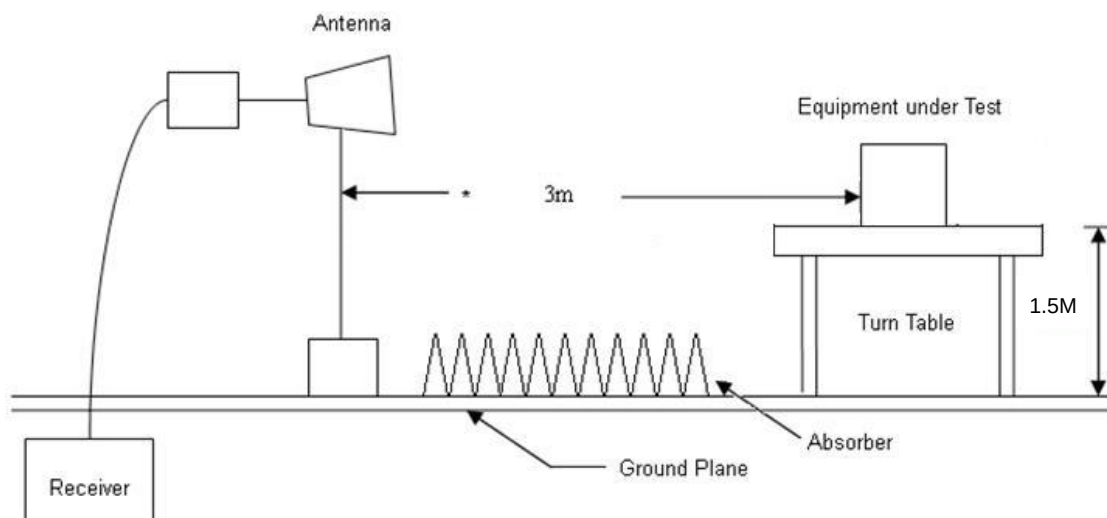




6.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)

Power	:	AC 120V / 60HZ	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 2		:	

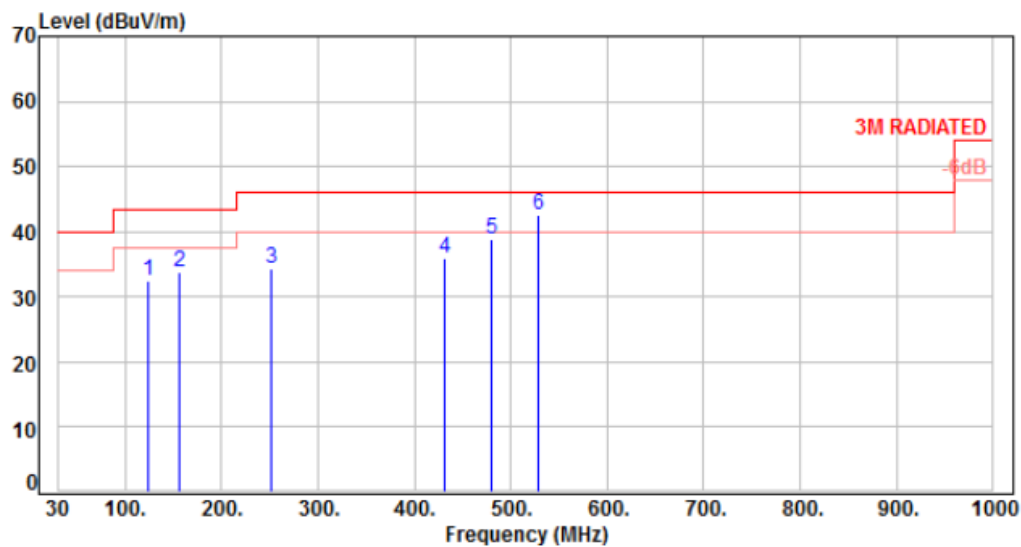

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	123.12	-11.90	44.39	32.49	43.50	-11.01	Peak	400	0	P
2	156.10	-9.68	43.48	33.80	43.50	-9.70	Peak	400	0	P
3	251.16	-10.39	44.86	34.47	46.00	-11.53	Peak	400	0	P
4	431.58	-5.16	41.09	35.93	46.00	-10.07	Peak	400	0	P
5	480.08	-4.27	43.10	38.83	46.00	-7.17	Peak	400	0	P
6	528.00	-3.35	45.90	42.55	46.00	-3.45	QP	100	110	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60HZ	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2		:

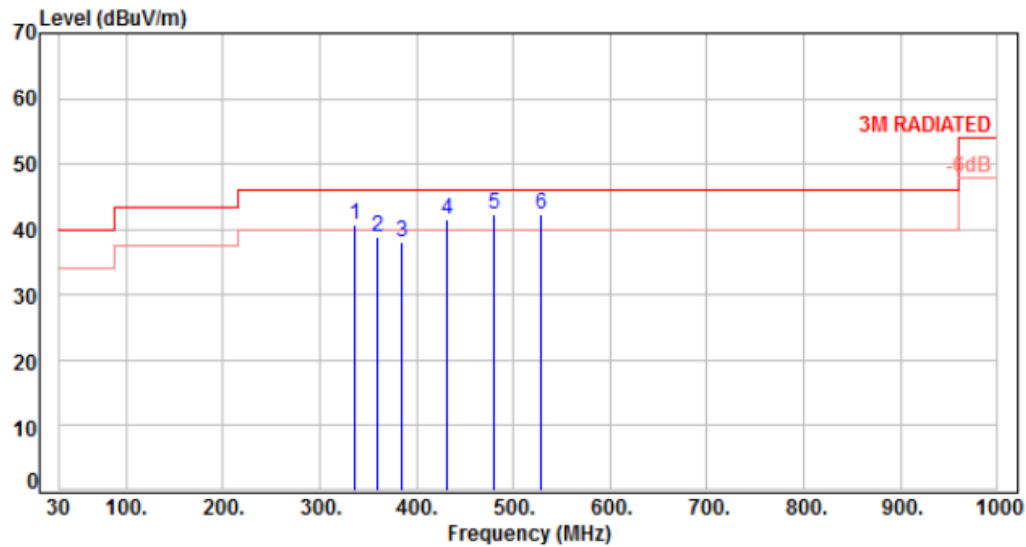

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	335.55	-7.66	48.33	40.67	46.00	-5.33	Peak	100	0	P
2	359.80	-7.07	45.93	38.86	46.00	-7.14	Peak	100	0	P
3	384.05	-6.31	44.32	38.01	46.00	-7.99	Peak	100	0	P
4	431.58	-5.16	46.66	41.50	46.00	-4.50	Peak	100	0	P
5	480.08	-4.27	46.59	42.32	46.00	-3.68	Peak	100	0	P
6	528.00	-3.35	45.60	42.25	46.00	-3.75	QP	100	200	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.6 Test Result and Data (1GHz ~ 25GHz)

Power	: AC 120V / 60HZ	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH00		:

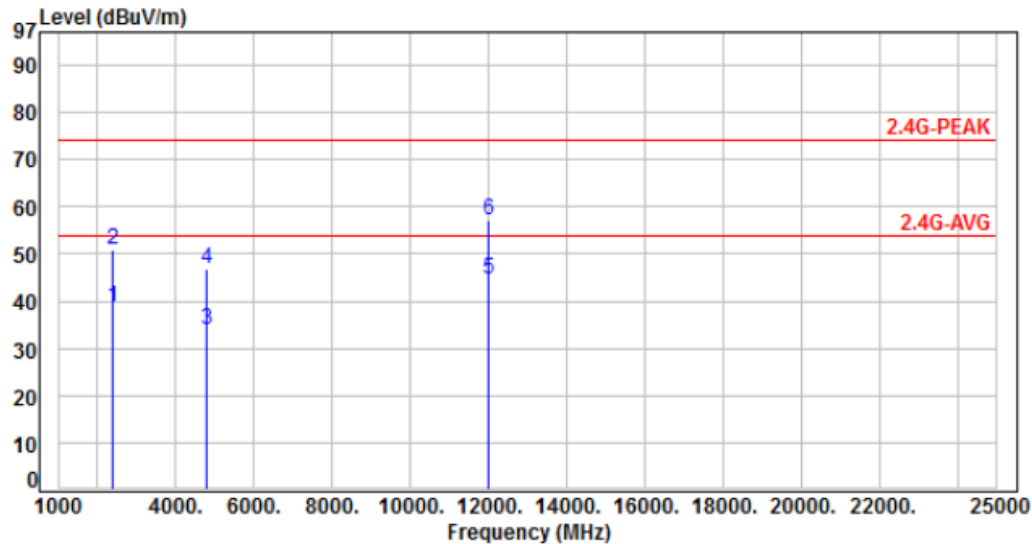

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.89	41.62	38.73	54.00	-15.27	Average	100	45	P
2	2390.00	-2.89	53.80	50.91	74.00	-23.09	Peak	100	45	P
3	4804.00	4.78	29.17	33.95	54.00	-20.05	Average	100	17	P
4	4804.00	4.78	41.91	46.69	74.00	-27.31	Peak	100	17	P
5	12010.00	14.85	29.82	44.67	54.00	-9.33	Average	100	125	P
6	12010.00	14.85	42.25	57.10	74.00	-16.90	Peak	100	125	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60HZ	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH00		:

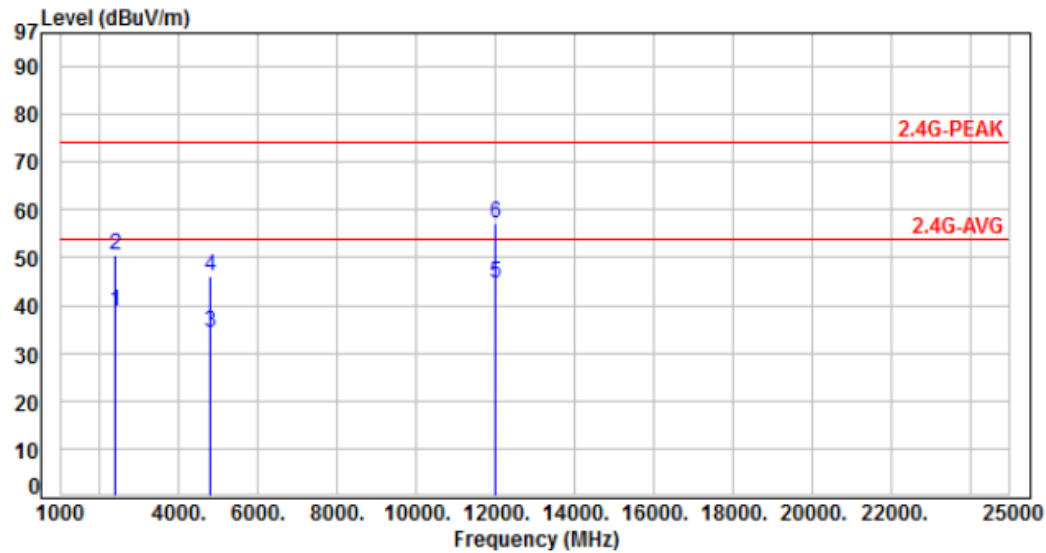

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.89	41.66	38.77	54.00	-15.23	Average	100	241	P
2	2390.00	-2.89	53.40	50.51	74.00	-23.49	Peak	100	241	P
3	4804.00	4.78	29.52	34.30	54.00	-19.70	Average	100	142	P
4	4804.00	4.78	41.42	46.20	74.00	-27.80	Peak	100	142	P
5	12010.00	14.85	29.94	44.79	54.00	-9.21	Average	100	194	P
6	12010.00	14.85	42.42	57.27	74.00	-16.73	Peak	100	194	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60HZ	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH19		:	

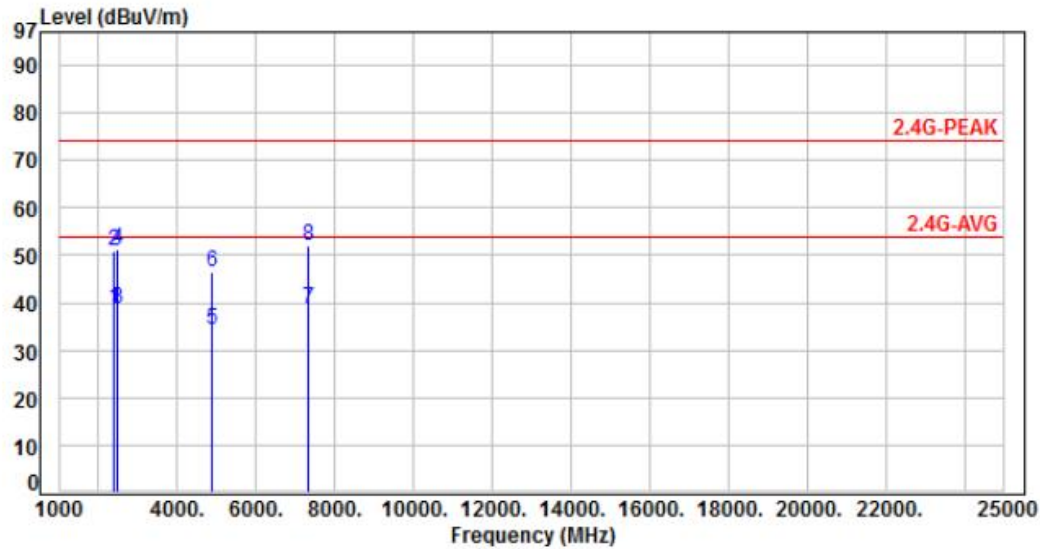

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.89	41.52	38.63	54.00	-15.37	Average	100	150	P
2	2390.00	-2.89	53.87	50.98	74.00	-23.02	Peak	100	150	P
3	2483.50	-2.69	41.52	38.83	54.00	-15.17	Average	100	150	P
4	2483.50	-2.69	53.83	51.14	74.00	-22.86	Peak	100	150	P
5	4880.00	5.10	29.17	34.27	54.00	-19.73	Average	100	116	P
6	4880.00	5.10	41.45	46.55	74.00	-27.45	Peak	100	116	P
7	7320.00	10.04	28.78	38.82	54.00	-15.18	Average	100	179	P
8	7320.00	10.04	41.79	51.83	74.00	-22.17	Peak	100	179	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60HZ	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH19		:

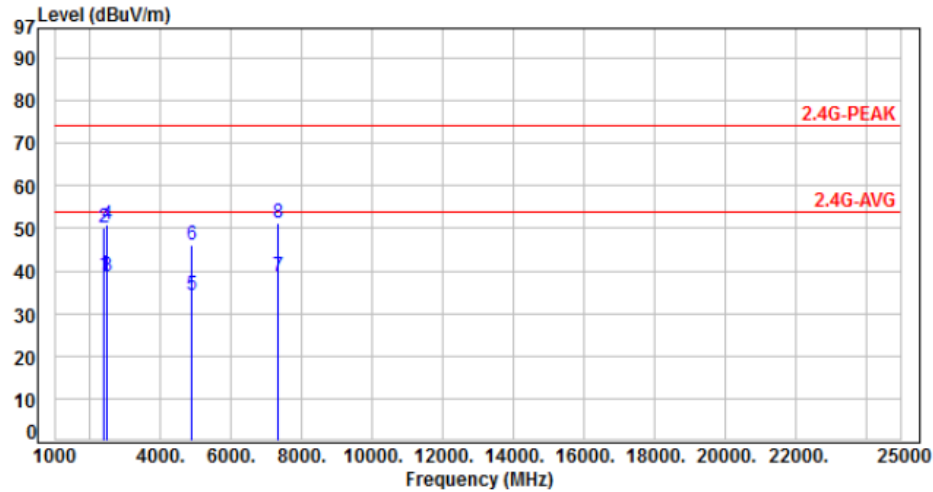

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.89	41.85	38.96	54.00	-15.04	Average	100	62	P
2	2390.00	-2.89	53.22	50.33	74.00	-23.67	Peak	100	62	P
3	2483.50	-2.69	41.57	38.88	54.00	-15.12	Average	100	62	P
4	2483.50	-2.69	53.62	50.93	74.00	-23.07	Peak	100	62	P
5	4880.00	5.10	29.15	34.25	54.00	-19.75	Average	100	10	P
6	4880.00	5.10	41.01	46.11	74.00	-27.89	Peak	100	10	P
7	7320.00	10.04	28.87	38.91	54.00	-15.09	Average	100	117	P
8	7320.00	10.04	41.17	51.21	74.00	-22.79	Peak	100	117	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60HZ	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH39		:	

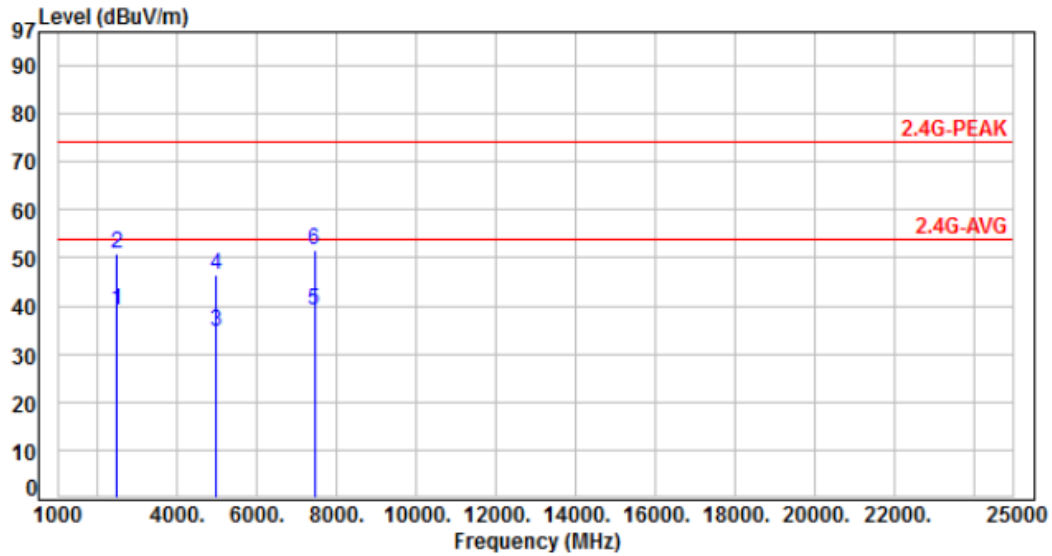

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-2.69	41.81	39.12	54.00	-14.88	Average	100	181	P
2	2483.50	-2.69	53.72	51.03	74.00	-22.97	Peak	100	181	P
3	4960.00	5.46	29.12	34.58	54.00	-19.42	Average	100	112	P
4	4960.00	5.46	41.15	46.61	74.00	-27.39	Peak	100	112	P
5	7440.00	10.16	28.96	39.12	54.00	-14.88	Average	100	53	P
6	7440.00	10.16	41.53	51.69	74.00	-22.31	Peak	100	53	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60HZ	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, CH39		:	

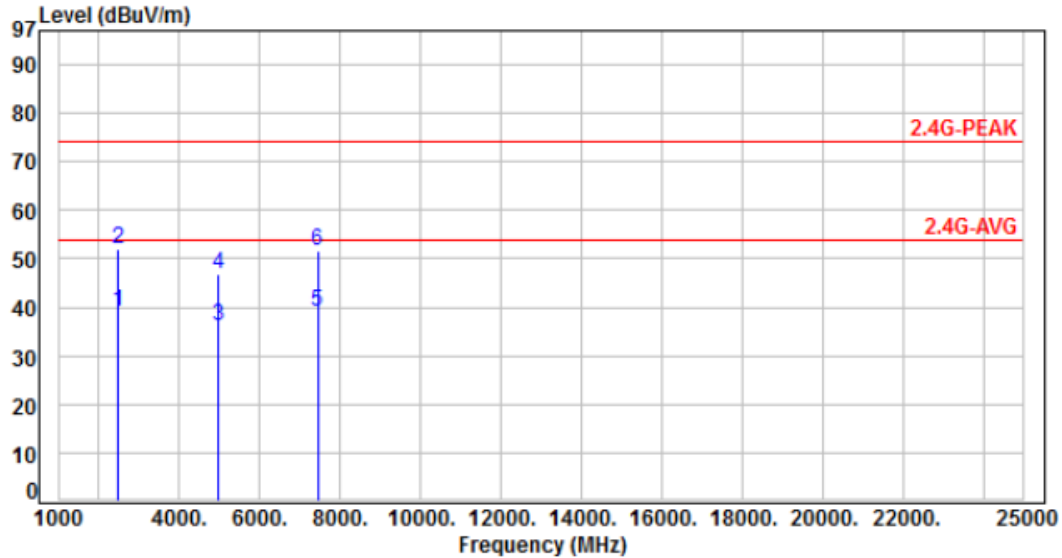

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-2.69	41.91	39.22	54.00	-14.78	Average	100	78	P
2	2483.50	-2.69	54.76	52.07	74.00	-21.93	Peak	100	78	P
3	4960.00	5.46	30.63	36.09	54.00	-17.91	Average	100	11	P
4	4960.00	5.46	41.47	46.93	74.00	-27.07	Peak	100	11	P
5	7440.00	10.16	28.95	39.11	54.00	-14.89	Average	100	60	P
6	7440.00	10.16	41.52	51.68	74.00	-22.32	Peak	100	60	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60HZ	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, CH00		:

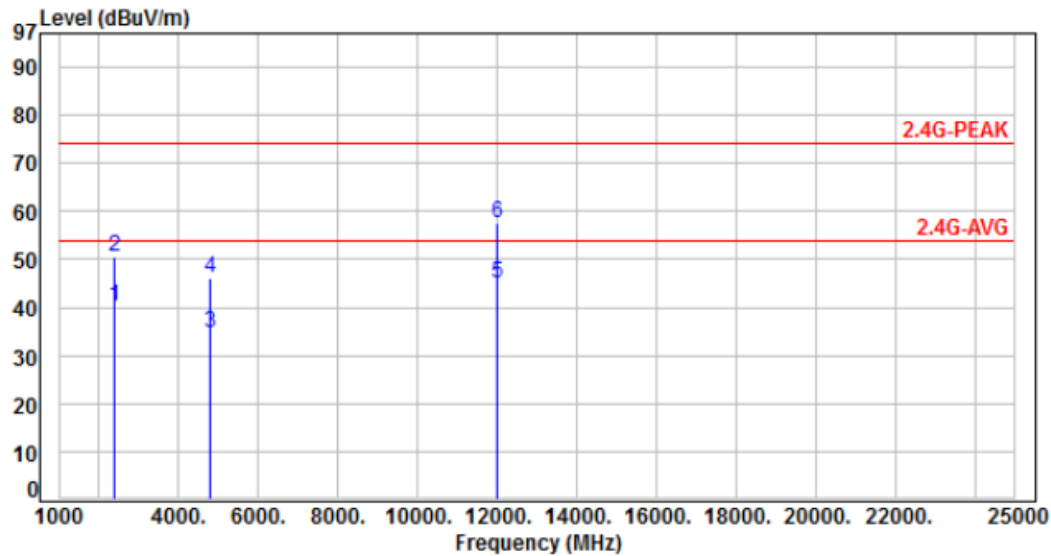

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.89	43.15	40.26	54.00	-13.74	Average	100	275	P
2	2390.00	-2.89	53.43	50.54	74.00	-23.46	Peak	100	275	P
3	4804.00	4.78	29.90	34.68	54.00	-19.32	Average	100	169	P
4	4804.00	4.78	41.43	46.21	74.00	-27.79	Peak	100	169	P
5	12010.00	14.85	30.18	45.03	54.00	-8.97	Average	100	70	P
6	12010.00	14.85	42.56	57.41	74.00	-16.59	Peak	100	70	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60HZ	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, CH00		:

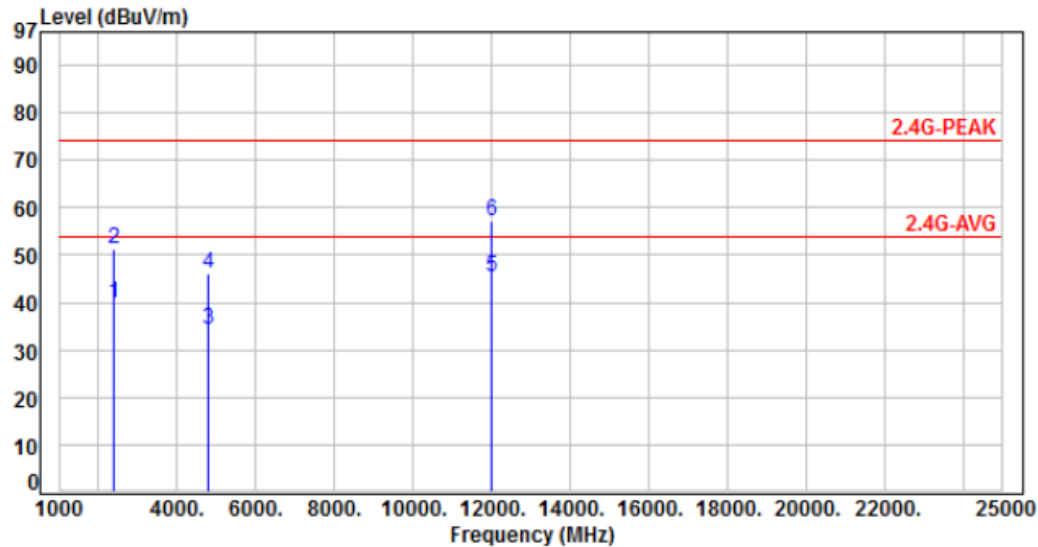

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.89	42.63	39.74	54.00	-14.26	Average	100	120	P
2	2390.00	-2.89	54.00	51.11	74.00	-22.89	Peak	100	120	P
3	4804.00	4.78	29.67	34.45	54.00	-19.55	Average	100	55	P
4	4804.00	4.78	41.25	46.03	74.00	-27.97	Peak	100	55	P
5	12010.00	14.85	30.43	45.28	54.00	-8.72	Average	100	149	P
6	12010.00	14.85	42.15	57.00	74.00	-17.00	Peak	100	149	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60HZ	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 2, CH19		:	

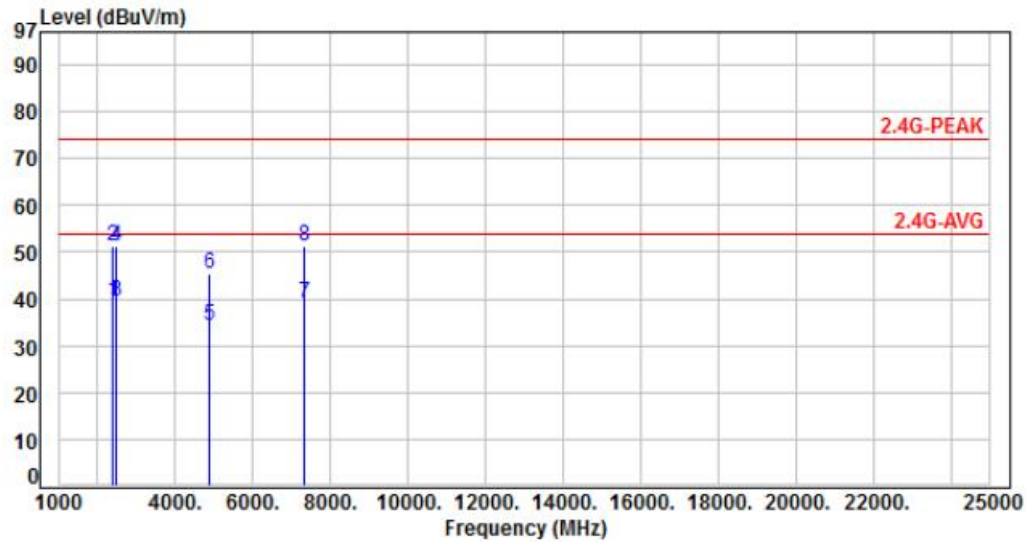

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.89	42.35	39.46	54.00	-14.54	Average	100	236	P
2	2390.00	-2.89	54.00	51.11	74.00	-22.89	Peak	100	236	P
3	2483.50	-2.69	42.32	39.63	54.00	-14.37	Average	100	236	P
4	2483.50	-2.69	53.88	51.19	74.00	-22.81	Peak	100	236	P
5	4880.00	5.10	29.34	34.44	54.00	-19.56	Average	100	85	P
6	4880.00	5.10	40.44	45.54	74.00	-28.46	Peak	100	85	P
7	7320.00	10.04	29.22	39.26	54.00	-14.74	Average	100	156	P
8	7320.00	10.04	41.06	51.10	74.00	-22.90	Peak	100	156	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60HZ	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, CH19		:

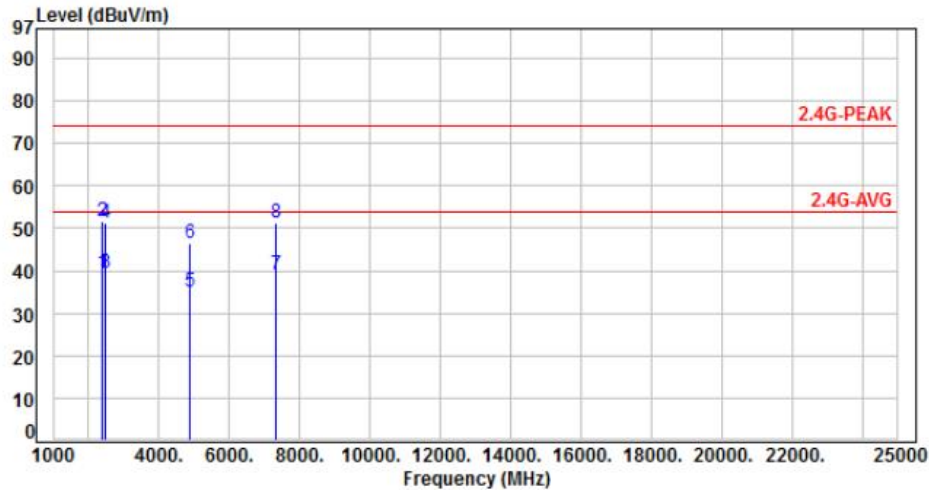

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.89	42.17	39.28	54.00	-14.72	Average	100	133	P
2	2390.00	-2.89	54.70	51.81	74.00	-22.19	Peak	100	133	P
3	2483.50	-2.69	42.17	39.48	54.00	-14.52	Average	100	133	P
4	2483.50	-2.69	53.80	51.11	74.00	-22.89	Peak	100	133	P
5	4880.00	5.10	29.77	34.87	54.00	-19.13	Average	100	200	P
6	4880.00	5.10	41.27	46.37	74.00	-27.63	Peak	100	200	P
7	7320.00	10.04	29.20	39.24	54.00	-14.76	Average	100	289	P
8	7320.00	10.04	41.37	51.41	74.00	-22.59	Peak	100	289	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60HZ	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 2, CH39		:	

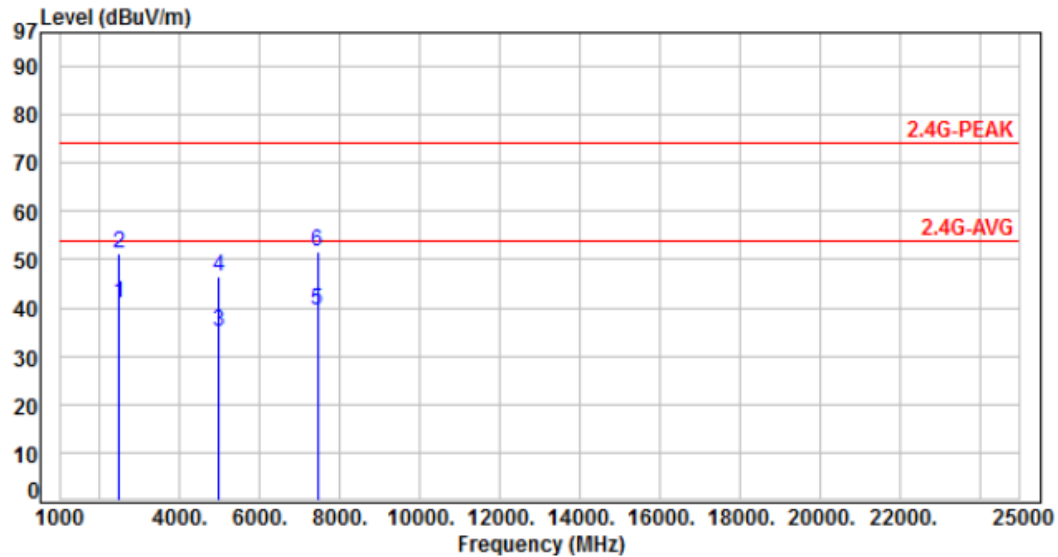

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-2.69	43.53	40.84	54.00	-13.16	Average	100	0	P
2	2483.50	-2.69	53.79	51.10	74.00	-22.90	Peak	100	0	P
3	4960.00	5.46	29.45	34.91	54.00	-19.09	Average	100	50	P
4	4960.00	5.46	40.96	46.42	74.00	-27.58	Peak	100	50	P
5	7440.00	10.16	29.35	39.51	54.00	-14.49	Average	100	189	P
6	7440.00	10.16	41.57	51.73	74.00	-22.27	Peak	100	189	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60HZ	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, CH39		:

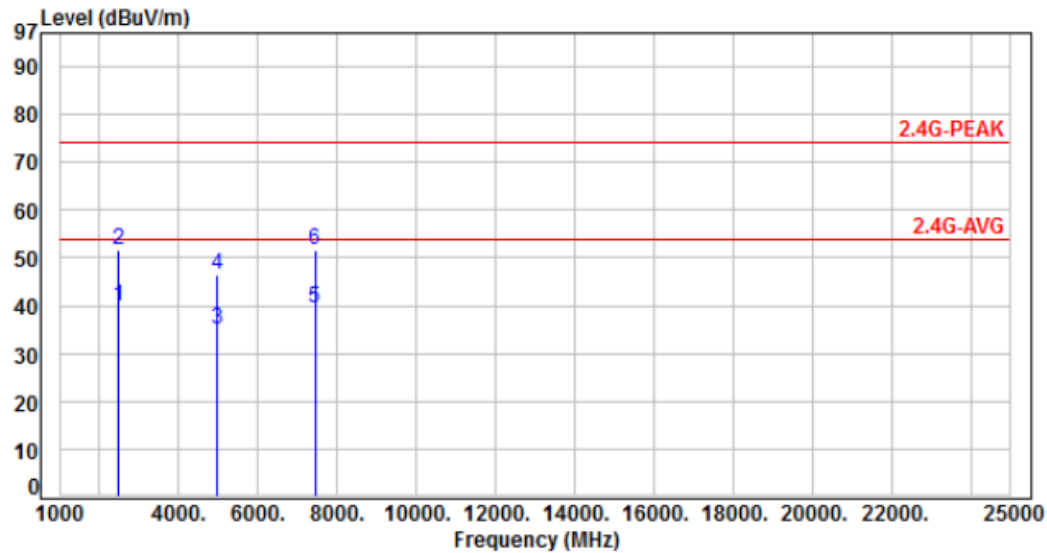

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-2.69	42.43	39.74	54.00	-14.26	Average	100	100	P
2	2483.50	-2.69	54.26	51.57	74.00	-22.43	Peak	100	100	P
3	4960.00	5.46	29.69	35.15	54.00	-18.85	Average	100	355	P
4	4960.00	5.46	41.05	46.51	74.00	-27.49	Peak	100	355	P
5	7440.00	10.16	29.45	39.61	54.00	-14.39	Average	100	225	P
6	7440.00	10.16	41.48	51.64	74.00	-22.36	Peak	100	225	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. Test of Spurious Emission (Conducted)


7.1 Test Limit

Below -20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.2 Test Procedure







- The transmitter output was connected to the spectrum analyzer via a low loss cable.
- Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20dB relative to the maximum measured in-band peak PSD level.
- The band edges was measured and recorded.

7.3 Test Setup Layout






7.4 Test Result and Data







Note: Test plots refer to the following pages.

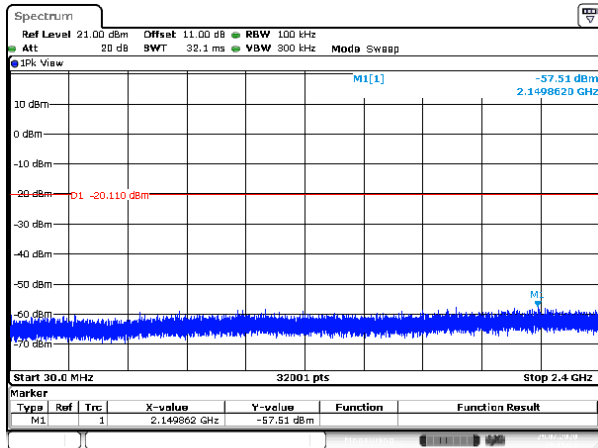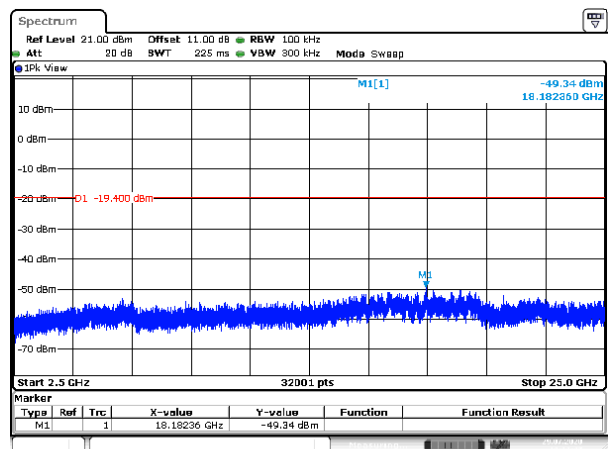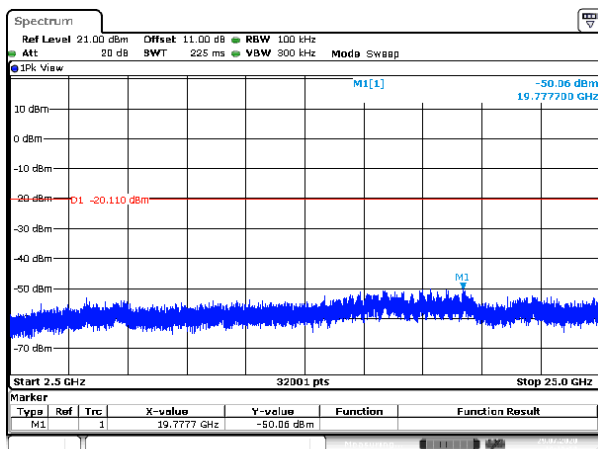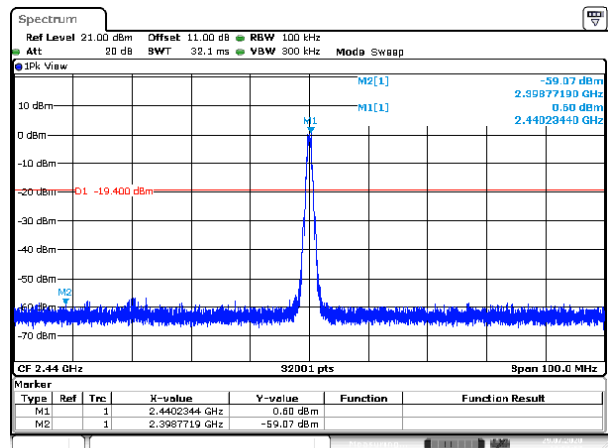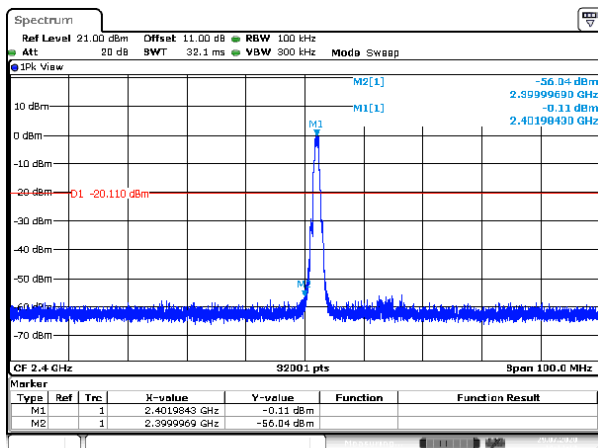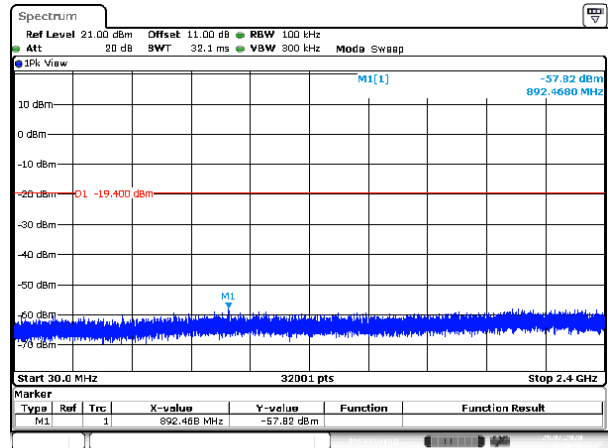Modulation Type: GFSK(1Mbps)
CH00Modulation Type: GFSK(1Mbps)
CH19






Modulation Type: GFSK(1Mbps)
CH39

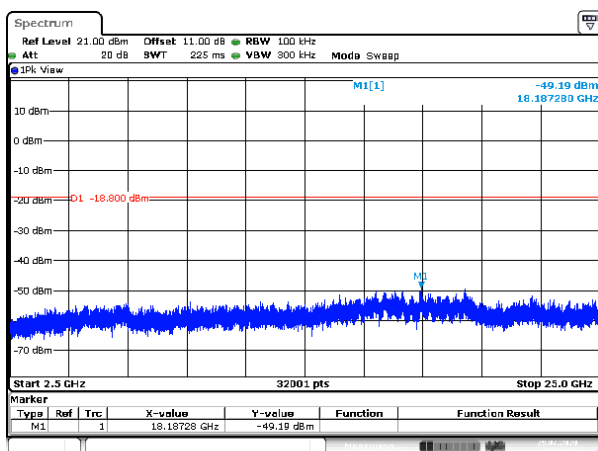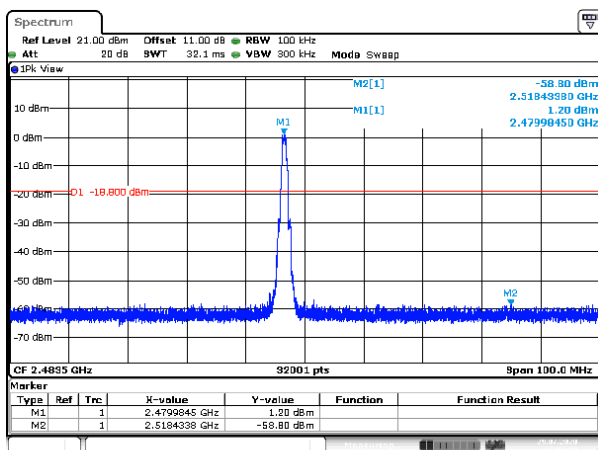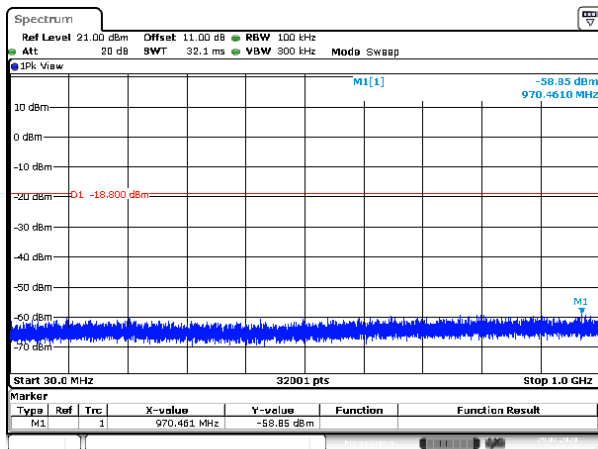

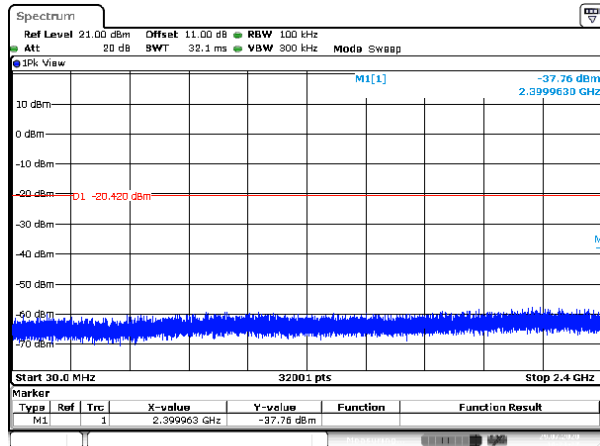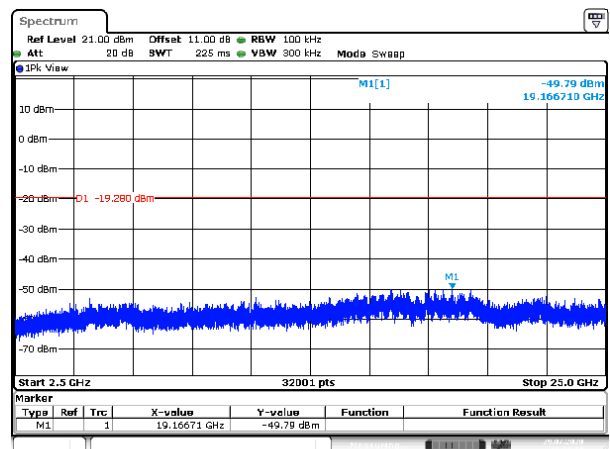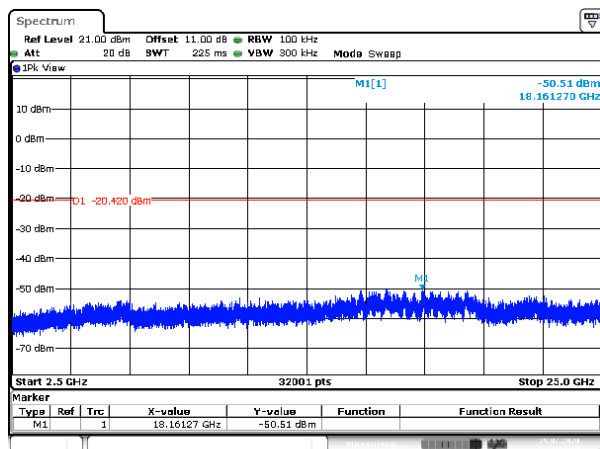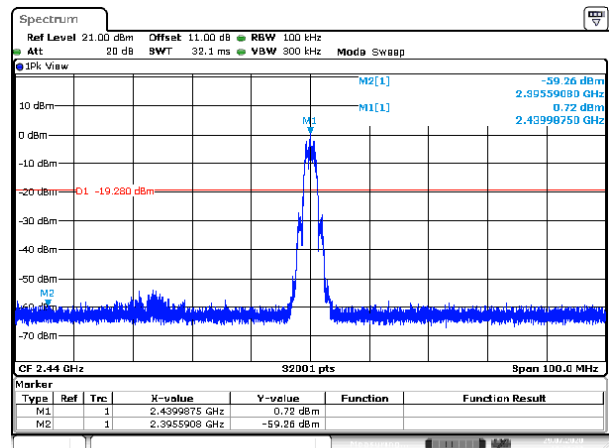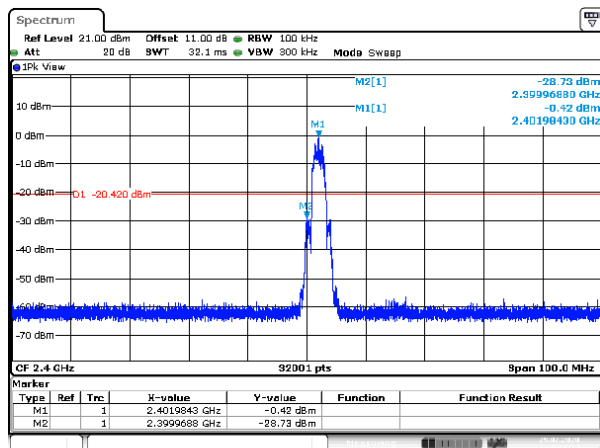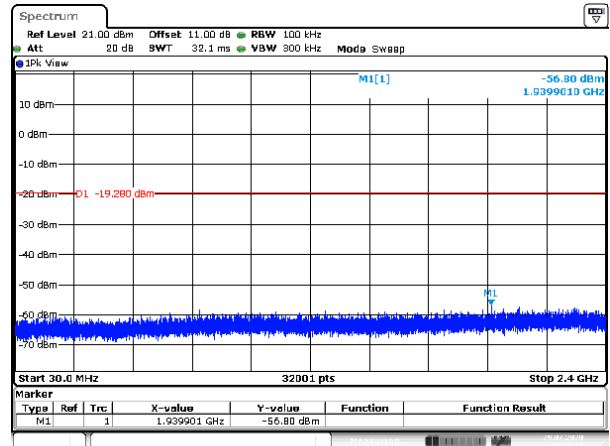Modulation Type: GFSK(2Mbps)
CH00Modulation Type: GFSK(2Mbps)
CH19



Modulation Type: GFSK(2Mbps)
CH39

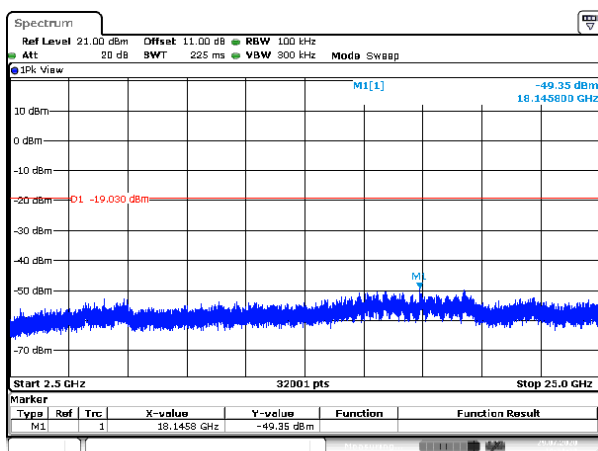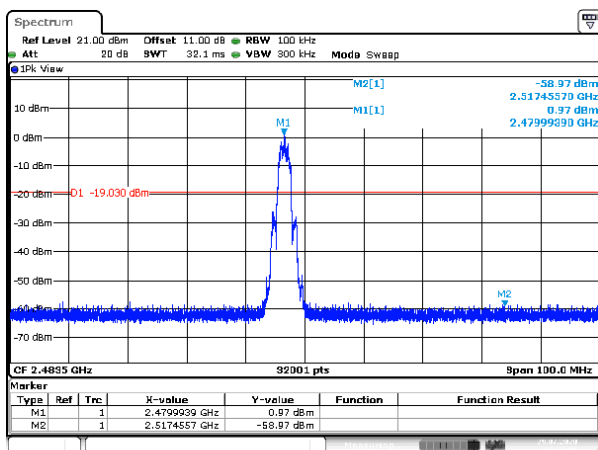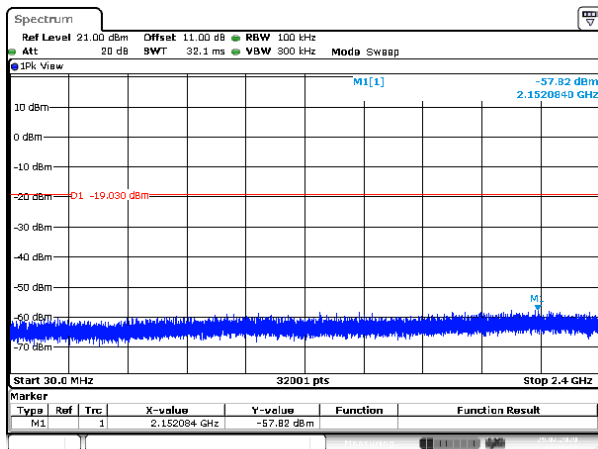



8. On Time, Duty Cycle and Measurement methods


8.1 Test Limit

None; for reporting purposes only.

8.2 Test Procedure

Zero-Span Spectrum Analyzer Method.

8.3 Test Setup Layout




8.4 Test Result and Data


Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
GFSK(1Mbps)	0.41	0.63	65.05%
GFSK(2Mbps)	0.24	0.62	37.75%



Modulation Type: GFSK(1Mbps)

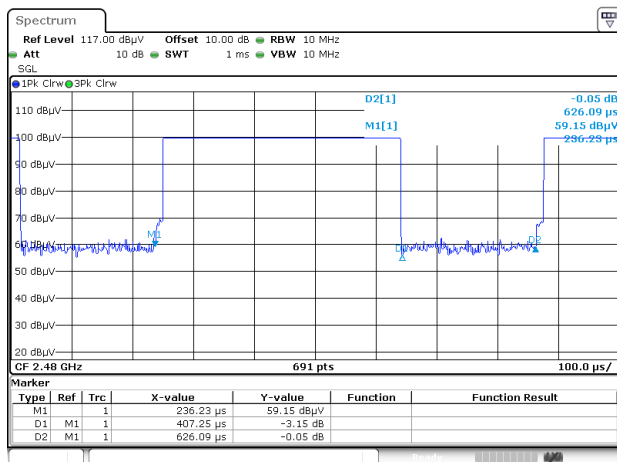

Modulation Type: GFSK(2Mbps)

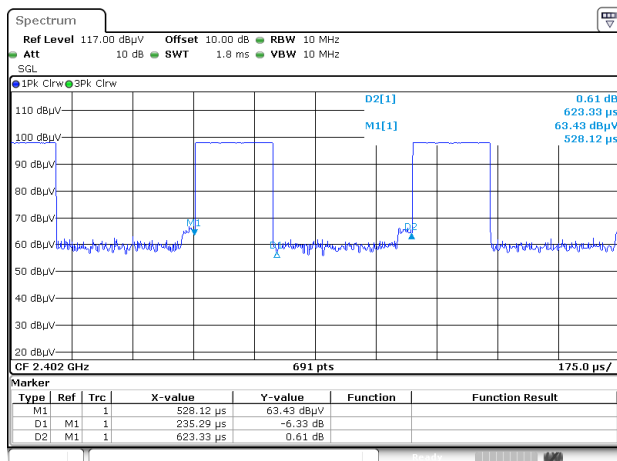



9. 6dB Bandwidth Measurement Data


9.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

9.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
- The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- The 6dB Bandwidth was measured and recorded.







9.3 Test Setup Layout



9.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (KHz)	Limit (KHz)
GFSK(1Mbps)	0	2402	686.00	500
	19	2440	694.60	500
	39	2480	694.60	500

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (KHz)	Limit (KHz)
GFSK(2Mbps)	0	2402	1418.20	500
	19	2440	1396.50	500
	39	2480	1396.50	500

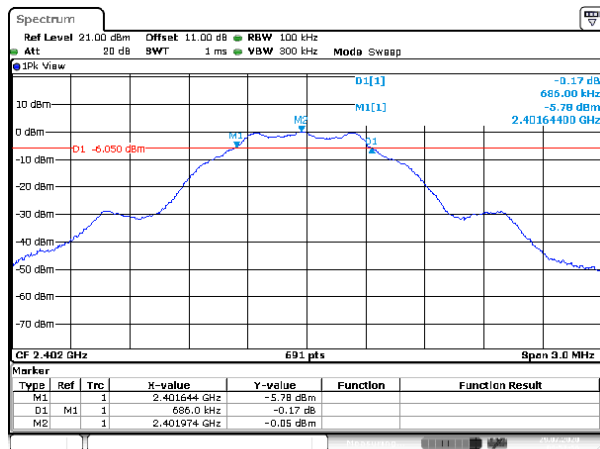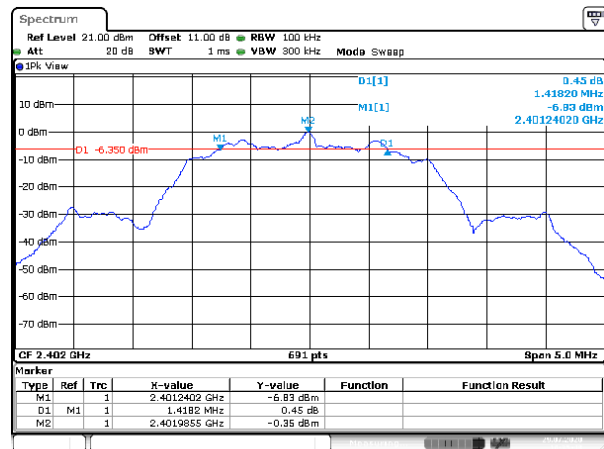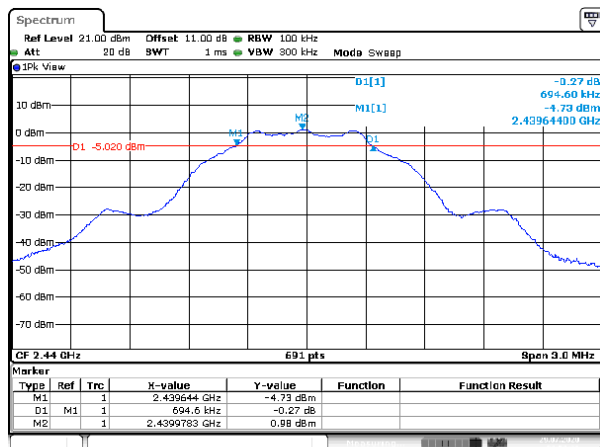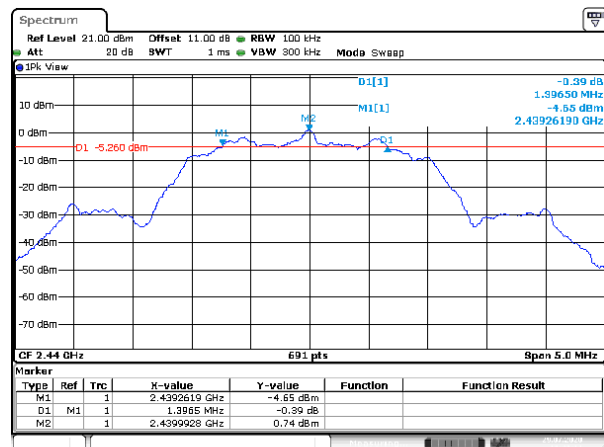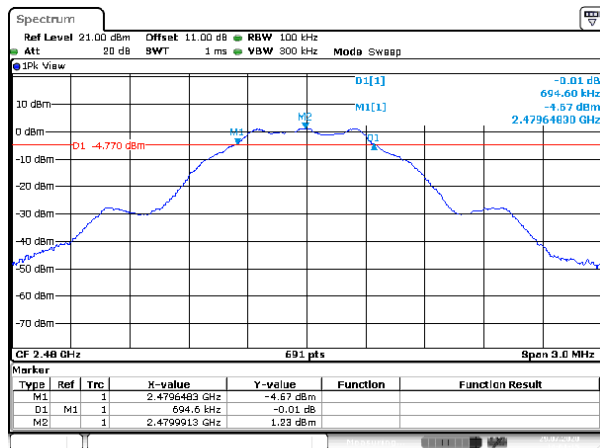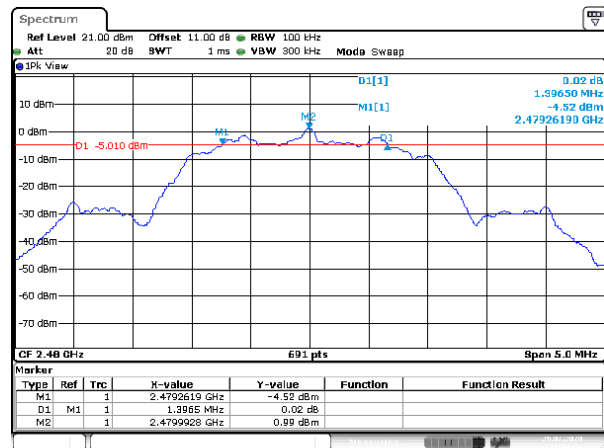Modulation Type: GFSK(1Mbps)
CH00Modulation Type: GFSK(2Mbps)
CH00Modulation Type: GFSK(1Mbps)
CH19Modulation Type: GFSK(2Mbps)
CH19Modulation Type: GFSK(1Mbps)
CH39Modulation Type: GFSK(2Mbps)
CH39



10. Maximum Peak and Average Output Power


10.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

10.2 Test Procedures

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

10.3 Test Setup Layout





10.4 Test Result and Data

BT(1M bps)

Power Set	Modulation Type	Channel	Frequency (MHz)	Power Output (dBm)		Power Output (mW)	
				Peak	Average	Peak	Average
Default	GFSK	0	2402	2.90	2.72	1.950	1.871
Default		19	2440	3.84	3.70	2.421	2.344
Default		39	2480	3.83	3.68	2.415	2.333

*Average power is for reference only.

BT(2M bps)

Power Set	Modulation Type	Channel	Frequency (MHz)	Power Output (dBm)		Power Output (mW)	
				Peak	Average	Peak	Average
Default	GFSK	0	2402	3.10	2.72	2.042	1.871
Default		19	2440	4.01	3.71	2.518	2.350
Default		39	2480	4.00	3.69	2.512	2.339

*Average power is for reference only.



11. Power Spectral Density


11.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm.

11.2 Test Procedures

- The transmitter output was connected to spectrum analyzer.
- The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 10KHz VBW as that of the fundamental frequency. Set the sweep time=auto couple.
- The power spectral density was measured and recorded.






11.3 Test Setup Layout



11.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 3KHz Bandwidth(dBm)	Limit
GFSK(1Mbps)	0	2402	-13.59	8.00
	19	2440	-12.46	8.00
	39	2480	-12.10	8.00

Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 3KHz Bandwidth(dBm)	Limit
GFSK(2Mbps)	0	2402	-15.28	8.00
	19	2440	-14.11	8.00
	39	2480	-13.96	8.00

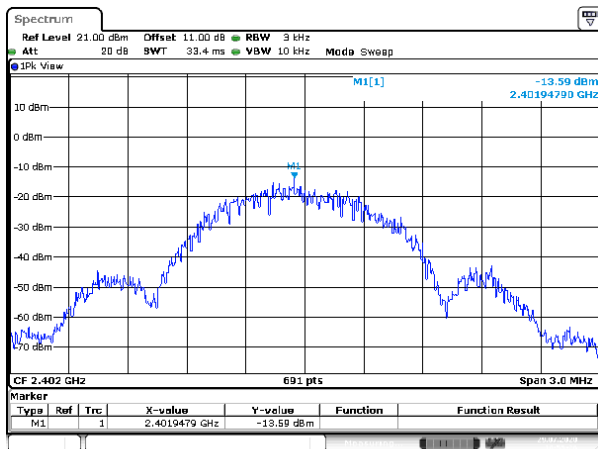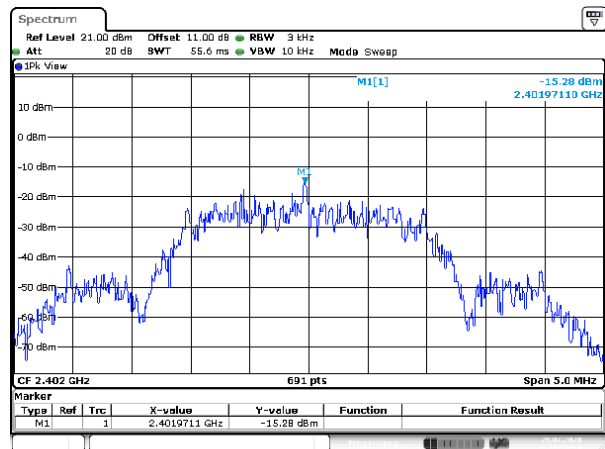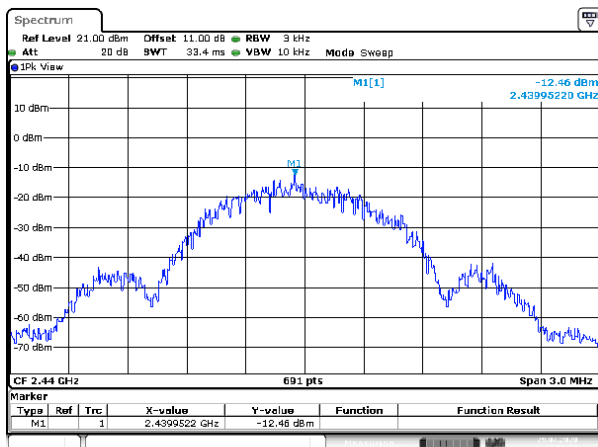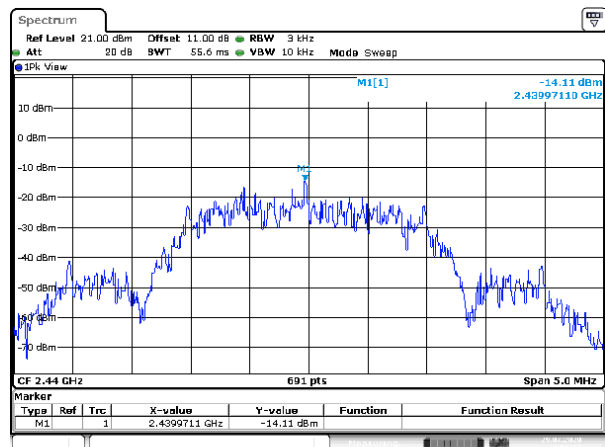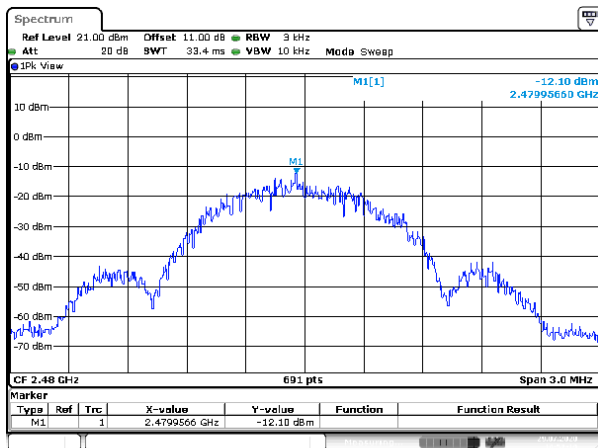Modulation Type: GFSK(1Mbps)
CH00Modulation Type: GFSK(2Mbps)
CH00Modulation Type: GFSK(1Mbps)
CH19Modulation Type: GFSK(2Mbps)
CH19Modulation Type: GFSK(1Mbps)
CH39Modulation Type: GFSK(2Mbps)
CH39