


Quick Start Guide v1

HyperX Pulsefire Haste 2 Pro 4k

Wireless Gaming Mouse

Overview

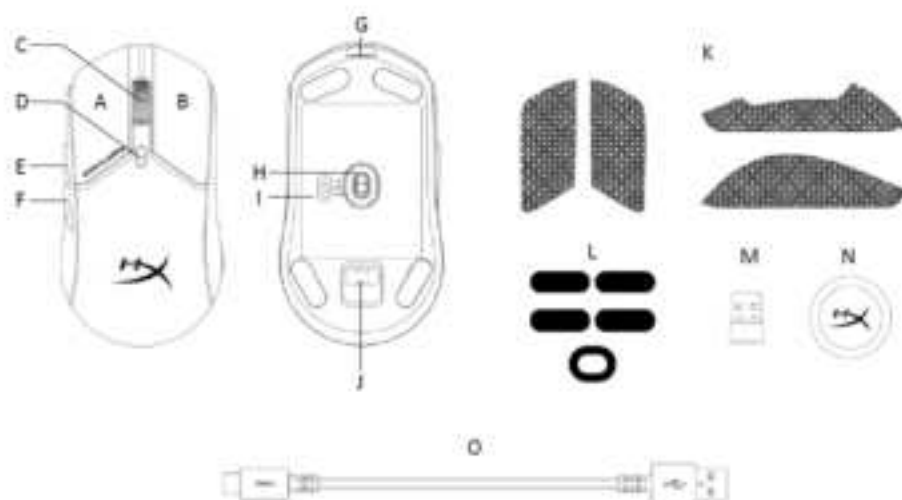

- A. Left click button
- B. Right click button
- C. Mouse wheel
- D. DPI button
- E. Forward button

- F. Back button
- G. USB-C port
- H. HyperX 26K Sensor [\[Translate Sensor\]](#)
- I. Power mode switch
- J. USB dongle storage

- K. Grip tape
- L. Mouse skates
- M. USB 4k wireless dongle
- N. Extension adapter
- O. USB charge / data cable

HYPERX

Installation

2.4G Wireless Mode

1. Switch the mouse to 2.4G power mode.
2. Connect the USB wireless dongle to the extension adapter.
3. Connect the extension adapter to a PC or game console using the included USB cable.

Keep the USB wireless dongle within 20cm of the mouse for optimal placement.




Bluetooth Mode

1. Switch the mouse to Bluetooth power mode.
The mouse will flash blue on the first setup.
2. Go to your computer's Bluetooth settings, search, and connect to "Haste 2 Pro".



Bluetooth Pairing

Hold the left click button, right click button, and the DPI button simultaneously until the mouse flashes blue.



Onboard Polling Rate Switch


The default polling rate is 1k polling rate.

Enable 4k Wireless Polling Rate

1. Power off the mouse completely.
2. Press and hold the DPI button and back button simultaneously.
3. While holding the buttons in step 2, switch the mouse to 2.4G mode.

The wheel LED will fast-blink green four times.


To revert to the default 1k polling rate, follow the same procedure. The wheel LED will fast-blink green two times.

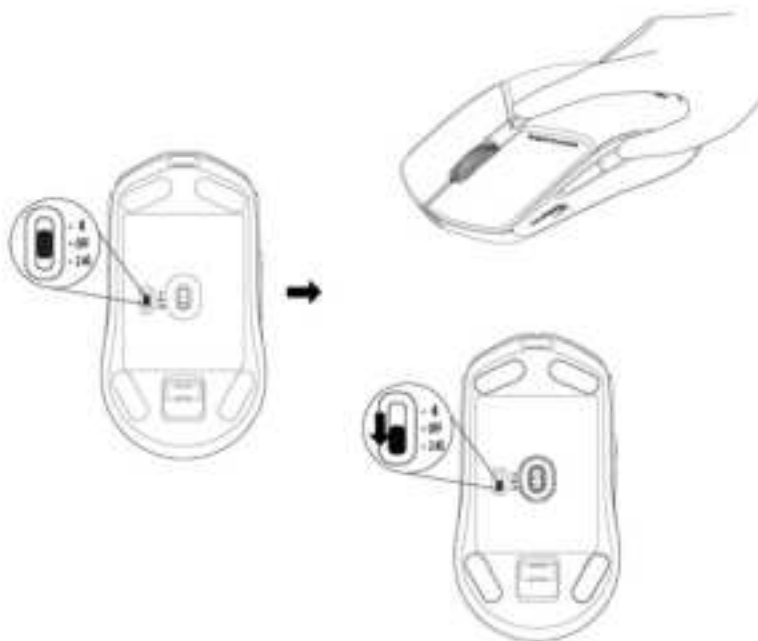

Charging and Wired Mode

It is recommended to fully charge your mouse before first use.

Connect the mouse to a PC or game console using the included USB cable. USB connectivity will override the selected power mode.

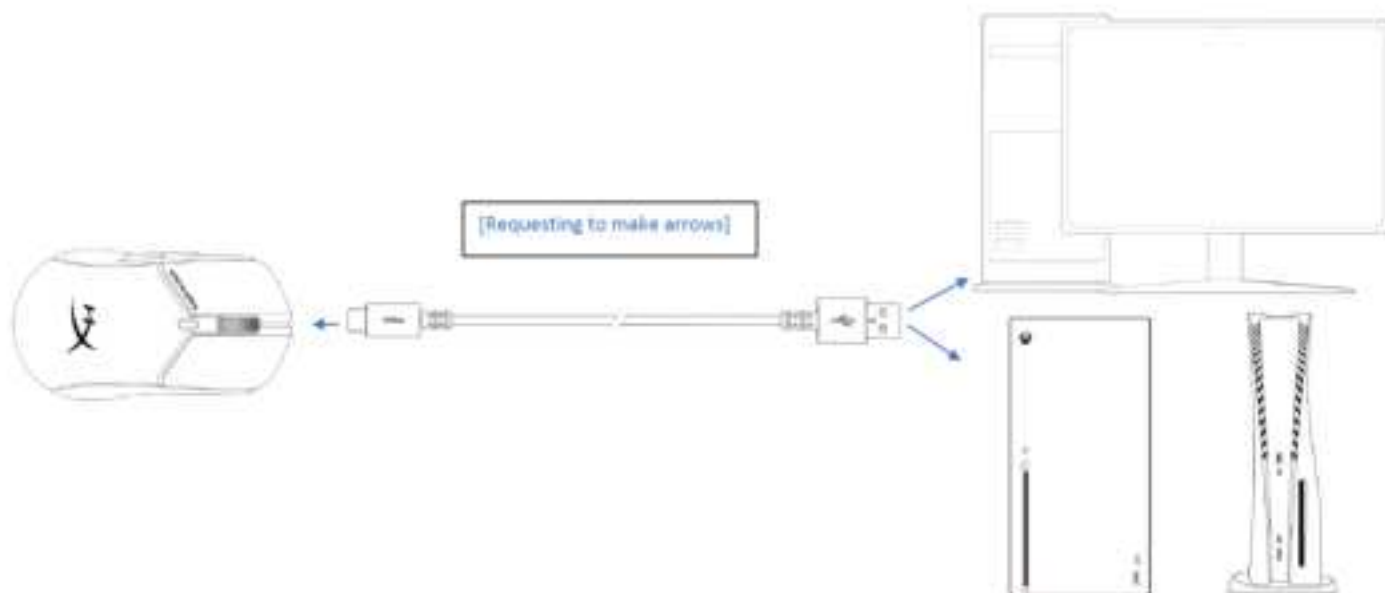

DPI Presets

There are 4 default DPI presets: 400 DPI (red) | 800 DPI (blue) | 1600 DPI (yellow) | 3200 DPI (green)

HyperX NGENUITY Software

To customize lighting, DPI, macro settings, and more, download HyperX NGENUITY software at hyperx.com/ngenuity

[NGENUITY Logo on the far right]

Questions or Setup Issues

Contact the HyperX support team or see the user guide at hyperx.com/support

[Compliance Battery/Transmit Power Section – I do not believe this section requires translation, that should be asked with Compliance team if needed]

Battery Information	Battery Type: 3.8V, 450mAh Lio-ion Battery, 1.71Wh Rechargeable battery can be replaced by user
---------------------	--

Radio Technology	Frequency Bands: Bluetooth, 2.4GHz
Frequency and TX Power Information	Maximum Transmit Power EIRP (mW): Mouse: ≤ 10dBm (10mW) USB wireless dongle: ≤ 10dBm (10mW)

Wireless Mouse/ 無線滑鼠/无线鼠标

Regulatory Model/型號/型号: HXMS234

USB Wireless Dongle /USB 無線訊號轉換器/USB 无线讯号转换器

Regulatory Model/型號/型号: HXWD231

RF Exposure Information and Statement

<For Wireless Mouse_HXMS234>

The SAR limit of USA is 1.6 W/kg averaged over one gram of tissue. This device has also been tested against this SAR limit. The highest SAR value reported under this standard during product certification for use properly is 0.121 W/kg.

The SAR limit of Canada is 1.6 W/kg averaged over one gram of tissue. This device has also been tested against this SAR limit. The highest SAR value reported under this standard during product certification for use properly is 0.121 W/kg.

La limite DAS du Canada est de 1,6 W/kg en moyenne sur un gramme de tissu. Cet appareil a également été testé par rapport à cette limite SAR. La valeur DAS la plus élevée signalée dans le cadre de cette norme lors de la certification du produit pour une utilisation correcte est de 0,121 W/kg.

<For USB Wireless Dongle_HXWD231>

The SAR limit of USA is 1.6 W/kg averaged over one gram of tissue. This device has also been tested against this SAR limit. The highest SAR value reported under this standard during product certification for use properly is 0.155 W/kg.

To maintain compliance with RF exposure requirements, use accessories that maintain a 5mm separation distance between the user's body.

The SAR limit of Canada is 1.6 W/kg averaged over one gram of tissue. This device has also been tested against this SAR limit. The highest SAR value reported under this standard during product certification for use properly is 0.155 W/kg.

To maintain compliance with RF exposure requirements, use accessories that maintain a 5mm separation distance between the user's body.

La limite DAS du Canada est de 1,6 W/kg en moyenne sur un gramme de tissu. Cet appareil a également été testé par rapport à cette limite SAR. La valeur DAS la plus élevée signalée dans le cadre de cette norme lors de la certification du produit pour une utilisation correcte est de 0,155 W/kg.

Pour maintenir la conformité aux exigences d'exposition aux RF, utilisez des accessoires qui maintiennent une distance de séparation de 5 mm entre le corps de l'utilisateur.

©Copyright 2023 HyperX and the HyperX logo are registered trademarks or trademarks of HP Inc. in the U.S. and/or other countries. All registered trademarks and trademarks are property of their respective owners. / HyperX et le logo HyperX sont des marques déposées ou des marques commerciales de HP Inc. aux États-Unis et/ou dans d'autres pays. Toutes les marques déposées et les marques commerciales sont la propriété de leurs détenteurs respectifs. / HP Inc. 1501 Page Mill Road, Palo Alto, CA 94304, USA, HP REG 23010, 08028 Barcelona, Spain, HP Inc. UK Ltd, Regulatory Enquiries, Earley West, 300 Thames Valley Park Drive, Reading, RG6 1PT. Қазақстан: "ЭнЧПн Глобал Трайдинг Бк.Вн." компаниясының Қазақстандағы филиалы, Қазақстан Республикасы, 050040, Алматы қ., Бостандық ауданы, Әл-Фараби дағу ылы, 77/7. Телефон/факс: +7 727 356 21 80. HP Inc. 1501 Page Mill Road, Palo - Alto, Калифорния 94304, США. 台灣惠寶資訊科技股份有限公司, 台北市南港區經貿二路66號10樓, 電話: 886237899900