

FCC Radio Test Report

FCC ID: 2AEUPBHACP011

This report concerns (check one): ☒ Original Grant ☐ Class I Change ☐ Class II Change

Project No. : 1705007
Equipment : Ring
Test Model : Chime Pro
Series Model : N/A
Applicant : Bot Home Automation, Inc.
Address : 1523 26th St, Santa Monica, CA 90404,USA

Date of Receipt : May 05, 2017
Date of Test : May 05, 2017 ~ Jun. 23, 2017
Issued Date : Jun. 27, 2017
Tested by : BTL Inc.

Testing Engineer : Rush Kao
(Rush Kao)
Technical Manager : James Chiu
(James Chiu)
Authorized Signatory : Andy Chiu
(Andy Chiu)

B T L I N C .

B1, No.37, Lane 365, Yang Guang St.,
Nei-Hu District, Taipei City 114, Taiwan.
TEL:+886-2-2657-3299 FAX: +886-2-2657-3331

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	13
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
3.5 DESCRIPTION OF SUPPORT UNITS	14
4 . EMC EMISSION TEST	15
4.1 CONDUCTED EMISSION MEASUREMENT	15
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	15
4.1.2 TEST PROCEDURE	15
4.1.3 DEVIATION FROM TEST STANDARD	15
4.1.4 TEST SETUP	16
4.1.5 EUT OPERATING CONDITIONS	16
4.1.6 EUT TEST CONDITIONS	16
4.1.7 TEST RESULTS	16
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 RADIATED EMISSION LIMITS	17
4.2.2 TEST PROCEDURE	18
4.2.3 DEVIATION FROM TEST STANDARD	18
4.2.4 TEST SETUP	19
4.2.5 EUT OPERATING CONDITIONS	20
4.2.6 EUT TEST CONDITIONS	20
4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	20
4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)	20
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	20
5 . BANDWIDTH TEST	21
5.1 APPLIED PROCEDURES	21
5.1.1 TEST PROCEDURE	21
5.1.2 DEVIATION FROM STANDARD	21
5.1.3 TEST SETUP	21
5.1.4 EUT OPERATION CONDITIONS	21
5.1.5 EUT TEST CONDITIONS	21
5.1.6 TEST RESULTS	21
6 . MAXIMUM PEAK CONDUCTED OUTPUT POWER TEST	22

Table of Contents	Page
6.1 APPLIED PROCEDURES / LIMIT	22
6.1.1 TEST PROCEDURE	22
6.1.2 DEVIATION FROM STANDARD	22
6.1.3 TEST SETUP	22
6.1.4 EUT OPERATION CONDITIONS	22
6.1.5 EUT TEST CONDITIONS	22
6.1.6 TEST RESULTS	22
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	23
7.1 APPLIED PROCEDURES / LIMIT	23
7.1.1 TEST PROCEDURE	23
7.1.2 DEVIATION FROM STANDARD	23
7.1.3 TEST SETUP	23
7.1.4 EUT OPERATION CONDITIONS	23
7.1.5 EUT TEST CONDITIONS	23
7.1.6 TEST RESULTS	23
8 . POWER SPECTRAL DENSITY TEST	24
8.1 APPLIED PROCEDURES / LIMIT	24
8.1.1 TEST PROCEDURE	24
8.1.2 DEVIATION FROM STANDARD	24
8.1.3 TEST SETUP	24
8.1.4 EUT OPERATION CONDITIONS	24
8.1.5 EUT TEST CONDITIONS	24
8.1.6 TEST RESULTS	24
9 . MEASUREMENT INSTRUMENTS LIST	25
10 . EUT TEST PHOTO	27
ATTACHMENT A - CONDUCTED EMISSION	31
ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	34
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	39
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	42
ATTACHMENT E - BANDWIDTH	79
ATTACHMENT F – MAXIMUM PEAK CONDUCTED OUTPUT POWER	86
ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION	89
ATTACHMENT H - POWER SPECTRAL DENSITY	106

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1705007	Original Issue.	Jun. 27, 2017

1. CERTIFICATION

Equipment : Ring
Brand Name : ring
Test Model : Chime Pro
Series Model : N/A
Applicant : Bot Home Automation, Inc.
Manufacturer : Goldtek Technology CO.,LTD.
Address : 16F., No166, Jian 1st Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.)
Factory : Goldtek Technology CO.,LTD.
Address : 16F., No166, Jian 1st Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.)
Date of Test : May 05, 2017 ~ Jun. 23, 2017
Test Sample : Engineering Sample
Standard(s) : FCC Part15, Subpart C:(15.247) / ANSI C63.10-2013

The above equipment has been tested and found in compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1705007) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C			
Standard(s) Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(d)	Antenna conducted Spurious Emission	PASS	
15.247(a)(2)	6dB Bandwidth	PASS	
15.247(b)(3)	Peak Output Power	PASS	
15.247(e)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	
15.247(d)/ 15.205/ 15.209	Transmitter Radiated Emissions	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

Conducted emission Test:

C05: (VCCI RN: C-4742; FCC RN:965108; FCC DN:TW1082)

No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Radiated emission Test (Below 1 GHz):

CB15: (FCC RN:674415; FCC DN:TW0659)

No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Radiated emission Test (Above 1 GHz):

CB15: (FCC RN:674415; FCC DN:TW0659)

No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted emission test:

Test Site	Method	Measurement Frequency Range	U,(dB)
C05	CISPR	150 kHz ~ 30MHz	3.06

B. Radiated emission test:

Test Site	Method	Measurement Frequency Range	U,(dB)
CB15 (3m)	CISPR	9kHz ~ 150kHz	2.96
		150kHz ~ 30MHz	2.74

Test Site	Method	Measurement Frequency Range	Ant.	U,(dB)
CB15 (3m)	CISPR	30MHz ~ 200MHz	V	4.76
		30MHz ~ 200MHz	H	4.28
		200MHz ~ 1,000MHz	V	5.08
		200MHz ~ 1,000MHz	H	4.50

Test Site	Method	Measurement Frequency Range	Ant.	U,(dB)
CB15 (3m)	CISPR	1GHz ~ 6GHz	V	4.48
		1GHz ~ 6GHz	H	4.50
		6GHz ~ 18GHz	V	4.30
		6GHz ~ 18GHz	H	4.14

Test Site	Method	Measurement Frequency Range	U,(dB)
CB15 (1m)	CISPR	18 ~ 26.5 GHz	4.72
		26.5 ~ 40 GHz	5.20

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Ring	
Brand Name	ring	
Test Model	Chime Pro	
Series Model	N/A	
Model Difference	N/A	
Product Description	Operation Frequency	2412~2462 MHz
	Modulation Technology	802.11b:DSSS 802.11g:OFDM 802.11n:OFDM
	Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6 Mbps 802.11n up to 144.4 Mbps
	Output Power (Max.)	802.11b: 18.77dBm 802.11g: 21.13dBm 802.11n(20MHz): 23.17dBm
Power Source	AC Mains.	
Power Rating	AC 100-240V, 0.3A, 50/60Hz	
Products Covered	N/A	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

CH01 – CH11 for 802.11b, 802.11g, 802.11n(20MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	LSR	001-0024	Dipole	IPEX	2	NA
2	LSR	001-0024	Dipole	IPEX	2	NA

Note:

(1) The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and receivers (2T2R) and employs Cyclic Delay Diversity (CDD).

In CDD mode,

For power spectral density:

Directional gain (dBi) =

$10 \cdot \log\{[10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(Gn/20)}]^2 / N_{ANT}\} = 5.01 \text{ dBi} < 6 \text{ dBi}.$

Operating Mode / TX Mode	1TX	2TX
802.11b	V (ANT 1)	-
802.11g	V (ANT 1)	-
802.11n(20MHz)	-	V (ANT 1+ANT 2)

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	Normal Link

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 4	Normal Link

For Radiated Test	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11

For Band Edge Test	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11

6dB Spectrum Bandwidth	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11

Maximum Conducted Output Power	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11

Power Spectral Density	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11

Note:


- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11b mode: CCK (1Mbps)
802.11g mode: OFDM (6Mbps)
802.11n HT20 mode : MCS 0 (13Mbps)
For radiated emission tests, the highest output powers were set for final test.
- (3) For radiated below 1G test, the 802.11n(20MHz) is found to be the worst case and recorded.
- (4) The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test software version	DOS		
Frequency (MHz)	2412	2437	2462
802.11b	18100	18100	18100
802.11g	14100	18100	15100
802.11n (20MHz)	14100	18100	15100

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

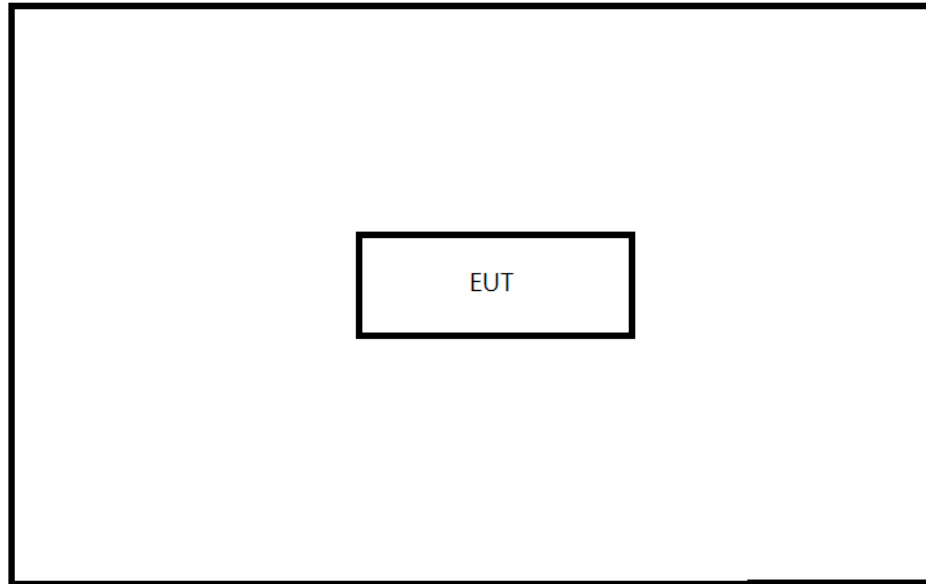

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
-	-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	-

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 -0.50	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

- (1) The limit of " * " decreases with the logarithm of the frequency
- (2) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

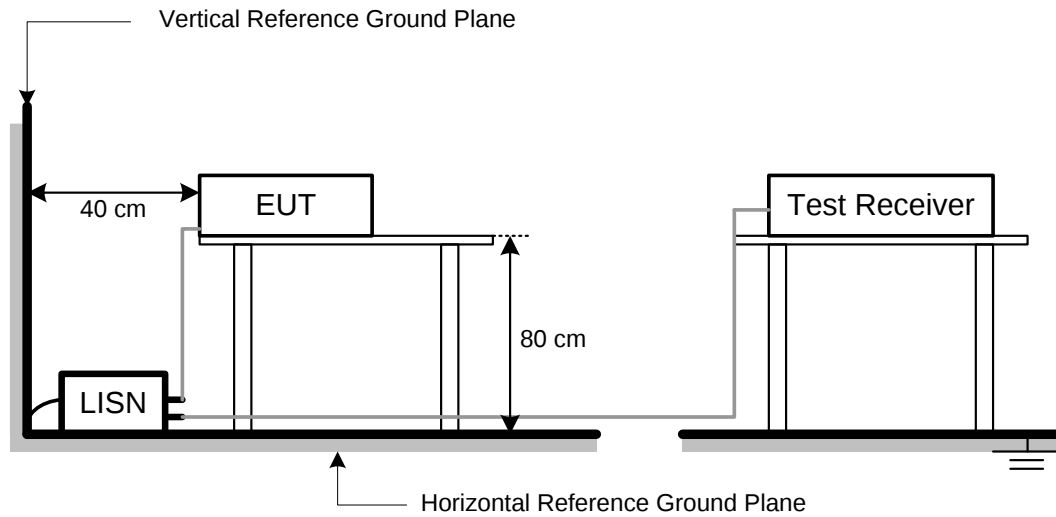

4.1.5 EUT OPERATING CONDITIONS

The EUT was placed on the test table and programmed in normal function.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 m)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 m above the ground at a 3 m semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 m above the ground at a 3 m semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

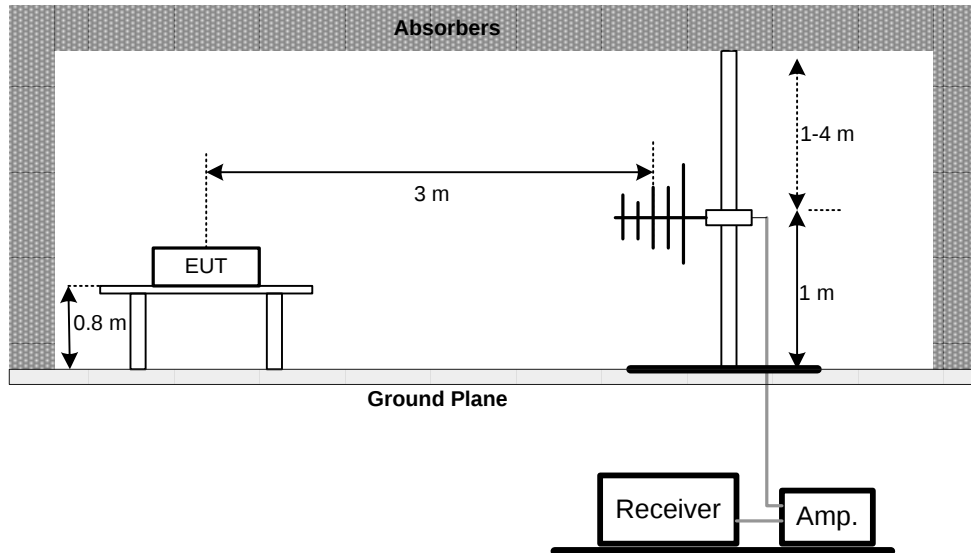

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

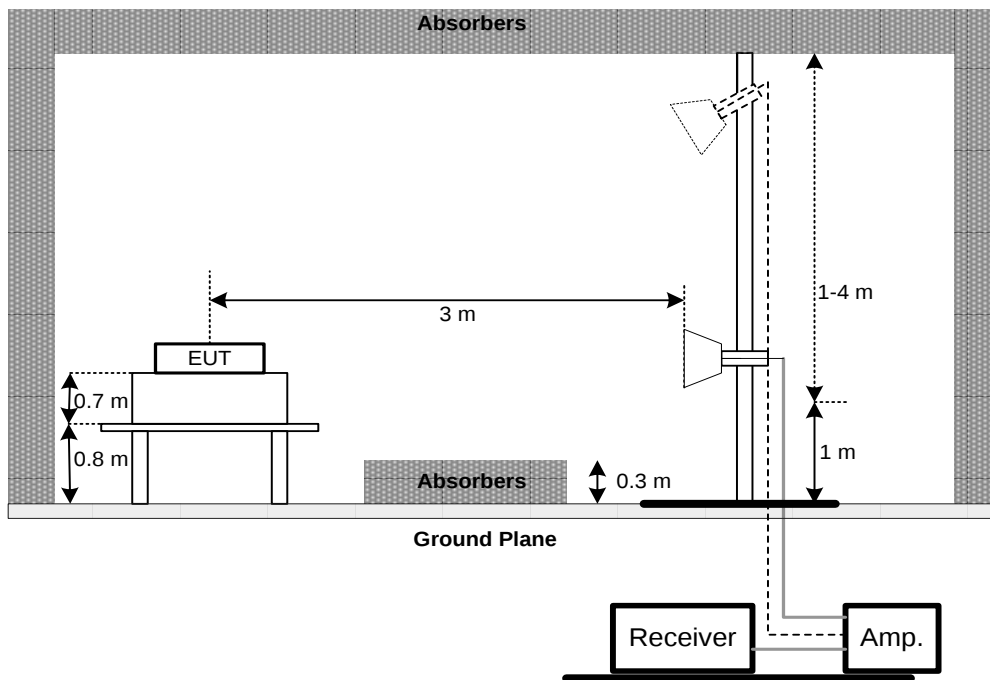

(C) For Radiated Emissions Below 30MHz

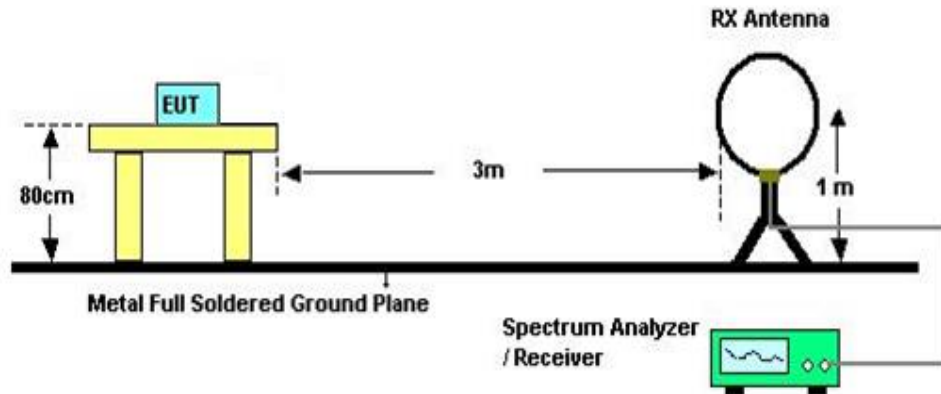

4.2.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C / 23°C Relative Humidity: 45% / 70% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Attachment C.

4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Attachment E.

6. MAXIMUM PEAK CONDUCTED OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 Watt or 30dBm	2400-2483.5	PASS


6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. The maximum peak conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance and FCC KDB 662911 D01 Multiple Transmitter Output.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

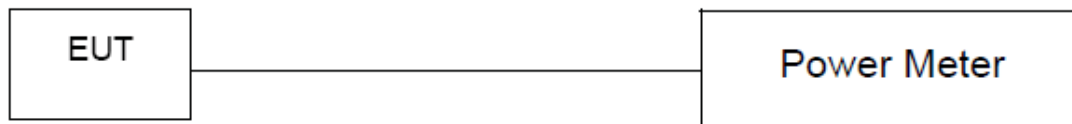

6.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Attachment F.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

7.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.
- Offset=antenna gain+cable loss

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

7.1.6 TEST RESULTS

Please refer to the Attachment G.

8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

8.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW=3KHz, VBW=10KHz, Sweep time = Auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP



8.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Attachment H.

9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	Jan. 25, 2018
2	Test Cable	TIMES	CFD300-NL	C02	Jun. 15, 2017
3	EMI Test Receiver	R&S	ESR7	101433	Dec. 09, 2017
4	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Preamplifier	EMCI	012645B	980267	Feb. 28, 2018
2	Preamplifier	EMCI	EMC02325	980217	Dec. 29, 2017
3	Test Cable	EMCI	EMC104-SM-S M-8000	8m	Jan. 04, 2018
4	Test Cable	EMCI	EMC104-SM-S M-800	150207	Jan. 04, 2018
5	Test Cable	EMCI	EEMC104-SM-S M-3000	151205	Jan. 04, 2018
6	MXE EMI Receiver	Agilent	N9038A	MY55420127	Jan. 09, 2018
7	Signal Analyzer	Agilent	N9010A	MY52220990	Feb. 22, 2018
8	Horn Ant	SCHWARZBECK	BBHA 9120D	9120D-1342	Feb. 28, 2018
9	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-548	Jan. 16, 2018
10	5dB Attenuator	EMCI	EMCI-N-6-05	AT-N0623	Jan. 16, 2018
11	Loop Ant	EMCO	6502	42960	Nov. 24, 2017
12	Horn Ant	Schwarzbeck	BBHA 9170	187	May 11, 2018

6dB Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	R&S/FSP30	100854	May 25, 2018

Peak Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	R&S/FSP30	100854	May 25, 2018
2	Power Meter	Anritsu	ML2495A	1128008	Aug. 17, 2017
3	Power Sensor	Anritsu	MA2411B	1126001	Aug. 17, 2017


Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	R&S/FSP30	100854	May 25, 2018

Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	R&S/FSP30	100854	May 25, 2018


Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

10. EUT TEST PHOTO



Conducted Measurement Photos

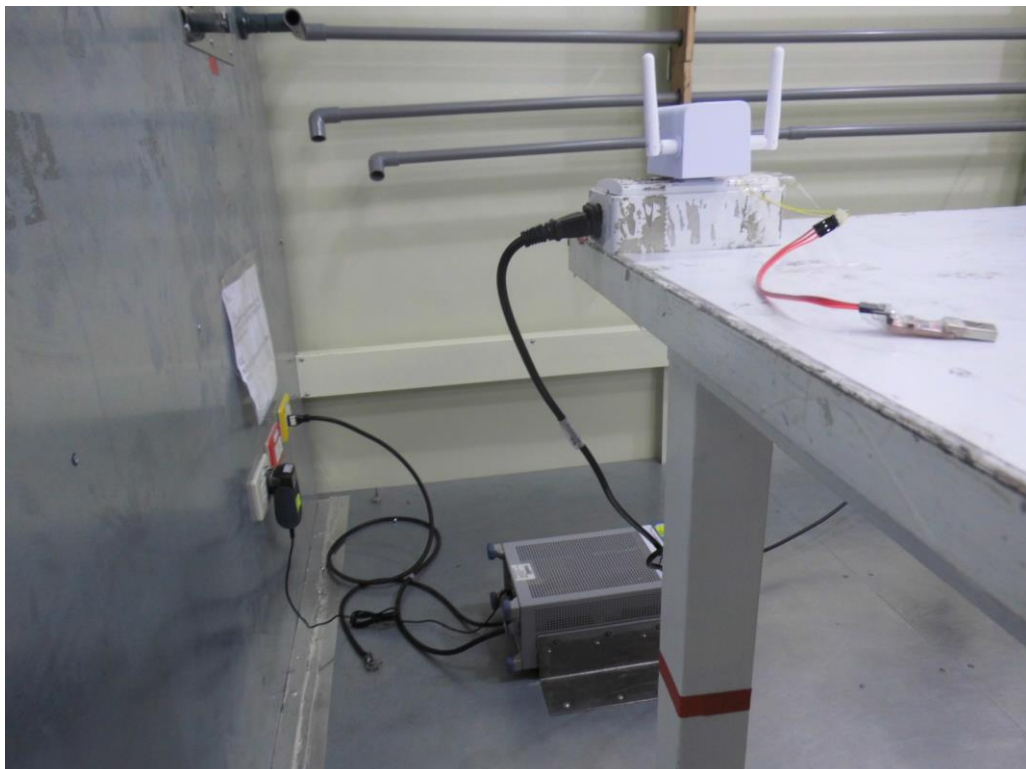

Radiated Measurement Photos 9KHz to 30MHz

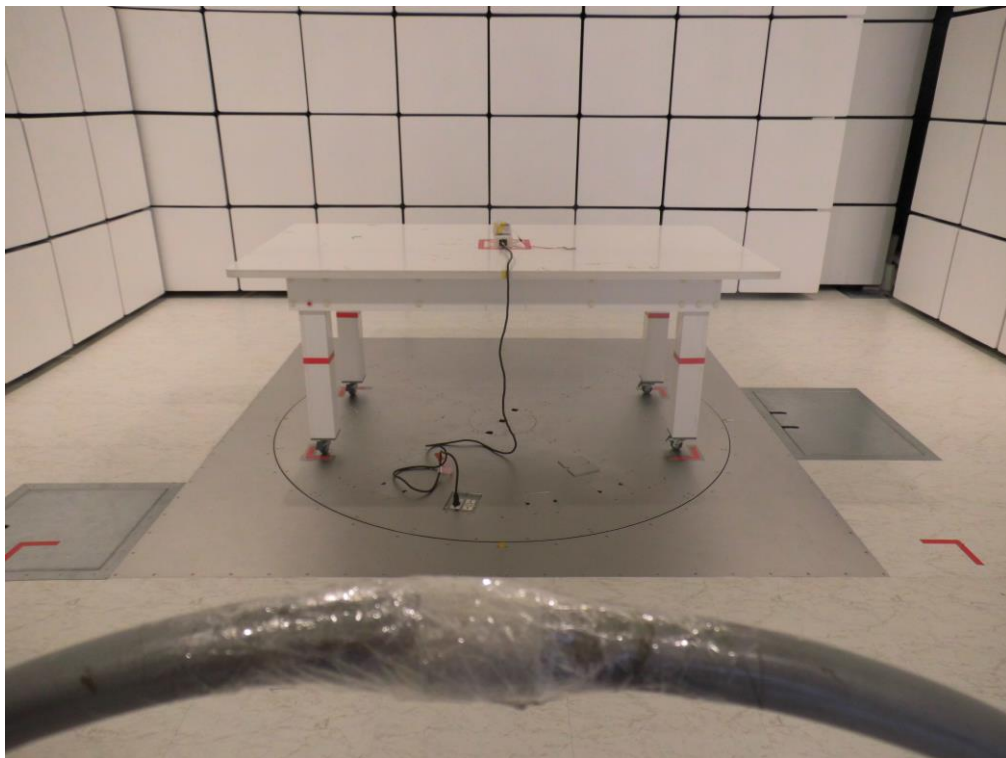

Radiated Measurement Photos 30MHz to 1000MHz

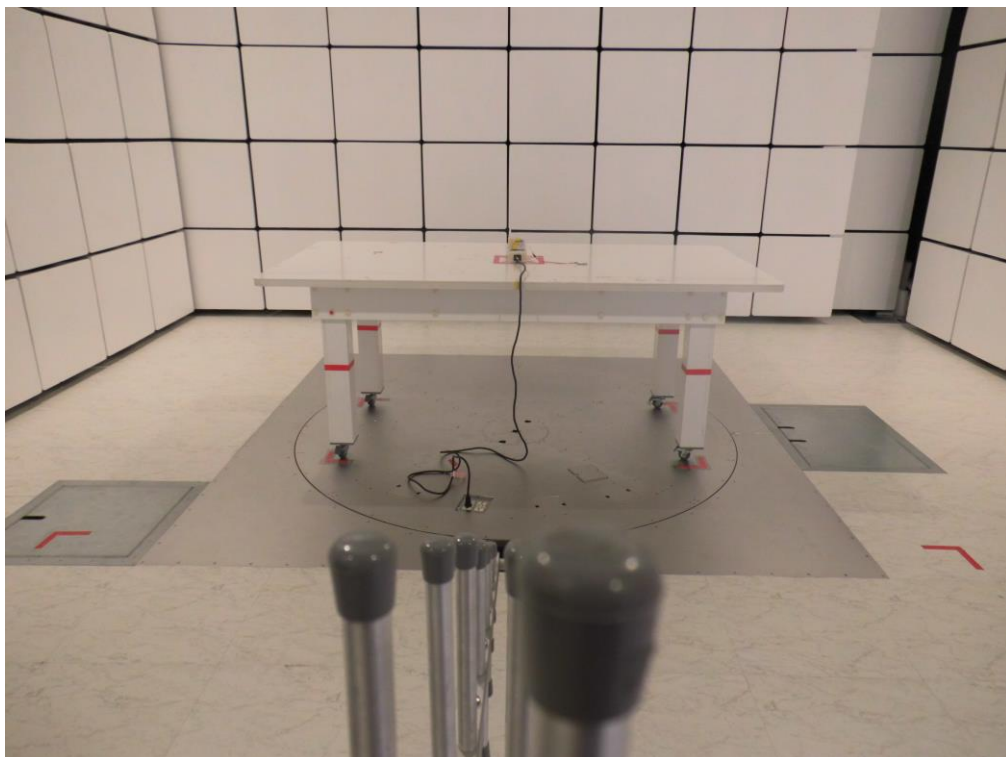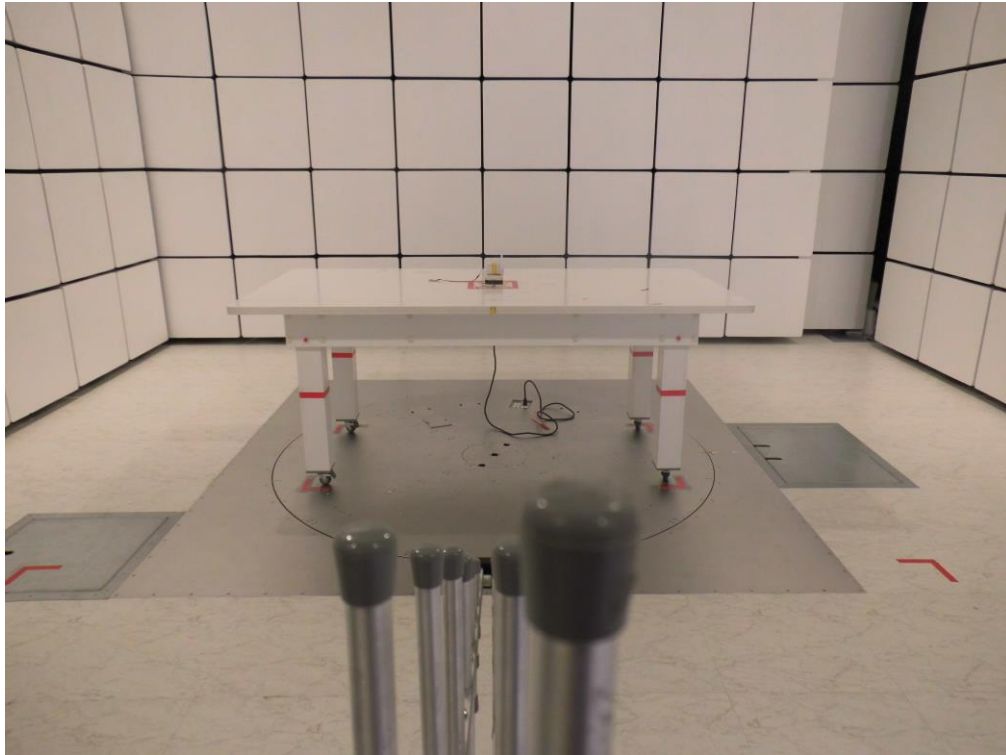


**Radiated Measurement Photos
Above 1000MHz**



ATTACHMENT A - CONDUCTED EMISSION

Test Mode : Normal Link


Line

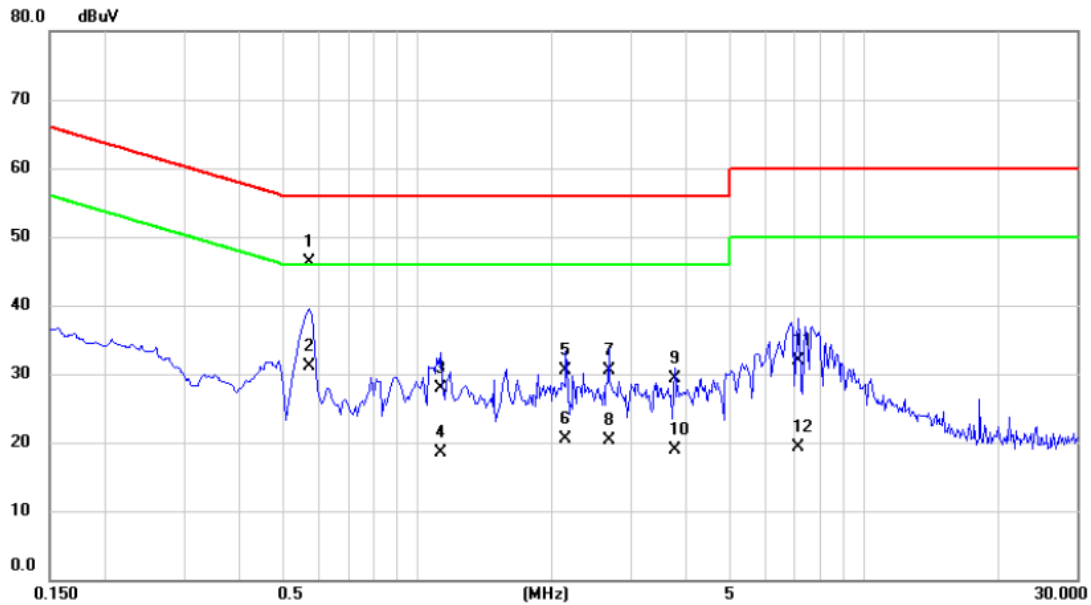

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.5720	36.50	9.77	46.27	56.00	-9.73	QP	
2		0.5720	21.40	9.77	31.17	46.00	-14.83	AVG	
3		1.1300	18.20	9.80	28.00	56.00	-28.00	QP	
4		1.1300	8.70	9.80	18.50	46.00	-27.50	AVG	
5		2.1470	20.70	9.83	30.53	56.00	-25.47	QP	
6		2.1470	10.70	9.83	20.53	46.00	-25.47	AVG	
7		2.6870	20.70	9.84	30.54	56.00	-25.46	QP	
8		2.6870	10.40	9.84	20.24	46.00	-25.76	AVG	
9		3.7670	19.50	9.86	29.36	56.00	-26.64	QP	
10		3.7670	9.00	9.86	18.86	46.00	-27.14	AVG	
11		7.1000	21.90	9.93	31.83	60.00	-28.17	QP	
12		7.1000	9.40	9.93	19.33	50.00	-30.67	AVG	

Test Mode : Normal Link

Neutral

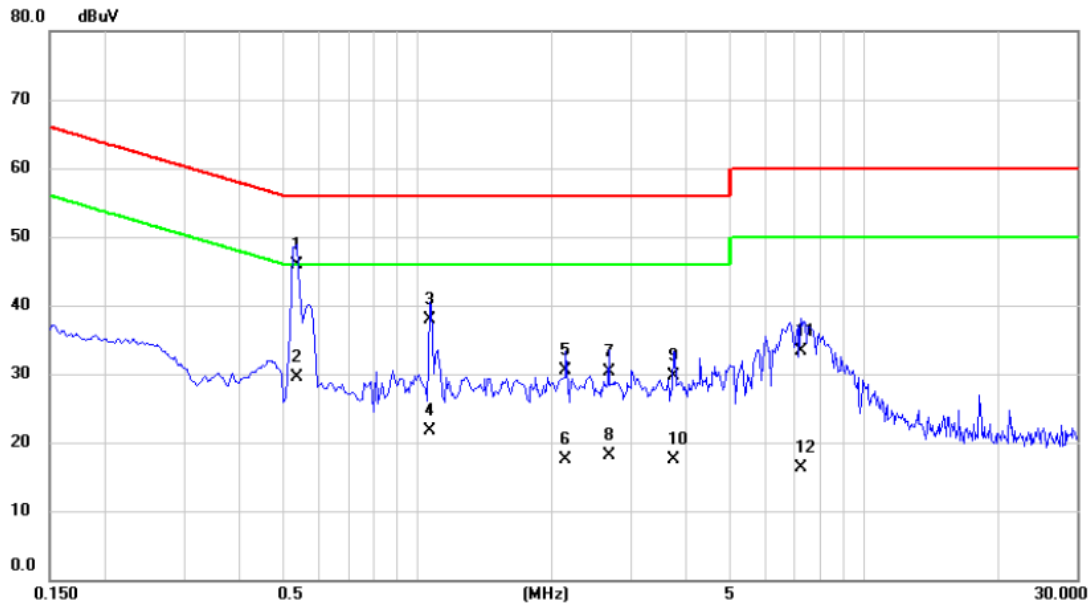


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.5360	36.30	9.70	46.00	56.00	-10.00	QP	
2		0.5360	19.90	9.70	29.60	46.00	-16.40	AVG	
3		1.0670	28.20	9.75	37.95	56.00	-18.05	QP	
4		1.0670	12.00	9.75	21.75	46.00	-24.25	AVG	
5		2.1470	20.80	9.77	30.57	56.00	-25.43	QP	
6		2.1470	7.70	9.77	17.47	46.00	-28.53	AVG	
7		2.6870	20.50	9.79	30.29	56.00	-25.71	QP	
8		2.6870	8.40	9.79	18.19	46.00	-27.81	AVG	
9		3.7580	19.80	9.82	29.62	56.00	-26.38	QP	
10		3.7580	7.70	9.82	17.52	46.00	-28.48	AVG	
11		7.2500	23.40	9.91	33.31	60.00	-26.69	QP	
12		7.2500	6.40	9.91	16.31	50.00	-33.69	AVG	

ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode:	TX B MODE CHANNEL 01
------------	----------------------


Ant 0°

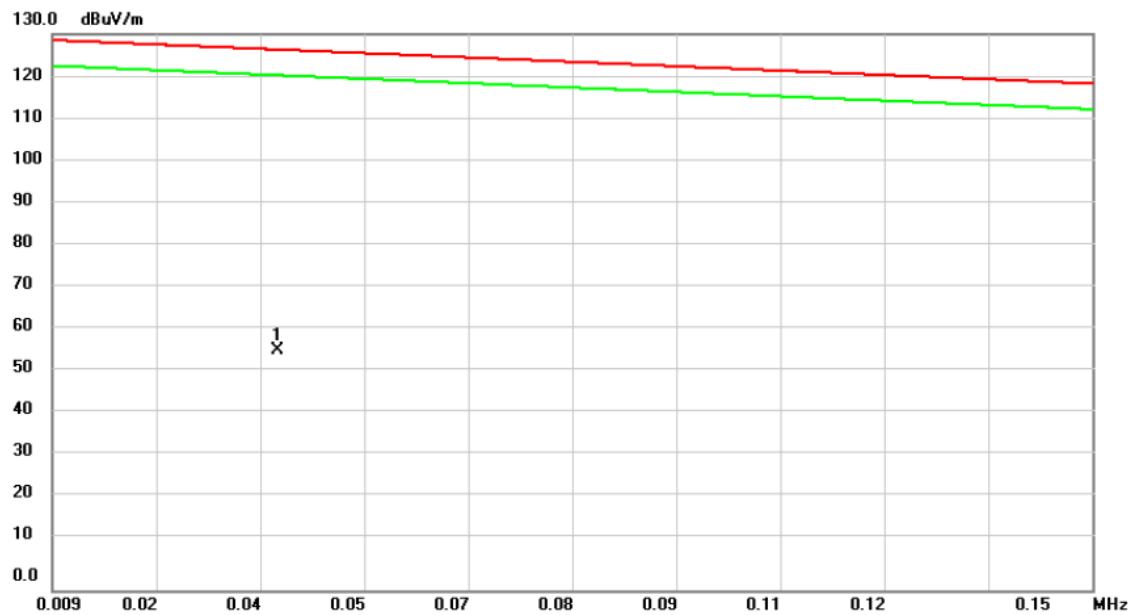

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0395	42.02	14.05	56.07	126.32	-70.25	peak	

Test Mode: TX B MODE CHANNEL 01


Ant 0°

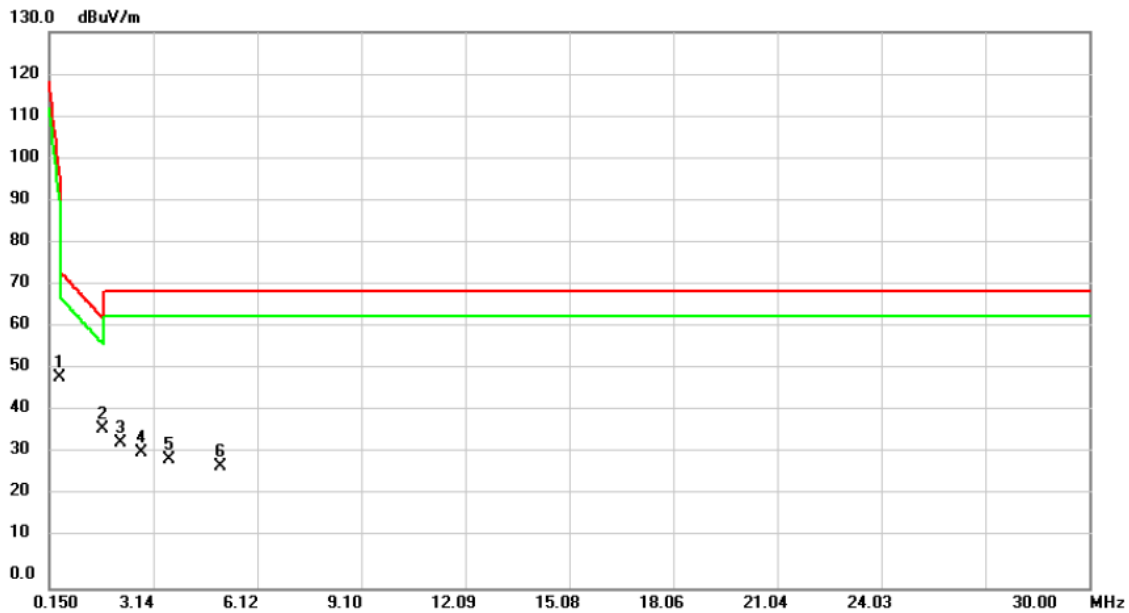

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.4485	37.41	11.80	49.21	96.80	-47.59	peak	
2	*	1.7020	25.41	11.68	37.09	63.00	-25.91	peak	
3		2.2096	22.66	11.46	34.12	69.54	-35.42	peak	
4		2.8065	20.46	11.19	31.65	69.54	-37.89	peak	
5		3.5825	18.91	11.19	30.10	69.54	-39.44	peak	
6		5.0750	16.98	11.40	28.38	69.54	-41.16	peak	

Test Mode:	TX B MODE CHANNEL 01
------------	----------------------


Ant 90°

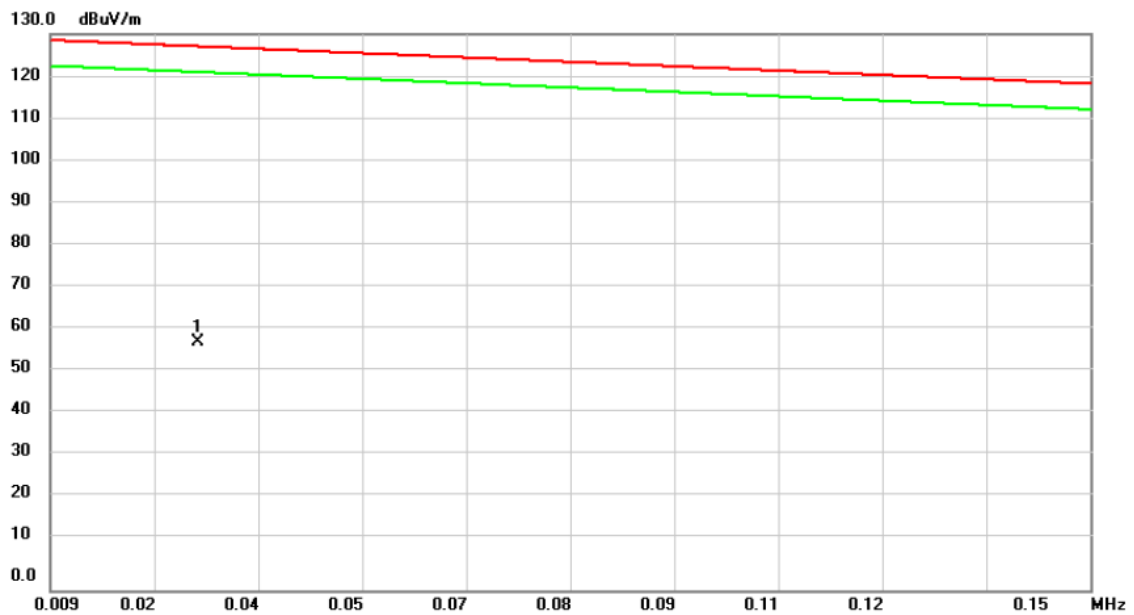

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0290	42.82	15.27	58.09	127.08	-68.99	peak	

Test Mode: TX B MODE CHANNEL 01

Ant 90°

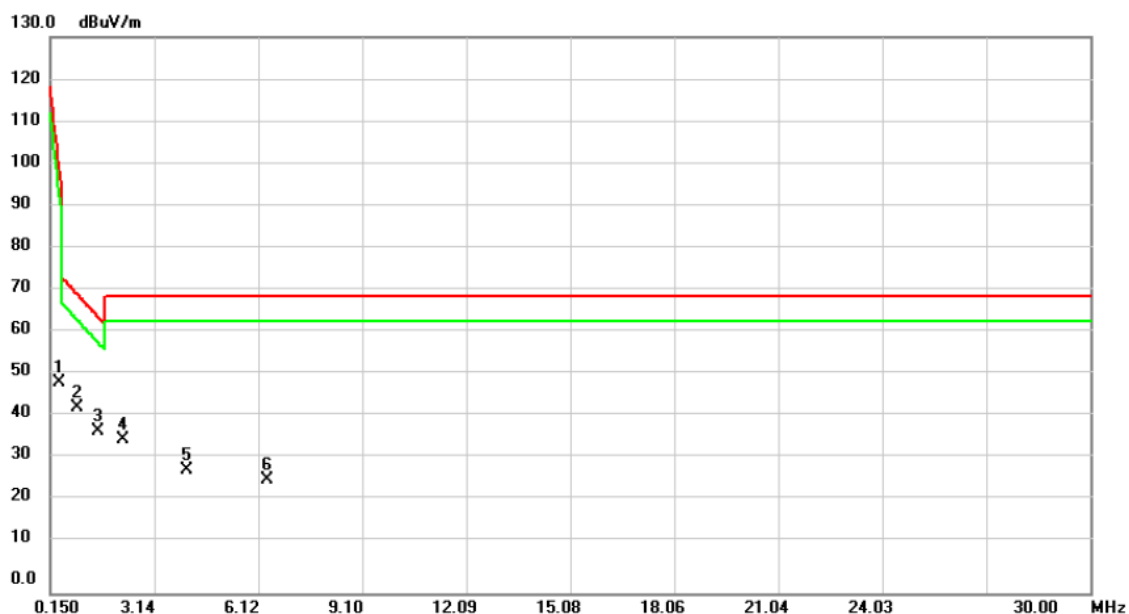


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.4187	37.60	11.80	49.40	98.95	-49.55	peak	
2	*	0.9261	31.48	11.97	43.45	69.91	-26.46	peak	
3		1.5230	26.24	11.76	38.00	64.59	-26.59	peak	
4		2.2395	24.62	11.44	36.06	69.54	-33.48	peak	
5		4.0602	17.63	11.26	28.89	69.54	-40.65	peak	
6		6.3887	15.28	11.37	26.65	69.54	-42.89	peak	

ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: TX N-20M MODE 2412MHz


Vertical

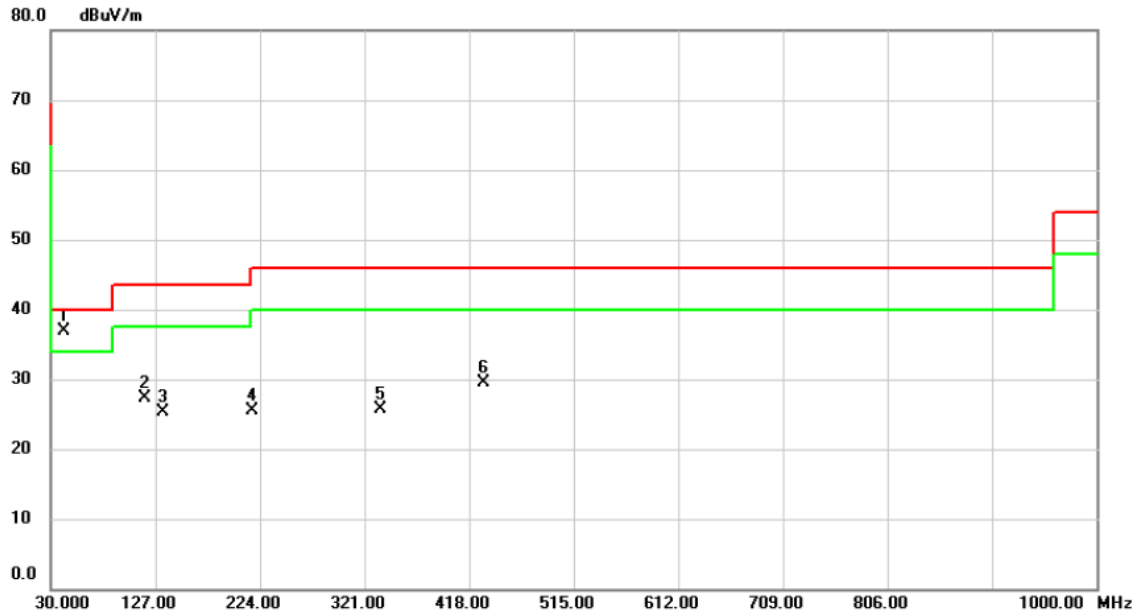

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	42.6100	45.39	-8.54	36.85	40.00	-3.15	peak	
2		117.3000	37.59	-10.33	27.26	43.50	-16.24	peak	
3		133.7900	34.82	-9.42	25.40	43.50	-18.10	peak	
4		216.2400	36.45	-10.87	25.58	46.00	-20.42	peak	
5		335.5500	32.32	-6.61	25.71	46.00	-20.29	peak	
6		431.5800	33.54	-4.07	29.47	46.00	-16.53	peak	

Test Mode: TX N-20M MODE 2412MHz

Horizontal

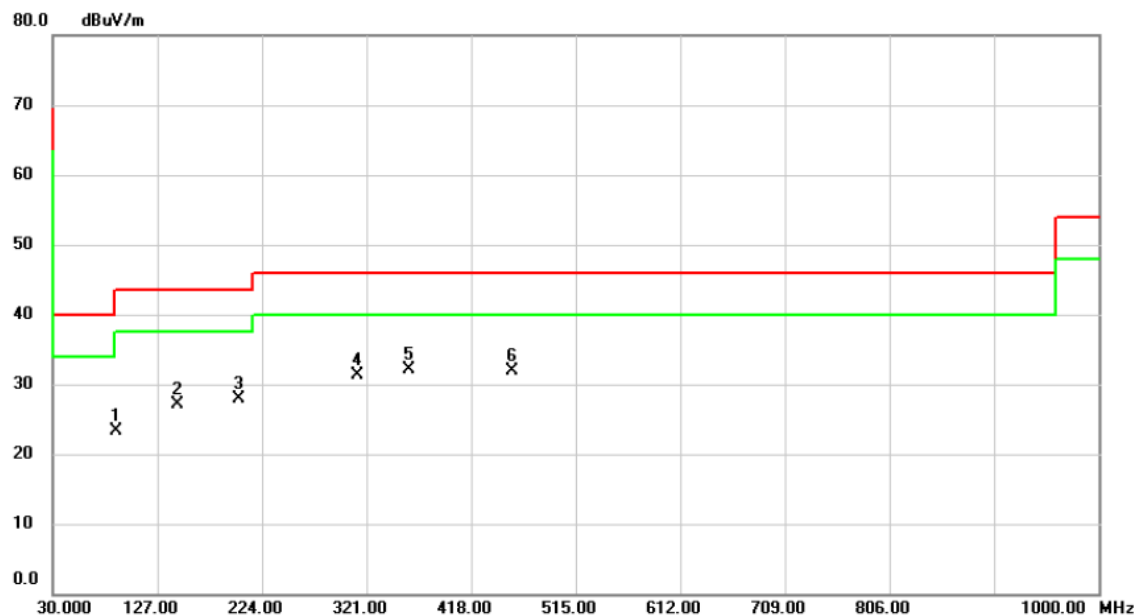


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		89.1700	36.40	-13.11	23.29	43.50	-20.21	peak	
2		145.4300	36.12	-9.05	27.07	43.50	-16.43	peak	
3		202.6600	38.63	-10.72	27.91	43.50	-15.59	peak	
4		312.2700	38.49	-7.18	31.31	46.00	-14.69	peak	
5	*	359.8000	38.04	-5.98	32.06	46.00	-13.94	peak	
6		455.8300	35.40	-3.46	31.94	46.00	-14.06	peak	

ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz


Vertical

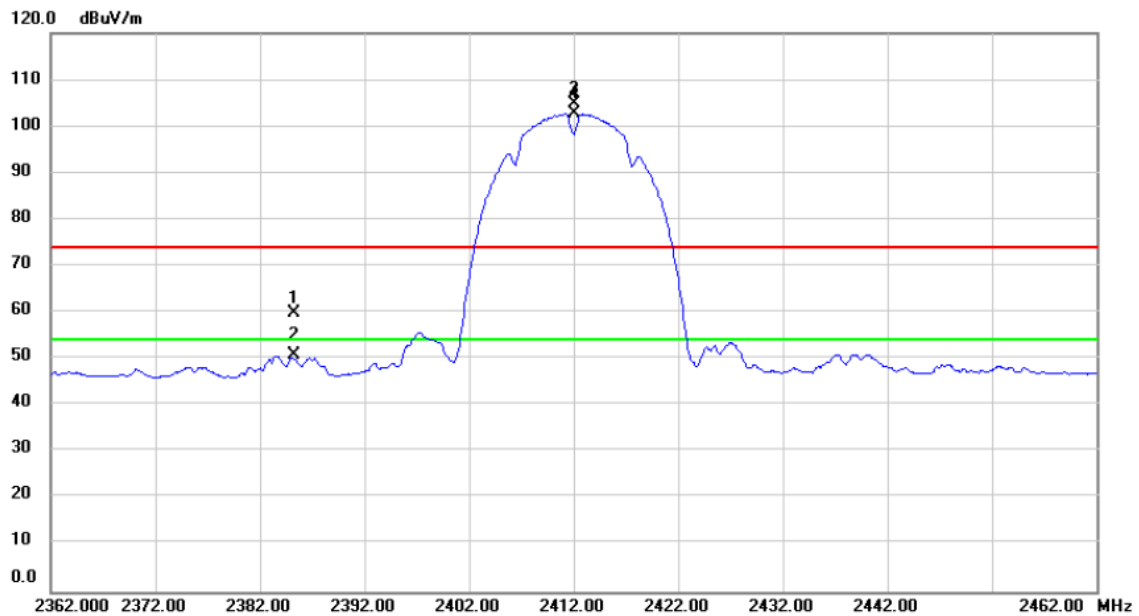

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2385.268	28.84	31.05	59.89	74.00	-14.11	peak	
2		2385.268	19.84	31.05	50.89	54.00	-3.11	AVG	
3	X	2412.000	73.62	31.14	104.76	74.00	30.76	peak	No Limit
4	*	2412.000	71.51	31.14	102.65	54.00	48.65	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz


Vertical

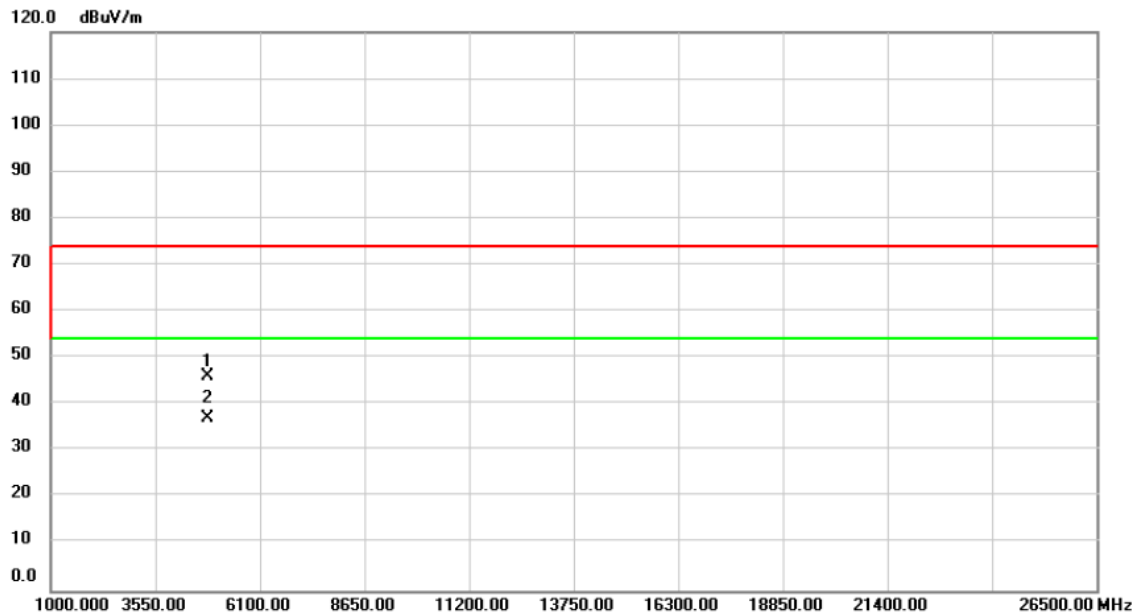

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4824.000	57.40	-11.37	46.03	74.00	-27.97	peak	
2	*	4824.000	48.32	-11.37	36.95	54.00	-17.05	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz


Horizontal

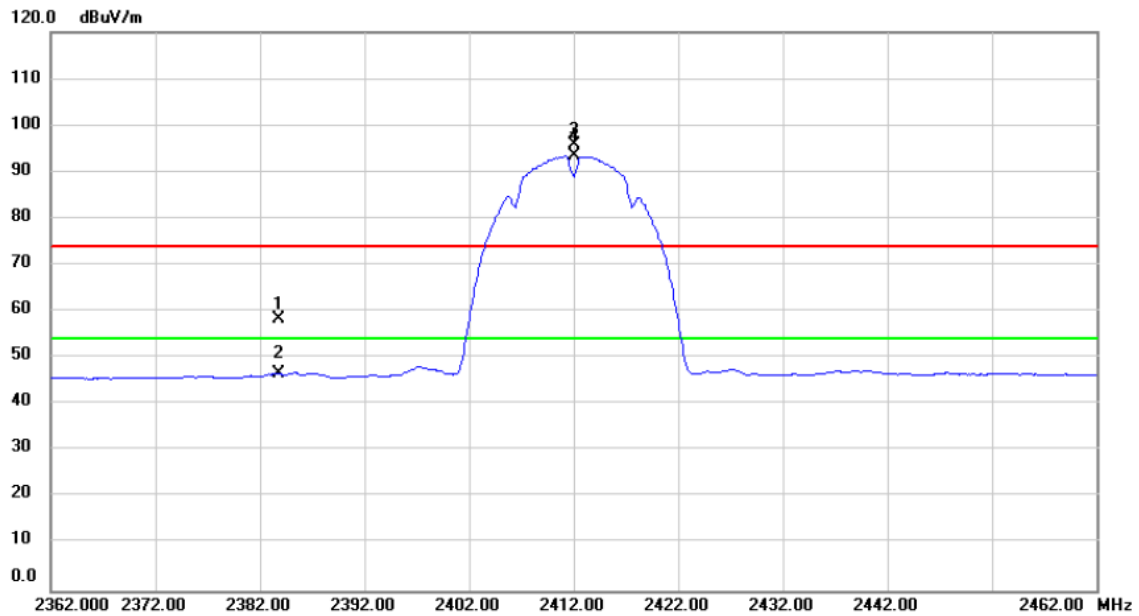

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2383.756	27.32	31.04	58.36	74.00	-15.64	peak	
2		2383.756	15.70	31.04	46.74	54.00	-7.26	AVG	
3	X	2412.000	64.58	31.14	95.72	74.00	21.72	peak	No Limit
4	*	2412.000	62.23	31.14	93.37	54.00	39.37	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz


Horizontal

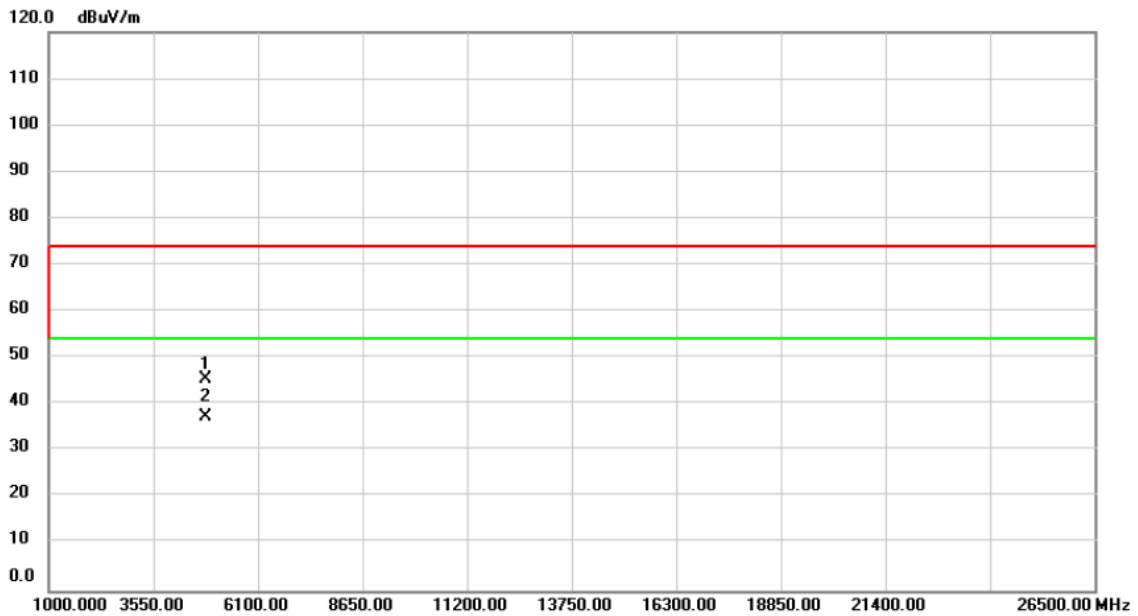

No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	4824.000	56.96	-11.37	45.59	74.00	-28.41	peak	
2 *	4824.000	48.75	-11.37	37.38	54.00	-16.62	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz


Vertical

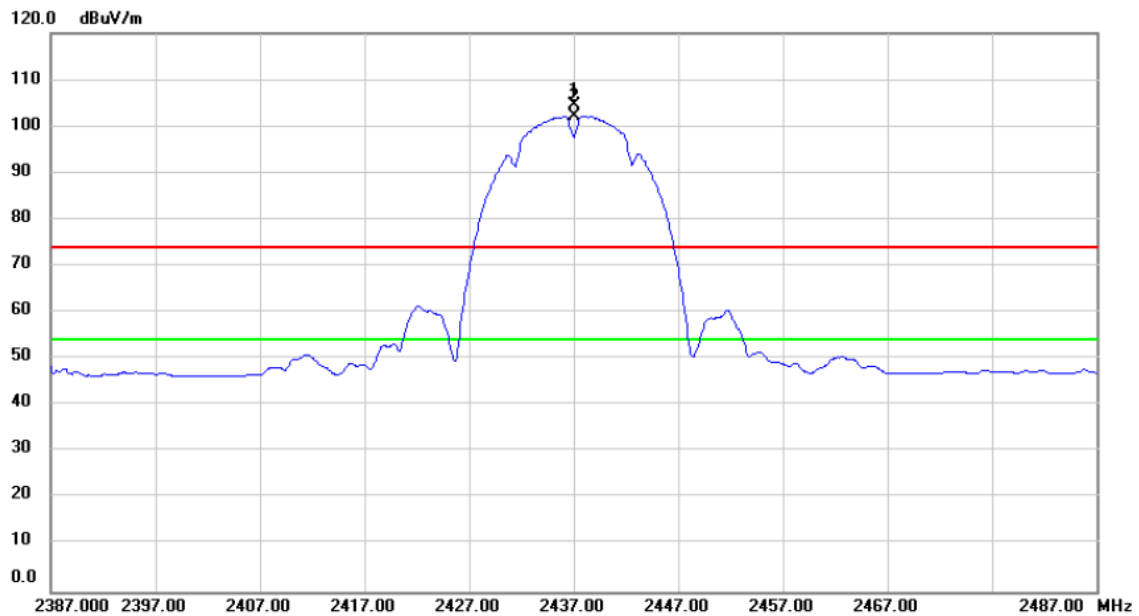

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2437.000	73.30	31.23	104.53	74.00	30.53	peak	No Limit
2	*	2437.000	70.98	31.23	102.21	54.00	48.21	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz


Vertical

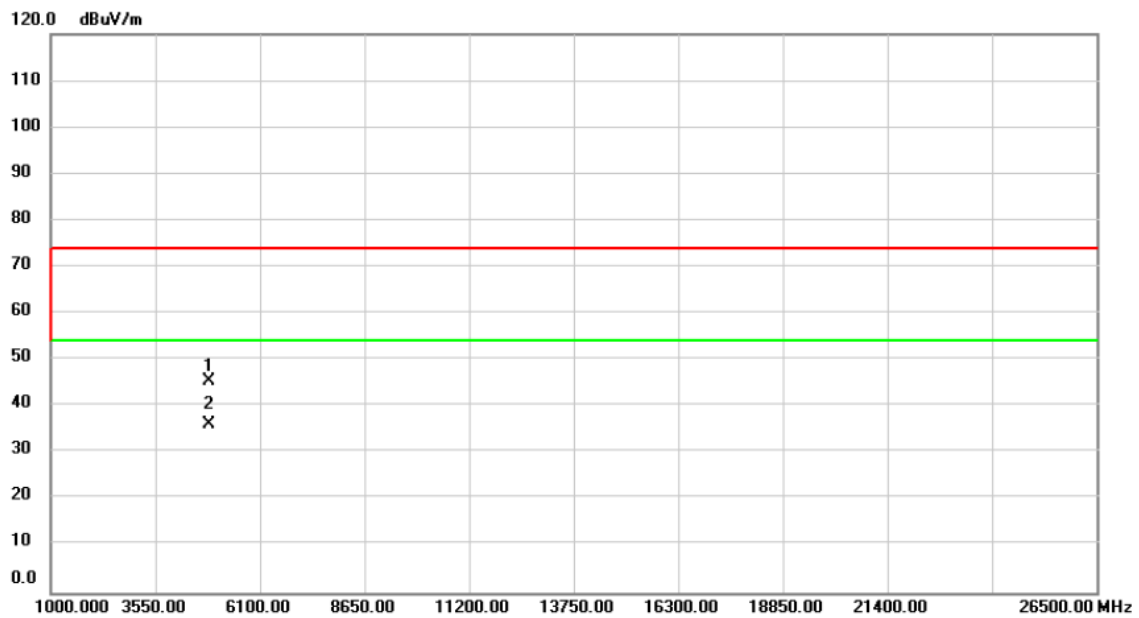

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4874.000	56.80	-11.29	45.51	74.00	-28.49	peak	
2	*	4874.000	47.44	-11.29	36.15	54.00	-17.85	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz


Horizontal

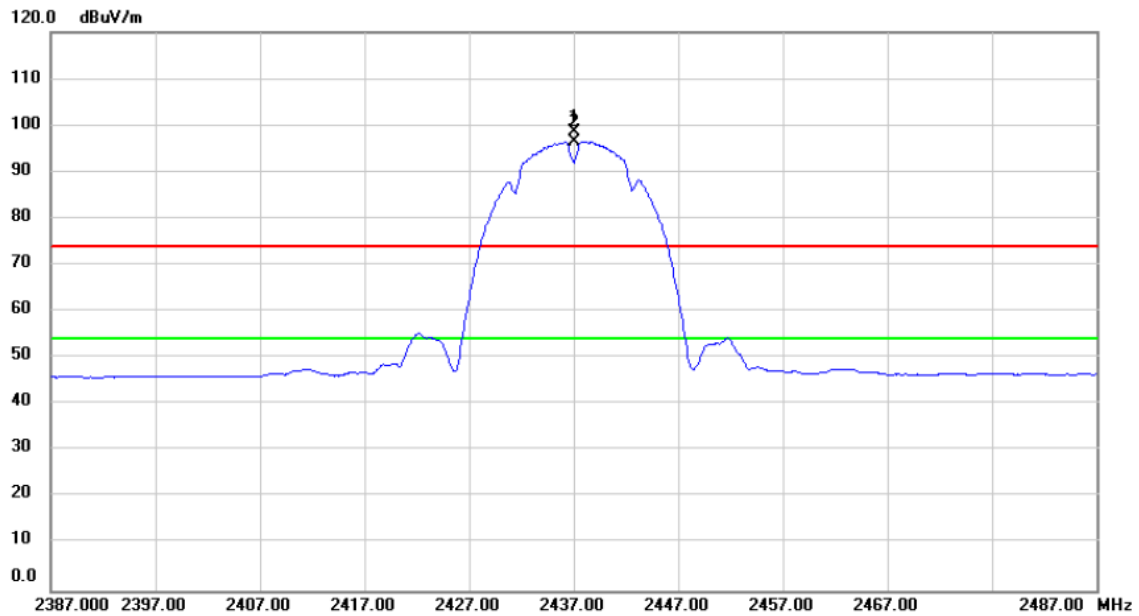

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2437.000	67.44	31.23	98.67	74.00	24.67	peak	No Limit
2	*	2437.000	65.21	31.23	96.44	54.00	42.44	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz


Horizontal

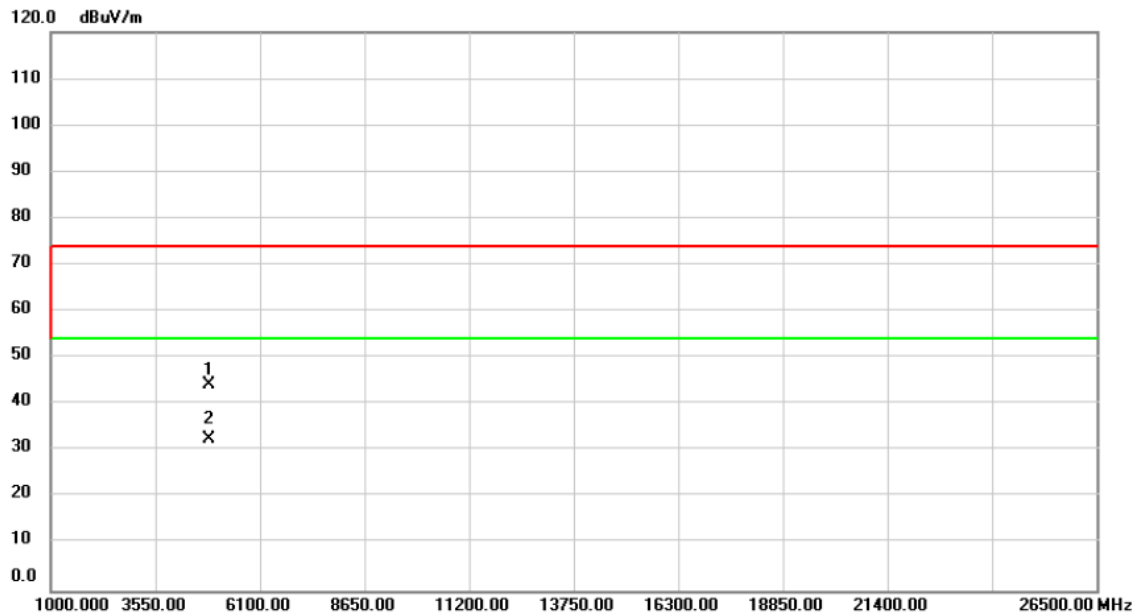

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4874.000	55.64	-11.29	44.35	74.00	-29.65	peak	
2	*	4874.000	43.71	-11.29	32.42	54.00	-21.58	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz


Vertical

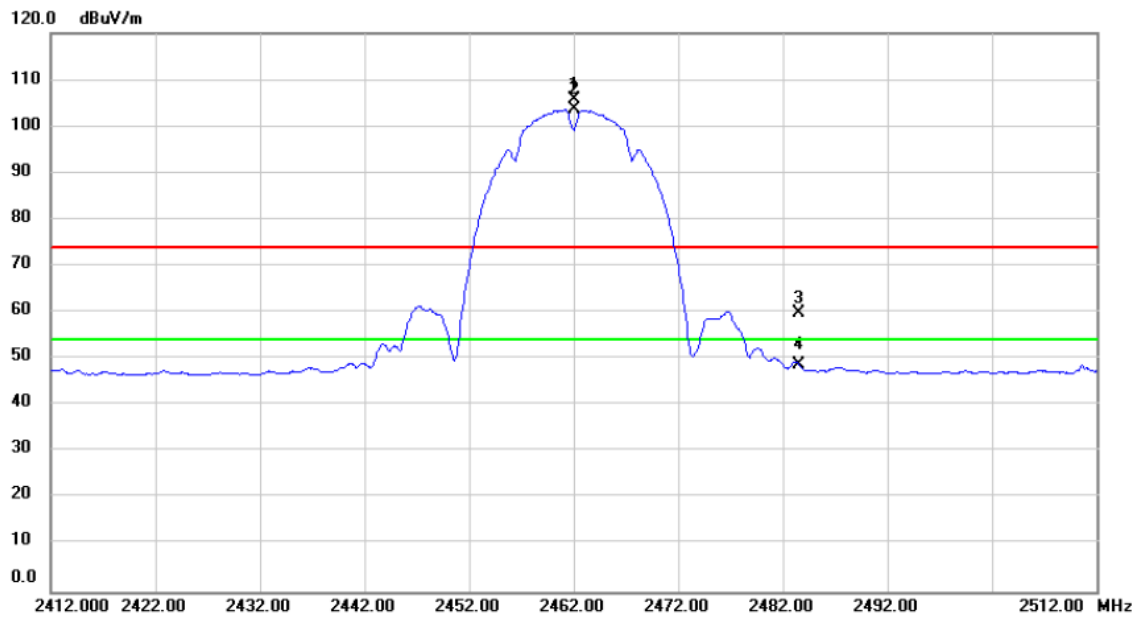

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2462.000	74.44	31.33	105.77	74.00	31.77	peak	No Limit
2	*	2462.000	72.24	31.33	103.57	54.00	49.57	AVG	No Limit
3		2483.500	28.36	31.41	59.77	74.00	-14.23	peak	
4		2483.500	17.49	31.41	48.90	54.00	-5.10	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz


Vertical

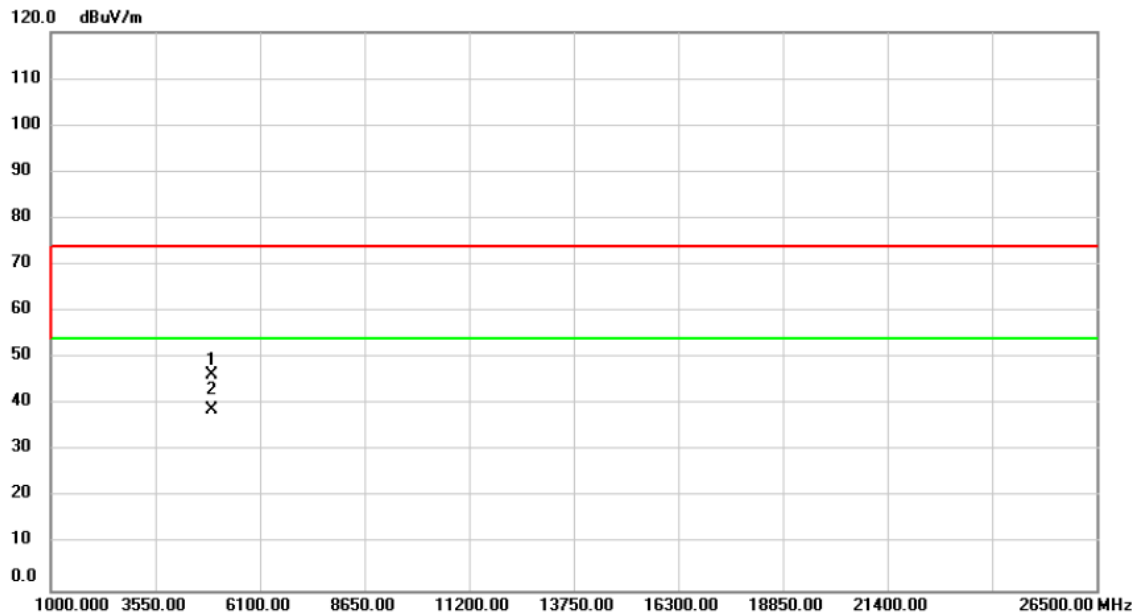

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4924.000	57.51	-11.22	46.29	74.00	-27.71	peak	
2	*	4924.000	49.93	-11.22	38.71	54.00	-15.29	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz


Horizontal

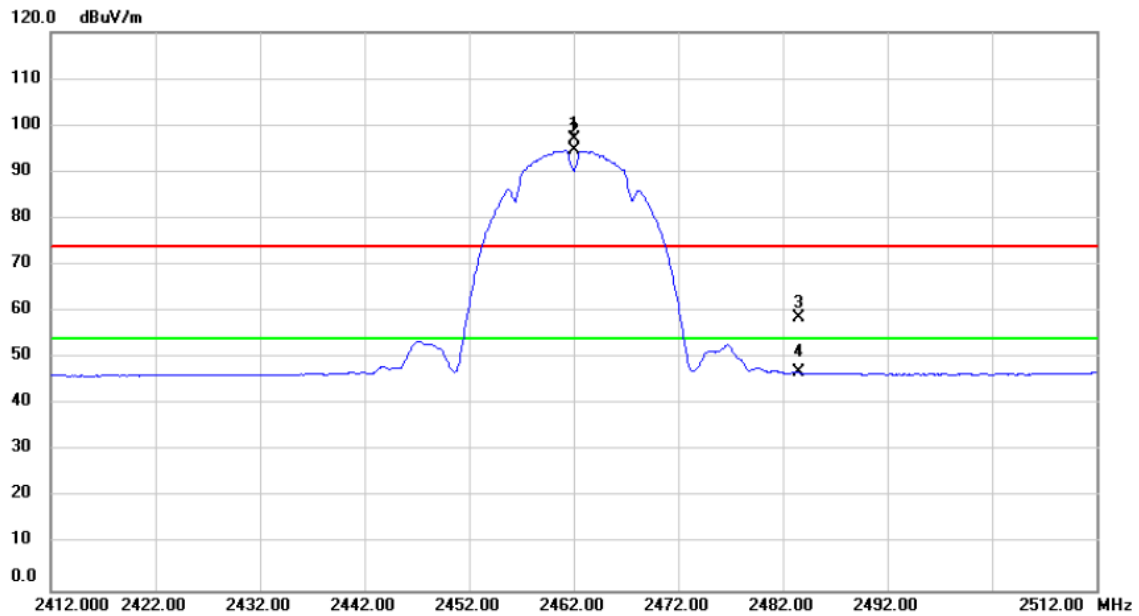

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2462.000	65.63	31.33	96.96	74.00	22.96	peak	No Limit
2	*	2462.000	63.28	31.33	94.61	54.00	40.61	AVG	No Limit
3		2483.500	27.18	31.41	58.59	74.00	-15.41	peak	
4		2483.500	15.48	31.41	46.89	54.00	-7.11	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz


Horizontal

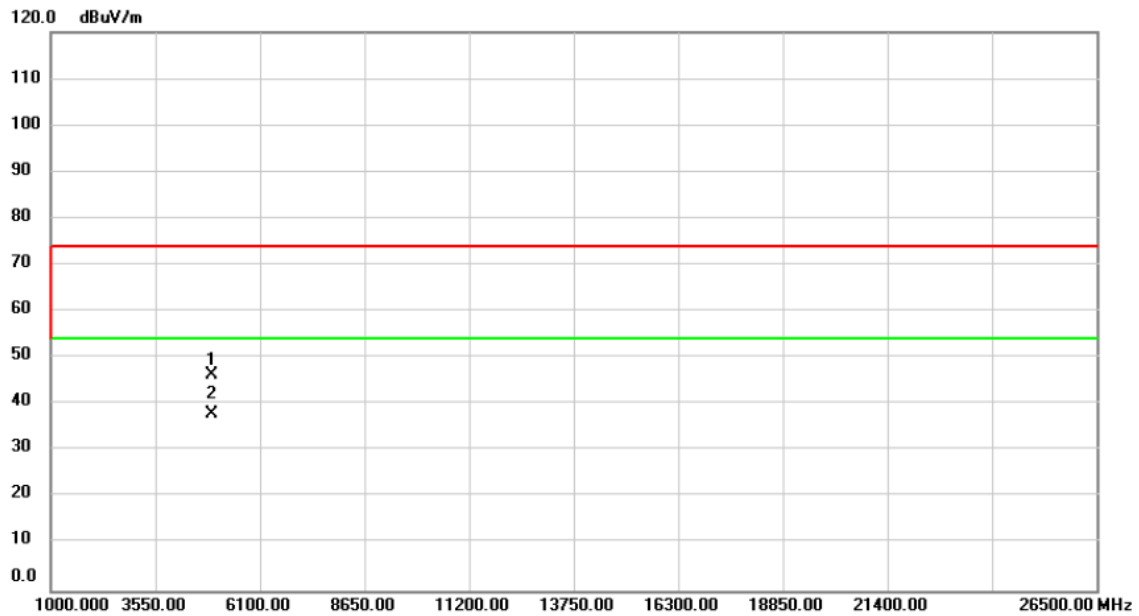

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4924.000	57.46	-11.22	46.24	74.00	-27.76	peak	
2	*	4924.000	49.08	-11.22	37.86	54.00	-16.14	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz


Vertical

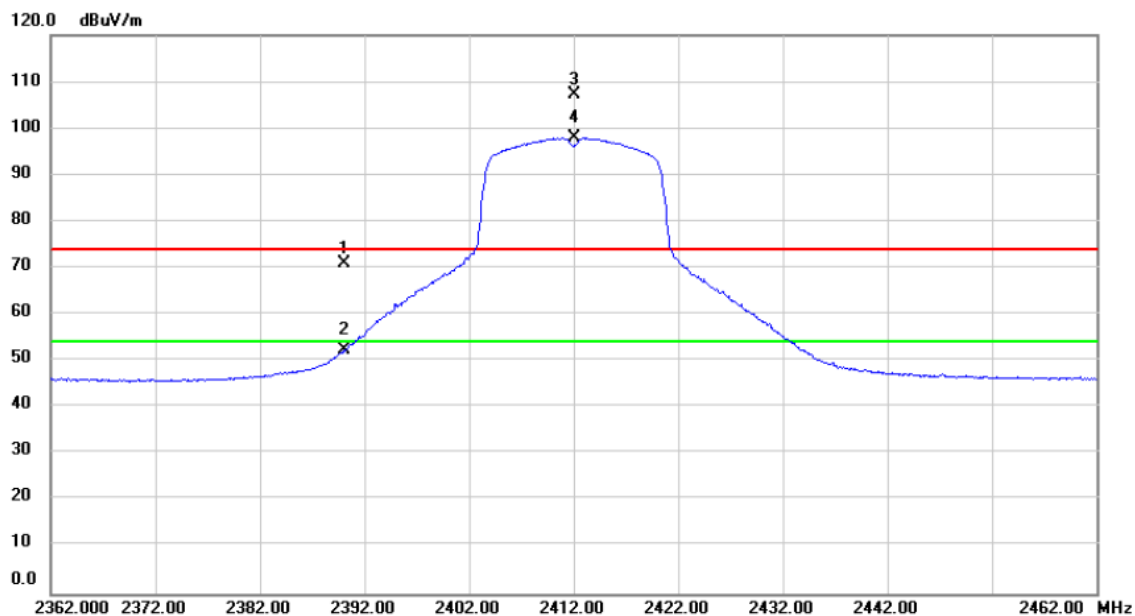

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	39.86	31.06	70.92	74.00	-3.08	peak	
2		2390.000	21.18	31.06	52.24	54.00	-1.76	AVG	
3	X	2412.000	76.08	31.14	107.22	74.00	33.22	peak	No Limit
4	*	2412.000	66.79	31.14	97.93	54.00	43.93	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz


Vertical

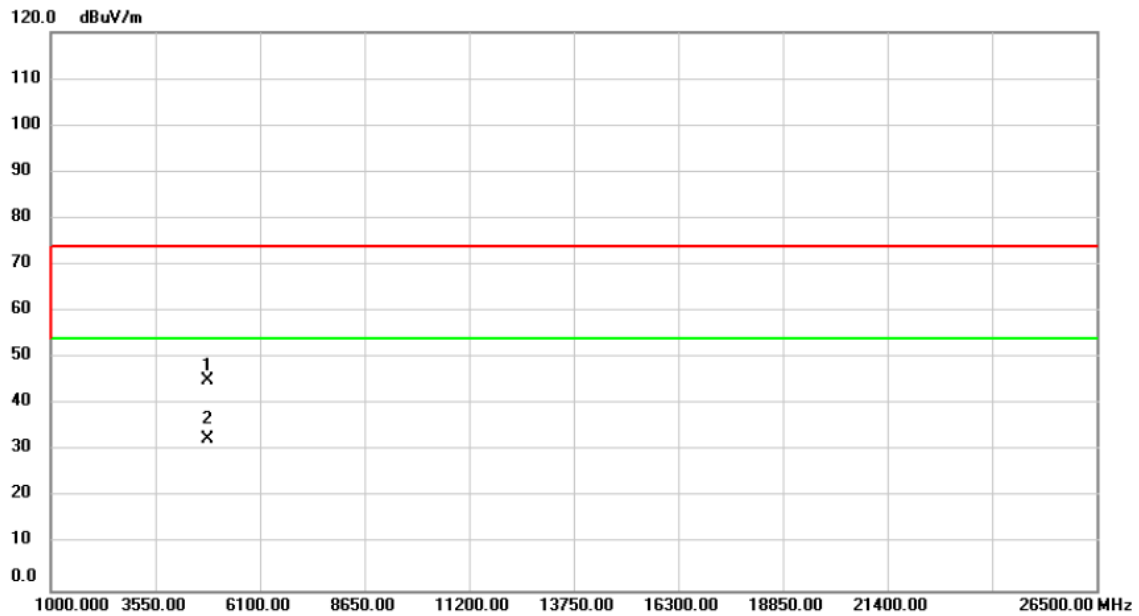

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4824.000	56.60	-11.37	45.23	74.00	-28.77	peak	
2	*	4824.000	44.04	-11.37	32.67	54.00	-21.33	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz


Horizontal

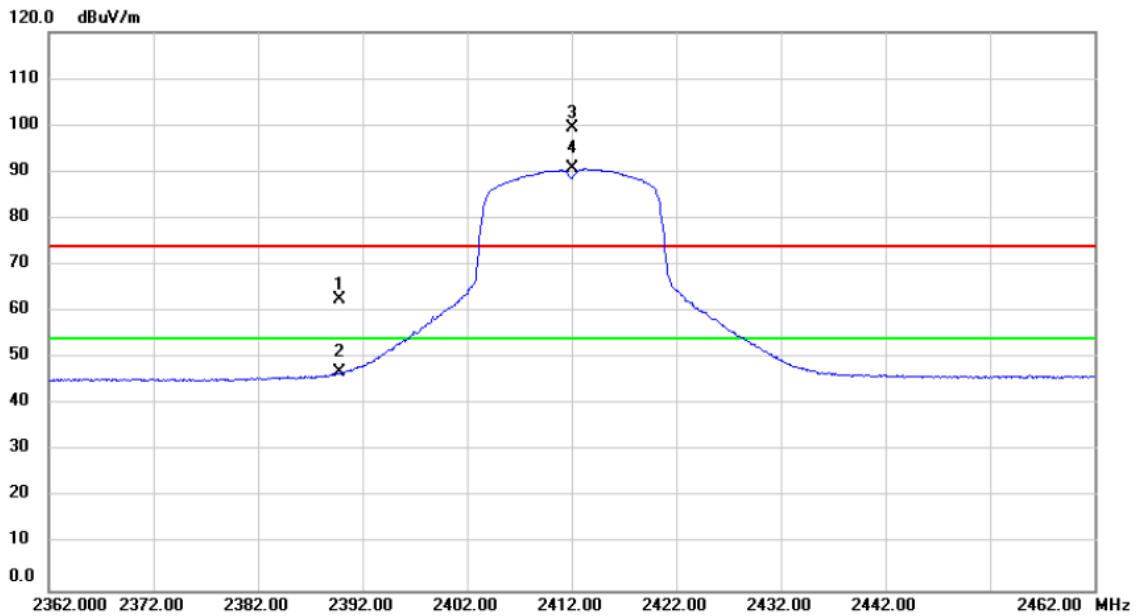

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2389.860	31.62	31.06	62.68	74.00	-11.32	peak	
2		2389.860	15.93	31.06	46.99	54.00	-7.01	AVG	
3	X	2412.000	68.46	31.14	99.60	74.00	25.60	peak	No Limit
4	*	2412.000	59.50	31.14	90.64	54.00	36.64	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz


Horizontal

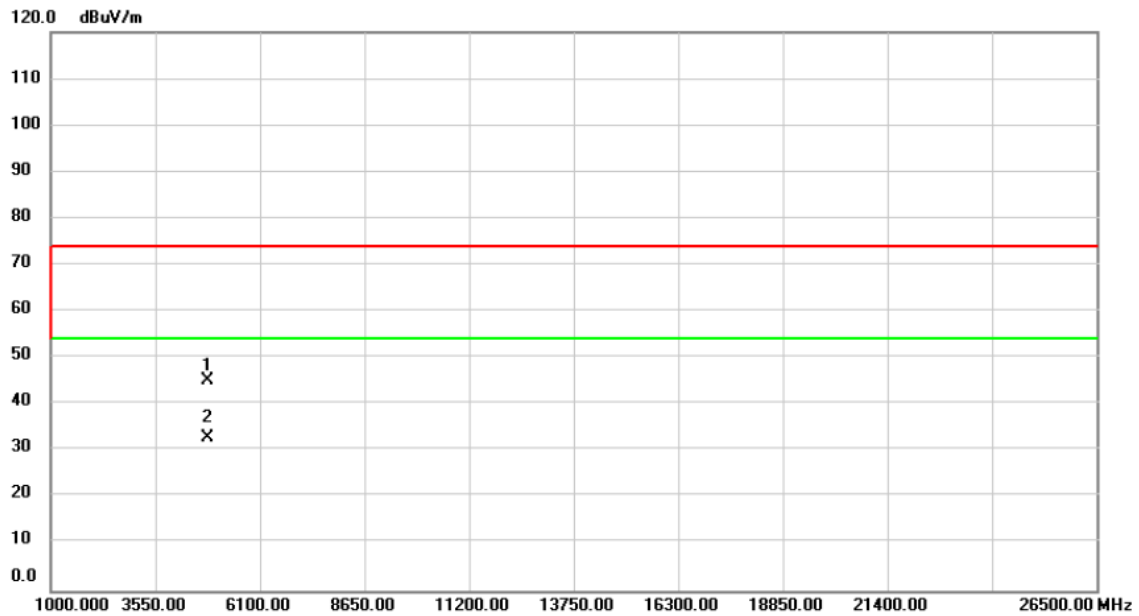

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	4824.000	56.40	-11.37	45.03	74.00	-28.97	peak	
2 *	4824.000	44.11	-11.37	32.74	54.00	-21.26	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz


Vertical

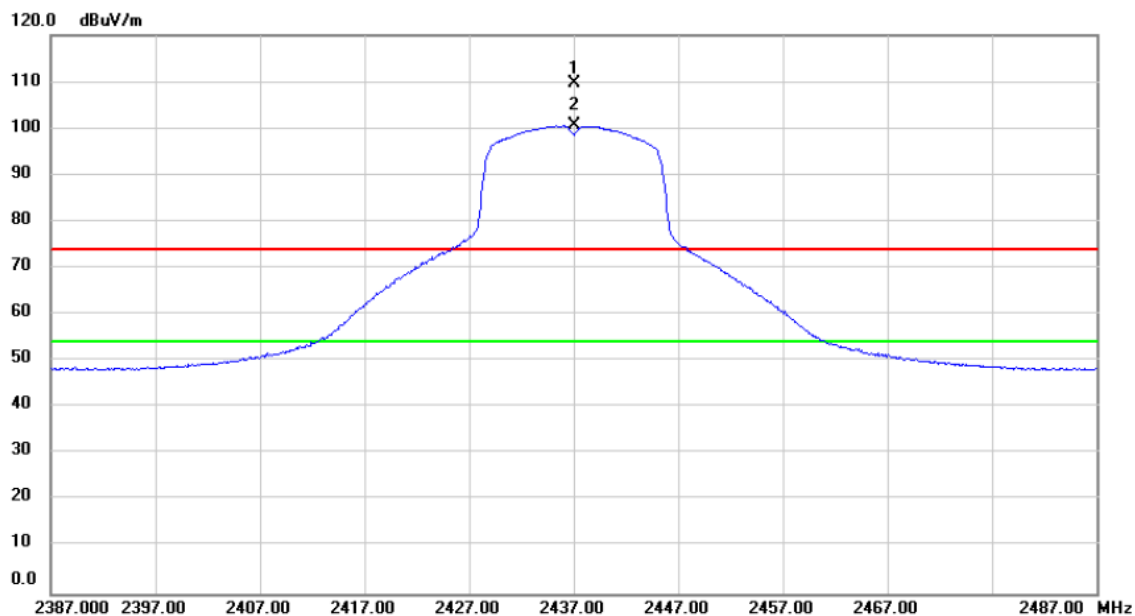

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2437.000	78.34	31.23	109.57	74.00	35.57	peak	No Limit
2	*	2437.000	69.34	31.23	100.57	54.00	46.57	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz


Vertical

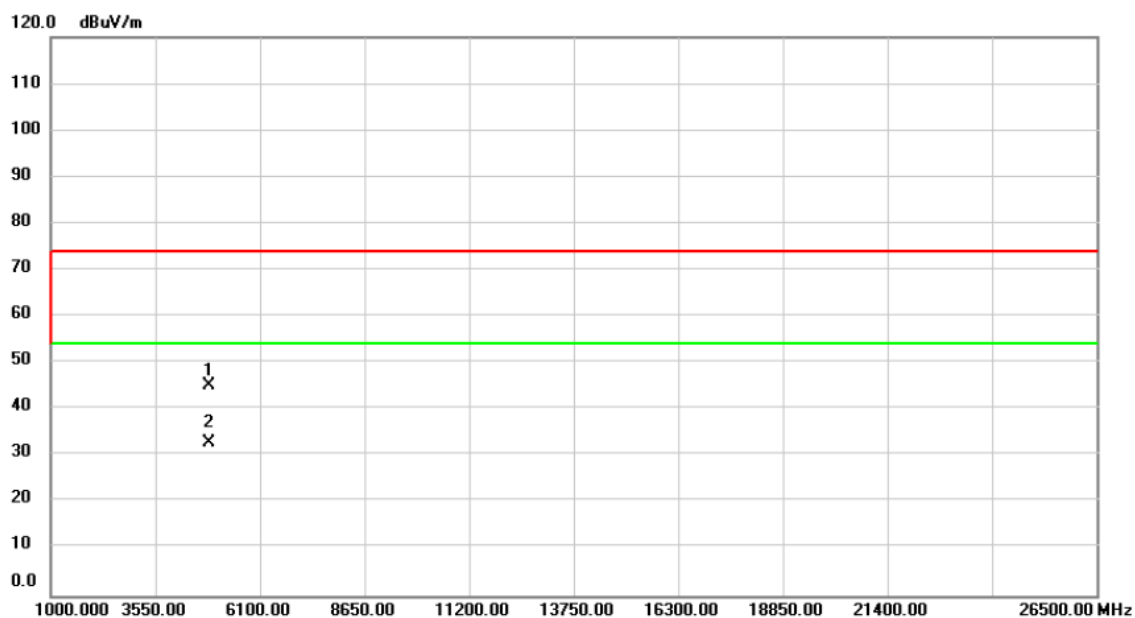

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4874.000	56.50	-11.29	45.21	74.00	-28.79	peak	
2	*	4874.000	44.02	-11.29	32.73	54.00	-21.27	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz


Horizontal

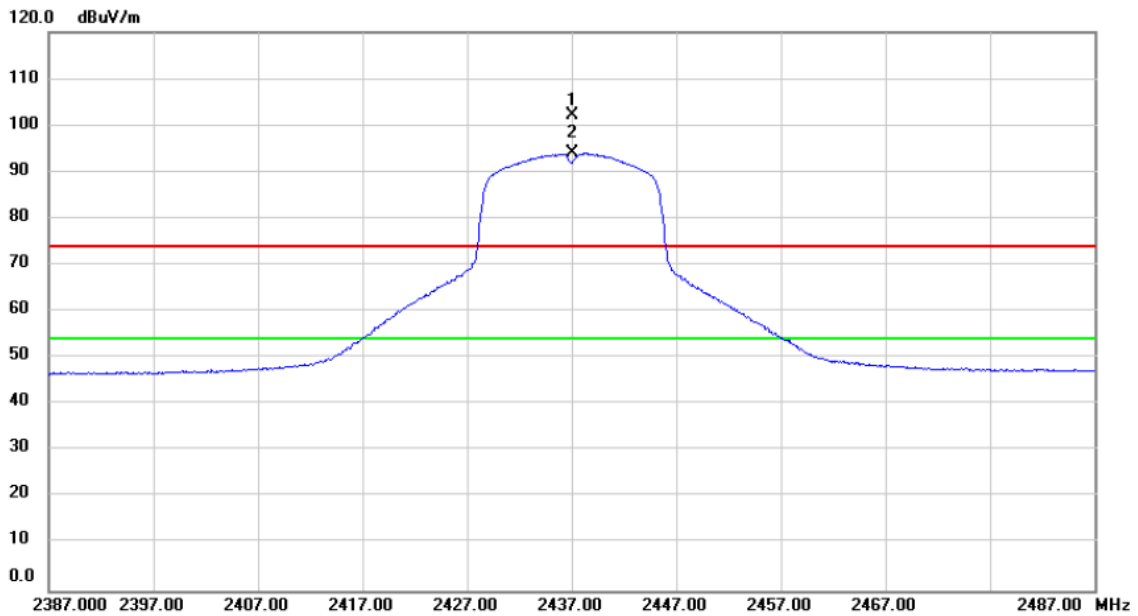

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2437.000	70.93	31.23	102.16	74.00	28.16	peak	No Limit
2	*	2437.000	62.72	31.23	93.95	54.00	39.95	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz


Horizontal

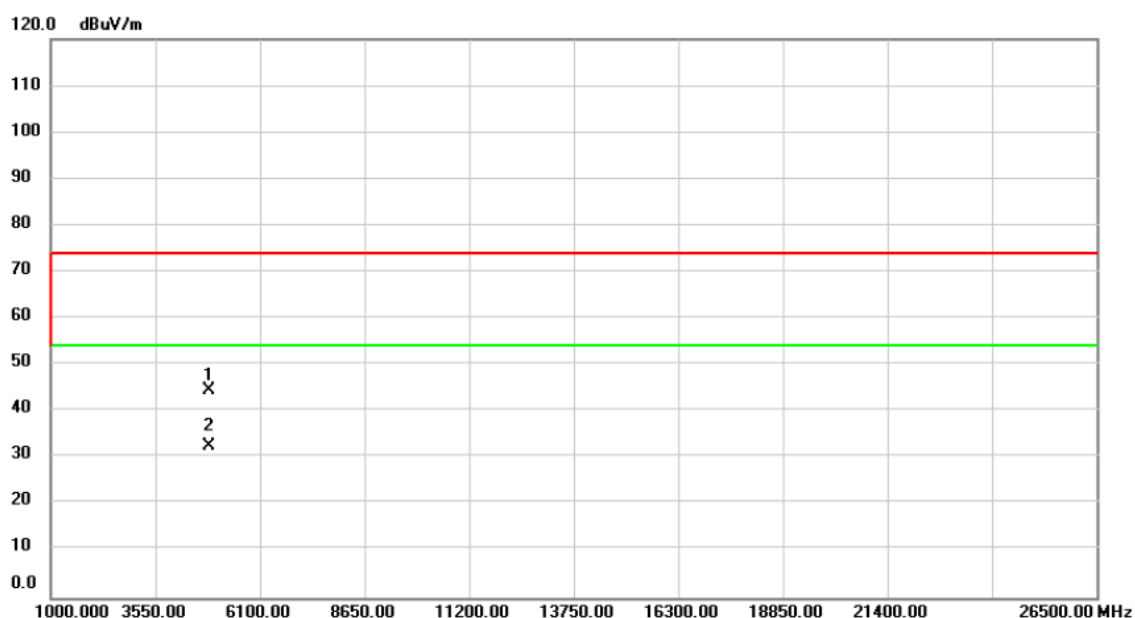

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4874.000	55.77	-11.29	44.48	74.00	-29.52	peak	
2	*	4874.000	43.71	-11.29	32.42	54.00	-21.58	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz


Vertical

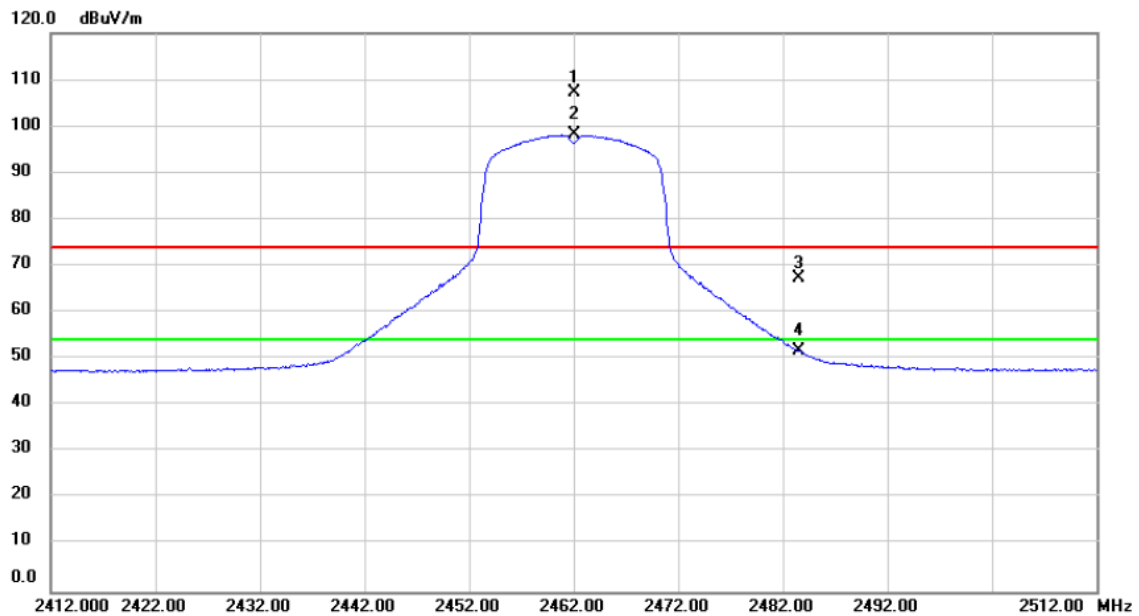

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2462.000	75.99	31.33	107.32	74.00	33.32	peak	No Limit
2	*	2462.000	66.79	31.33	98.12	54.00	44.12	AVG	No Limit
3		2483.500	36.04	31.41	67.45	74.00	-6.55	peak	
4		2483.500	20.43	31.41	51.84	54.00	-2.16	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz


Vertical

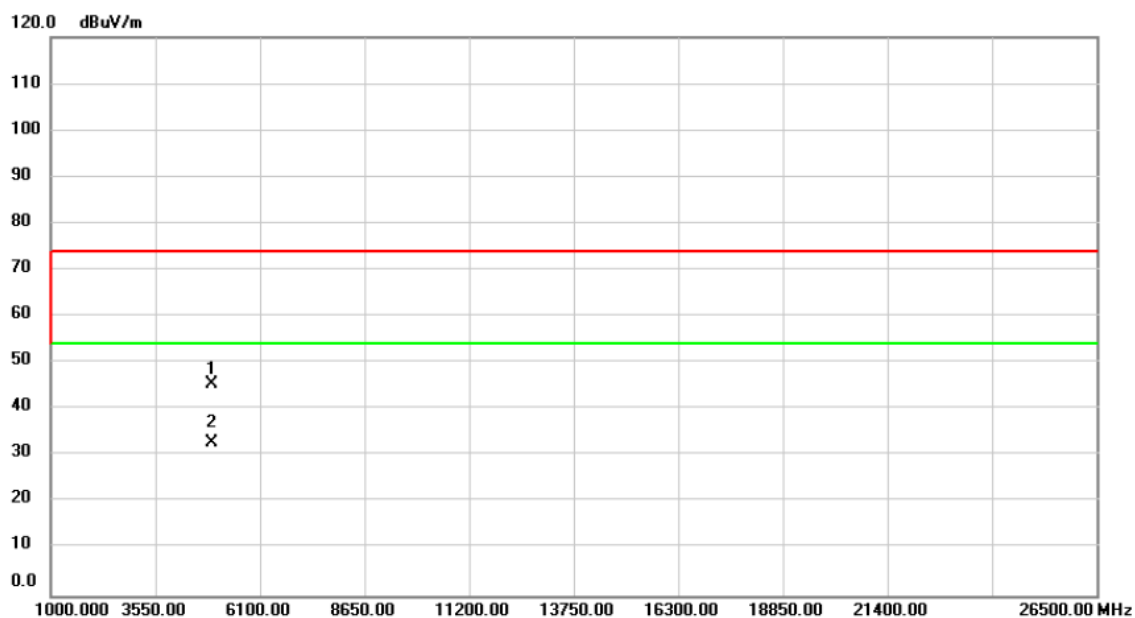

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4924.000	56.68	-11.22	45.46	74.00	-28.54	peak	
2	*	4924.000	43.95	-11.22	32.73	54.00	-21.27	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz


Horizontal

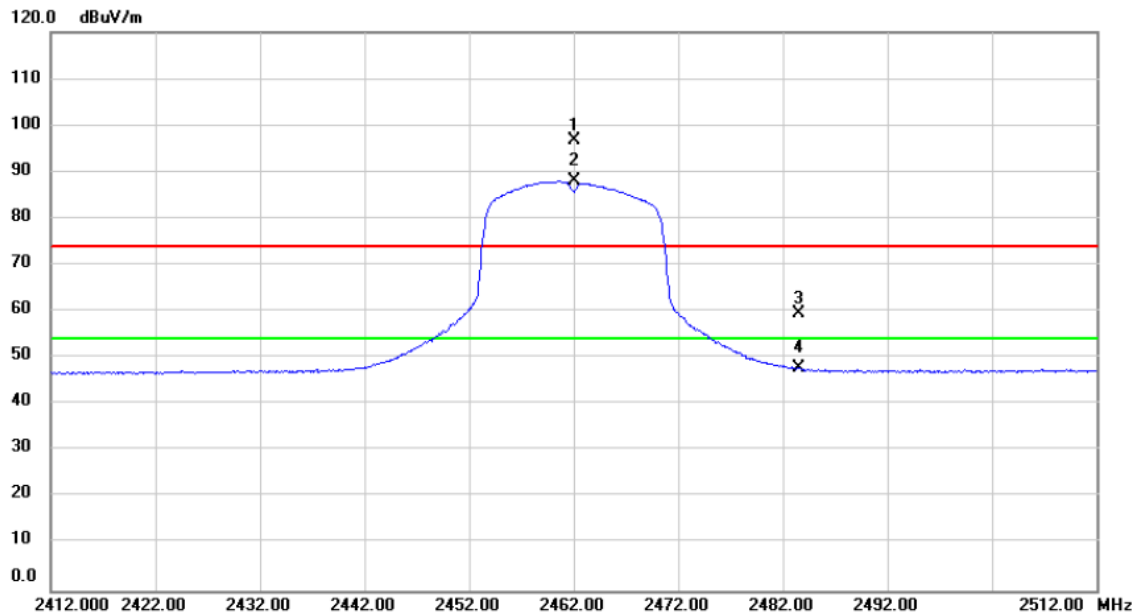

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2462.000	65.33	31.33	96.66	74.00	22.66	peak	No Limit
2	*	2462.000	56.67	31.33	88.00	54.00	34.00	AVG	No Limit
3		2483.582	28.11	31.41	59.52	74.00	-14.48	peak	
4		2483.582	16.43	31.41	47.84	54.00	-6.16	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz


Horizontal

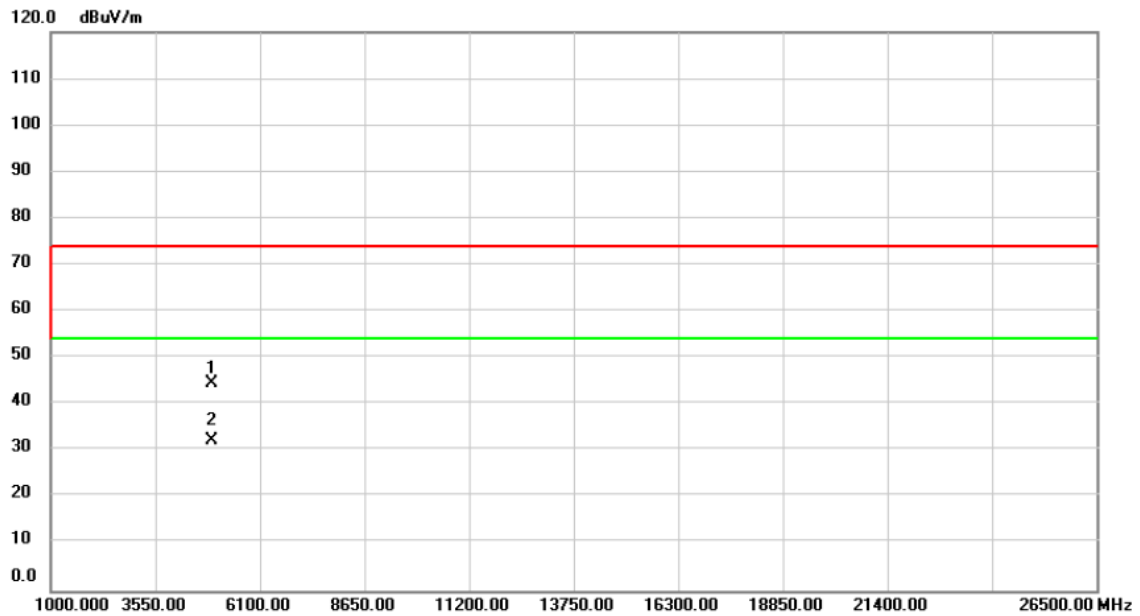

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4924.000	55.89	-11.22	44.67	74.00	-29.33	peak	
2	*	4924.000	43.60	-11.22	32.38	54.00	-21.62	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz


Vertical

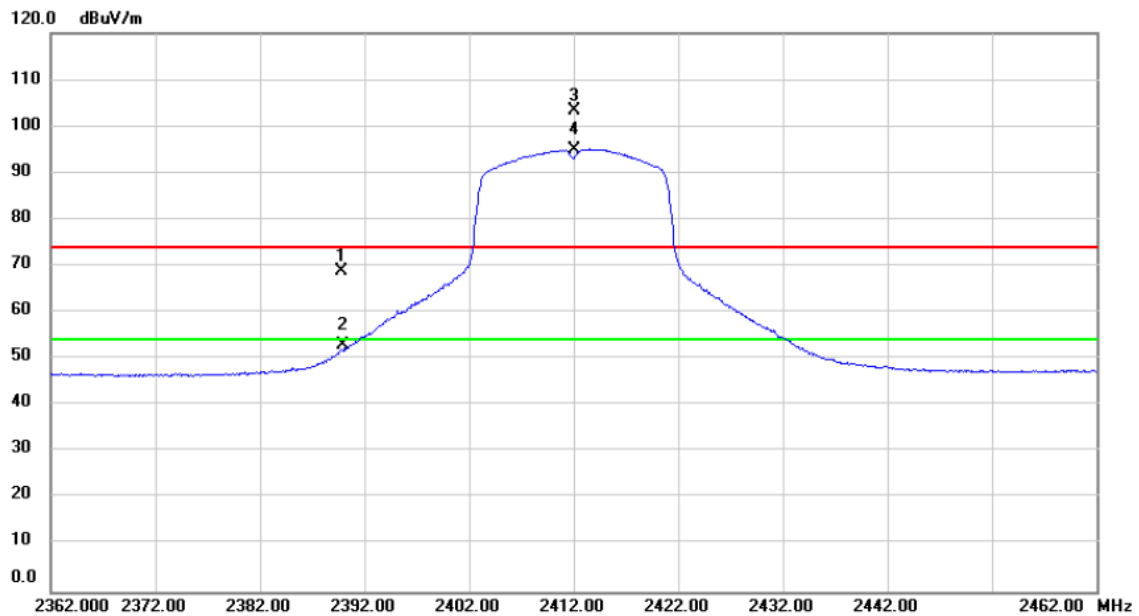

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2389.860	37.87	31.06	68.93	74.00	-5.07	peak	
2		2389.888	21.78	31.06	52.84	54.00	-1.16	AVG	
3	X	2412.000	72.09	31.14	103.23	74.00	29.23	peak	No Limit
4	*	2412.000	63.96	31.14	95.10	54.00	41.10	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz


Vertical

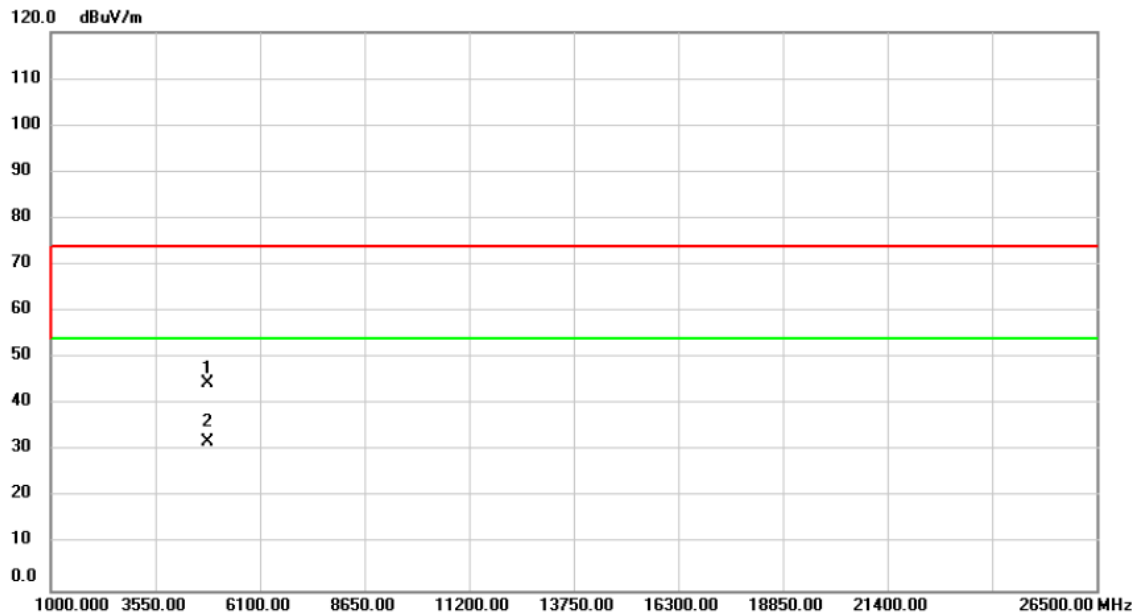

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	4824.000	55.92	-11.37	44.55	74.00	-29.45	peak	
2 *	4824.000	43.43	-11.37	32.06	54.00	-21.94	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz


Horizontal

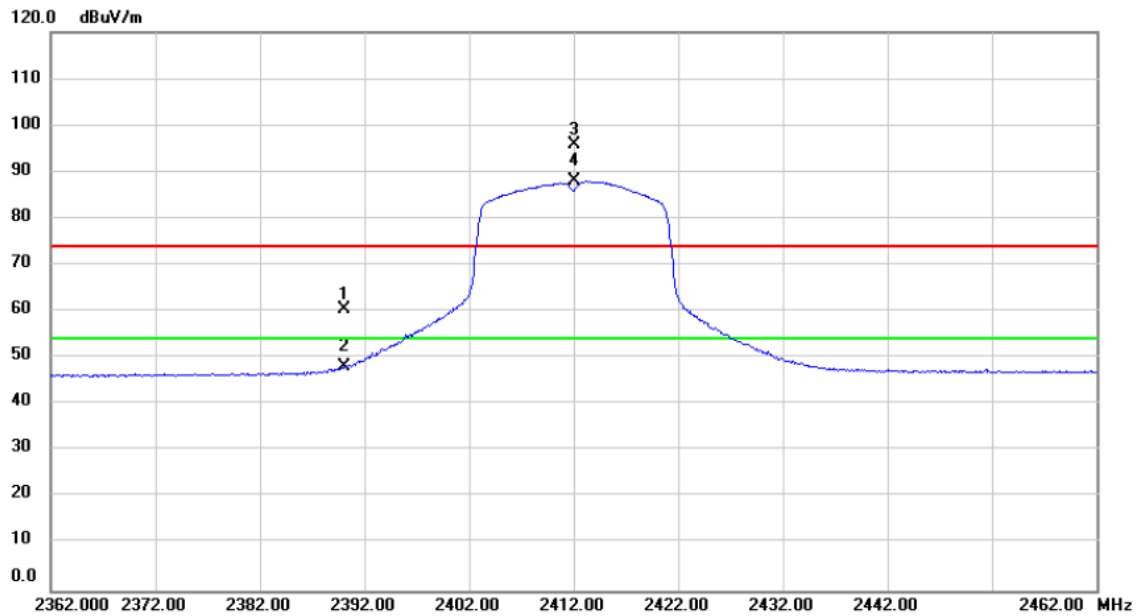

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	29.39	31.06	60.45	74.00	-13.55	peak	
2		2390.000	17.24	31.06	48.30	54.00	-5.70	AVG	
3	X	2412.000	64.81	31.14	95.95	74.00	21.95	peak	No Limit
4	*	2412.000	56.84	31.14	87.98	54.00	33.98	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz


Horizontal

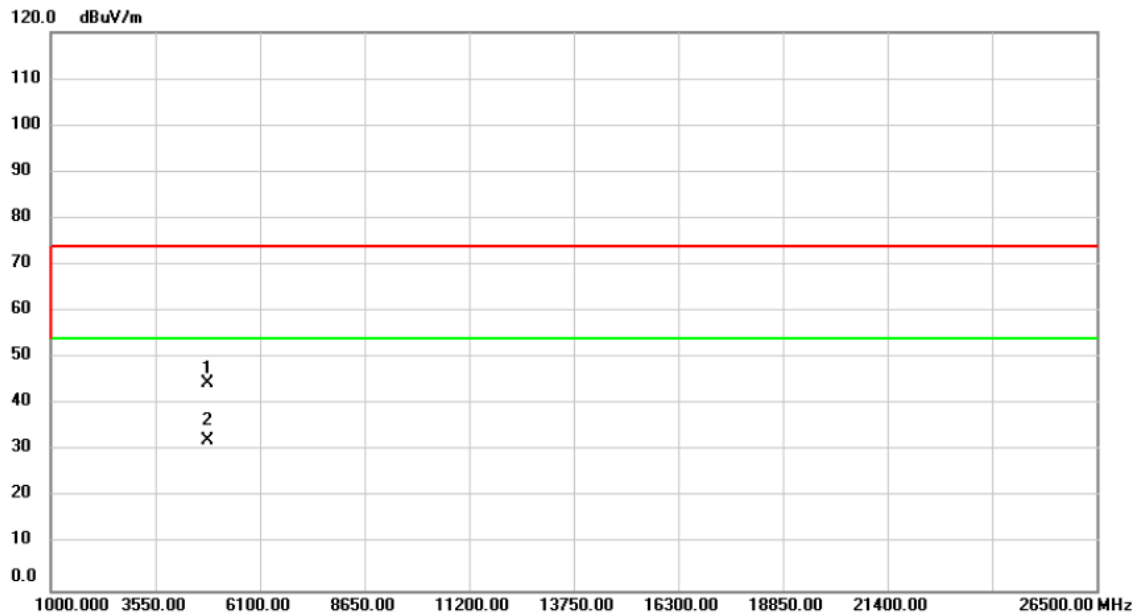

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4824.000	55.97	-11.37	44.60	74.00	-29.40	peak	
2	*	4824.000	43.61	-11.37	32.24	54.00	-21.76	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


Vertical

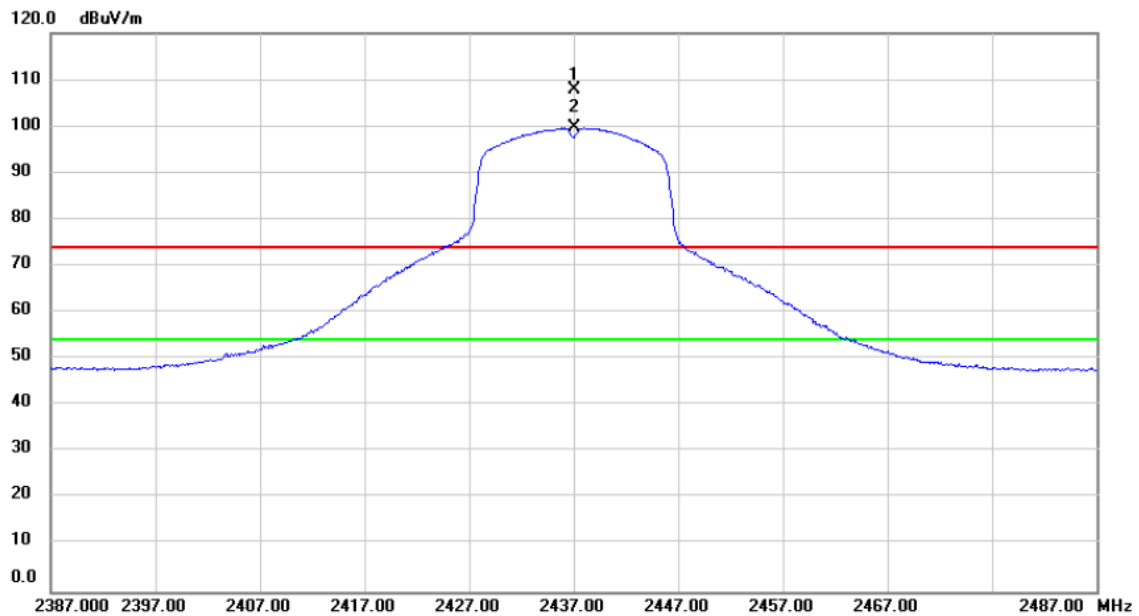

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2437.000	76.57	31.23	107.80	74.00	33.80	peak	No Limit
2	*	2437.000	68.40	31.23	99.63	54.00	45.63	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


Vertical

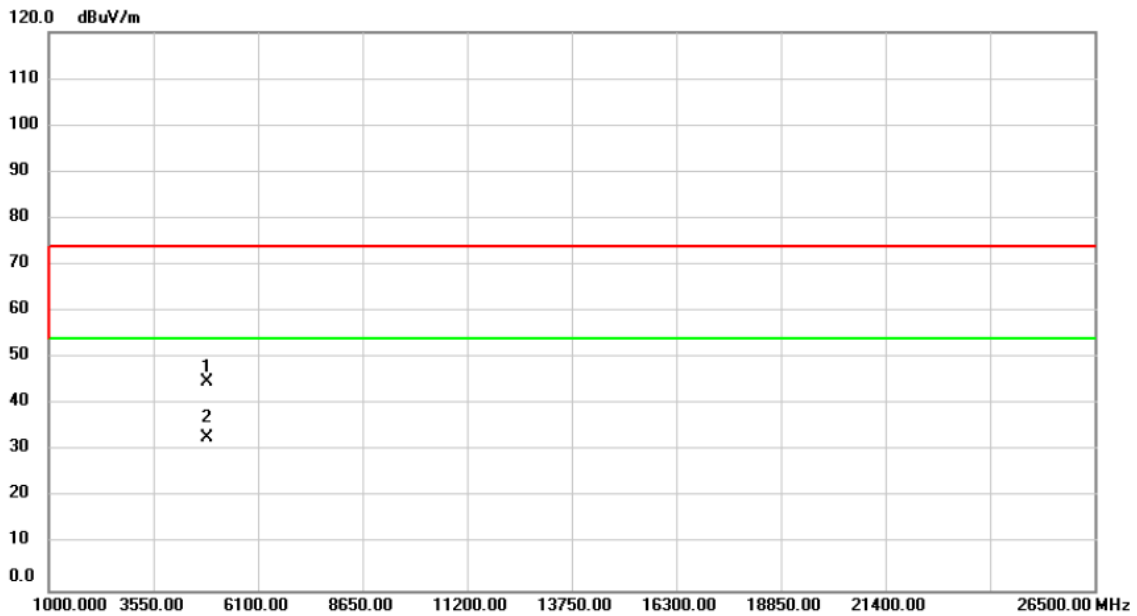

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4874.000	56.25	-11.29	44.96	74.00	-29.04	peak	
2	*	4874.000	44.05	-11.29	32.76	54.00	-21.24	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


Horizontal

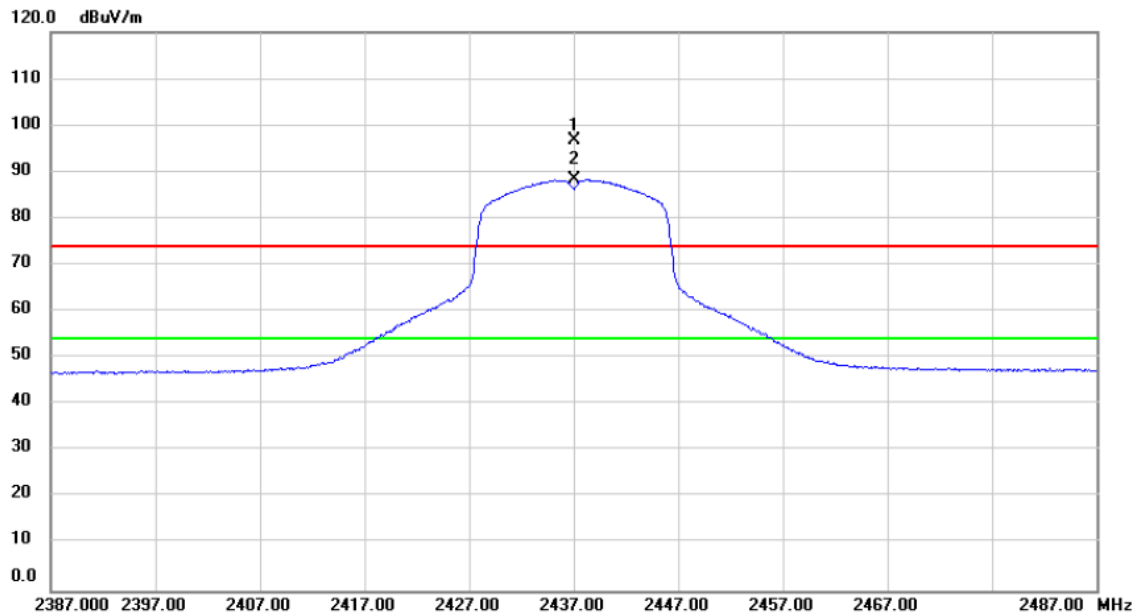

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2437.000	65.46	31.23	96.69	74.00	22.69	peak	No Limit
2	*	2437.000	57.06	31.23	88.29	54.00	34.29	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


Horizontal

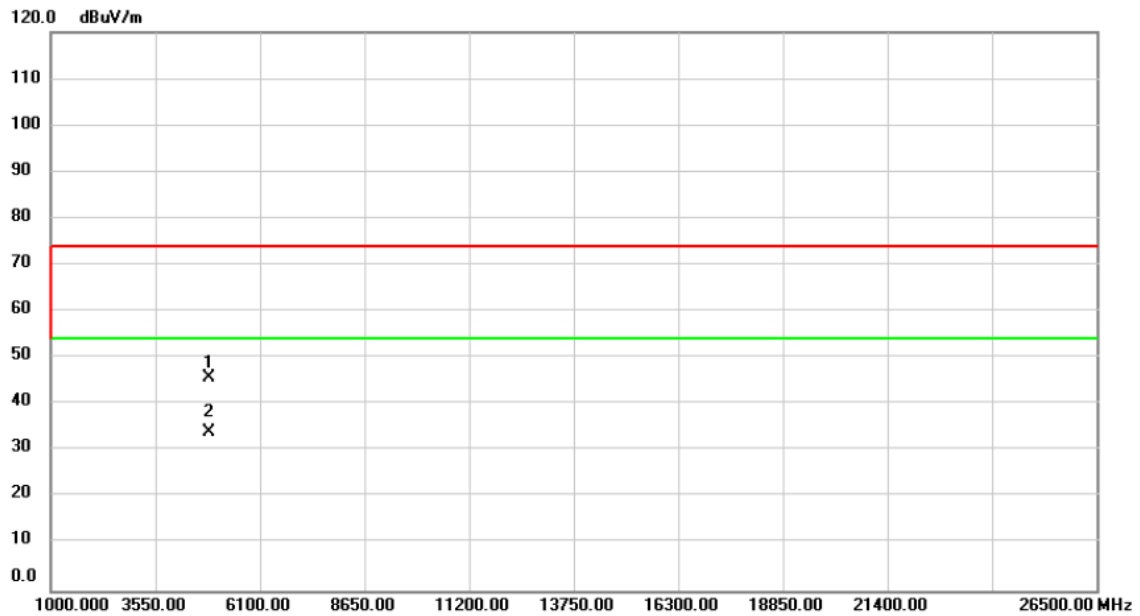

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4874.000	56.94	-11.29	45.65	74.00	-28.35	peak	
2	*	4874.000	45.22	-11.29	33.93	54.00	-20.07	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz


Vertical

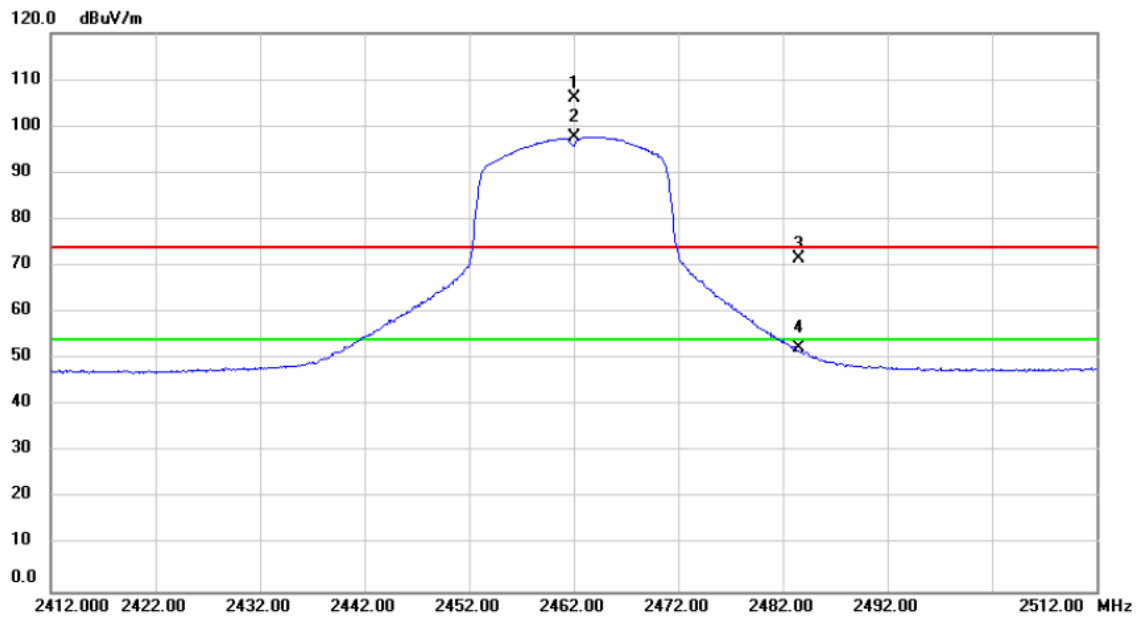

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2462.000	74.81	31.33	106.14	74.00	32.14	peak	No Limit
2	*	2462.000	66.47	31.33	97.80	54.00	43.80	AVG	No Limit
3		2483.582	40.16	31.41	71.57	74.00	-2.43	peak	
4		2483.582	21.00	31.41	52.41	54.00	-1.59	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz


Vertical

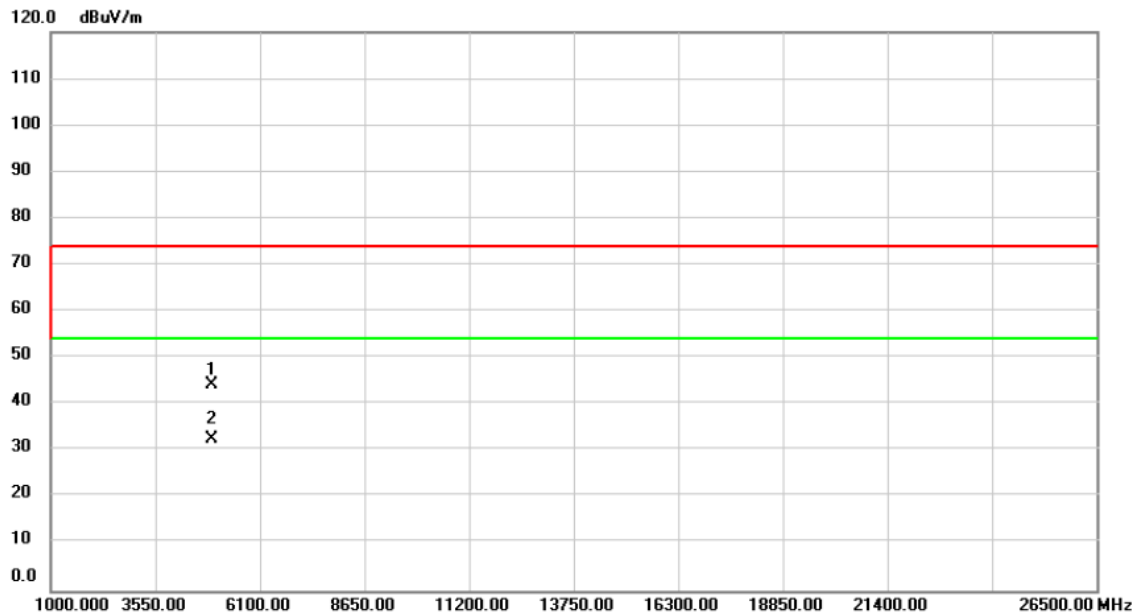

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4924.000	55.43	-11.22	44.21	74.00	-29.79	peak	
2	*	4924.000	43.69	-11.22	32.47	54.00	-21.53	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz


Horizontal

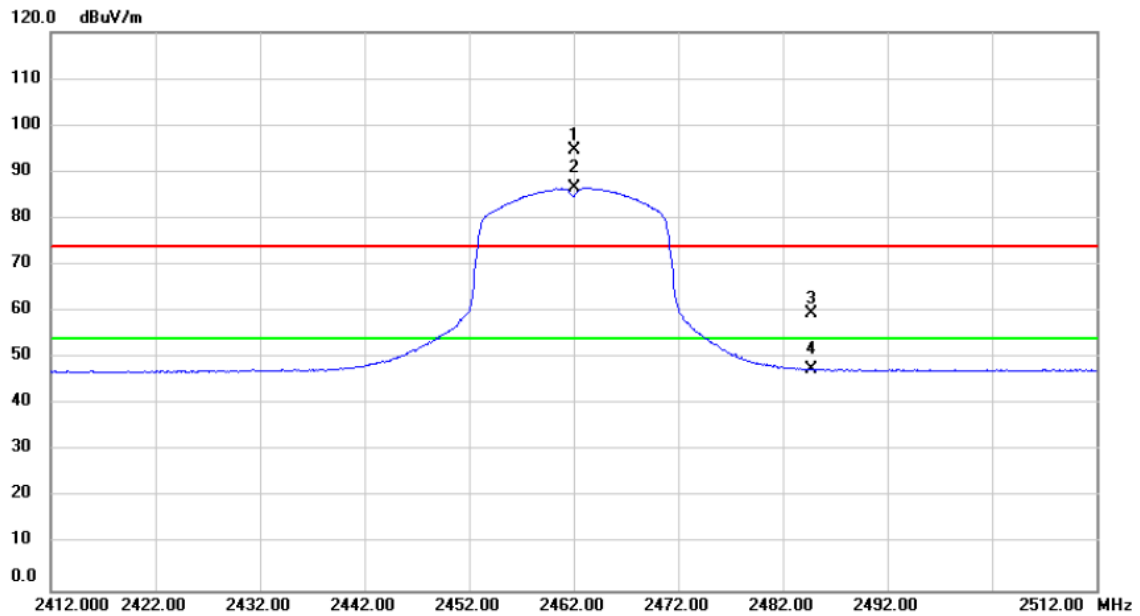

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2462.000	63.45	31.33	94.78	74.00	20.78	peak	No Limit
2	*	2462.000	55.17	31.33	86.50	54.00	32.50	AVG	No Limit
3		2484.738	28.17	31.42	59.59	74.00	-14.41	peak	
4		2484.738	16.20	31.42	47.62	54.00	-6.38	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

Horizontal

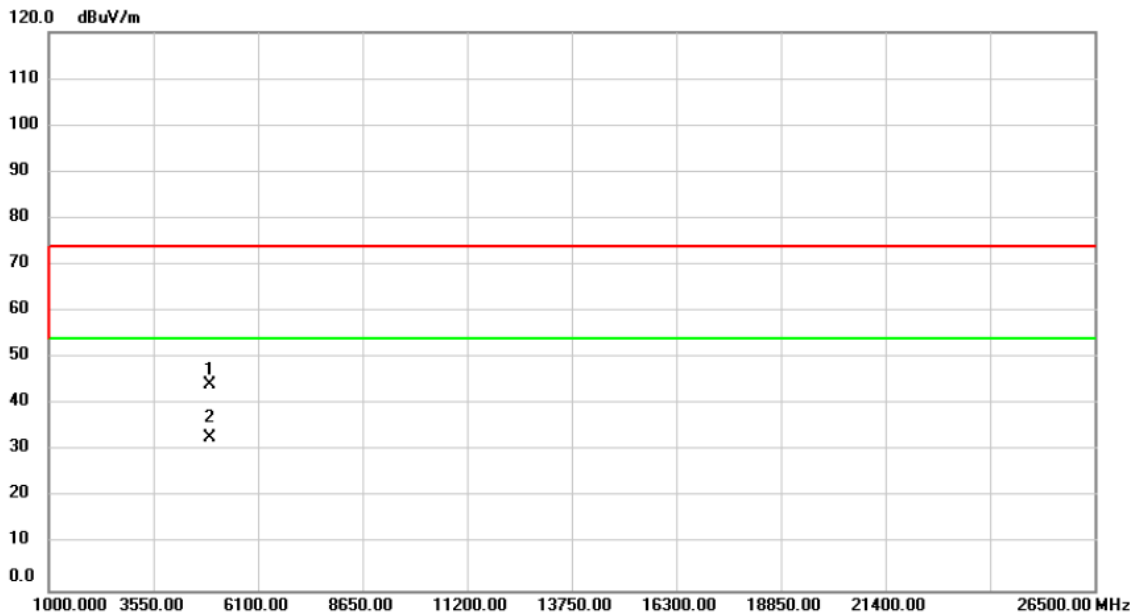


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4924.000	55.47	-11.22	44.25	74.00	-29.75	peak	
2	*	4924.000	43.99	-11.22	32.77	54.00	-21.23	AVG	

ATTACHMENT E - BANDWIDTH

Test Mode : TX B Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	10.08	14.88	500	Complies
2437	10.12	14.84	500	Complies
2462	10.13	14.76	500	Complies

TX CH01

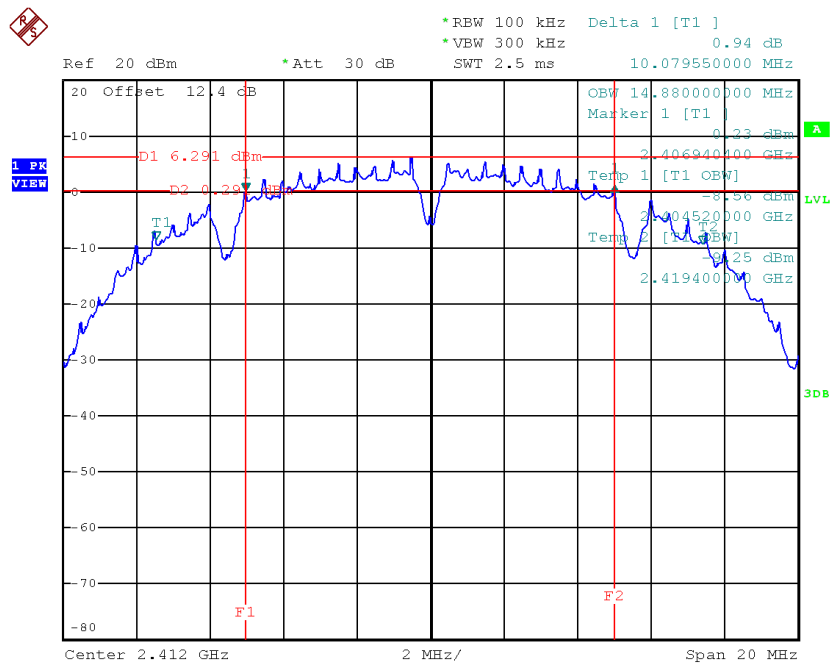


Date: 8.JUN.2017 15:00:45

TX CH06

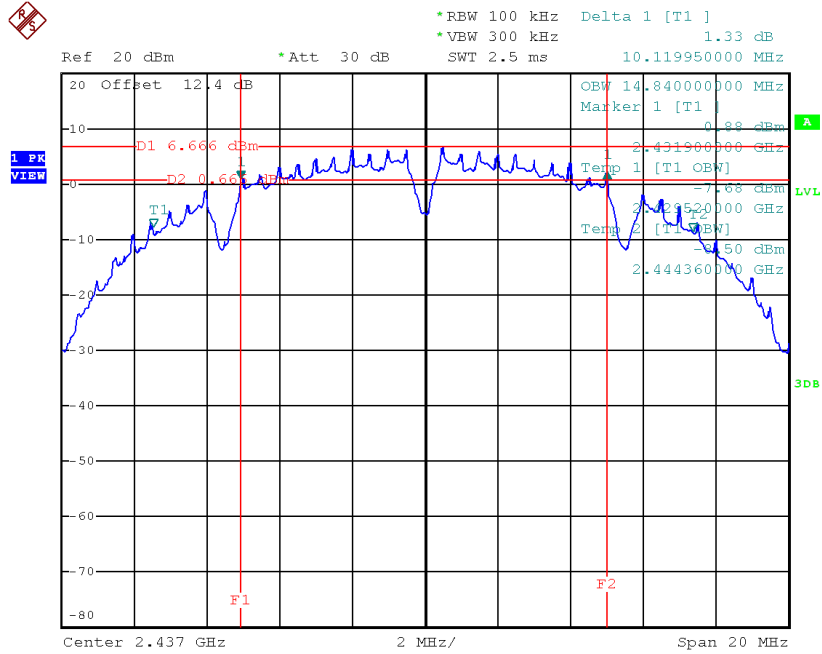

Date: 8.JUN.2017 15:03:20

TX CH11

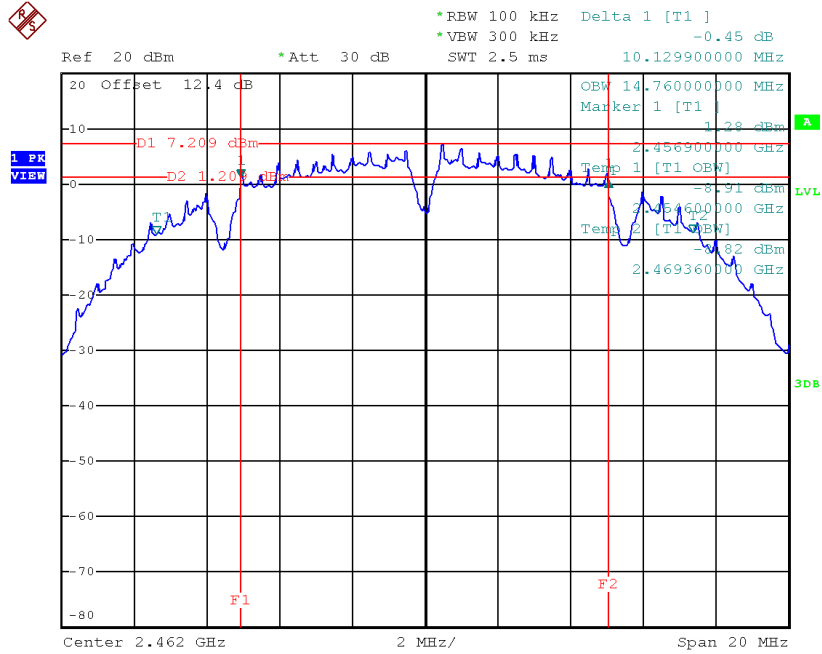


Date: 8.JUN.2017 15:05:13

Test Mode: TX G Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	15.47	16.36	500	Complies
2437	13.36	16.36	500	Complies
2462	14.20	16.36	500	Complies

TX CH01

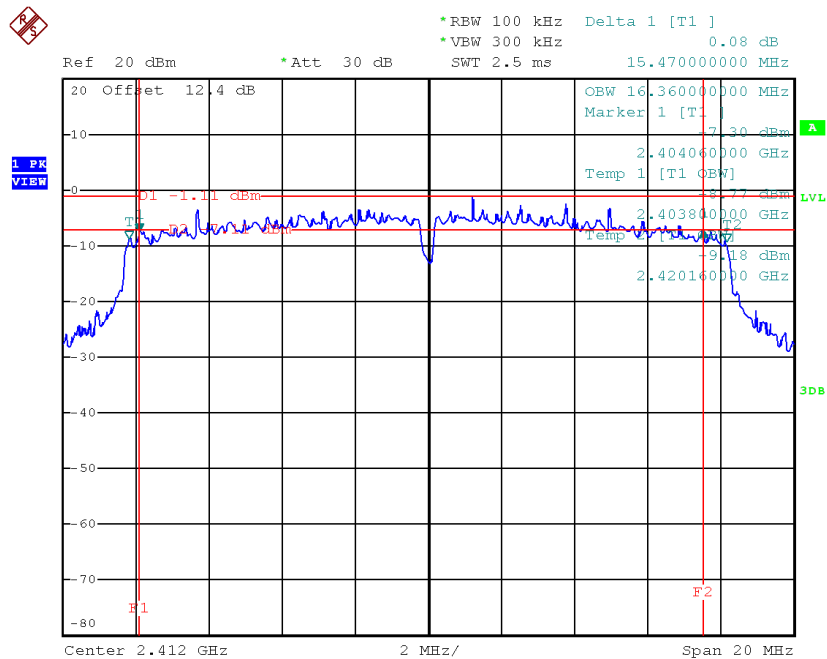


Date: 8.JUN.2017 15:06:25

TX CH06

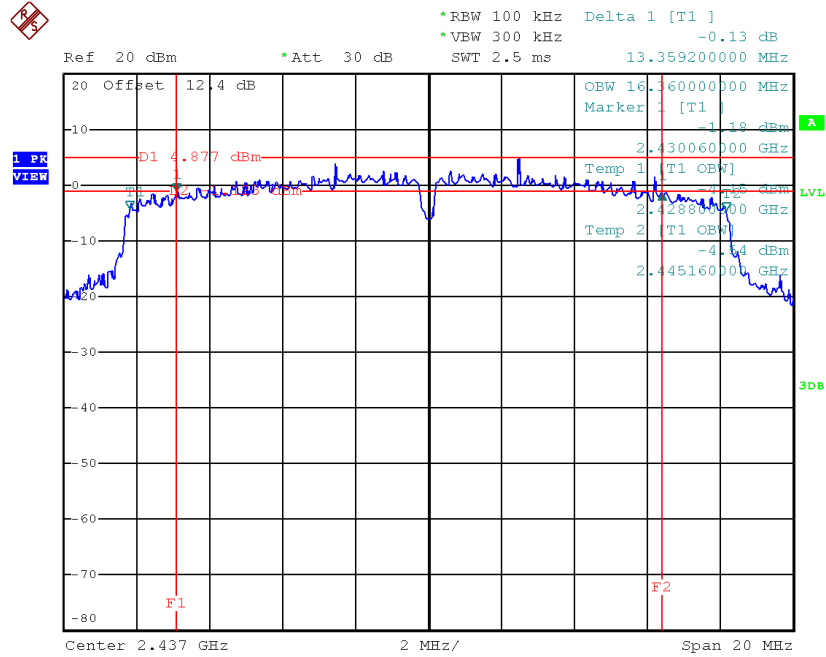

Date: 8.JUN.2017 15:08:33

TX CH11

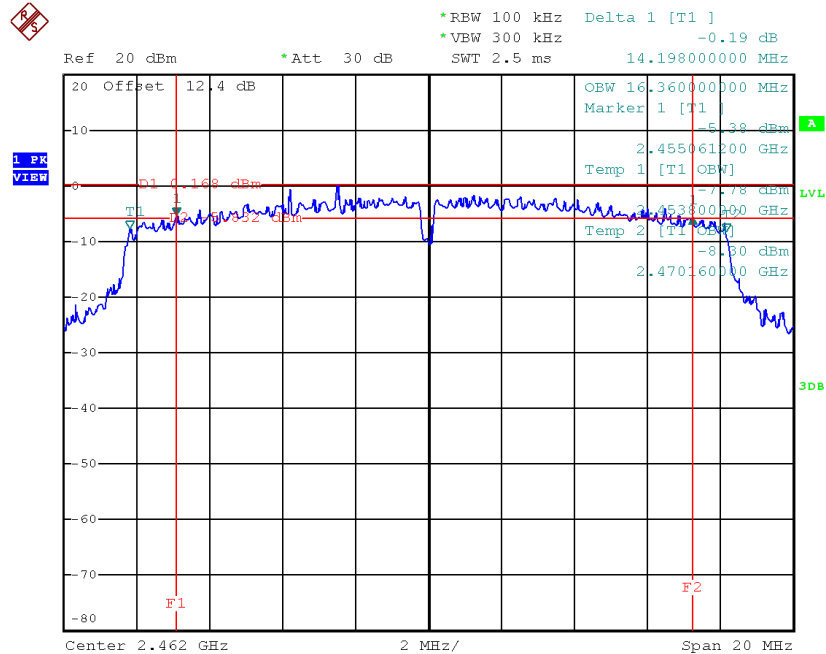


Date: 8.JUN.2017 15:20:17

Test Mode : TX N-20MHz Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	15.16	17.56	500	Complies
2437	15.15	17.48	500	Complies
2462	15.07	17.48	500	Complies

TX CH01

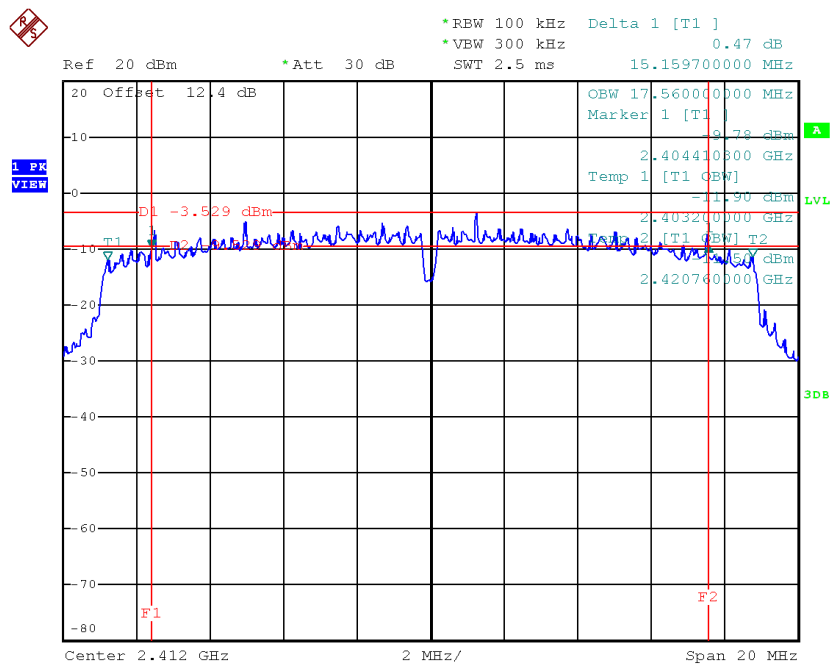


Date: 8.JUN.2017 15:22:24

TX CH06

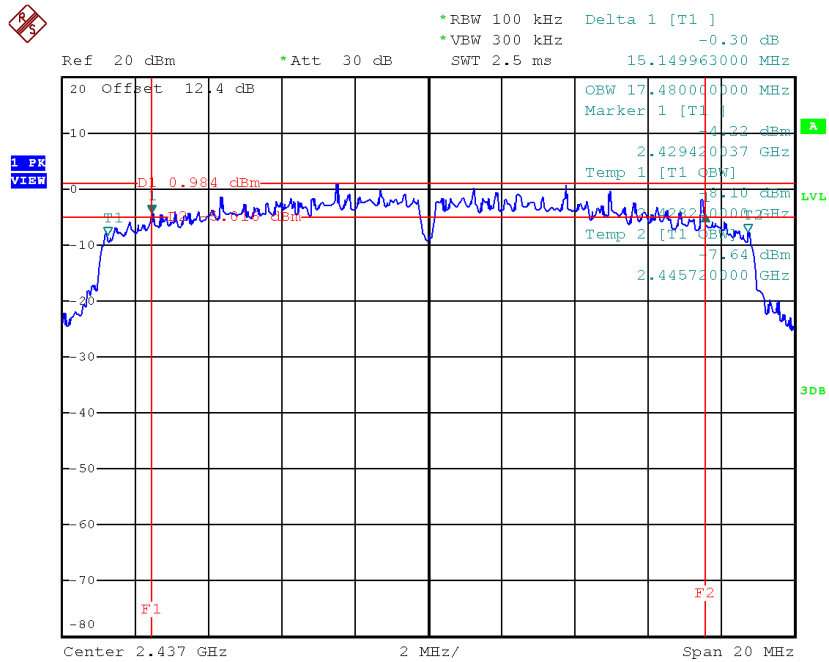

Date: 8.JUN.2017 15:24:22

TX CH11

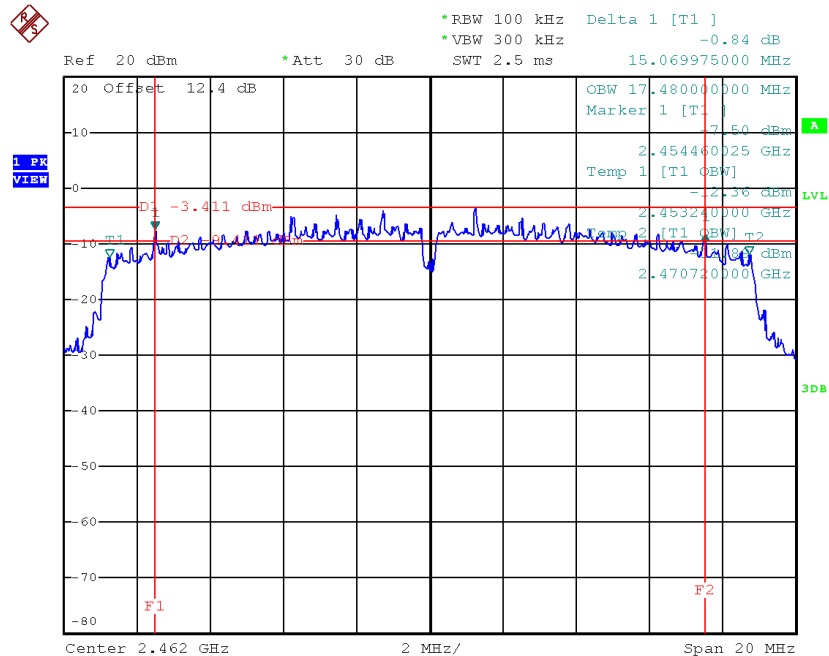

Date: 8.JUN.2017 15:26:48

ATTACHMENT F – MAXIMUM PEAK CONDUCTED OUTPUT POWER

Test Mode :TX B Mode_CH01/06/11_ANT 1					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	18.54	0.0714	30.00	1.00	Complies
2437	18.65	0.0733	30.00	1.00	Complies
2462	18.77	0.0753	30.00	1.00	Complies

Test Mode :TX G Mode_CH01/06/11_ANT 1					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	18.48	0.0705	18.48	1.00	Complies
2437	21.13	0.1297	21.13	1.00	Complies
2462	20.13	0.1030	20.13	1.00	Complies

Test Mode :TX N20 Mode_CH01/06/11_ANT 1					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	17.68	0.0586	30.00	1.00	Complies
2437	20.56	0.1138	30.00	1.00	Complies
2462	17.56	0.0570	30.00	1.00	Complies


Test Mode :TX N20 Mode_CH01/06/11_ANT 2					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	17.01	0.0502	30.00	1.00	Complies
2437	19.72	0.0938	30.00	1.00	Complies
2462	17.54	0.0568	30.00	1.00	Complies

Test Mode :TX N20 Mode_CH01/06/11_Total					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	20.37	0.1088	30.00	1.00	Complies
2437	23.17	0.2075	30.00	1.00	Complies
2462	20.56	0.1138	30.00	1.00	Complies

ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION


Test Mode : TX B Mode_ANT 1

TX B mode CH01

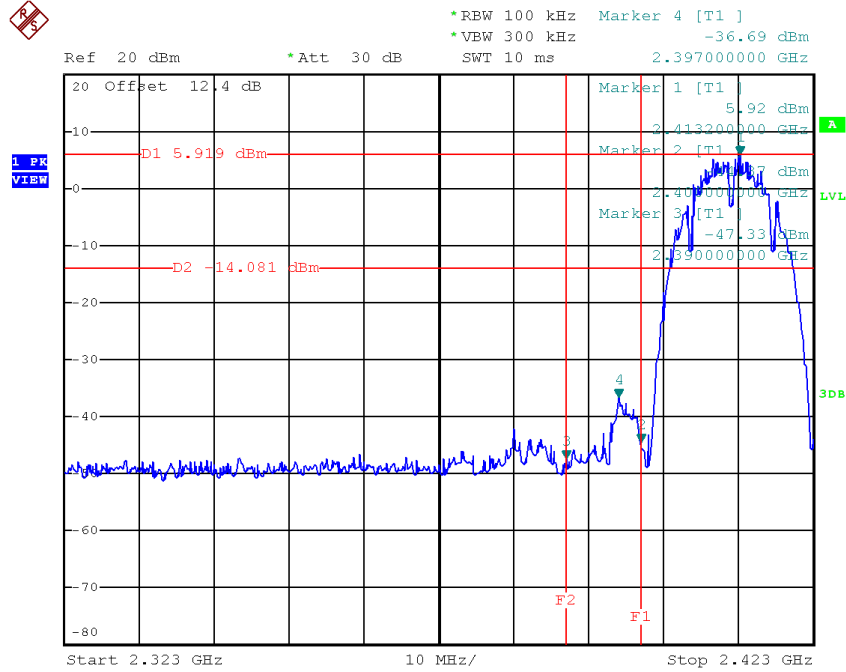


Date: 8.JUN.2017 15:01:18

TX B mode CH11

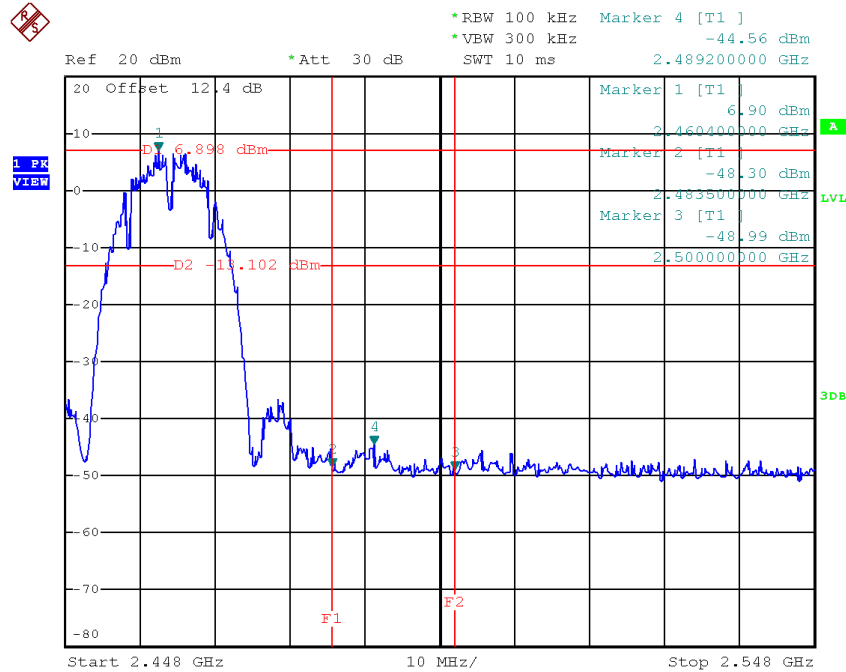


Date: 8.JUN.2017 15:05:46


TX B mode CH01 (10 Harmonic of the frequency)

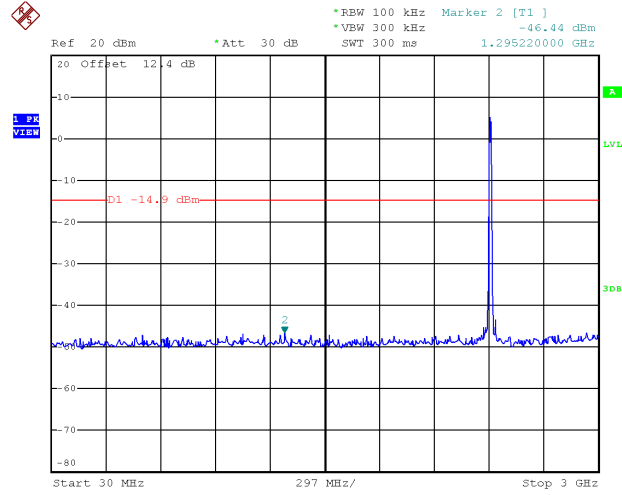

Date: 8.JUN.2017 15:00:58

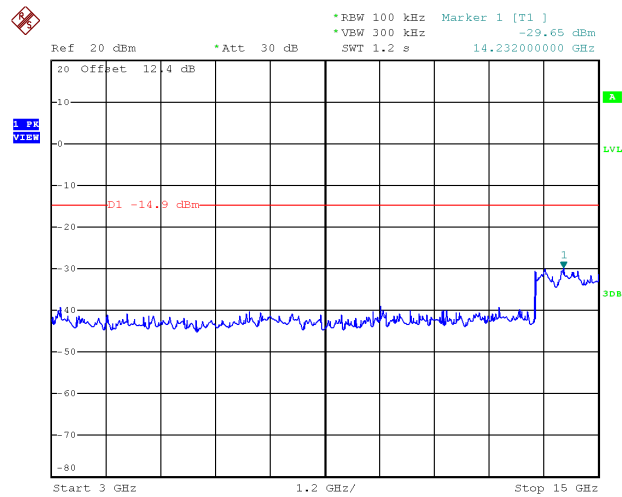


Date: 8.JUN.2017 15:01:04

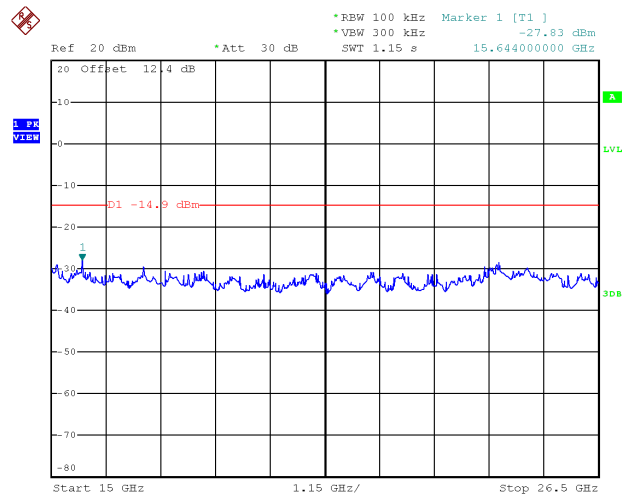


Date: 8.JUN.2017 15:01:11


TX B mode CH06 (10 Harmonic of the frequency)

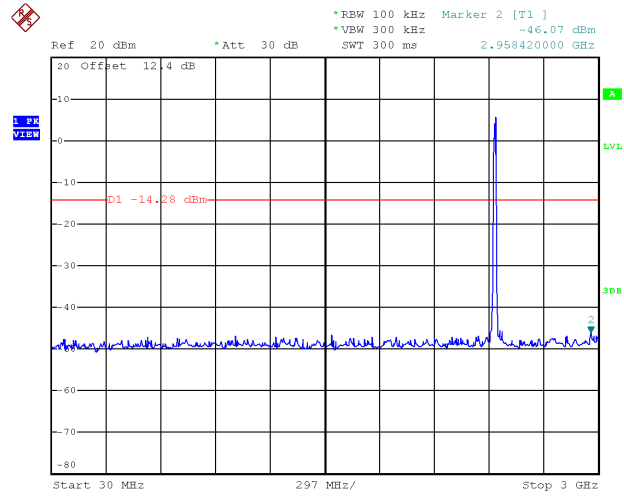

Date: 8.JUN.2017 15:03:33

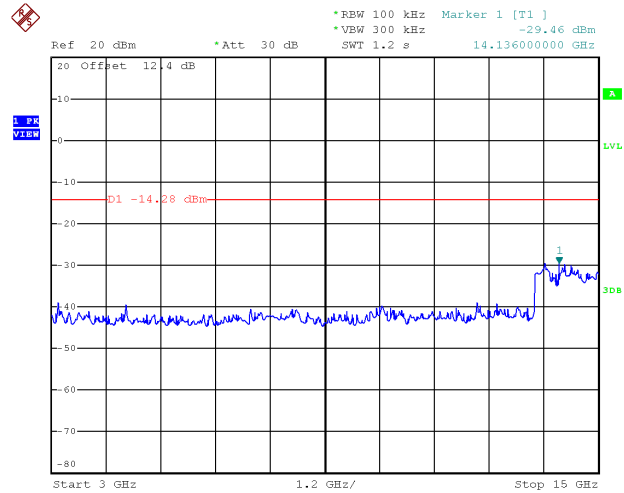


Date: 8.JUN.2017 15:03:40

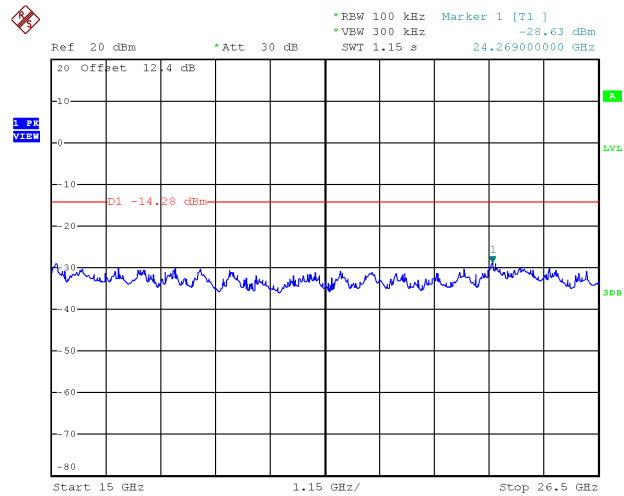


Date: 8.JUN.2017 15:03:46


TX B mode CH11 (10 Harmonic of the frequency)

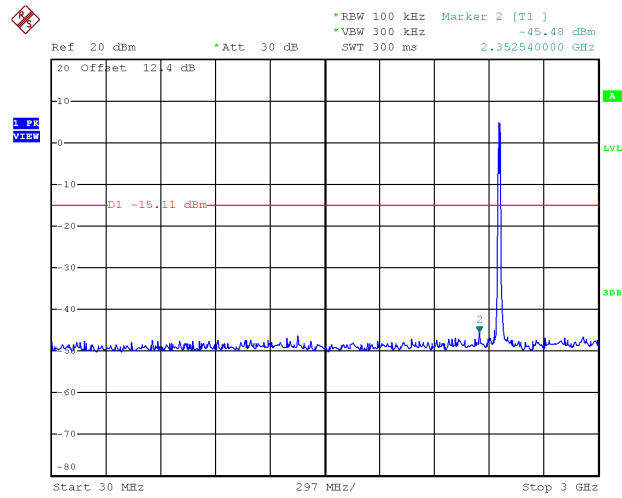

Date: 8.JUN.2017 15:05:26

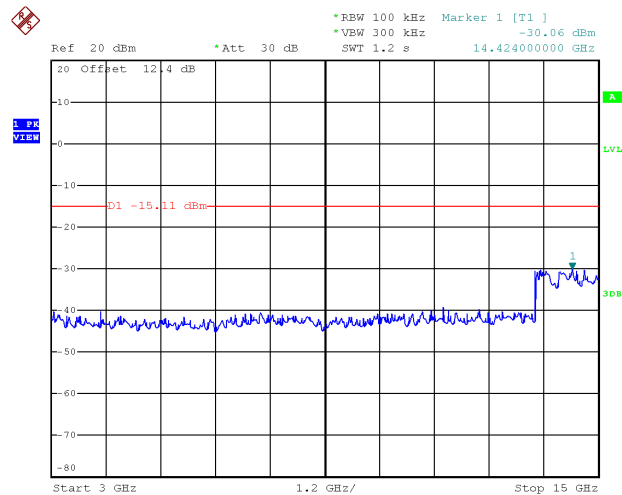


Date: 8.JUN.2017 15:05:33

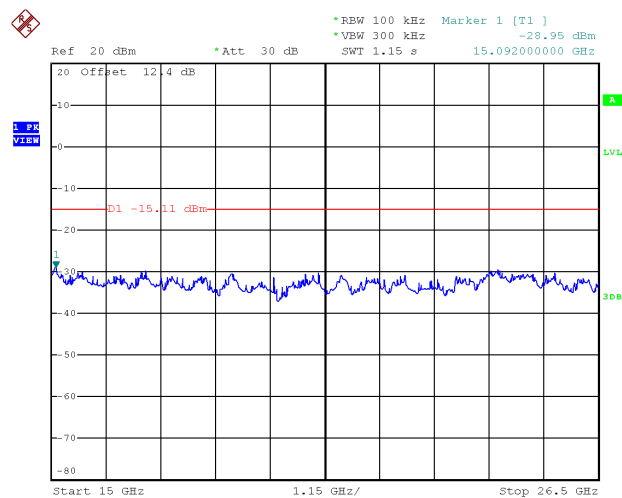

Date: 8.JUN.2017 15:05:39


Test Mode : TX G Mode_ANT 1

TX G mode CH01

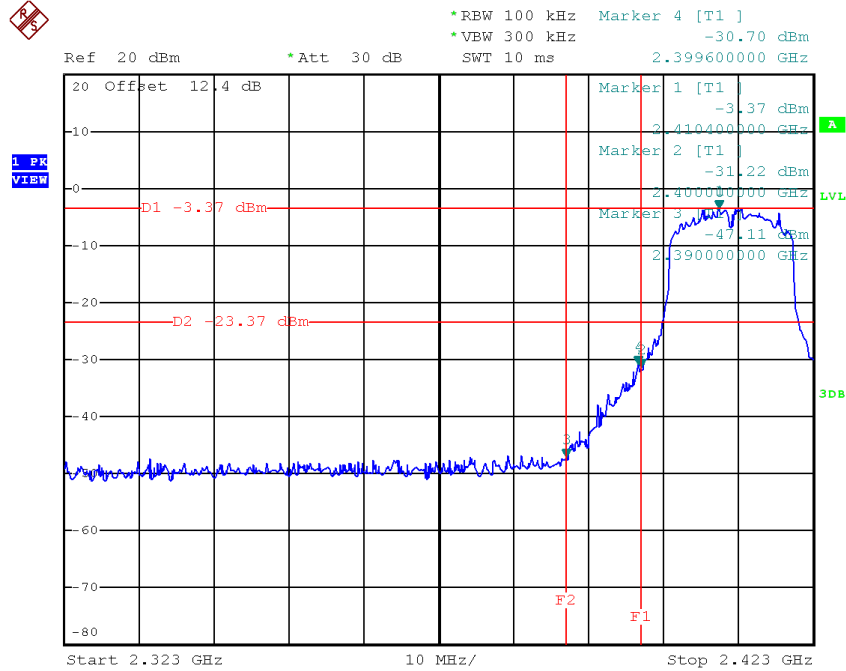


Date: 8.JUN.2017 15:06:58

TX G mode CH11

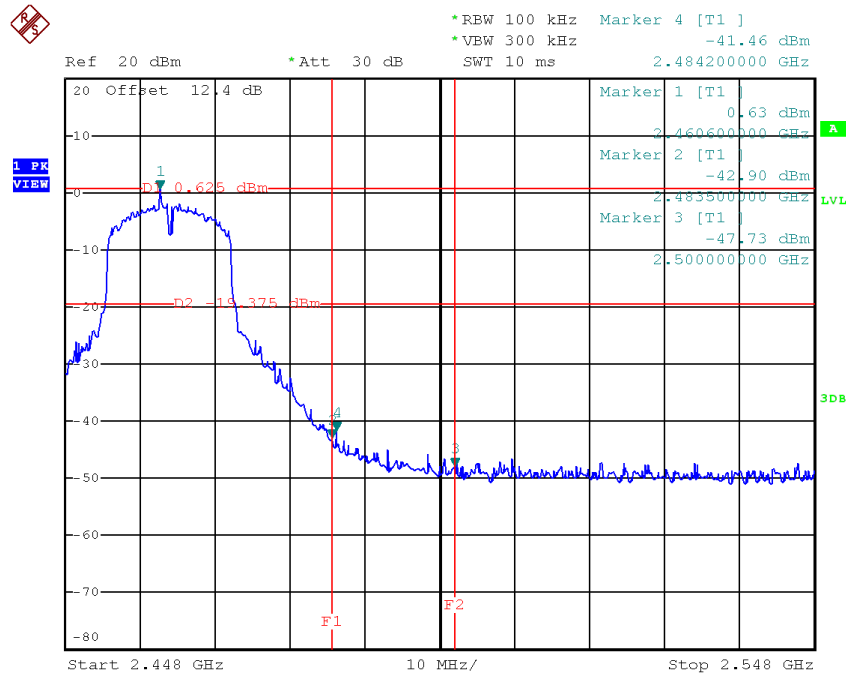


Date: 8.JUN.2017 15:21:08


TX G mode CH01 (10 Harmonic of the frequency)

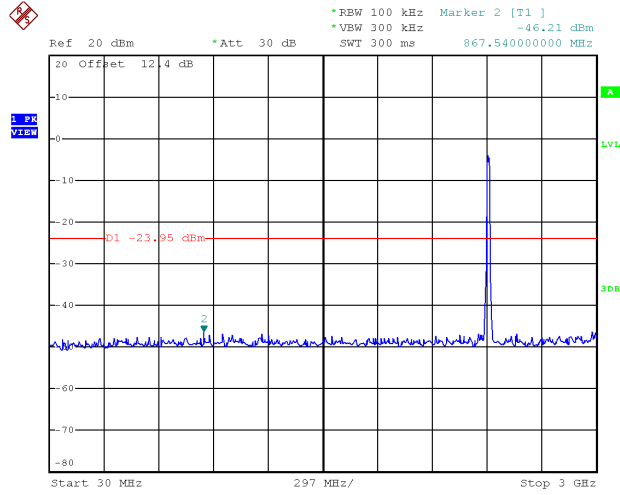

Date: 8.JUN.2017 15:06:38

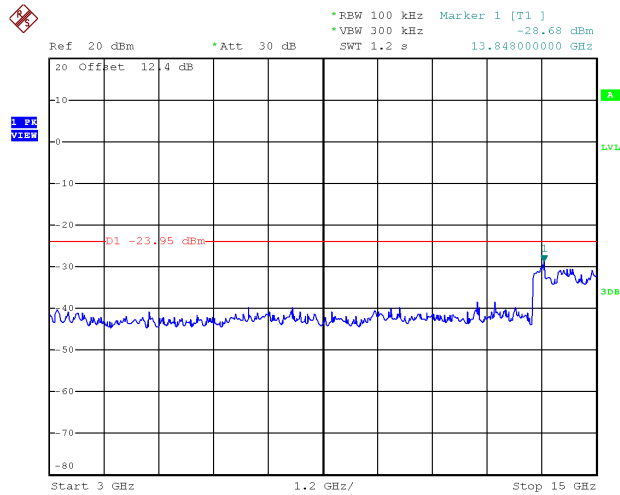


Date: 8.JUN.2017 15:06:44

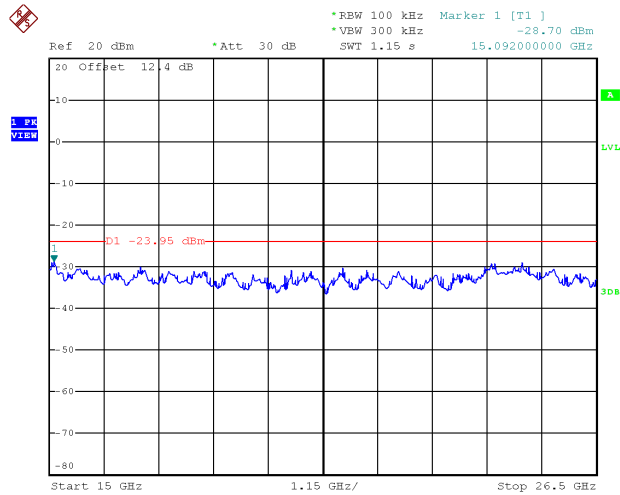


Date: 8.JUN.2017 15:06:51


TX G mode CH06 (10 Harmonic of the frequency)

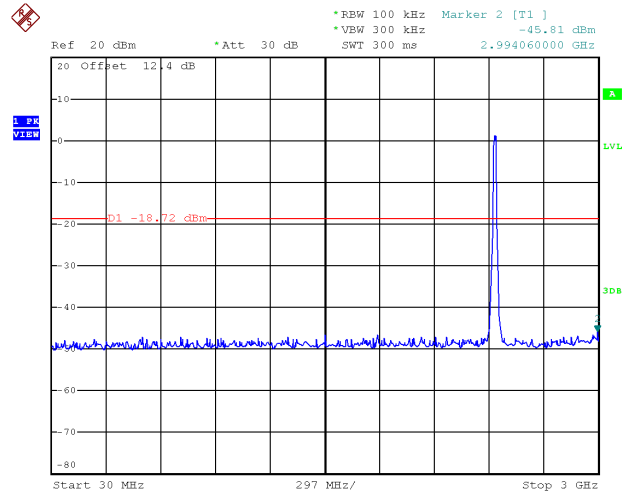

Date: 8.JUN.2017 15:08:46

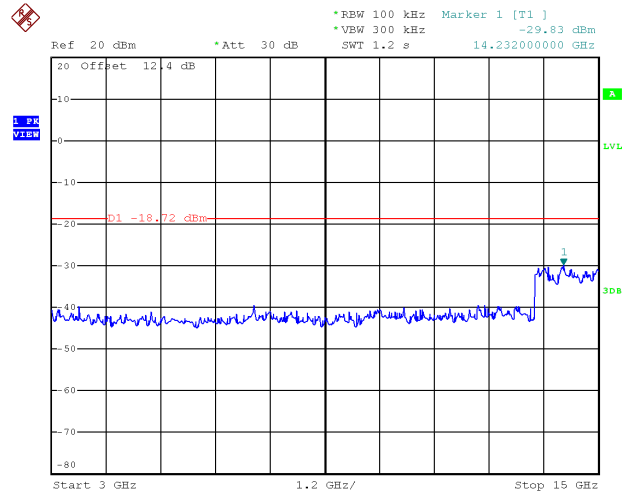


Date: 8.JUN.2017 15:08:52

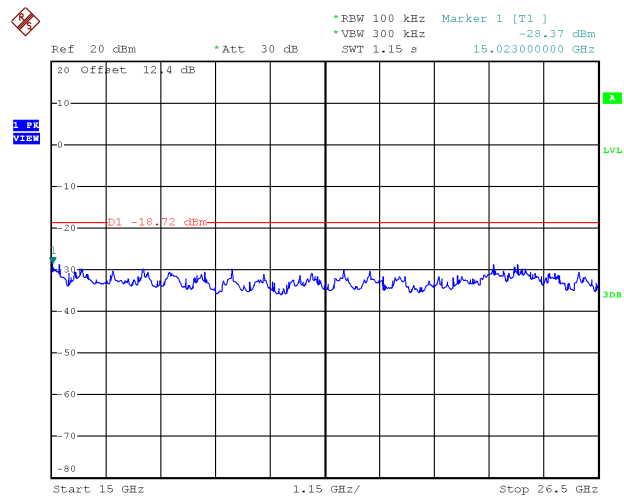


Date: 8.JUN.2017 15:08:59


TX G mode CH11 (10 Harmonic of the frequency)

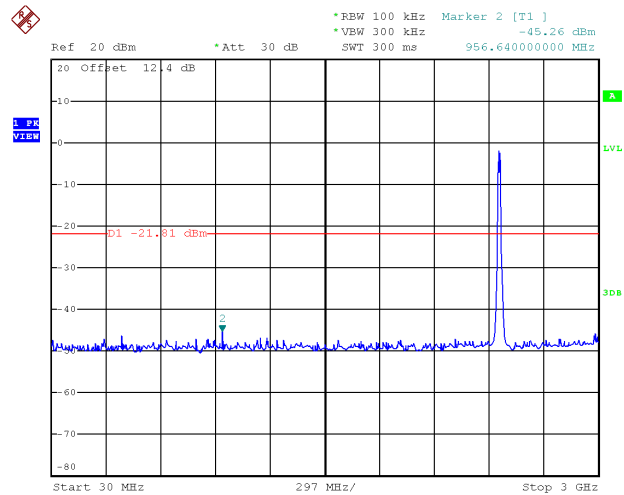

Date: 8.JUN.2017 15:20:30

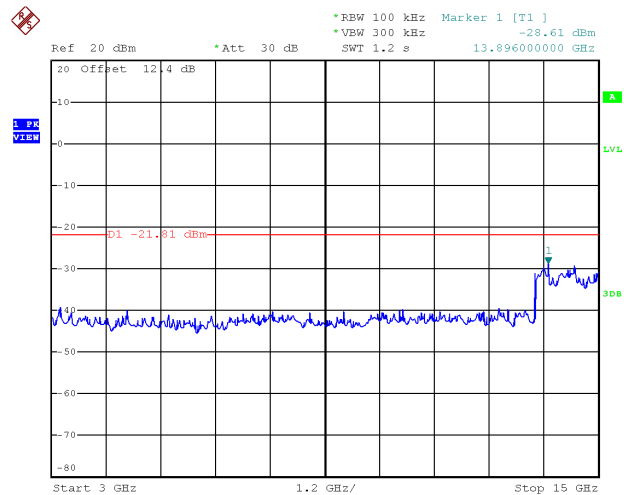


Date: 8.JUN.2017 15:20:37

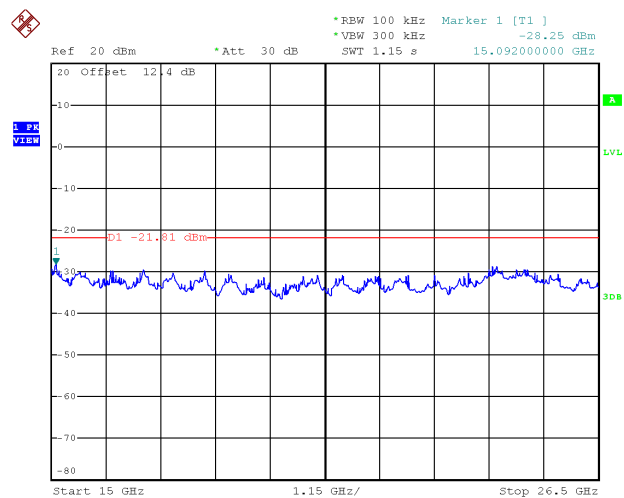

Date: 8.JUN.2017 15:20:44


Test Mode : TX N-20M Mode_ANT 1

TX HT20 mode CH01

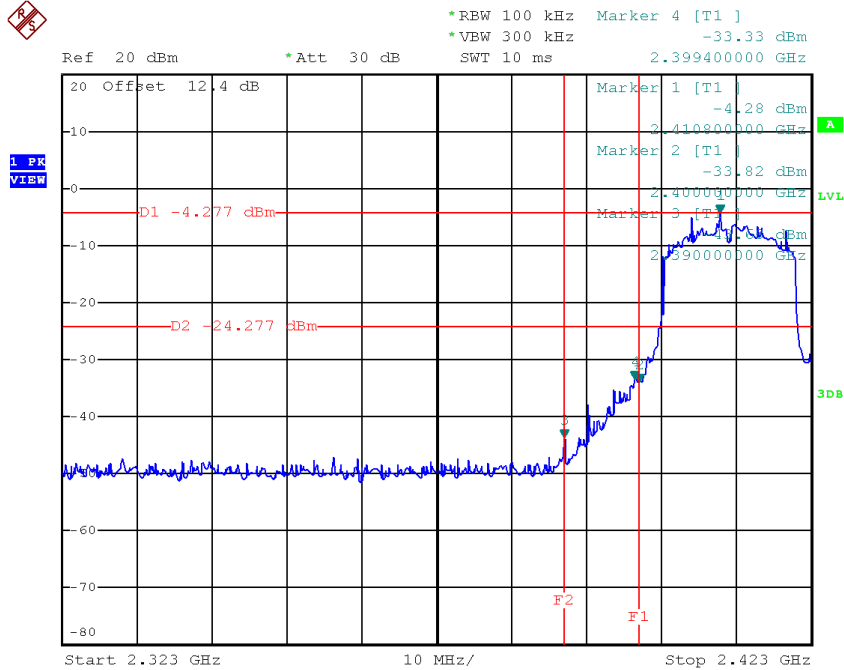


Date: 8.JUN.2017 15:22:57

TX HT20 mode CH11

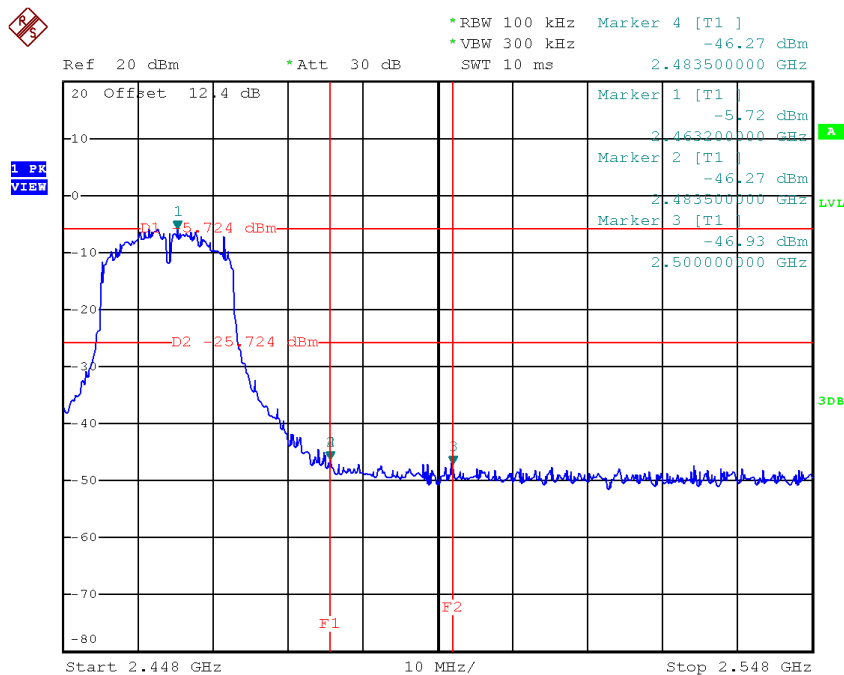


Date: 8.JUN.2017 15:27:38


TX HT20 mode CH01 (10 Harmonic of the frequency)

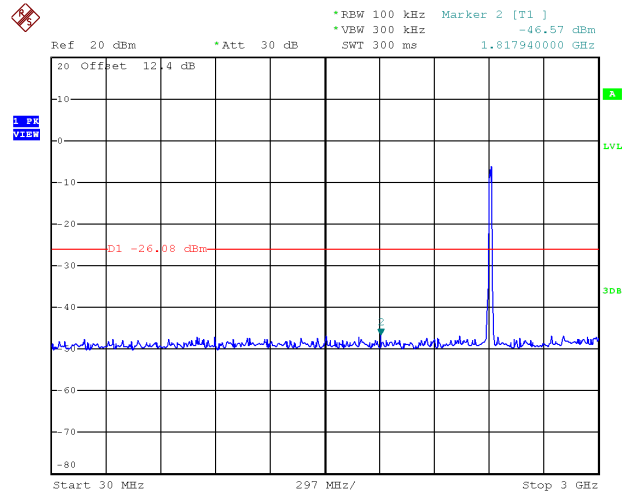

Date: 8.JUN.2017 15:22:37

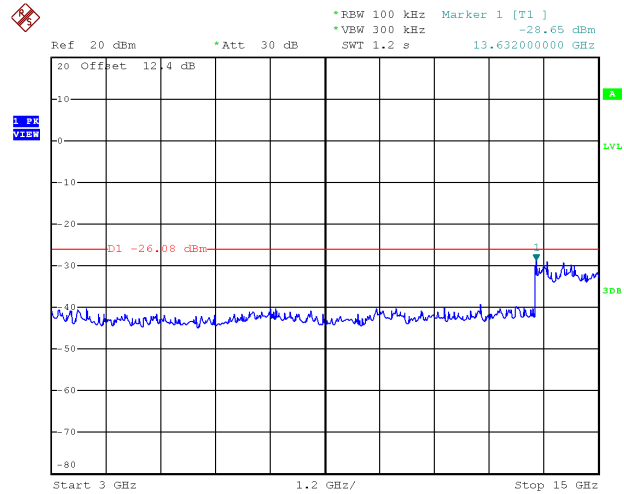


Date: 8.JUN.2017 15:22:43

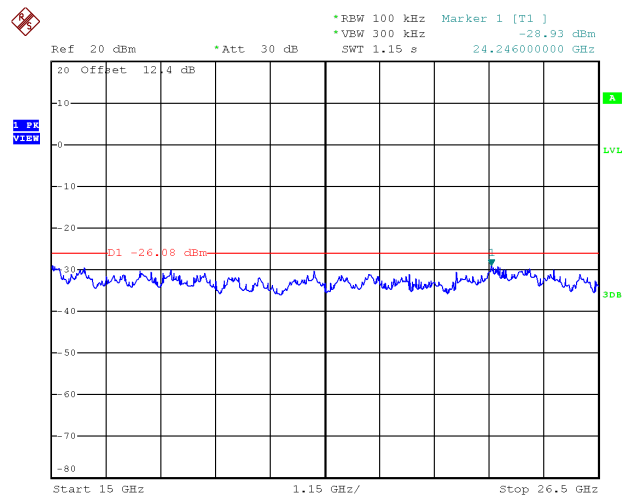


Date: 8.JUN.2017 15:22:50


TX HT20 mode CH06 (10 Harmonic of the frequency)

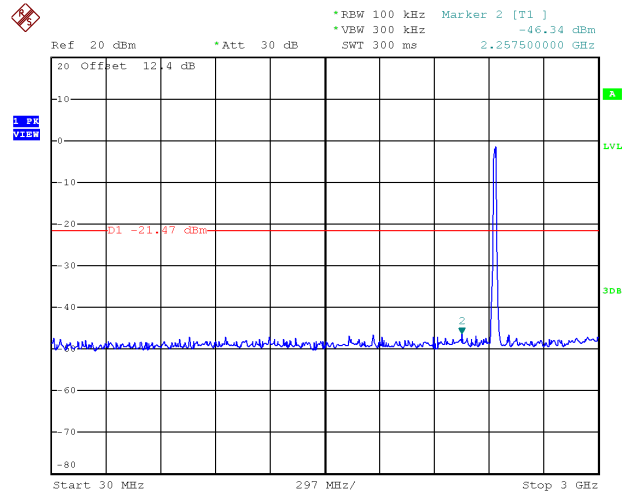

Date: 8.JUN.2017 15:24:34

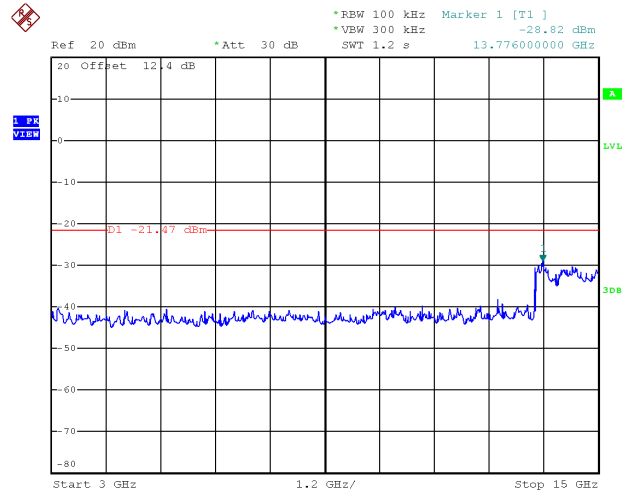


Date: 8.JUN.2017 15:24:41

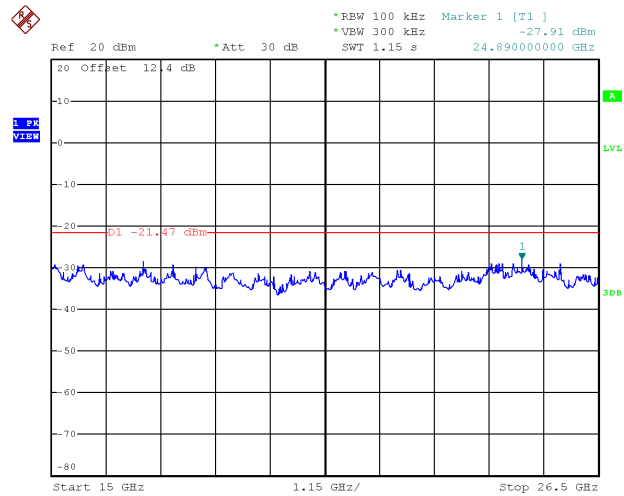


Date: 8.JUN.2017 15:24:48


TX HT20 mode CH11 (10 Harmonic of the frequency)

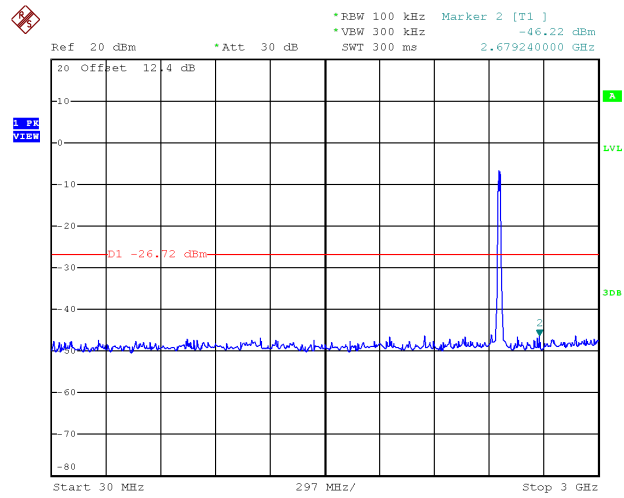

Date: 8.JUN.2017 15:27:01

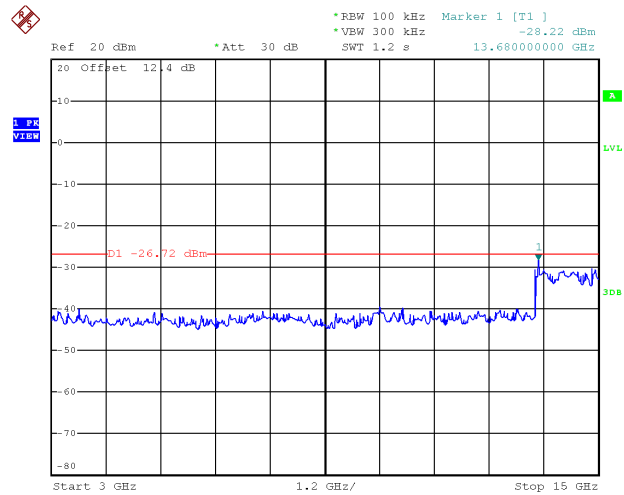


Date: 8.JUN.2017 15:27:07

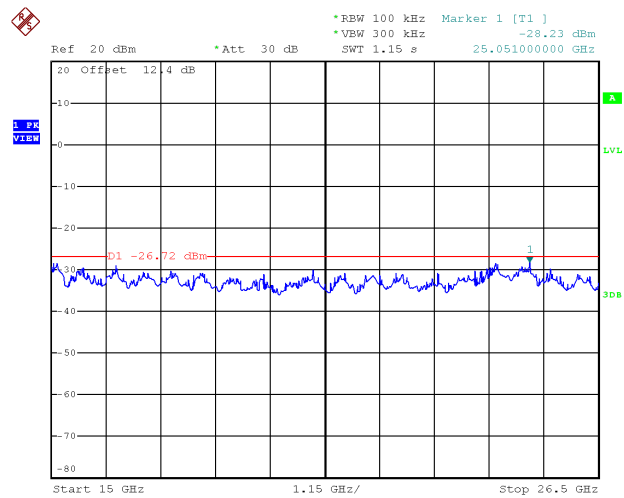

Date: 8.JUN.2017 15:27:14


Test Mode : TX N-20M Mode_ANT 2

TX HT20 mode CH01

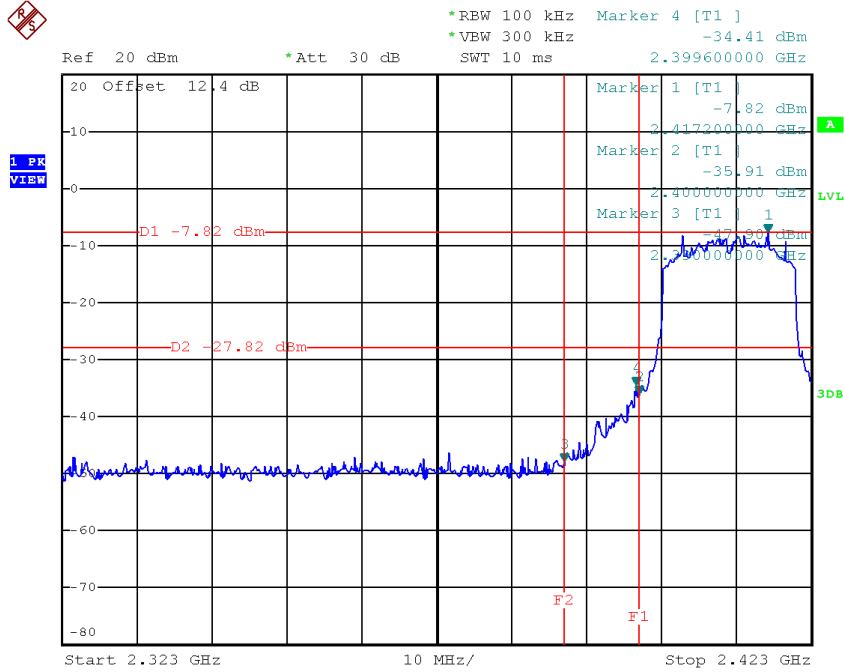


Date: 8.JUN.2017 15:29:26

TX HT20 mode CH11

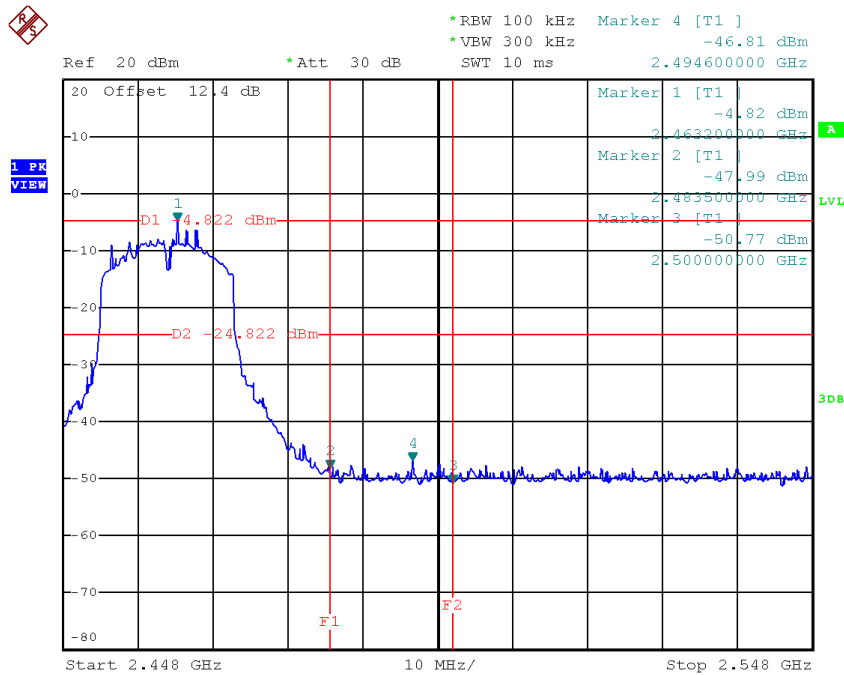


Date: 8.JUN.2017 15:33:22


TX HT20 mode CH01 (10 Harmonic of the frequency)

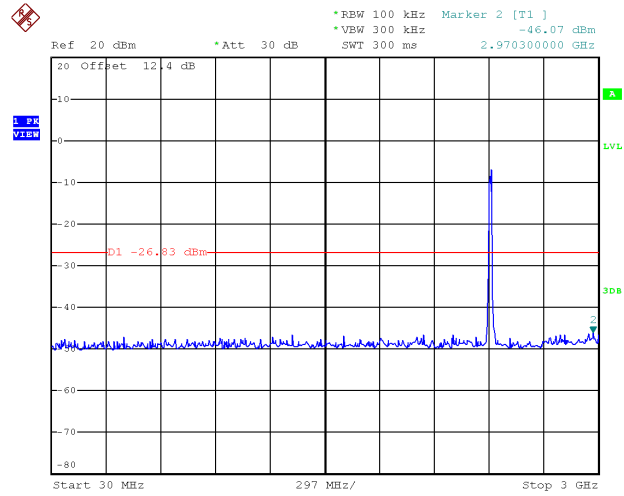

Date: 8.JUN.2017 15:28:49

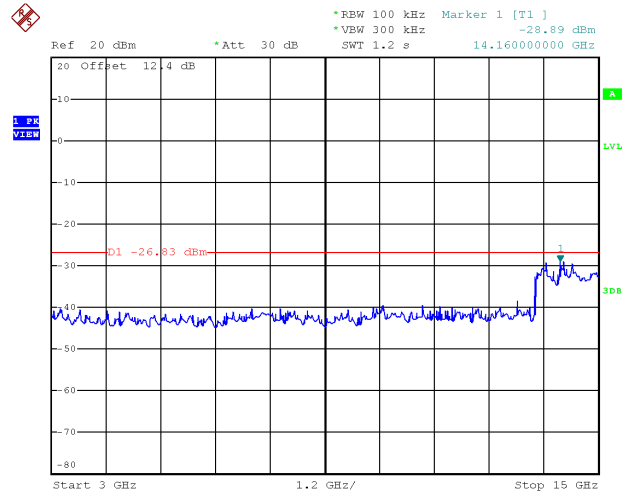


Date: 8.JUN.2017 15:28:56

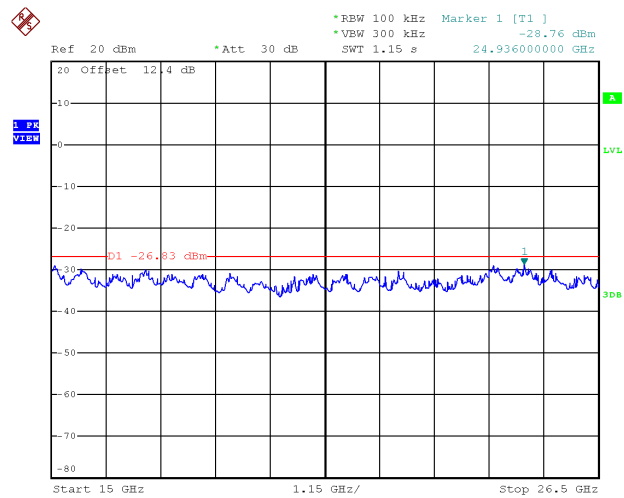


Date: 8.JUN.2017 15:29:02


TX HT20 mode CH06 (10 Harmonic of the frequency)

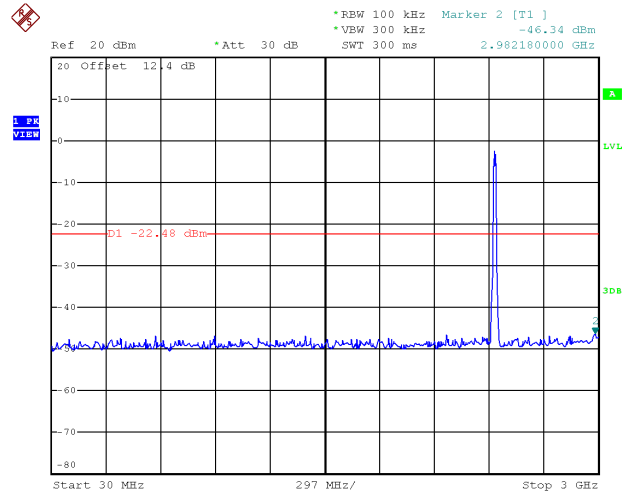

Date: 8.JUN.2017 15:31:21

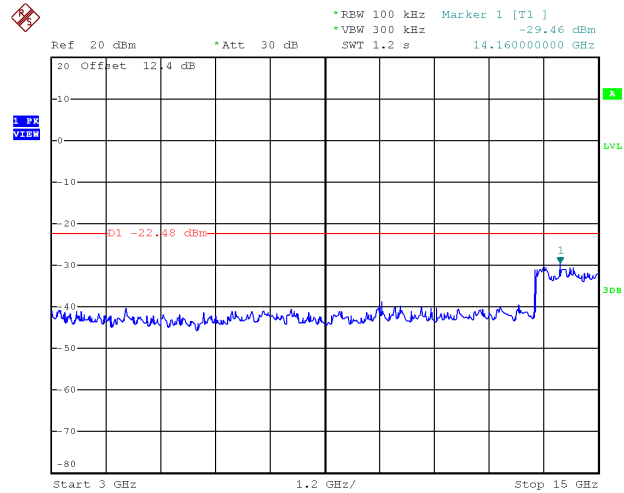


Date: 8.JUN.2017 15:31:27

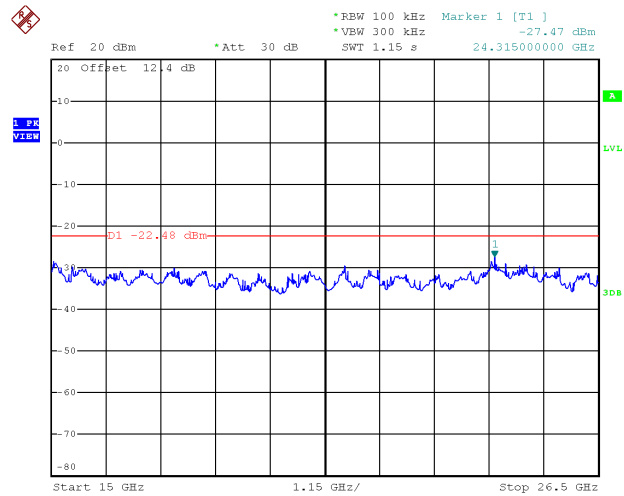


Date: 8.JUN.2017 15:31:34


TX HT20 mode CH11 (10 Harmonic of the frequency)

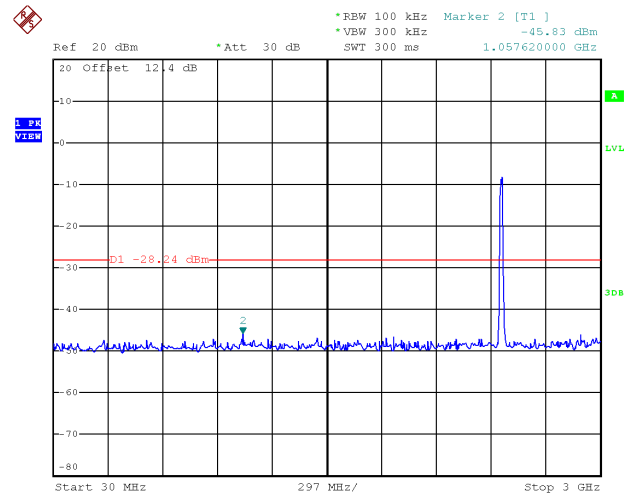

Date: 8.JUN.2017 15:33:02

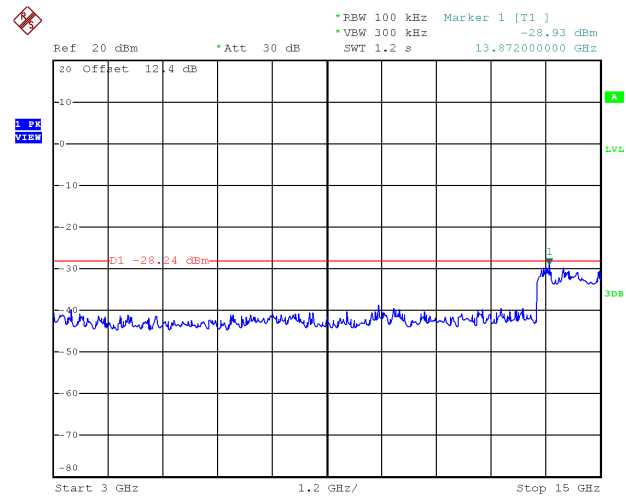

Date: 8.JUN.2017 15:33:09

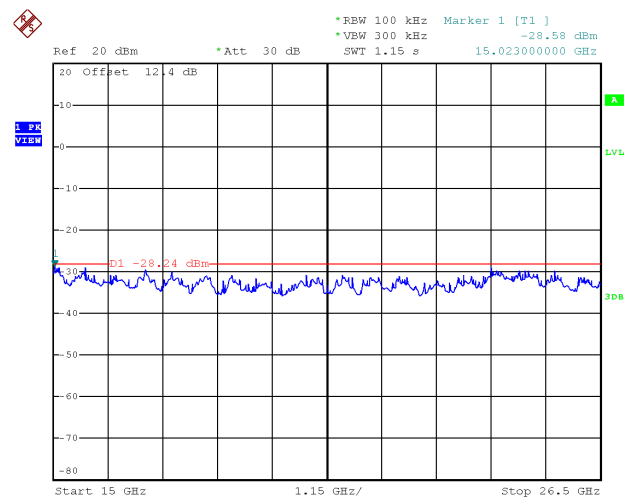


Date: 8.JUN.2017 15:33:16

ATTACHMENT H - POWER SPECTRAL DENSITY

Test Mode :TX B Mode_CH01/06/11_ANT 1

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-9.16	0.12	8.00	Complies
2437	-7.41	0.18	8.00	Complies
2462	-8.79	0.13	8.00	Complies

TX CH01

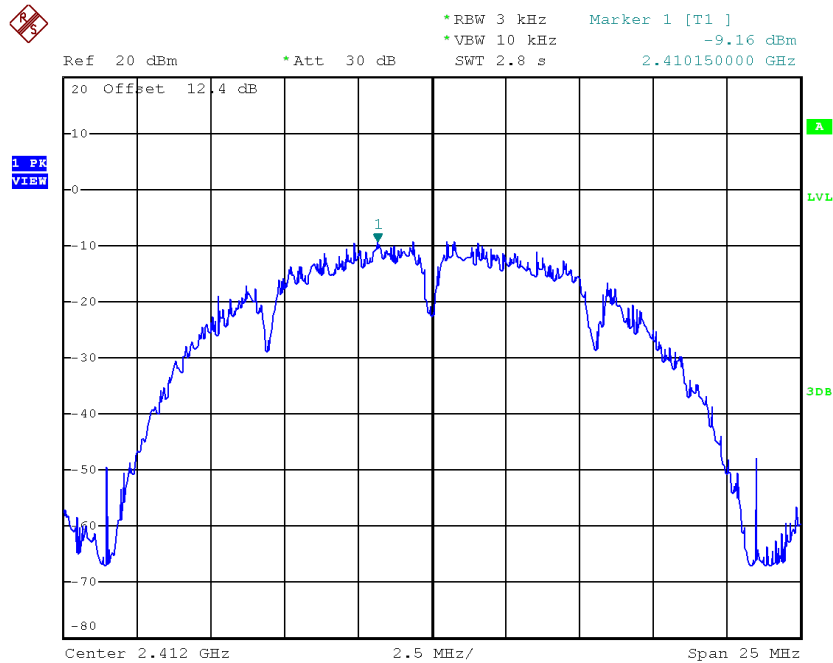


Date: 8.JUN.2017 15:01:26

TX CH06



1 PK
VIEW

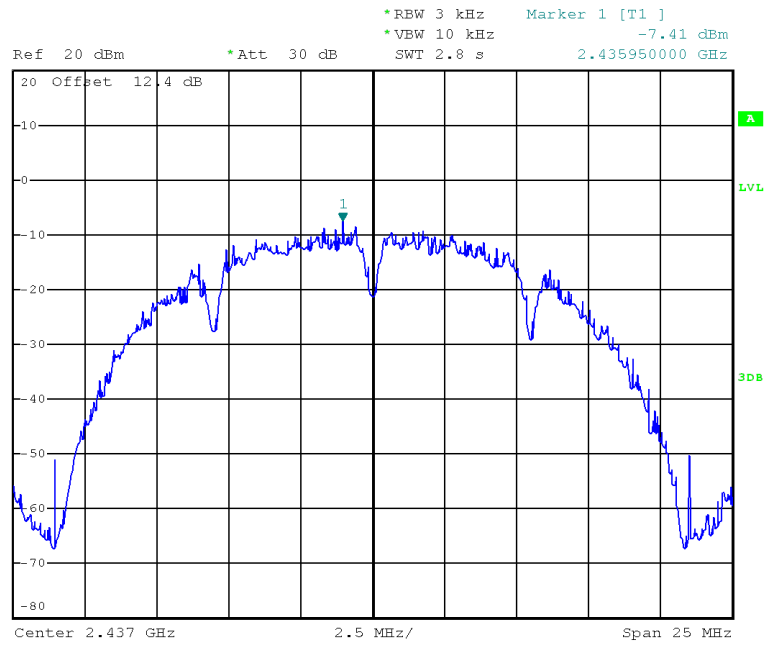


Date: 8.JUN.2017 15:03:55

TX CH11



1 PK
VIEW

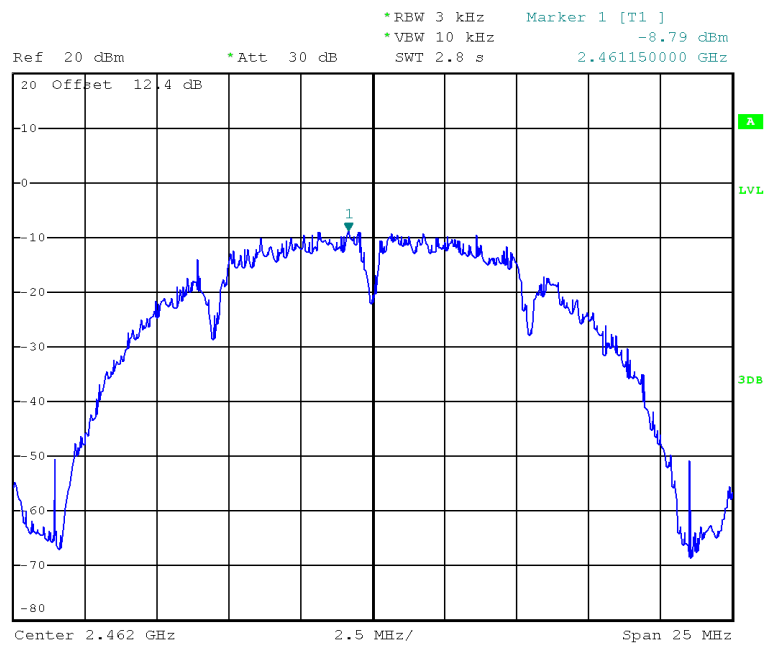


Date: 8.JUN.2017 15:05:55

Test Mode :TX G Mode_CH01/06/11_ANT 1

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-15.58	0.03	8.00	Complies
2437	-9.75	0.11	8.00	Complies
2462	-13.32	0.05	8.00	Complies

TX CH01

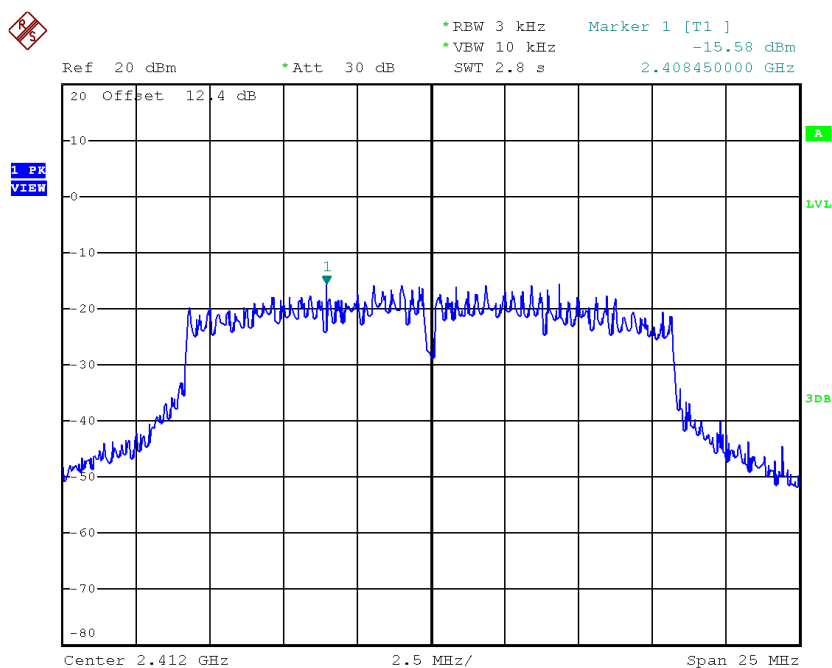


Date: 8.JUN.2017 15:07:06

TX CH06



1 PK
VIEW

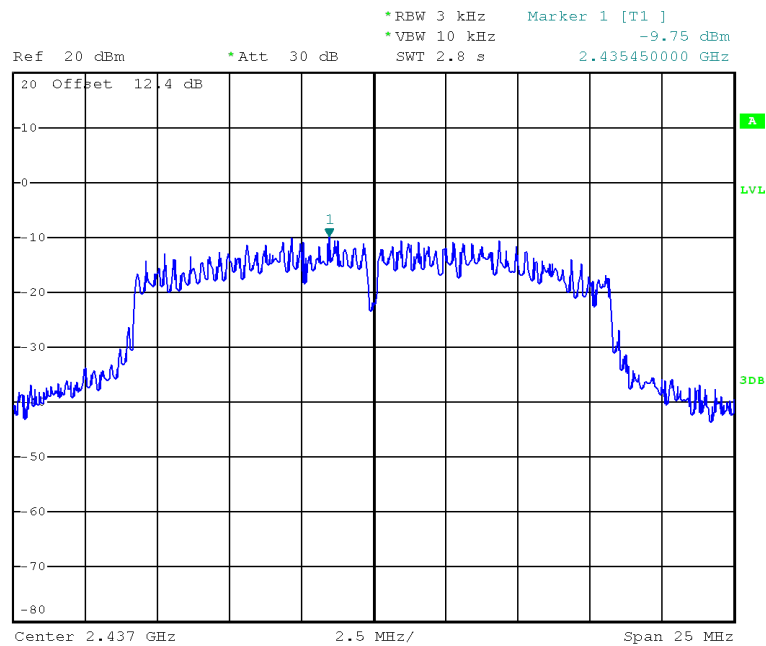


Date: 8.JUN.2017 15:09:07

TX CH11



1 PK
VIEW

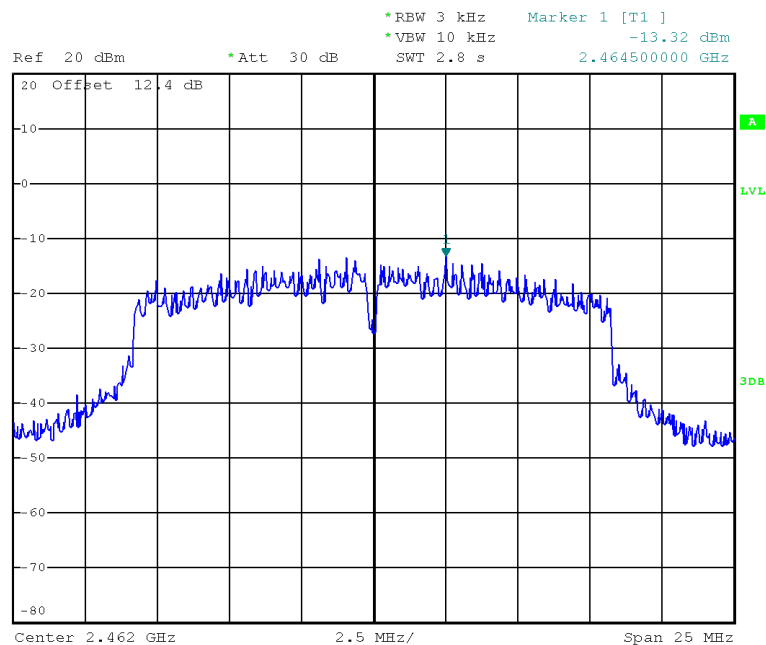


Date: 8.JUN.2017 15:21:16

Test Mode : TX N-20M Mode_CH01/06/11_ANT 1


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-18.46	0.01	8.00	Complies
2437	-13.74	0.04	8.00	Complies
2462	-17.40	0.02	8.00	Complies

TX CH01

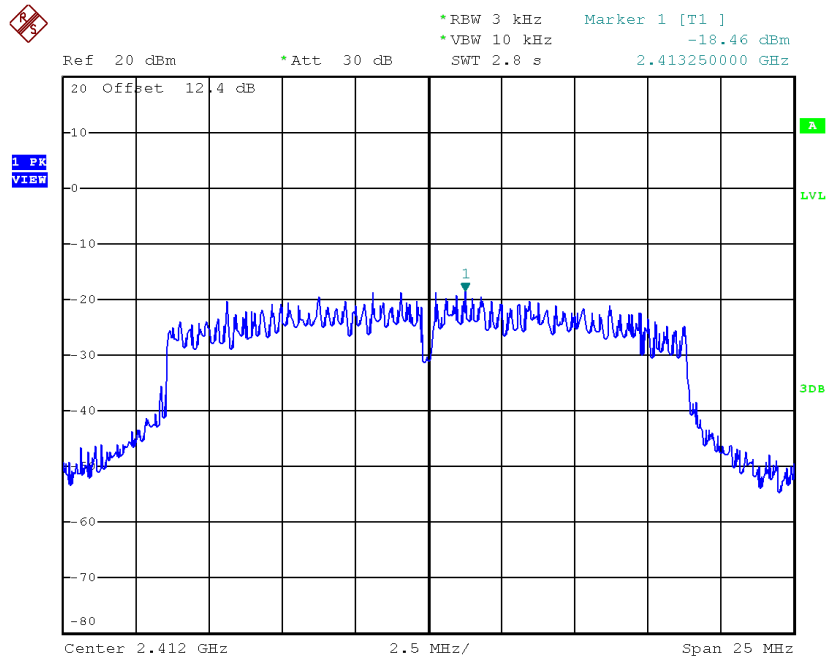


Date: 8.JUN.2017 15:23:05

TX CH06

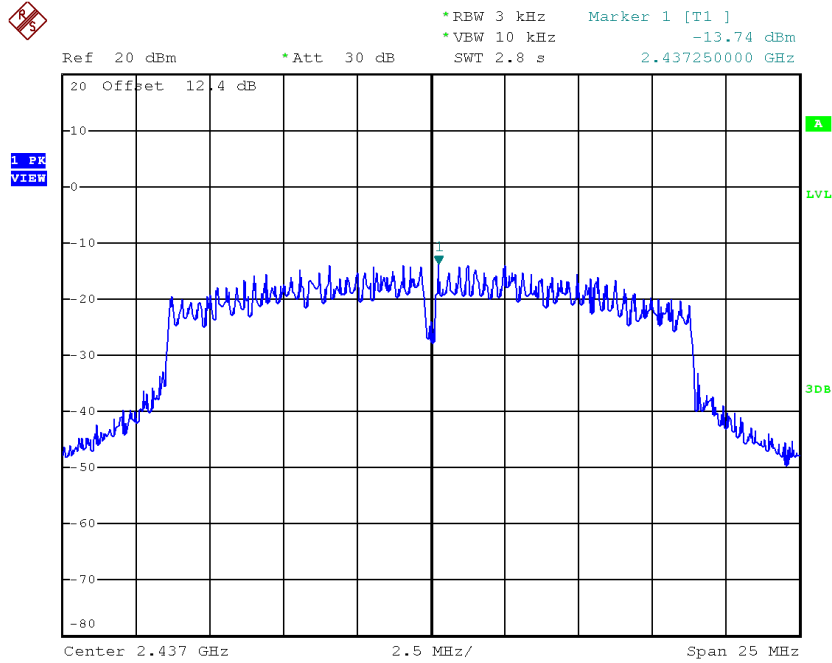

Date: 8.JUN.2017 15:24:56

TX CH11

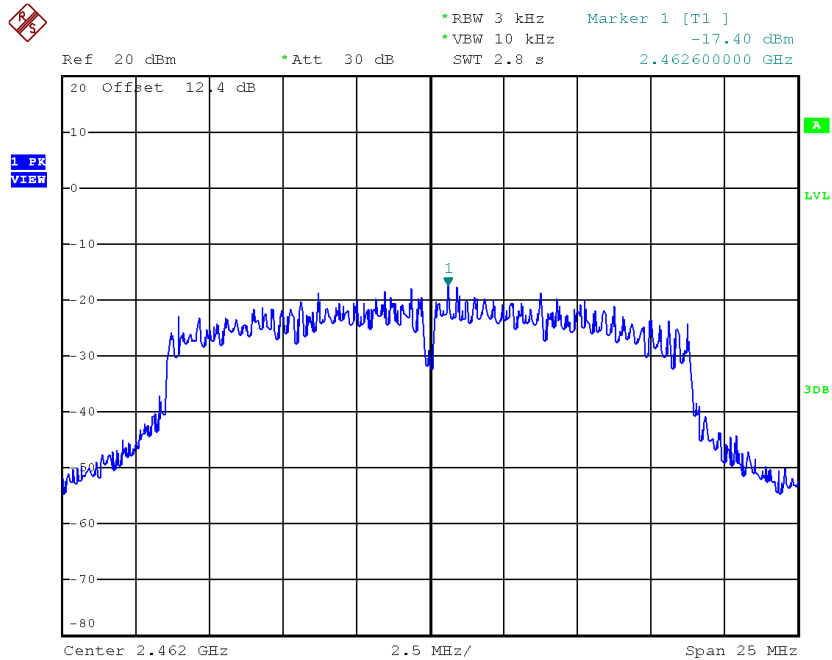


Date: 8.JUN.2017 15:27:46

Test Mode : TX N-20M Mode_CH01/06/11_ANT 2


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-20.55	0.01	8.00	Complies
2437	-13.78	0.04	8.00	Complies
2462	-19.31	0.01	8.00	Complies

TX CH01

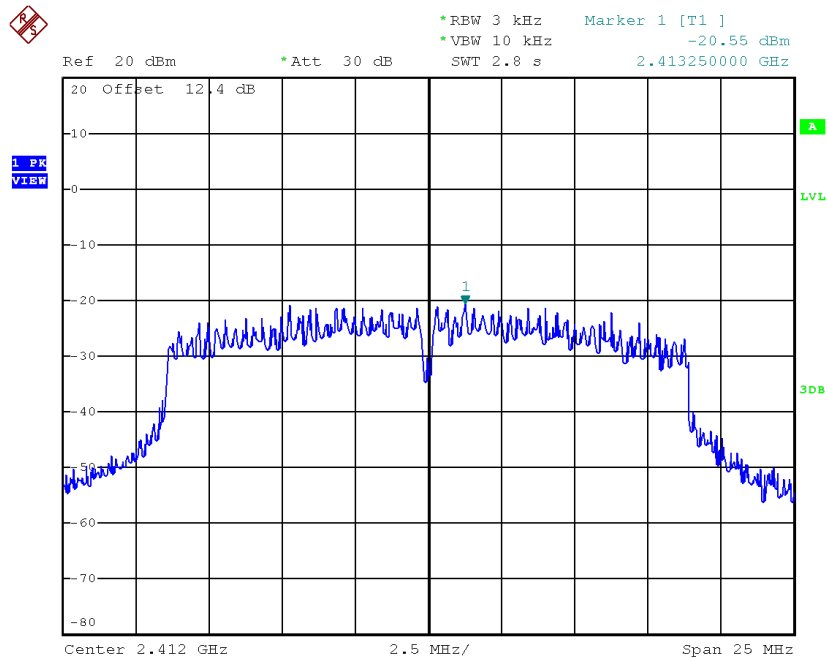


Date: 8.JUN.2017 15:29:35

TX CH06

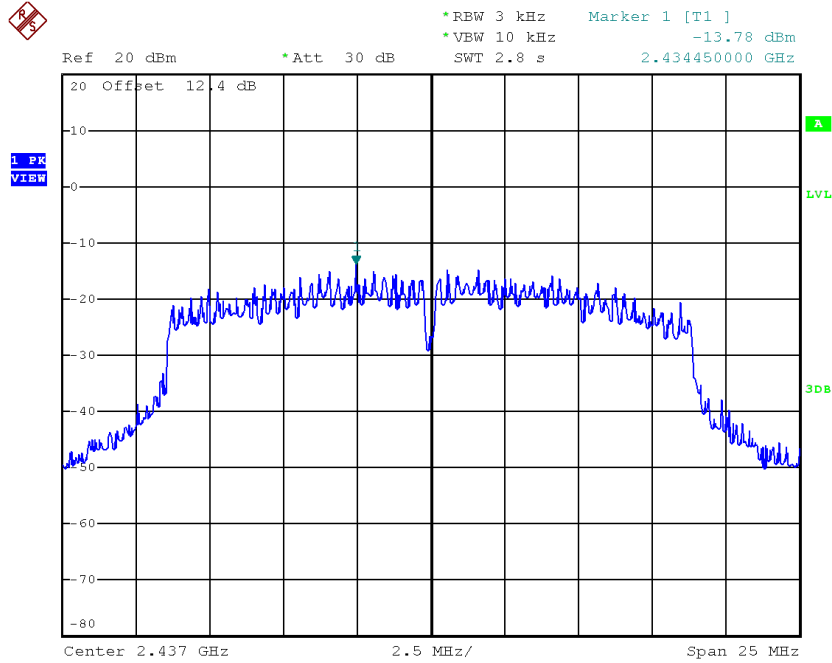

Date: 8.JUN.2017 15:31:42

TX CH11

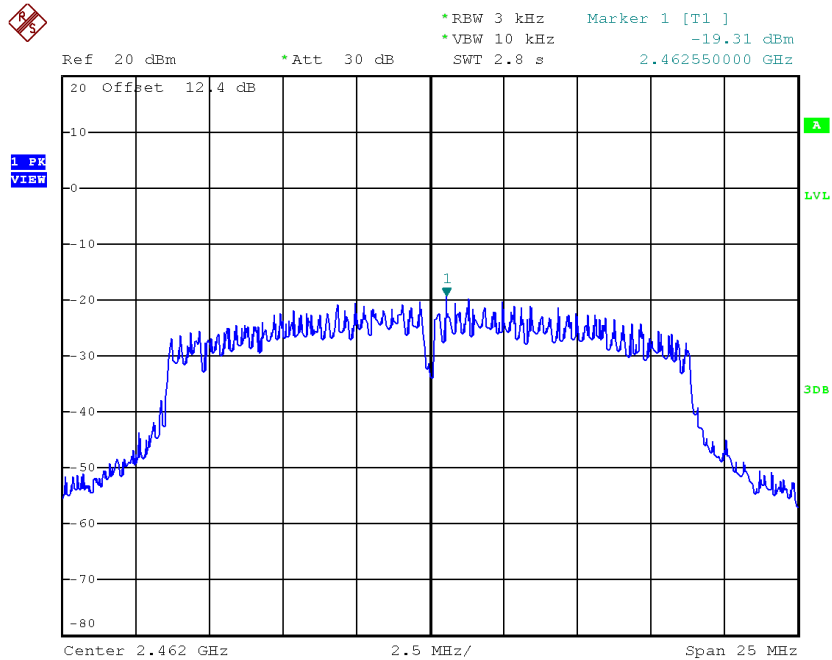

Date: 8.JUN.2017 15:33:31

Test Mode : TX N-20M Mode_CH01/06/11_Total

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-16.37	0.02	8.00	Complies
2437	-10.75	0.08	8.00	Complies
2462	-15.24	0.03	8.00	Complies