



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Digital Projector

Model: GS1, GS1+, GS541, GS3041, G310, G310T, G310JD, G310P,
G310E, G310H, G310F, G310N, G310J, GS1T, GS1JD, GS1AM,
GS1A, TS1, TS541, S3041

Brand: BenQ

Test Report Number:

C160622Z04-RP1-2

Issued for

BENQ Corporation

16 Jihu Road, Neihu, Taipei 114, Taiwan

Issued by:

COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.

No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,
Guan Lan Town, Baoan District, Shenzhen China

TEL: 86-755-28055000

FAX: 86-755-28055221

E-Mail: service@ccssz.com

Issued Date: August 11, 2016



TESTING CERT #2861.01

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc. This document may be altered or revised by Compliance Certification Services (Shenzhen) Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST, CNAS or any government agencies. The test result of this report relate only to the tested sample identified in this report.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	August 11, 2016	Initial Issue	ALL	Sabrina Wang



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. TEST METHODOLOGY	6
3.1 DESCRIPTION OF TEST MODES	6
4. FACILITIES AND ACCREDITATIONS	7
4.1 FACILITIES	7
4.2 ACCREDITATIONS	7
4.3 MEASUREMENT UNCERTAINTY	7
5. SETUP OF EQUIPMENT UNDER TEST	8
5.1 SETUP CONFIGURATION OF EUT	8
5.2 SUPPORT EQUIPMENT	8
6. FCC PART 15.247 REQUIREMENTS	9
6.1 20DB BANDWIDTH	9
6.2 ANTENNA GAIN	14
6.3 PEAK POWER	15
6.4 PEAK POWER SPECTRAL DENSITY	17
6.5 BAND EDGES MEASUREMENT	18
6.6 FREQUENCY SEPARATION	28
6.7 NUMBER OF HOPPING FREQUENCY	31
6.8 TIME OF OCCUPANCY (DWEELL TIME)	33
6.9 SPURIOUS EMISSIONS	40
6.10 POWERLINE CONDUCTED EMISSIONS	60



1. TEST RESULT CERTIFICATION

Product	Digital Projector
Model	GS1, GS1+, GS541, GS3041, G310, G310T, G310JD, G310P, G310E, G310H, G310F, G310N, G310J, GS1T, GS1JD, GS1AM, GS1A, TS1, TS541, S3041
Brand	BenQ
Tested	June 22~ August 11, 2016
Applicant	BENQ Corporation 16 Jihu Road, Neihu, Taipei 114, Taiwan
Manufacturer	BENQ Corporation 16 Jihu Road, Neihu, Taipei 114, Taiwan

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services (Shenzhen) Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Sunday Hu
Supervisor of EMC Dept.
Compliance Certification Services (Shenzhen)
Inc.

Reviewed by:

Ruby Zhang
Supervisor of Report Dept.
Compliance Certification Services (Shenzhen)
Inc.



2. EUT DESCRIPTION

Product	Digital Projector
Model Number	GS1, GS1+, GS541, GS3041, G310, G310T, G310JD, G310P, G310E, G310H, G310F, G310N, G310J, GS1T, GS1JD, GS1AM, GS1A, TS1, TS541, S3041
Brand	BenQ
Model Discrepancy	All models are identical with each other except for model designation and trading purpose.
Identify Number	C160622Z04-RP1-2
Received Date	June 22, 2016
Power Supply	DC19V supply by the adapter
Adapter Manufacturer / Model No.	JQH / NSA60ED-190300 Input: 100-240V ~ 50/60Hz 1.5A Output: DC19V 3A Max. AC Input Cable: Unshielded 1.50m DC Output Cable: Unshielded 1.50m
Battery Spec.	BP11 DC7.4V 59.2Wh 8000mAh
Frequency Range	2402 ~ 2480 MHz
Transmit Power	GFSK: 2.28dBm $\pi/4$ -DQPSK: 2.03dBm 8DPSK: 2.14dBm
Modulation Technique	FHSS (GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8DPSK for 3Mbps)
Number of Channels	79 Channels
Antenna Specification	Embedded Antenna with 1.8dBi gain (Max)
Temperature Range	0°C ~ +40°C

Note: This submittal(s) (test report) is intended for FCC ID: JVPGS1 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

	Hardware Version	Software Version
Product	9344C,V5.0	v0.0.0.18_ww
Radio	JEDI.L0.MP1.mt76x2u.wifi.v2.1	zk-7662M v1.40
Test	N/A	LZ-RF / CCS-SZ-3A2
RF power setting in TEST	N/A	MT7662_BT_v0.0.2.0



3. TEST METHODOLOGY

3.1 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: Charge with adapter (120V/60Hz)	<input checked="" type="checkbox"/>
	Mode 2: Charge with adapter (240V/50Hz)	<input checked="" type="checkbox"/>
Radiated Emission	Mode 1: TX	<input checked="" type="checkbox"/>

Note:

1. Channel Low (2402MHz), Mid (2441MHz) and High (2480MHz) were chosen for pre-testing for GFSK, $\pi/4$ -DQPSK and 8DPSK, GFSK and 8DPSK were the worse case and print in the report.
2. Radiated band edges were tested with both fixed and hopping mode, the fixed mode was the worst case and recorded in the report.



4. FACILITIES AND ACCREDITATIONS

4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☒ **No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,
Guan Lan Town, Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.10:2013, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

4.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
China	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI(C-4815, R-4320, T-2317, G-10624)
Canada	INDUSTRY CANADA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccssz.com>

4.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site : 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Conducted Emissions	+/-3.6836dB
Band Width	178kHz
Peak Output Power MU	+/-1.906dB
Band Edge MU	+/-0.182dB
Channel Separation MU	416.178Hz
Duty Cycle MU	0.054ms
Frequency Stability MU	226Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



5. SETUP OF EQUIPMENT UNDER TEST

5.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

5.2 SUPPORT EQUIPMENT

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	Notebook	E335	R9-WN1EF	DoC	Thinkpad	Unshielded 1.50m	Shielded 1.60m (AC Cable) Unshielded 1.80m (DC Cable)

Notes:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



6. FCC PART 15.247 REQUIREMENTS

6.1 20DB BANDWIDTH


None; for reporting purpose only.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	02/21/2016	02/20/2017

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT, then connect a low loss RF cable from antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Span=3MHz, Sweep = auto.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the test channels are investigated.

TEST RESULTS


No non-compliance noted




Test plot

GFSK

20dB Bandwidth(CH Low)

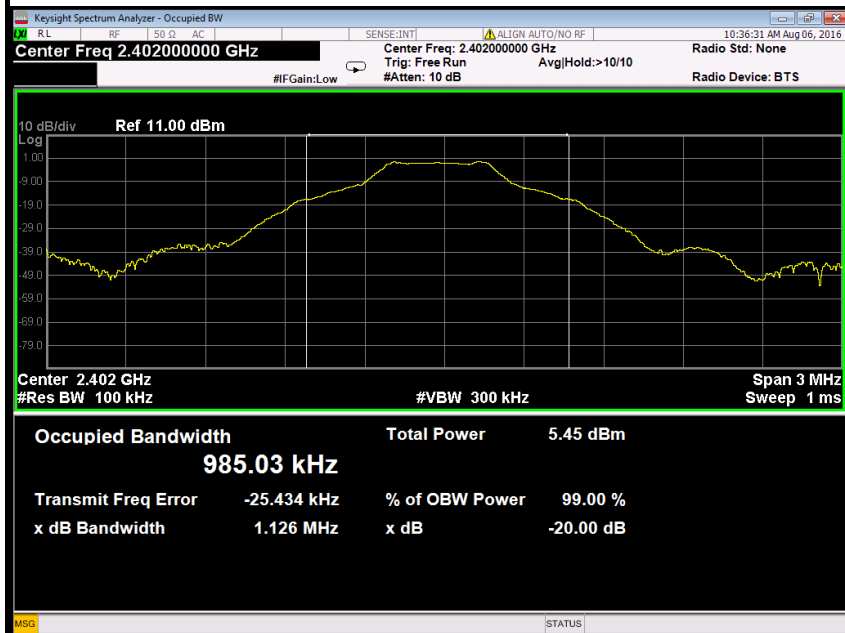


20dB Bandwidth (CH Mid)

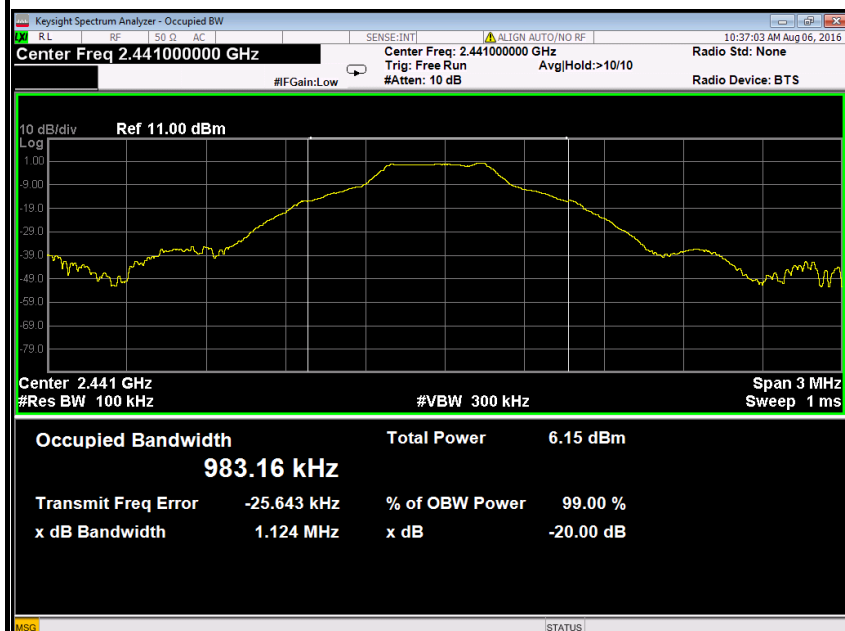



20dB Bandwidth (CH High)

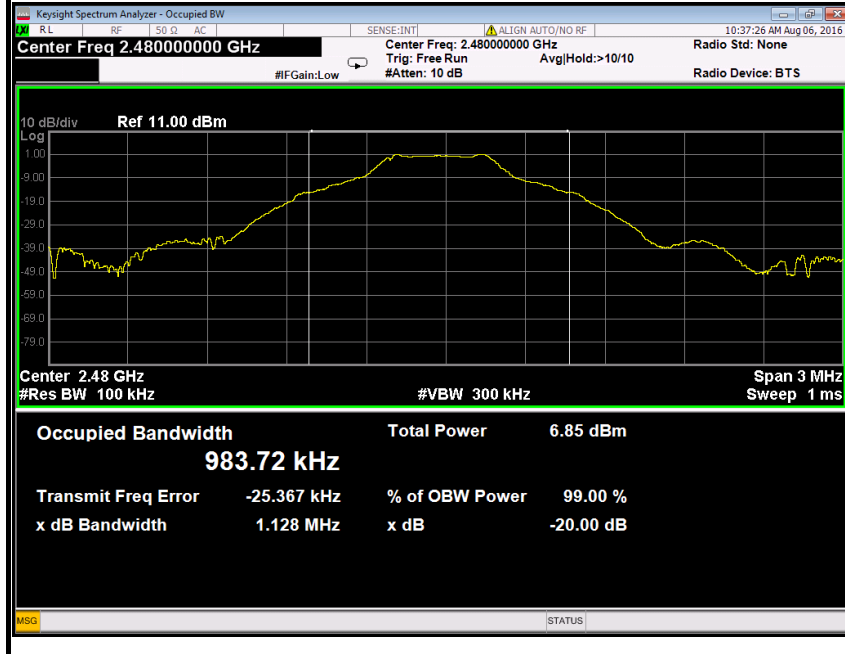





Test plot

8DPSK

20dB Bandwidth (CH Low)

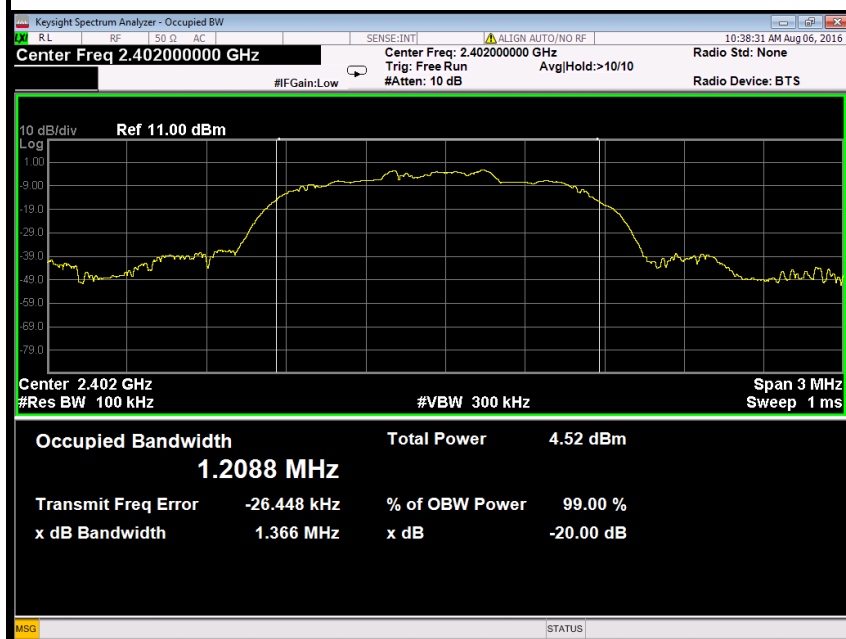


20dB Bandwidth (CH Mid)

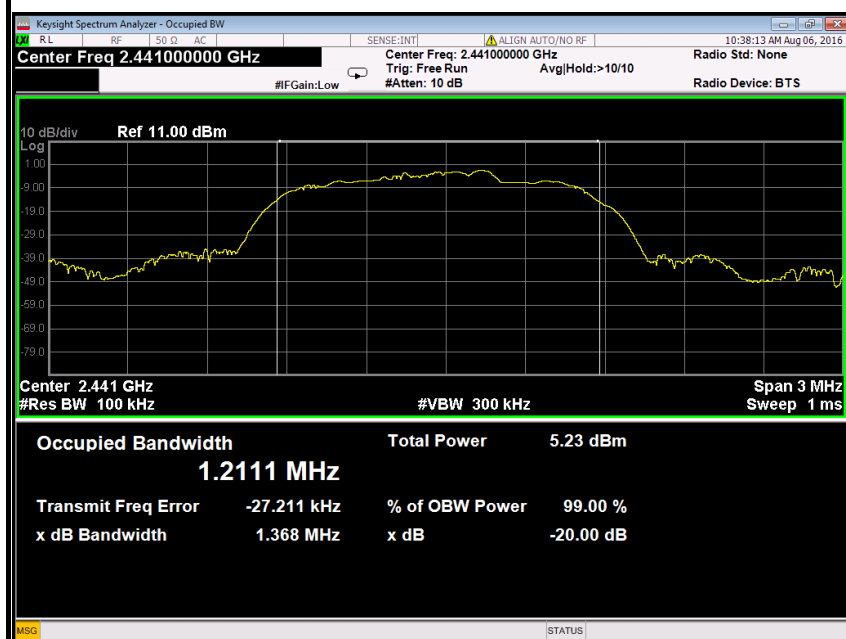



20dB Bandwidth (CH High)

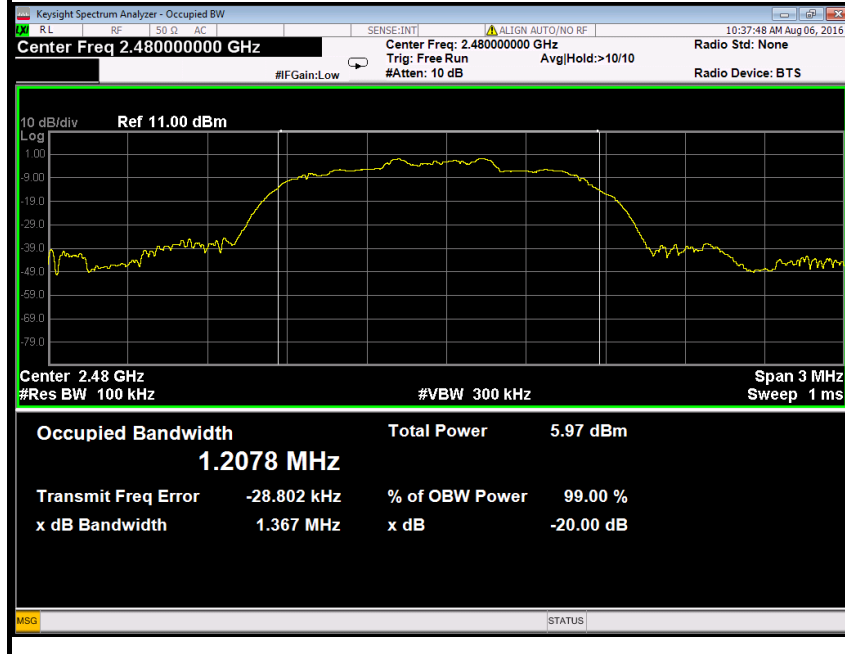



6.2 ANTENNA GAIN

MEASUREMENT

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal BT devices, the GFSK mode is used.

MEASUREMENT PARAMETERS

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz
Trace-Mode	Max hold

LIMITS

FCC	IC
Antenna Gain	
6 dBi	

TEST RESULTS

Please refer to the internal photo.



6.3 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:


1. For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.
3. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Power Meter	Anritsu	ML2495A	1204003	02/21/2016	02/20/2017
Power Sensor	Anritsu	MA2411B	1126150	02/21/2016	02/20/2017

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.



TEST RESULTS

No non-compliance noted

Test Data

GFSK

Channel	Frequency (MHz)	Reading Power	Cable loss (dB)	Output Power (dBm)	Output Power (W)	Limit (mW)	Peak /AVG	Result
Low	2402	-2.07	3.50	1.43	0.00139	0.125	peak	PASS
Mid	2441	-1.97	3.50	1.53	0.00142			PASS
High	2480	-1.22	3.50	2.28	0.00169			PASS
Low	2402	-3.17	3.50	0.33	0.00108	0.125	AVG	PASS
Mid	2441	-3.05	3.50	0.45	0.00111			PASS
High	2480	-2.40	3.50	1.10	0.00129			PASS

8DPSK

Channel	Frequency (MHz)	Reading Power (dBm)	Cable loss (dB)	Output Power (dBm)	Output Power (W)	Limit (mW)	Peak /AVG	Result
Low	2402	-2.12	3.50	1.38	0.00137	0.125	peak	PASS
Mid	2441	-1.74	3.50	1.76	0.00150			PASS
High	2480	-1.36	3.50	2.14	0.00164			PASS
Low	2402	-5.53	3.50	-2.03	0.00063	0.125	AVG	PASS
Mid	2441	-4.96	3.50	-1.46	0.00071			PASS
High	2480	-4.55	3.50	-1.05	0.00079			PASS



6.4 PEAK POWER SPECTRAL DENSITY

LIMIT


1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	02/21/2016	02/20/2017

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST RESULTS

Not applicable. Since EUT is the Bluetooth device.



6.5 BAND EDGES MEASUREMENT


LIMIT

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	02/21/2016	02/20/2017
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2016	02/20/2017
Amplifier	EMEC	EM330	060661	03/18/2016	03/17/2017
High Noise Amplifier	Agilent	8449B	3008A01838	02/21/2016	02/20/2017
Loop Antenna	COM-POWER	AL-130	121044	09/25/2015	09/24/2016
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/21/2016	02/20/2017
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/28/2016	02/27/2017
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/28/2016	02/27/2017
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/21/2016	02/20/2017
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

Test Configuration

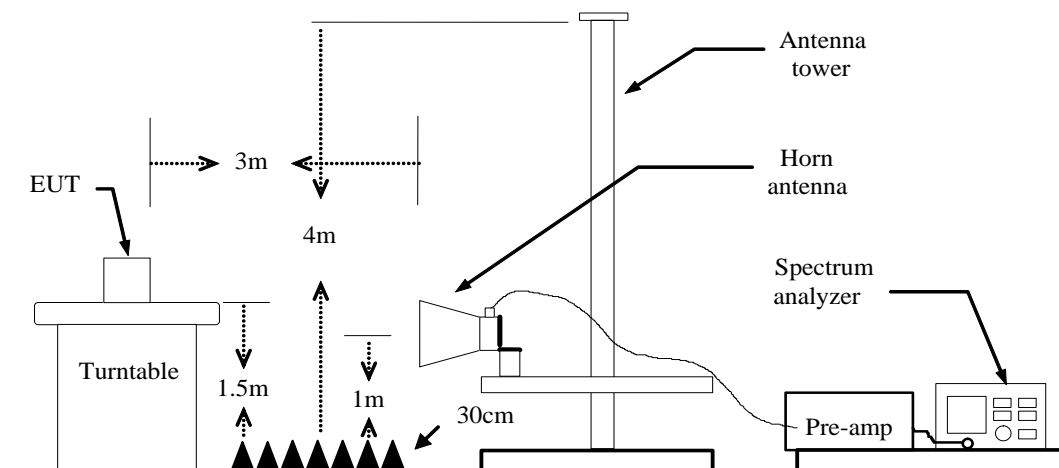



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz / VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=330Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.



TEST RESULTS

Refer to attach spectrum analyzer data chart.




Test Data (GFSK)

Band Edges (CH-Low)

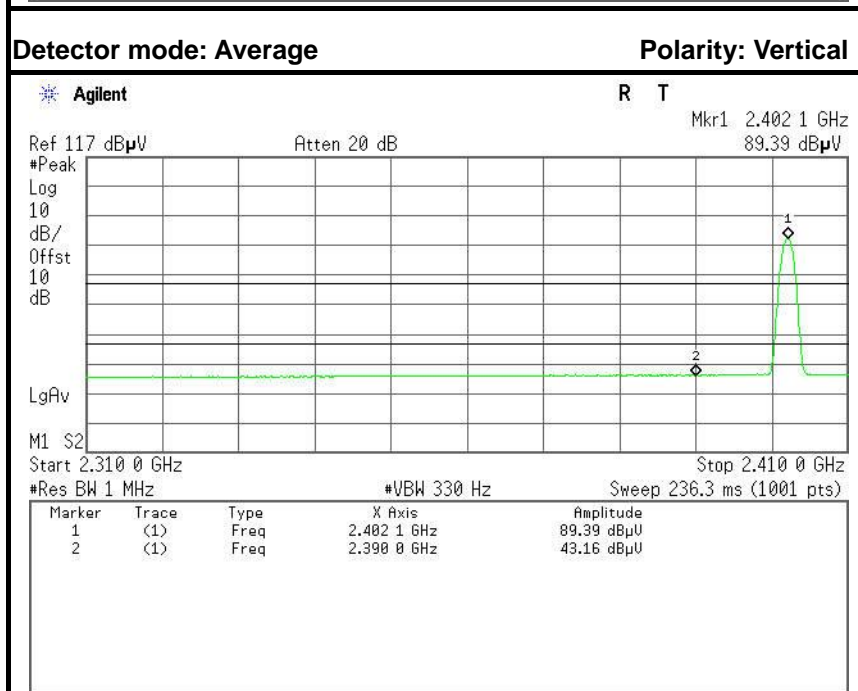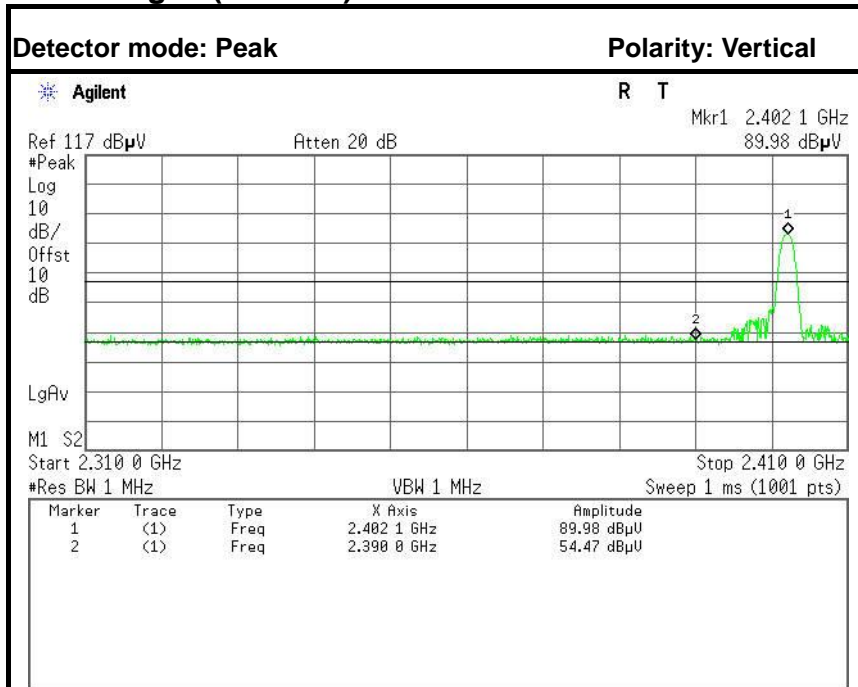



No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	47.87	-6.60	54.47	74.00	-19.53	Peak	Vertical
2	2390.0000	36.56	-6.60	43.16	54.00	-10.84	Average	Vertical

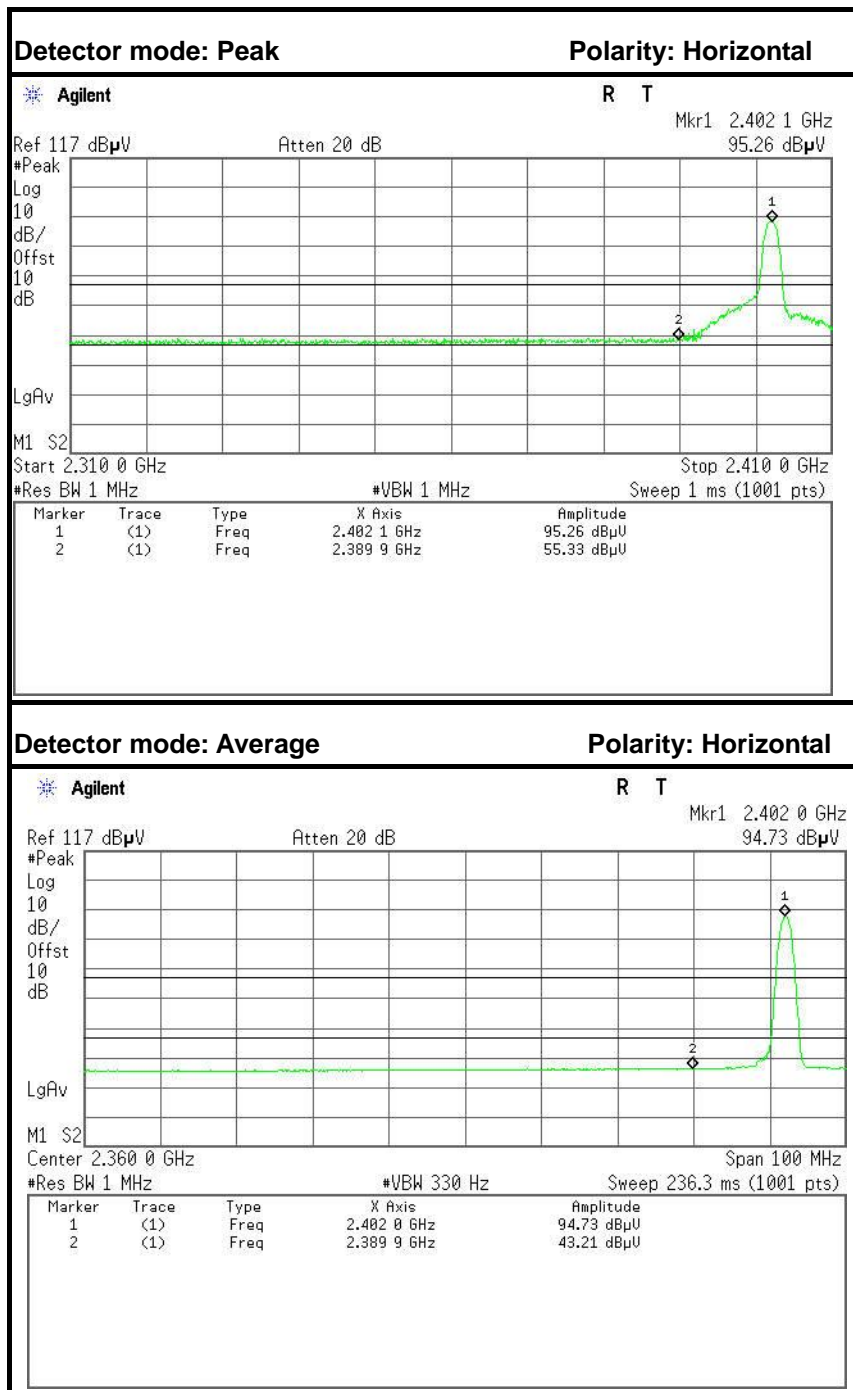


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	48.73	-6.60	55.33	74.00	-18.67	Peak	Horizontal
2	2390.0000	36.61	-6.60	43.21	54.00	-10.79	Average	Horizontal



Band Edges (CH-High)

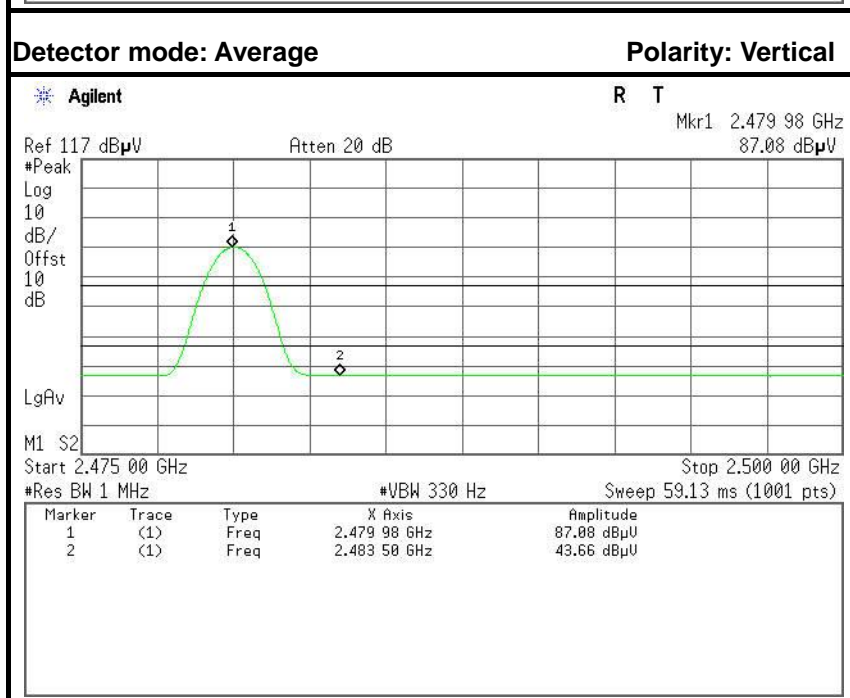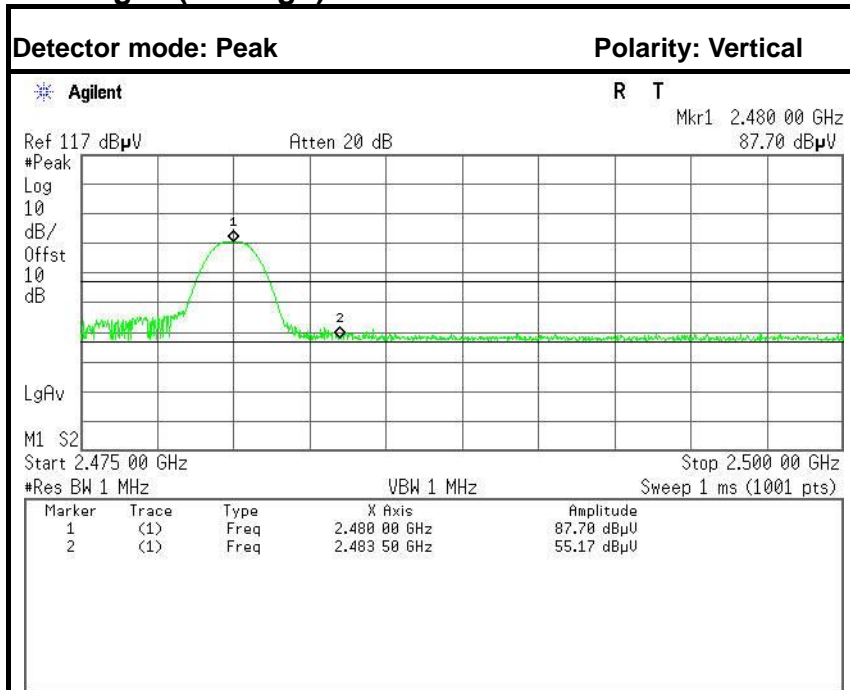

No.	Frequency (MHz)	Reading (dBμV)	Corrected (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	48.93	-6.24	55.17	74.00	-18.83	Peak	Vertical
2	2483.5000	37.42	-6.24	43.66	54.00	-10.34	Average	Vertical


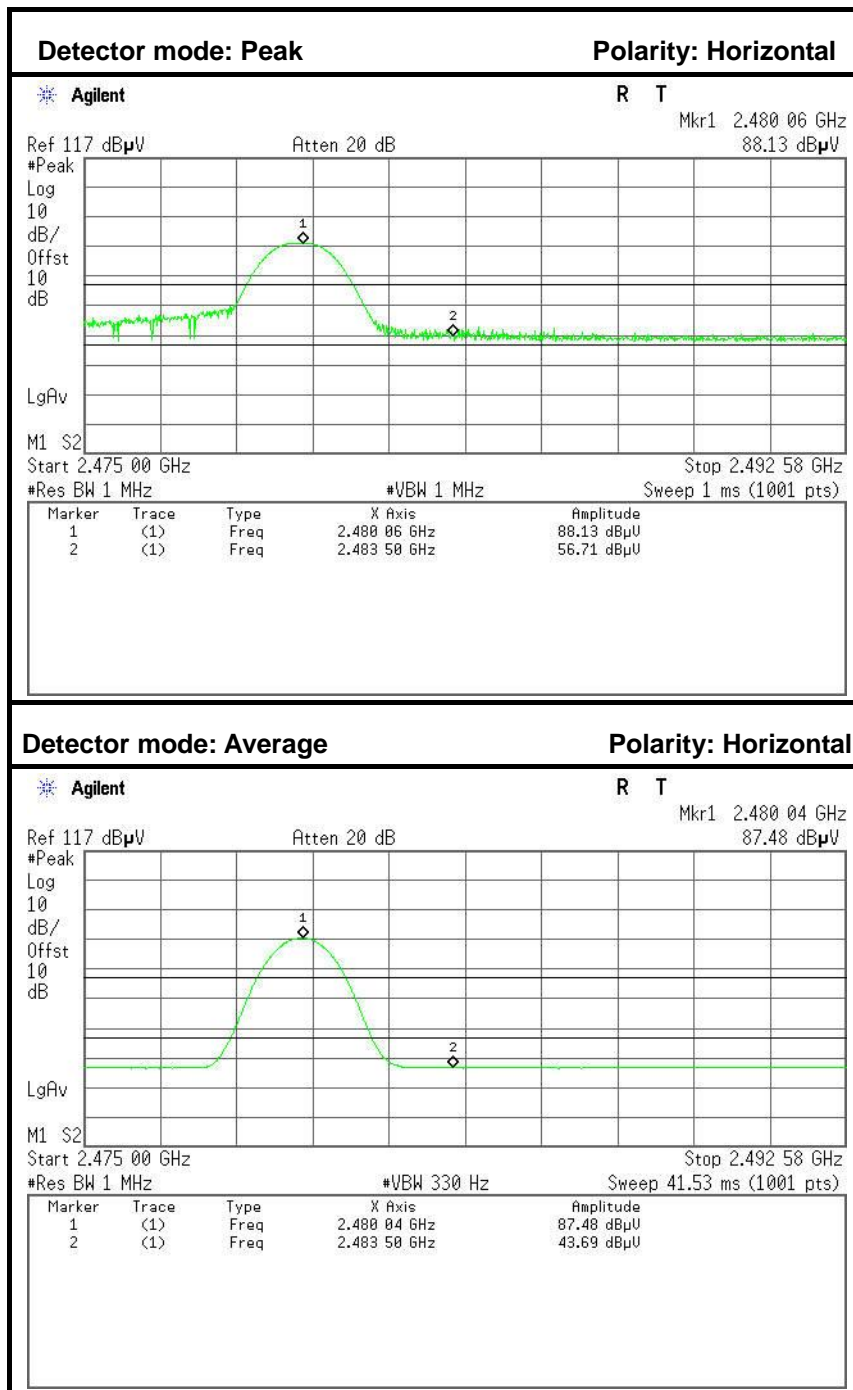


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	50.47	-6.24	56.71	74.00	-17.29	Peak	Horizontal
2	2483.5000	37.45	-6.24	43.69	54.00	-10.31	Average	Horizontal




8DPSK

Band Edges (CH-Low)

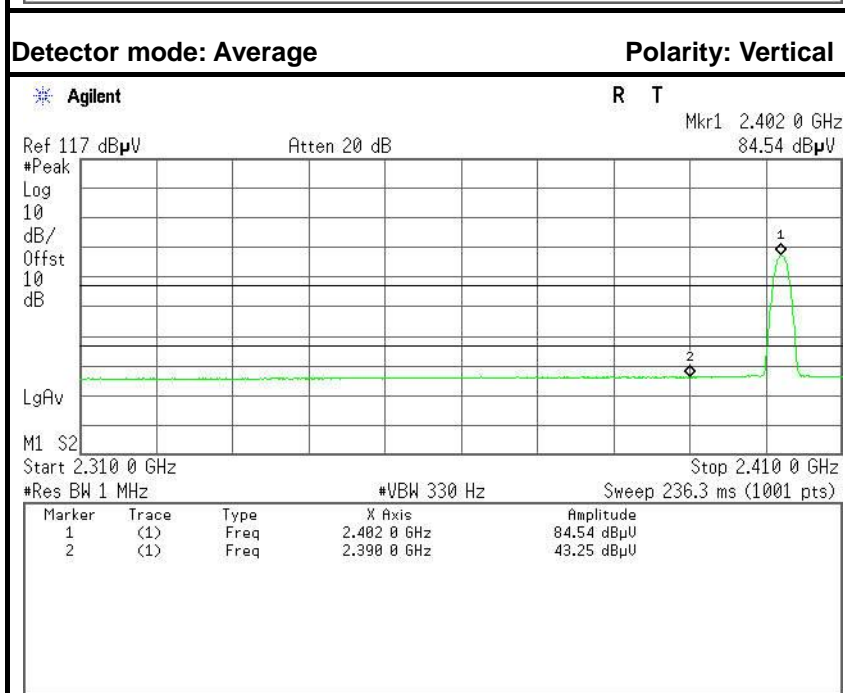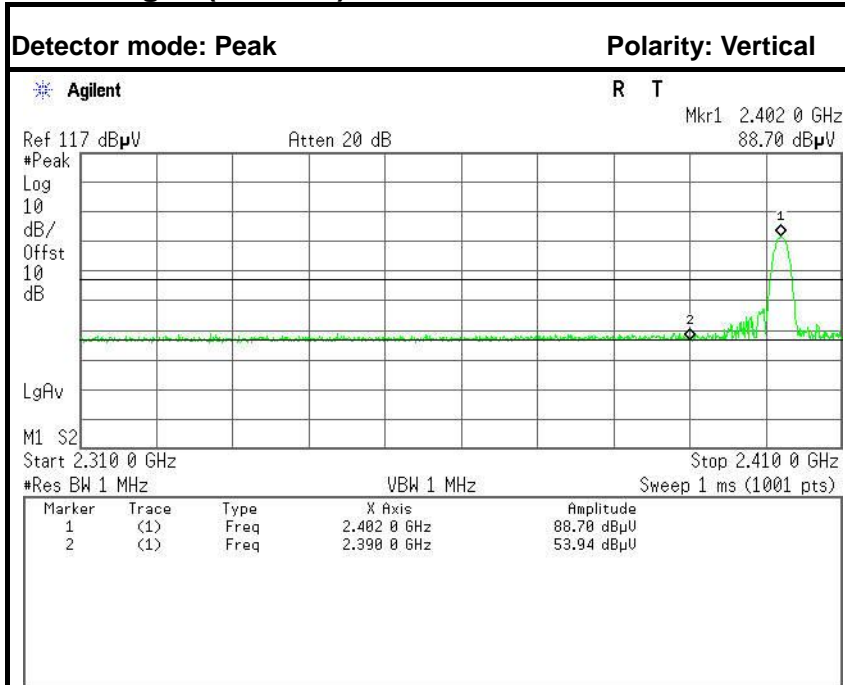



No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	47.34	-6.60	53.94	74.00	-20.06	Peak	Vertical
2	2390.0000	36.65	-6.60	43.25	54.00	-10.75	Average	Vertical

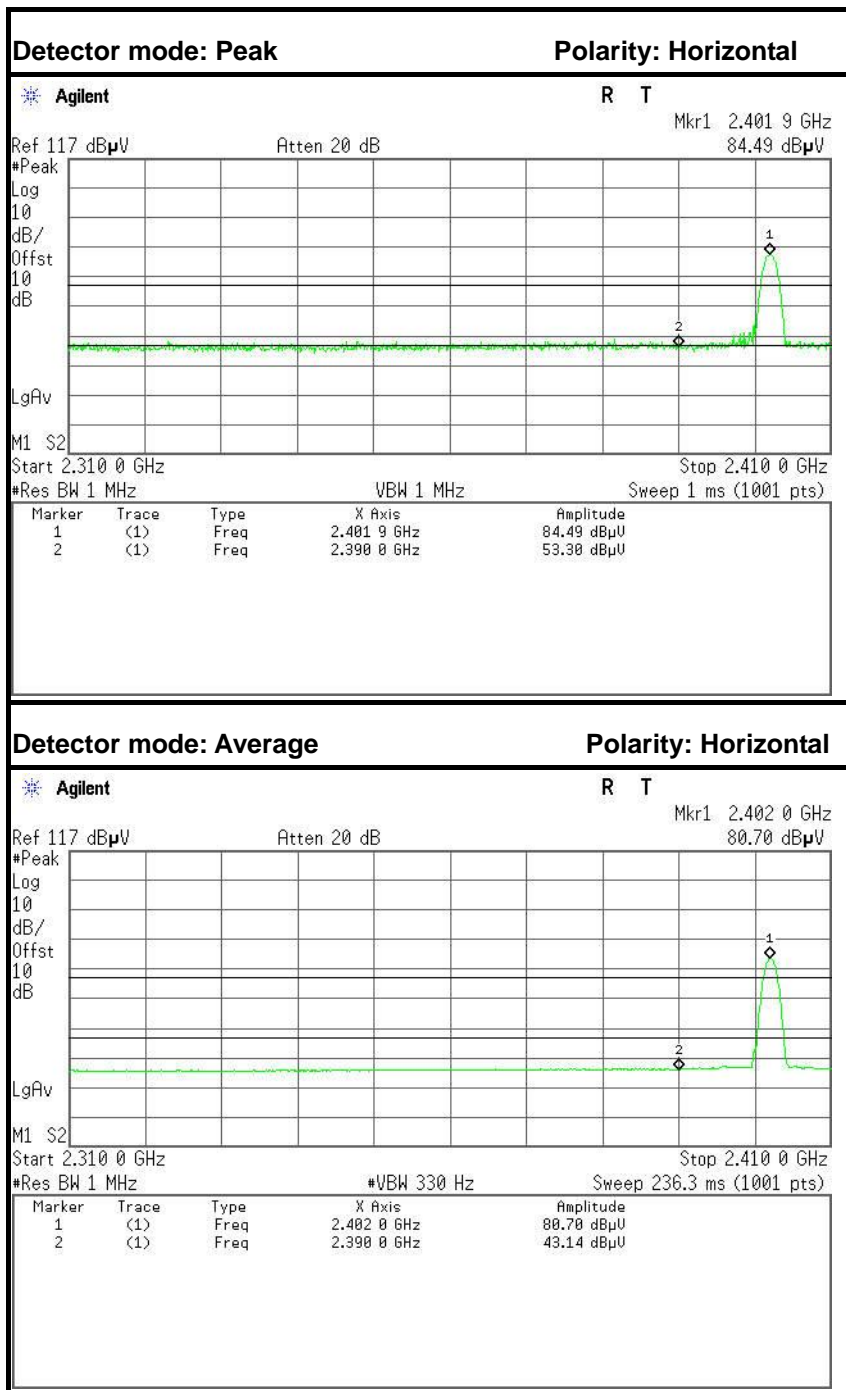


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	46.70	-6.60	53.30	74.00	-20.70	Peak	Horizontal
2	2390.0000	36.54	-6.60	43.14	54.00	-10.86	Average	Horizontal



Band Edges (CH-High)

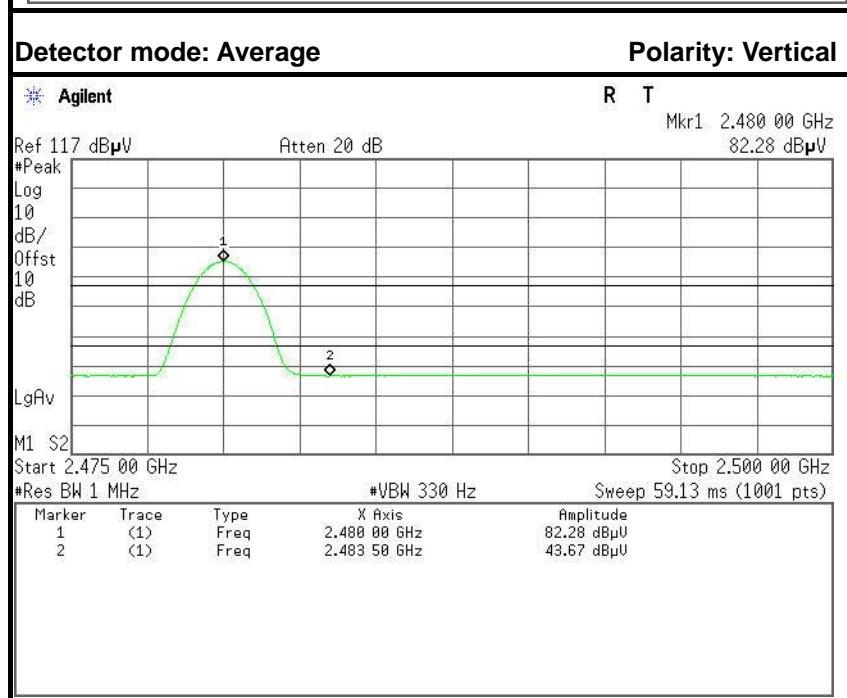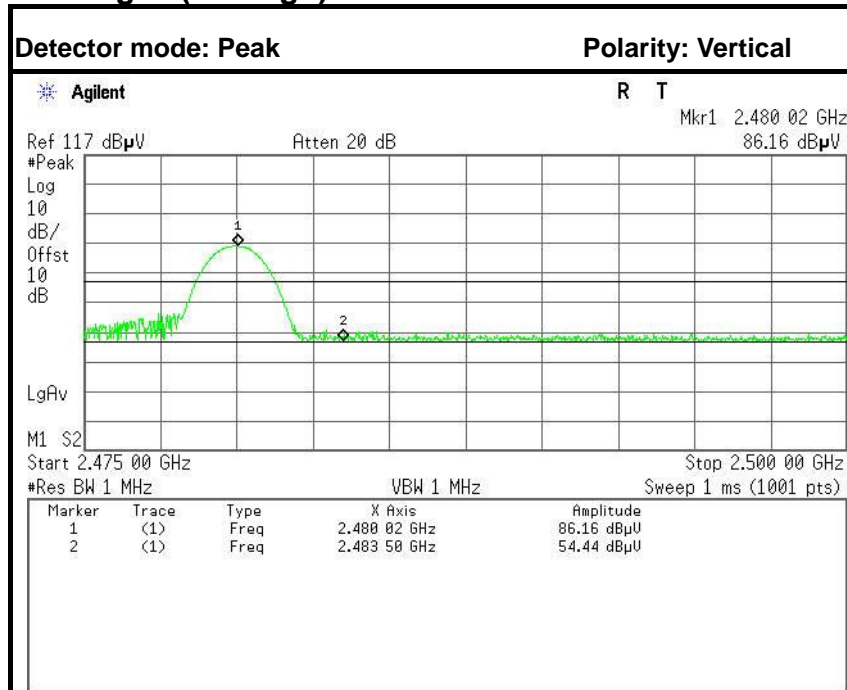

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	48.20	-6.24	54.44	74.00	-19.56	Peak	Vertical
2	2483.5000	37.43	-6.24	43.67	54.00	-10.33	Average	Vertical

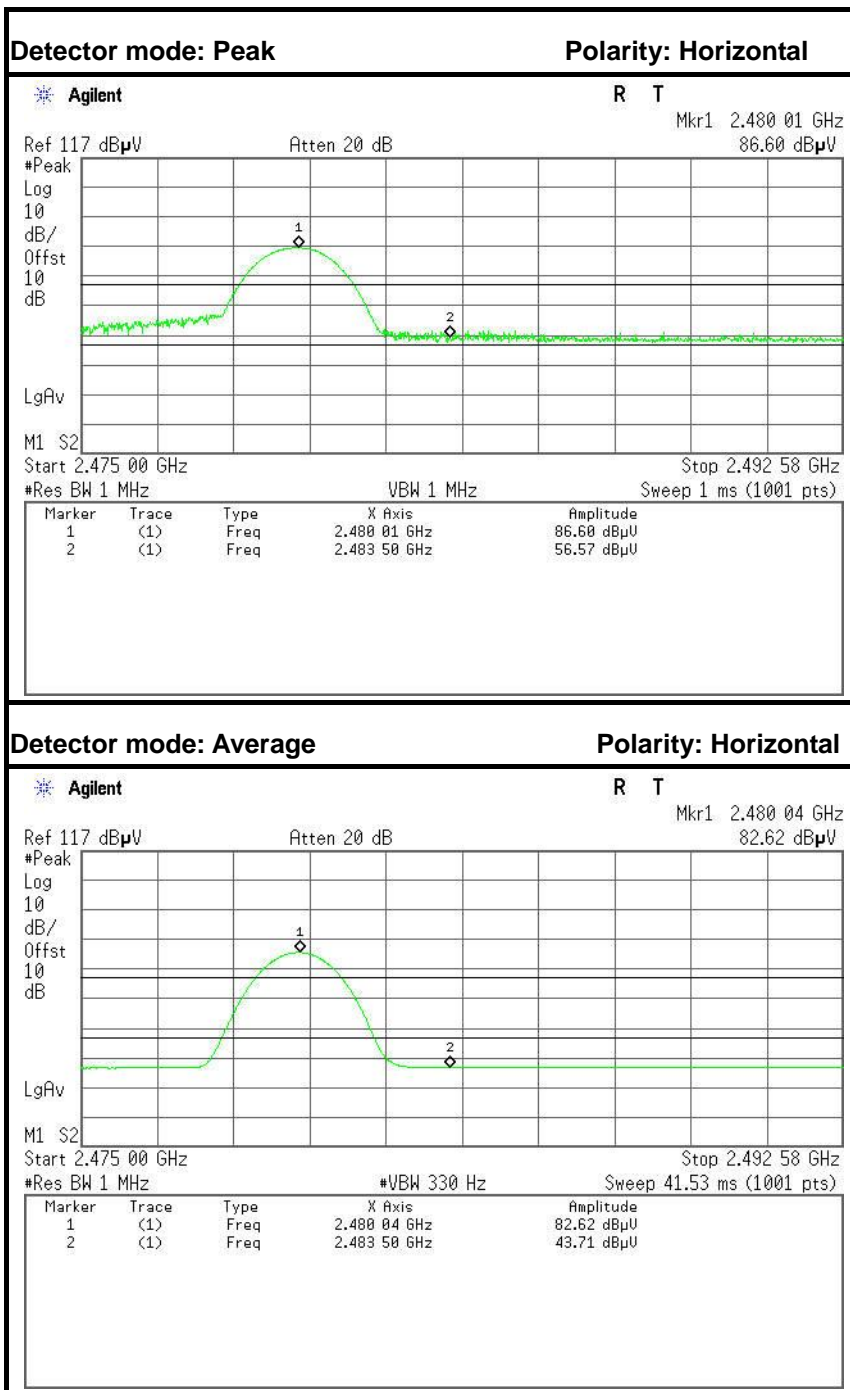

No.	Frequency (MHz)	Reading (dBUV)	Corrected (dB)	Result (dBUV)	Limit (dBUV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	50.33	-6.24	56.57	74.00	-17.43	Peak	Horizontal
2	2483.5000	37.47	-6.24	43.71	54.00	-10.29	Average	Horizontal



6.6 FREQUENCY SEPARATION

LIMIT


According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	02/28/2015	02/27/2016

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW=30kHz, VBW=30kHz, Adjust Span to 4 MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

TEST RESULTS

No non-compliance noted

Test Data

GFSK

Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	671.333	> Two-thirds of the 20 dB Bandwidth	Pass

8DPSK


Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	878.000	> Two-thirds of the 20 dB Bandwidth	Pass




GFSK



Test Plot

Measurement of Channel Separation

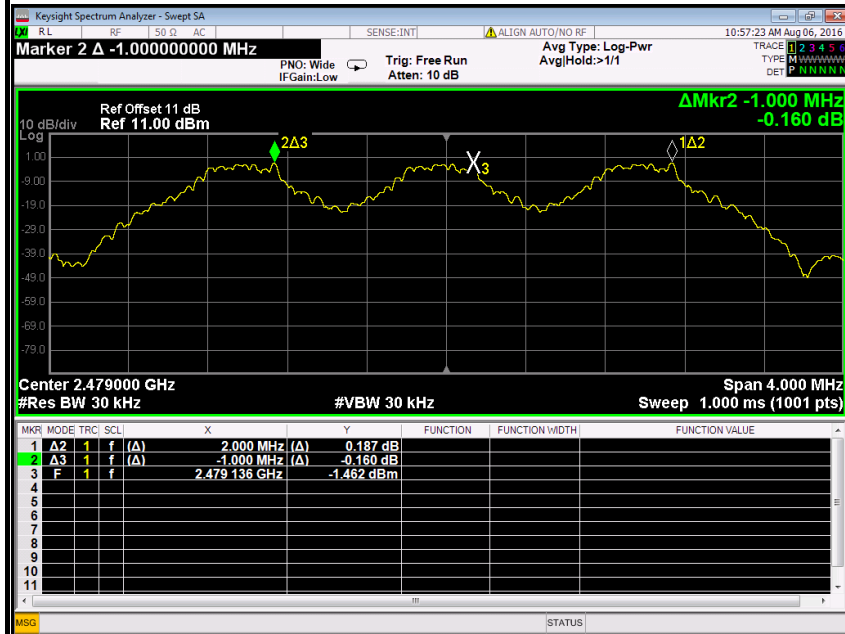

20 dB bandwidth(CH High)

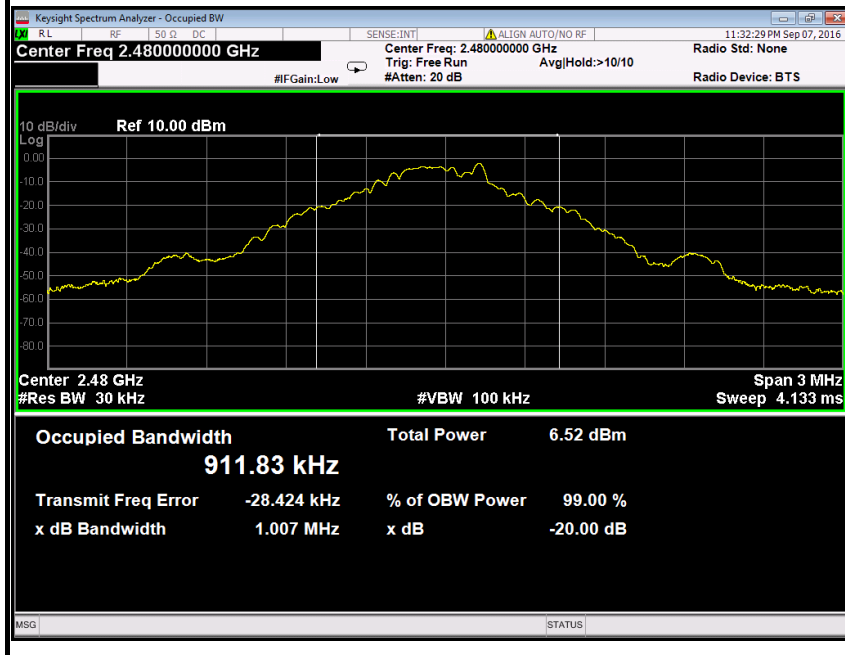

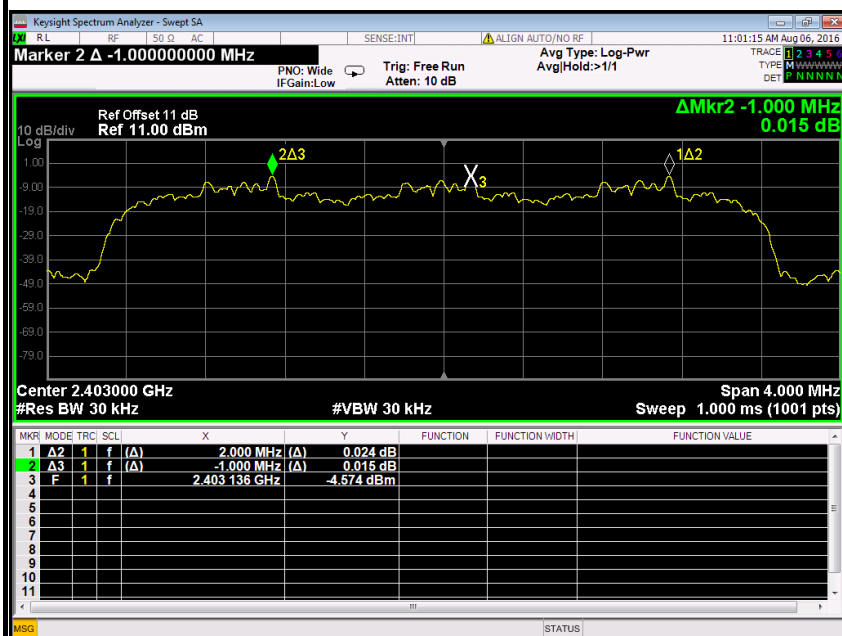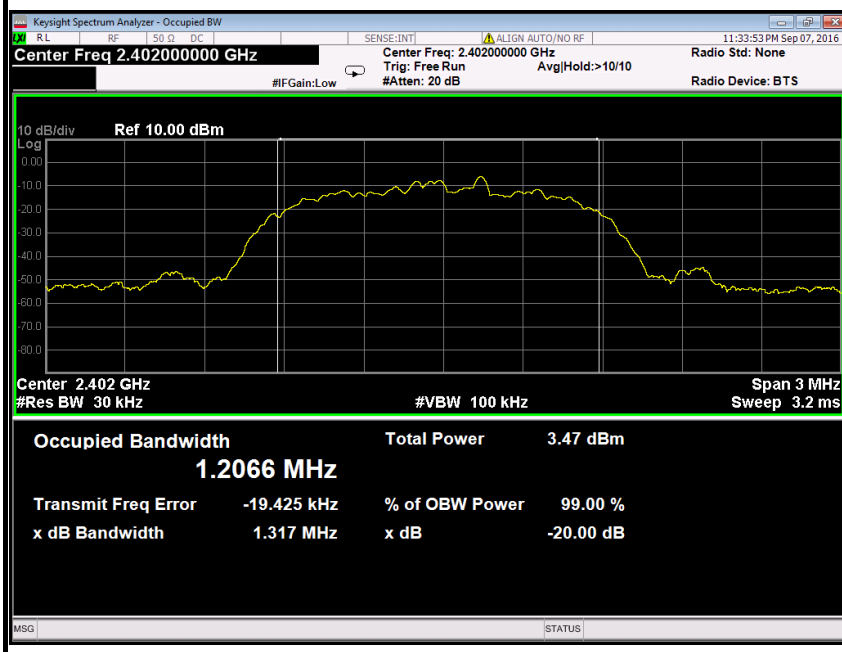**8DPSK****Test Plot****Measurement of Channel Separation****20 dB bandwidth(CH Low)**



6.7 NUMBER OF HOPPING FREQUENCY

LIMIT


According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	02/21/2016	02/20/2017

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = 1ms.
4. Set the spectrum analyzer as RBW, VBW=300kHz,
5. Max hold, view and count how many channel in the band.

TEST RESULTS

No non-compliance noted

Test Data

Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS




Test Plot

Channel Number


GFSK

2.400 GHz – 2.4835 GHz

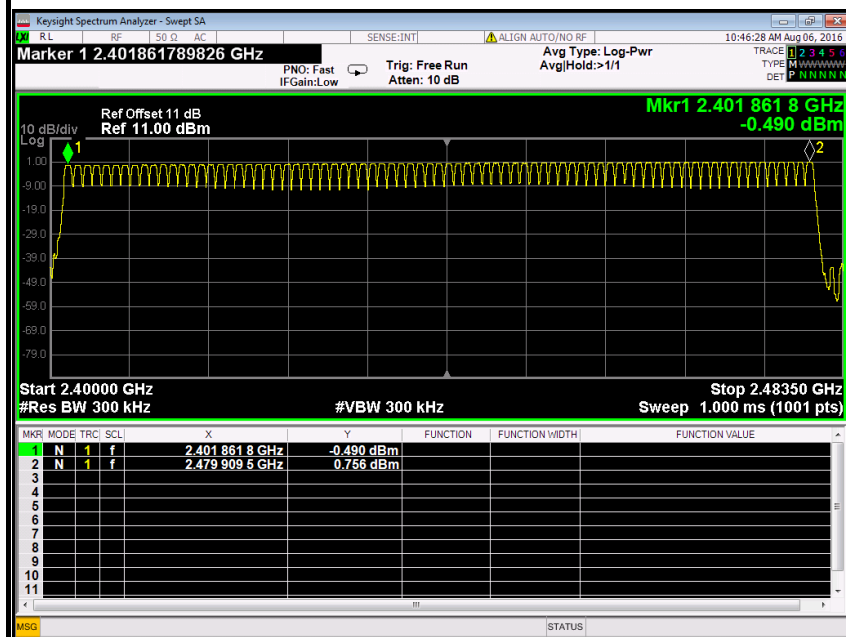

8DPSK

2.400 GHz – 2.4835 GHz

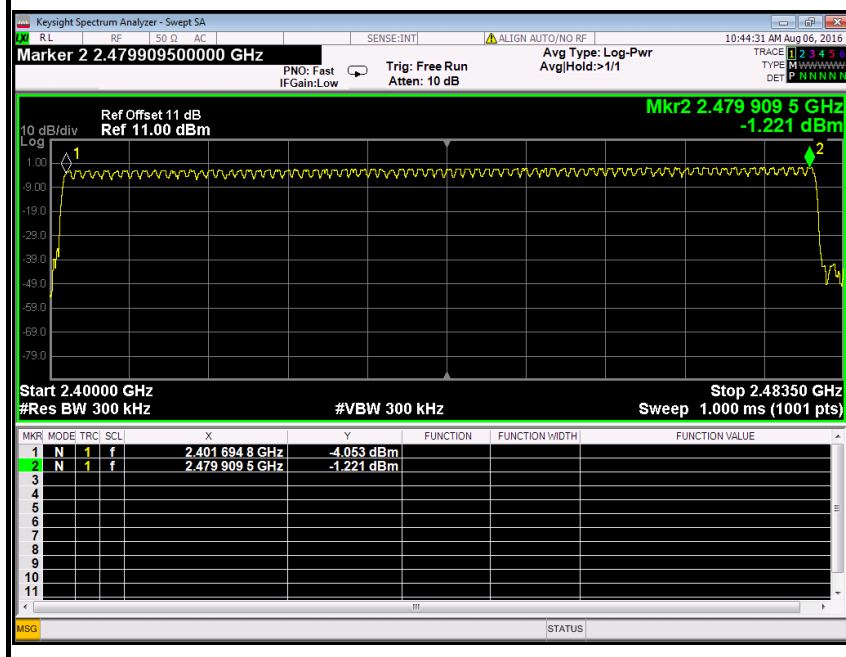



6.8 TIME OF OCCUPANCY (DWELL TIME)

LIMIT


According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4s multiplied by the number of hopping channels employed.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	02/21/2016	02/20/2017

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

No non-compliance noted

Test Data

GFSK

DH 1

CH Mid: $0.390 * (1600/2)/79 * 31.6 = 124.800(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.390	124.800	31.60	400.00	PASS

DH 3

CH Mid: $1.656 * (1600/4)/79 * 31.6 = 264.960 (\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.656	264.960	31.60	400.00	PASS

DH 5

CH Mid: $2.904 * (1600/6)/79 * 31.6 = 309.760(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	2.904	309.760	31.60	400.00	PASS

**8DPSK****DH 1**

CH Mid: $0.396 * (1600/2)/79 * 31.6 = 126.720(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.396	126.720	31.60	400.00	PASS

DH 3

CH Mid: $1.650 * (1600/4)/79 * 31.6 = 264.000 (\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.650	264.000	31.60	400.00	PASS

DH 5

CH Mid: $2.896 * (1600/6)/79 * 31.6 = 308.907(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	2.896	308.907	31.60	400.00	PASS




Test Plot

GFSK


DH 1


CH Mid


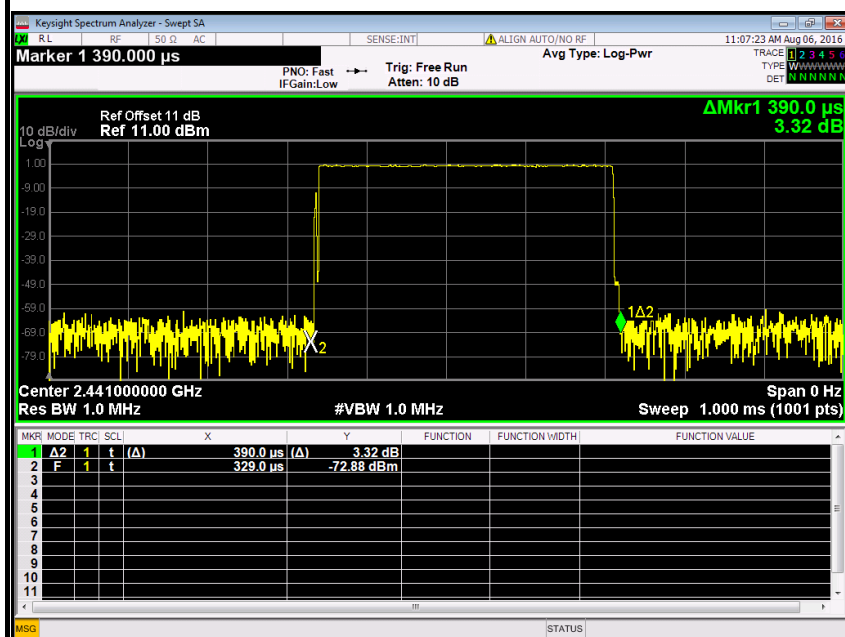


DH 3

CH Mid

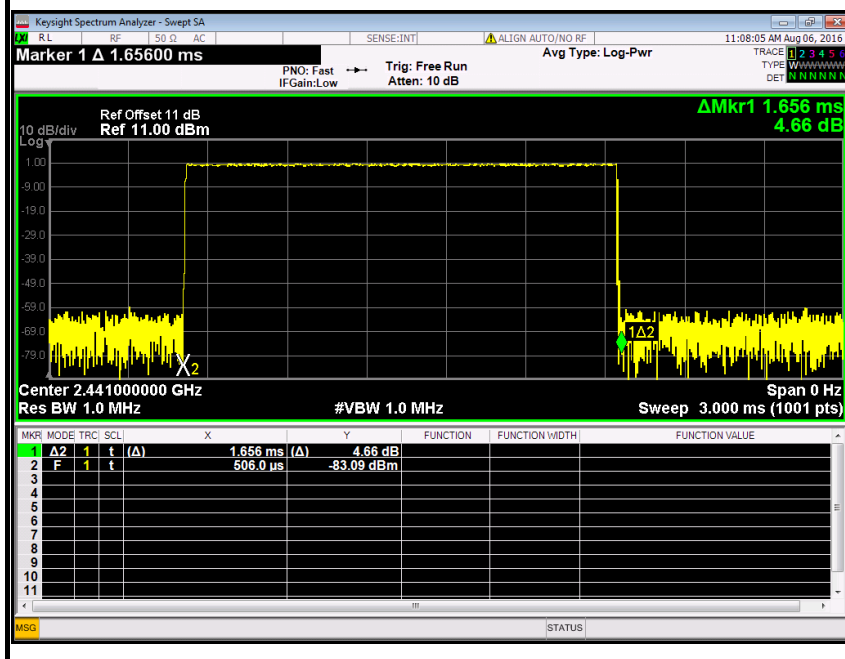

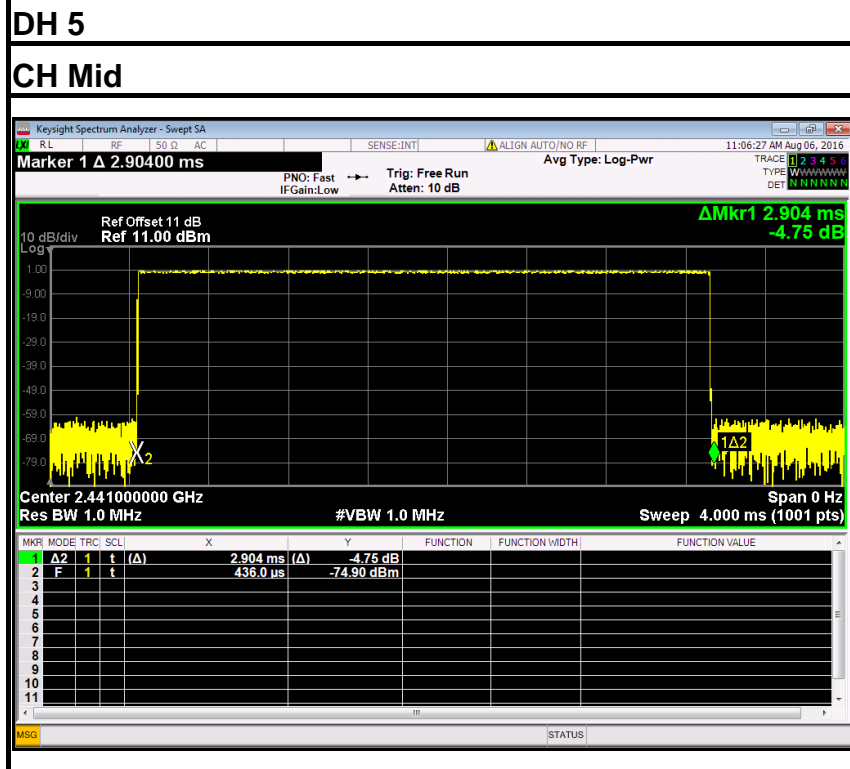


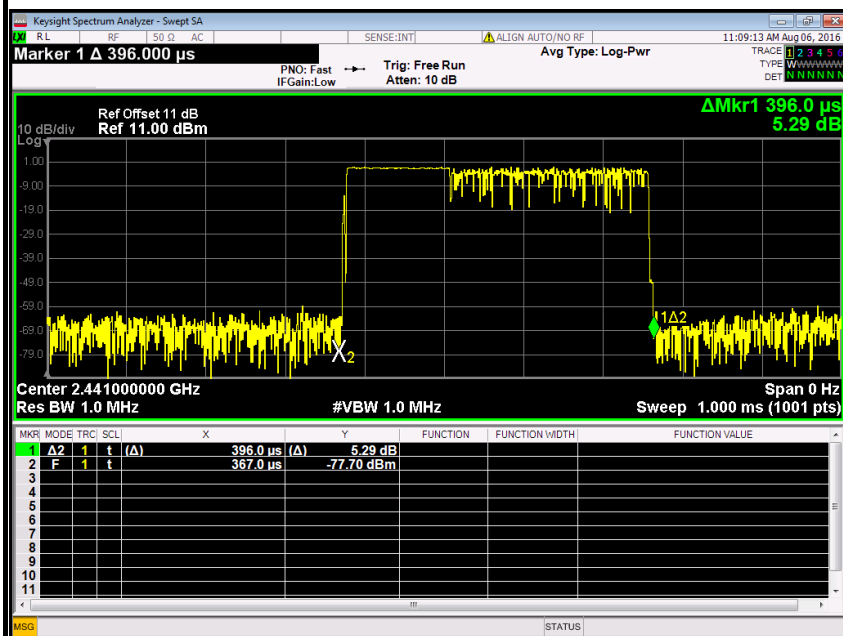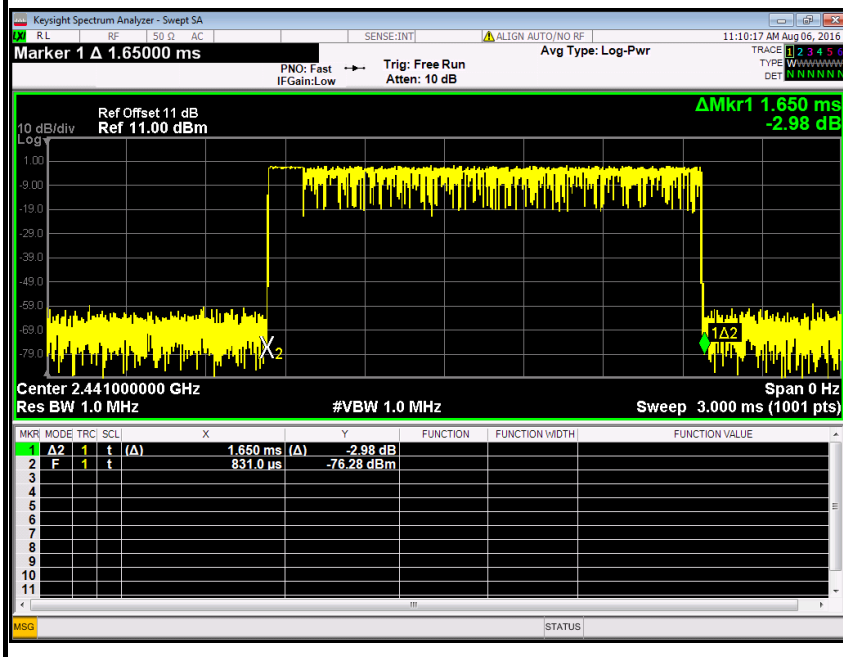**8DPSK****DH 1****CH Mid****DH 3****CH Mid**



DH 5

CH Mid

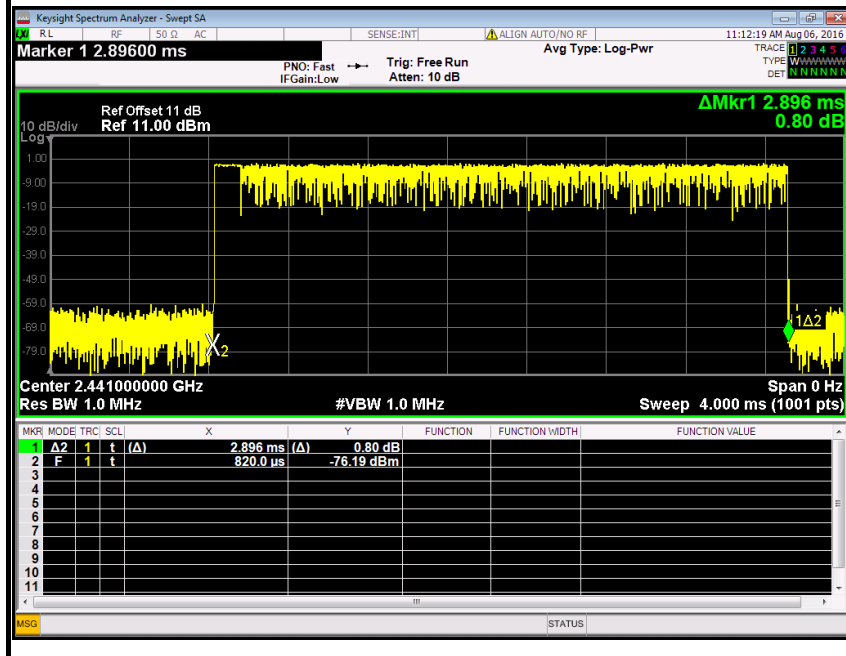



6.9 SPURIOUS EMISSIONS

6.9.1. CONDUCTED MEASUREMENT

LIMIT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	02/21/2016	02/20/2017

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 10MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels, and highest channels. No emission found between lowest internal used/generated frequency to 10MHz , it is only recorded 10MHz to 26GHz.

TEST RESULTS

No non-compliance noted


Remark: The hopping on mode and hopping off mode were chosen for pre-test and the hopping off mode was the worse case and print in the report.




Hopping Off


Test Plot (GFSK)

CH Low (10MHz ~26.5GHz)

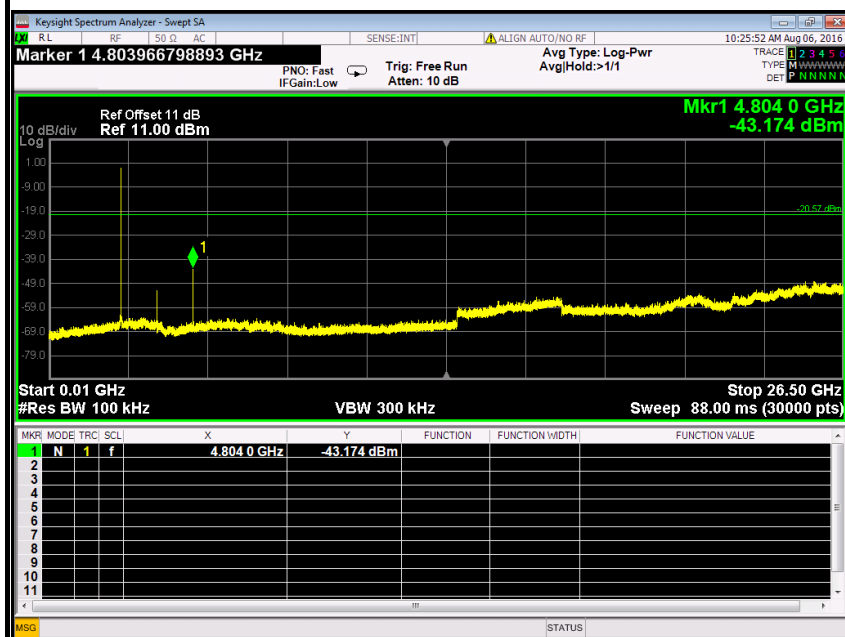


CH Low (2.31GHz ~2.41GHz)

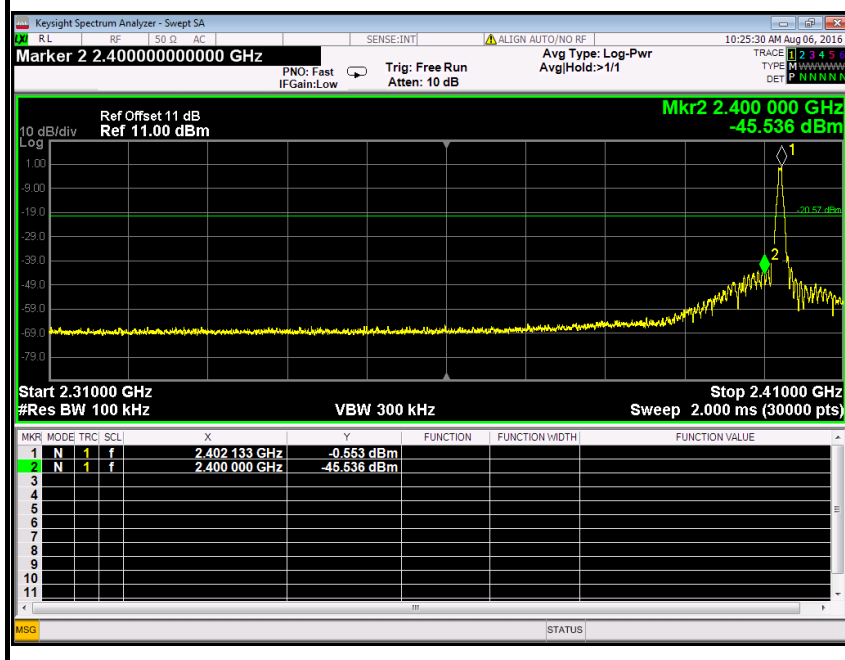

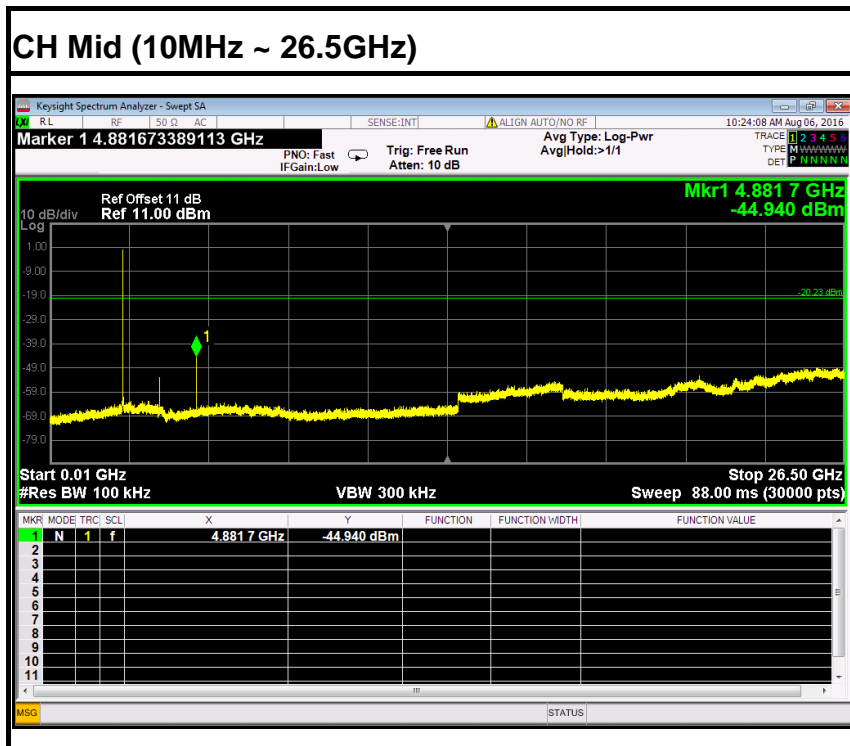




CH High (10MHz ~ 26.5GHz)

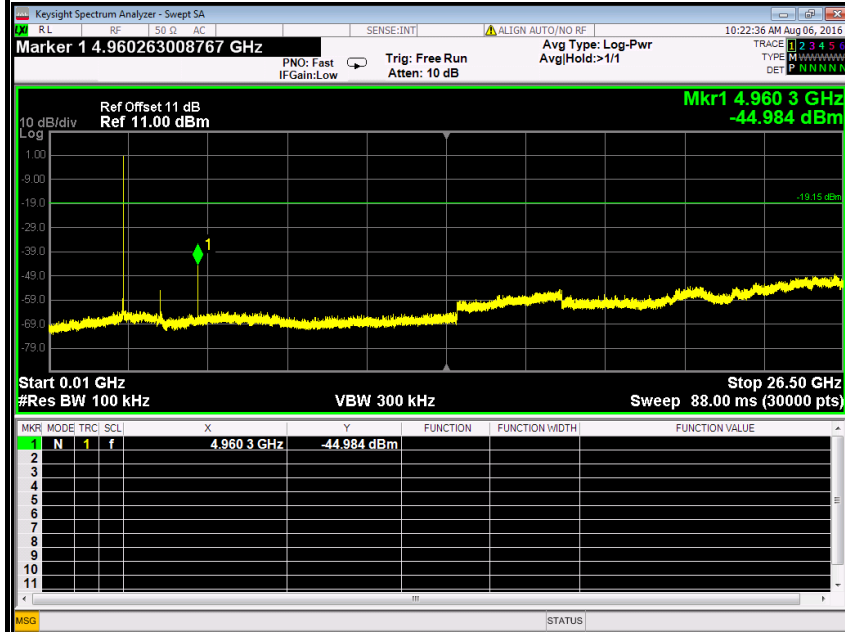


CH High (2.475GHz ~ 2.5GHz)

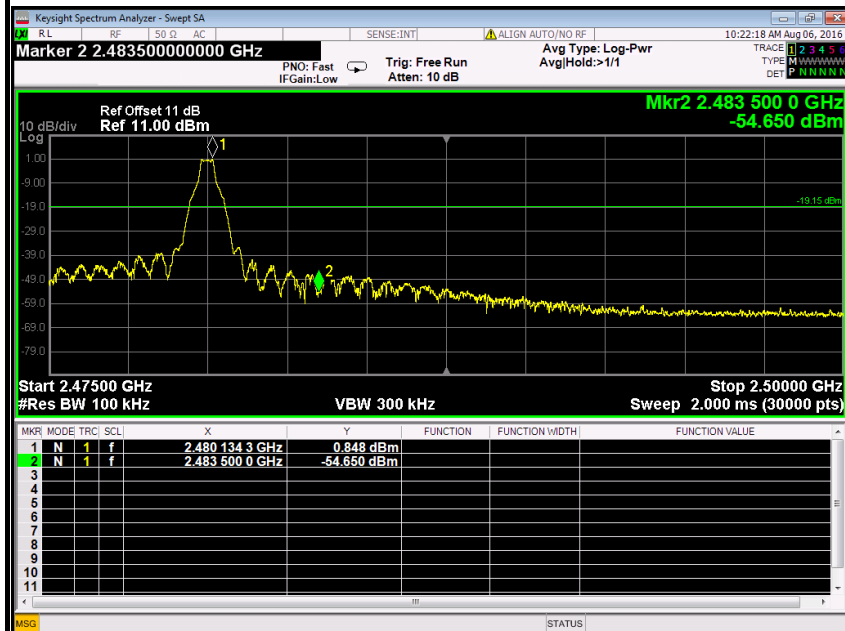





Test Plot (8DPSK)

CH Low (10MHz ~26.5GHz)

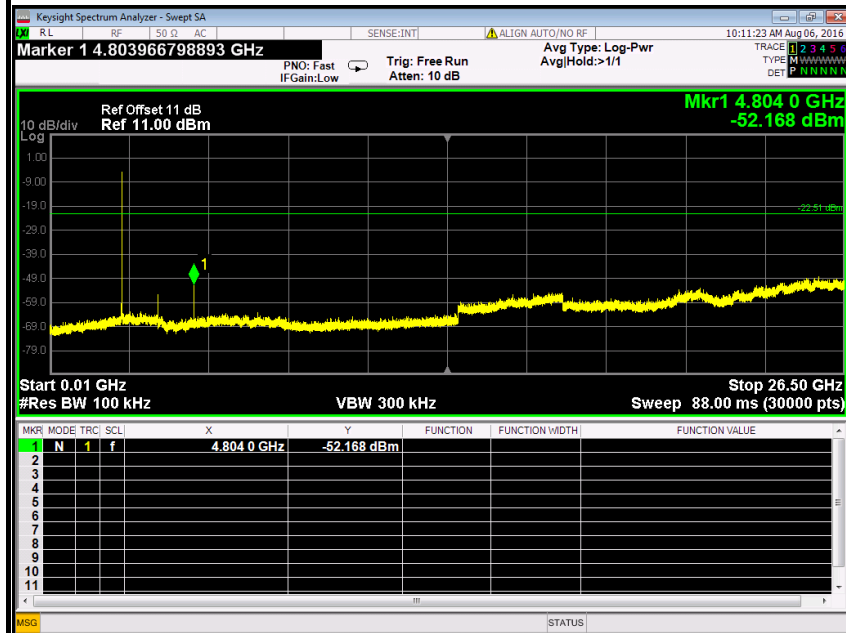


CH Low (2.31GHz ~2.41GHz)

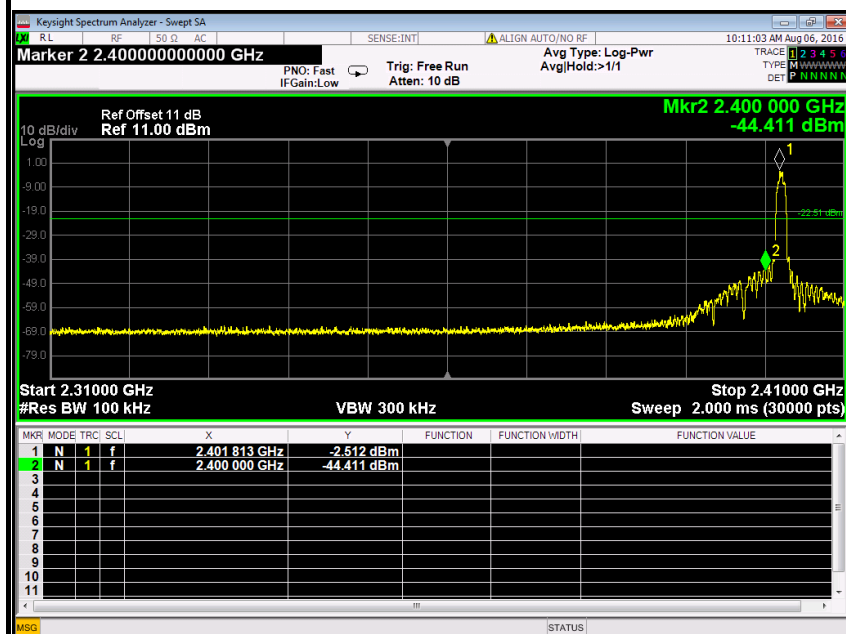

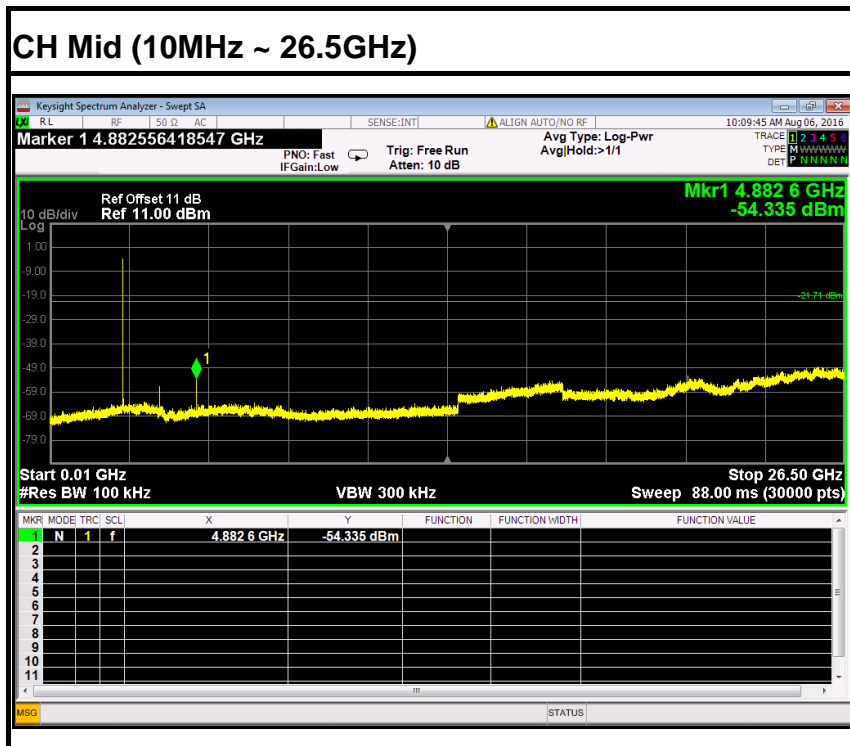




CH High (10MHz ~ 26.5GHz)

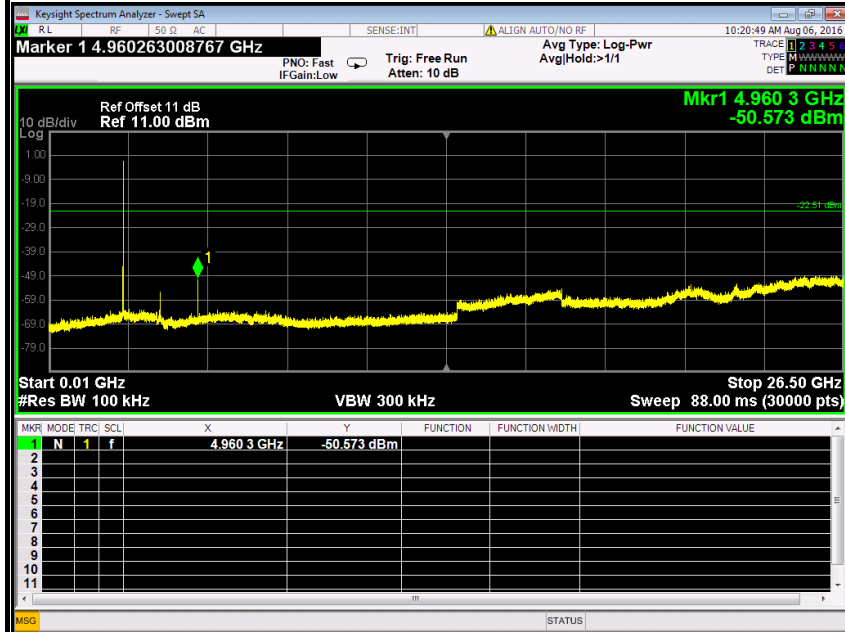

CH High (2.475GHz ~ 2.5GHz)

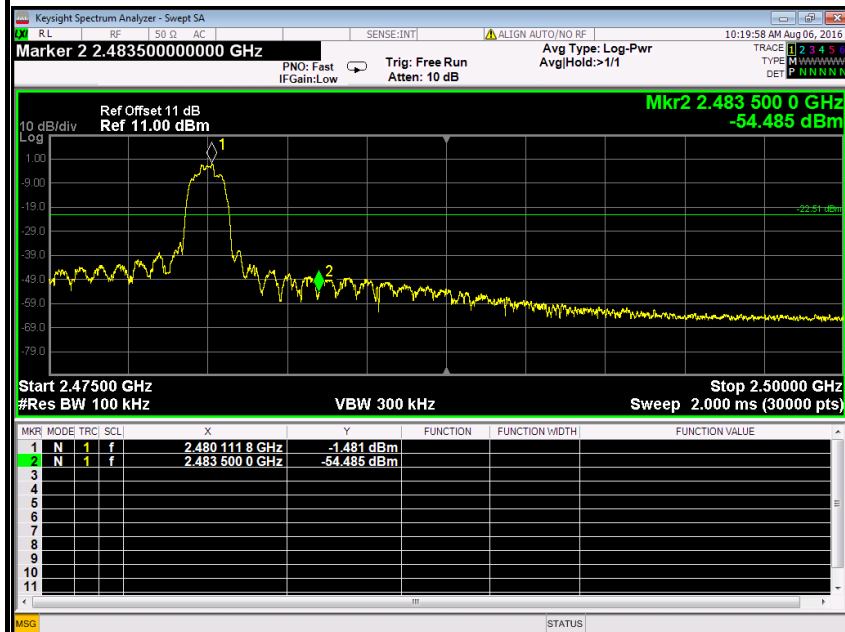




Hopping On


Test Data (GFSK)

CH Low (2.31GHz ~2.5GHz)

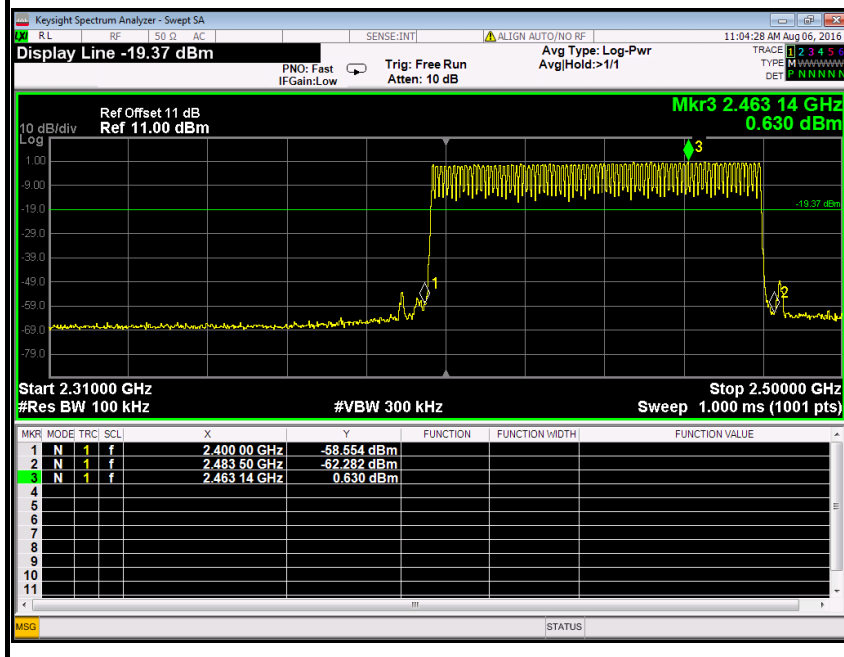

Test Data (8DPSK)

CH Low (2.31GHz ~2.5GHz)

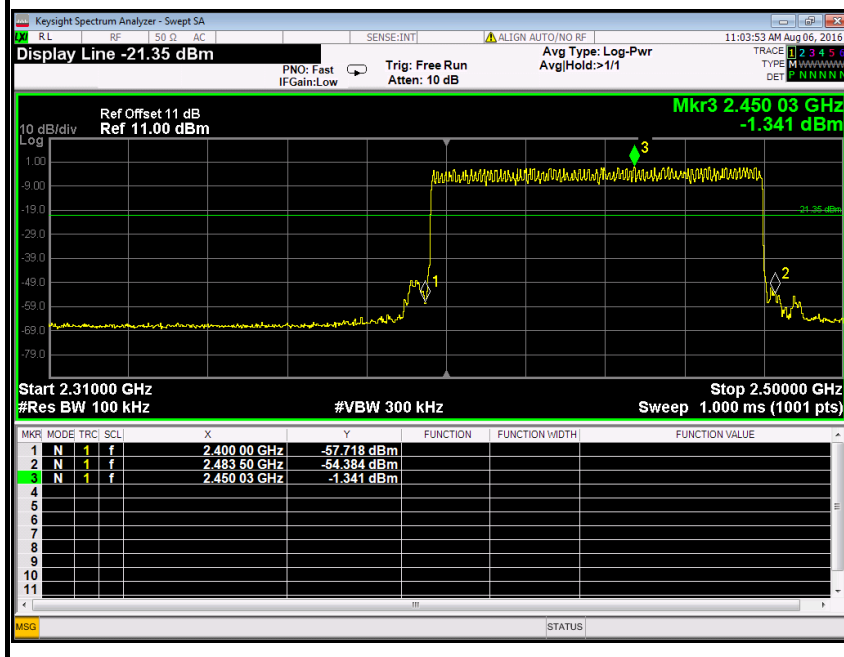



6.9.2. Radiated Emissions

LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Note: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54




MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	02/21/2016	02/20/2017
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2016	02/20/2017
Amplifier	EMEC	EM330	060661	03/18/2016	03/17/2017
High Noise Amplifier	Agilent	8449B	3008A01838	02/21/2016	02/20/2017
Loop Antenna	COM-POWER	AL-130	121044	09/25/2015	09/24/2016
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/21/2016	02/20/2017
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/28/2016	02/27/2017
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/28/2016	02/27/2017
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/21/2016	02/20/2017
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

Remark: Each piece of equipment is scheduled for calibration once a year.


Test Configuration

Below 30MHz

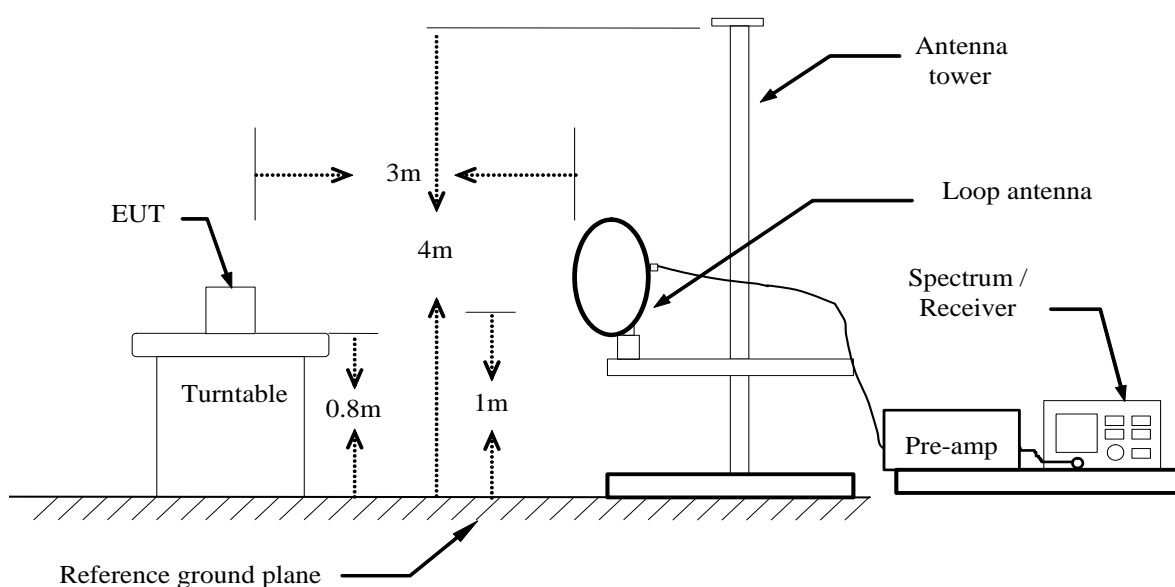




Below 1 GHz

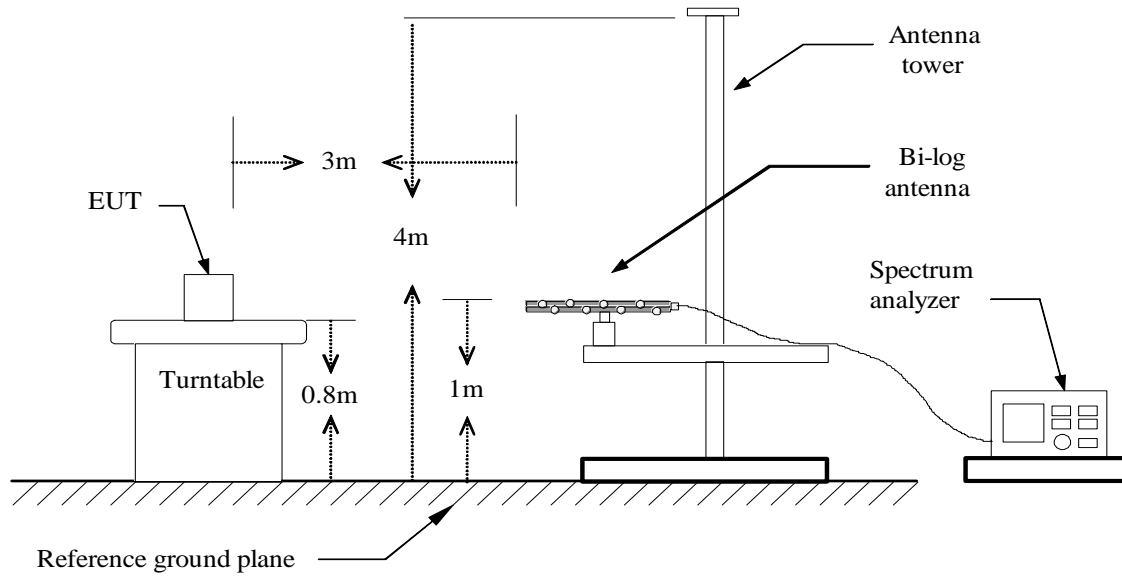

Above 1 GHz

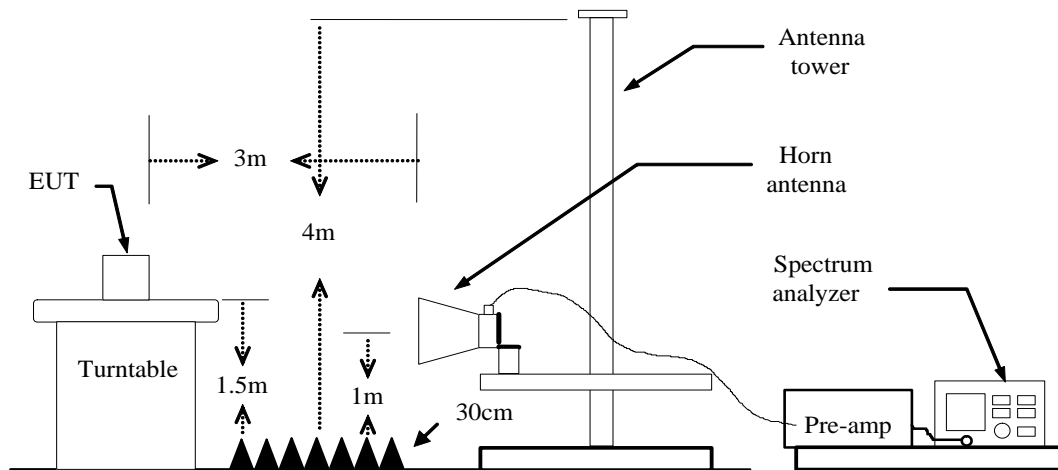



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m or 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

**TEST RESULTS****Below 1 GHz****Test Mode:** TX**Tested by:** Eve Wang**Ambient temperature:** 24°C **Relative humidity:** 52% RH**Date:** August 5, 2016

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
39.2991	38.53	-11.26	27.27	40.00	-12.73	V	QP
62.4313	45.72	-13.63	32.09	40.00	-7.91	V	QP
149.4857	47.48	-11.87	35.61	43.50	-7.89	V	QP
193.0945	44.40	-12.72	31.68	43.50	-11.82	V	QP
601.4265	40.29	-5.82	34.47	46.00	-11.53	V	QP
701.7610	40.32	-4.73	35.59	46.00	-10.41	V	QP
49.0145	39.67	-12.18	27.49	40.00	-12.51	H	QP
62.6507	36.96	-13.66	23.30	40.00	-16.70	H	QP
119.8556	37.83	-13.01	24.82	43.50	-18.68	H	QP
191.7450	42.84	-12.82	30.02	43.50	-13.48	H	QP
403.2500	44.83	-8.59	36.24	46.00	-9.76	H	QP
638.3686	40.72	-5.43	35.29	46.00	-10.71	H	QP


****Remark:** No emission found between lowest internal used/generated frequency to 30MHz.**Notes:**

1. Measuring frequencies from 9kHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Peak/Quasi-peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 120kHz.
5.


Frequency (MHz).	= Emission frequency in MHz
Reading (dBuV)	= Receiver reading
Correction Factor(dB/m)	= Antenna factor + Cable loss – Amplifier gain
Actual FS (dBuV/m)	= Reading (dBuV) + Corr. Factor (dB/m)
Limit (dBuV/m)	= Limit stated in standard
Margin(dB)	= Measured (dBuV/m) – Limits (dBuV/m)
Antenna Pole(V/H)	= Current carrying line of reading



Vertical

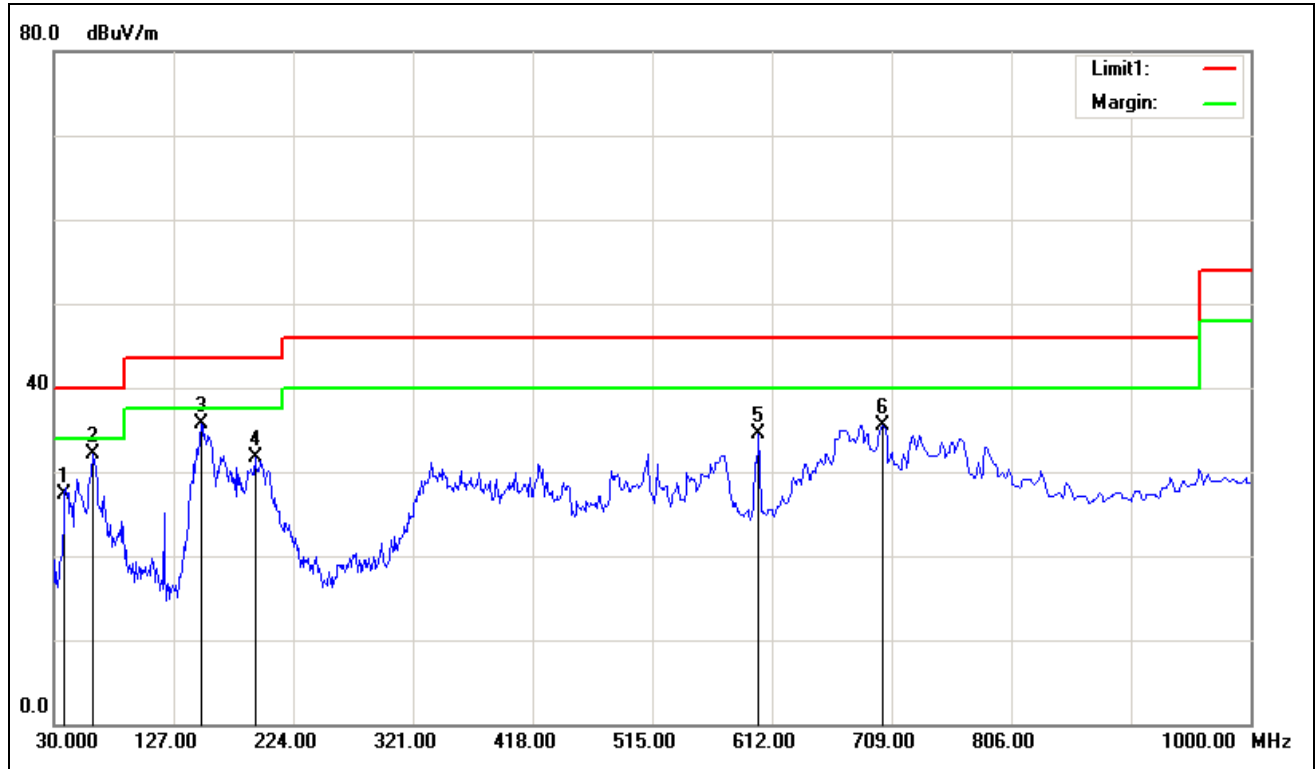

Horizontal

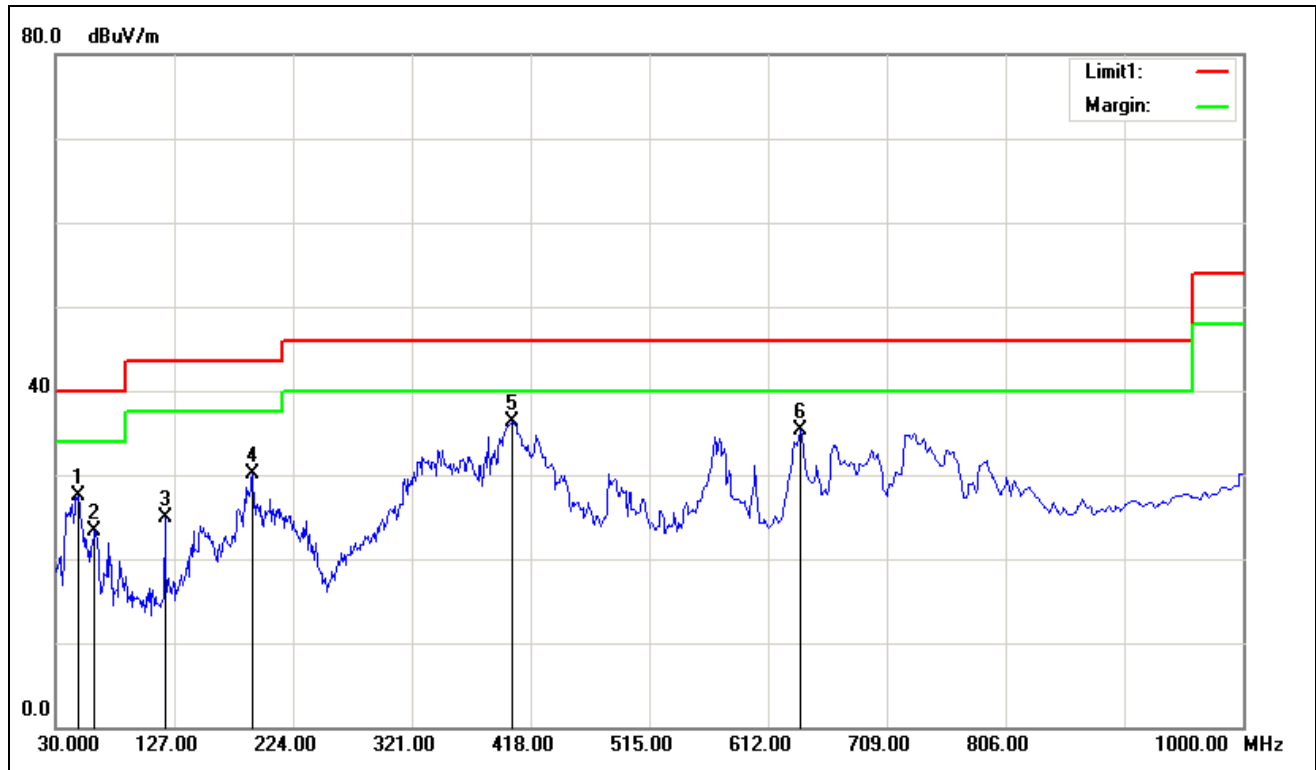

**Above 1 GHz****GFSK****Test Mode:** TX(CH Low)**Tested by:** Eve Wang**Ambient temperature:** 24°C**Relative humidity:** 52% RH**Date:** July 21, 2016

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1765.0000	50.27	-6.35	43.92	74.00	-30.08	V	peak
3601.0000	45.81	-0.09	45.72	74.00	-28.28	V	peak
4807.0000	45.60	4.35	49.95	74.00	-24.05	V	peak
5599.0000	44.27	5.91	50.18	74.00	-23.82	V	peak
6148.0000	39.52	6.32	45.84	74.00	-28.16	V	peak
6994.0000	40.33	7.69	48.02	74.00	-25.98	V	peak
4465.0000	41.68	3.23	44.91	74.00	-29.09	H	Peak
4807.0000	44.04	4.35	48.39	74.00	-25.61	H	Peak
5599.0000	41.78	5.91	47.69	74.00	-26.31	H	Peak
6661.0000	40.34	7.15	47.49	74.00	-26.51	H	peak
7768.0000	40.03	9.20	49.23	74.00	-24.77	H	peak
8704.0000	41.23	9.26	50.49	74.00	-23.51	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz

Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading

Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

Limit (dBuV/m) = Limit stated in standard

Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)

Pk = Peak Reading

AV = Average Reading

Remark = Mark Peak Reading or Average Reading

Test Mode: TX(CH Mid)Tested by: Eve WangAmbient temperature: 24°CRelative humidity: 52% RHDate: July 21, 2016

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1999.0000	49.29	-5.01	44.28	74.00	-29.72	V	peak
3997.0000	43.63	1.58	45.21	74.00	-28.79	V	peak
4879.0000	48.61	4.59	53.20	74.00	-20.80	V	peak
4879.0000	42.79	4.59	47.38	54.00	-6.62	V	AVG
5599.0000	43.33	5.91	49.24	74.00	-24.76	V	peak
6931.0000	40.72	7.59	48.31	74.00	-25.69	V	peak
8245.0000	39.97	9.52	49.49	74.00	-24.51	V	peak
4564.0000	41.11	3.56	44.67	74.00	-29.33	H	Peak
4879.0000	49.45	4.59	54.04	74.00	-19.96	H	Peak
4879.0000	43.90	4.59	48.49	54.00	-5.51	H	AVG
5599.0000	43.76	5.91	49.67	74.00	-24.33	H	Peak
6940.0000	40.47	7.60	48.07	74.00	-25.93	H	peak
7957.0000	40.44	9.57	50.01	74.00	-23.99	H	peak
8569.0000	41.24	9.34	50.58	74.00	-23.42	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
 Pk = Peak Reading
 AV = Average Reading
 Remark = Mark Peak Reading or Average Reading

Test Mode: TX(CH High)Tested by: Eve WangAmbient temperature: 24°CRelative humidity: 52% RHDate: July 21, 2016

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1999.0000	48.88	-5.01	43.87	74.00	-30.13	V	peak
2512.0000	44.58	-2.24	42.34	74.00	-31.66	V	peak
3997.0000	43.79	1.58	45.37	74.00	-28.63	V	peak
4960.0000	51.05	4.85	55.90	74.00	-18.10	V	peak
4960.0000	45.12	4.85	49.97	54.00	-4.03	V	AVG
5599.0000	42.33	5.91	48.24	74.00	-25.76	V	peak
6922.0000	40.71	7.57	48.28	74.00	-25.72	V	peak
1990.0000	48.54	-5.06	43.48	74.00	-30.52	H	Peak
4015.0000	41.49	1.64	43.13	74.00	-30.87	H	Peak
4960.0000	51.26	4.85	56.11	74.00	-17.89	H	Peak
4960.0000	45.94	4.85	50.79	54.00	-3.21	H	AVG
5599.0000	43.09	5.91	49.00	74.00	-25.00	H	peak
6013.0000	41.31	6.10	47.41	74.00	-26.59	H	peak
7723.0000	40.13	9.11	49.24	74.00	-24.76	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss - Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
 Pk = Peak Reading
 AV = Average Reading
 Remark = Mark Peak Reading or Average Reading

**8DPSK****Test Mode:** TX(CH Low)**Tested by:** Eve Wang**Ambient temperature:** 24°C **Relative humidity:** 52% RH**Date:** July 21, 2016

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1999.0000	49.59	-5.01	44.58	74.00	-29.42	V	peak
3997.0000	44.66	1.58	46.24	74.00	-27.76	V	peak
4807.0000	43.15	4.35	47.50	74.00	-26.50	V	peak
5599.0000	41.82	5.91	47.73	74.00	-26.27	V	peak
6481.0000	40.03	6.86	46.89	74.00	-27.11	V	peak
7759.0000	40.43	9.18	49.61	74.00	-24.39	V	peak
1990.0000	49.09	-5.06	44.03	74.00	-29.97	H	Peak
4429.0000	41.44	3.10	44.54	74.00	-29.46	H	Peak
5599.0000	41.51	5.91	47.42	74.00	-26.58	H	Peak
6085.0000	41.34	6.22	47.56	74.00	-26.44	H	peak
6949.0000	40.43	7.62	48.05	74.00	-25.95	H	peak
7966.0000	40.10	9.58	49.68	74.00	-24.32	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
 Pk = Peak Reading
 AV = Average Reading
 Remark = Mark Peak Reading or Average Reading

Test Mode: TX(CH Mid)Tested by: Eve WangAmbient temperature: 24°CRelative humidity: 52% RHDate: July 21, 2016

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1999.0000	49.34	-5.01	44.33	74.00	-29.67	V	peak
3997.0000	44.97	1.58	46.55	74.00	-27.45	V	peak
4879.0000	44.93	4.59	49.52	74.00	-24.48	V	peak
5599.0000	41.68	5.91	47.59	74.00	-26.41	V	peak
7597.0000	39.61	8.86	48.47	74.00	-25.53	V	peak
8092.0000	40.06	9.60	49.66	74.00	-24.34	V	peak
1999.0000	49.21	-5.01	44.20	74.00	-29.80	H	Peak
4879.0000	44.89	4.59	49.48	74.00	-24.52	H	Peak
5599.0000	42.52	5.91	48.43	74.00	-25.57	H	Peak
6877.0000	39.82	7.50	47.32	74.00	-26.68	H	peak
7912.0000	40.13	9.48	49.61	74.00	-24.39	H	peak
8569.0000	40.65	9.34	49.99	74.00	-24.01	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
 Pk = Peak Reading
 AV = Average Reading
 Remark = Mark Peak Reading or Average Reading

Test Mode: TX(CH High)Tested by: Eve WangAmbient temperature: 24°CRelative humidity: 52% RHDate: July 21, 2016

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
3997.0000	44.46	1.58	46.04	74.00	-27.96	V	peak
4960.0000	47.91	4.85	52.76	74.00	-21.24	V	peak
4960.0000	42.54	4.85	47.39	54.00	-6.61	V	AVG
5599.0000	42.36	5.91	48.27	74.00	-25.73	V	peak
6454.0000	39.52	6.82	46.34	74.00	-27.66	V	peak
7912.0000	40.52	9.48	50.00	74.00	-24.00	V	peak
8335.0000	39.99	9.47	49.46	74.00	-24.54	V	peak
1999.0000	47.46	-5.01	42.45	74.00	-31.55	H	Peak
3997.0000	42.82	1.58	44.40	74.00	-29.60	H	Peak
4960.0000	45.08	4.85	49.93	74.00	-24.07	H	Peak
5599.0000	42.46	5.91	48.37	74.00	-25.63	H	peak
6958.0000	40.51	7.63	48.14	74.00	-25.86	H	peak
8047.0000	40.64	9.62	50.26	74.00	-23.74	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
 Pk = Peak Reading
 AV = Average Reading
 Remark = Mark Peak Reading or Average Reading



6.10 POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.


MEASUREMENT EQUIPMENT USED

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2016	02/20/2017
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	02/21/2016	02/20/2017
LISN	EMCO	3825/2	8901-1459	02/21/2016	02/20/2017
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	02/21/2016	02/20/2017
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

Remark: Each piece of equipment is scheduled for calibration once a year.



Test Configuration

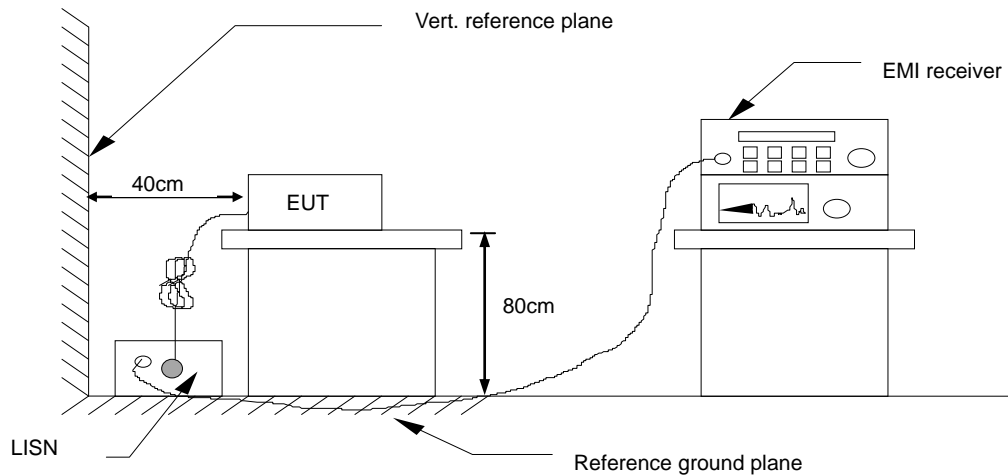

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.


TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.



Test Data

Model No.	GS1	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 1
Tested by	Eve Wang	Line	L1
Test Date	August 10, 2016		

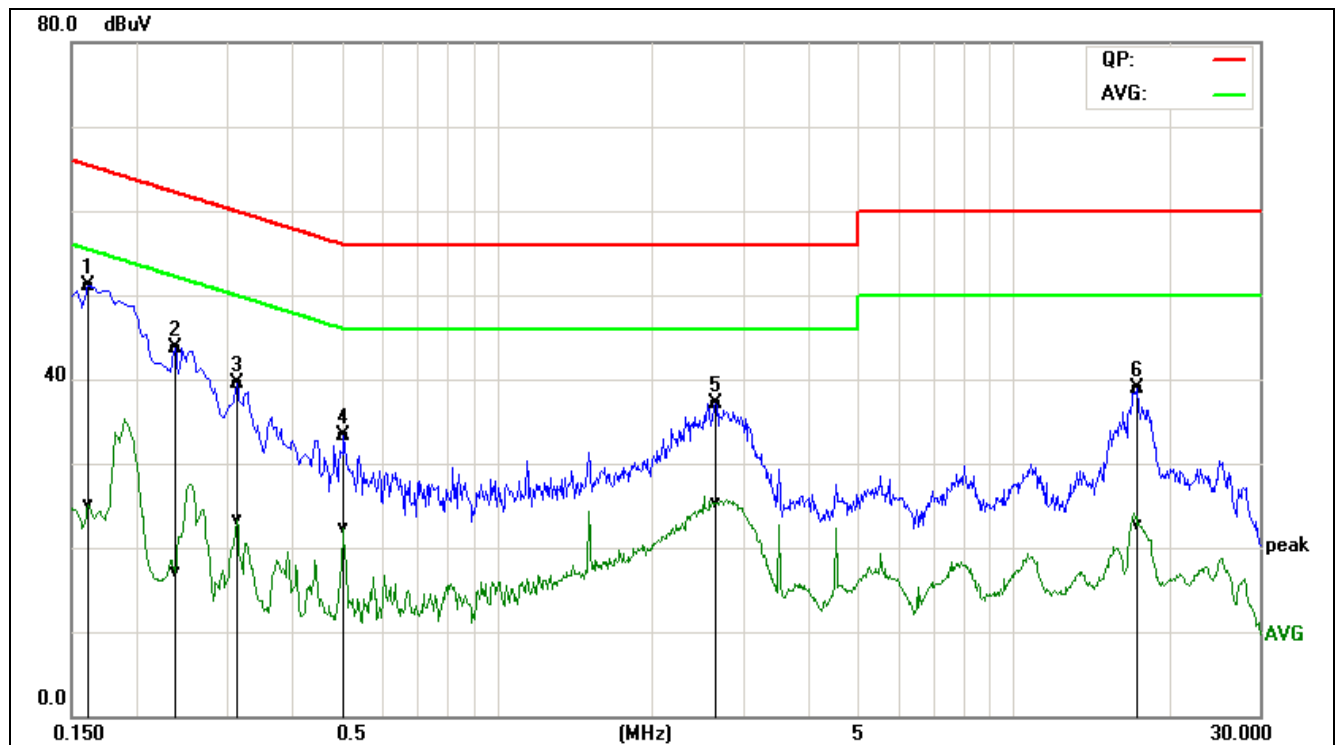


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)	Line (L1/L2)
0.1620	41.63	15.59	9.54	51.17	25.13	65.36	55.36	-14.19	-30.23	Pass	L1
0.2380	34.08	7.52	9.64	43.72	17.16	62.16	52.17	-18.44	-35.01	Pass	L1
0.3140	29.82	13.57	9.64	39.46	23.21	59.86	49.86	-20.40	-26.65	Pass	L1
0.5060	23.71	12.65	9.63	33.34	22.28	56.00	46.00	-22.66	-23.72	Pass	L1
2.6500	27.32	15.57	9.70	37.02	25.27	56.00	46.00	-18.98	-20.73	Pass	L1
17.4300	29.04	12.88	9.91	38.95	22.79	60.00	50.00	-21.05	-27.21	Pass	L1

REMARKS: L1 = Line One (Live Line)



Model No.	GS1	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 1
Tested by	Eve Wang	Line	L2
Test Date	August 10, 2016		

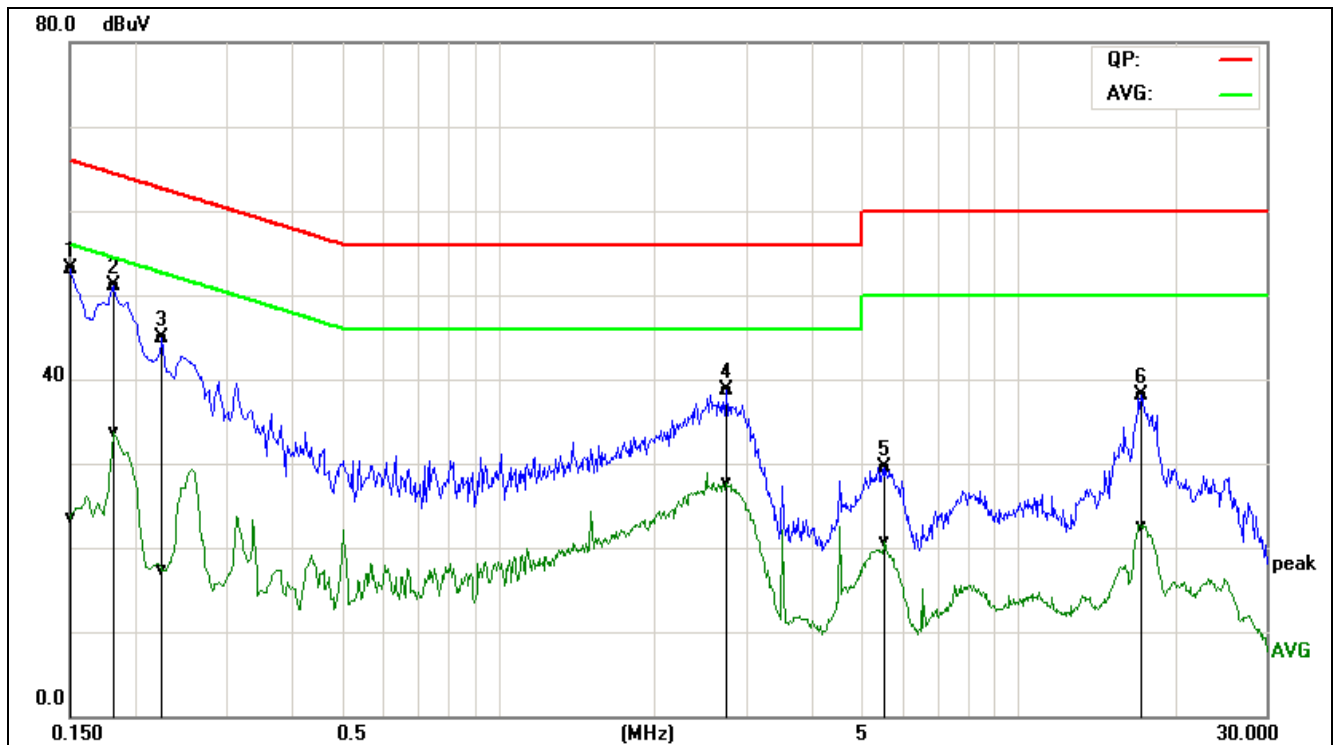


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)	Line (L1/L2)
0.1500	43.37	13.82	9.72	53.09	23.54	65.99	56.00	-12.90	-32.46	Pass	L2
0.1819	41.42	24.04	9.73	51.15	33.77	64.39	54.40	-13.24	-20.63	Pass	L2
0.2260	35.21	7.62	9.73	44.94	17.35	62.59	52.60	-17.65	-35.25	Pass	L2
2.7620	28.90	17.93	9.72	38.62	27.65	56.00	46.00	-17.38	-18.35	Pass	L2
5.5380	19.81	11.05	9.73	29.54	20.78	60.00	50.00	-30.46	-29.22	Pass	L2
17.2300	28.43	12.75	9.76	38.19	22.51	60.00	50.00	-21.81	-27.49	Pass	L2

REMARKS: L2 = Line Two (Neutral Line)



Model No.	GS1	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 2
Tested by	Eve Wang	Line	L1
Test Date	August 10, 2016		

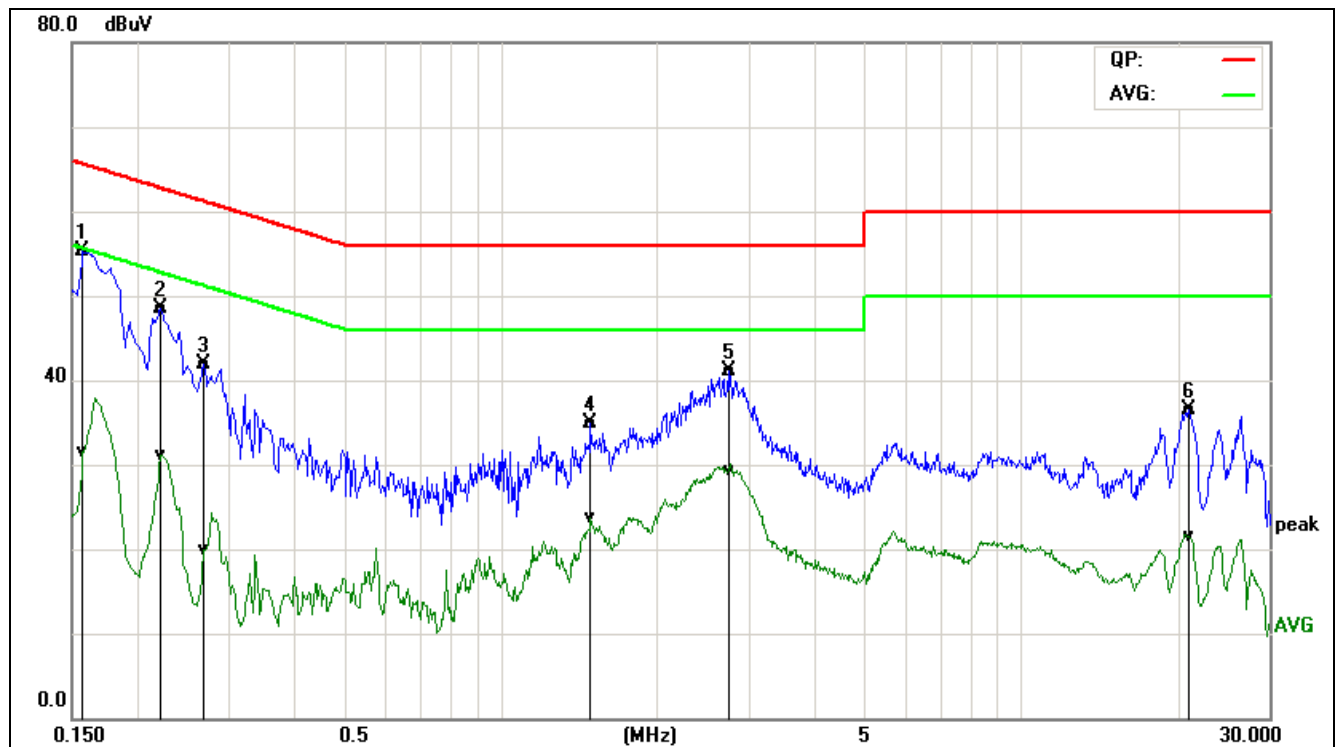


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)	Line (L1/L2)
0.1580	45.44	21.70	9.78	55.22	31.48	65.56	55.57	-10.34	-24.09	Pass	L1
0.2220	38.74	21.31	9.78	48.52	31.09	62.74	52.74	-14.22	-21.65	Pass	L1
0.2700	32.12	10.19	9.77	41.89	19.96	61.12	51.12	-19.23	-31.16	Pass	L1
1.4900	25.15	13.90	9.77	34.92	23.67	56.00	46.00	-21.08	-22.33	Pass	L1
2.7380	31.42	19.59	9.74	41.16	29.33	56.00	46.00	-14.84	-16.67	Pass	L1
21.0220	26.82	11.76	9.74	36.56	21.50	60.00	50.00	-23.44	-28.50	Pass	L1

REMARKS: L1 = Line One (Live Line)



Model No.	GS1	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 2
Tested by	Eve Wang	Line	L2
Test Date	August 10, 2016		

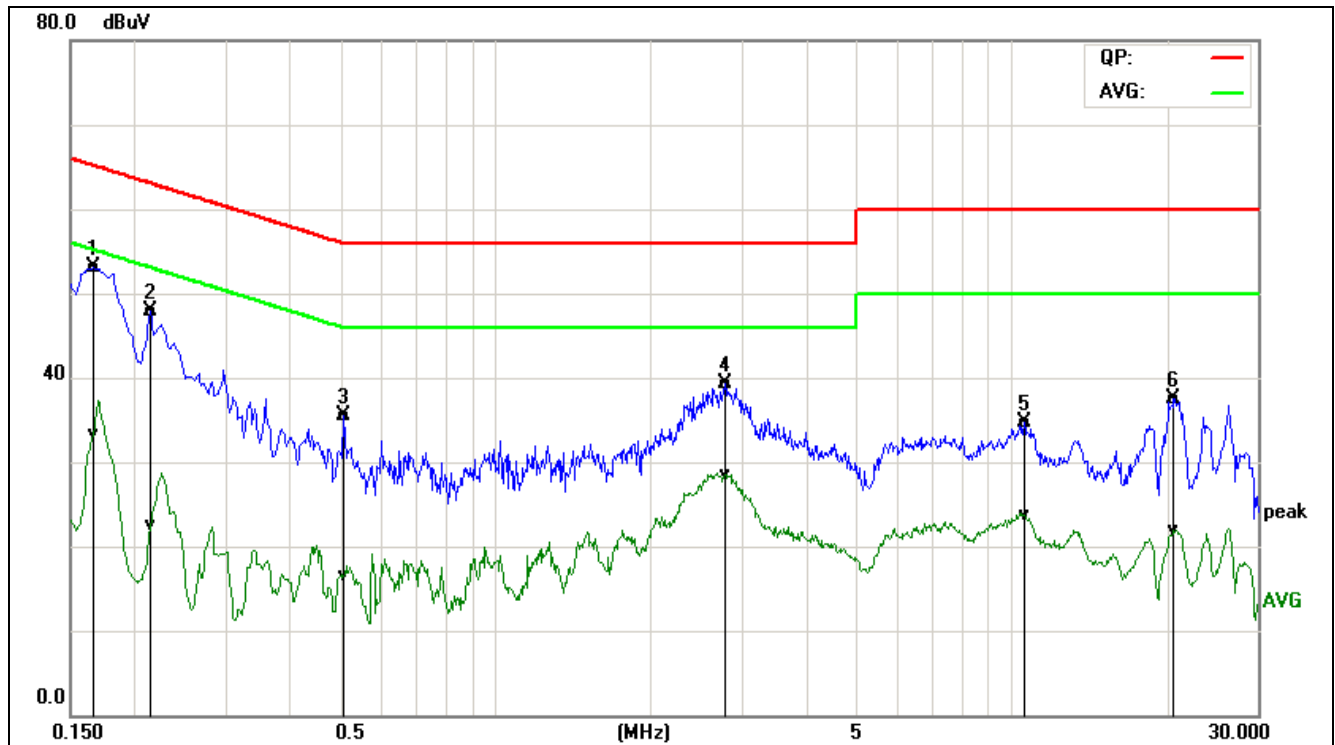

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)	Line (L1/L2)
0.1660	43.23	23.55	9.78	53.01	33.33	65.15	55.16	-12.14	-21.83	Pass	L2
0.2140	38.14	12.70	9.79	47.93	22.49	63.04	53.05	-15.11	-30.56	Pass	L2
0.5100	25.78	6.92	9.68	35.46	16.60	56.00	46.00	-20.54	-29.40	Pass	L2
2.7940	29.62	18.73	9.74	39.36	28.47	56.00	46.00	-16.64	-17.53	Pass	L2
10.5780	24.83	13.79	9.85	34.68	23.64	60.00	50.00	-25.32	-26.36	Pass	L2
20.6700	27.70	12.08	9.74	37.44	21.82	60.00	50.00	-22.56	-28.18	Pass	L2

REMARKS: L2 = Line Two (Neutral Line)