



LTE Band 7


20 MHz QPSK

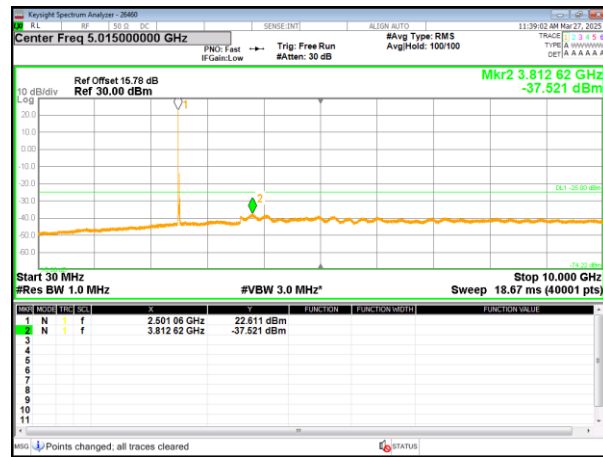


Low channel

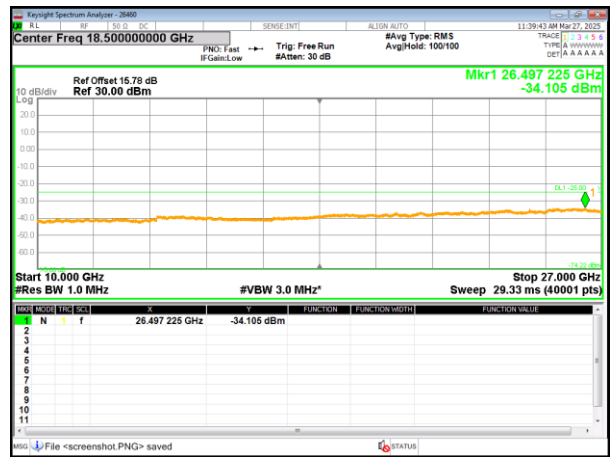


Low channel

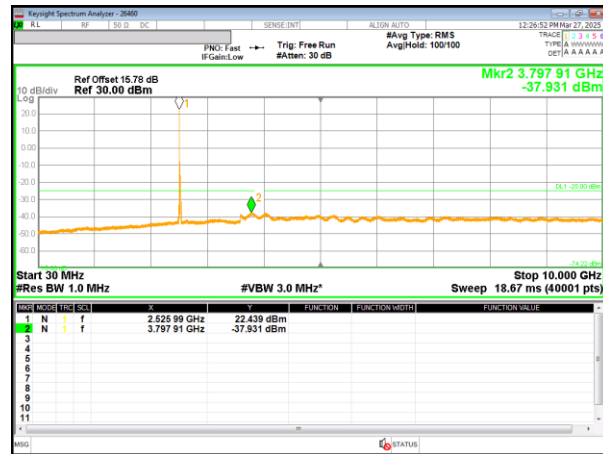


Mid channel

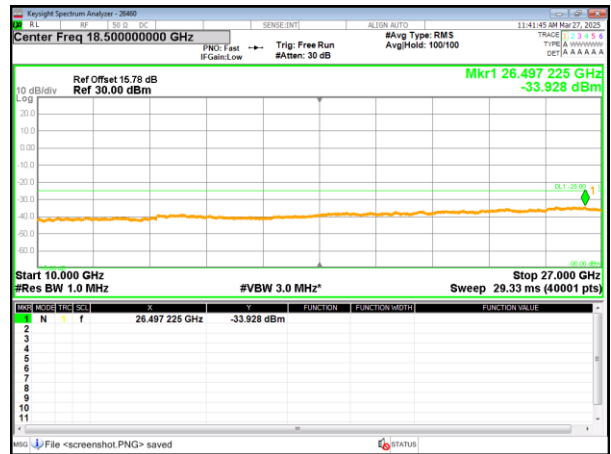

Mid channel

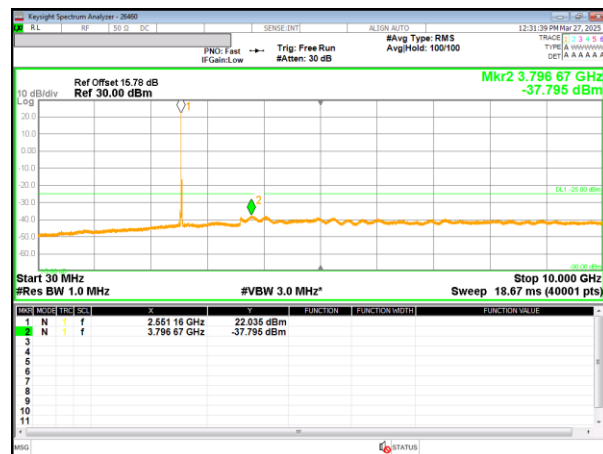


High channel

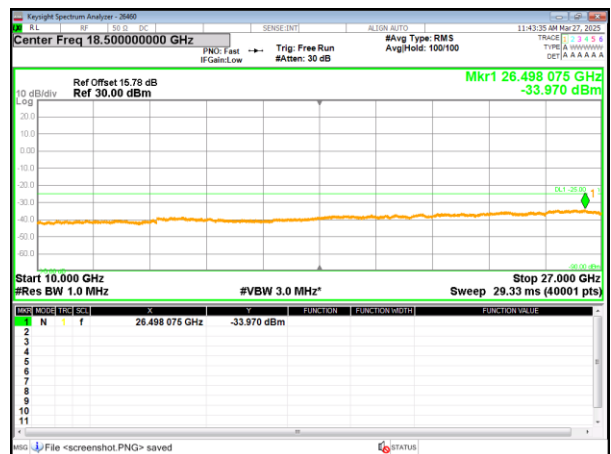


High channel

LTE Band 12


10 MHz QPSK

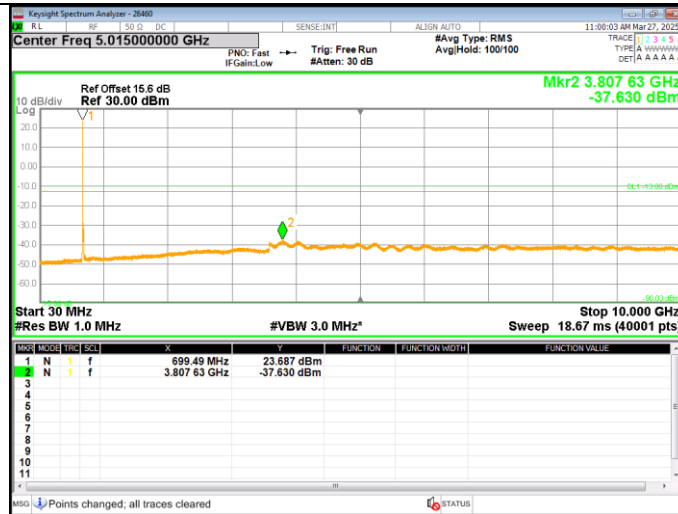

Low channel

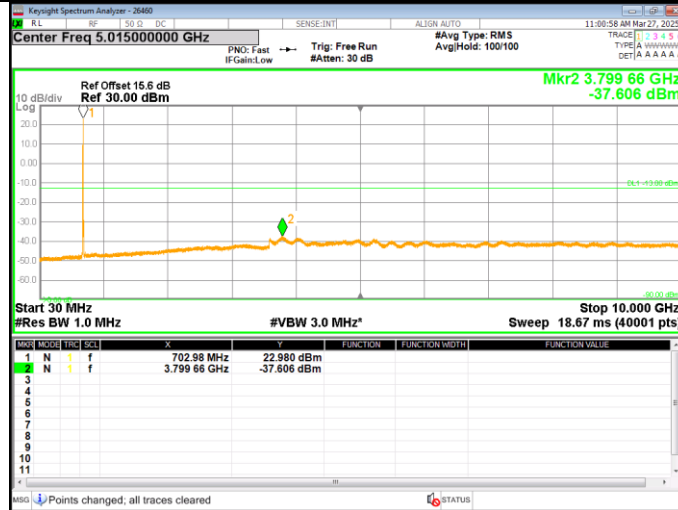


Mid channel

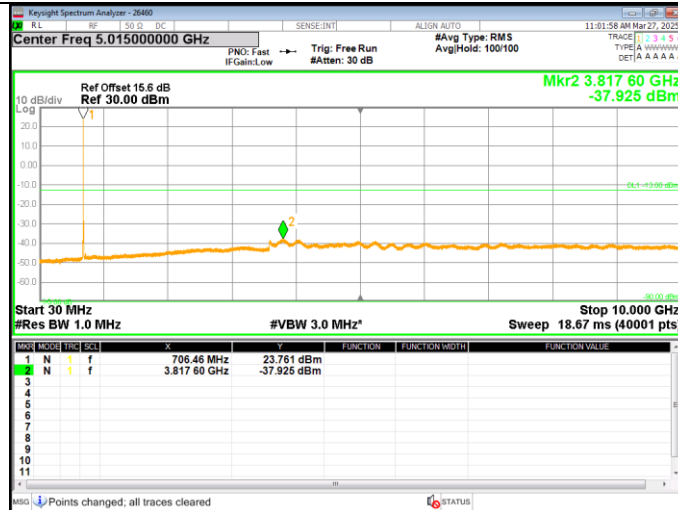


High channel

LTE Band 13

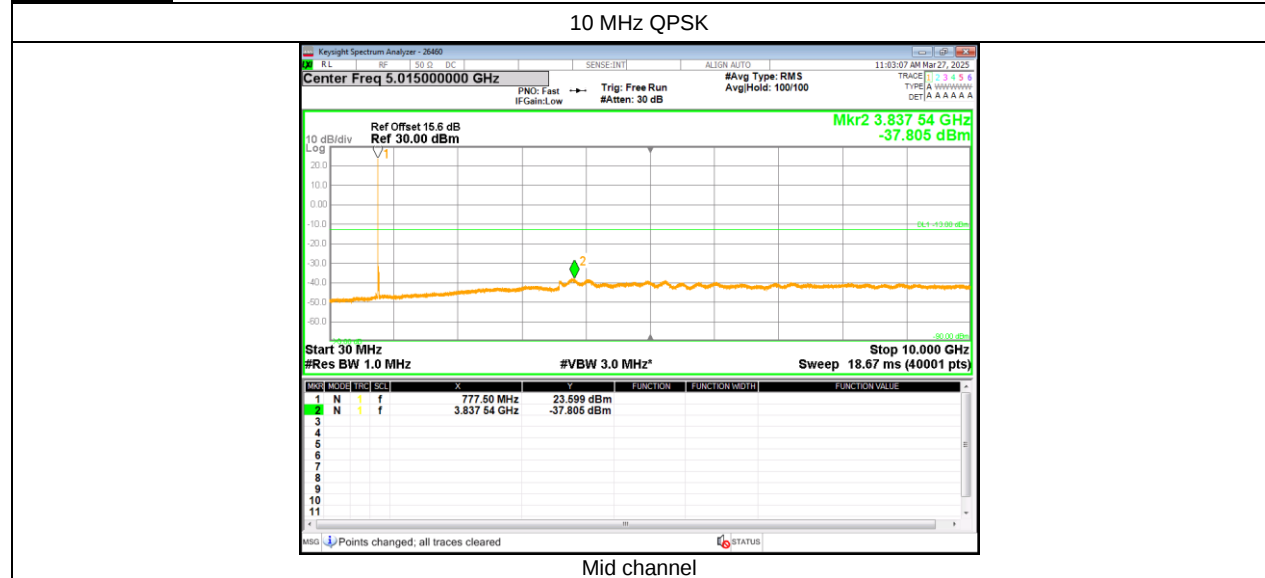


LTE Band 66


20 MHz QPSK

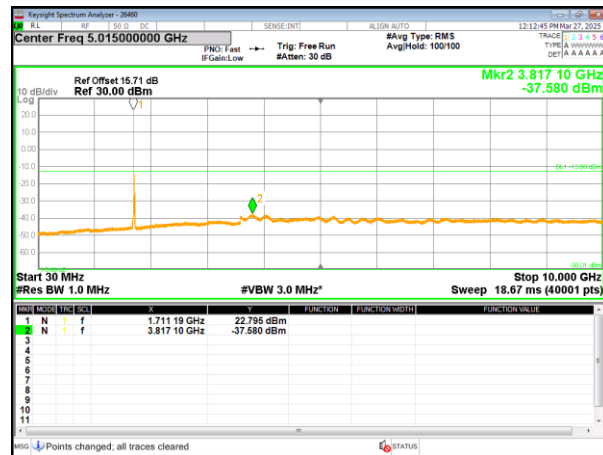


Low channel

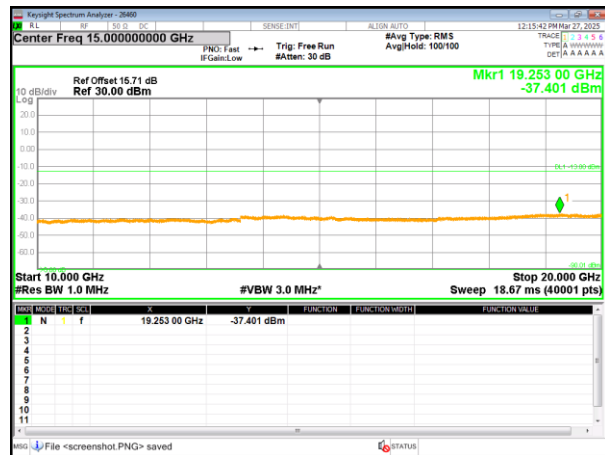


Low channel

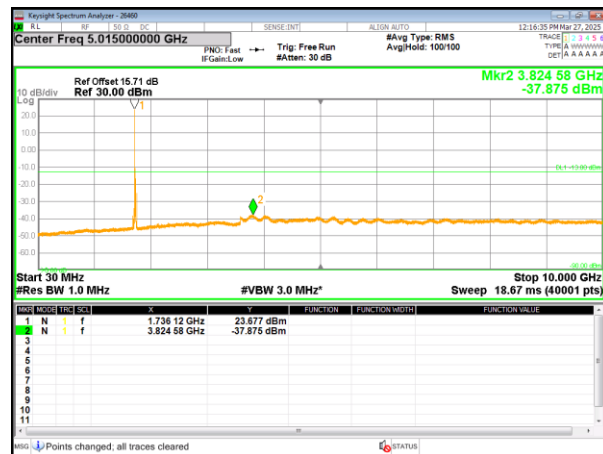


Mid channel

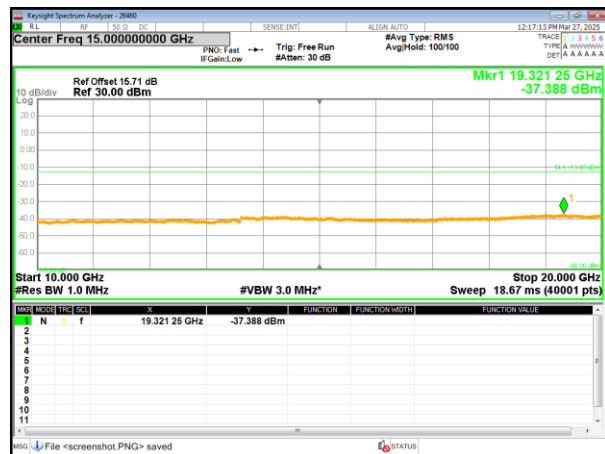

Mid channel

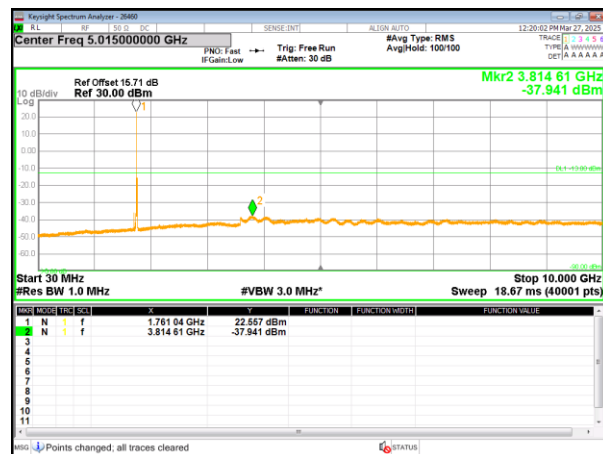


High channel

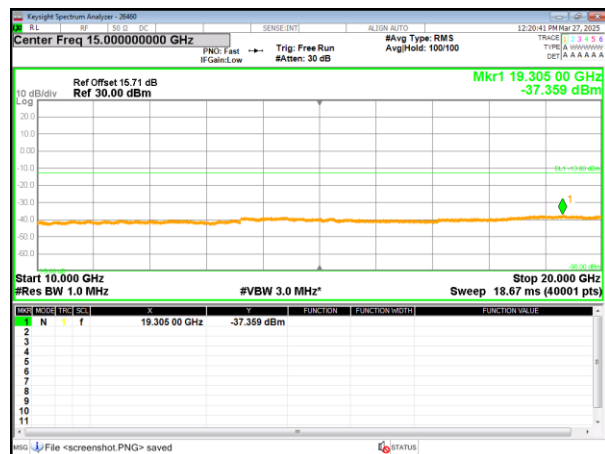


High channel

LTE Band 71


20 MHz QPSK

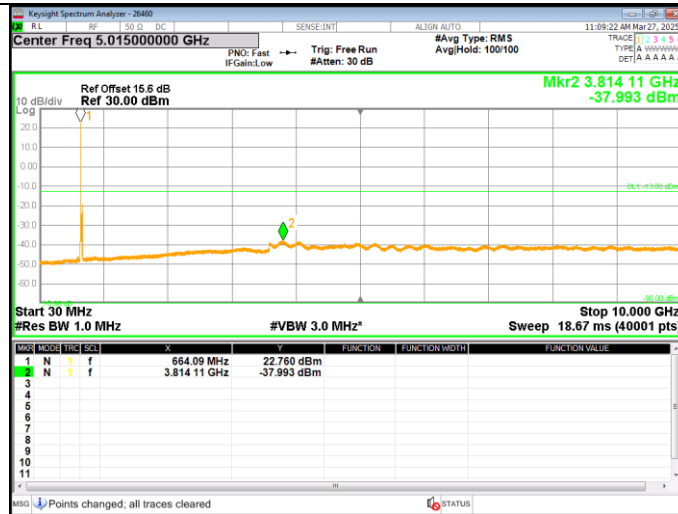

Low channel

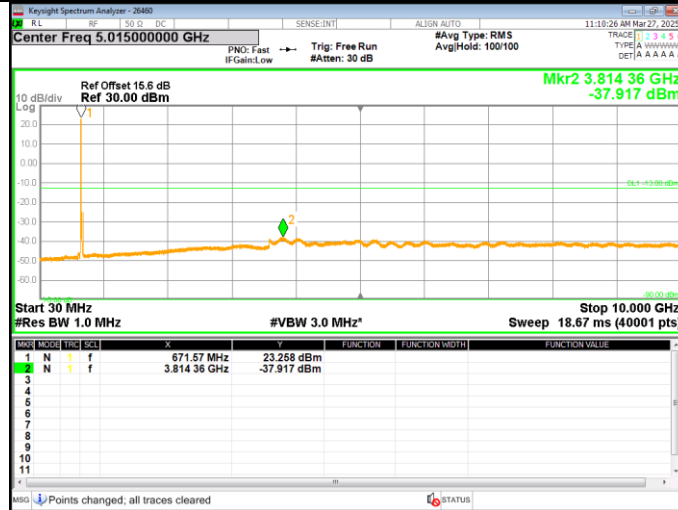

Mid channel

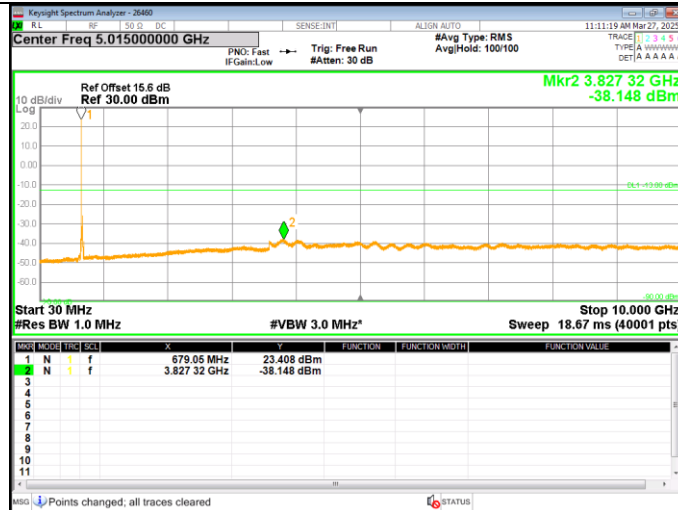

High channel

8.6. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §27.54

LIMITS

§27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v03r01

NOTE

Test were performed each lowest or highest frequency on the modulation condition of more wide bandwidth.(Please refer to OBW results)

RESULTS

See the following pages.

8.6.1. FREQUENCY STABILITY RESULT

WCDMA B4 (Lowest Frequency: HSDPA / Highest Frequency: HSDPA)

Test Date	2025-04-24
Test Engineer	26460

Limit		1710	1755	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	1710.3090	1754.6857		
Extreme (50C)		1710.3090	1754.6857	3.7	0.002
Extreme (40C)		1710.3090	1754.6857	3.4	0.002
Extreme (30C)		1710.3090	1754.6857	2.7	0.002
Extreme (10C)		1710.3090	1754.6857	2.4	0.001
Extreme (0C)		1710.3090	1754.6857	2.7	0.002
Extreme (-10C)		1710.3090	1754.6857	2.1	0.001
Extreme (-20C)		1710.3090	1754.6857	1.9	0.001
Extreme (-30C)		1710.3090	1754.6857	2.3	0.001
20C	15%	1710.3090	1754.6857	1.6	0.001
	-15%	1710.3090	1754.6857	1.6	0.001
	End Point	1710.3090	1754.6857	1.8	0.001

LTE Band 7 (Lowest Frequency: QPSK / Highest Frequency: 16QAM)

Test Date	2025-04-24
Test Engineer	26460

Limit		2500	2570	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	2500.2549	2569.7472		
Extreme (50C)		2500.2548	2569.7471	-3.2	-0.001
Extreme (40C)		2500.2548	2569.7471	-2.5	-0.001
Extreme (30C)		2500.2548	2569.7471	-2.8	-0.001
Extreme (10C)		2500.2548	2569.7471	-1.7	-0.001
Extreme (0C)		2500.2548	2569.7471	-1.8	-0.001
Extreme (-10C)		2500.2548	2569.7471	-2.0	-0.001
Extreme (-20C)		2500.2548	2569.7471	-2.3	-0.001
Extreme (-30C)		2500.2548	2569.7471	-2.1	-0.001
20C	15%	2500.2548	2569.7471	-1.9	-0.001
	-15%	2500.2548	2569.7471	-1.7	-0.001
	End Point	2500.2548	2569.7471	-1.6	-0.001

LTE Band 12 (Lowest Frequency: 16QAM/ Highest Frequency: QPSK)

Test Date	2025-04-22
Test Engineer	26460

Limit		699	716	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	699.1565	715.8466	3.1	0.004
Extreme (50C)		699.1565	715.8466		
Extreme (40C)		699.1565	715.8466		
Extreme (30C)		699.1565	715.8466		
Extreme (10C)		699.1565	715.8466		
Extreme (0C)		699.1565	715.8466		
Extreme (-10C)		699.1565	715.8466		
Extreme (-20C)		699.1565	715.8466		
Extreme (-30C)		699.1565	715.8466		
20C	15%	699.1565	715.8466	1.8	0.003
	-15%	699.1565	715.8466	1.6	0.002
	End Point	699.1565	715.8466	1.5	0.002

LTE Band 13 (Lowest Frequency: QPSK / Highest Frequency: QPSK)

Test Date	2025-04-10
Test Engineer	26460

Limit		777	787	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	777.2545	786.7489		
Extreme (50C)		777.2545	786.7489	2.4	0.003
Extreme (40C)		777.2545	786.7489	3.0	0.004
Extreme (30C)		777.2545	786.7489	2.6	0.003
Extreme (10C)		777.2545	786.7489	2.3	0.003
Extreme (0C)		777.2545	786.7489	1.8	0.002
Extreme (-10C)		777.2545	786.7489	1.2	0.002
Extreme (-20C)		777.2545	786.7489	1.6	0.002
Extreme (-30C)		777.2545	786.7489	1.9	0.002
20C	15%	777.2545	786.7489	1.5	0.002
	-15%	777.2545	786.7489	1.8	0.002
	End Point	777.2545	786.7489	1.6	0.002

LTE Band 66 (Lowest Frequency: QPSK / Highest Frequency: 16QAM)

Test Date	2025-04-28
Test Engineer	26460

Limit		1710	1780	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	1710.1525	1779.8480		
Extreme (50C)		1710.1525	1779.8479	-3.6	-0.002
Extreme (40C)		1710.1525	1779.8479	-3.2	-0.002
Extreme (30C)		1710.1525	1779.8479	-2.5	-0.001
Extreme (10C)		1710.1525	1779.8479	-2.5	-0.001
Extreme (0C)		1710.1525	1779.8479	-1.8	-0.001
Extreme (-10C)		1710.1525	1779.8479	-1.7	-0.001
Extreme (-20C)		1710.1525	1779.8479	-1.3	-0.001
Extreme (-30C)		1710.1525	1779.8479	-2.0	-0.001
20C	15%	1710.1525	1779.8479	-1.9	-0.001
	-15%	1710.1525	1779.8479	-1.5	-0.001
	End Point	1710.1525	1779.8479	-1.6	-0.001

LTE Band 71 (Lowest Frequency: 16QAM / Highest Frequency: QPSK)

Test Date	2025-04-28
Test Engineer	26460

Limit		663	698	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	663.2492	697.7582		
Extreme (50C)		663.2492	697.7582	3.1	0.005
Extreme (40C)		663.2492	697.7582	2.9	0.004
Extreme (30C)		663.2492	697.7582	2.6	0.004
Extreme (10C)		663.2492	697.7582	1.9	0.003
Extreme (0C)		663.2492	697.7582	1.5	0.002
Extreme (-10C)		663.2492	697.7582	1.7	0.003
Extreme (-20C)		663.2492	697.7582	2.2	0.003
Extreme (-30C)		663.2492	697.7582	2.6	0.004
20C	15%	663.2492	697.7582	1.7	0.002
	-15%	663.2492	697.7582	1.3	0.002
	End Point	663.2492	697.7582	1.6	0.002

9. RADIATED RESULTS

9.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §27.50

LIMITS

§27.50:

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c) (10) - Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d)(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

(h) The following power limits shall apply in the BRS and EBS:

(2) Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

TEST PROCEDURE

ANSI / TIA / EIA 603 E Clause 2.2.17; ESU40 setting reference to 971168 D01 v03r01

For radiated output power measurement with a ESU40:

- a) Set the RBW $\geq 1\%$ to 5% of the OBW;
- b) Set VBW $\geq 3 \times$ RBW;
- c) Set span $\geq 2 \times$ to $3 \times$ the OBW.;
- d) Sweep time = auto couple or Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. Transmission period is the on and off time of the transmitter.;
- e) Detector = rms;
- f) Ensure that the number of measurement points $\geq 2 \times \text{span/RBW}$;
- g) Trace mode = average;
- h) If the EUT can be configured to transmit continuously, then set the trigger to free run.
- i) If the EUT cannot be configured to transmit continuously, then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Verify that the sweep time is less than or equal to the transmission burst duration. Time gating can also be used under similar constraints (i.e., configured such that measurement data is collected only during active full-power transmissions).
- j) Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over multiple symbols, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.
- k) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges. If the instrument does not have a band or channel power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

NOTE

LTE: The OBW value corresponding to the total channel bandwidth is the OBW of FullRB. Measurements were made with a 1RB configuration (Worst case) over the entire channel bandwidth, and FRB configurations were also reported for the worst BW.

TEST RESULTS

See the following pages.

9.1.1. ERP/EIRP RESULT

WCDMA

Band	Mode	Frequency (MHz)	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (mW)	Limit (dBm)	Delta (dB)
Band 4	REL99	1712.40	9.63	H	4.32	9.47	14.78	30.06	30.00	-15.22
		1732.60	9.79	H	4.35	9.54	14.98	31.48	30.00	-15.02
		1752.60	9.29	H	4.37	9.60	14.52	28.31	30.00	-15.48
	HSDPA	1712.40	6.67	H	4.32	9.47	11.82	15.21	30.00	-18.18
		1732.60	6.96	H	4.35	9.54	12.15	16.41	30.00	-17.85
		1752.60	8.51	H	4.37	9.60	13.74	23.66	30.00	-16.26

LTE Band 7

BW (MHz)	Modulation	Frequency (MHz)	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (mW)	Limit (dBm)	Delta (dB)	RB
20	QPSK	2510.00	8.23	H	5.25	10.04	13.02	20.04	33.00	-19.98	1/0
		2535.00	7.54	H	5.28	9.99	12.24	16.75	33.00	-20.76	1/0
		2560.00	6.38	H	5.31	9.95	11.01	12.62	33.00	-21.99	1/0
	16-QAM	2510.00	7.58	H	5.25	10.04	12.37	17.26	33.00	-20.63	1/0
		2535.00	6.35	H	5.28	9.99	11.05	12.74	33.00	-21.95	1/0
		2560.00	4.42	H	5.31	9.95	9.05	8.04	33.00	-23.95	1/0
15	QPSK	2507.50	8.10	H	5.25	10.04	12.89	19.45	33.00	-20.11	1/0
		2535.00	7.41	H	5.28	9.99	12.11	16.26	33.00	-20.89	1/0
		2562.50	6.35	H	5.31	9.94	10.98	12.53	33.00	-22.02	1/0
	16-QAM	2507.50	7.48	H	5.25	10.04	12.27	16.87	33.00	-20.73	1/0
		2535.00	5.84	H	5.28	9.99	10.54	11.32	33.00	-22.46	1/0
		2562.50	4.60	H	5.31	9.94	9.23	8.38	33.00	-23.77	1/0
10	QPSK	2505.00	7.95	H	5.25	10.05	12.75	18.84	33.00	-20.25	1/0
		2535.00	7.27	H	5.28	9.99	11.97	15.74	33.00	-21.03	1/0
		2565.00	6.23	H	5.32	9.94	10.86	12.19	33.00	-22.14	1/0
	16-QAM	2505.00	6.92	H	5.25	10.05	11.72	14.86	33.00	-21.28	1/0
		2535.00	5.72	H	5.28	9.99	10.42	11.02	33.00	-22.58	1/0
		2565.00	4.47	H	5.32	9.94	9.10	8.13	33.00	-23.90	1/0
5	QPSK	2502.50	7.87	H	5.25	10.05	12.67	18.49	33.00	-20.33	1/0
		2535.00	7.24	H	5.28	9.99	11.94	15.63	33.00	-21.06	1/0
		2567.50	6.11	H	5.32	9.94	10.73	11.83	33.00	-22.27	1/0
	16-QAM	2502.50	6.97	H	5.25	10.05	11.77	15.03	33.00	-21.23	1/0
		2535.00	5.73	H	5.28	9.99	10.43	11.04	33.00	-22.57	1/0
		2567.50	4.31	H	5.32	9.94	8.93	7.82	33.00	-24.07	1/0
20	QPSK	2510.00	7.34	H	5.25	10.04	12.12	16.29	33.00	-20.88	100/0
		2535.00	6.52	H	5.28	9.99	11.22	13.24	33.00	-21.78	100/0
		2560.00	5.37	H	5.31	9.95	10.01	10.02	33.00	-22.99	100/0
	16-QAM	2510.00	6.68	H	5.25	10.04	11.46	14.00	33.00	-21.54	100/0
		2535.00	5.55	H	5.28	9.99	10.25	10.59	33.00	-22.75	100/0
		2560.00	3.42	H	5.31	9.95	8.06	6.40	33.00	-24.94	100/0

LTE Band 12

BW (MHz)	Modulation	Frequency (MHz)	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	ERP (mW)	Limit (dBm)	Delta (dB)	RB
10	QPSK	704.00	12.09	H	2.79	-1.34	7.95	6.24	34.77	-26.82	1/0
		707.50	12.42	H	2.80	-1.34	8.29	6.75	34.77	-26.48	1/0
		711.00	12.98	H	2.81	-1.33	8.85	7.67	34.77	-25.92	1/0
	16-QAM	704.00	9.79	H	2.79	-1.34	5.65	3.67	34.77	-29.12	1/0
		707.50	10.12	H	2.80	-1.34	5.99	3.97	34.77	-28.78	1/0
		711.00	10.80	H	2.81	-1.33	6.67	4.65	34.77	-28.10	1/0
5	QPSK	701.50	12.01	H	2.79	-1.35	7.87	6.12	34.77	-26.90	1/0
		707.50	12.49	H	2.80	-1.34	8.36	6.85	34.77	-26.41	1/0
		713.50	12.91	H	2.81	-1.32	8.78	7.55	34.77	-25.99	1/0
	16-QAM	701.50	9.82	H	2.79	-1.35	5.68	3.70	34.77	-29.09	1/0
		707.50	10.18	H	2.80	-1.34	6.05	4.03	34.77	-28.72	1/0
		713.50	10.68	H	2.81	-1.32	6.55	4.52	34.77	-28.22	1/0
3	QPSK	700.50	11.89	H	2.79	-1.35	7.75	5.96	34.77	-27.02	1/0
		707.50	12.33	H	2.80	-1.34	8.20	6.61	34.77	-26.57	1/0
		714.50	12.96	H	2.82	-1.32	8.82	7.62	34.77	-25.95	1/0
	16-QAM	700.50	9.60	H	2.79	-1.35	5.46	3.52	34.77	-29.31	1/0
		707.50	10.04	H	2.80	-1.34	5.91	3.90	34.77	-28.86	1/0
		714.50	10.80	H	2.82	-1.32	6.66	4.63	34.77	-28.11	1/0
1.4	QPSK	699.70	11.86	H	2.78	-1.35	7.72	5.92	34.77	-27.05	1/0
		707.50	12.38	H	2.80	-1.34	8.25	6.68	34.77	-26.52	1/0
		715.30	12.90	H	2.82	-1.32	8.77	7.53	34.77	-26.00	1/5
	16-QAM	699.70	9.75	H	2.78	-1.35	5.61	3.64	34.77	-29.16	1/0
		707.50	10.49	H	2.80	-1.34	6.36	4.33	34.77	-28.41	1/0
		715.30	10.70	H	2.82	-1.32	6.57	4.54	34.77	-28.20	1/5
10	QPSK	704.00	10.97	H	2.79	-1.34	6.83	4.82	34.77	-27.94	50/0
		707.50	11.39	H	2.80	-1.34	7.26	5.32	34.77	-27.51	50/0
		711.00	10.84	H	2.81	-1.33	6.71	4.69	34.77	-28.06	50/0
	16-QAM	704.00	8.77	H	2.79	-1.34	4.63	2.90	34.77	-30.14	50/0
		707.50	9.08	H	2.80	-1.34	4.95	3.13	34.77	-29.82	50/0
		711.00	9.91	H	2.81	-1.33	5.78	3.78	34.77	-28.99	50/0

LTE Band 13

BW (MHz)	Modulation	Frequency (MHz)	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	ERP (mW)	Limit (dBm)	Delta (dB)	RB
10	QPSK	782.00	16.70	V	2.94	-1.19	12.58	18.11	34.77	-22.19	1/0
	16-QAM	782.00	15.87	V	2.94	-1.19	11.75	14.96	34.77	-23.02	1/0
5	QPSK	779.50	17.73	V	2.94	-1.19	13.61	22.96	34.77	-21.16	1/0
		782.00	16.81	V	2.94	-1.19	12.69	18.58	34.77	-22.08	1/0
		784.50	17.84	V	2.95	-1.18	13.71	23.50	34.77	-21.06	1/0
	16-QAM	779.50	16.45	V	2.94	-1.19	12.33	17.10	34.77	-22.44	1/0
		782.00	15.69	V	2.94	-1.19	11.57	14.35	34.77	-23.20	1/0
		784.50	16.73	V	2.95	-1.18	12.60	18.20	34.77	-22.17	1/0
5	QPSK	779.50	16.70	V	2.94	-1.19	12.58	18.11	34.77	-22.19	25/0
		782.00	15.86	V	2.94	-1.19	11.74	14.93	34.77	-23.03	25/0
		784.50	16.74	V	2.95	-1.18	12.61	18.24	34.77	-22.16	25/0
	16-QAM	779.50	15.34	V	2.94	-1.19	11.22	13.24	34.77	-23.55	25/0
		782.00	14.53	V	2.94	-1.19	10.41	10.99	34.77	-24.36	25/0
		784.50	15.54	V	2.95	-1.18	11.41	13.84	34.77	-23.36	25/0

LTE Band 66

BW (MHz)	Modulation	Frequency (MHz)	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	ERP (mW)	Limit (dBm)	Delta (dB)	RB
20	QPSK	1720.00	11.13	H	4.33	9.50	16.30	42.66	30.00	-13.70	1/0
		1745.00	10.68	H	4.37	9.58	15.90	38.90	30.00	-14.10	1/0
		1770.00	11.24	H	4.40	9.62	16.46	44.26	30.00	-13.54	1/0
	16-QAM	1720.00	10.15	H	4.33	9.50	15.32	34.04	30.00	-14.68	1/0
		1745.00	9.78	H	4.37	9.58	15.00	31.62	30.00	-15.00	1/0
		1770.00	10.47	H	4.40	9.62	15.70	37.15	30.00	-14.30	1/0
15	QPSK	1717.50	10.90	H	4.32	9.49	16.07	40.46	30.00	-13.93	1/0
		1745.00	10.57	H	4.37	9.58	15.79	37.93	30.00	-14.21	1/0
		1772.50	11.14	H	4.40	9.63	16.37	43.35	30.00	-13.63	1/0
	16-QAM	1717.50	10.00	H	4.32	9.49	15.17	32.89	30.00	-14.83	1/0
		1745.00	9.27	H	4.37	9.58	14.49	28.12	30.00	-15.51	1/0
		1772.50	10.29	H	4.40	9.63	15.52	35.65	30.00	-14.48	1/0
10	QPSK	1715.00	10.68	H	4.32	9.48	15.84	38.37	30.00	-14.16	1/0
		1745.00	10.44	H	4.37	9.58	15.66	36.81	30.00	-14.34	1/0
		1775.00	11.02	H	4.40	9.63	16.25	42.17	30.00	-13.75	1/0
	16-QAM	1715.00	9.30	H	4.32	9.48	14.46	27.93	30.00	-15.54	1/0
		1745.00	9.17	H	4.37	9.58	14.39	27.48	30.00	-15.61	1/0
		1775.00	10.14	H	4.40	9.63	15.37	34.43	30.00	-14.63	1/0
5	QPSK	1712.50	10.56	H	4.32	9.47	15.72	37.33	30.00	-14.28	1/0
		1745.00	10.44	H	4.37	9.58	15.66	36.81	30.00	-14.34	1/0
		1777.50	10.88	H	4.40	9.63	16.12	40.93	30.00	-13.88	1/0
	16-QAM	1712.50	9.27	H	4.32	9.47	14.43	27.73	30.00	-15.57	1/0
		1745.00	9.18	H	4.37	9.58	14.40	27.54	30.00	-15.60	1/0
		1777.50	9.96	H	4.40	9.63	15.20	33.11	30.00	-14.80	1/0
3	QPSK	1711.50	10.43	H	4.31	9.47	15.58	36.14	30.00	-14.42	1/0
		1745.00	10.27	H	4.37	9.58	15.49	35.40	30.00	-14.51	1/0
		1778.50	10.89	H	4.40	9.63	16.12	40.93	30.00	-13.88	1/0
	16-QAM	1711.50	9.08	H	4.31	9.47	14.23	26.49	30.00	-15.77	1/0
		1745.00	9.04	H	4.37	9.58	14.26	26.67	30.00	-15.74	1/0
		1778.50	10.05	H	4.40	9.63	15.28	33.73	30.00	-14.72	1/0
1.4	QPSK	1710.70	10.46	H	4.31	9.47	15.61	36.39	30.00	-14.39	1/0
		1745.00	10.26	H	4.37	9.58	15.48	35.32	30.00	-14.52	1/0
		1779.30	10.79	H	4.40	9.63	16.02	39.99	30.00	-13.98	1/0
	16-QAM	1710.70	9.47	H	4.31	9.47	14.62	28.97	30.00	-15.38	1/0
		1745.00	9.33	H	4.37	9.58	14.55	28.51	30.00	-15.45	1/0
		1779.30	9.77	H	4.40	9.63	15.00	31.62	30.00	-15.00	1/0
20	QPSK	1720.00	9.88	H	4.33	9.50	15.05	31.99	30.00	-14.95	100/0
		1745.00	9.67	H	4.37	9.58	14.89	30.83	30.00	-15.11	100/0
		1770.00	10.19	H	4.40	9.62	15.42	34.83	30.00	-14.58	100/0
	16-QAM	1720.00	8.98	H	4.33	9.50	14.15	26.00	30.00	-15.85	100/0
		1745.00	8.65	H	4.37	9.58	13.87	24.38	30.00	-16.13	100/0
		1770.00	9.32	H	4.40	9.62	14.55	28.51	30.00	-15.45	100/0

LTE Band 71

BW (MHz)	Modulation	Frequency (MHz)	SG reading (dBm)	Ant. Pol (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	ERP (mW)	Limit (dBm)	Delta (dB)	RB
20	QPSK	673.00	10.53	H	2.74	-1.43	6.36	4.33	34.77	-28.41	1/0
		680.50	11.01	H	2.75	-1.41	6.85	4.84	34.77	-27.92	1/0
		688.00	10.81	H	2.76	-1.39	6.66	4.63	34.77	-28.11	1/0
	16-QAM	673.00	8.56	H	2.74	-1.43	4.39	2.75	34.77	-30.38	1/0
		680.50	8.95	H	2.75	-1.41	4.79	3.01	34.77	-29.98	1/0
		688.00	8.55	H	2.76	-1.39	4.40	2.75	34.77	-30.37	1/0
15	QPSK	670.50	10.40	H	2.73	-1.44	6.23	4.20	34.77	-28.54	1/0
		680.50	10.83	H	2.75	-1.41	6.67	4.65	34.77	-28.10	1/0
		690.50	10.82	H	2.77	-1.38	6.68	4.66	34.77	-28.09	1/0
	16-QAM	670.50	8.44	H	2.73	-1.44	4.27	2.67	34.77	-30.50	1/0
		680.50	8.47	H	2.75	-1.41	4.31	2.70	34.77	-30.46	1/0
		690.50	8.45	H	2.77	-1.38	4.31	2.70	34.77	-30.46	1/0
10	QPSK	668.00	10.07	H	2.73	-1.45	5.90	3.89	34.77	-28.87	1/0
		680.50	10.78	H	2.75	-1.41	6.62	4.59	34.77	-28.15	1/0
		693.00	10.76	H	2.77	-1.37	6.62	4.59	34.77	-28.15	1/0
	16-QAM	668.00	7.69	H	2.73	-1.45	3.52	2.25	34.77	-31.25	1/0
		680.50	8.46	H	2.75	-1.41	4.30	2.69	34.77	-30.47	1/0
		693.00	8.38	H	2.77	-1.37	4.24	2.65	34.77	-30.53	1/0
5	QPSK	665.50	9.89	H	2.72	-1.45	5.72	3.73	34.77	-29.05	1/0
		680.50	10.80	H	2.75	-1.41	6.64	4.61	34.77	-28.13	1/0
		695.50	10.60	H	2.78	-1.36	6.46	4.43	34.77	-28.31	1/0
	16-QAM	665.50	7.60	H	2.72	-1.45	3.43	2.20	34.77	-31.34	1/0
		680.50	8.49	H	2.75	-1.41	4.33	2.71	34.77	-30.44	1/0
		695.50	8.18	H	2.78	-1.36	4.04	2.54	34.77	-30.73	1/0
20	QPSK	673.00	9.43	H	2.74	-1.43	5.26	3.36	34.77	-29.51	100/0
		680.50	9.93	H	2.75	-1.41	5.77	3.78	34.77	-29.00	100/0
		688.00	9.85	H	2.76	-1.39	5.70	3.72	34.77	-29.07	100/0
	16-QAM	673.00	7.68	H	2.74	-1.43	3.51	2.24	34.77	-31.26	100/0
		680.50	7.98	H	2.75	-1.41	3.82	2.41	34.77	-30.95	100/0
		688.00	7.43	H	2.76	-1.39	3.28	2.13	34.77	-31.49	100/0

9.2. RADIATED SPURIOUS EMISSION

RULE PART(S)

FCC: §2.1053, §27.53

LIMIT

§27.53:

(c)(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB.

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB.

(h) The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

(m) (4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

TEST PROCEDURE

ANSI / TIA / EIA 603 E Clause 2.2.12; ESU40 setting reference to 971168 D01 v03r01

For peak power measurement with a ESU40:

- a) Set the RBW = 100 kHz for emission below 1 GHz and 1 MHz for emissions above 1 GHz
- b) Set VBW $\geq 3 \times$ RBW;
- c) Set span ≥ 1.5 times the OBW;
- d) Sweep time = auto couple;
- e) Detector = rms;
- f) Ensure that the number of measurement points $\geq 2 \times$ span/RBW;
- g) Trace Mode = average(WCDMA, LTE);

NOTE1

UMTS: It was tested at REL 99 as worst case (the highest output power and density).

LTE: It was tested at 1RB QPSK as worst case (the highest output power and density).

NOTE2

Please refer to section 5.4 for bandwidth and RB setting about LTE bands.

RESULTS

See the following pages.

9.2.1. SPURIOUS RADIATION RESULT

WCDMA

REL99	UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
	Company: Samsung Project #: 4791706309 Date: 2025-04-18 Test Engineer: 26087 Configuration: EUT / AC Adapter, Y-Position Location: Chamber 1 Mode: Rel99 Band 4 Harmonics Test Voltage: AC 120 V, 60 Hz									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 1712.4MHz									
	3424.80	-8.7	V	3.0	43.9	1.0	-51.6	-13.0	-38.6	
	5137.20	-7.5	V	3.0	44.6	1.0	-51.0	-13.0	-38.0	
	6849.60	-4.7	V	3.0	45.0	1.0	-48.7	-13.0	-35.7	
	3424.80	-8.8	H	3.0	43.9	1.0	-51.7	-13.0	-38.7	
	5137.20	-7.6	H	3.0	44.6	1.0	-51.1	-13.0	-38.1	
	6849.60	-4.6	H	3.0	45.0	1.0	-48.6	-13.0	-35.6	
	Mid Ch, 1732.6MHz									
	3465.20	-8.2	V	3.0	44.0	1.0	-51.2	-13.0	-38.2	
	5197.80	-7.4	V	3.0	44.6	1.0	-50.9	-13.0	-37.9	
	6930.40	-4.6	V	3.0	45.1	1.0	-48.7	-13.0	-35.7	
	3465.20	-8.5	H	3.0	44.0	1.0	-51.5	-13.0	-38.5	
	5197.80	-7.3	H	3.0	44.6	1.0	-50.9	-13.0	-37.9	
	6930.40	-4.5	H	3.0	45.1	1.0	-48.6	-13.0	-35.6	
	High Ch, 1752.6MHz									
	3505.20	-7.9	V	3.0	44.0	1.0	-50.9	-13.0	-37.9	
	5257.80	-7.1	V	3.0	44.6	1.0	-50.7	-13.0	-37.7	
	7010.40	-4.3	V	3.0	45.1	1.0	-48.4	-13.0	-35.4	
	3505.20	-8.4	H	3.0	44.0	1.0	-51.4	-13.0	-38.4	
	5257.80	-7.3	H	3.0	44.6	1.0	-50.9	-13.0	-37.9	
	7010.40	-4.2	H	3.0	45.1	1.0	-48.3	-13.0	-35.3	

LTE Band 7

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		4791706309							
Date:		2025-04-15							
Test Engineer:		24542							
Configuration:		EUT / AC Adapter, Strap, X-Position							
Location:		Chamber 1							
Mode:		LTE_QPSK Band 7 Harmonics, 20MHz Bandwidth							
Test Votage:		AC 120 V, 60 Hz							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2510MHz									
5020.00	-18.5	V	3.0	44.6	1.0	-62.0	-25.0	-37.0	
7530.00	-15.6	V	3.0	44.7	1.0	-59.3	-25.0	-34.3	
10040.00	-13.4	V	3.0	42.9	1.0	-55.3	-25.0	-30.3	
5020.00	-18.6	H	3.0	44.6	1.0	-62.1	-25.0	-37.1	
7530.00	-15.7	H	3.0	44.7	1.0	-59.4	-25.0	-34.4	
10040.00	-13.4	H	3.0	42.9	1.0	-55.3	-25.0	-30.3	
Mid Ch, 2535MHz									
5070.00	-18.1	V	3.0	44.6	1.0	-61.7	-25.0	-36.7	
7605.00	-15.5	V	3.0	44.7	1.0	-59.2	-25.0	-34.2	
10140.00	-13.3	V	3.0	42.9	1.0	-55.2	-25.0	-30.2	
5070.00	-18.2	H	3.0	44.6	1.0	-61.8	-25.0	-36.8	
7605.00	-15.5	H	3.0	44.7	1.0	-59.2	-25.0	-34.2	
10140.00	-13.2	H	3.0	42.9	1.0	-55.1	-25.0	-30.1	
High Ch, 2560MHz									
5120.00	-18.2	V	3.0	44.6	1.0	-61.7	-25.0	-36.7	
7680.00	-15.6	V	3.0	44.6	1.0	-59.2	-25.0	-34.2	
10240.00	-13.4	V	3.0	42.9	1.0	-55.3	-25.0	-30.3	
5120.00	-18.2	H	3.0	44.6	1.0	-61.8	-25.0	-36.8	
7680.00	-15.5	H	3.0	44.6	1.0	-59.1	-25.0	-34.1	
10240.00	-13.1	H	3.0	42.9	1.0	-55.0	-25.0	-30.0	

LTE Band 13

5 MHz

QPSK

UL Verification Services, Inc.

Above 1GHz High Frequency Substitution Measurement

Company: Samsung

Project #: 4791706309

Date: 2025-04-16

Test Engineer: 26087

Configuration: EUT / AC Adapter, X-Position

Location: Chamber 1

Mode: LTE_QPSK Band 13 Harmonics, 5MHz Bandwidth

Test Votage: AC 120 V, 60 Hz

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 779.5MHz									
1559.00	-24.6	V	3.0	43.3	1.0	-66.8	-40.0	-26.8	
2338.50	-12.2	V	3.0	43.9	1.0	-55.1	-13.0	-42.1	
3118.00	-9.9	V	3.0	43.5	1.0	-52.5	-13.0	-39.5	
1559.00	-25.2	H	3.0	43.3	1.0	-67.5	-40.0	-27.5	
2338.50	-12.8	H	3.0	43.9	1.0	-55.6	-13.0	-42.6	
3118.00	-10.0	H	3.0	43.5	1.0	-52.6	-13.0	-39.6	
Mid Ch, 782MHz									
1564.00	-24.7	V	3.0	43.3	1.0	-67.0	-40.0	-27.0	
2346.00	-12.3	V	3.0	43.9	1.0	-55.2	-13.0	-42.2	
3128.00	-9.9	V	3.0	43.5	1.0	-52.5	-13.0	-39.5	
1564.00	-24.5	H	3.0	43.3	1.0	-66.8	-40.0	-26.8	
2346.00	-12.8	H	3.0	43.9	1.0	-55.7	-13.0	-42.7	
3128.00	-10.0	H	3.0	43.5	1.0	-52.6	-13.0	-39.6	
High Ch, 784.5MHz									
1569.00	-24.5	V	3.0	43.3	1.0	-66.8	-40.0	-26.8	
2353.50	-12.3	V	3.0	43.9	1.0	-55.2	-13.0	-42.2	
3138.00	-9.9	V	3.0	43.6	1.0	-52.4	-13.0	-39.4	
1569.00	-24.6	H	3.0	43.3	1.0	-66.9	-40.0	-26.9	
2353.50	-12.8	H	3.0	43.9	1.0	-55.7	-13.0	-42.7	
3138.00	-9.9	H	3.0	43.6	1.0	-52.5	-13.0	-39.5	

LTE Band 71

20 MHz

QPSK

UL Verification Services, Inc.

Above 1GHz High Frequency Substitution Measurement

Company: Samsung

Project #: 4791706309

Date: 2025-04-18

Test Engineer: 24542

Configuration: EUT / AC Adapter, Z-Position

Location: Chamber 1

Mode: LTE_QPSK Band 71 Harmonics, 20MHz Bandwidth

Test Votage: AC 120 V, 60 Hz

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 673MHz									
1346.00	-16.7	V	3.0	42.9	1.0	-58.6	-13.0	-45.6	
2019.00	-13.6	V	3.0	44.1	1.0	-56.7	-13.0	-43.7	
2692.00	-11.4	V	3.0	43.6	1.0	-54.0	-13.0	-41.0	
1346.00	-17.7	H	3.0	42.9	1.0	-59.6	-13.0	-46.6	
2019.00	-14.5	H	3.0	44.1	1.0	-57.6	-13.0	-44.6	
2692.00	-11.6	H	3.0	43.6	1.0	-54.2	-13.0	-41.2	
Mid Ch, 680.5MHz									
1361.00	-17.1	V	3.0	42.9	1.0	-59.0	-13.0	-46.0	
2041.50	-13.5	V	3.0	44.1	1.0	-56.6	-13.0	-43.6	
2722.00	-11.3	V	3.0	43.6	1.0	-53.9	-13.0	-40.9	
1361.00	-18.0	H	3.0	42.9	1.0	-59.9	-13.0	-46.9	
2041.50	-14.5	H	3.0	44.1	1.0	-57.6	-13.0	-44.6	
2722.00	-11.4	H	3.0	43.6	1.0	-54.0	-13.0	-41.0	
High Ch, 688MHz									
1376.00	-16.7	V	3.0	42.9	1.0	-58.7	-13.0	-45.7	
2064.00	-13.6	V	3.0	44.1	1.0	-56.6	-13.0	-43.6	
2752.00	-11.1	V	3.0	43.6	1.0	-53.7	-13.0	-40.7	
1376.00	-17.6	H	3.0	42.9	1.0	-59.6	-13.0	-46.6	
2064.00	-14.3	H	3.0	44.1	1.0	-57.3	-13.0	-44.3	
2752.00	-10.9	H	3.0	43.6	1.0	-53.5	-13.0	-40.5	

END OF REPORT