

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640 Fax: +86-755-26648637 Website: www.cga-cert.com

<u>www.cqa-cert.com</u> Report Template Revision Date: Mar.1st, 2017

Report Template Version: V03

Test Report

Report No.: CQASZ20210100004EX-01

Applicant: SHENZHEN AOME CO.,LTD

Address of Applicant:

Room301 workshop, Xinfeng Building, Yangguang Community, Xili subdustreet,

Nanshan District, Shenzhen, China

Manufacturer: SHENZHEN AOME CO.,LTD

Address of Room301 workshop, Xinfeng Building, Yangguang Community, Xili subdustreet,

Manufacturer: Nanshan District, Shenzhen, China

Equipment Under Test (EUT):

Product: Projector

All Model: S350, S280, RODPJS450, RODPJS400

Test Model No.: S350
Brand Name: N/A

FCC ID: 2ARL5-S350RN

Standards: 47 CFR Part 15, Subpart C

Date of Test: 2021-1-12 to 2021-1-29

Date of Issue: 2021-3-1
Test Result: PASS*

Tested By:

(Jun Li)

Reviewed By:

(Ares Liu)

Approved By: Sheek, Luc

(Sheek Luo)



The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

^{*} In the configuration tested, the EUT complied with the standards specified above.





1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20210100004EX-01	Rev.01	Initial report	2021-1-29



2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2013)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2013)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2013)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2013)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS

N/A: Not Applicable



3 Contents

	Page
COVER PAGE	1
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	
4 GENERAL INFORMATION	
4.1 CLIENT INFORMATION	
4.2 GENERAL DESCRIPTION OF EUT.	5
4.3 Test Environment	
4.4 DESCRIPTION OF SUPPORT UNITS	
4.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY	
4.6 TEST FACILITY	
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	
4.8 EQUIPMENT LIST	10
5 TEST RESULTS AND MEASUREMENT DATA	11
5.1 Antenna Requirement	11
5.2 CONDUCTED EMISSIONS	12
5.3 CONDUCTED PEAK OUTPUT POWER	
5.4 20DB OCCUPY BANDWIDTH	
5.5 Frequencies Separation	
5.6 HOPPING CHANNEL NUMBER	
5.7 DWELL TIME	
5.8 BAND-EDGE FOR RF CONDUCTED EMISSIONS	
5.9 Spurious RF Conducted Emissions	
5.10 OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM	
5.11 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS	
5.11.1 Radiated Emission below 1GHz5.11.2 Transmitter Emission above 1GHz	
6 PHOTOGRAPHS - EUT TEST SETUP	68
7 BUOTOGRABUS - ELIT CONSTRUCTIONAL DETAILS	70



Report No.: CQASZ20210100004EX-01

4 General Information

4.1 Client Information

Applicant:	SHENZHEN AOME CO.,LTD
Address of Applicant:	Room301 workshop, Xinfeng Building, Yangguang Community, Xili subdustreet, Nanshan District, Shenzhen, China
Manufacturer:	SHENZHEN AOME CO.,LTD
Address of Manufacturer:	Room301 workshop, Xinfeng Building, Yangguang Community, Xili subdustreet, Nanshan District, Shenzhen, China

4.2 General Description of EUT

Product Name:	Projector		
Model No.:	S350, S280, RODPJS450, RODPJS400		
Test Model No.:	S350		
Trade Mark:	N/A		
Hardware Version:	1V1		
Software Version:	V2.5.8		
Operation Frequency:	2402MHz~2480MHz		
Bluetooth Version:	V5.0		
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)		
Modulation Type:	GFSK, π/4DQPSK, 8DPSK		
Transfer Rate:	1Mbps/2Mbps/3Mbps		
Number of Channel:	79		
Hopping Channel Type:	Adaptive Frequency Hopping systems		
Product Type:	☐ Mobile ☐ Portable ☒ Fix Location		
Antenna Type:	PCB antenna		
Antenna Gain:	0dBi		
EUT Power Supply:	DC 11.1V from battery		

Note:

All model: S350, S280, RODPJS450, RODPJS400

Only the model S350 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being model name.



Report No.: CQASZ20210100004EX-01

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz



Report No.: CQASZ20210100004EX-01

4.3 Test Environment

Operating Environment:	Operating Environment:			
Temperature:	25.0 °C			
Humidity:	53 % RH			
Atmospheric Pressure:	995mbar			
Test Mode:	Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.			

4.4 Description of Support Units

The EUT has been tested with associated equipment below.

The Let The Sech tested with decestated equipment select.				
Description	Manufacturer	Model No.	Remark	Certification
AC-DC adapter	SHENZHEN FUJIA APPLIANCE CO.,LTD	MODEL: FJ-SW1501500N INPUT:100-240 50/60Hz 0.6A Max OUTPUT:15V 1500mA	Provide by applicant	SDOC





4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	±5.12dB	(1)
2	Radiated Emission (Above 1GHz)	±4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	±3.34dB	(1)
4	Radio Frequency	3×10 ⁻⁸	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8℃	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	time	0.6 %.	(1)
14	Frequency Error	5.5 Hz	(1)

⁽¹⁾This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Report No.: CQASZ20210100004EX-01

4.6 Test Facility

Shenzhen Huaxia Testing Technology Co., Ltd,

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

The test facility is recognized, certified, or accredited by the following organizations:

• IC Registration No.: 22984-1

The 3m Semi-anechoic chamber of Shenzhen Huaxia Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 4742.01)

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• FCC Registration No.: 522263

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.7 Abnormalities from Standard Conditions

None.



Report No.: CQASZ20210100004EX-01

4.8 Equipment List

			Instrument	Calibration	Calibration
Test Equipment	Manufacturer	Model No.	No.	Date	Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2020/09/22	2021/09/21
Spectrum analyzer	R&S	FSU26	CQA-038	2020/10/24	2021/10/23
Spectrum analyzer	keysight	N9020A	CQA-105	2020/10/24	2021/10/23
Preamplifier	MITEQ	AFS4-00010300-18-10P-	CQA-035	2020/09/22	2021/09/21
Preamplifier	MITEQ	AMF-6D-02001800-29- 20P	CQA-036	2020/10/29	2021/10/28
Loop antenna	Schwarzbeck	FMZB1516	CQA-087	2020/10/24	2021/10/23
Bilog Antenna	R&S	HL562	CQA-011	2020/09/22	2021/09/21
Horn Antenna	R&S	HF906	CQA-012	2020/09/22	2021/09/21
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2020/09/22	2021/09/21
Coaxial Cable (Above 1GHz)	CQA	N/A	C019	2020/09/22	2021/09/21
Coaxial Cable (Below 1GHz)	CQA	N/A	C020	2020/09/22	2021/09/21
Antenna Connector	CQA	RFC-01	CQA-080	2020/09/22	2021/09/21
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2020/09/22	2021/09/21
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2020/09/22	2021/09/21
EMI Test Receiver	R&S	ESPI3	CQA-013	2020/09/22	2021/09/21
LISN	R&S	ENV216	CQA-003	2020/11/01	2021/10/30
Coaxial cable	CQA	N/A	CQA-C009	2020/09/22	2021/09/21

Note:

The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.





5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

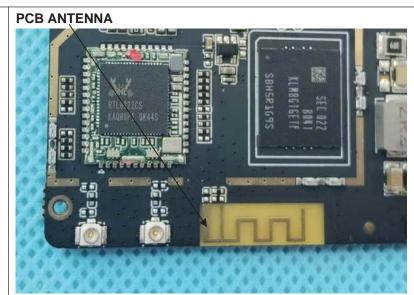

The antenna is PCB antenna. The best case gain of the antenna0dBi





5.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207			
Test Method:	ANSI C63.10: 2013			
Test Frequency Range:	150kHz to 30MHz			
Limit:	Limit (dBuV)			
	Frequency range (MHz)	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
	* Decreases with the logarithn	n of the frequency.		
Test Seture:	 The mains terminal disturroom. The EUT was connected to Impedance Stabilization N impedance. The power cal connected to a second LIS reference plane in the sam measured. A multiple sock power cables to a single L exceeded. The tabletop EUT was place ground reference plane. A placed on the horizontal ground reference plane. A vertical ground reference preference plane. The LISN unit under test and bonded mounted on top of the group between the closest points the EUT and associated ed. In order to find the maximule equipment and all of the in ANSI C63.10: 2013 on con 	o AC power source throetwork) which provides obles of all other units of SN 2, which was bondene way as the LISN 1 for the test outlet strip was used ISN provided the rating ched upon a non-metallimed for floor-standing around reference plane, the a vertical ground referom the vertical ground referom the vertical ground reference plane. The total ground reference plane. The total ground reference plane is of the LISN 1 and the quipment was at least 0 am emission, the relative terface cables must be	ough a LISN 1 (Line a 50Ω/50μH + 5Ω linear of the EUT were do to the ground or the unit being do to connect multiple of the LISN was not considered to the LISN was defended by the latest the LISN was not considered to the latest	
Test Setup:	Shielding Room EUT AE AC Mains Circumoter AE Ground	Test Receive	er	
Exploratory Test Mode:	Non-hopping transmitting mod data type at the lowest, middle		llation and all kind of	
Final Test Mode:	Through Pre-scan, charging n		onded this test data	




Report No.: CQASZ20210100004EX-01

Test Voltage:	AC 120V/60Hz
Test Results:	Pass

Measurement data

L line

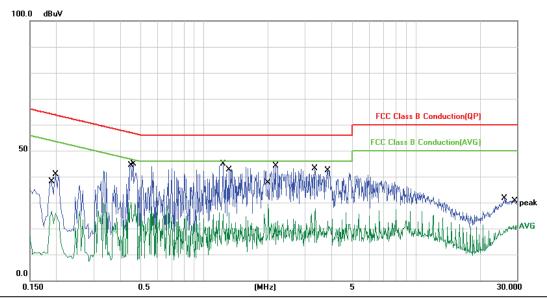


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1900	26.86	-0.13	26.73	54.03	-27.30	AVG	
2		0.1980	41.07	-0.13	40.94	63.69	-22.75	QP	
3		0.4500	30.22	-0.02	30.20	46.87	-16.67	AVG	
4		0.4620	44.78	-0.02	44.76	56.66	-11.90	QP	
5	*	1.2260	44.96	-0.15	44.81	56.00	-11.19	QP	
6		1.3060	26.38	-0.16	26.22	46.00	-19.78	AVG	
7		2.0100	29.57	-0.23	29.34	46.00	-16.66	AVG	
8		2.1740	44.48	-0.24	44.24	56.00	-11.76	QP	
9		3.3460	27.86	-0.19	27.67	46.00	-18.33	AVG	
10		3.8300	42.51	-0.20	42.31	56.00	-13.69	QP	
11		26.2540	32.13	-0.44	31.69	60.00	-28.31	QP	
12		29.5180	21.49	-0.40	21.09	50.00	-28.91	AVG	

Remark:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
- 3. If the Peak value under Average limit, the Average value is not recorded in the report.



N line

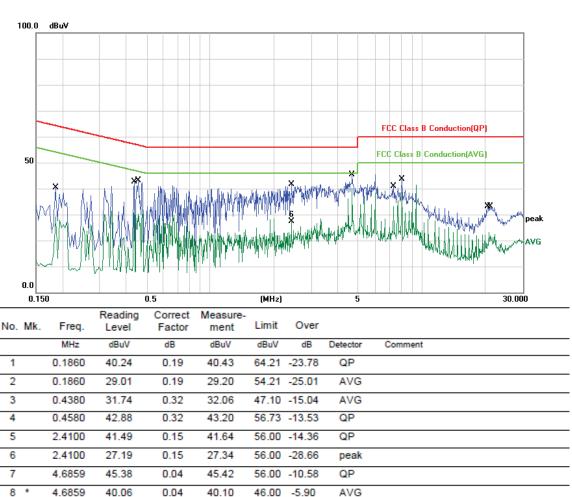

60.00 -19.21

50.00 -11.32

60.00 -26.80

50.00 -26.93

QP

AVG

QP

AVG

Remark:

9

10

11

12

7.3579

8.0299

20.4460

20.7300

40.82

38.63

33.32

23.19

-0.03

0.05

-0.12

-0.12

1. The following Quasi-Peak and Average measurements were performed on the EUT:

40.79

38.68

33.20

23.07

- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
- 3. If the Peak value under Average limit, the Average value is not recorded in the report.





5.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)		
Test Method:	ANSI C63.10:2013		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
	Remark: Offset=Cable loss+ attenuation factor.		
Limit:	21dBm		
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type		
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4DQPSK$ modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.		
Test Results:	Pass		







Measurement Data

GFSK mode						
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	2.195	30.00	Pass			
Middle	2.532	30.00	Pass			
Highest	2.597	30.00	Pass			
	π/4DQPSK m	node				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	2.947	30.00	Pass			
Middle	3.277	30.00	Pass			
Highest	3.289	30.00	Pass			
	8DPSK mo	de				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	2.912	30.00	Pass			
Middle	3.263	30.00	Pass			
Highest	3.311	30.00	Pass			




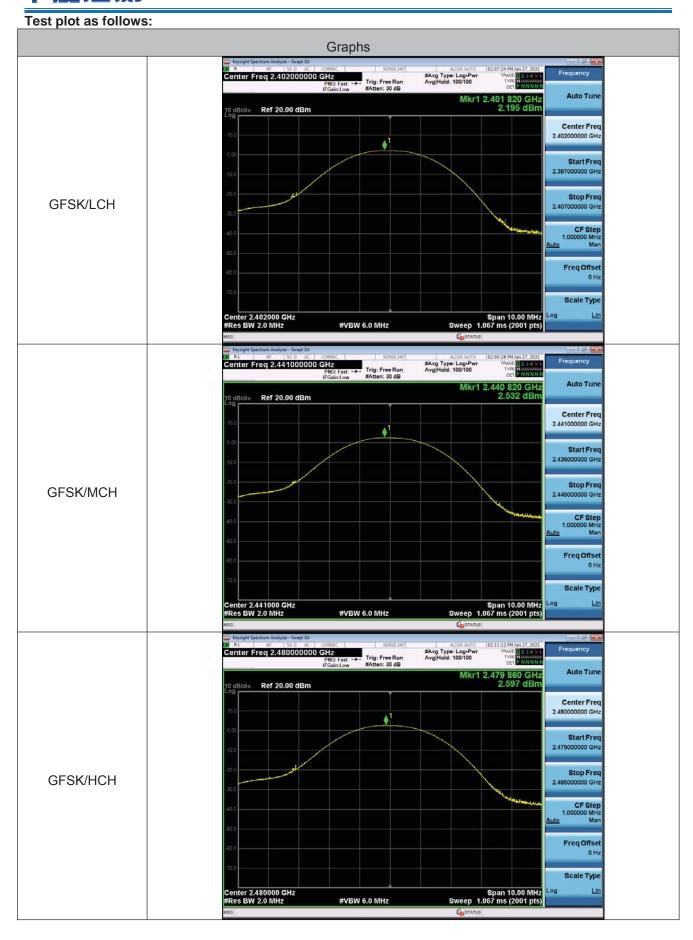



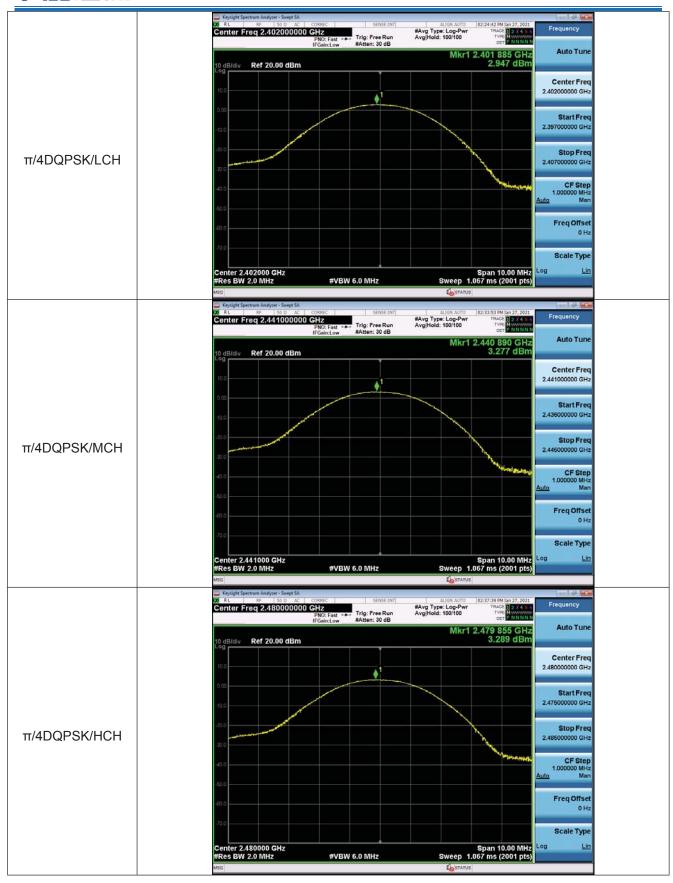




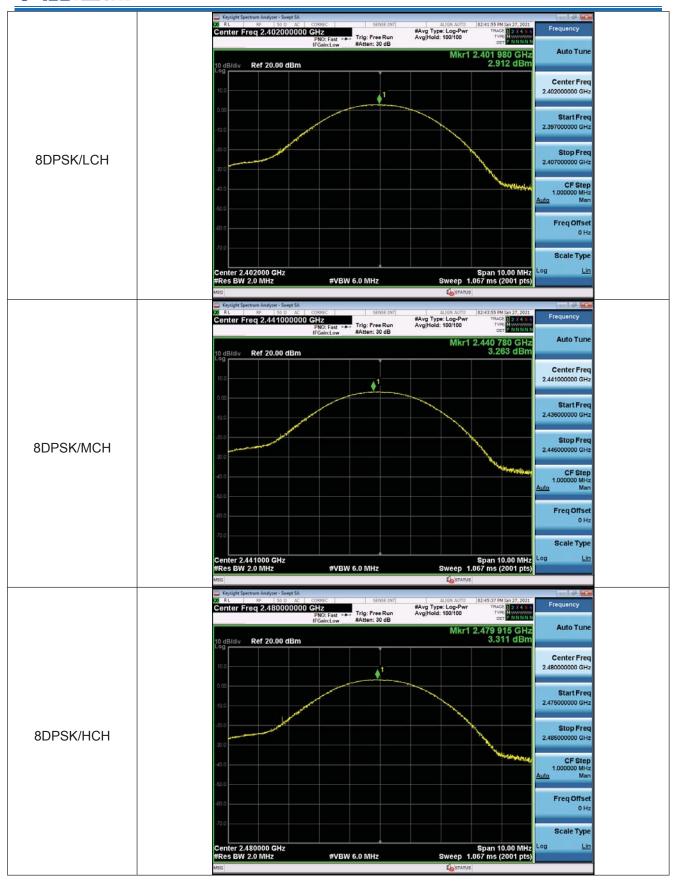




5.4 20dB Occupy Bandwidth

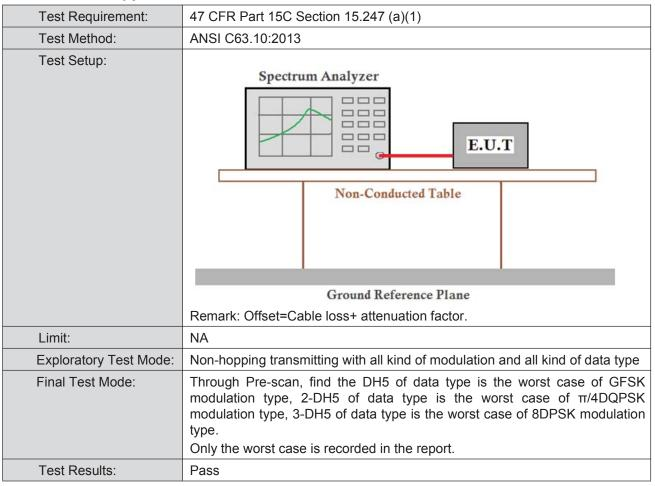

Measurement Data

Took also associ	20dB Occupy Bandwidth (MHz)				
Test channel	GFSK	π/4DQPSK	8DPSK		
Lowest	0.8876	1.289	1.282		
Middle	0.8824	1.314	1.317		
Highest	0.8895	1.279	1.293		




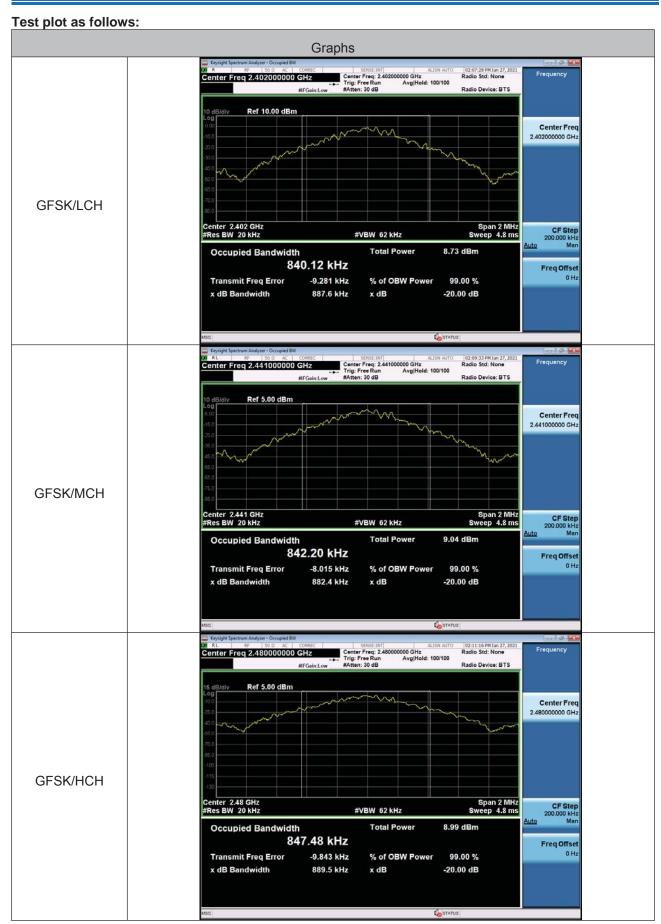








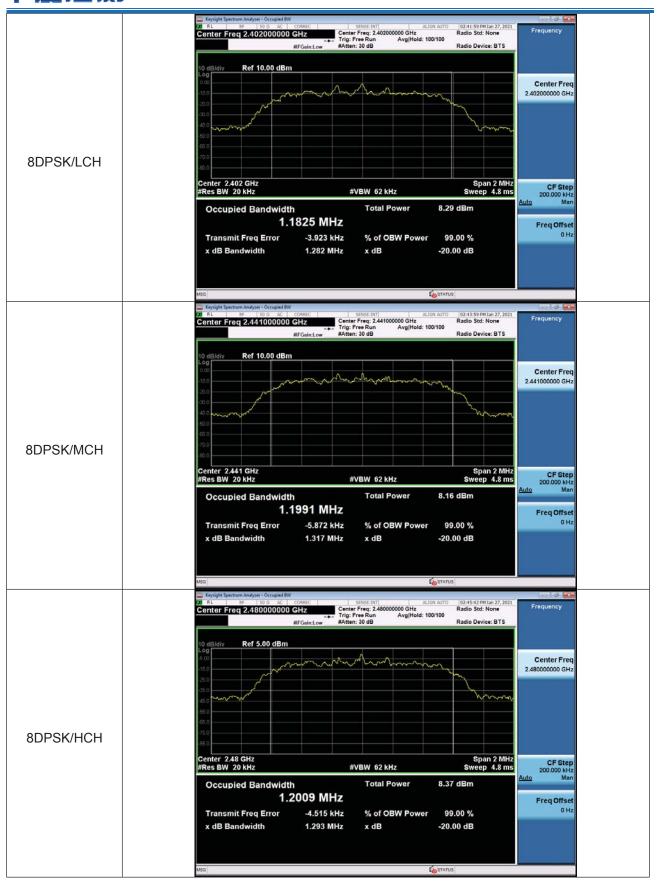



5.5 Frequencies Separation

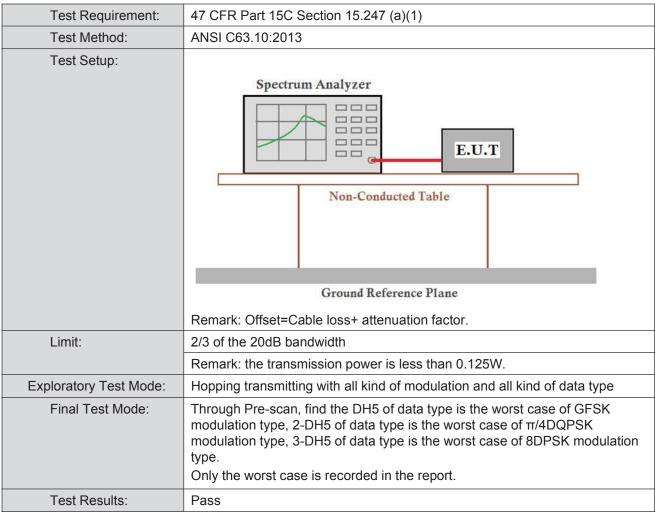


Modulation	Channel	Channel Separation (MHz)	Limit(MHz)	Result
	CH00	4.004		
	CH01	1.001		Pass
OFOK	CH39	4 00 4	25KHz or 2/3*20dB	
GFSK	CH40	1.004	bandwidth	
	CH77	0.000		
	CH78	0.999		
	CH00		1.000 25KHz or 2/3*20dB bandwidth	
	CH01	1.000		
pi/4DQPSK	CH39			Daga
	CH40	0.993		Pass
	CH77	4 000		
	CH78	1.000		




	CH00	0.991	25KHz or 2/3*20dB bandwidth	Pass
	CH01	0.991		
00001	CH39	0.999		
8DPSK	CH40			
	CH77	4 000		
	CH78	1.003		




Test plot as follows:

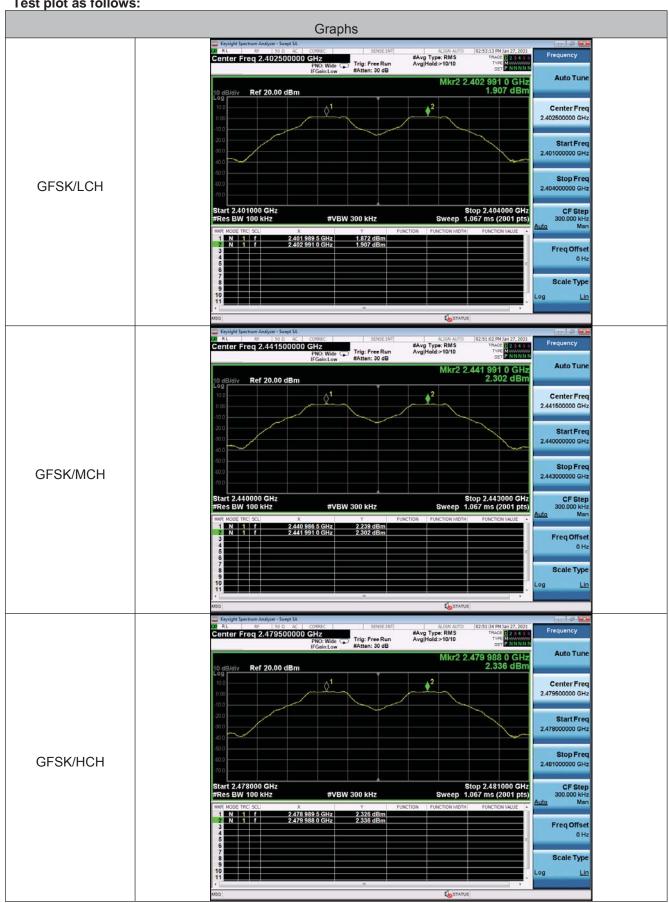



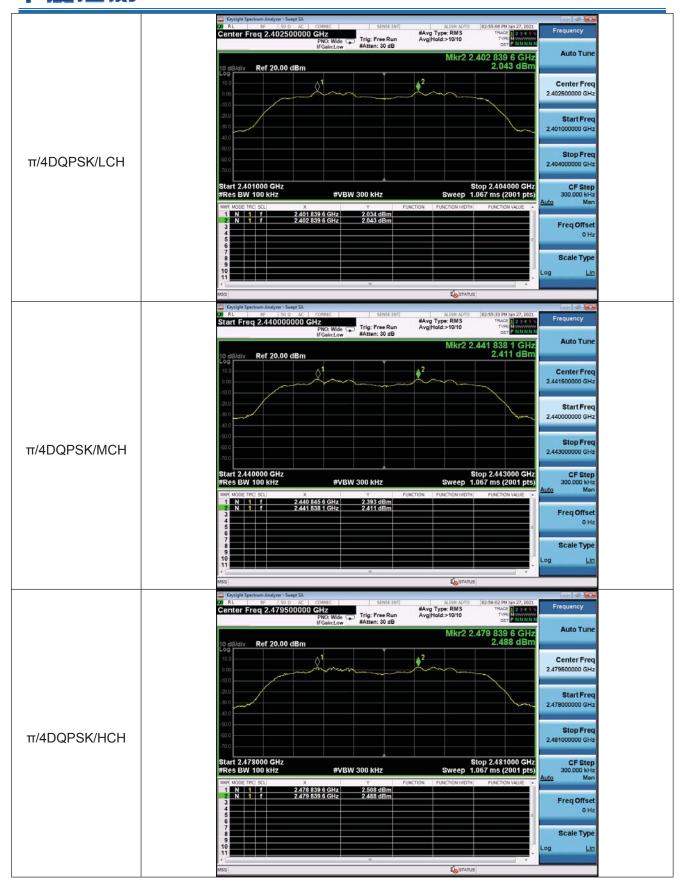




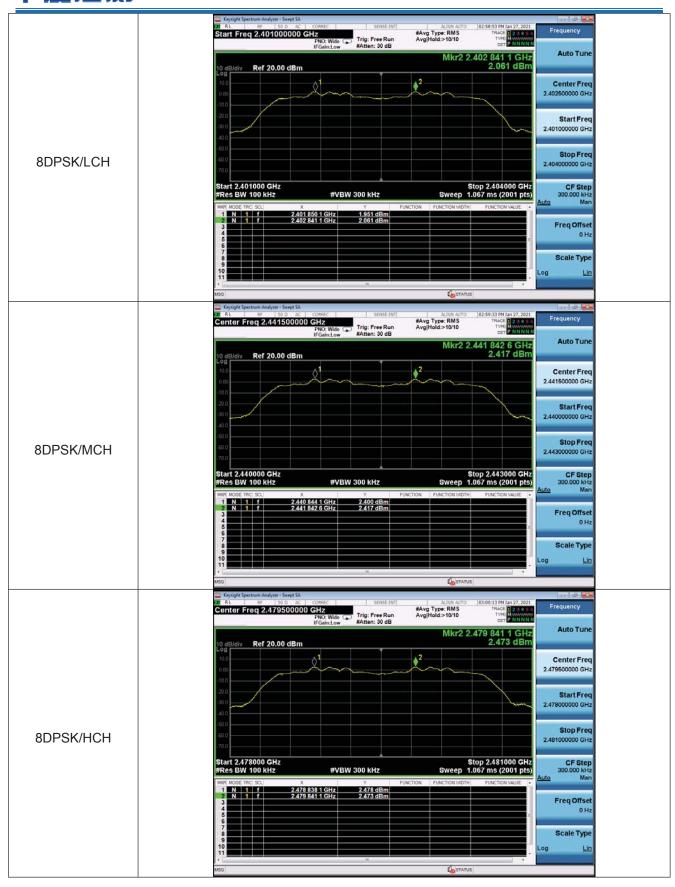



Report No.: CQASZ20210100004EX-01

5.6 Hopping Channel Number

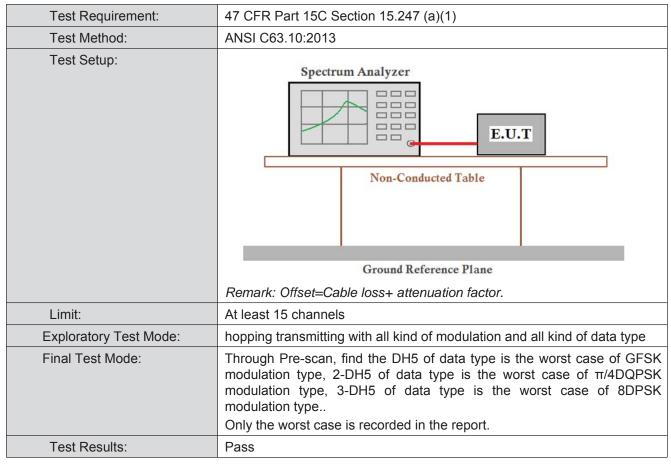


Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	79	≥15
π/4DQPSK	79	≥15
8DPSK	79	≥15




Test plot as follows:

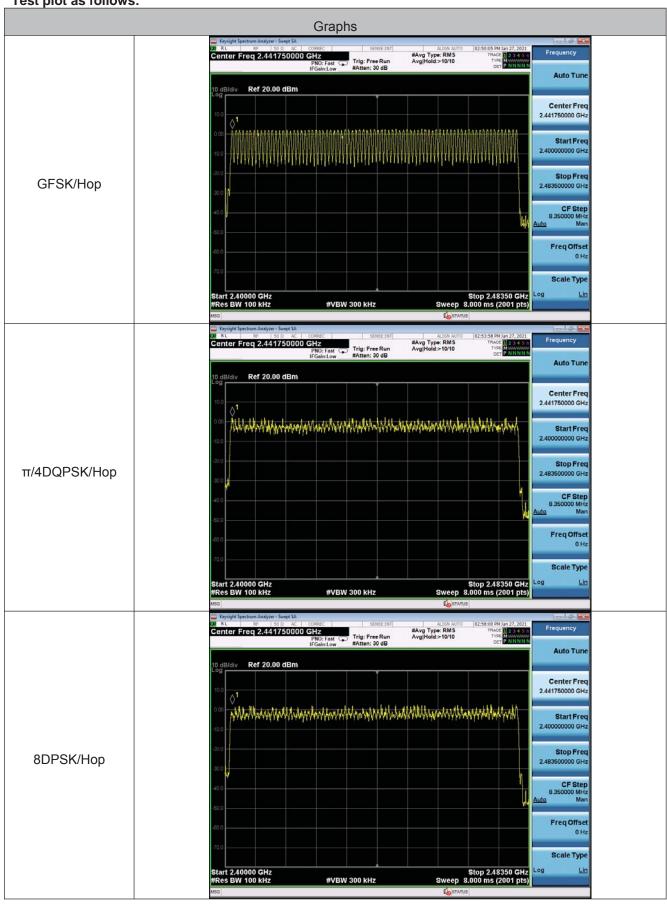



5.7 Dwell Time

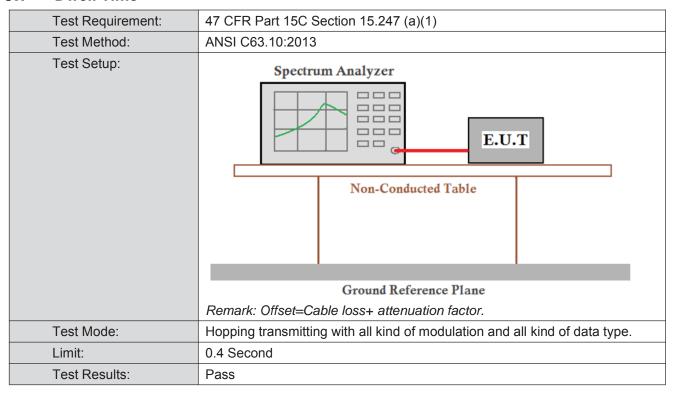

Measurement Data

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Dwell Time[ms]	Limit (ms)
GFSK	DH1	LCH	0.383	122.56	≤400
GFSK	DH1	MCH	0.379	121.28	≤400
GFSK	DH1	HCH	0.383	122.56	≤400
GFSK	DH3	LCH	1.637	261.92	≤400
GFSK	DH3	MCH	1.638	262.08	≤400
GFSK	DH3	HCH	1.638	262.08	≤400
GFSK	DH5	LCH	2.884	307.627	≤400
GFSK	DH5	MCH	2.883	307.52	≤400
GFSK	DH5	HCH	2.884	307.627	≤400
π/4DQPSK	2DH1	LCH	0.389	124.48	≤400
π/4DQPSK	2DH1	MCH	0.390	124.8	≤400
π/4DQPSK	2DH1	HCH	0.393	125.76	≤400
π/4DQPSK	2DH3	LCH	1.644	263.04	≤400
π/4DQPSK	2DH3	MCH	1.642	262.72	≤400
π/4DQPSK	2DH3	HCH	1.643	262.88	≤400
π/4DQPSK	2DH5	LCH	2.890	308.267	≤400
π/4DQPSK	2DH5	MCH	2.888	308.053	≤400



Report No.: CQASZ20210100004EX-01

π/4DQPSK	2DH5	HCH	2.893	308.587	≤400
8DPSK	3DH1	LCH	0.393	125.76	≤400
8DPSK	3DH1	MCH	0.389	124.48	≤400
8DPSK	3DH1	НСН	0.388	124.16	≤400
8DPSK	3DH3	LCH	1.643	262.88	≤400
8DPSK	3DH3	MCH	1.644	263.04	≤400
8DPSK	3DH3	HCH	1.641	262.56	≤400
8DPSK	3DH5	LCH	2.893	308.587	≤400
8DPSK	3DH5	MCH	2.889	308.160	≤400
8DPSK	3DH5	HCH	2.891	308.373	≤400

Remark:

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

DH1/2DH1/3DH1 Dwell time = Burst Width(ms)*(1600/ (2*79))*31.6


DH3/2DH3/3DH3 Dwell time = Burst Width (ms)*(1600/ (4*79))*31.6

DH5/2DH5/3DH5 Dwell time = Burst Width (ms)*(1600/ (6*79))*31.6






Span 0 Hz Sweep 10.00 ms (2001 pts)

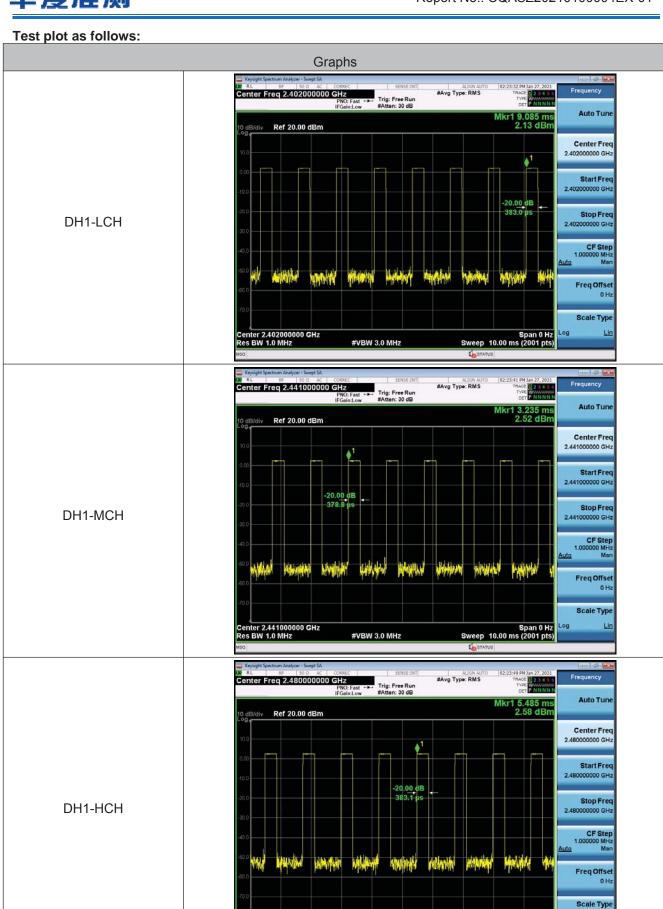


#VBW 3.0 MHz




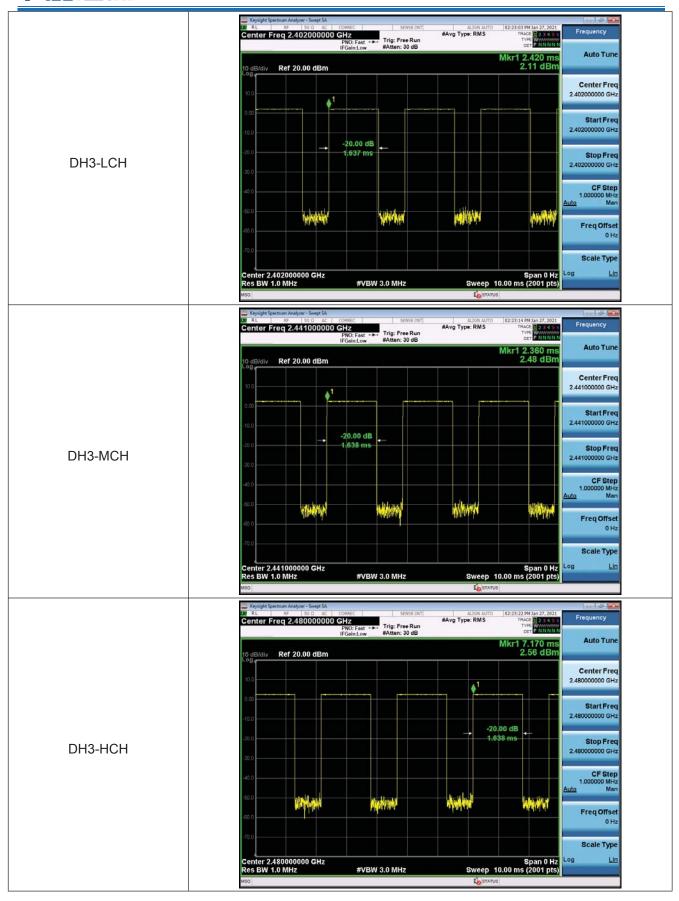




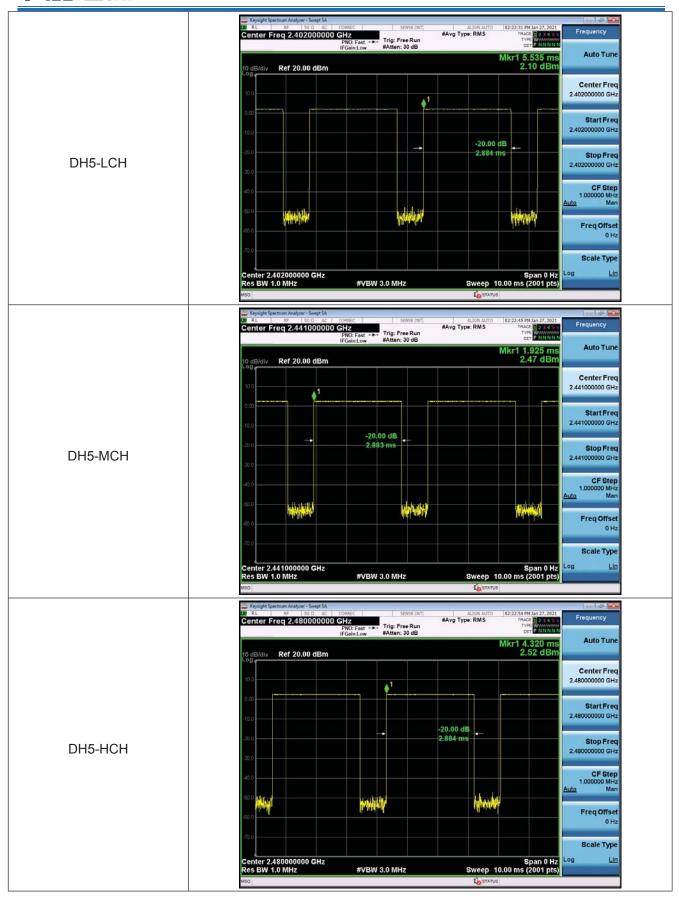




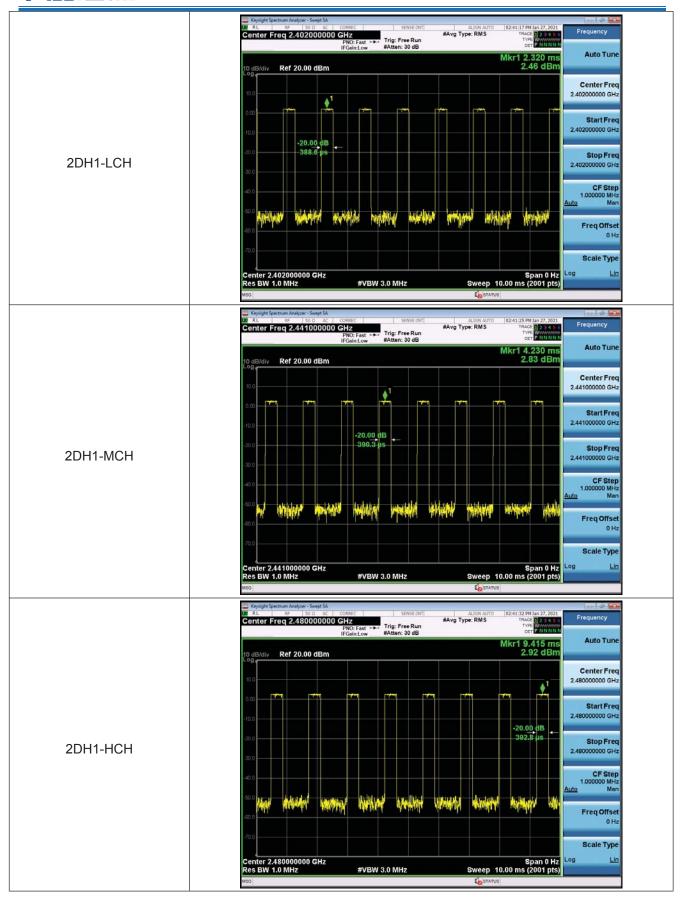




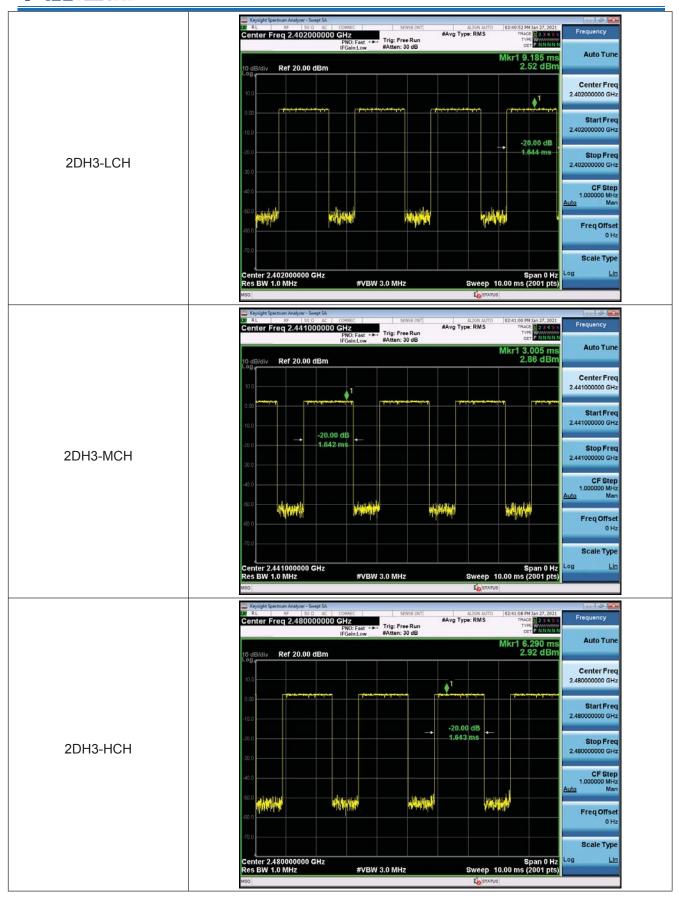




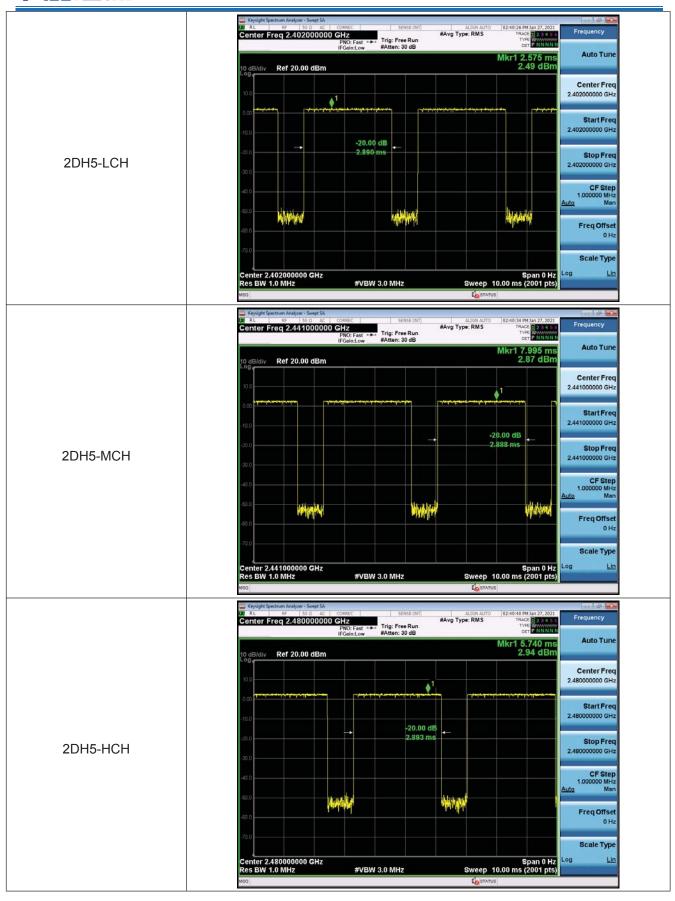




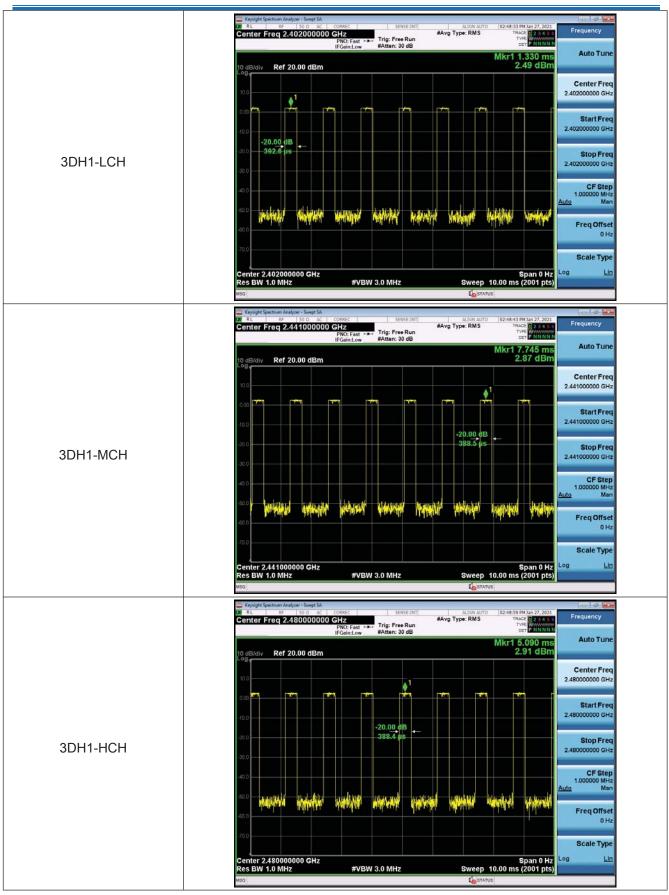



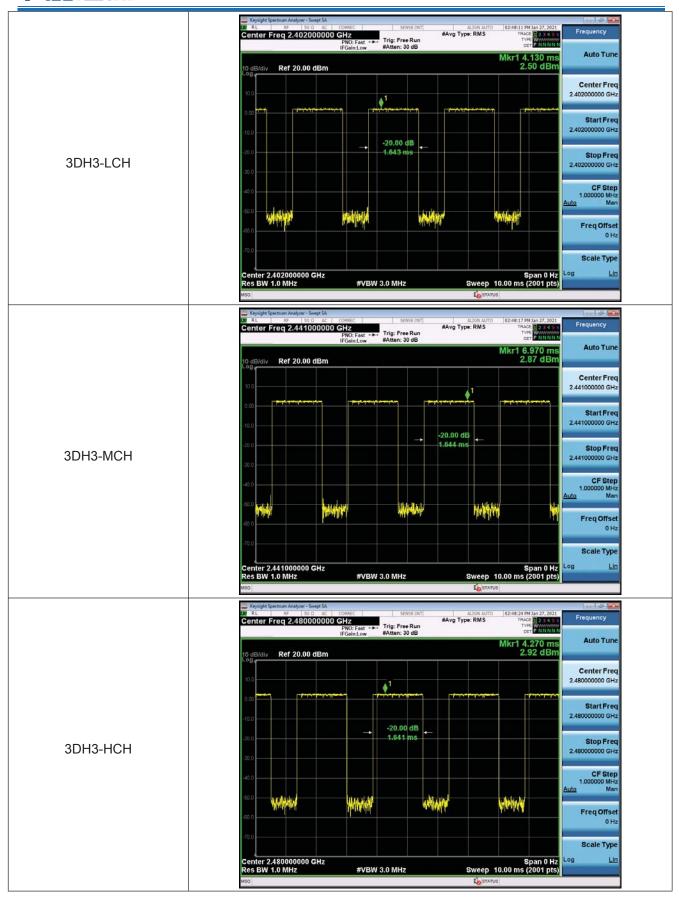




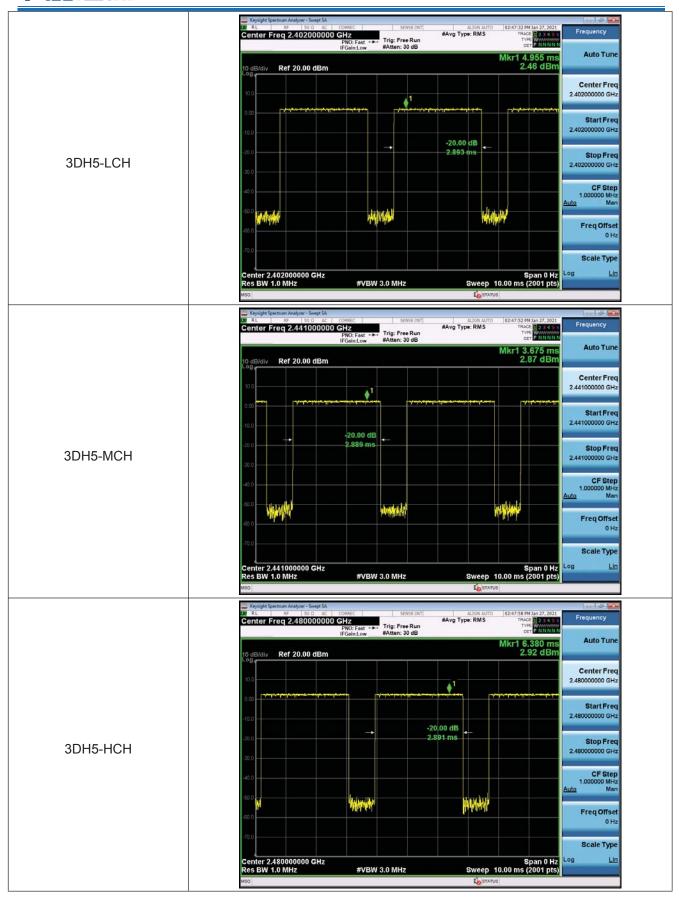



Report No.: CQASZ20210100004EX-01

5.8 Band-edge for RF Conducted Emissions

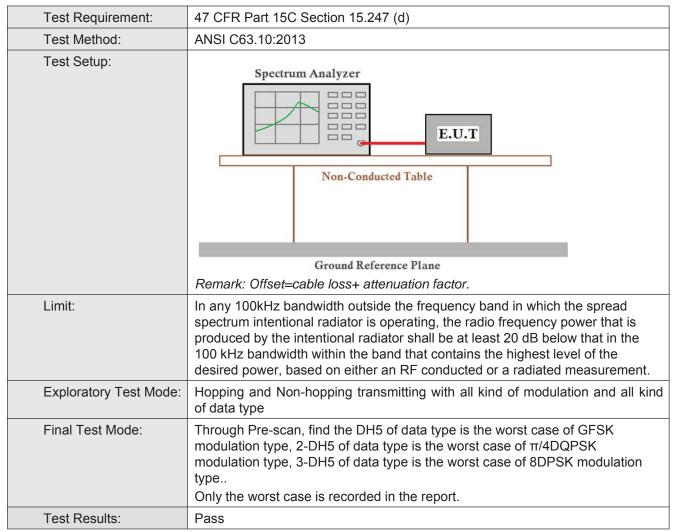





Test plot as follows:

