

Test Laboratory: Compliance Certification Services

File Name: [D835V2SN4d002_071904.da4](#)

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d002

Program Name: System Performance Check at 835 MHz

Ambient Temp.: 25 deg. C; Liquid Temp.: 24 deg. C

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.924 \text{ mho/m}$; $\epsilon_r = 42.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV2 - SN3023; ConvF(6, 6, 6); Calibrated: 9/23/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

d=15mm, Pin=250mW/Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Reference Value = 54 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 2.62 mW/g


d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 54 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 2.63 mW/g

Peak SAR (extrapolated) = 3.52 W/kg

SAR(1 g) = 2.42 mW/g; SAR(10 g) = 1.58 mW/g

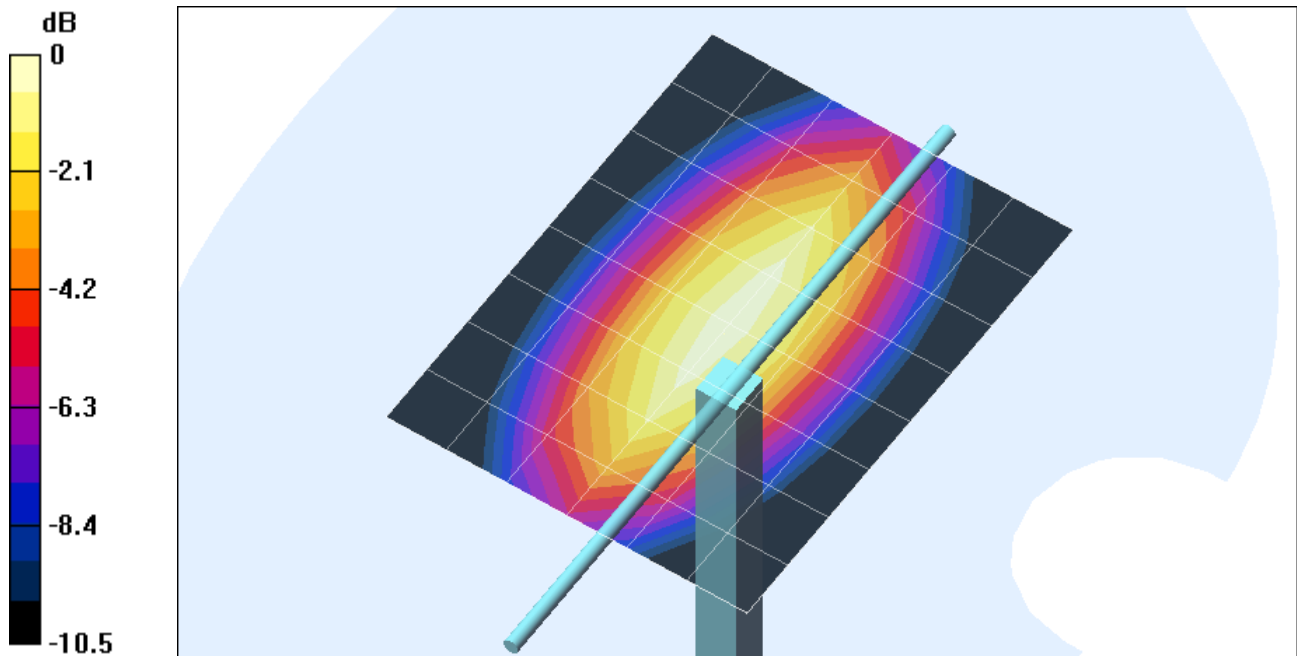

0 dB = 2.63mW/g

Test Laboratory: Compliance Certification Services

File Name: [D835V2SN4d002_071904.da4](#)

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d002

Program Name: System Performance Check at 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1


Medium parameters used: $f = 835$ MHz; $\sigma = 0.924$ mho/m; $\epsilon_r = 42.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

d=15mm, Pin=250mW/Z Scan (1x1x51): Measurement grid: dx=20mm, dy=20mm, dz=2mm

Reference Value = 54 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 2.26 mW/g

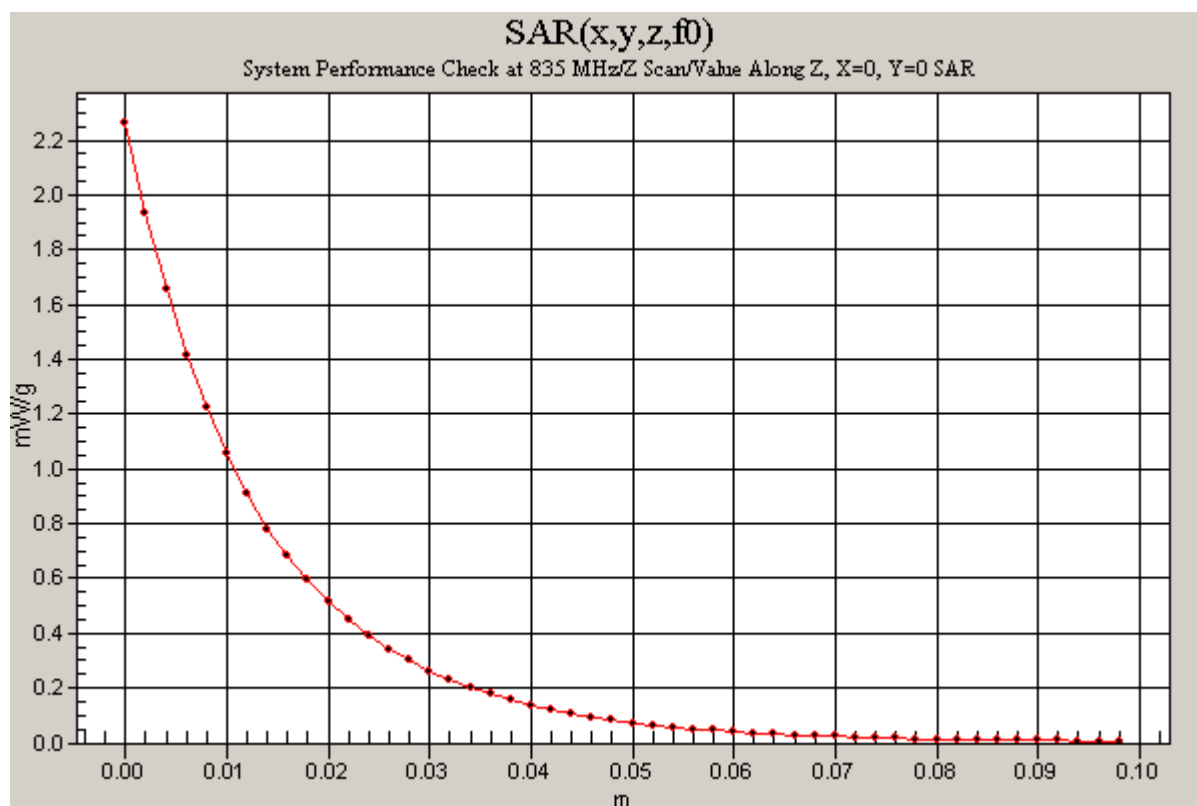

Test Laboratory: Compliance Certification Services

File Name: [D835V2SN4d002_072004.da4](#)

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d002

Program Name: System Performance Check at 835 MHz

Ambient Temp.: 25 deg. C; Liquid Temp.: 24 deg. C

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.924 \text{ mho/m}$; $\epsilon_r = 42.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV2 - SN3023; ConvF(6, 6, 6); Calibrated: 9/23/2003

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn500; Calibrated: 12/23/2003

- Phantom: SAM 2; Type: SAM 2; Serial: 1050

- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

d=15mm, Pin=250mW/Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Reference Value = 54.1 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 2.61 mW/g


d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 54.1 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 2.58 mW/g

Peak SAR (extrapolated) = 3.46 W/kg

SAR(1 g) = 2.38 mW/g; SAR(10 g) = 1.57 mW/g

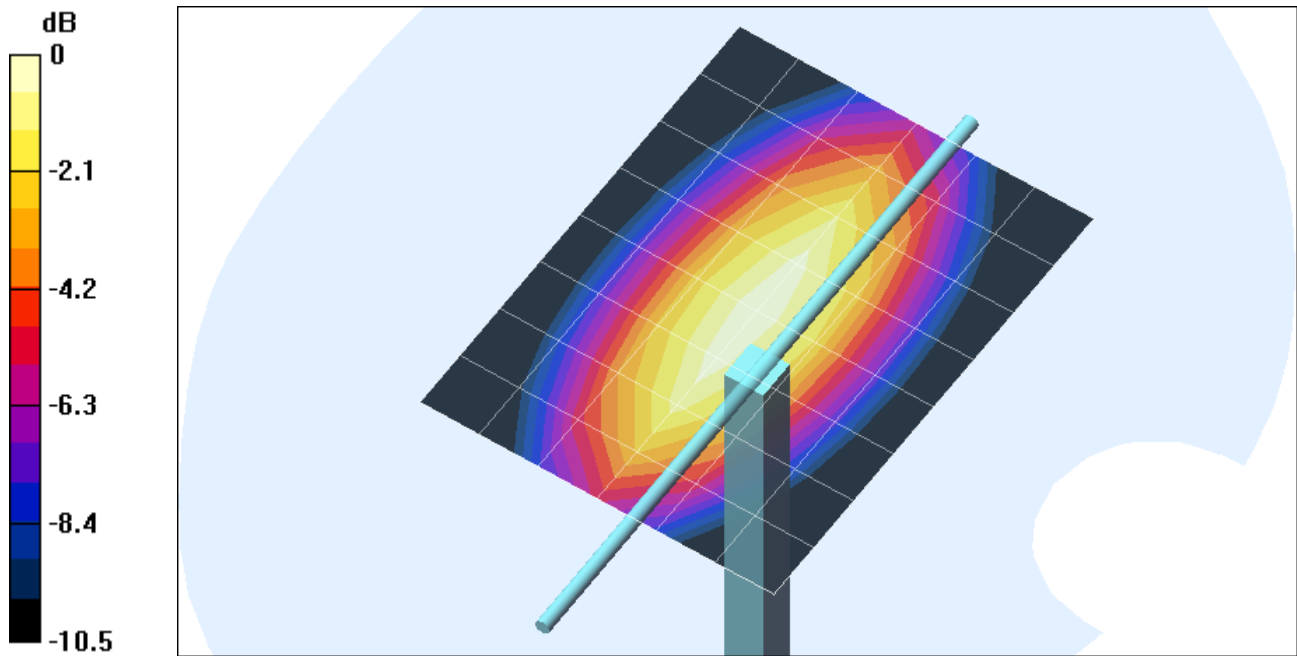

0 dB = 2.58mW/g

Test Laboratory: Compliance Certification Services

File Name: [D835V2SN4d002_072004.da4](#)

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d002

Program Name: System Performance Check at 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1


Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.924 \text{ mho/m}$; $\epsilon_r = 42.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

d=15mm, Pin=250mW/Z Scan (1x1x51): Measurement grid: dx=20mm, dy=20mm, dz=2mm

Reference Value = 54.1 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 2.21 mW/g

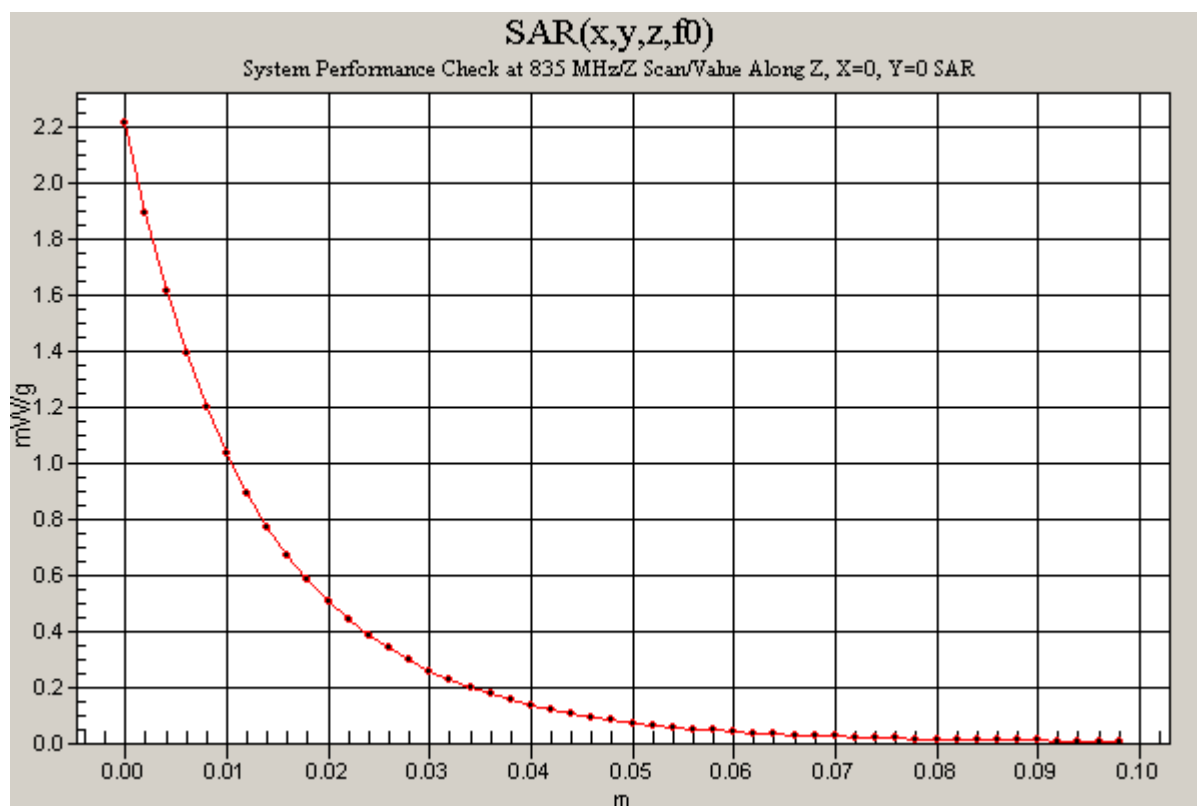

Test Laboratory: Compliance Certification Services

File Name: [D1900V2 SN5d043_072104.da4](#)

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d043

Program Name: System Performance Check at 1900 MHz

Ambient Temp.: 24 deg. C; Liquid Temp.: 23 deg. C

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 40.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV2 - SN3023; ConvF(4.9, 4.9, 4.9); Calibrated: 9/23/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

d=10mm; Pin=250mW/Area Scan (7x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Reference Value = 88.6 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 10.6 mW/g


d=10mm; Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 88.6 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 10.5 mW/g

Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 9.41 mW/g; SAR(10 g) = 4.94 mW/g

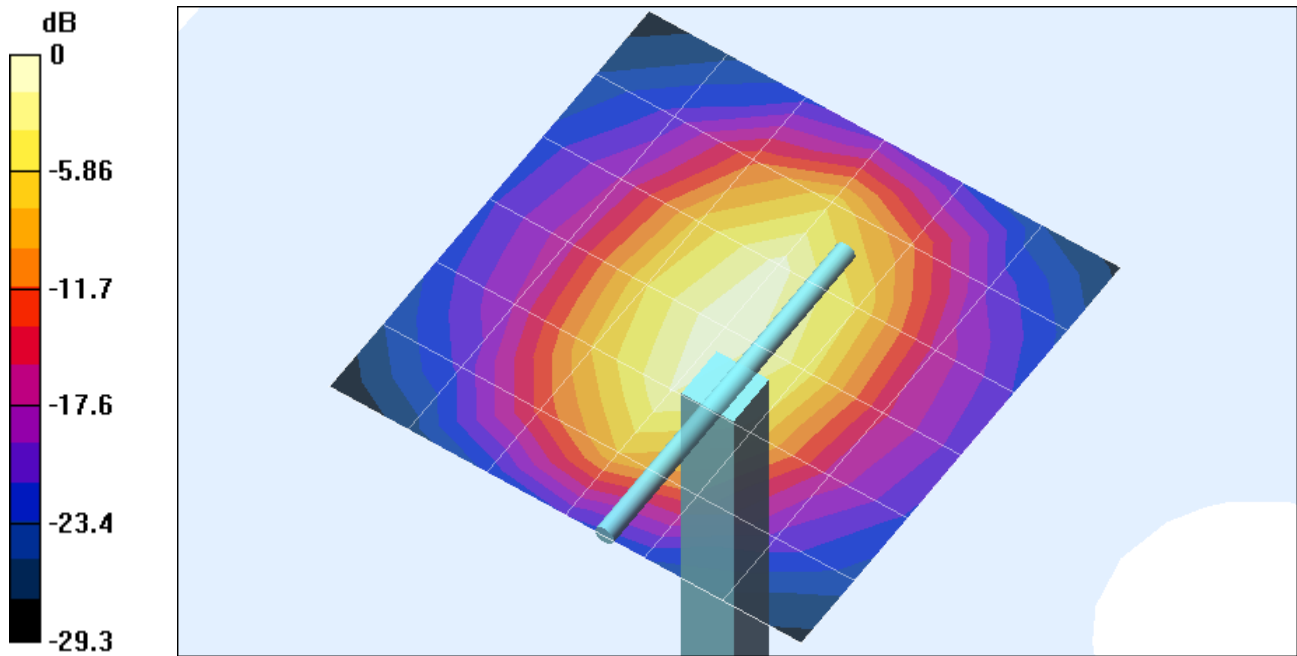

0 dB = 10.5mW/g

Test Laboratory: Compliance Certification Services

File Name: [D1900V2 SN5d043_072104.da4](#)

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d043

Program Name: System Performance Check at 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

d=10mm; Pin=250mW/Z Scan (1x1x51): Measurement grid: dx=20mm, dy=20mm, dz=2mm

Reference Value = 88.6 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 8.51 mW/g

