Date: 2021/2/4

left ear headset BT 3DH5 0CH Left side 0mm

Communication System: UID 0, BT(0) (0); Communication System Band: BT; Frequency: 2402 MHz;
Medium parameters used: f = 2402 MHz; σ = 1.757 S/m; ε_r = 39.761; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.75, 7.75, 7.75); Calibrated: 2020/11/30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x6x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.181 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 6.755 V/m; Power Drift = 0.1 dB
Peak SAR (extrapolated) = 0.283 W/kg
SAR(1 g) = 0.158 W/kg; SAR(10 g) = 0.075 W/kg
Maximum value of SAR (measured) = 0.163 W/kg

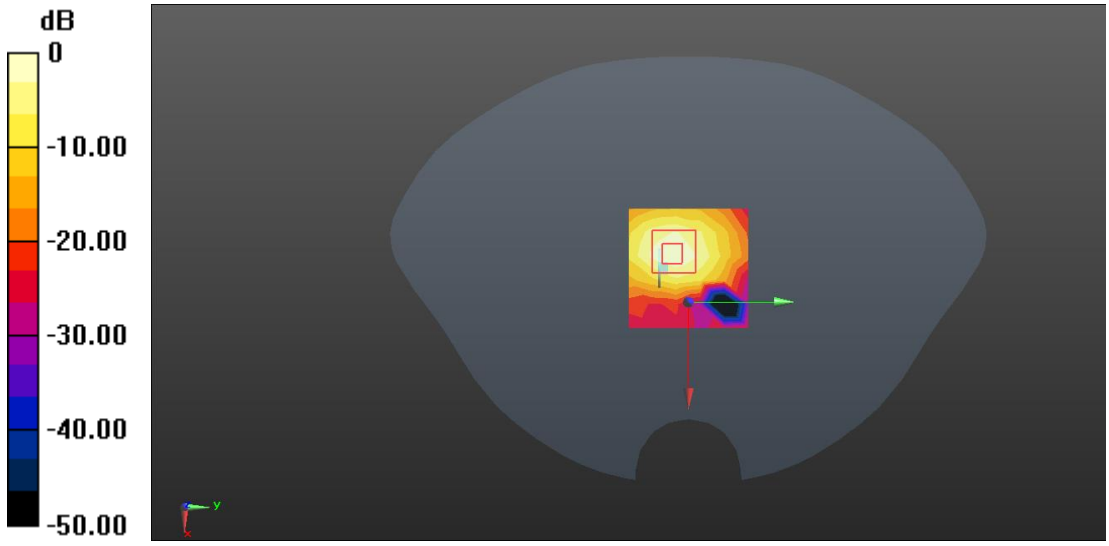

0 dB = 0.181 W/kg = -7.42 dBW/kg

Date: 2021/2/5

Right ear headset BT 3DH5 0CH Back surface 0mm

Communication System: UID 0, BT(0) (0); Communication System Band: BT; Frequency: 2402 MHz;
Medium parameters used: f = 2402 MHz; σ = 1.757 S/m; ε_r = 39.761; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.75, 7.75, 7.75); Calibrated: 2020/11/30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x6x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.0887 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.511 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.250 W/kg
SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.023 W/kg
Maximum value of SAR (measured) = 0.105 W/kg

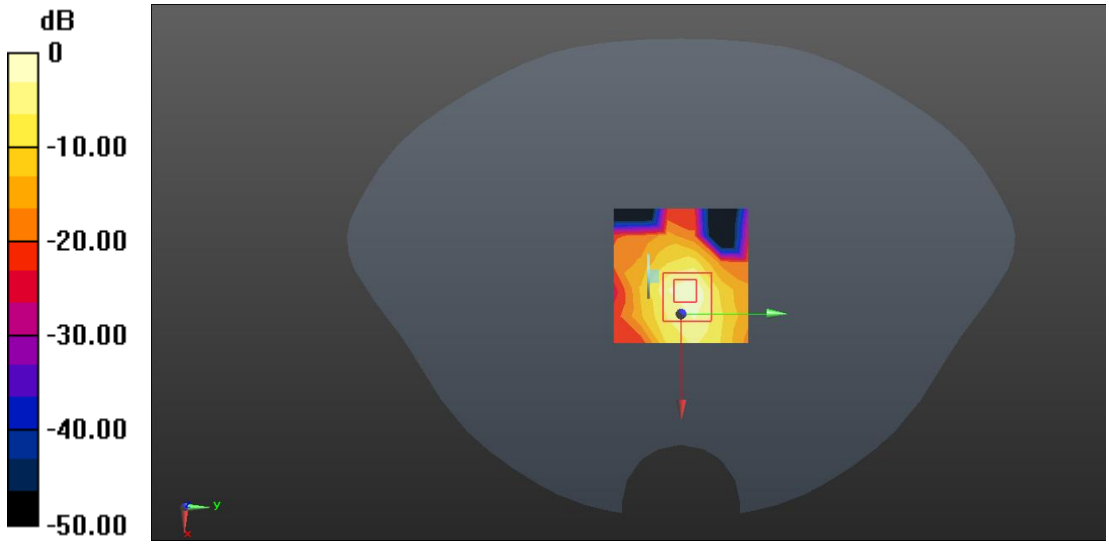

0 dB = 0.0887 W/kg = -10.52 dBW/kg