



SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

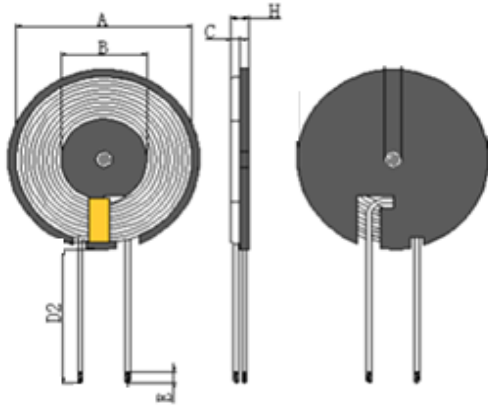

2. SCHEMATICS:



A	B	C	D2	E	H				I
43.5±0.1	19±0.1	0.8±0.1	30±2	3±2	2.2MAX	备注: 1 中间加18MM的小磁片, 套 热缩管			

3.WINDING:

ST EP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMAR K
N1	S-F	Hot air cable $\phi 0.08 \times 80$ 2UEW	11TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR	I	operating temperature	HI-POT
TES T	Coil and diskette	S-F	rated current	at normal temperature	
CON	100KHz, 0.25V	AT 25°C	100KHz, 0.25V		
SPEC	7.4uH±10%	78mΩ Max	2.4A	0-80°C	

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	Hot air wire 0.08*80 strands	Hot air wire 0.08*80 strands	NANJINGJINNINGCO,LTD	
2	Lead-free tin strip	Lead-free tin strip	QIAODO	
3	magnetic sheet	$\phi 43.5 \times 0.8$ Manganese zinc hard disk with L slot	TAIYI CO.,LTD	
4	glue	Yellow gum 9999	LIANCHENG CO.,LTD	
5	high-temperature adhesive tape	8mm wide high temperature adhesive paper	CUDAK CO.,LTD	
6	gum	$\phi 41.8 \times 0.1$	3M	
7				

		PART NO	Z301 MPP Coil		
		TITLE	G43.5 Slot + small disc cable length 30mm		
DRAWN BY		CHECKED BY		APPROVED BY	
Chen Yingsong		Li Yafei		Zhujin Road	

Shenzhen Allsight E-business Co.Ltd
 Room 116, Kangli Information Valley Building, No. 66 Pingji
 Avenue, Shanglilang Community, Nanwan Street, Longgang District,
 Shenzhen