

THE SOFTWARE SETTINGS

1 Home Page

2 Projection Setting

\_\_\_\_

refer to the displayed interfaces as final.

Notes: With the update of system version, there will

be differences from the actual interfaces. Please

INTELLIGENT PROJECTOR

MADE IN CHINA

3 Language setting

4 Time setting


-


Name over 1


Name (core)


Settings Screen - Select the appropriate language in System configuration.


Settings screen - Select the appropriate time Settings for you in System Configurationg.

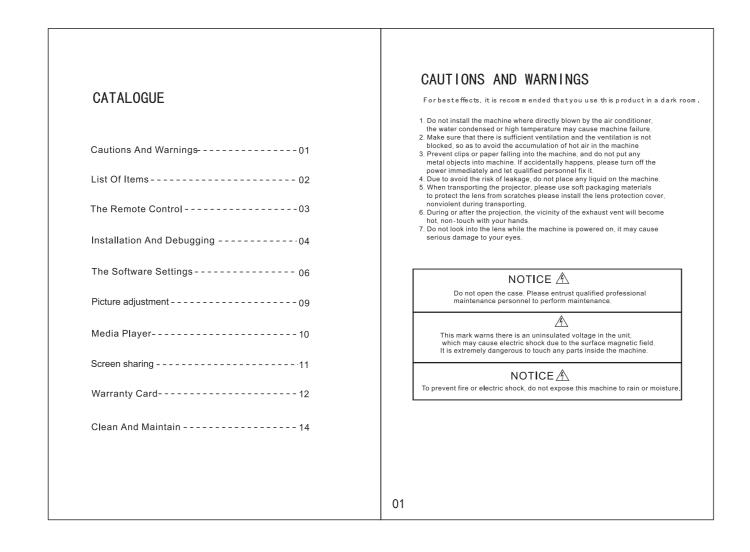

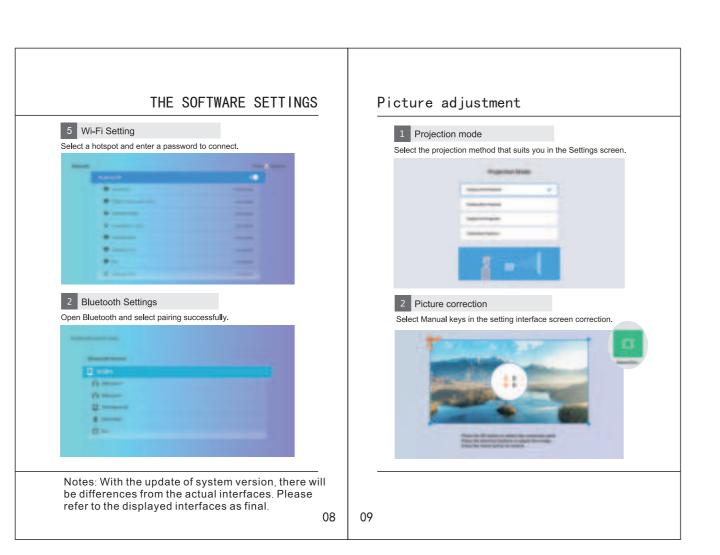

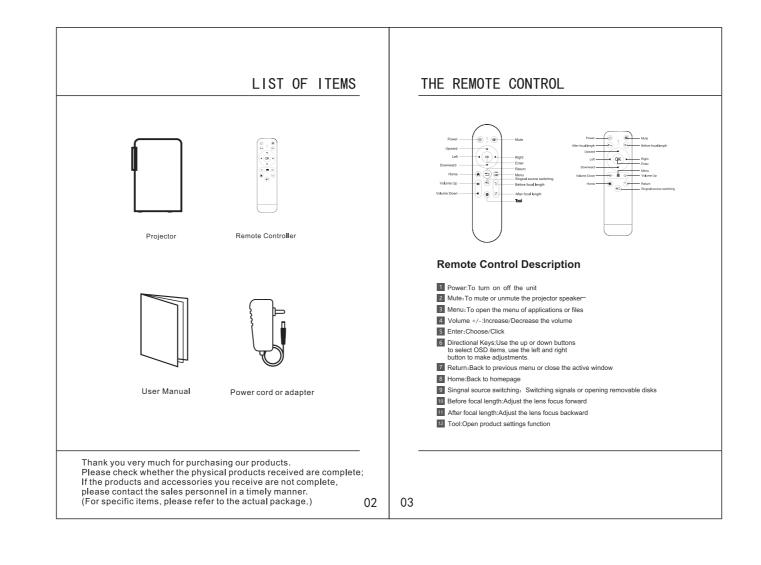

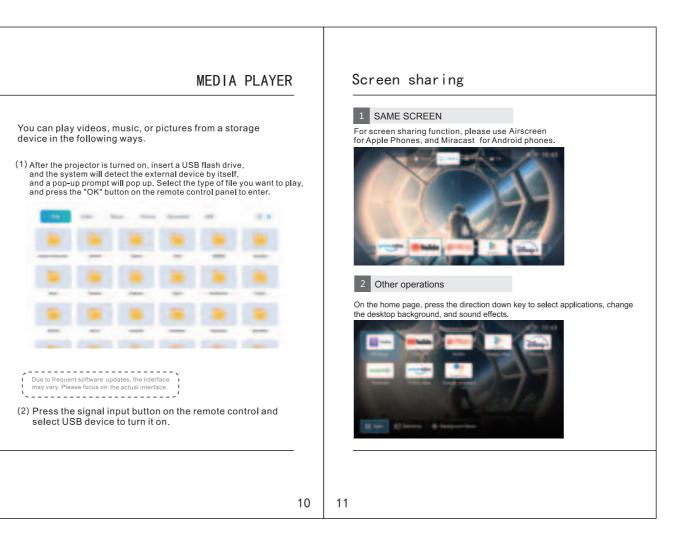

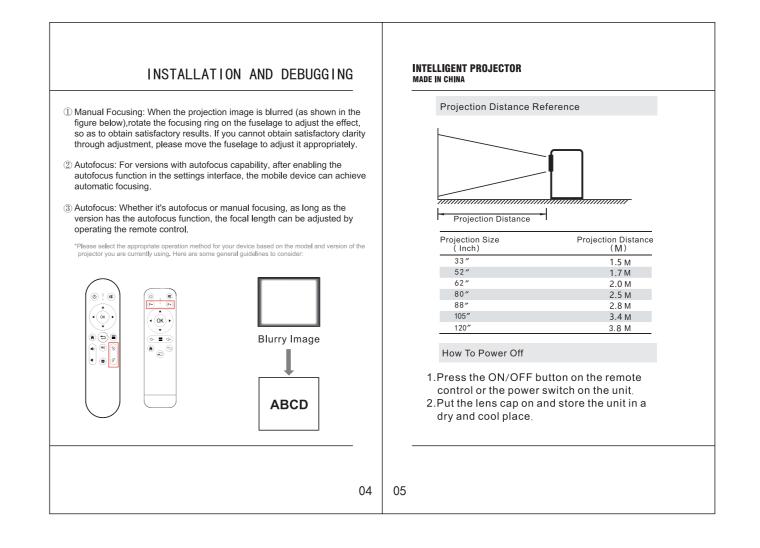



This device complies with Part 15 of the FCc Rules. Operation is subject to the following two conditions; (1) this device may not cause harmful including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCc Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses accordance with the instructions, any cause harmful interference to radio communications. However, there is no guarantee that interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be don't not correct the interference by one or more of the following measure s:

-Reorient or relocate the receiving antenna.
-Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to consult the dealer or an experienced radioTV technician for help.
FCC Radiotion Exposure statement. This device should be installed and operated with a minimum distance of 20cm between the radiator and operated with a minimum distance of 20cm between the radiator and operated with a minimum distance of 20cm between the radiator and operated with a minimum distance of 20cm between the radiator and operated with a minimum distance of 20cm between the radiator and operated with a minimum distance of 20cm between the radiator and operated with a minimum distance of 20cm between the radiator and operated with a minimum distance of 20cm between the radiator and operated with a minimum distance of 20cm between the radiator and operated with a minimum distance of 20cm between the radiator and operated with a minimum distance of 20cm between the radiator and operated with a minimum distance of 20cm between the radiator and operated

PDF