



RF Exposure Antenna Summary

Network Systems Organization

FCC ID: **H9PDP4046 EA101239** DS Data Phone

Output Power: 145 mW Original Equip.

Source Based

AP DC Factor: 1.000

Remote DC Factor: 0.108

Portable Antennas (R < 5cm)

Ant No	Model	Symbol P/N	Type	Gain (dBi)	Cable Loss (dB)	Pout (dBm)	EIRP (mW)	TR Status	Device Use
01.	Phone PCB	50-21900-045	Dipole	2.0	0.18	21.43	23.7	Tested + SAR	Hand Set
02.	Phone Stickon	50-21900-044	Dipole	2.0	0.22	21.40	23.5	Tested + SAR	Hand Set

Antenna Gain listed without cable

TR Status refers to whether the antenna was tested. If not refer to the directed antenna test data

Duty Cycle Factors are applied to MPE and EIRP

Saturday, June 16, 2001 12:51 PM

Page 1 of 1


Phone PCB Antenna

The **Phone PCB** antenna is 2 dBi omnidirectional in azimuth plane. It is mounted internally as shown in the attached photo. The **Phone PCB** uses a Hirose FL series connector. In use it is 1.5 cm from a users head. It is used in mobile devices.

<i>Location</i>	Phone Handset
<i>Pattern</i>	Omni
<i>Type</i>	Dipole
<i>Max Gain</i>	2 dBi
<i>Physical</i>	1.5" x 0.3"
<i>Cable</i>	CO-6F-DSB-CX501X32AWG
<i>Symbol P/N</i>	50-21900-045



Antenna Photo

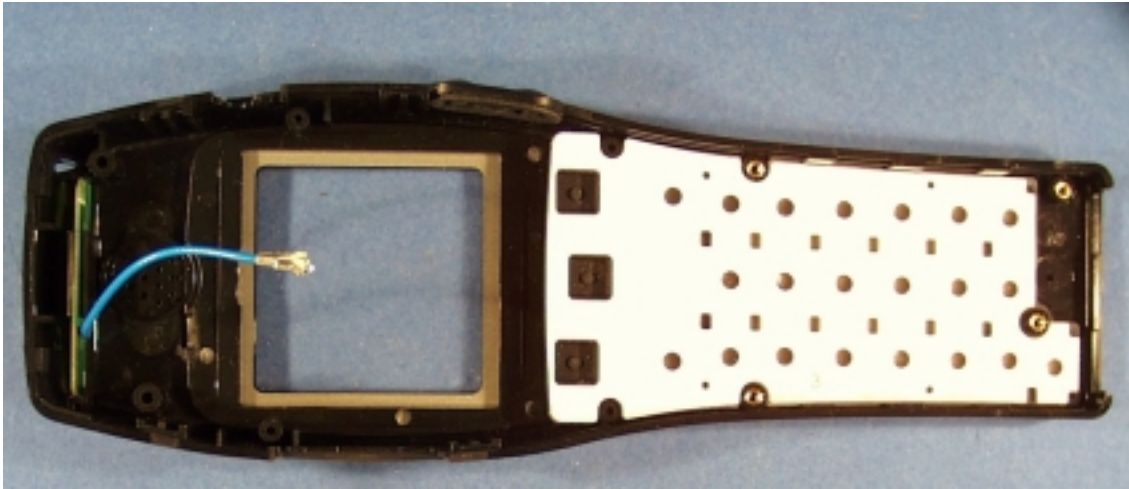

Antenna installed in DP4046 Voice communication device




DP4046 Use Photo

Phone Stick On Antenna

The **Phone** Stick On antenna is 2 dBi omni-directional in azimuth plane. It is mounted internally as shown in the attached photo. The **Phone** Stick On uses a Hirose FL series connector. In use it is 3.4 cm from the users head. It is used in mobile devices.

<i>Location</i>	Phone Handset
<i>Pattern</i>	Omni
<i>Type</i>	Dipole
<i>Max Gain</i>	2 dBi
<i>Physical</i>	2.12" x 0.2"
<i>Cable</i>	CO-6F-DSB- CX501X32AWG
<i>Symbol P/N</i>	50-21900-044

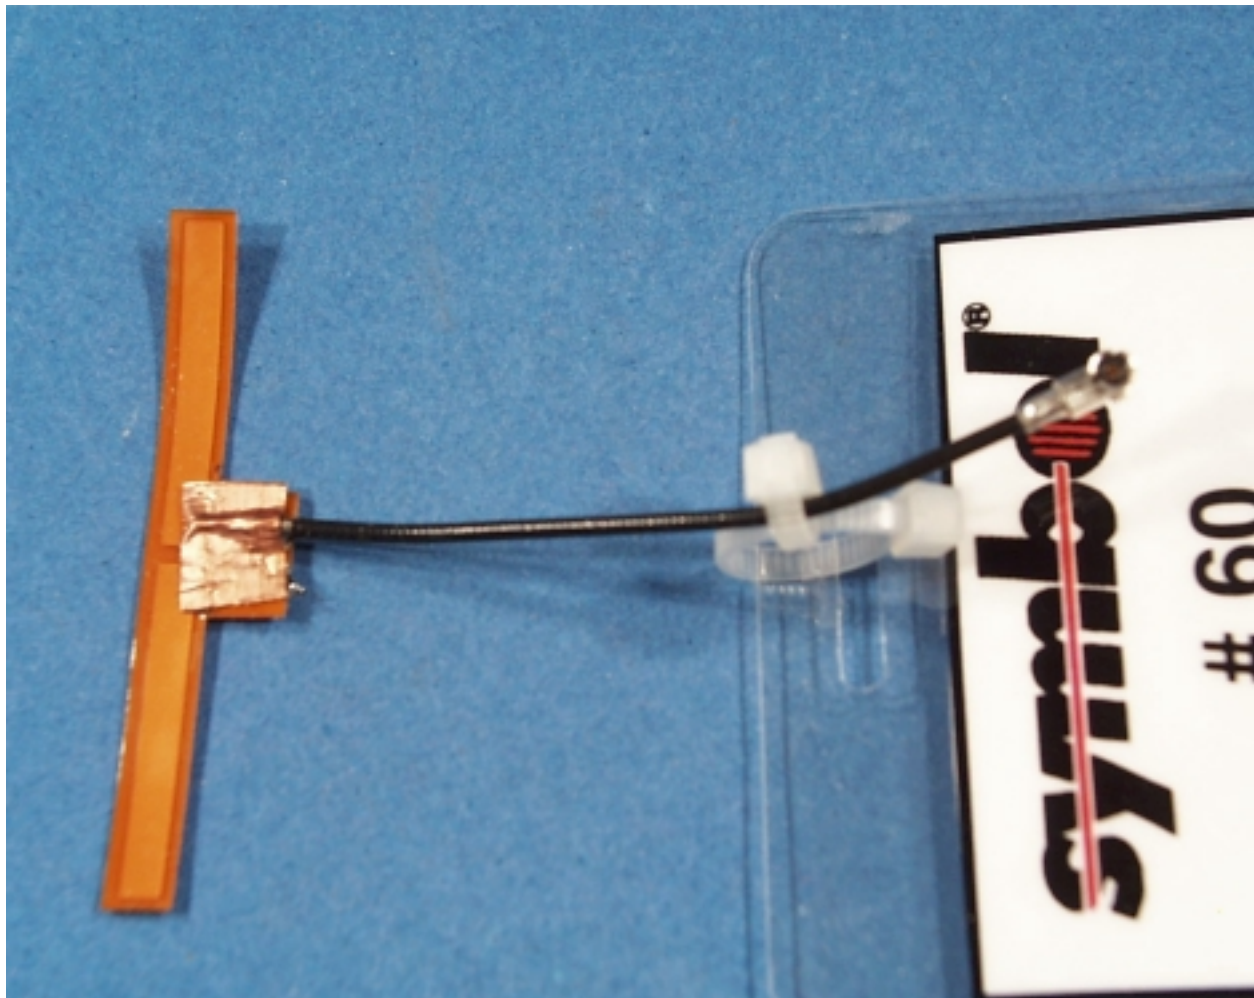

Antenna Photo



Antenna installed in DP4046 Voice communication device



DP4046 Use Photo





Duty Cycle Calculations

The maximum duty cycle of a 802.11 compliant transmitter is dependent on the data rate and the processing speed of the device the transmitter is installed in. The duty cycle is the ratio of the maximum transmitter on time divided by the total cycle time which is composed of the maximum on time and the minimum off time. The maximum on time is dependent on the data rate. The 802.11 spec mandates what the maximum data payload for a packet may be. The data pay load along with packet addressing and other network overhead information determine the maximum size of a packet. The maximum transmitter on time is the longest time that it will take the radio to transmit the packet. In the case of Symbol's Spectrum 24 products the 1 Mbps data rate is the slowest.

For the cycle time the minimum off time consists of an acknowledgement from the receiver, the shortest carrier sense time and the shortest packet construction time. The acknowledgment and carrier sense times are driven by the 802.11 protocol while the packet construction time is driven by the processing power of the radio host. For access points, laptops, and workstations with fast processors the construction time is fairly short. While for hand held battery powered terminals with slower processors the construction time can be really significant.

Directly related to the duty cycle is data throughput of a link. The lower the duty cycle the lower the data throughput.

Longest On Time

$N = \text{Maximum \# of data bytes / packet}$

$OP = \text{Overhead bytes/packet}$

$Ton = ((N + OP) * 8 \text{ bits/byte}) / 10^6 \text{ bits/sec} = 4.872 \text{ mS}$

Radios

LA2400	CR-1	1Mbps	FH
LA3020	Duo	2Mbps	FH
LA3021	Proj C	2Mbps	FH
LA4111	T1	11Mbps	DS
LA4121	T2	11Mbps	DS
XX3010	FH Phone	1Mbps	FH
DM4026	DS Phone	11Mbps	DS

Maximum Duty Cycle Factor

$DCF = Ton / (Ton + Toff)$

Shortest Off Time

$CST = \text{Carrier Sense Time}$

$APA = \text{AP Ack time}$

$PCT = \text{Packet Construction Time}$

$Toff = CST + APA + PCT$

Duty Cycle Variables										
Radio	N		OP		CST (uS)		APA (uS)		PCT (uS)	
	AP	Rmt	AP	Rmt	AP	Rmt	AP	Rmt	AP	Rmt
LA2400	548	548	61	61	100	100	220	220	3000	10000
LA3020	548	548	61	61	100	100	220	220	2000	2000
LA3021	548	548	61	61	100	100	220	220	2280	2370
LA4111	548	548	61	61	100	100	220	220	1640	1660
LA4121	548	548	61	61	100	100	220	220	1600	1690
NP3010	N/A	32	N/A	80	N/A	100	N/A	220	N/A	7119
DP3010	N/A	32	N/A	80	N/A	100	N/A	220	N/A	7119
DM4026	N/A	32	N/A	80	N/A	100	N/A	220	N/A	7119

Duty Cycle Calculations

Duty Cycle Factors			
Radio	Data Rate	AP	Remote
LA2400	1 Mbps	60% / -4.4 dB	32 % / -9.9 dB
LA3020	1 Mbps	68% / -3.4 dB	68% / -3.4 dB
LA3021	1 Mbps	65% / -3.7 dB	64% / -3.9 dB
LA4111	1 Mbps	71.3% / -2.9 dB	71.1% / -3.0dB
LA4121	1 Mbps	71.8% / -2.9 dB	70.8% / -3.0dB
NP3010	1 Mbps	N/A	10.75% / -19.4 dB
DP3010	1 Mbps	N/A	10.75% / -19.4 dB
DM4026	1 Mbps	N/A	10.75% / -19.4 dB

Regulatory Addendum:

FCC RF EXPOSURE GUIDELINES

To comply with RF safety requirements use the specific belt clip. All other belt clips should be avoided and may not comply with RF safety requirements.

The preceding statement is presently being added to the QRG (Quick Reference Guide –User’s Manual) for the Symbol DS Phone line.

This addition will be covering the model NP4046 and DP4046 NetVision ® phones.

Norm Nelson
Symbol Technologies Inc
6480 Via Del Oro Drive
San Jose, CA 95119-1208
Phone: (408) 528-2649
Fax: (408) 528-2740
E-mail: norm@sj.symbol.com