

# **FCC Test Report**

FCC ID : SQGBL653

Equipment : Bluetooth 5.1 Data Module

Model No. : BL653

Brand Name : Laird Connectivity

Applicant : Laird Connectivity

Address : W66N220 Commerce Court, Cedarburg,

Wisconsin 53012, USA

Standard : 47 CFR FCC Part 15.247

Received Date : Jan. 30, 2020

Tested Date : Feb. 11 ~ Feb. 21, 2020

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

Along Chei / Assistant Manager Gary Chang / Manager

RA

Testing Laboratory 2732

Page: 1 of 142

Report No.: FR013002 Report Version: Rev. 02



## **Table of Contents**

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	8
1.3	Test Setup Chart	8
1.4	Test Equipment List and Calibration Data	9
1.5	Test Standards	10
1.6	Deviation from Test Standard and Measurement Procedure	10
1.7	Measurement Uncertainty	10
2	TEST CONFIGURATION	11
2.1	Testing Condition	11
2.2	The Worst Test Modes and Channel Details	11
3	TRANSMITTER TEST RESULTS	12
3.1	Conducted Emissions	12
3.2	6dB and Occupied Bandwidth	17
3.3	RF Output Power	28
3.4	Power Spectral Density	33
3.5	Emissions in Restricted Frequency Bands	44
3.6	Emissions in non-restricted Frequency Bands	129
4	TEST I ABORATORY INFORMATION	142



## **Release Record**

Report No.	Version	Description	Issued Date
FR013002	Rev. 01	Initial issue	May 11, 2020
FR013002	Rev. 02	Changing brand	May 26, 2020

Report No.: FR013002 Page: 3 of 142



## **Summary of Test Results**

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.513MHz 30.39 (Margin -15.61dB) - AV	Pass
15.247(d)	Redicted Emissions	Most the requirement of limit	Pass
15.209	Radiated Emissions	Meet the requirement of limit	F d 5 5
15.247(b)(3)	Maximum Output Power	Power [dBm]: 8.03	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

#### **Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

#### **Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Report No.: FR013002 Page: 4 of 142

Report Version: Rev. 02



## 1 General Description

## 1.1 Information

#### 1.1.1 Product Details

The following models are provided to this EUT.

Brand Name	Model Name	Product Name	Description
Laird Connectivity	BL653	Bluetooth 5.1 Data	With Printed PCB antenna
Laird Connectivity	DL003	Module	With MHF4 connector antenna

## 1.1.2 Specification of the Equipment under Test (EUT)

RF General Information						
Frequency Range (MHz)	Data Rate					
	00-2483.5 LE 2402-2480 0-39 [40]			125 kbps		
2400 2492 5		0.20 [40]	500 kbps			
2400-2463.5		2402-2460	0-39 [40]	1 Mbps		
				2 Mbps		
Note: Bluetooth LE (Low energy) uses GFSK modulation.						

#### 1.1.3 Antenna Details

Manufacturer	Model	Laird Part Number	Туре	Connector	Gain (dBi)
Laird	NanoBlue	EBL2400A1-10 MH4L	PCB Dipole	IPEX MHF4	2
Laird	FlexPIFA	001-0022	PCB Dipole	IPEX MHF4	2
Mag.Layers	EDA-8709-2G4 C1-B27-CY	0600-00057	Dipole	IPEX MHF4	2
Laird	mFlexPIFA	EFA2400A3S-10 MH4L	PIFA	IPEX MHF4	2
Laird	Laird NFC	0600-00061	NFC	N/A	
Laird	BL653-SA PCB printed antenna	NA	Printed PCB	N/A	1.28

## 1.1.4 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	Option 1: DC 5V from host Option 2: DC 3.3V from host Option 3: DC 1.8V from host
-------------------	---

Report No.: FR013002 Page : 5 of 142

Report Version: Rev. 02



### 1.1.5 Channel List

	Frequency band (MHz)				2400~2	2483.5	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

## 1.1.6 Test Tool and Duty Cycle

Test Tool	UwTerminal, version: 7.94				
	Modulation Mode	Duty Cycle (%)	Duty Factor (dB)		
	GFSK/125kbps	83.97%	0.76		
<b>Duty Cycle and Duty Factor</b>	GFSK/500kbps	58.33%	2.34		
	GFSK/1Mbps	63.89%	1.95		
	GFSK/2Mbps	34.26%	4.65		



### 1.1.7 Power Index of Test Tool

## 3.3V High Power

Modulation Mode	Test Frequency (MHz)			
Wodulation Wode	2402	2440	2480	
GFSK/125kbps	8	8	8	
GFSK/500kbps	8	8	8	
GFSK/1Mbps	8	8	8	
GFSK/2Mbps	8	8	8	

#### 3.3V Low Power


Modulation Mode		Test Frequency (MHz)				
Modulation Mode	2402	2440	2480			
GFSK/125kbps	-40	-40	-40			
GFSK/500kbps	-40	-40	-40			
GFSK/1Mbps	-40	-40	-40			
GFSK/2Mbps	-40	-40	-40			




## 1.2 Local Support Equipment List

	Support Equipment List							
No.	Equipment	Brand	Model	FCC ID	Remarks			
1	Notebook	DELL	Latitude E5470	DoC				
2	50Ω terminator							
3	USB Cable	I-Gota	micro to A					
4	Fixture	Laird	DVK-BL653		Provided by applicant.			

## 1.3 Test Setup Chart

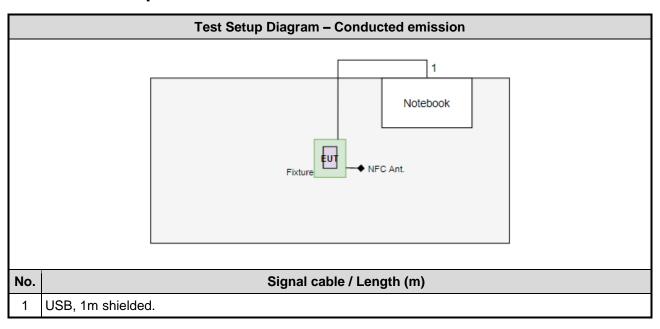

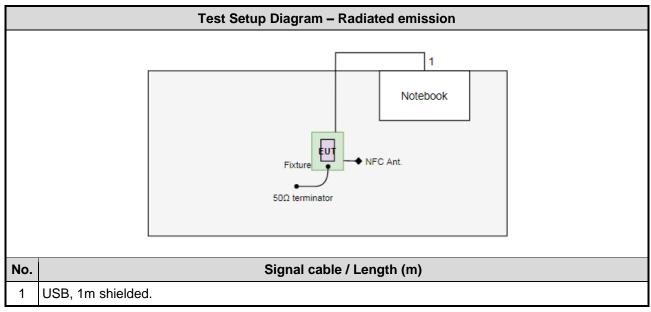

Report No.: FR013002

Page: 8 of 142



## 1.4 Test Equipment List and Calibration Data

Conducted Emission					
Conduction room 1 / (	CO01-WS)				
Feb. 21, 2020					
Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until	
R&S	ESR3	101658	Dec. 12, 2019	Dec. 10, 2020	
R&S	ENV216	101579	Mar. 08, 2019	Mar. 07, 2020	
Woken	CFD200-NL	CFD200-NL-001	Oct. 22, 2019	Oct. 21, 2020	
AUDIX e3 6.120210k NA NA					
	Conduction room 1 / ( Feb. 21, 2020  Manufacturer  R&S  R&S  Woken	Conduction room 1 / (CO01-WS)  Feb. 21, 2020  Manufacturer Model No.  R&S ESR3  R&S ENV216  Woken CFD200-NL	Conduction room 1 / (CO01-WS)           Feb. 21, 2020         Manufacturer         Model No.         Serial No.           R&S         ESR3         101658           R&S         ENV216         101579           Woken         CFD200-NL         CFD200-NL-001	Conduction room 1 / (CO01-WS)           Feb. 21, 2020         Manufacturer         Model No.         Serial No.         Calibration Date           R&S         ESR3         101658         Dec. 12, 2019           R&S         ENV216         101579         Mar. 08, 2019           Woken         CFD200-NL         CFD200-NL-001         Oct. 22, 2019	

Test Item	Radiated Emission					
Test Site	966 chamber1 / (03CH01-WS)					
Tested Date	Feb. 11 ~ Feb. 17, 20	20				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until	
Spectrum Analyzer	R&S	FSV40	101498	Dec. 17, 2019	Dec. 16, 2020	
Receiver	R&S	ESR3	101658	Dec. 12, 2019	Dec. 11, 2020	
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 12, 2019	Jul. 11, 2020	
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 12, 2019	Dec. 11, 2020	
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2019	Nov. 14, 2020	
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 13, 2019	Nov. 12, 2020	
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 07, 2019	Oct. 06, 2020	
Preamplifier	EMC	EMC02325	980225	Jul. 09, 2019	Jul. 08, 2020	
Preamplifier	Agilent	83017A	MY39501308	Oct. 08, 2019	Oct. 07, 2020	
Preamplifier	EMC	EMC184045B	980192	Aug. 01, 2019	Jul. 31, 2020	
RF Cable	EMC	EMC104-SM-SM-80 00	181106	Oct. 07, 2019	Oct. 06, 2020	
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 07, 2019	Oct. 06, 2020	
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 07, 2019	Oct. 06, 2020	
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 07, 2019	Oct. 06, 2020	
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 07, 2019	Oct. 06, 2020	
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Oct. 07, 2019	Oct. 06, 2020	
Measurement Software	AUDIX	e3	6.120210g	NA	NA	
Note: Calibration Inter	val of instruments liste	d above is one year.				

Report No.: FR013002 Page: 9 of 142

Report Version: Rev. 02



Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Feb. 18, 2020				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Apr. 17, 2019	Apr. 16, 2020
Power Meter	Anritsu	ML2495A	1241002	Oct. 23, 2019	Oct. 22, 2020
Power Sensor	Anritsu	MA2411B	1207366	Oct. 23, 2019	Oct. 22, 2020
DC POWER SOURCE	GW INSTEK	GPC-6030D	GES855395	Oct. 29, 2019	Oct. 28, 2020
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Inte	rval of instruments liste	d above is one year.		•	

### 1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2013

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

### 1.6 Deviation from Test Standard and Measurement Procedure

None

## 1.7 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty				
Parameters	Uncertainty			
Bandwidth	±34.130 Hz			
Conducted power	±0.808 dB			
Power density	±0.583 dB			
Conducted emission	±2.715 dB			
AC conducted emission	±2.92 dB			
Radiated emission ≤ 1GHz	±3.41 dB			
Radiated emission > 1GHz	±4.59 dB			

Report No.: FR013002 Page: 10 of 142

Report Version: Rev. 02



## 2 Test Configuration

## 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	22°C / 67%	Akun Chung
Radiated Emissions	03CH01-WS	17-24°C / 68%	Miki Shu Akun Chung
RF Conducted	TH01-WS	19°C / 62%	Brad Wu

FCC Designation No.: TW2732FCC site registration No.: 181692

➤ ISED#: 10807A

➤ CAB identifier: TW2732

#### 2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions	BT LE	2402	1Mbps 2Mbps	3
Maximum Output Power 6dB bandwidth Power spectral density	BT LE	2402, 2440, 2480	125kbps 500kbps 1Mbps 2Mbps	1, 2
Emissions in non-restricted frequency bands	BT LE	2402, 2440, 2480	125kbps 500kbps 1Mbps 2Mbps	1, 2, 3
Radiated Emissions ≤ 1GHz Conducted Emission ≤ 1GHz	BT LE	2480	1Mbps 2Mbps	1, 2, 3
Radiated Emissions > 1GHz Conducted Emission > 1GHz	BT LE	2402, 2440, 2480	1Mbps 2Mbps	1, 2, 3

#### NOTE:

- The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.
- 2. The EUT supports three DC voltage options, DC 1.8V, DC 3.3V and DC 5V. All options were assessed and **DC 3.3V** was found to be the worst case and was selected for the final test.
- 3. The EUT supports High Power & Low Power. Each power had been performed the test.
- 4. Test configurations are listed as follows:
  - 1) Test configuration 1: Low Power with Printed PCB antenna
  - 2) Test configuration 2: High Power with Printed PCB antenna
  - 3) Test configuration 3: High Power with MHF4 connector antenna
- 5. 50Ω terminator was connected to antenna port of EUT for radiated emission measurement.

Report No.: FR013002 Page: 11 of 142

Report Version: Rev. 02



## 3 Transmitter Test Results

#### 3.1 Conducted Emissions


#### 3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit					
Frequency Emission (MHz)	Quasi-Peak	Average			
0.15-0.5	66 - 56 *	56 - 46 *			
0.5-5	56	46			
5-30 60 50					
Note 1: * Decreases with the logarithm of the frequency.					

#### 3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V/60Hz

#### 3.1.3 Test Setup

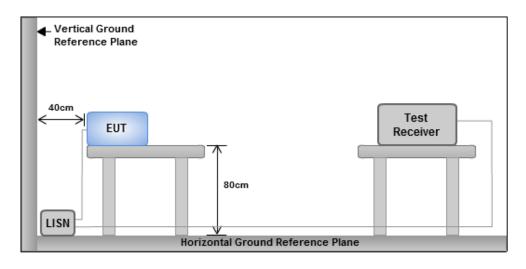

Note: 1. Support units were connected to second LISN.


Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Report No.: FR013002 Page: 12 of 142




#### Test configuration 3: High Power with MHF4 connector antenna

#### 3.1.4 Test Result of Conducted Emissions

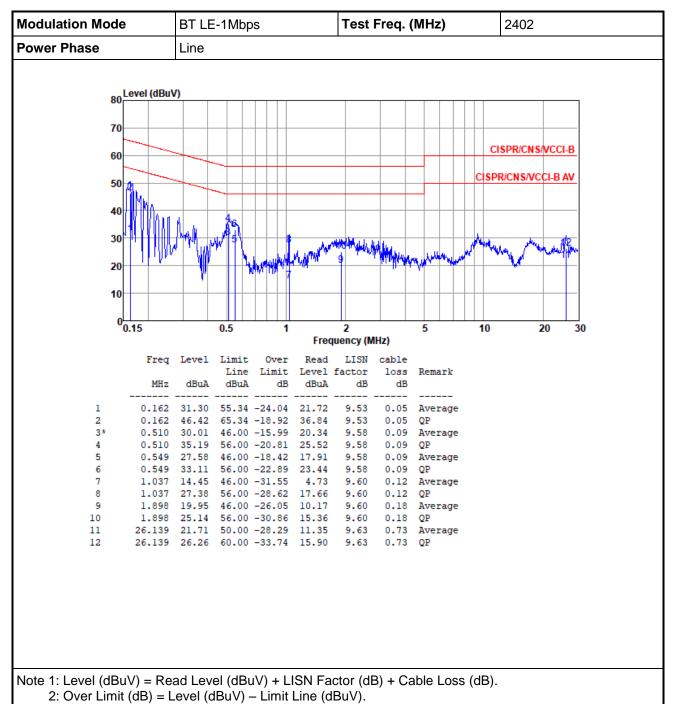


Report No.: FR013002 Page: 13 of 142



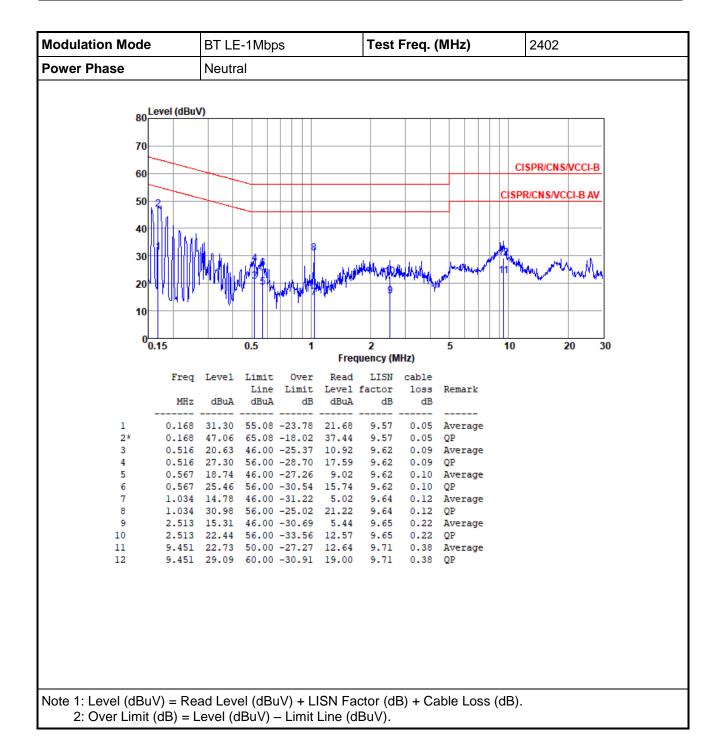


Report No.: FR013002 Page: 14 of 142



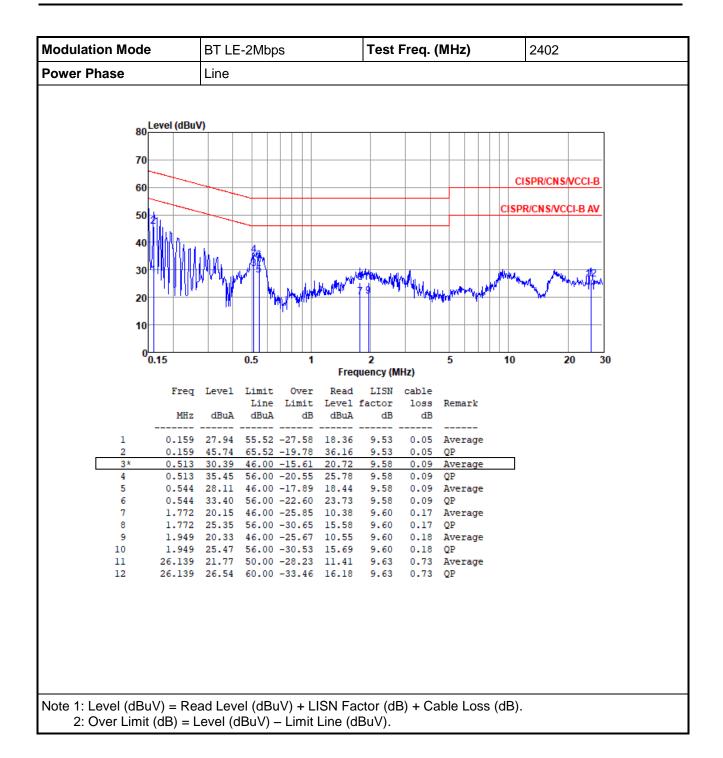

Report No.: FR013002 Page: 15 of 142



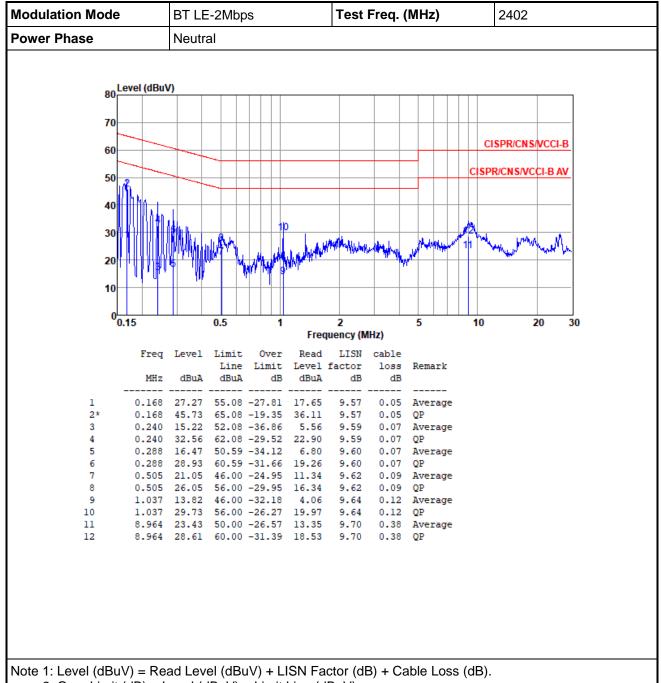

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Report No.: FR013002 Page: 16 of 142

Report Version: Rev. 02



## 3.2 6dB and Occupied Bandwidth

#### 3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

#### 3.2.2 Test Procedures


#### 6dB Bandwidth

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- 2. Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

#### **Occupied Bandwidth**

- Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW.
- 2. Detector = Sample, Trace mode = max hold.
- 3 Sweep = auto couple, Allow the trace to stabilize.
- 4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

#### 3.2.3 Test Setup



Report No.: FR013002 Page: 17 of 142



## Test configuration 1: Low Power with Printed PCB antenna

### 3.2.4 Test Result of 6dB and Occupied Bandwidth

**Summary** 

Mode	Max-N dB	Max-OBW	ITU-Code	Min-N dB	Min-OBW
	(Hz)	(Hz)		(Hz)	(Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE0.125_Nss1_1TX	637.681k	1.082M	1M08F1D	608.696k	1.075M
BT-LE0.5_Nss1_1TX	695.652k	1.042M	1M04F1D	684.783k	1.038M
BT-LE(1Mbps)	699.275k	1.046M	1M05F1D	688.406k	1.038M
BT-LE(2Mbps)	1.159M	2.041M	2M04F1D	1.123M	2.026M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth; Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth;

#### Result


Mode	Result	Limit	Port 1-N dB	Port 1-OBW
		(Hz)	(Hz)	(Hz)
BT-LE0.125_Nss1_1TX	-	-	-	-
2402MHz	Pass	500k	608.696k	1.075M
2440MHz	Pass	500k	637.681k	1.082M
2480MHz	Pass	500k	608.696k	1.082M
BT-LE0.5_Nss1_1TX	-	-	-	-
2402MHz	Pass	500k	695.652k	1.038M
2440MHz	Pass	500k	684.783k	1.038M
2480MHz	Pass	500k	684.783k	1.042M
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	688.406k	1.038M
2440MHz	Pass	500k	699.275k	1.046M
2480MHz	Pass	500k	699.275k	1.046M
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	500k	1.159M	2.026M
2440MHz	Pass	500k	1.13M	2.041M
2480MHz	Pass	500k	1.123M	2.041M

Port X-N dB = Port X 6dB down bandwidth; Port X-OBW = Port X 99% occupied bandwidth;

Report No.: FR013002 Page: 18 of 142


Report Version: Rev. 02



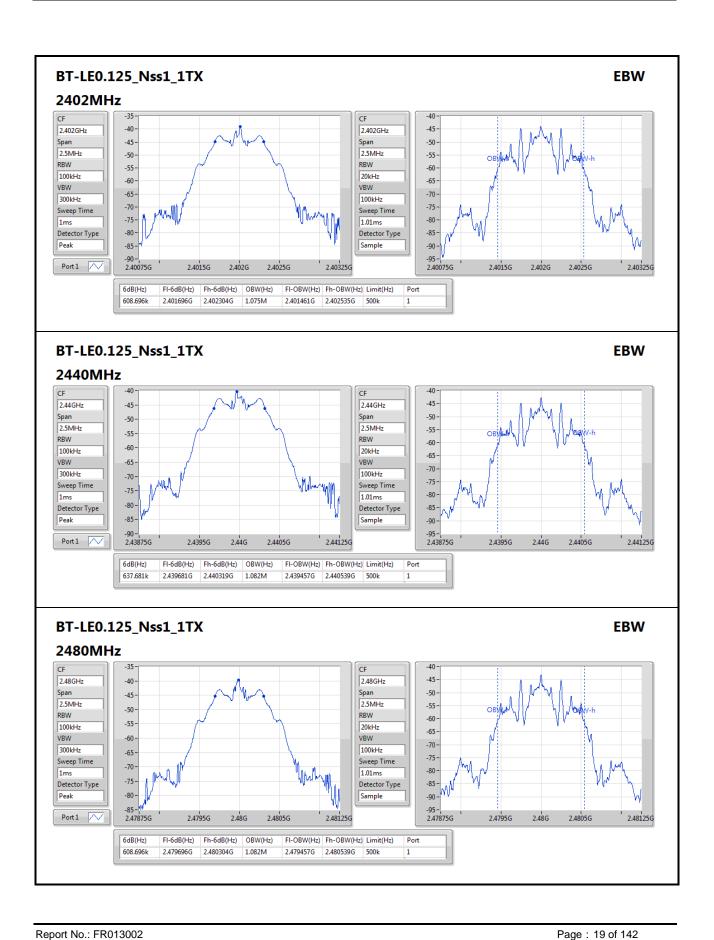


Report Version: Rev. 02



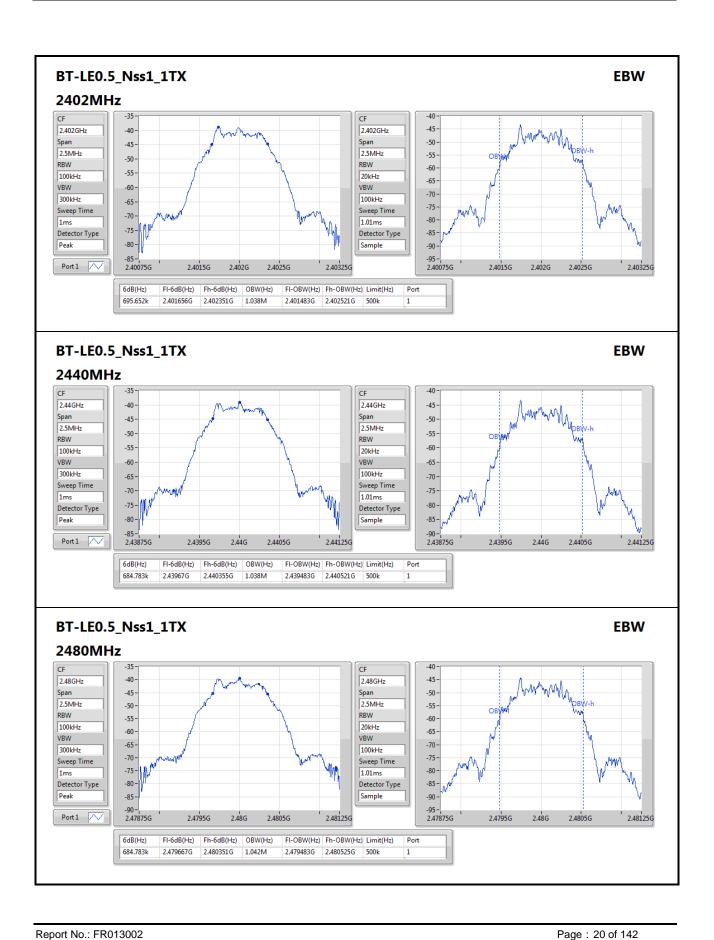


Report Version: Rev. 02



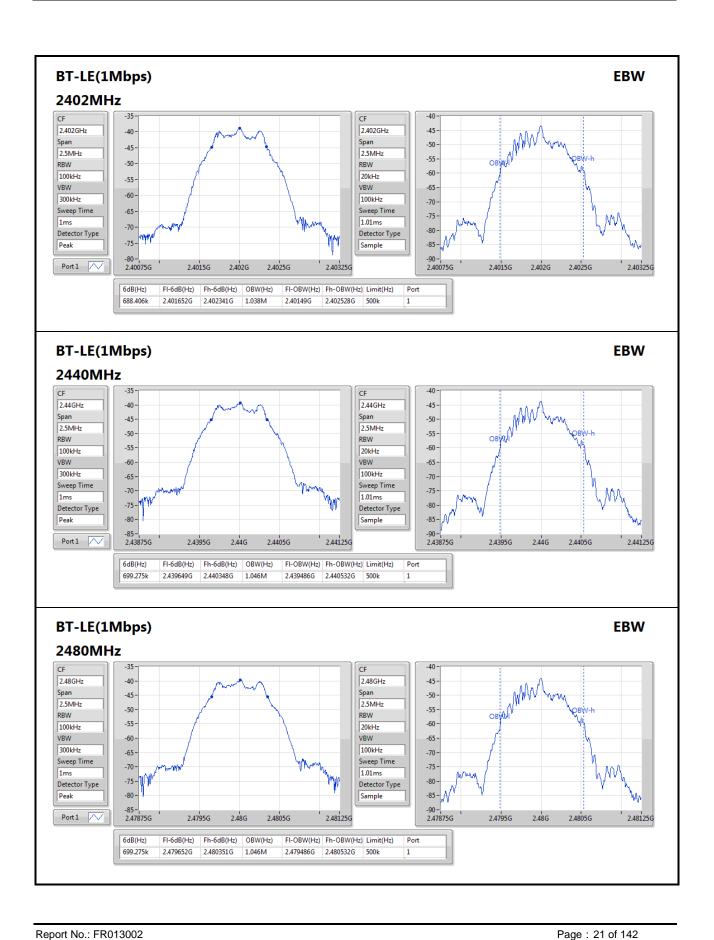

Report Version: Rev. 02



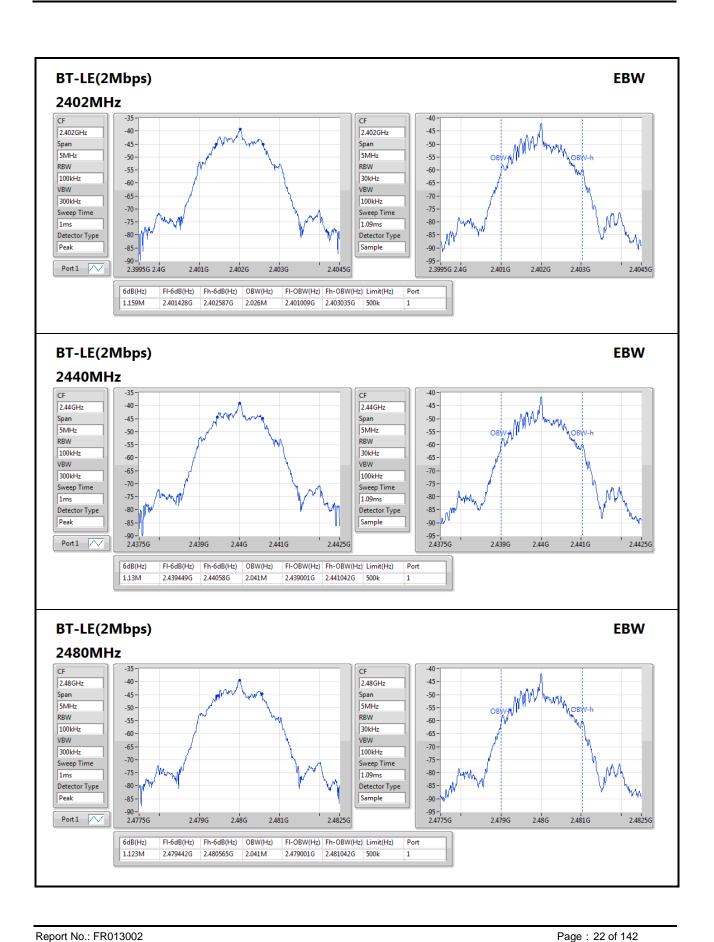

Report Version: Rev. 02



## Test configuration 2: High Power with Printed PCB antenna

### 3.2.5 Test Result of 6dB and Occupied Bandwidth

**Summary** 

Mode	Max-N dB	Max-OBW	ITU-Code	Min-N dB	Min-OBW
	(Hz)	(Hz)		(Hz)	(Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE0.125_Nss1_1TX	619.565k	1.082M	1M08F1D	615.942k	1.071M
BT-LE0.5_Nss1_1TX	695.652k	1.049M	1M05F1D	684.783k	1.038M
BT-LE(1Mbps)	702.899k	1.046M	1M05F1D	688.406k	1.038M
BT-LE(2Mbps)	1.138M	2.041M	2M04F1D	1.116M	2.026M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth; Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth;

#### Result


Mode	Result	Limit	Port 1-N dB	Port 1-OBW
		(Hz)	(Hz)	(Hz)
BT-LE0.125_Nss1_1TX	-	-	-	-
2402MHz	Pass	500k	615.942k	1.071M
2440MHz	Pass	500k	619.565k	1.082M
2480MHz	Pass	500k	615.942k	1.075M
BT-LE0.5_Nss1_1TX	-	-	-	-
2402MHz	Pass	500k	692.029k	1.038M
2440MHz	Pass	500k	684.783k	1.049M
2480MHz	Pass	500k	695.652k	1.046M
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	702.899k	1.038M
2440MHz	Pass	500k	688.406k	1.042M
2480MHz	Pass	500k	695.652k	1.046M
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	500k	1.116M	2.026M
2440MHz	Pass	500k	1.138M	2.041M
2480MHz	Pass	500k	1.138M	2.033M

Port X-N dB = Port X 6dB down bandwidth; Port X-OBW = Port X 99% occupied bandwidth;

Report No.: FR013002 Page: 23 of 142


Report Version: Rev. 02



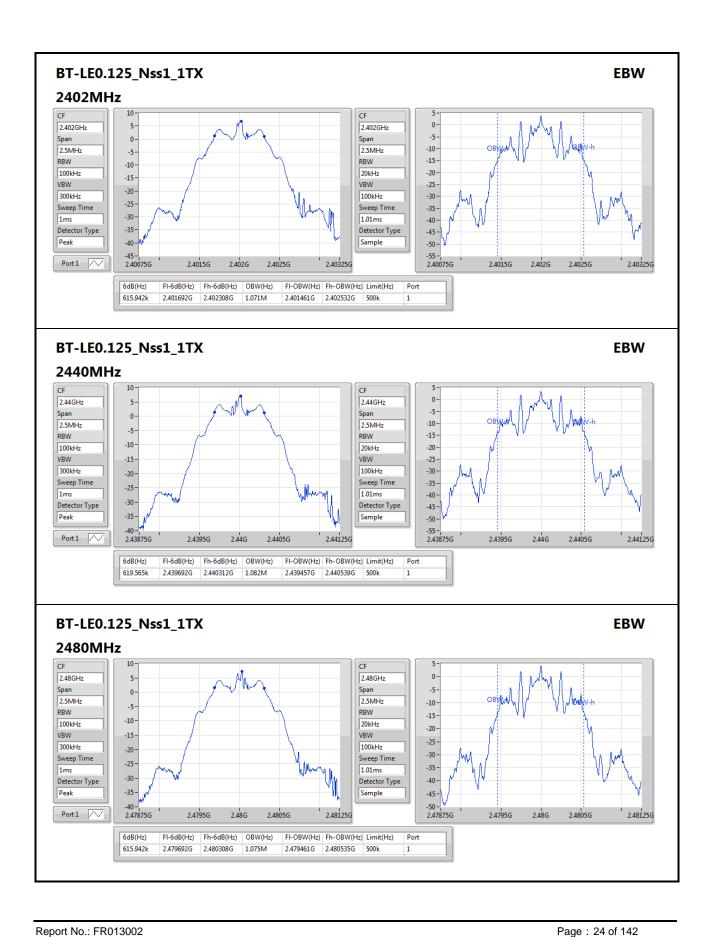


Report Version: Rev. 02



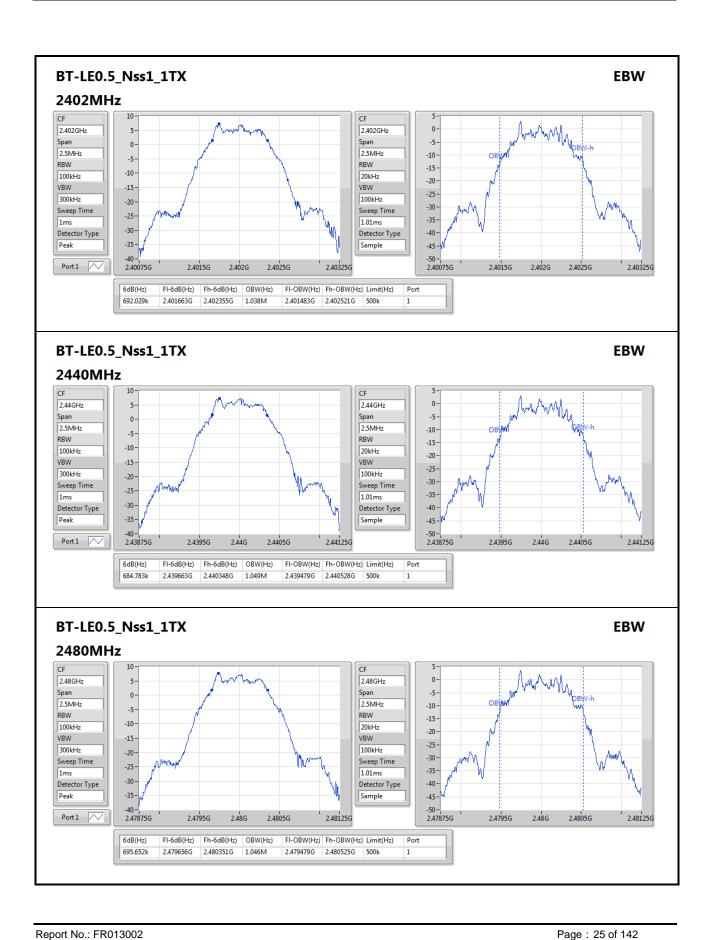

Report Version: Rev. 02




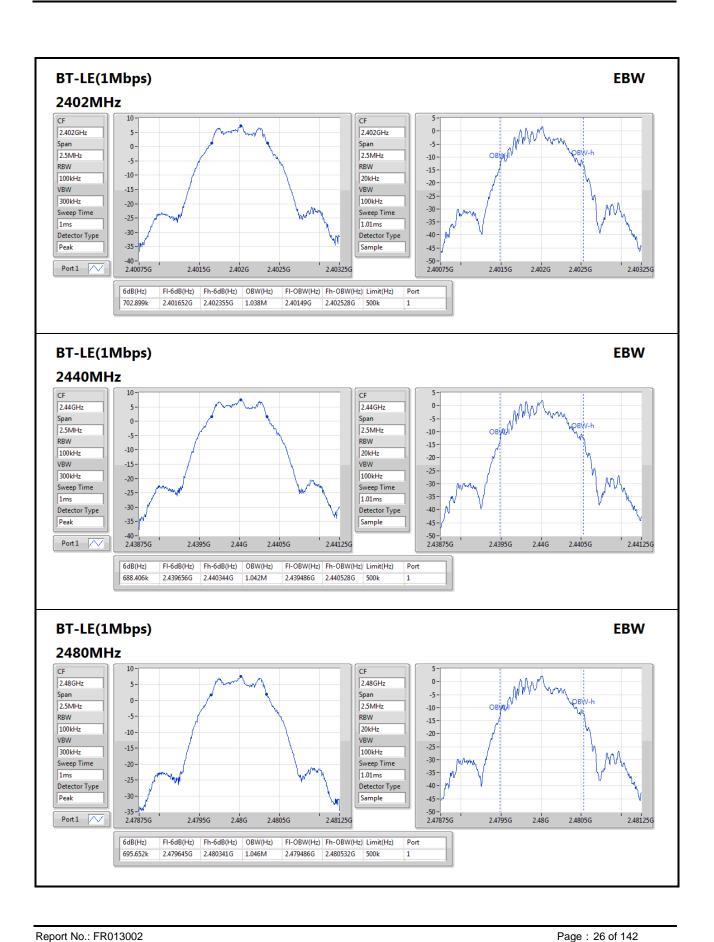

Demont Vanciona Demon

Report Version: Rev. 02



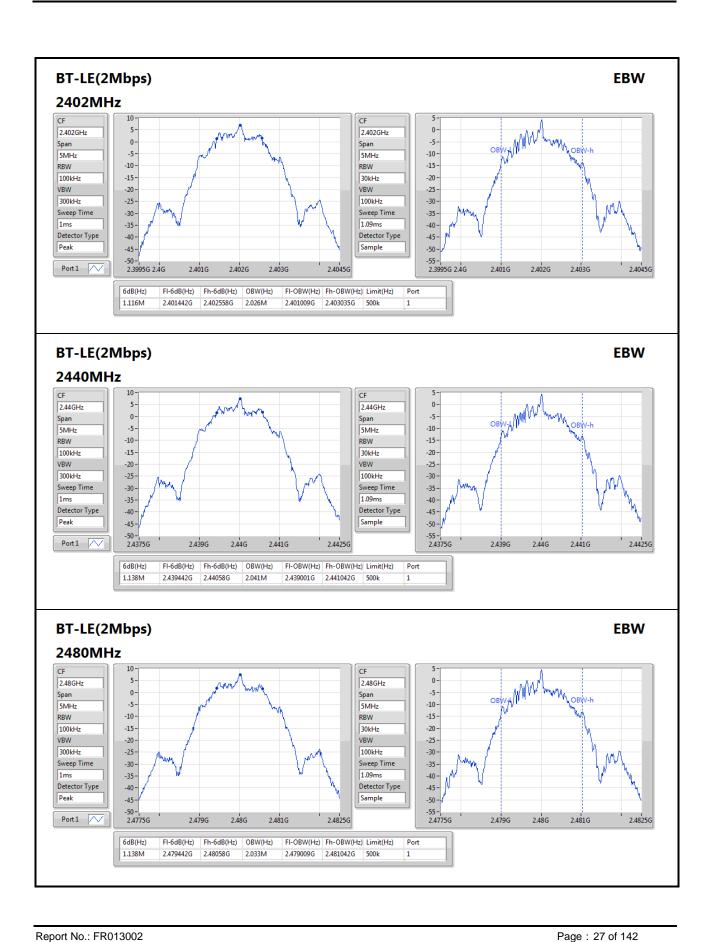

Depart Versions Description

Report Version: Rev. 02



## 3.3 RF Output Power

### 3.3.1 Limit of RF Output Power


Conducted power shall not exceed 1Watt.

Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.

#### 3.3.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

#### 3.3.3 Test Setup



Report No.: FR013002 Page: 28 of 142



## Test configuration 1: Low Power with Printed PCB antenna

## 3.3.4 Test Result of Maximum Output Power

**Summary of Peak Conducted Output Power** 

Mode	Power	Power
	(dBm)	(W)
2.4-2.4835GHz	-	-
BT-LE0.125_Nss1_1TX	-37.28	0.00000
BT-LE0.5_Nss1_1TX	-37.29	0.00000
BT-LE(1Mbps)	-37.40	0.00000
BT-LE(2Mbps)	-37.41	0.00000

#### Result

Mode	Result	Gain	Power	Power Limit
		(dBi)	(dBm)	(dBm)
BT-LE0.125_Nss1_1TX	-	-	-	-
2402MHz	Pass	2.00	-37.28	30.00
2440MHz	Pass	2.00	-37.44	30.00
2480MHz	Pass	2.00	-37.85	30.00
BT-LE0.5_Nss1_1TX	-	-	-	-
2402MHz	Pass	2.00	-37.29	30.00
2440MHz	Pass	2.00	-37.51	30.00
2480MHz	Pass	2.00	-37.88	30.00
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.00	-37.40	30.00
2440MHz	Pass	2.00	-37.54	30.00
2480MHz	Pass	2.00	-37.91	30.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	2.00	-37.41	30.00
2440MHz	Pass	2.00	-37.57	30.00
2480MHz	Pass	2.00	-37.91	30.00

Report No.: FR013002 Page: 29 of 142

Report Version: Rev. 02



**Summary of Conducted (Average) Output Power** 

Mode	Power	Power
	(dBm)	(W)
2.4-2.4835GHz	-	-
BT-LE0.125_Nss1_1TX	-37.40	0.00000
BT-LE0.5_Nss1_1TX	-37.41	0.00000
BT-LE(1Mbps)	-37.49	0.00000
BT-LE(2Mbps)	-37.51	0.00000

#### Result

Mode	Result	Gain	Power	Power Limit
		(dBi)	(dBm)	(dBm)
BT-LE0.125_Nss1_1TX	-	-	-	-
2402MHz	Pass	2.00	-37.40	-
2440MHz	Pass	2.00	-37.57	-
2480MHz	Pass	2.00	-37.96	-
BT-LE0.5_Nss1_1TX	-	-	-	-
2402MHz	Pass	2.00	-37.41	-
2440MHz	Pass	2.00	-37.61	-
2480MHz	Pass	2.00	-37.99	-
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.00	-37.49	-
2440MHz	Pass	2.00	-37.64	-
2480MHz	Pass	2.00	-38.02	-
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	2.00	-37.51	-
2440MHz	Pass	2.00	-37.68	-
2480MHz	Pass	2.00	-38.04	-

Page: 30 of 142

Note: Average power is for reference only.

Report No.: FR013002

Report Version: Rev. 02



## Test configuration 2: High Power with Printed PCB antenna

## 3.3.5 Test Result of Maximum Output Power

**Summary of Peak Conducted Output Power** 

Mode	Power	Power
	(dBm)	(W)
2.4-2.4835GHz	-	-
BT-LE0.125_Nss1_1TX	8.03	0.00635
BT-LE0.5_Nss1_1TX	8.02	0.00634
BT-LE(1Mbps)	8.03	0.00635
BT-LE(2Mbps)	8.03	0.00635

#### Result

Mode	Result	Gain	Power	Power Limit
		(dBi)	(dBm)	(dBm)
BT-LE0.125_Nss1_1TX	-	-	-	-
2402MHz	Pass	2.00	7.71	30.00
2440MHz	Pass	2.00	7.88	30.00
2480MHz	Pass	2.00	8.03	30.00
BT-LE0.5_Nss1_1TX	-	-	-	-
2402MHz	Pass	2.00	7.71	30.00
2440MHz	Pass	2.00	7.88	30.00
2480MHz	Pass	2.00	8.02	30.00
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.00	7.72	30.00
2440MHz	Pass	2.00	7.89	30.00
2480MHz	Pass	2.00	8.03	30.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	2.00	7.71	30.00
2440MHz	Pass	2.00	7.88	30.00
2480MHz	Pass	2.00	8.03	30.00

Report No.: FR013002 Page: 31 of 142

Report Version: Rev. 02



**Summary of Conducted (Average) Output Power** 

Mode	Power	Power
	(dBm)	(W)
2.4-2.4835GHz	-	-
BT-LE0.125_Nss1_1TX	7.98	0.00628
BT-LE0.5_Nss1_1TX	7.97	0.00627
BT-LE(1Mbps)	7.98	0.00628
BT-LE(2Mbps)	7.97	0.00627

#### Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE0.125_Nss1_1TX	-	-	-	-
2402MHz	Pass	2.00	7.65	-
2440MHz	Pass	2.00	7.82	-
2480MHz	Pass	2.00	7.98	-
BT-LE0.5_Nss1_1TX	-	-	-	-
2402MHz	Pass	2.00	7.65	-
2440MHz	Pass	2.00	7.82	-
2480MHz	Pass	2.00	7.97	-
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.00	7.65	-
2440MHz	Pass	2.00	7.83	-
2480MHz	Pass	2.00	7.98	-
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	2.00	7.65	-
2440MHz	Pass	2.00	7.82	-
2480MHz	Pass	2.00	7.97	-

Page: 32 of 142

Note: Average power is for reference only.

Report No.: FR013002

Report Version: Rev. 02



## 3.4 Power Spectral Density


### 3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

#### 3.4.2 Test Procedures

- 1. Set the RBW = 3 kHz, VBW = 10 kHz.
- 2. Detector = Peak, Sweep time = auto couple.
- 3. Trace mode = max hold, allow trace to fully stabilize.
- 4. Use the peak marker function to determine the maximum amplitude level.

### 3.4.3 Test Setup



Report No.: FR013002 Page: 33 of 142



## Test configuration 1: Low Power with Printed PCB antenna

## 3.4.4 Test Result of Power Spectral Density

Summary

Mode	PD		
	(dBm/RBW)		
2.4-2.4835GHz	-		
BT-LE0.125_Nss1_1TX	-44.85		
BT-LE0.5_Nss1_1TX	-45.04		
BT-LE(1Mbps)	-54.14		
BT-LE(2Mbps)	-56.48		


#### Result

Mode	Result	Gain	PD	PD Limit
		(dBi)	(dBm/RBW)	(dBm/RBW)
BT-LE0.125_Nss1_1TX	-	-	-	-
2402MHz	Pass	2.00	-44.85	8.00
2440MHz	Pass	2.00	-45.01	8.00
2480MHz	Pass	2.00	-45.36	8.00
BT-LE0.5_Nss1_1TX	-	-	-	-
2402MHz	Pass	2.00	-45.04	8.00
2440MHz	Pass	2.00	-45.23	8.00
2480MHz	Pass	2.00	-45.60	8.00
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.00	-54.14	8.00
2440MHz	Pass	2.00	-54.37	8.00
2480MHz	Pass	2.00	-54.76	8.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	2.00	-56.48	8.00
2440MHz	Pass	2.00	-56.64	8.00
2480MHz	Pass	2.00	-57.08	8.00

Report No.: FR013002 Page: 34 of 142

Report Version: Rev. 02




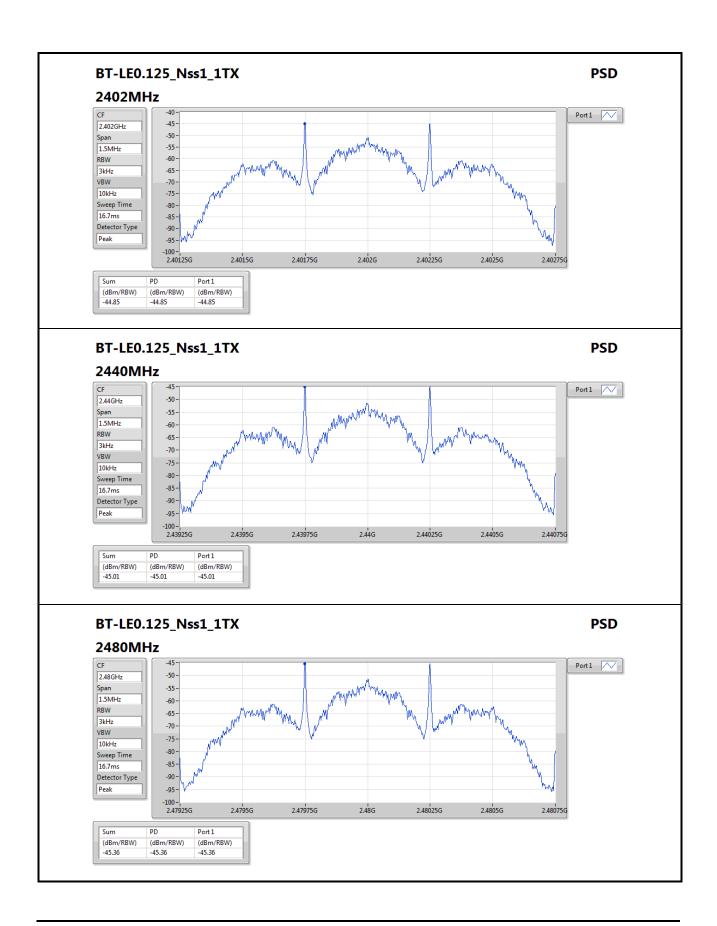

Report No.: FR013002 Page: 35 of 142

Report Version: Rev. 02




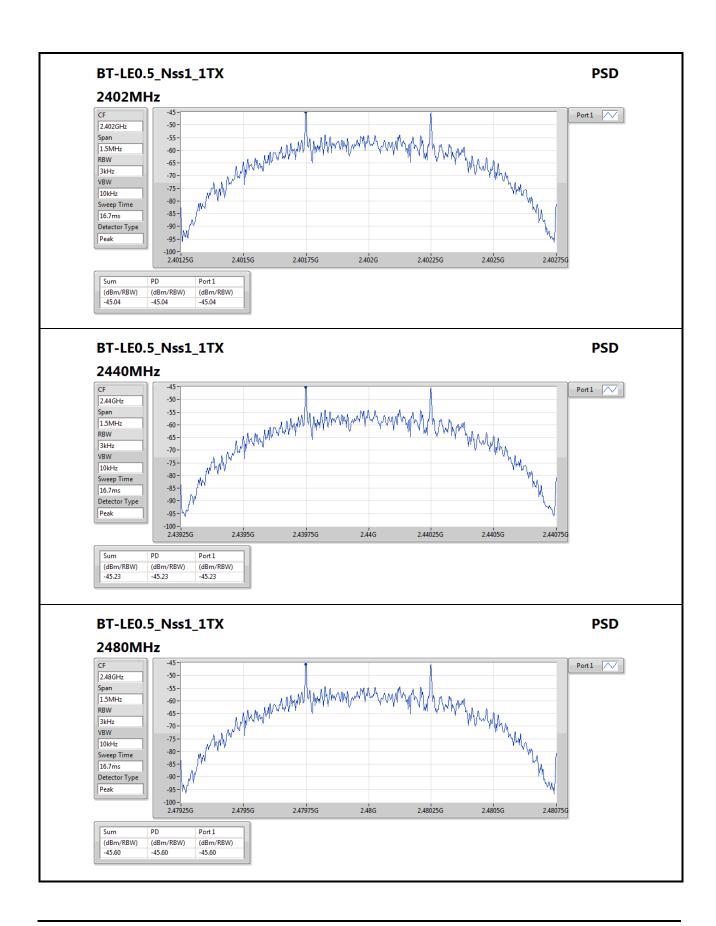

Report No.: FR013002 Page: 36 of 142

Report Version: Rev. 02




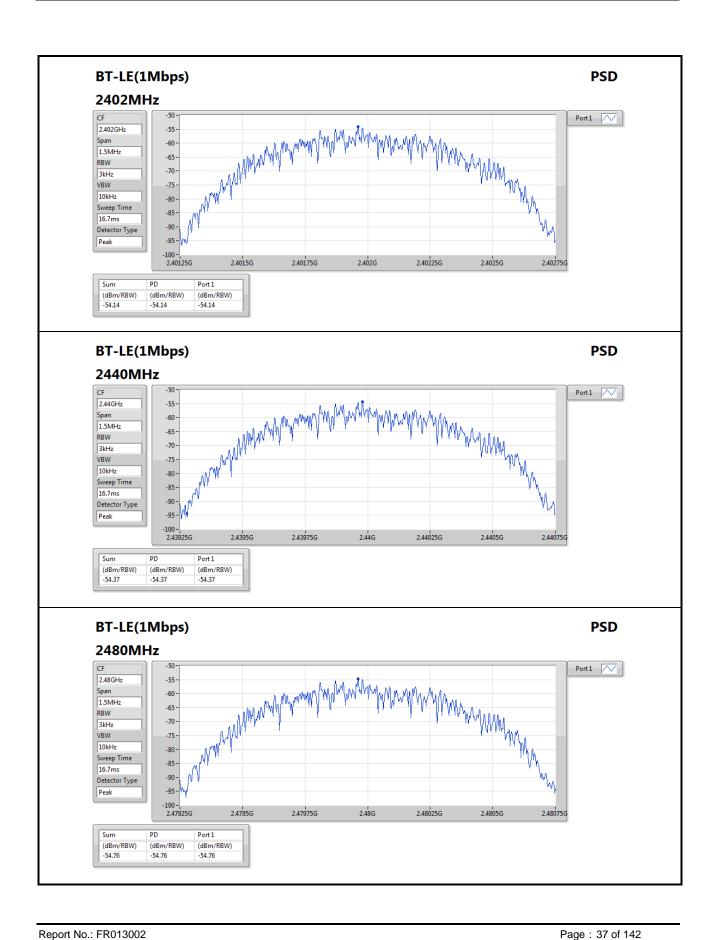

Report No.: FR013002

Report Version: Rev. 02



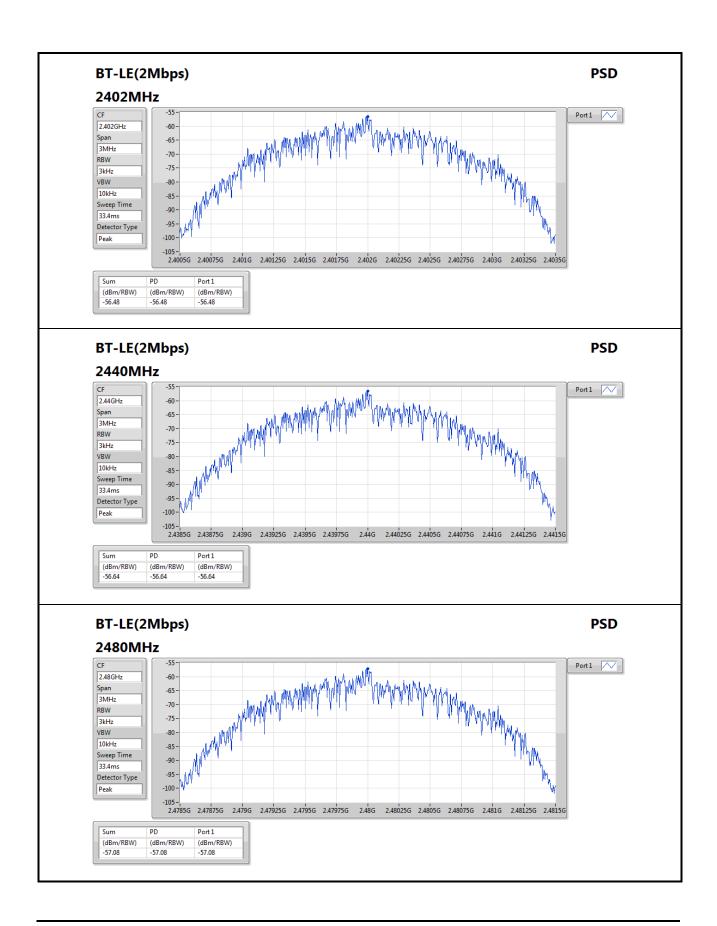

Report No.: FR013002 Page: 38 of 142

Report Version: Rev. 02



# Test configuration 2: High Power with Printed PCB antenna

# 3.4.5 Test Result of Power Spectral Density

**Summary** 

Mode	PD
	(dBm/RBW)
2.4-2.4835GHz	-
BT-LE0.125_Nss1_1TX	1.82
BT-LE0.5_Nss1_1TX	1.56
BT-LE(1Mbps)	-7.76
BT-LE(2Mbps)	-10.55


## Result

Mode	Result	Gain	PD	PD Limit
		(dBi)	(dBm/RBW)	(dBm/RBW)
BT-LE0.125_Nss1_1TX	-	-	-	-
2402MHz	Pass	2.00	1.34	8.00
2440MHz	Pass	2.00	1.71	8.00
2480MHz	Pass	2.00	1.82	8.00
BT-LE0.5_Nss1_1TX	-	-	-	-
2402MHz	Pass	2.00	1.16	8.00
2440MHz	Pass	2.00	1.53	8.00
2480MHz	Pass	2.00	1.56	8.00
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.00	-8.19	8.00
2440MHz	Pass	2.00	-7.88	8.00
2480MHz	Pass	2.00	-7.76	8.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	2.00	-10.66	8.00
2440MHz	Pass	2.00	-10.55	8.00
2480MHz	Pass	2.00	-10.57	8.00

Report No.: FR013002 Page: 39 of 142

Report Version: Rev. 02




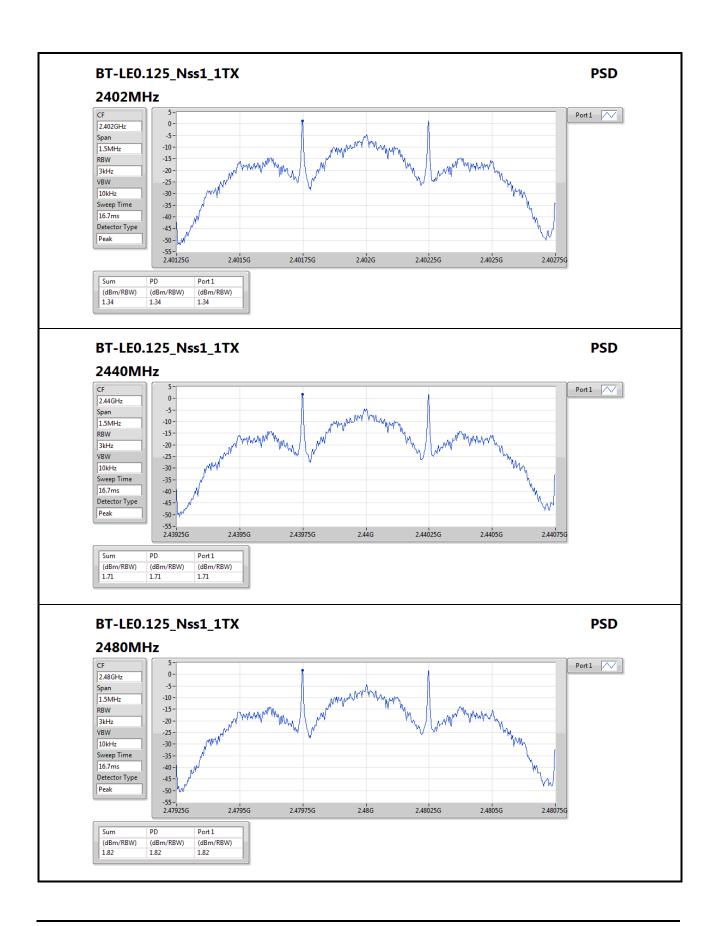

Report No.: FR013002 Page: 40 of 142

Report Version: Rev. 02




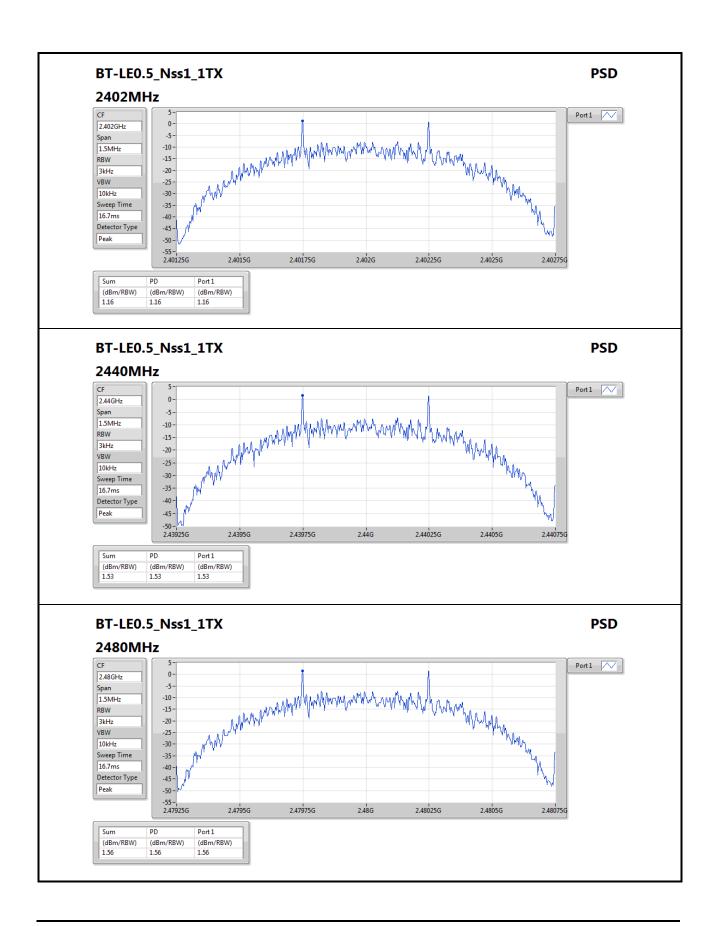

Report No.: FR013002 Page: 41 of 142

Report Version: Rev. 02




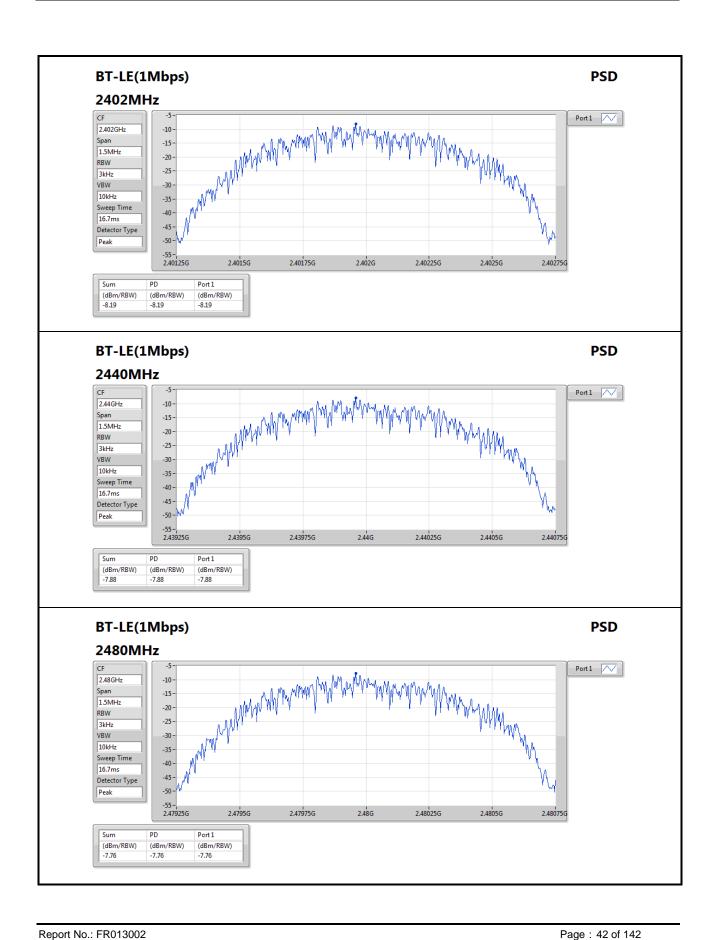

Report No.: FR013002

Report Version: Rev. 02



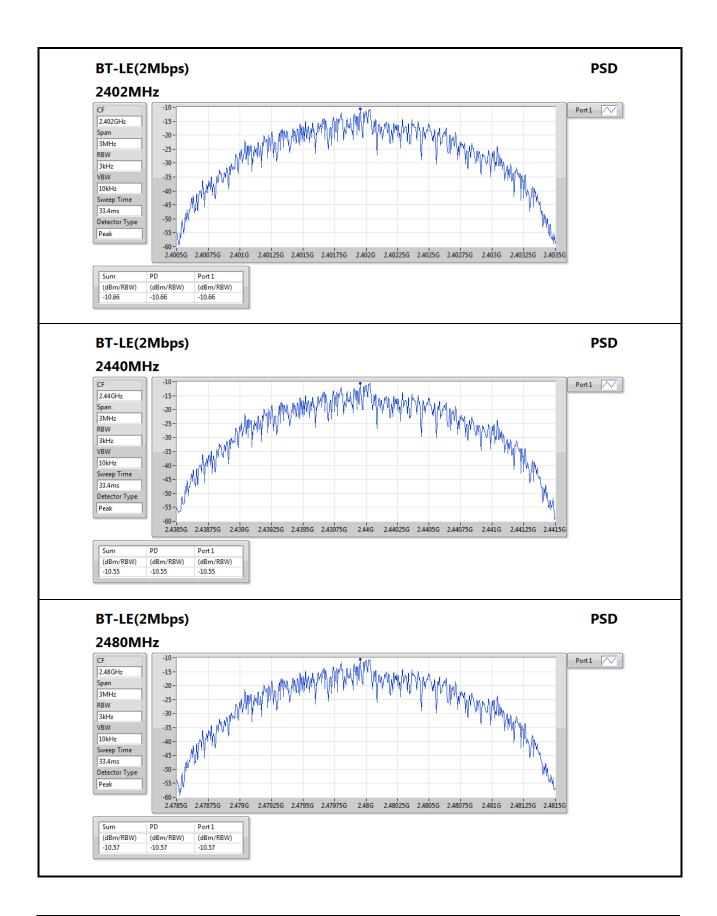

Report No.: FR013002

Report Version: Rev. 02



# 3.5 Emissions in Restricted Frequency Bands

## 3.5.1 Limit of Emissions in Restricted Frequency Bands

	Restricted Band	Emissions Limit	
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

#### Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:** 

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

#### 3.5.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

### Note:


- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- 3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR013002 Page: 44 of 142

Report Version: Rev. 02



# 3.5.3 Test Setup

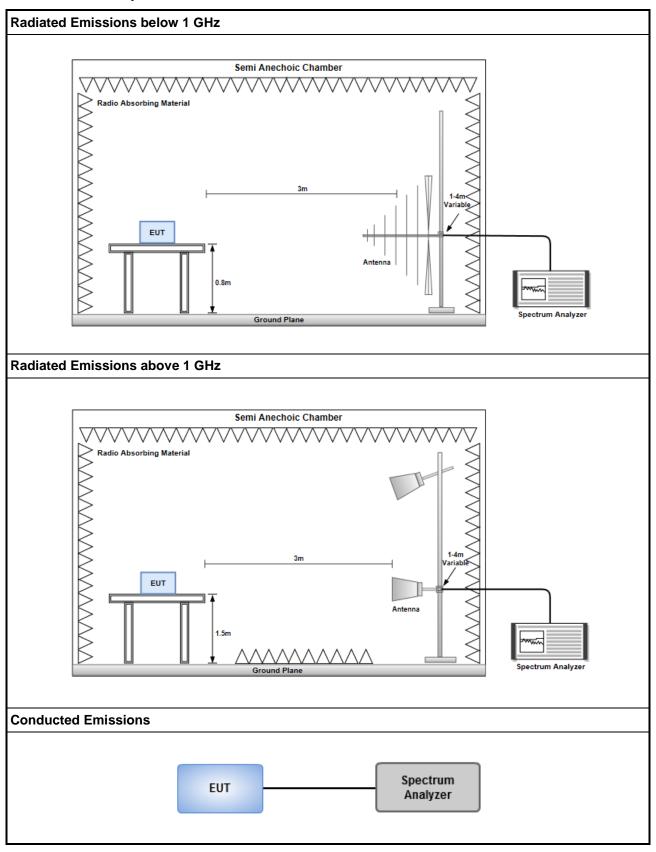


Report Version: Rev. 02

Report No.: FR013002 Page: 45 of 142



## Test configuration 1: Low Power with Printed PCB antenna

## 3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

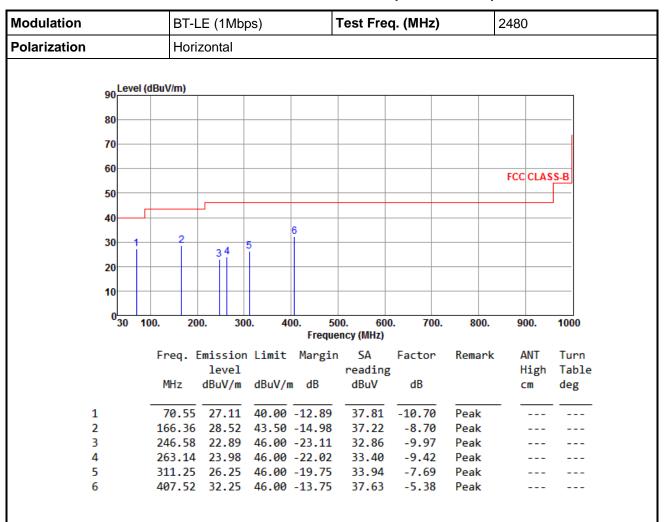

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR013002 Page: 46 of 142

Report Version: Rev. 02



Modulation		BT-L	E (1Mbp	os)		Test Fre	q. (MHz)		2480	
Polarization		Verti	cal							
l e	vel (dBu\	//m)								
90	ver (ubu	····,								
80										
70										
60									FCC CLAS	
50									FUUCLAS	э-Б
40										
40										
30	1	23			5 6 I					
20		1								
10										
0 30	100.	200	0. 30	0. 40		00. 600 ency (MHz)	0. 700.	800.	900.	1000
	Fr	ea. E	mission	Limit	Margi	n SA	Factor	Remark	ANT	Turn
			level		Ü	reading	5		High	Table
	M	ИHz	dBuV/m	dBuV/r	n dB	dBuV	dB		cm	deg
1	7	70.52	23.25	40.00	-16.75	33.94	-10.69	Peak		
2		17.52	22.58		-20.92	31.03	-8.45	Peak		
3		9.00	24.24		-19.26	32.56	-8.32	Peak		
4		6.98	27.11		-16.39	35.81	-8.70	Peak		
5		7.89			-17.83		-5.37	Peak		
6	45	55.45	28.92	46.00	-17.08	32.89	-3.97	Peak		

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR013002 Page: 47 of 142

Report Version: Rev. 02



Modulation	BT-LE (2Mbps)	Test Freq	Test Freq. (MHz)							
Polarization	Horizontal									
	_									
90 Level (dBi	ıV/m)									
80										
70										
60										
00				FCC CLASS-B						
50										
40										
		6								
30 1	34 5									
20										
10										
030 100.	200. 300. 4	00. 500. 600.	700. 800.	900. 1000						
_		Frequency (MHz)								
F	req. Emission Limit level		Factor Remark							
	MHz dBuV/m dBuV/	reading m dB dBuV	dB	High Table						
	THIL GOOT, III GOOT,	ub	ab	cm deg						
1	70.80 27.14 40.00	-12.86 37.87	-10.73 Peak							
		-15.25 36.95	-8.70 Peak							
	47.25 23.52 46.00		-9.96 Peak							
	62.45 24.25 46.00		-9.46 Peak							
	11.33 26.45 46.00 08.41 32.17 46.00	-19.55 34.14 -13.83 37.53	-7.69 Peak -5.36 Peak							

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR013002 Page: 48 of 142

Report Version: Rev. 02



Modulation	BT-L	E (2Mbp	os)		Test Fre	q. (MHz)		2480			
Polarization	Vertical										
Lev	el (dBuV/m)										
90	, (abarmi,										
80											
70											
60											
50								FCC CLAS	S-B		
50									J		
40											
30	- 4			5 6							
	1 23										
20											
10											
030	100. 20	0. 300	0. 40	00. 5	00. 600	0. 700.	800.	900.	1000		
				Freque	ency (MHz)						
	Freq. E	mission	Limit	Margir	s SA	Factor	Remark	ANT	Turn		
		level			reading	,		High	Table		
	MHz	dBuV/m	dBuV/n	n dB	dBuV	dB		cm	deg		
1	70.44	23.30	40.00	-16.70	33.99	-10.69	Peak				
2	148.20	22.47	43.50	-21.03	30.92	-8.45	Peak				
3	159.52	24.11	43.50	-19.39	32.48	-8.37	Peak				
4	166.89			-16.62	35.58	-8.70	Peak				
5	407.22			-17.58		-5.40	Peak				
6	454.25	29.25	46.00	-16.75	33.25	-4.00	Peak				

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR013002 Page: 49 of 142

Report Version: Rev. 02



## 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)

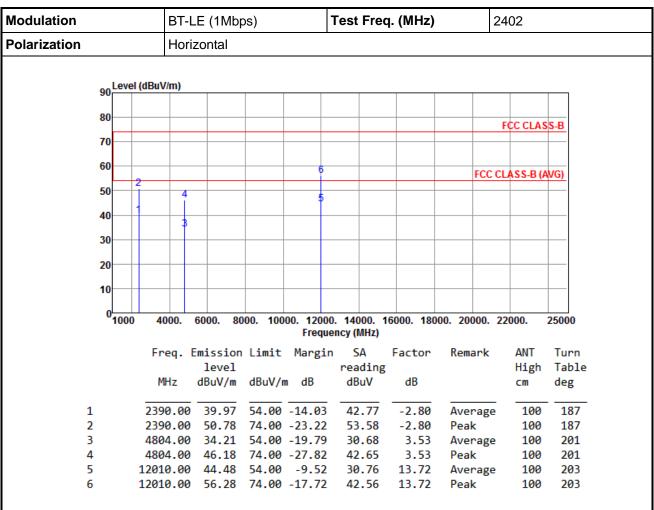

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR013002

Report Version: Rev. 02



Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402
Polarization	Vertical		
90 Level (dBu	V/m)		

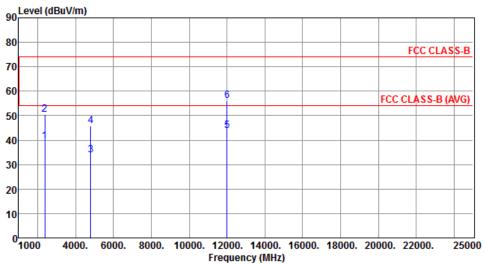

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	39.57	54.00	-14.43	42.37	-2.80	Average	100	242
2	2390.00	50.60	74.00	-23.40	53.40	-2.80	Peak	100	242
3	4804.00	33.71	54.00	-20.29	30.18	3.53	Average	100	50
4	4804.00	45.71	74.00	-28.29	42.18	3.53	Peak	100	50
5	12010.00	43.92	54.00	-10.08	30.20	13.72	Average	100	49
6	12010.00	56.06	74.00	-17.94	42.34	13.72	Peak	100	49

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR013002 Report Version: Rev. 02



Modulation			BT-L	E (1Mb	os)	-	Test Fred	q. (MHz)		2440			
Polarization			Horizontal										
	90 Le	evel (	dBuV/m)										
	00												
	80									FCC CLAS	S-B		
	70												
	-												
	60								FCC	CLASS-B (A	VG)		
	50	2	6										
		-   -		+									
	40		5										
	30												
	20												
	10												
	010	000	4000.	6000. 80	000. 100		). 14000. 1 ency (MHz)	6000. 180	00. 20000.	22000.	25000		
								<b>.</b> .			_		
			Freq. E	mission level	Limit	Margin	SA reading	Factor	Remark	ANT	Turn Table		
			MHz	dBuV/m	dBuV/ı	n dB	dBuV	dB		High cm	deg		
			11112	abav/iii	ubuv/i	ıı ub	abav	ub		CIII	ueg		
:	1		2390.00	39.86	54.00	-14.14	42.66	-2.80	Average	100	184		
	2		2390.00	50.76	74.00	-23.24	53.56	-2.80	Peak	100	184		
	3		2483.50	39.55	54.00	-14.45	42.58	-3.03	Average	100	184		
	4		2483.50	50.55		-23.45	53.58	-3.03	Peak	100	184		
	5		4880.00			-17.65	32.72	3.63	Average		192		
	5		4880.00				43.53	3.63	Peak	100	192		
	7		7320.00				30.39	9.22	Average		200		
	8		7320.00	51.85	74.00	-22.15	42.63	9.22	Peak	100	200		

\*Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR013002

Page: 52 of 142



Modulation			BT-L	E (1Mb <sub>l</sub>	ps)		Test Fred	ą. (MHz)	2	2440			
Polarization	١		Vertical										
	90	Level	(dBuV/m)										
	80												
	80									FCC CLAS	S-B		
	70												
	60												
			4	8-					FCC	CLASS-B (A	VG)		
	50		6										
	40	1	B   _	1									
	20												
	30												
	20												
	10												
	0	1000	4000.	6000. 80	000. 100			6000. 1800	00. 20000.	22000.	25000		
						Freque	ncy (MHz)						
			Freq. [		Limit	Margin		Factor	Remark	ANT	Turn		
			MHz	level	4D. M/-	dD	reading dBuV	dB		High	Table		
			МПΖ	dBuV/m	dBuV/r	II UD	ubuv	ub		CM	deg		
	1		2390.00	39.28	54.00	-14.72	42.08	-2.80	Average	100	254		
	2		2390.00	50.45	74.00	-23.55	53.25	-2.80	Peak	100	254		
	3		2483.50	39.16		-14.84	42.19	-3.03	Average		254		
	4		2483.50			-23.84	53.19	-3.03	Peak	100	254		
	5 6		4880.00 4880.00	34.93 47.27		-19.07 -26.73	31.30 43.64	3.63 3.63	Average Peak	100 100	51 51		
				41.//	74.00	-20./3	43.04	1.00	reak	TOO	21		
	7		7320.00	39.64		-14.36	30.42	9.22	Average	100	58		

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR013002

Report Version: Rev. 02

The previous version of the test report has been cancelled and replaced by new version.

Page: 53 of 142



Modulation	BT-LE	(1Mbps	s)	Т	Test Freq. (MHz)				2480			
Polarization	Horizontal											
90 Level (	IBuV/m)	T T										
80								FCC CLAS				
70								FCC CLAS	5-В			
60							FOC	CLASS D.	140			
50	4	6					rcc	CLASS-B (A	WG)			
40		5										
30												
20												
10												
0 <mark></mark>	4000. 60	00. 800	0. 10000		14000. 1	16000. 180	00. 20000.	22000.	25000			
	Freq. Em	ission	Limit			Factor	Remark	ANT	Turn			
		level BuV/m	dBuV/m	dB	reading dBuV	dB		High cm	Table deg			
	2483.50	40.08	54.00 -	13.92	43.11	-3.03	Averag	e 100	202			
			74.00 -		54.18	-3.03	Peak	100	202			
	4960.00 1 4960.00 4				30.58	3.83 3.83	Averag Peak		203 203			
	7440.00 7				43.48 30.63	9.21	Averag	100 e 100	203			
	7440.00				42.74	9.21	Peak	100	202			

Page: 54 of 142

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR013002

Report Version: Rev. 02



Modulation	BT-L	E (1Mbp	os)	7	Test Fred	ą. (MHz)	2	2480		
Polarization	Vertical									
11 (4)	Davidson)									
90 Level (di	Buv/m)									
80										
								FCC CLAS	S-B	
70										
60										
50 2		6					FCC	CLASS-B (A	WG)	
50	4									
40	3	- 1								
30										
20										
10										
1000	4000.	6000. 80	00. 100		. 14000. 1 ncy (MHz)	6000. 180	00. 20000.	22000.	25000	
	Frea F	mission	limit	Margin		Factor	Remark	ANT	Turn	
		level		. 101 6111	reading			High	Table	
	MHz	dBuV/m	dBuV/r	n dB	dBuV	dB		cm	deg	
1 2	2483.50	39.63	54.00	-14.37	42.66	-3.03	Average	100	251	
2 2	2483.50	50.62	74.00	-23.38	53.65	-3.03	Peak	100	251	
3 4	4960.00	34.42	54.00	-19.58	30.59	3.83	Average	100	51	

3.83

9.21

9.21

Peak

Peak

Average

100

100

100

51

54

54

Page: 55 of 142

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

4960.00 46.19 74.00 -27.81 42.36

7440.00 39.78 54.00 -14.22 30.57 7440.00 52.73 74.00 -21.27 43.52

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR013002

Report Version: Rev. 02

5



30 20 10

1000

Modulation			BT-LE	(2Mbp	os)		Test	Freq.	(MHz)	)	24	02	
Polarization			Horizo	ntal							•		
	90 L	evel (dBı	uV/m)	ı	ı			I	I	I		I	
	80										F	CC CLAS	S-B
	70												
	60					•					FCC CL	ASS-B (A	WG)
	50		4			5	<u> </u>						
	40		$\perp$										-

	0									
	1000	4000.	6000. 80	00. 100	00. 12000.	14000. 1	16000. 180	00. 20000.	22000.	25000
					Freque	ncy (MHz)				
		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
			level			reading	;		High	Table
		MHz	dBuV/m	dBuV/r	n dB	dBuV	dB		cm	deg
1		2390.00	40.04	54.00	-13.96	42.84	-2.80	Average	100	192
2		2390.00	51.01	74.00	-22.99	53.81	-2.80	Peak	100	192
3		4804.00	34.16	54.00	-19.84	30.63	3.53	Average	100	202
4		4804.00	46.15	74.00	-27.85	42.62	3.53	Peak	100	202
5		12010.00	44.22	54.00	-9.78	30.50	13.72	Average	100	203
6		12010.00	56.22	74.00	-17.78	42.50	13.72	Peak	100	203

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report Version: Rev. 02

Report No.: FR013002 Page: 56 of 142



Modulation	BT-LE (2Mbps)	Test	Freq. (I	MHz)	2402		
Polarization	Vertical						
90 Level (dBu\	//m)						

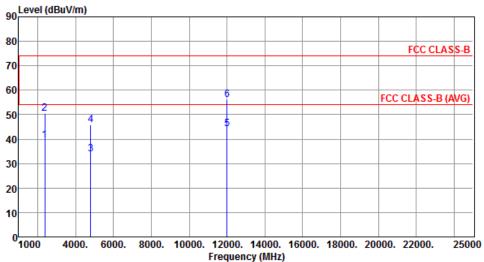

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
	2200 00			44.54	40.40				
1	2390.00	39.39	54.00	-14.61	42.19	-2.80	Average	100	241
2	2390.00	50.56	74.00	-23.44	53.36	-2.80	Peak	100	241
3	4804.00	33.72	54.00	-20.28	30.19	3.53	Average	100	54
4	4804.00	45.72	74.00	-28.28	42.19	3.53	Peak	100	54
5	12010.00	44.12	54.00	-9.88	30.40	13.72	Average	100	57
6	12010.00	56.12	74.00	-17.88	42.40	13.72	Peak	100	57

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report Version: Rev. 02



Modulation			BT-	LE (2N	1bp	s)		Test	Fred	ղ. (MHz)		24	140	
Polarization			Hor	izontal								•		
	90 Lev	el (dBu	V/m)											
	00													
	80											F	CC CLAS	S-B
	70													
	60													
	۳_	21			8							FCC CL	.ASS-B (A	VG)
	50	Ħ	6											
	40	13			7									
			5											
	30													
	20													
	10													
	0100	0 4	1000.	6000.	800	00 100	00 1200	00 140	00 1	6000. 180	100 20	NNN 22	2000	 25000
	100			0000.	00.	00. 100		iency (I		0000. 100	700. 20	000. 22		20000
		Fi	req.	Emissi	on	Limit	Margi	n S	А	Factor	Rem	ark	ANT	Turn
				leve					ding				High	Tabl
		ı	MHz	dBuV/	m	dBuV/ı	n dB	dB	uV	dB			cm	deg
1		239	90.00	39.6	9	54.00	-14.31	42	.49	-2.80	Ave	rage	100	195
2		239	90.00	50.7	2	74.00	-23.28	53	.52	-2.80	Pea	_	100	195
3			83.50				-14.56		. 47	-3.03		rage	100	195
							-23.59		.44	-3.03	Pea		100	195
4				3/1/2	3	54.00	-19.77	30	.60	3.63	Ave	rage	100	209
5												_		
		488		46.1	1	74.00	-27.89 -14.19		.48 .59	3.63 9.22	Pea	_	100 100	209 207

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR013002

Report Version: Rev. 02

The previous version of the test report has been cancelled and replaced by new version.

Page: 58 of 142



Modulation			BT-I	LE (2Mb	ps)		Test Fred	q. (MHz)	2	440	
Polarization			Vert	ical		•					
			l .								
	90	Level	(dBuV/m)								
	90										
	80									FCC CLAS	c D
	70	$\vdash$								FCC CLAS	<u>5-В</u>
	70										
	60								500.0	LACC D (A	VC
		1	4	- 8					FLCC	LASS-B (A	vo)
	50		6								
	40		B	- 7							
			†								
	30										
	20										
	10										
	0										
		1000	4000.	6000. 80	000. 100		). 14000. 1 ency (MHz)	6000. 1800	00. 20000. 2	2000.	25000
			Freq.	Emissior	limit	Margin	SA	Factor	Remark	ANT	Turn
				level			reading			High	Table
			MHz	dBuV/m	dBuV/ı	m dB	dBuV	dB		cm	deg
	1		2390.00	39.69	54.00	-14.31	42.49	-2.80	Average	100	252
	2			50.37			53.17	-2.80	Peak	100	252
	3			39.36			42.39	-3.03	Average	100	252
	4		2483.50	50.16	74.00	-23.84	53.19	-3.03	Peak	100	252
	_		4880.00	34.03	54.00	-19.97	30.40	3.63	Average	100	53
	5					20 00	42.28	3.63	Peak	100	53
	6		4880.00						I Cuk		
				39.50	54.00	-28.09 -14.50 -22.48	30.28 42.30	9.22 9.22	Average Peak	100	57 57

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR013002

Page: 59 of 142

Report Version: Rev. 02



Modulation		BT-l	E (2Mb	os)	-	Test Fred	q. (MHz)	2	2480	
Polarization		Hori	zontal		•					
	Ιον	el (dBuV/m)								
	90	er (dbd villi)								
	80									
									FCC CLAS	S-B
	70									
	60									
	••	2	6					FCC (	CLASS-B (A	VG)
	50	1 4								
	40		5							
	40	3								
	30									
	20									
	20									
	10									
	0									
	100	0 4000.	6000. 80	000. 100		). 14000. 1 ency (MHz)	6000. 180	00. 20000.	22000.	25000
		Freq.	Emission	limit	Margin	SA	Factor	Remark	ANT	Turn
			level		6411	reading			High	Table
		MHz	dBuV/m	dBuV/	m dB	dBuV	dB		cm	deg
1		2483.50			-12.65	44.38	-3.03	Average		185
2		2483.50			-22.74	54.29	-3.03	Peak	100	185
3		4960.00				30.48	3.83	Average		204
4		4960.00				42.45	3.83	Peak	100	204
5		/440.00	39.80	54.00	-14.20	30.59	9.21	Average	100	206

9.21

Peak

100

206

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

7440.00 51.80 74.00 -22.20 42.59

\*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report Version: Rev. 02

Report No.: FR013002 Page: 60 of 142



Modulation		BT-LE	(2Mbps)		Test	Freq.	(MHz)	)	24	80	
Polarization		Vertica	I								
000	Level (dB	uV/m)									
80											

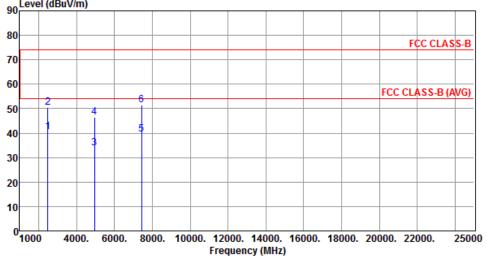

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2483.50	40.52	54.00	-13.48	43.55	-3.03	Average	100	251
2	2483.50	50.42	74.00	-23.58	53.45	-3.03	Peak	100	251
3	4960.00	34.02	54.00	-19.98	30.19	3.83	Average	100	55
4	4960.00	46.35	74.00	-27.65	42.52	3.83	Peak	100	55
5	7440.00	39.46	54.00	-14.54	30.25	9.21	Average	100	53
6	7440.00	51.54	74.00	-22.46	42.33	9.21	Peak	100	53

Page: 61 of 142

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




# 3.5.6 Transmitter Conducted Unwanted Emissions (Below 1 GHz)

Modulati	on Mode	BT LE-1Mbps	3	Frequ	iency	2480MHz	
Range (MHz)	Max Value chain0 (dBm)	DG (dBi)	GRF (dB)	EIRP (dBm)	E-Field (dBuV/m)	Min E-Field Limit (dBuV/m)	E-Field Margin (dB)
30~1000	-91.30	2.00	4.70	-84.60	10.66	40.00	-29.34

Modulati	ion Mode	BT LE-2Mbps	3	Frequ	iency	2480MHz	
Range (MHz)	Max Value chain0 (dBm)	DG (dBi)	GRF (dB)	EIRP (dBm)	E-Field (dBuV/m)	Min E-Field Limit (dBuV/m)	E-Field Margin (dB)
30~1000	-91.80	2.00	4.70	-85.10	10.16	40.00	-29.84

#### Note:

- 1. GRF = Ground Reflection Factor.
- 2. DG = Directional Gain.
- 3. Worst case of emission limit below 1GHz is selected to be limit.

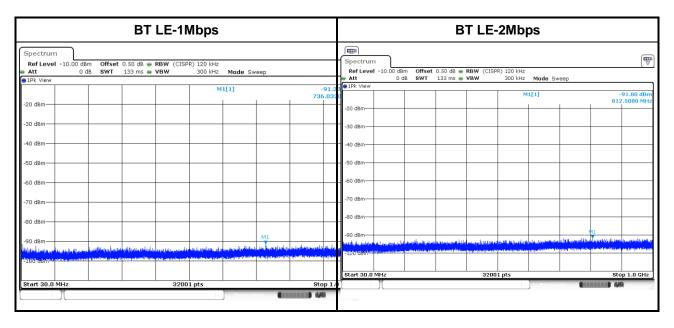

Report No.: FR013002 Page: 62 of 142

Report Version: Rev. 02



# 3.5.7 Transmitter Conducted Unwanted Emissions (Above 1GHz) in Band Edge


	Transmit	ter Conduc	ted Unwan	ted Emissi	ons Results	s in Band E	dge	
Modulation	Mode	BT LE-1Mb	ps					
Test ch. Freq. (MHz)	Range (MHz)	Max Value chain0 (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)	Remark
	2310~2390	-75.12	2.00	-73.12	22.14	74.00	-51.86	PK
2402	2310~2390	-93.42	2.00	-91.42	3.84	54.00	-50.16	AV
2402	2483.5~2690	-77.08	2.00	-75.08	20.18	74.00	-53.82	PK
	2483.5~2690	-90.15	2.00	-88.15	7.11	54.00	-46.89	AV
	2310~2390	-80.61	2.00	-78.61	16.65	74.00	-57.35	PK
2440	2310~2390	-93.11	2.00	-91.11	4.15	54.00	-49.85	AV
2440	2483.5~2500	-78.61	2.00	-76.61	18.65	74.00	-55.35	PK
	2483.5~2500	-93.14	2.00	-91.14	4.12	54.00	-49.88	AV
	2310~2390	-80.27	2.00	-78.27	16.99	74.00	-57.01	PK
2480	2310~2390	-93.18	2.00	-91.18	4.08	54.00	-49.92	AV
2400	2483.5~2690	-65.70	2.00	-63.70	31.56	74.00	-42.44	PK
1	2483.5~2690	-92.50	2.00	-90.50	4.76	54.00	-49.24	AV

Note: DG = Directional Gain.

Report No.: FR013002 Page: 63 of 142

Report Version: Rev. 02



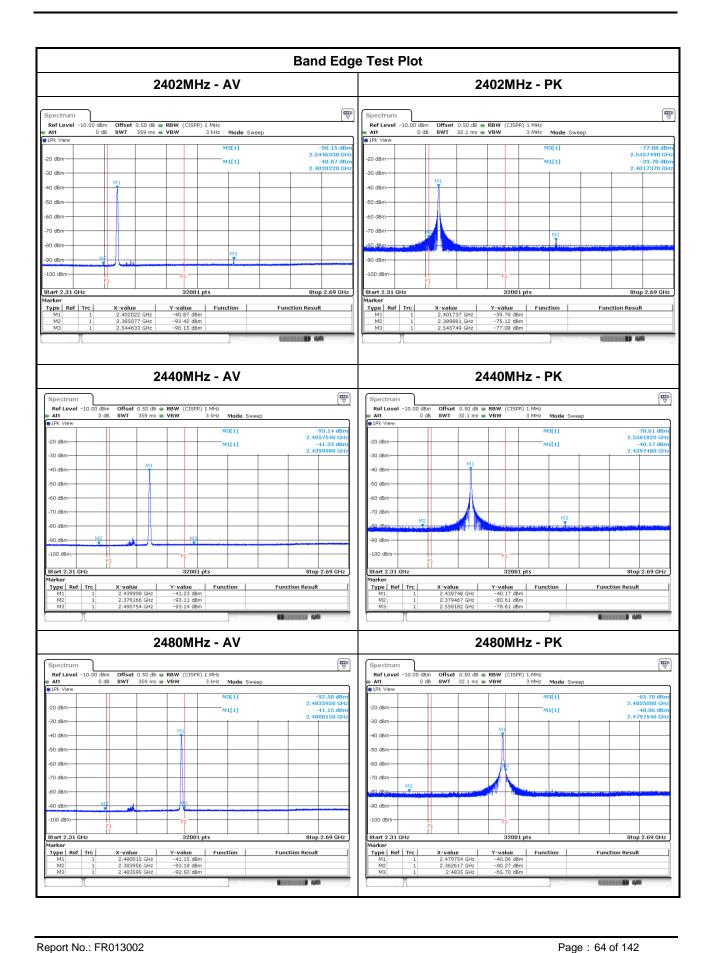

Report No.: FR013002

Report Version: Rev. 02




	Transmitter Conducted Unwanted Emissions Results in Band Edge											
Modulation	Mode	BT LE-2Mb	BT LE-2Mbps									
Test ch. Freq. (MHz)	Range (MHz)	Max Value chain0 (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)	Remark				
	2310~2390	-74.58	2.00	-72.58	22.68	74.00	-51.32	PK				
2402	2310~2390	-93.33	2.00	-91.33	3.93	54.00	-50.07	AV				
2402	2483.5~2500	-79.88	2.00	-77.88	17.38	74.00	-56.62	PK				
	2483.5~2500	-92.66	2.00	-90.66	4.60	54.00	-49.40	AV				
	2310~2390	-80.88	2.00	-78.88	16.38	74.00	-57.62	PK				
2440	2310~2390	-92.93	2.00	-90.93	4.33	54.00	-49.67	AV				
2440	2483.5~2500	-78.97	2.00	-76.97	18.29	74.00	-55.71	PK				
	2483.5~2500	-91.95	2.00	-89.95	5.31	54.00	-48.69	AV				
	2310~2390	-80.31	2.00	-78.31	16.95	74.00	-57.05	PK				
2480	2310~2390	-92.84	2.00	-90.84	4.42	54.00	-49.58	AV				
	2483.5~2690	-65.44	2.00	-63.44	31.82	74.00	-42.18	PK				
	2483.5~2690	-91.85	2.00	-89.85	5.41	54.00	-48.59	AV				

Note: DG = Directional Gain.

Report No.: FR013002 Report Version: Rev. 02 Page: 65 of 142



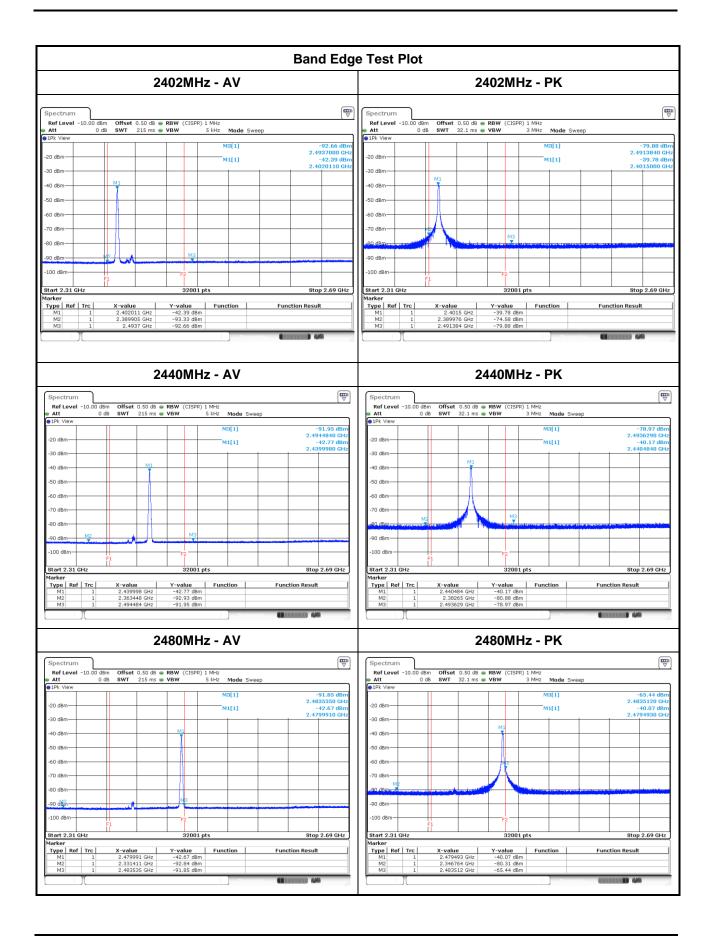

Page: 66 of 142

Report No.: FR013002

Report Version: Rev. 02




Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band									
Modulation ModeBT LE-1MbpsFrequency2402MHz									
Freq. (MHz)	Remark	Max Value chain0 (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBm)	E-Field Margin (dB)		
4804.00	PK	-72.88	2.00	-70.88	24.38	74.00	-49.62		

Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band										
Modulation ModeBT LE-1MbpsFrequency2440MHz										
Freq. (MHz)	Remark	Max Value chain0 (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBm)	E-Field Margin (dB)			
4880.00	PK	-74.30	2.00	-72.30	22.96	74.00	-51.04			

Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band										
Modulation ModeBT LE-1MbpsFrequency2480MHz										
Freq. (MHz)	Remark	Max Value chain0 (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBm)	E-Field Margin (dB)			
4960.00	PK	-74.25	2.00	-72.25	23.01	74.00	-50.99			

- Note:
  1. If the PK margin greater than 20 dB, there is no need to get AVG reading.
  2. DG = Directional Gain.



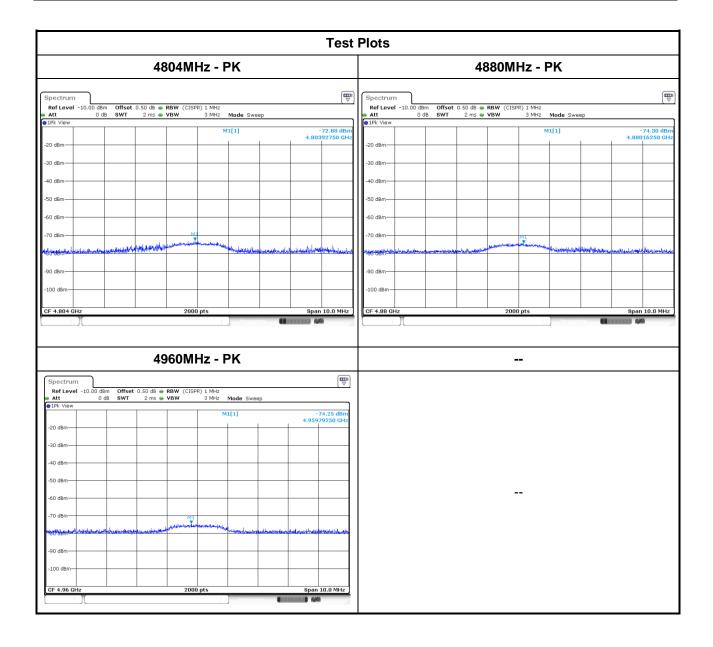



Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band										
Modulation ModeBT LE-2MbpsFrequency2402MHz										
Freq. (MHz)	Remark	Max Value chain0 (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBm)	E-Field Margin (dB)			
4804.00	PK	-73.82	2.00	-71.82	23.44	74.00	-50.56			


Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band									
Modulation ModeBT LE-2MbpsFrequency2440MHz									
Freq. (MHz)	Remark	Max Value chain0 (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBm)	E-Field Margin (dB)		
4880.00	PK	-73.91	2.00	-71.91	23.35	74.00	-50.65		

Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band									
Modulation ModeBT LE-2MbpsFrequency2480MHz									
Freq. (MHz)	Remark	Max Value chain0 (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBm)	E-Field Margin (dB)		
4960.00	PK	-74.54	2.00	-72.54	22.72	74.00	-51.28		


## Note:

- If the PK margin greater than 20 dB, there is no need to get AVG reading.
   DG = Directional Gain.



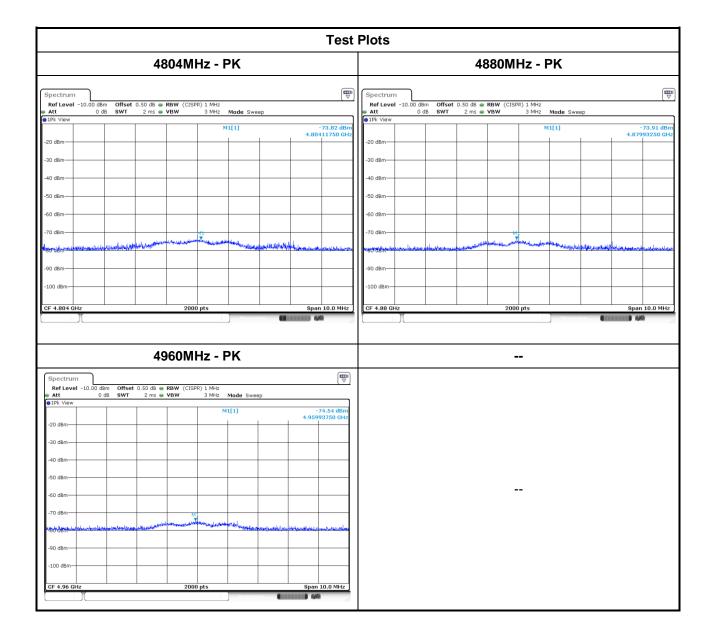



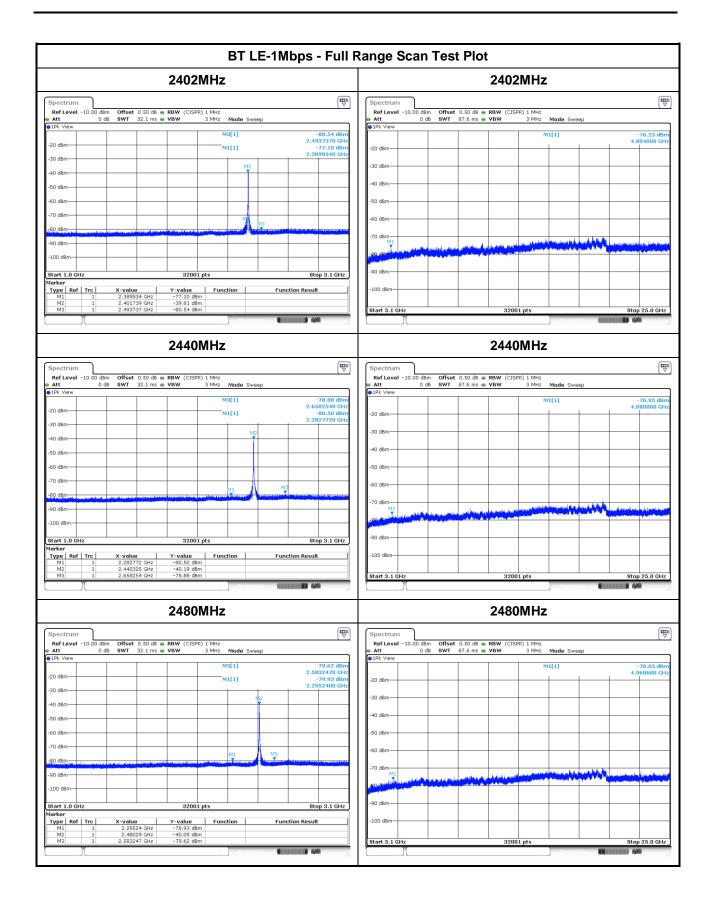


Report No.: FR013002

Page: 71 of 142

Report Version: Rev. 02



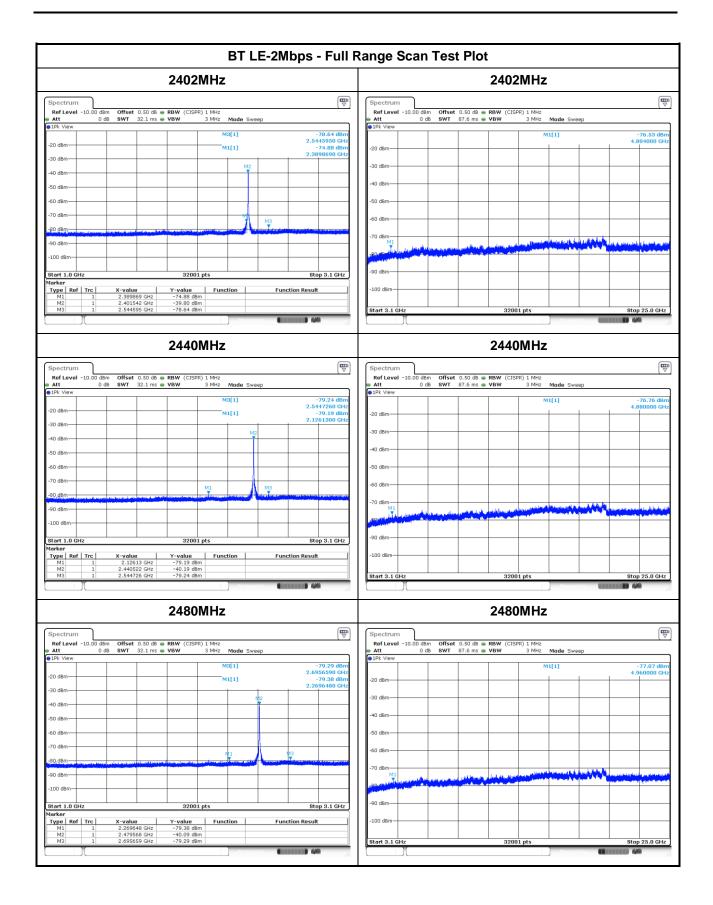

Report No.: FR013002


Page: 72 of 142

Report Version: Rev. 02



## Test configuration 2: High Power with Printed PCB antenna

## 3.5.8 Transmitter Radiated Unwanted Emissions (Below 1GHz)

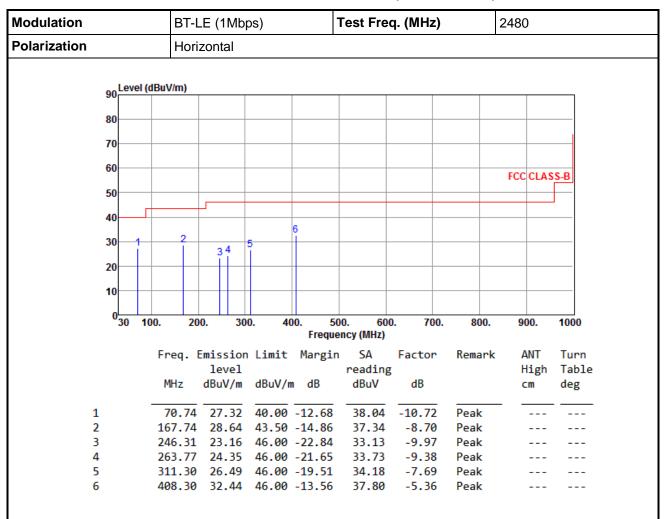

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Page: 73 of 142

Report No.: FR013002

Report Version: Rev. 02



Modulation			BT-L	E (1Mb	os)		Test Fre	q. (MHz)		2480	
Polarization			Verti	cal							
	oo Le	vel (dBu	V/m)								
	90										
	80										
	70										
	60									FCC CLA	SS-B
	50										
	40										
						5 6					
	30	1	23			1					
	20	-	111								
	40										
	10										
	0 30	100.	20	0. 30	0. 40	00.	500. 60	0. 700.	800.	900.	1000
						Fred	luency (MHz)				
		F	req. E	mission	Limit	Marg		Factor	Remark		Turn
				level	15.144		reading			High	
			MHz	dBuV/m	aBuV/r	n ab	dBuV	dB		CM	deg
1		_	70.74	23.41	40.00	-16.5	9 34.13	-10.72	Peak		
2			48.34	22.94	43.50				Peak		
3			59.01	24.66	43.50				Peak		
4			67.74		43.50				Peak		
5			08.30						Peak		
6		4	55.83	29.14	46.00	-16.8	6 33.10	-3.96	Peak		

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR013002 Page: 74 of 142

Report Version: Rev. 02



Modulation			В	T-LE	(2M	bps	s)		Test Fre	q. (MHz)		2480	)	
Polarization			Н	orizo	ontal									
	90 <sup>L</sup>	evel (c	dBuV/m)	)										
	80			_										
	70-			$\perp$										
	60													
												FCC	CLAS	S-B
	50													
	40					+		6						
	30	1	2		3 4	5		Ĭ						
	20				<u> </u>	#								
	10													
	0 3	0 10	00.	200.		300.	4		00. 60 ency (MHz)		. 800.	90	00.	1000
			Freq	. Em	issi	on	Limit	Margir		Factor	Remark	: A	NT	Turn
					leve				reading				ligh	Table
			MHz	d	BuV/	m	dBuV/ı	n dB	dBuV	dB		C	m	deg
	1		70.	44	27.5	6	40.00	-12.44	38.25	-10.69	Peak			
	2		167.		28.4			-15.06	37.15		Peak			
	3		247.		23.6			-22.33	33.63		Peak			
	4		262.					-21.58	33.85		Peak			
	5		311.					-19.17	34.52		Peak			
•	6		408.	36	32.3	7	46.00	-13.63	37.73	-5.36	Peak			

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR013002 Page: 75 of 142

Report Version: Rev. 02



Modulation			BT-l	E (2Mb <sub>l</sub>	os)		Test Fre	q. (MHz)		2480	
Polarization			Vert	ical							
		ovol (d	IBuV/m)								
	90	.evei (u	ibu viiii)								
	80										
	70										
	60										
	00									FCC CLAS	S-B
	50										_
	40										
						5 6					
	30	1	2 <sup>3</sup> l			i i					
	20		— <u>ī</u>   —								
	40										
	10										
	03	0 10	0. 20	0. 30	0. 40		00. 600	0. 700.	800.	900.	1000
			_				ency (MHz)	<b>.</b> .		ANT	_
			Freq.	Emission level	Limit	Margi	n SA reading	Factor	Remark	ANT High	Turn Table
			MHz	dBuV/m	dBuV/r	n dB	dBuV	dB		cm	deg
					aza.,.						
1			70.85	23.49	40.00	-16.51	34.23	-10.74	Peak		
2			148.17	23.00		-20.50	31.45	-8.45	Peak		
3			160.25	24.35		-19.15	32.77	-8.42	Peak		
4			167.22			-16.39	35.81	-8.70	Peak		
5				28.63				-5.38	Peak		
6			454.98	29.33	46.00	-16.67	33.31	-3.98	Peak		

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.


Report No.: FR013002

Page: 76 of 142

Report Version: Rev. 02



### **Transmitter Radiated Unwanted Emissions (Above 1GHz)** 3.5.9

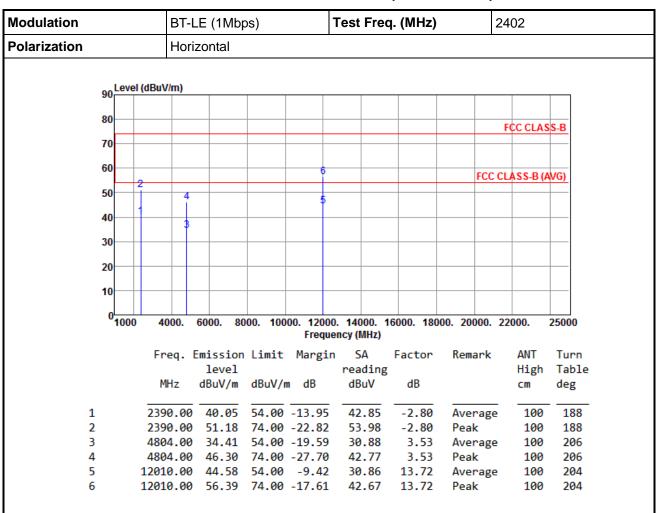

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR013002

Report Version: Rev. 02



Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402
Polarization	Vertical		
90 Level (dBuV	//m)		

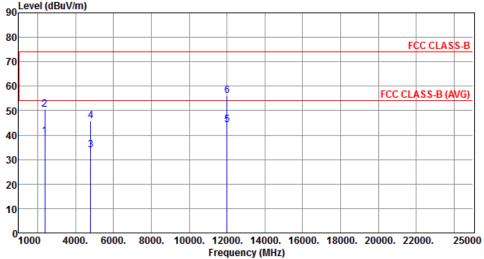

		Emission level		Ū	SA reading		Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		CM	deg
1	2390.00	39.67	54.00	-14.33	42.47	-2.80	Average	100	243
2	2390.00	50.61	74.00	-23.39	53.41	-2.80	Peak	100	243
3	4804.00	33.78	54.00	-20.22	30.25	3.53	Average	100	53
4	4804.00	45.78	74.00	-28.22	42.25	3.53	Peak	100	53
5	12010.00	44.05	54.00	-9.95	30.33	13.72	Average	100	51
6	12010.00	56.14	74.00	-17.86	42.42	13.72	Peak	100	51

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report Version: Rev. 02

Report No.: FR013002



Modulation			BT-L	E (1Mb	os)		Test Fred	q. (MHz)	:	2440	
Polarization			Horiz	zontal							
	90	Level	(dBuV/m)								
	80									FCC CLAS	S-B
	70										
	60								FCC	CLASS-B (A	VG)
	50	1	4 6						100	CLASS-B (A	
	30		l ľ								
	40		5	+ 1							
	30										
	30										
	20										
	10										
	0	1000	4000.	6000. 80	000. 100	100 4200	14000 4	16000 400	00. 20000.	22000	25000
		1000	4000.	0000. 80	JUU. 100		ency (MHz)	10000. 180	00. 20000.	22000.	20000
			Enoa F	miccion	limit	Margin		Factor	Remark	ANT	Turn
			rreq. L	level	LIMITC	Hargi	reading		Kelliark	High	Table
			MHz	dBuV/m	dBuV/	m dB	dBuV	dB		cm	deg
					,						8
	1		2390.00	39.97	54.00	-14.03	42.77	-2.80	Average	100	185
	2		2390.00	50.86	74.00	-23.14	53.66	-2.80	Peak	100	185
	3		2483.50	39.77	54.00	-14.23	42.80	-3.03	Average	100	185
	4		2483.50				53.66	-3.03	Peak	100	185
	5		4880.00				32.90	3.63	Average		198
	6		4880.00				43.63	3.63	Peak	100	198
	7		7320.00				30.47	9.22	Average		202
	8		7320.00	52.00	74.00	-22.00	42.78	9.22	Peak	100	202

\*Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR013002

Page: 79 of 142



70 60 24 8 FCC CLASS- 50 40 30 20 1000 4000. 6000. 8000. 10000. 12000. 14000. 16000. 18000. 20000. 22000. Frequency (MHz)  Freq. Emission Limit Margin SA Factor Remark AN level reading Hi MHz dBuV/m dB dBuV dB cm	LASS-B
80 70 60 40 30 20 1000 4000. 6000. 8000. 10000. 12000. 14000. 16000. 18000. 20000. 22000. Frequency (MHz)  Freq. Emission Limit Margin SA Factor Remark AN level reading Hi MHz dBuV/m dBuV/m dB dBuV dB cm	
80 70 60 40 30 20 1000 4000. 6000. 8000. 10000. 12000. 14000. 16000. 18000. 20000. 22000. Frequency (MHz)  Freq. Emission Limit Margin SA Factor Remark AN level reading Hi MHz dBuV/m dBuV/m dB dBuV dB cm	
FCC CLASS.  50  40  30  20  100  4000. 6000. 8000. 10000. 12000. 14000. 16000. 18000. 20000. 22000. Frequency (MHz)  Freq. Emission Limit Margin SA Factor Remark AN level reading Hi MHz dBuV/m dB dBuV dB cm	
FCC CLASS.  50 40 30 20 1000 4000. 6000. 8000. 10000. 12000. 14000. 16000. 18000. 20000. 22000.  Frequency (MHz)  Freq. Emission Limit Margin SA Factor Remark AN level reading Hi MHz dBuV/m dB dBuV dB cm	
60 40 40 40 40 40 40 4000. 6000. 8000. 10000. 12000. 14000. 16000. 18000. 20000. 22000.  Frequency (MHz)  Freq. Emission Limit Margin SA Factor Remark AN level reading Hi MHz dBuV/m dB dBuV dB cm	B (AVG)
50 40 30 20 1000 4000. 6000. 8000. 10000. 12000. 14000. 16000. 18000. 20000. 22000.  Frequency (MHz)  Freq. Emission Limit Margin SA Factor Remark AN level reading Hi MHz dBuV/m dBuV/m dB dBuV dB cm	B (AVG)
50 40 30 20 1000 4000. 6000. 8000. 10000. 12000. 14000. 16000. 18000. 20000. 22000.  Frequency (MHz)  Freq. Emission Limit Margin SA Factor Remark AN level reading Hi MHz dBuV/m dBuV/m dB dBuV dB cm	B (AVG)
40 30 20 1000 4000. 6000. 8000. 10000. 12000. 14000. 16000. 18000. 20000. 22000.  Frequency (MHz)  Freq. Emission Limit Margin SA Factor Remark AN level reading Hi MHz dBuV/m dB dBuV dB cm	
30 20 1000 4000. 6000. 8000. 10000. 12000. 14000. 16000. 18000. 20000. 22000. Frequency (MHz)  Freq. Emission Limit Margin SA Factor Remark AN level reading Hi MHz dBuV/m dBuV/m dB dBuV dB cm	
20 1000 4000. 6000. 8000. 10000. 12000. 14000. 16000. 18000. 20000. 22000.  Frequency (MHz)  Freq. Emission Limit Margin SA Factor Remark AN level reading Hi  MHz dBuV/m dBuV/m dB dBuV dB cm	
20 1000 4000. 6000. 8000. 10000. 12000. 14000. 16000. 18000. 20000. 22000.  Frequency (MHz)  Freq. Emission Limit Margin SA Factor Remark AN level reading Hi  MHz dBuV/m dBuV/m dB dBuV dB cm	
100 4000. 6000. 8000. 10000. 12000. 14000. 16000. 18000. 20000. 22000.  Frequency (MHz)  Freq. Emission Limit Margin SA Factor Remark AN level reading Hi  MHz dBuV/m dBuV/m dB dBuV dB cm	
0 1000 4000. 6000. 8000. 10000. 12000. 14000. 16000. 18000. 20000. 22000. Frequency (MHz)  Freq. Emission Limit Margin SA Factor Remark AN level reading Hi MHz dBuV/m dBuV/m dB dBuV dB cm	-
0 1000 4000. 6000. 8000. 10000. 12000. 14000. 16000. 18000. 20000. 22000. Frequency (MHz)  Freq. Emission Limit Margin SA Factor Remark AN level reading Hi MHz dBuV/m dBuV/m dB dBuV dB cm	
Freq. Emission Limit Margin SA Factor Remark AN level reading Hi  MHz dBuV/m dBuV/m dB dBuV dB cm	
Freq. Emission Limit Margin SA Factor Remark AN level reading Hi MHz dBuV/m dBuV/m dB dBuV dB cm	25000
level reading Hi  MHz dBuV/m dBuV/m dB dBuV dB cm	
MHz dBuV/m dBuV/m dB dBuV dB cm	Tur
	_
	deg
1 2390.00 39.37 54.00 -14.63 42.17 -2.80 Average 1	00 25
•	90 25
3 2483.50 39.25 54.00 -14.75 42.28 -3.03 Average 1	90 25
0	90 25
	90 5
7 7320.00 39.77 54.00 -14.23 30.55 9.22 Average 1 8 7320.00 51.88 74.00 -22.12 42.66 9.22 Peak 1	90 5 90 5

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR013002

Report Version: Rev. 02

The previous version of the test report has been cancelled and replaced by new version.

Page: 80 of 142



Modulation	BT-L	E (1Mb	os)	1	est Fred	ղ. (MHz)		2480	
Polarization	Horiz	zontal					•		
90 Leve	el (dBuV/m)								
80									
80								FCC CLAS	S-B
70									
60									
00	2	6					FCC	CLASS-B (A	VG)
50	4								
40	1	5							
40	3								
30									
20									
20									
10									
0									
1000	4000.	6000. 80	000. 100		. 14000. 1 ncy (MHz)	6000. 180	00. 20000.	22000.	25000
	Freq. E	mission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	•	level			reading			High	Table
	MHz	dBuV/m	dBuV/ı	n dB	dBuV	dB		cm	deg
	2402.50	40.00	<u></u>	42.76	43.30				
1 2	2483.50				43.32	-3.03	Average		204 204
3	2483.50 4960.00			-22.78	54.25 30.69	-3.03 3.83	Peak Average	100 100	204
4	4960.00				43.58	3.83	Peak	100	207
	+500.00	-T/ . TI		-14.02	45.50	9.21	Average		200

42.88

9.21

Peak

100

200

Page: 81 of 142

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

7440.00 52.09 74.00 -21.91

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report Version: Rev. 02

Report No.: FR013002



Modulation	BT-L	E (1Mbp	os)	-	Test Fred	ą. (MHz)	2	2480				
Polarization	Vertical											
l evel	(dBuV/m)											
90	(dDd v/iii)											
80												
								FCC CLAS	S-B			
70												
60							500	CL A CC D //	1401			
50	2	6					FCC	CLASS-B (A	WG)			
50	4											
40	1 +	- 5							-			
30												
30												
20												
10												
01000	4000.	6000. 80	00. 100		. 14000. 1 ncy (MHz)	6000. 180	00. 20000.	22000.	25000			
	Freg. F	mission	limit	Margin	SΔ	Factor	Remark	ANT	Turn			
		level	2220	1101 6211	reading		ricinal ic	High	Table			
	MHz	dBuV/m	dBuV/r	n dB	dBuV	dB		cm	deg			
1	2483.50	39.84	54.00	-14.16	42.87	-3.03	Average	100	250			
2	2483.50	50.74	74.00	-23.26	53.77	-3.03	Peak	100	250			
3	4960.00				30.65	3.83	Average		57			
4	4960.00	46.30	74.00	-27.70	42.47	3.83	Peak	100	57			

9.21

9.21

Average

Peak

100

100

59

59

Page: 82 of 142

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

7440.00 39.90 54.00 -14.10 30.69

7440.00 52.83 74.00 -21.17 43.62

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR013002

Report Version: Rev. 02



2

3

4

5

6

Modulation	ВТ	-LE (2Mb <sub>l</sub>	os)	,	Test Fred	q. (MHz)	2	402	
Polarization	Но	rizontal		•			•		
90 Le	vel (dBuV/m)								
80									
70								FCC CLAS	SS-B
70									
60				6			FCC C	LASS-B (A	WG)
50	2								-
40	1								
30-	1	3							
20									
10									
0									
-10	00 4000.	6000. 80	00. 100		). 14000. 1 ency (MHz)	16000. 1800	00. 20000. 2	22000.	25000
	Freq.	Emission	Limit	Margir	s SA	Factor	Remark	ANT	Turn
		level			reading			High	Tabl
	MHz	dBuV/m	dBuV/r	n dB	dBuV	dB		cm	deg
1	2390.0	40.18	54.00	-13.82	42.98	-2.80	Average	100	195
_									

-2.80

3.53

3.53

13.72

13.72

30.68

42.66

30.58

Peak

Peak

Peak

Average

Average

100

100

100

100

100

195

206

206

207

207

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB) \*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR013002 Page: 83 of 142

2390.00 51.16 74.00 -22.84 53.96

12010.00 56.28 74.00 -17.72 42.56

4804.00 34.21 54.00 -19.79

4804.00 46.19 74.00 -27.81

12010.00 44.30 54.00 -9.70

Report Version: Rev. 02



Modulation			E	3T-L	E (2Mb <sub>l</sub>	os)		Test	Freq	. (MHz)		24	02	
Polarization			١	/erti	cal			•				•		
	90 <mark>1</mark>	Level	(dBuV/r	n)										
	80													
												F	CC CLAS	S-B
	70													
	60						6					ECC CL	ASS-B (A	MGY
	50	2	2	_								rcc cL	H 3 3 - D (F	voj
		-   -		1			•							
	40			3										
	30													
	20													
	40													
	10													
	0	1000	400	0.	6000. 80	000. 100	00. 120	00. 1400	00. 16	6000. 180	00. 200	00. 22	000.	25000
							Freq	uency (M	Hz)					
			Fre	q. E	mission	Limit	Marg:			Factor	Rema	rk	ANT	Turn
			МН	-	level	AD.A.I.I.	" dD	read dBu		dB			High	Table
			MIT	_	dBuV/m	ubuv/i	п ив	ubu	v	ub			CM	deg
1			2390	.00	39.43	54.00	-14.5	7 42.	23	-2.80	Aver	age	100	247
2					50.64					-2.80	Peak		100	247
3			4804	.00	33.78	54.00	-20.2	2 30.	25	3.53	Aver	age	100	51

3.53

13.72

13.72

Peak

Peak

Average

100

100

100

51

59

59

Page: 84 of 142

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

4804.00 45.78 74.00 -28.22 42.25 12010.00 44.12 54.00 -9.88 30.40 12010.00 56.19 74.00 -17.81 42.47

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR013002

4

5

Report Version: Rev. 02



Modulation			BT-I	_E (2Mb	ops)		Test Fred	q. (MHz)	2	2440	
Polarization			Hori	zontal		'			•		
	90Lev	el (dB	BuV/m)								
	00										
	80									FCC CLAS	S-B
	70	+									
	60										
	" <u>L</u>	21							FCC (	CLASS-B (A	(VG)
	50	Ħ	6								
	40	13	$\perp$	- 7							
			5								
	30										
	20										
	10										
	10										
	100	00	4000.	6000.	3000. 100		0. 14000. 1 ency (MHz)	16000. 180	00. 20000.	22000.	25000
			Fred	Fmissio	n Limit	_		Factor	Remark	ANT	Turn
			сч.	level		, Idi Bili	reading			High	Table
			MHz	dBuV/m	dBuV/ı	n dB	dBuV	dB		cm	deg
_		-	200.05			44.05	40.55				401
1 2				39.78	54.00 74.00	-14.22	42.58 53.63	-2.80 -2.80	Average Peak	100 100	191 191
3					54.00		42.55	-2.80	Average		191
4					74.00		53.55	-3.03	Peak	100	191
5					54.00			3.63	Average		201
6					74.00			3.63	Peak	100	201
7					54.00			9.22	Average		205
8		7.	320.00	51.91	74.00	-22.09	42.69	9.22	Peak	100	205

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR013002

Report Version: Rev. 02

The previous version of the test report has been cancelled and replaced by new version.

Page: 85 of 142



Modulation			BT-	LE (2Mb	ps)	-	Test Fred	q. (MHz)	24	440	
Polarization			Ver	tical					<u>.</u>		
			l l								
	90	Level	(dBuV/m)								
	90										
	80									FCC CLAS	e D
	70									FCC CLAS	5-В
	70										
	60								FCC C	LASS-B (A	V(C)
		12	4	- 8					FCCC	LA 3 3 - B (A	(VG)
	50		6								
	40			- 7							
	30										
	20										
	10										
	0	4000	4000	2000	000 400	100 4000	44000 4	0000 400	00 00000 0	2000	25000
		1000	4000.	6000. 8	000. 100		. 14000. 1 ency (MHz)	6000. 180	00. 20000. 2	2000.	25000
			Freq.	Emissio	n Limit	Margin	SA	Factor	Remark	ANT	Turn
				level			reading			High	Table
			MHz	dBuV/m	dBuV/	m dB	dBuV	dB		cm	deg
	1		2390.00	39.77	54 00	-14.23	42.57	-2.80	Average	100	247
						-23.58	53.22	-2.80	Peak	100	247
	2					23.30			Average	100	247
	2			39.44	54.00	-14.56	42.47	-3.03			
			2483.50				42.47 53.36	-3.03 -3.03	Peak	100	247
	3		2483.50 2483.50	39.44	74.00	-23.67			_		247 51
	3 4		2483.50 2483.50 4880.00	39.44 50.33	74.00 54.00	-23.67 -19.92	53.36	-3.03	Peak	100	
	3 4 5		2483.50 2483.50 4880.00 4880.00	39.44 50.33 34.08	74.00 54.00 74.00	-23.67 -19.92	53.36 30.45	-3.03 3.63	Peak Average	100 100	51

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR013002

Page: 86 of 142

Report Version: Rev. 02



Modulation			BT-L	E (2Mb	ps)		Test Fre	q. (MHz)	2	2480	
Polarization			Hori	zontal					•		
	90 Le	evel (d	dBuV/m)								
	80										
	80									FCC CLAS	S-B
	70	_									
	60										
	00			6					FCC (	CLASS-B (A	WG)
	50	ΗŦ	4								
	40	1		5							
			3								
	30										
	20										
	10										
	0	000	4000.	6000. 8	000 400	00 4200	0 44000	46000 400	00. 20000.	22000	25000
	10	000	4000.	0000. 0	000. 100		ency (MHz)	10000. 160	00. 20000.	22000.	25000
			Freq. E	mission	n Limit	Margin	n SA	Factor	Remark	ANT	Turn
				level			reading	-		High	Table
			MHz	dBuV/m	dBuV/	m dB	dBuV	dB		cm	deg
1			2483.50	/1 E1	E4 00	-12.49	44.54	-3.03	Avanaga	100	187
_	L <u>)</u>		2483.50			-12.49	54.66	-3.03	Average Peak	100	187
	3		4960.00					3.83	Average		205
	1		4960.00					3.83	Peak	100	205
	5		7440.00	39.90	54.00	-14.10	30.69	9.21	Average	100	207
	_								_		

9.21

Peak

100

207

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

7440.00 51.82 74.00 -22.18 42.61

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR013002

Report Version: Rev. 02



2

3

4

5

6

Modulation	BT-LE (2Mbp	s)	Гest Freq. (MHz)	24	480
Polarization	Vertical				
90 Level (	dBuV/m)				
80					
70					FCC CLASS-B
70					
60				FCC CI	LASS-B (AVG)
50	4				
40	5				
30	3				
20					
10					
0	4000 0000 000	10000 4000	44000 40000 400	20000	2000
1000	4000. 6000. 800		. 14000. 16000. 180 ncy (MHz)	JUU. 20000. Z	2000. 2500
	Freq. Emission	Limit Margin		Remark	ANT Tur
	level	10.144 15	reading		High Tab
	MHz dBuV/m	dBuV/m dB	dBuV dB		cm deg
1	2483.50 40.82	54.00 -13.18	43.85 -3.03	Average	100 25

-3.03

42.63

30.28

3.83

3.83

9.21

9.21

Peak

Peak

Peak

Average

Average

253

58

58

49

49

Page: 88 of 142

100

100

100

100

100

2483.50 50.62 74.00 -23.38 53.65

4960.00 34.09 54.00 -19.91 30.26

7440.00 51.61 74.00 -22.39 42.40

4960.00 46.46 74.00 -27.54

7440.00 39.49 54.00 -14.51

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB) \*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR013002

Report Version: Rev. 02




## 3.5.10 Transmitter Conducted Unwanted Emissions (Below 1 GHz)

	Modulation Mode		BT LE-1Mbps		Frequ	iency	2480MHz		
	Range (MHz)	Max Value chain0 (dBm)	DG (dBi)	GRF (dB)	EIRP (dBm)	E-Field (dBuV/m)	Min E-Field Limit (dBuV/m)	E-Field Margin (dB)	
30	0~1000	-70.24	2.00	4.70	-63.54	31.72	40.00	-8.28	

Modulati	Modulation Mode		BT LE-2Mbps		iency	2480MHz		
Range (MHz)	Max Value chain0 (dBm)	DG (dBi)	GRF (dB)	EIRP (dBm)	E-Field (dBuV/m)	Min E-Field Limit (dBuV/m)	E-Field Margin (dB)	
30~1000	-70.94	2.00	4.70	-64.24	31.02	40.00	-8.98	

### Note:

- 1. GRF = Ground Reflection Factor.
- 2. DG = Directional Gain.
- 3. Worst case of emission limit below 1GHz is selected to be limit.

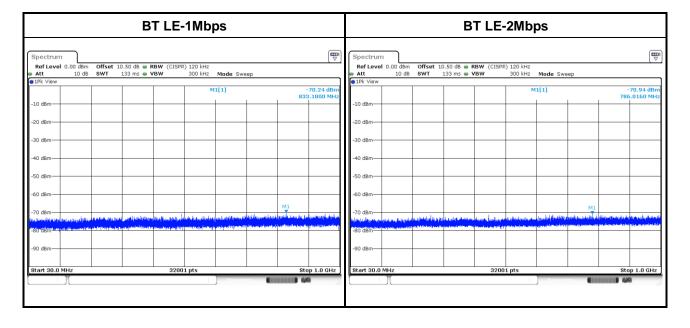



# 3.5.11 Transmitter Conducted Unwanted Emissions (Above 1GHz) in Band Edge

	Transmit	ter Conduc	ted Unwan	ted Emissi	ons Result	s in Band E	dge	
Modulation	Mode	BT LE-1Mb	ps					
Test ch. Freq. (MHz)	Range (MHz)	Max Value chain0 (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)	Remark
	2310~2390	-48.25	2.00	-46.25	49.01	74.00	-24.99	PK
2402	2310~2390	-55.17	2.00	-53.17	42.09	54.00	-11.91	AV
2402	2483.5~2690	-49.27	2.00	-47.27	47.99	74.00	-26.01	PK
	2483.5~2690	-57.81	2.00	-55.81	39.45	54.00	-14.55	AV
	2310~2390	-48.25	2.00	-46.25	49.01	74.00	-24.99	PK
2440	2310~2390	-58.49	2.00	-56.49	38.77	54.00	-15.23	AV
2440	2483.5~2500	-47.94	2.00	-45.94	49.32	74.00	-24.68	PK
	2483.5~2500	-55.78	2.00	-53.78	41.48	54.00	-12.52	AV
	2310~2390	-49.85	2.00	-47.85	47.41	74.00	-26.59	PK
2480	2310~2390	-58.23	2.00	-56.23	39.03	54.00	-14.97	AV
2400	2483.5~2690	-36.92	2.00	-34.92	60.34	74.00	-13.66	PK
	2483.5~2690	-53.96	2.00	-51.96	43.30	54.00	-10.70	AV


Note: DG = Directional Gain.

Report No.: FR013002

Page: 90 of 142

Report Version: Rev. 02



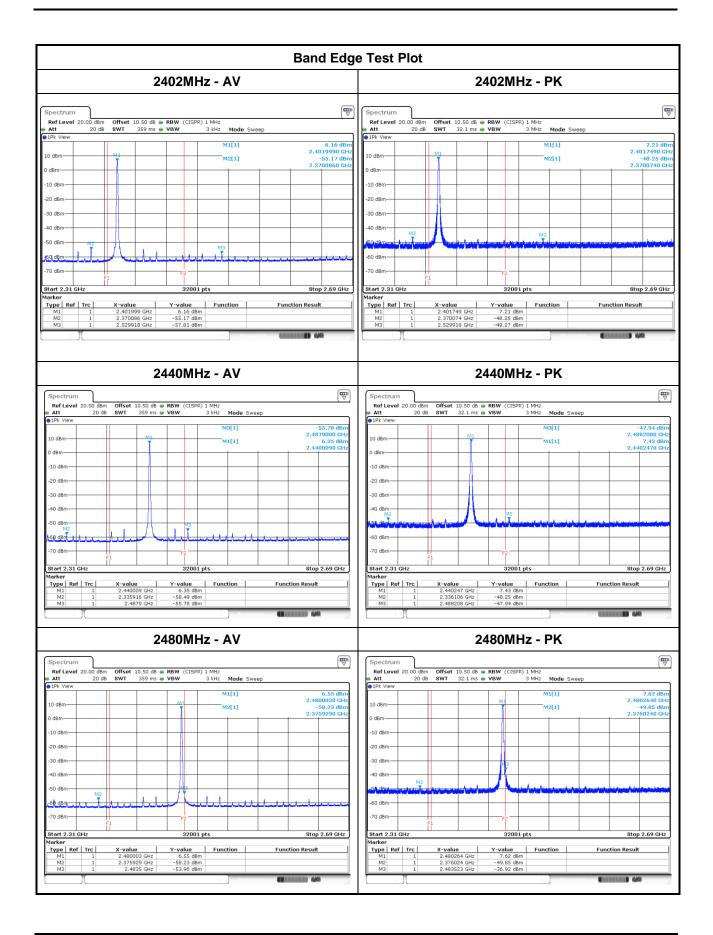

Report No.: FR013002


Report Version: Rev. 02



	Transmit	ter Conduc	ted Unwan	ted Emissi	ons Result	s in Band E	dge	
Modulation	Mode	BT LE-2Mb	ps					
Test ch. Freq. (MHz)	Range (MHz)	Max Value chain0 (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)	Remark
	2310~2390	-47.61	2.00	-45.61	49.65	74.00	-24.35	PK
2402	2310~2390	-55.80	2.00	-53.80	41.46	54.00	-12.54	AV
2402	2483.5~2500	-47.44	2.00	-45.44	49.82	74.00	-24.18	PK
	2483.5~2500	-57.87	2.00	-55.87	39.39	54.00	-14.61	AV
	2310~2390	-49.22	2.00	-47.22	48.04	74.00	-25.96	PK
2440	2310~2390	-59.09	2.00	-57.09	38.17	54.00	-15.83	AV
2440	2483.5~2500	-47.25	2.00	-45.25	50.01	74.00	-23.99	PK
	2483.5~2500	-56.89	2.00	-54.89	40.37	54.00	-13.63	AV
	2310~2390	-49.90	2.00	-47.90	47.36	74.00	-26.64	PK
2480	2310~2390	-59.27	2.00	-57.27	37.99	54.00	-16.01	AV
2400	2483.5~2690	-38.26	2.00	-36.26	59.00	74.00	-15.00	PK
	2483.5~2690	-50.53	2.00	-48.53	46.73	54.00	-7.27	AV

Note: DG = Directional Gain.



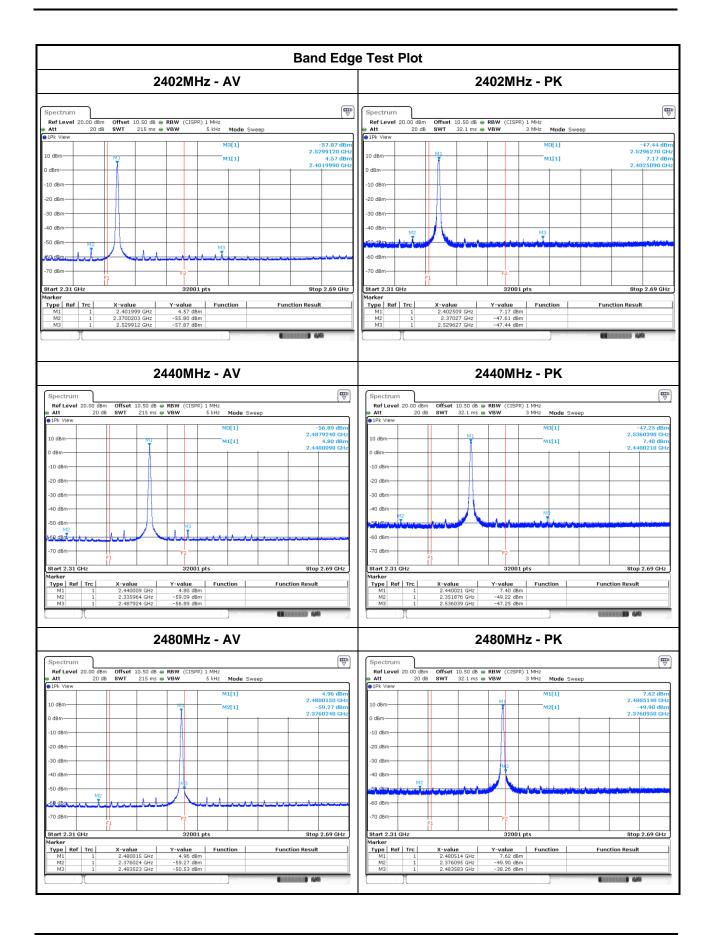

Report No.: FR013002

Report Version: Rev. 02



Trai	Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band										
Modulati	on Mode	BT LE-1Mbps		Frequency		2402MHz					
Freq. (MHz)	Remark	Max Value chain0 (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBm)	E-Field Margin (dB)				
4804.00	PK	-46.21	2.00	-44.21	51.05	74.00	-22.95				
12010.00	PK	-49.72	2.00	-47.72	47.54	74.00	-26.46				

Trai	Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band										
<b>Modulation Mode</b>		BT LE-1Mbps		Frequency		2440MHz					
Freq. (MHz)	Remark	Max Value chain0 (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBm)	E-Field Margin (dB)				
4880.00	PK	-48.77	2.00	-46.77	48.49	74.00	-25.51				
7320.00	PK	-53.19	2.00	-51.19	44.07	74.00	-29.93				
12200.00	PK	-51.11	2.00	-49.11	46.15	74.00	-27.85				

Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band										
Modulati	on Mode	BT LE-1Mbp	s	Frequency		2480MHz				
Freq. (MHz)	Remark	Max Value chain0 (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBm)	E-Field Margin (dB)			
4960.00	PK	-51.19	2.00	-49.19	46.07	74.00	-27.93			
7440.00	PK	-54.10	2.00	-52.10	43.16	74.00	-30.84			
12400.00	PK	-52.58	2.00	-50.58	44.68	74.00	-29.32			


Page: 94 of 142

- Note:
  1. If the PK margin greater than 20 dB, there is no need to get AVG reading.
  2. DG = Directional Gain.

Report No.: FR013002

Report Version: Rev. 02




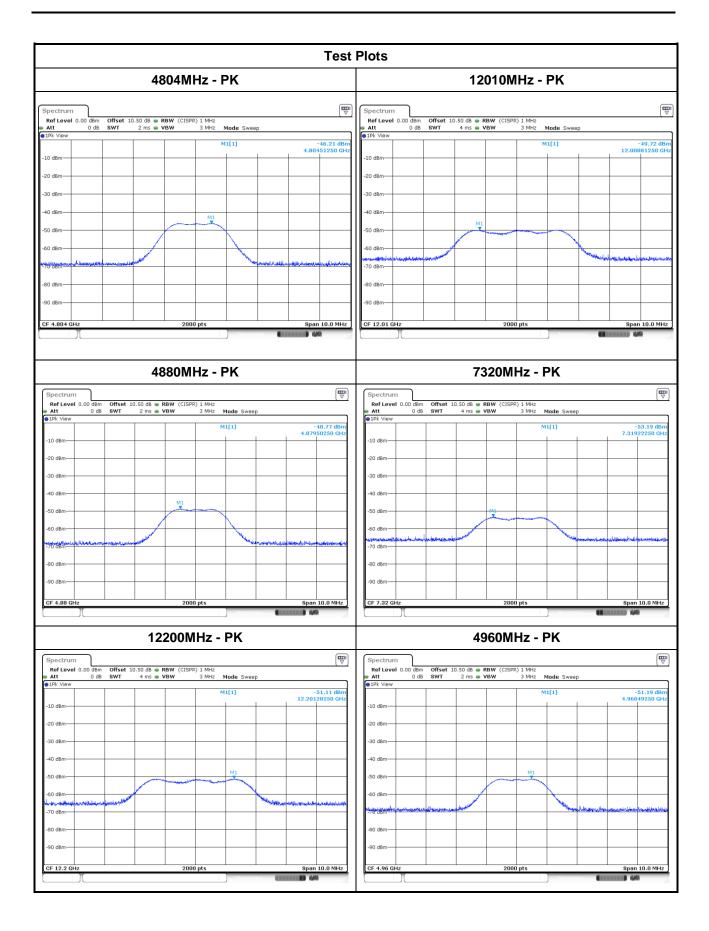

Report No.: FR013002 Page: 95 of 142

Report Version: Rev. 02



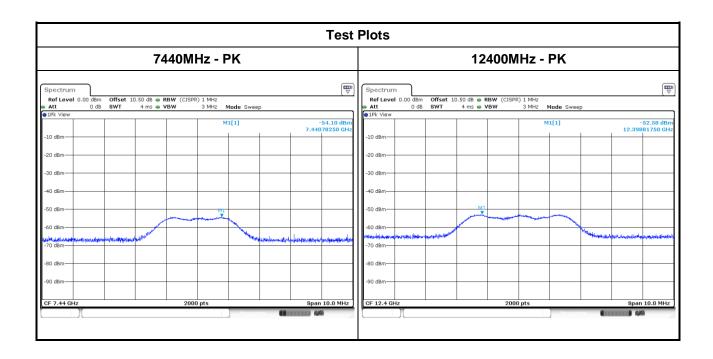



Trai	Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band										
Modulati	on Mode	BT LE-2Mbps		Frequency		2402MHz					
Freq. (MHz)	Remark	Max Value chain0 (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBm)	E-Field Margin (dB)				
4804.00	PK	-46.29	2.00	-44.29	50.97	74.00	-23.03				
12010.00	PK	-50.00	2.00	-48.00	47.26	74.00	-26.74				

Trai	Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band										
Modulati	on Mode	BT LE-2Mbp	s	Frequency		2440MHz					
Freq. (MHz)	Remark	Max Value chain0 (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBm)	E-Field Margin (dB)				
4880.00	PK	-48.99	2.00	-46.99	48.27	74.00	-25.73				
7320.00	PK	-53.94	2.00	-51.94	43.32	74.00	-30.68				
12200.00	PK	-51.25	2.00	-49.25	46.01	74.00	-27.99				


Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band							
Modulation Mode		BT LE-2Mbps		Frequency		2480MHz	
Freq. (MHz)	Remark	Max Value chain0 (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBm)	E-Field Margin (dB)
4960.00	PK	-51.43	2.00	-49.43	45.83	74.00	-28.17
7440.00	PK	-54.51	2.00	-52.51	42.75	74.00	-31.25
12400.00	PK	-52.45	2.00	-50.45	44.81	74.00	-29.19

Report No.: FR013002 Page: 97 of 142

Report Version: Rev. 02

If the PK margin greater than 20 dB, there is no need to get AVG reading.
 DG = Directional Gain.




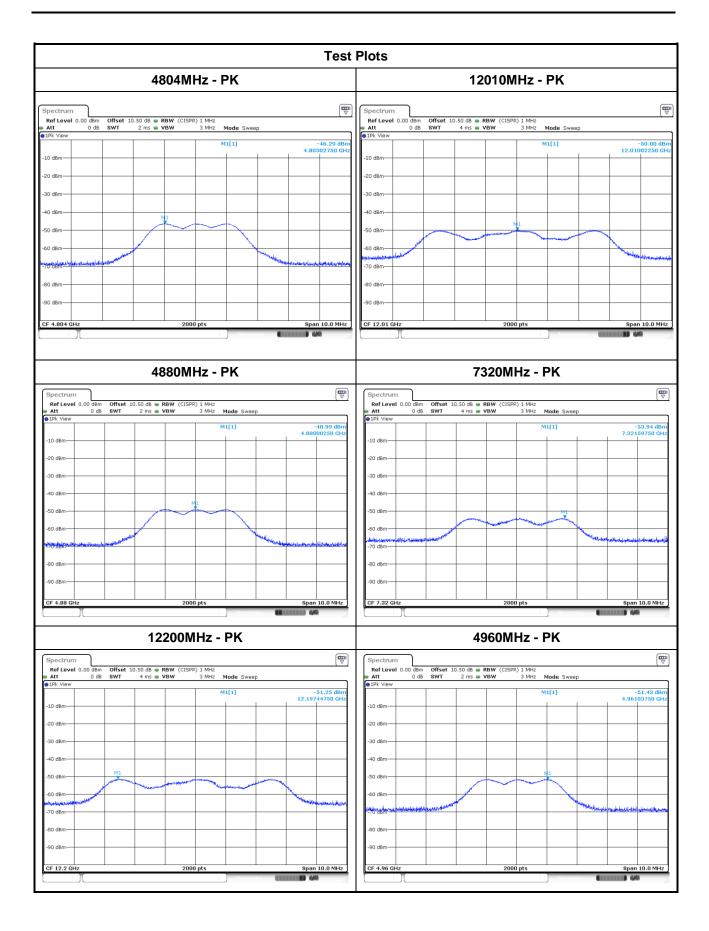


Report No.: FR013002 Page: 98 of 142

Report Version: Rev. 02



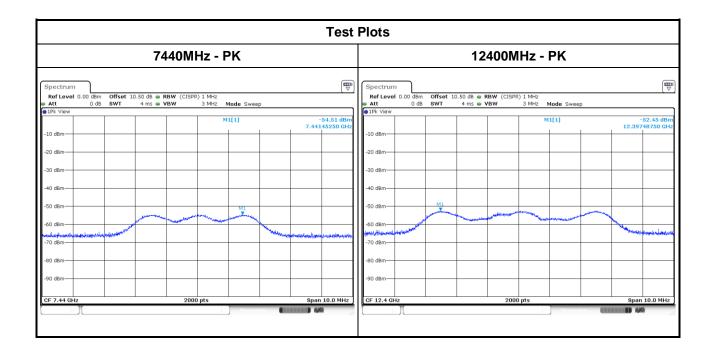



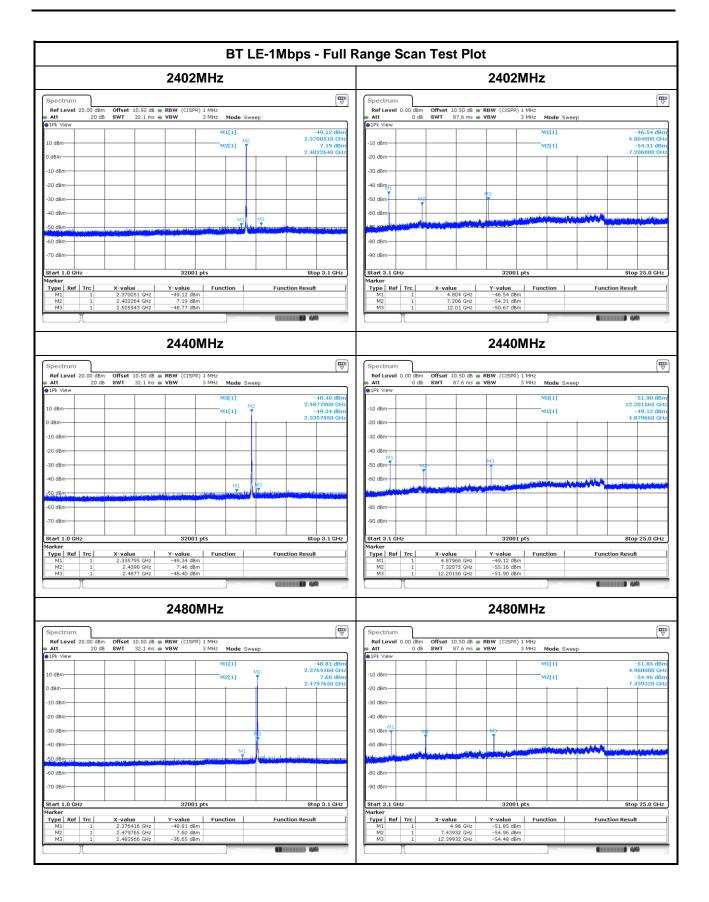

Report No.: FR013002 Page: 100 of 142

Report Version: Rev. 02