


Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

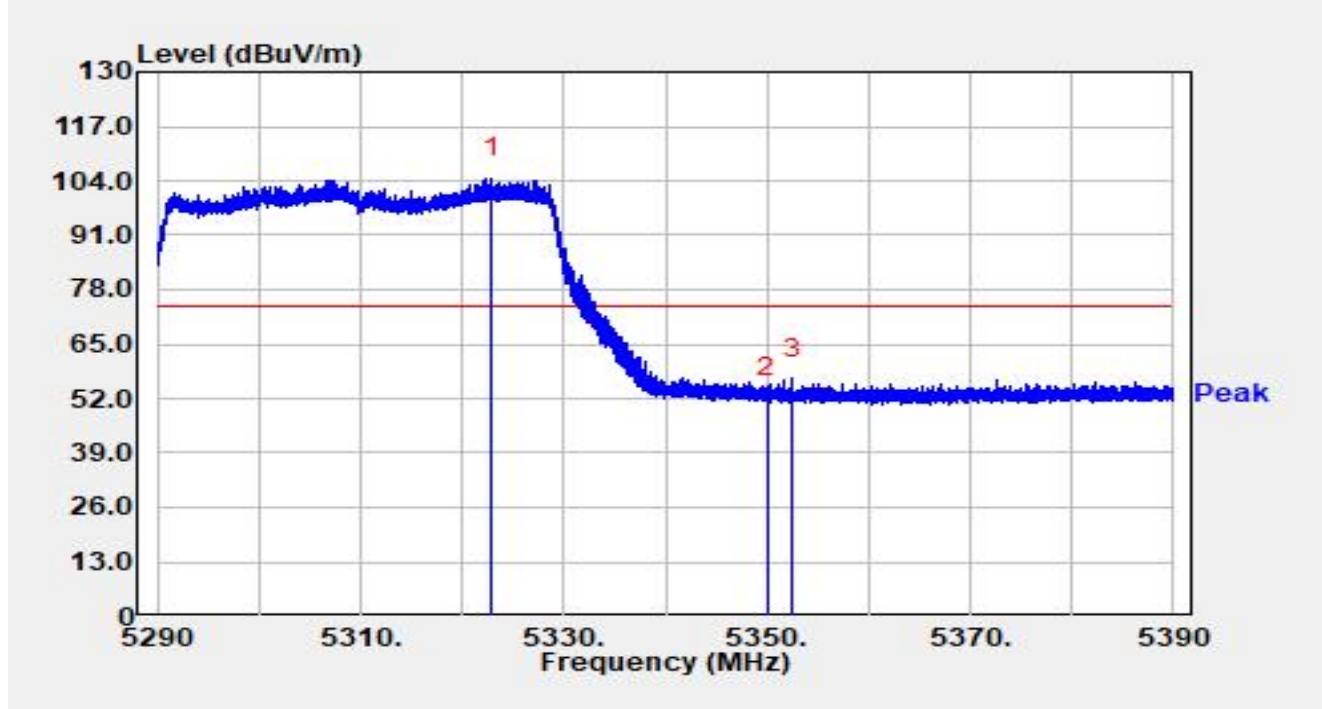


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5322.960	84.78	19.79	104.57	N/A	N/A	Peak
2		5350.000	32.83	19.40	52.23	-21.77	74.00	Peak
3	*	5352.530	37.32	19.35	56.67	-17.33	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

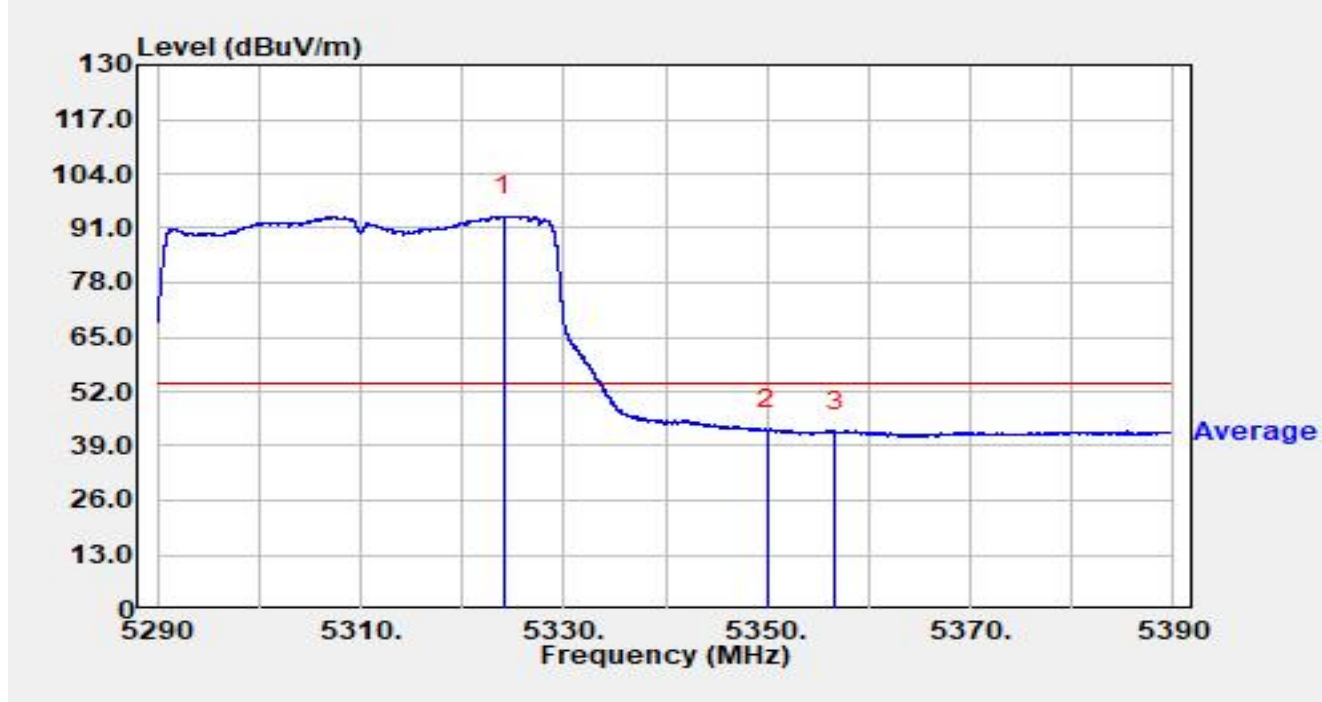


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5324.040	74.09	19.80	93.88	N/A	N/A	Average
2	*	5350.000	23.42	19.40	42.82	-11.18	54.00	Average
3		5356.680	23.27	19.34	42.61	-11.39	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

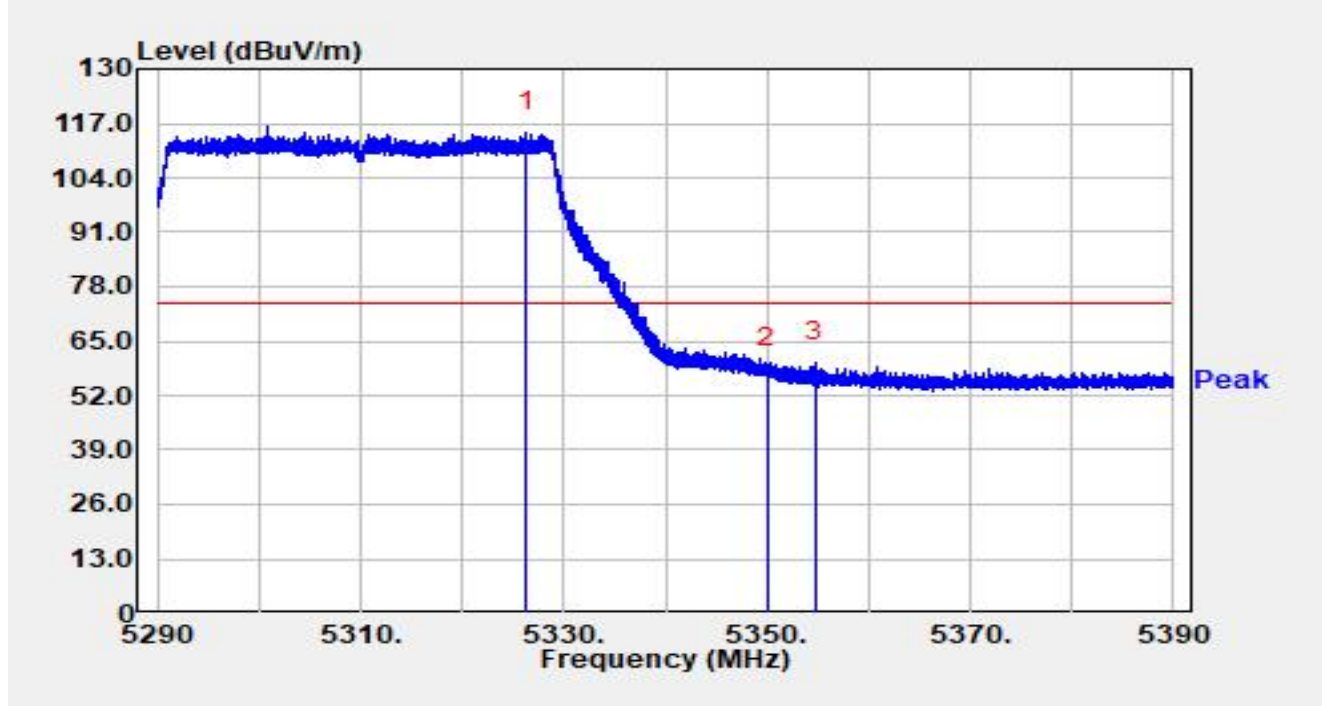


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5326.250	95.04	19.81	114.85	N/A	N/A	Peak
2		5350.000	39.29	19.40	58.69	-15.31	74.00	Peak
3	*	5354.710	40.73	19.34	60.07	-13.93	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

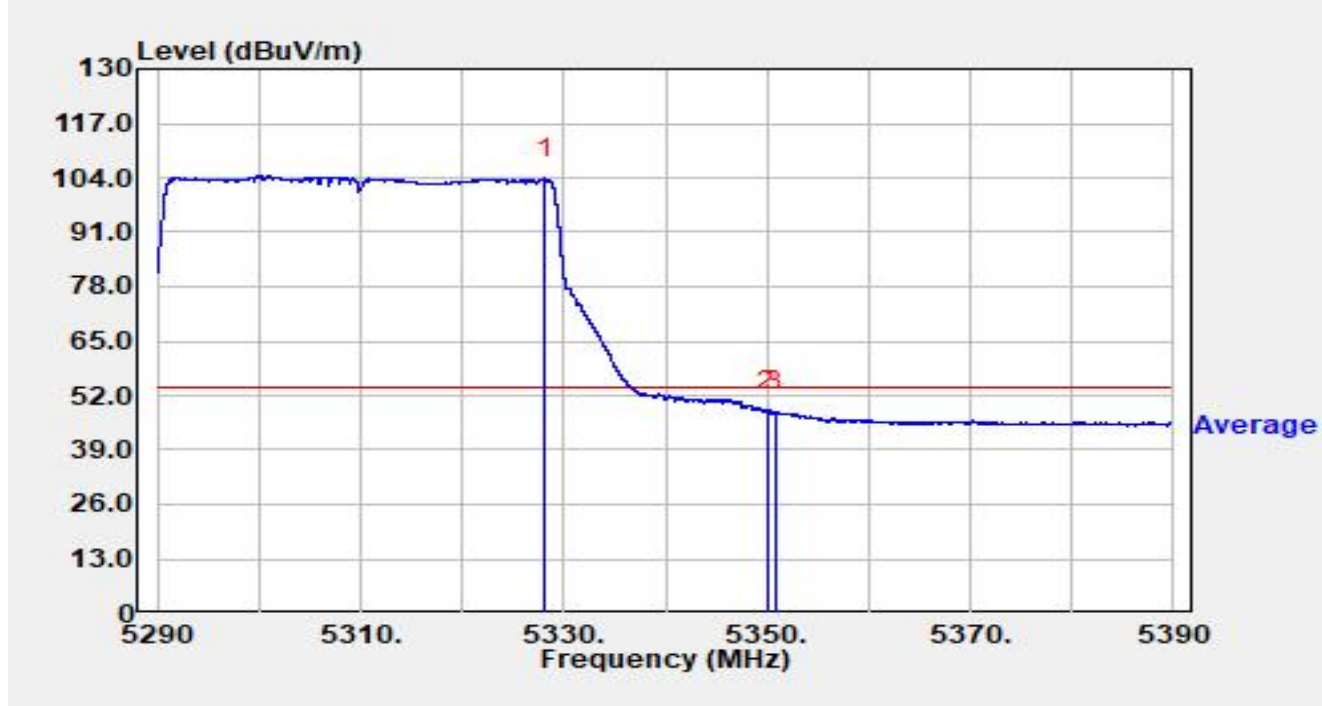


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5328.140	84.00	19.82	103.82	N/A	N/A	Average
2	*	5350.000	28.99	19.40	48.39	-5.61	54.00	Average
3		5350.870	28.83	19.38	48.21	-5.79	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

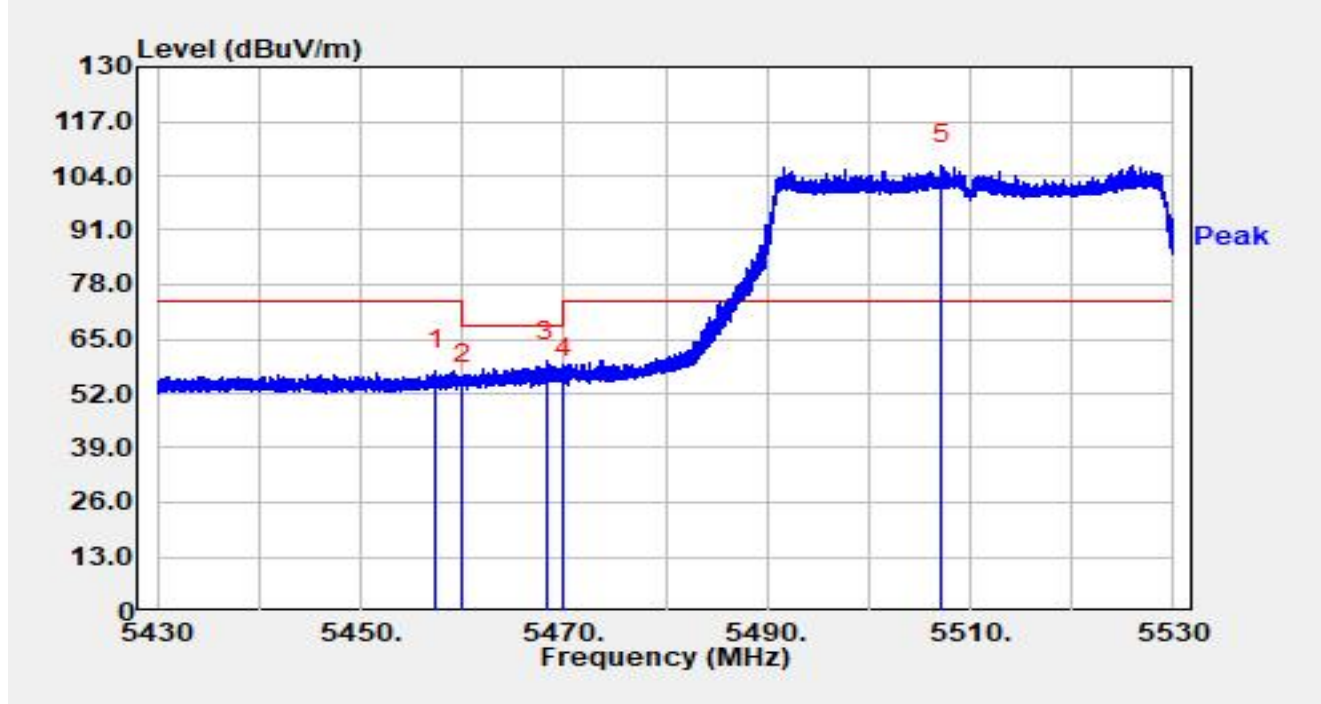


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.380	37.78	19.70	57.47	-16.53	74.00	Peak
2		5460.000	34.46	19.74	54.20	-14.00	68.20	Peak
3	*	5468.280	39.87	19.89	59.76	-8.44	68.20	Peak
4		5470.000	35.90	19.92	55.82	-12.38	68.20	Peak
5		5507.210	86.89	19.63	106.52	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

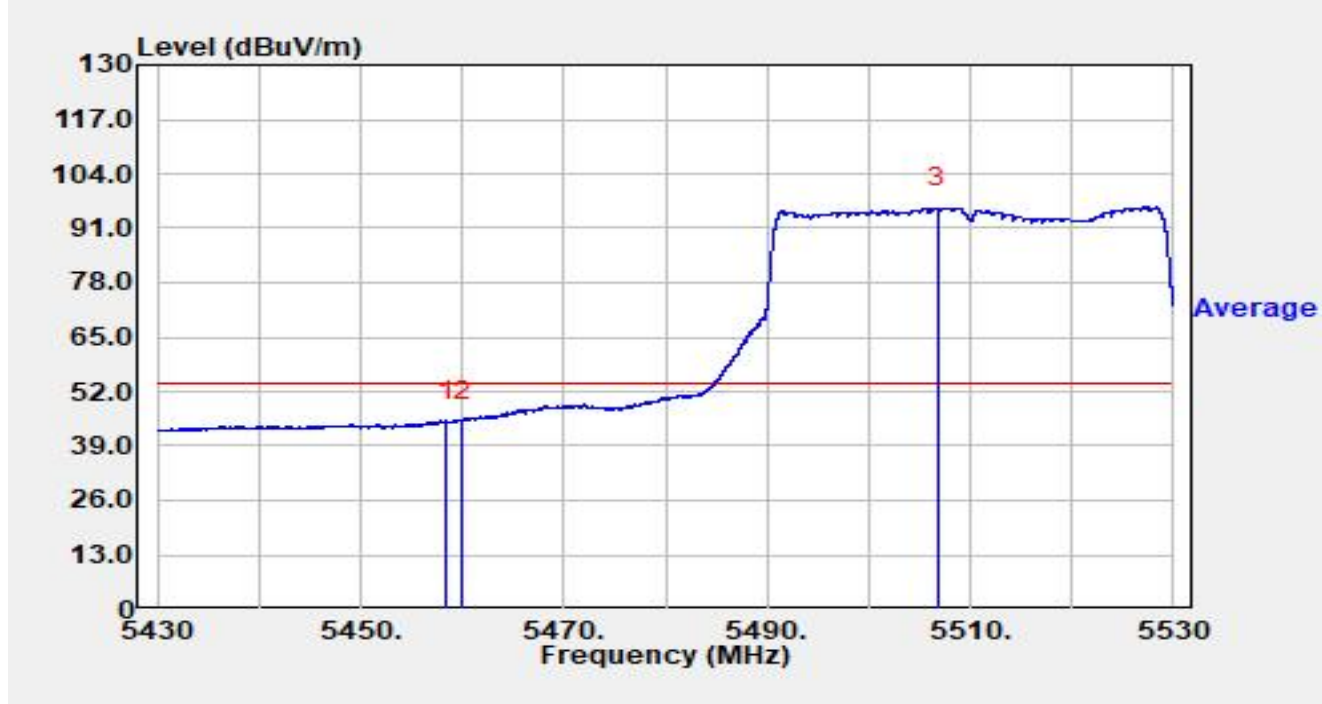


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.450	25.26	19.71	44.98	-9.02	54.00	Average
2	*	5460.000	25.29	19.74	45.04	-8.96	54.00	Average
3		5506.780	76.16	19.64	95.79	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

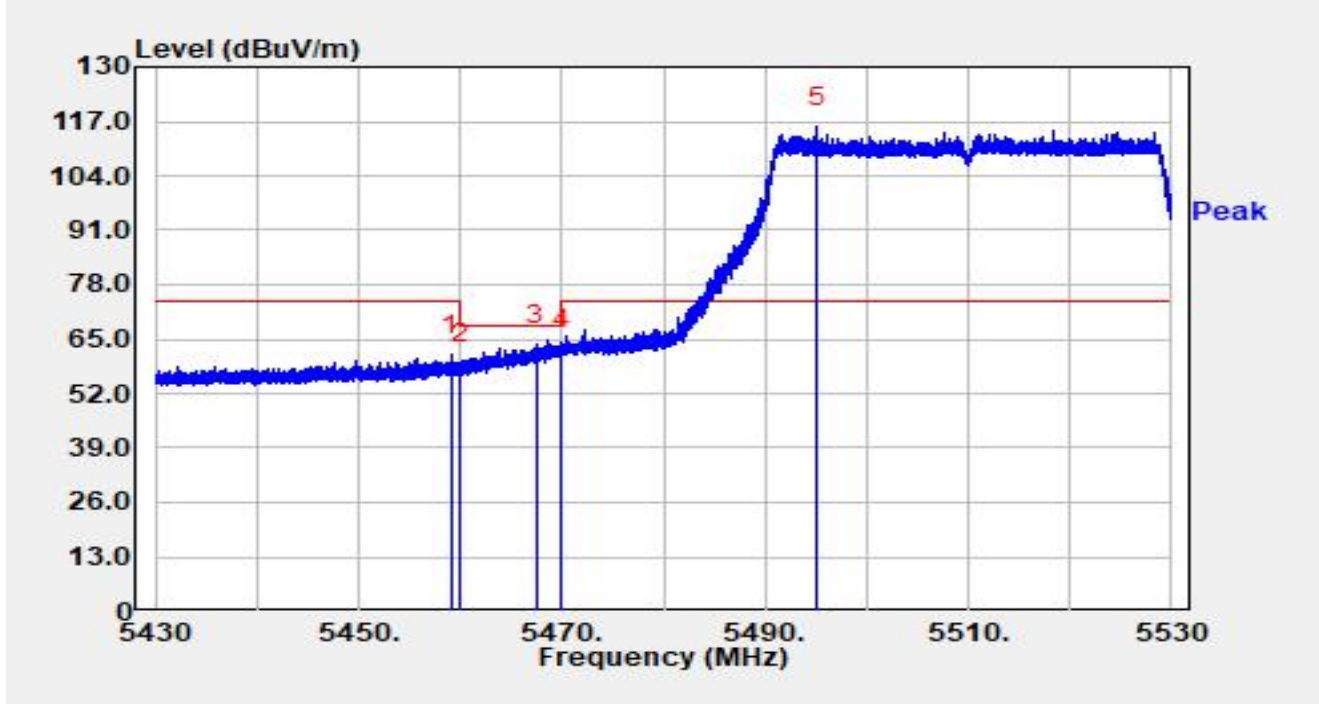


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.090	41.52	19.73	61.24	-12.76	74.00	Peak
2		5460.000	39.15	19.74	58.89	-9.31	68.20	Peak
3	*	5467.470	43.68	19.88	63.56	-4.64	68.20	Peak
4		5470.000	42.46	19.92	62.39	-5.81	68.20	Peak
5		5495.140	95.79	19.79	115.58	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

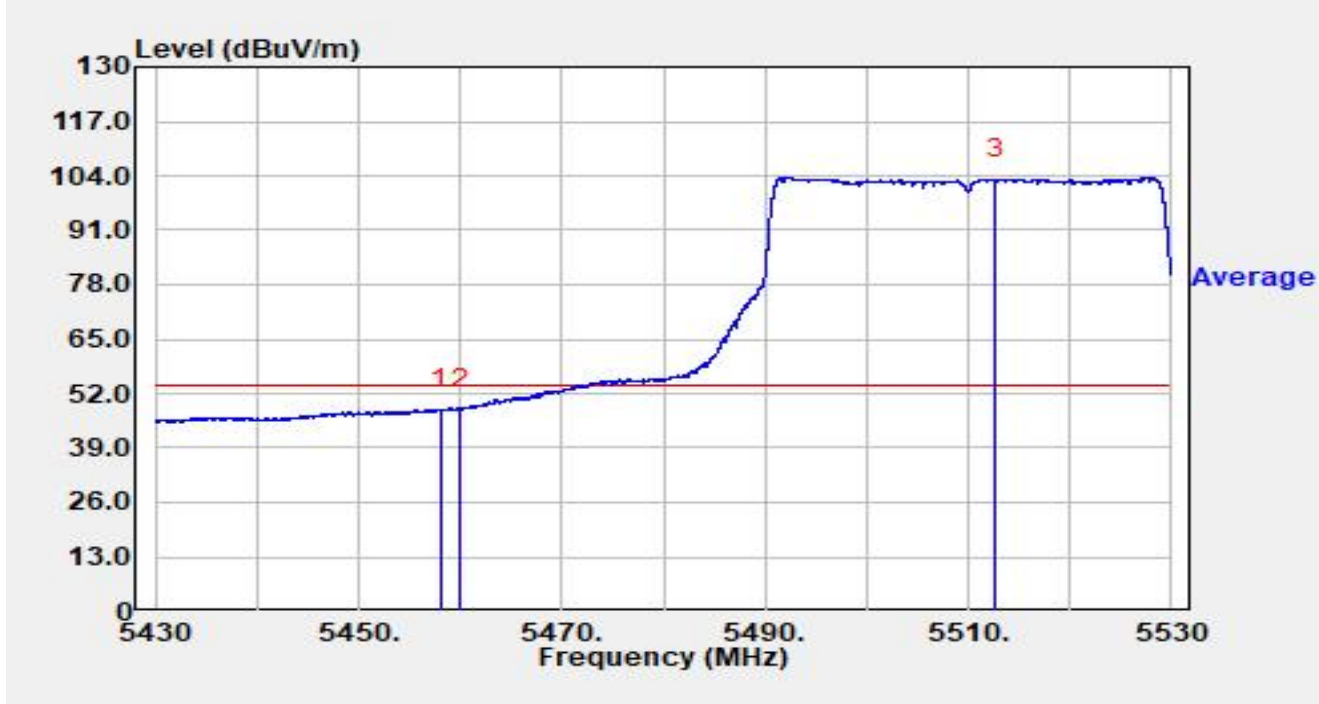


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.120	28.45	19.71	48.15	-5.85	54.00	Average
2	*	5460.000	28.55	19.74	48.30	-5.70	54.00	Average
3		5512.620	83.49	19.57	103.06	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5670MHz		

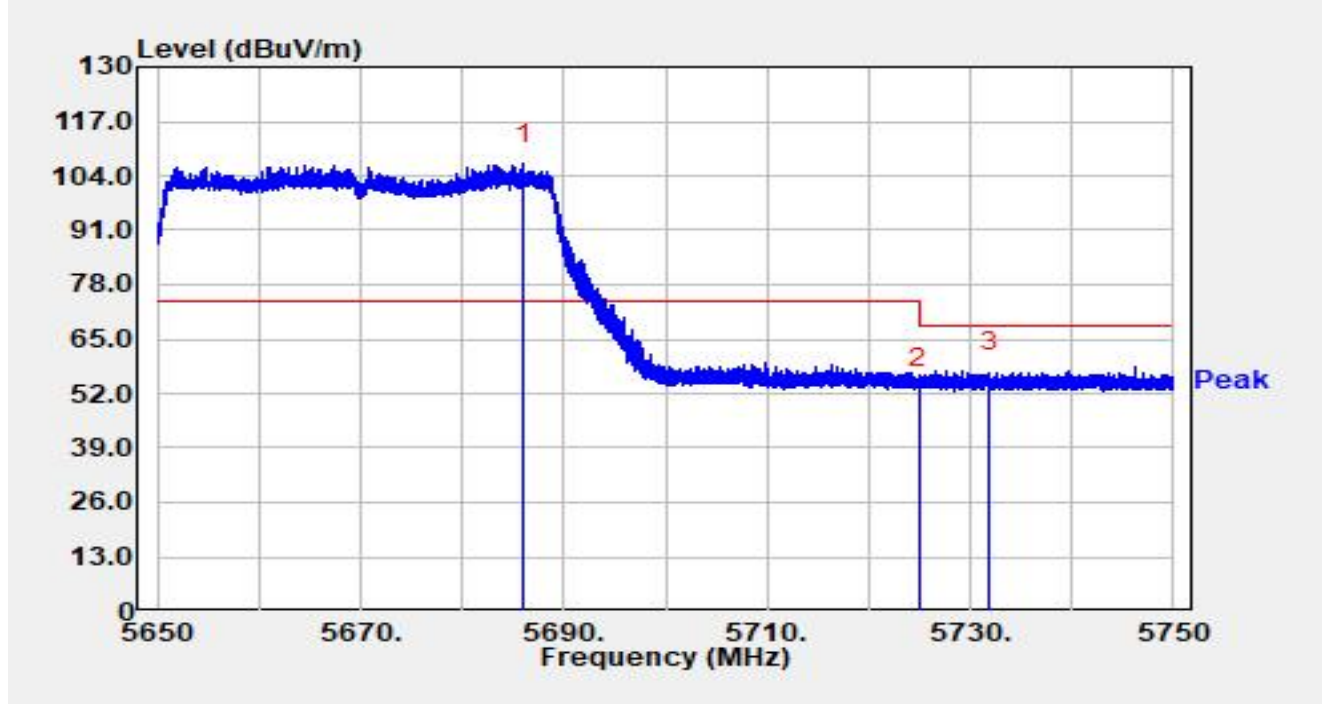


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5686.080	86.06	20.73	106.79	N/A	N/A	Peak
2		5725.000	32.16	21.24	53.40	-14.80	68.20	Peak
3	*	5731.890	35.84	21.19	57.02	-11.18	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5670MHz		

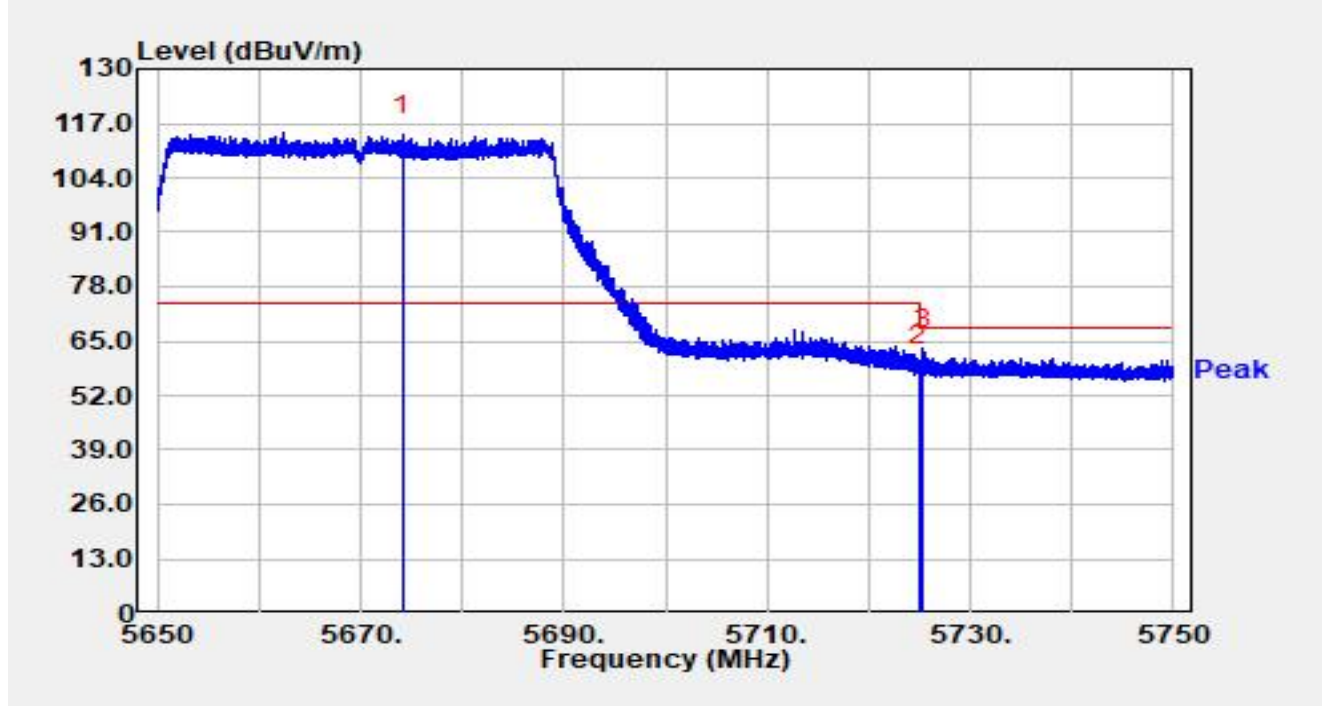


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5674.070	93.59	20.53	114.12	N/A	N/A	Peak
2		5725.000	38.04	21.24	59.28	-8.92	68.20	Peak
3	*	5725.310	41.80	21.24	63.04	-5.16	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5.8G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5755MHz		

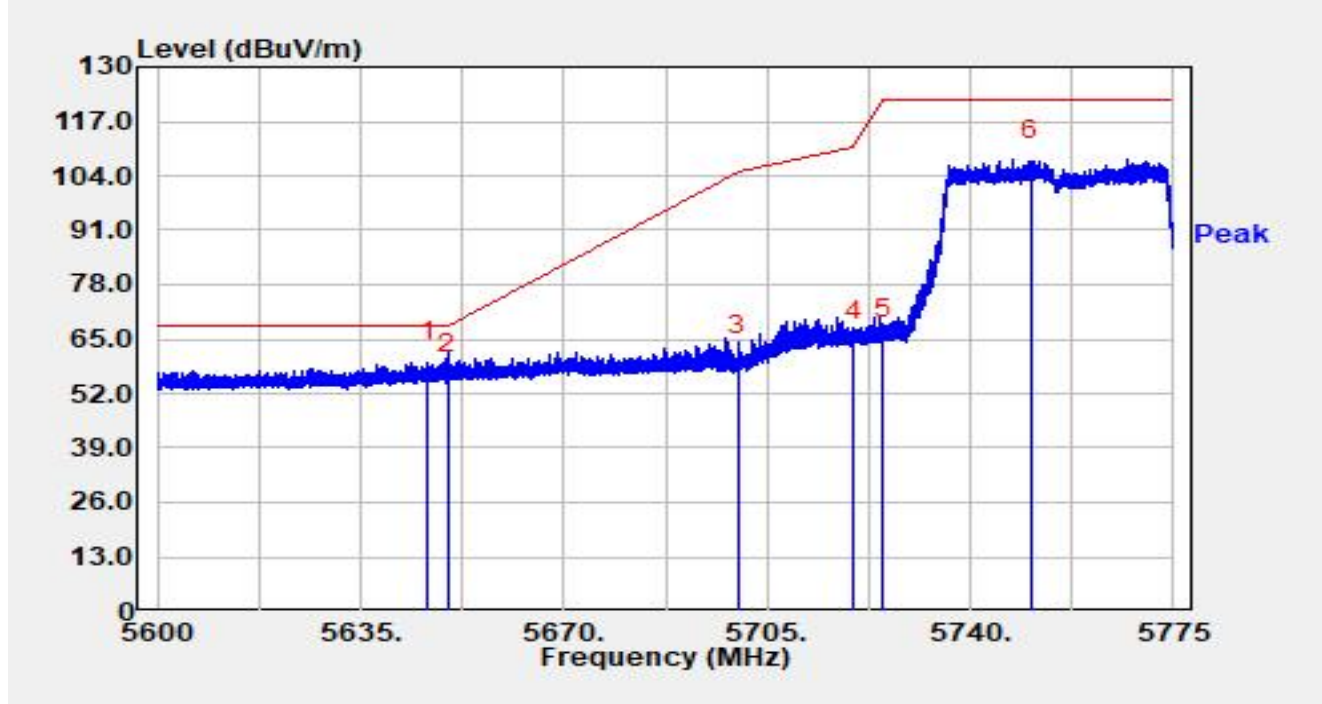


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5646.603	38.88	20.63	59.51	-8.69	68.20	Peak
2		5650.000	35.83	20.60	56.43	-11.77	68.20	Peak
3		5700.000	39.93	20.96	60.90	-44.30	105.20	Peak
4		5720.000	43.48	21.20	64.68	-46.12	110.80	Peak
5		5725.000	43.62	21.24	64.86	-57.34	122.20	Peak
6		5750.447	86.42	21.10	107.52	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5.8G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5755MHz		

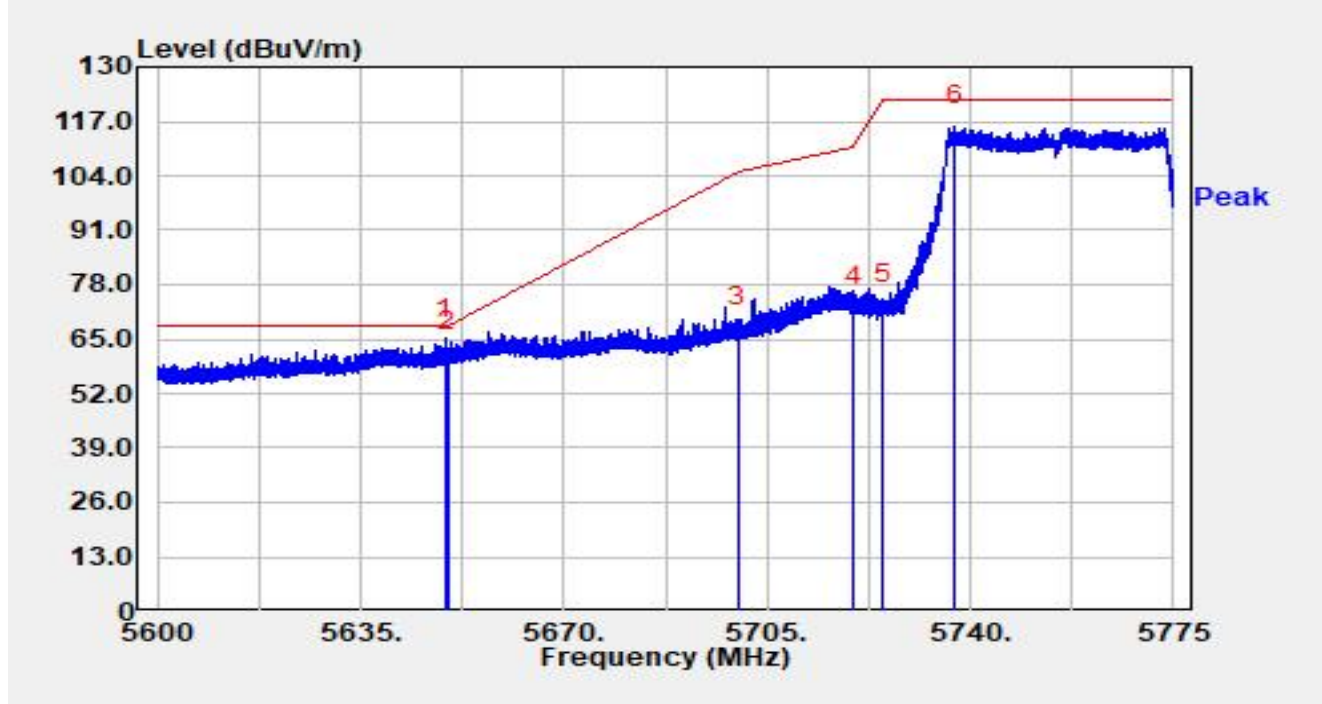


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5649.578	44.64	20.60	65.24	-2.96	68.20	Peak
2		5650.000	41.49	20.60	62.09	-6.11	68.20	Peak
3		5700.000	46.92	20.96	67.88	-37.32	105.20	Peak
4		5720.000	51.61	21.20	72.81	-37.99	110.80	Peak
5		5725.000	52.33	21.24	73.57	-48.63	122.20	Peak
6		5737.462	94.76	21.13	115.89	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5.8G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5795MHz		

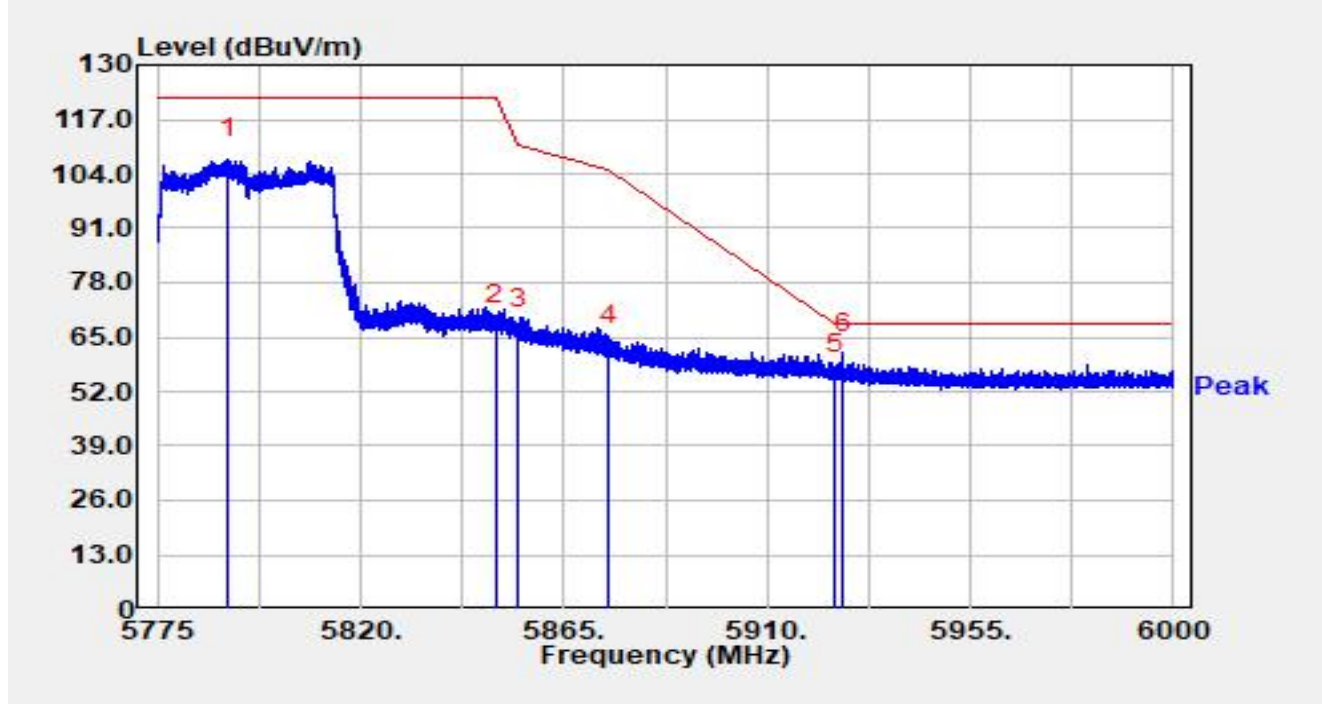


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5790.772	86.10	21.48	107.57	N/A	N/A	Peak
2		5850.000	46.55	21.49	68.04	-54.16	122.20	Peak
3		5855.000	45.39	21.54	66.93	-43.87	110.80	Peak
4		5875.000	41.35	21.60	62.95	-42.25	105.20	Peak
5		5925.000	34.66	21.59	56.26	-11.94	68.20	Peak
6	*	5926.785	39.55	21.60	61.15	-7.05	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5.8G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5795MHz		

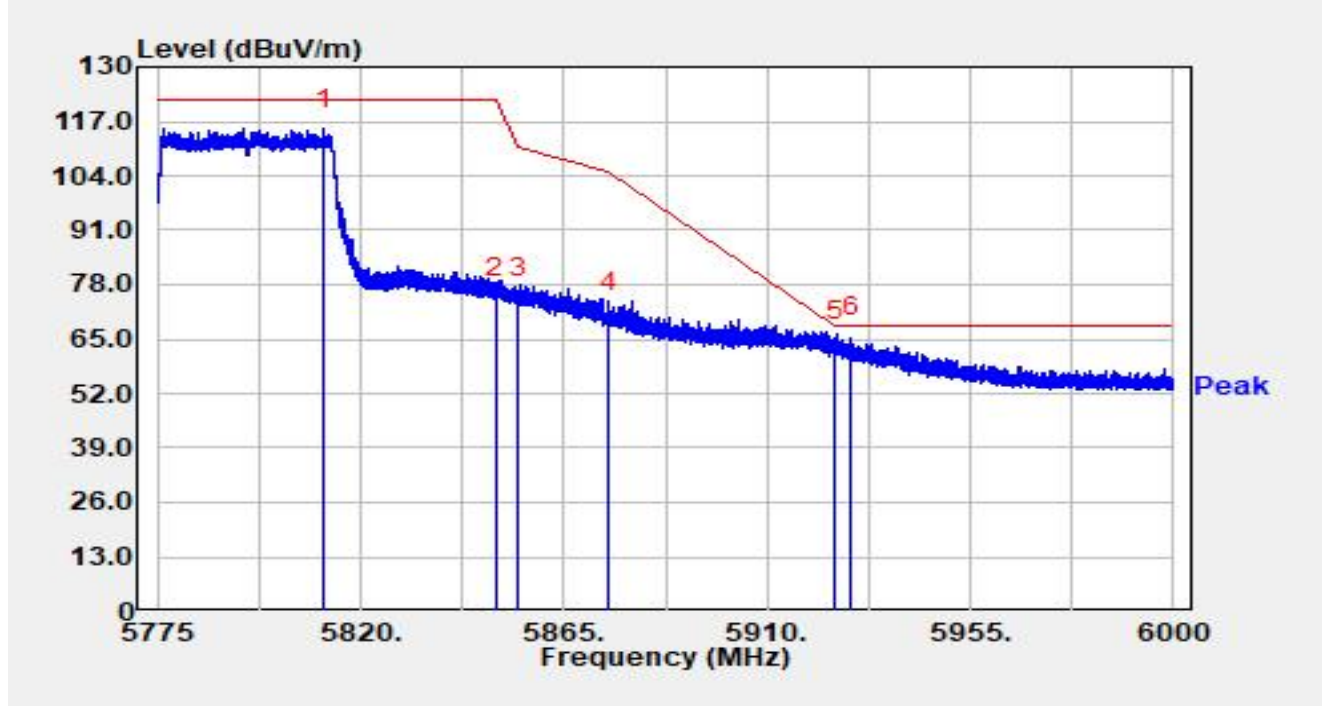


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5811.765	93.61	21.49	115.10	N/A	N/A	Peak
2		5850.000	53.46	21.49	74.95	-47.25	122.20	Peak
3		5855.000	53.04	21.54	74.58	-36.22	110.80	Peak
4		5875.000	49.64	21.60	71.24	-33.96	105.20	Peak
5		5925.000	42.69	21.59	64.29	-3.91	68.20	Peak
6	*	5928.473	43.78	21.61	65.39	-2.81	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

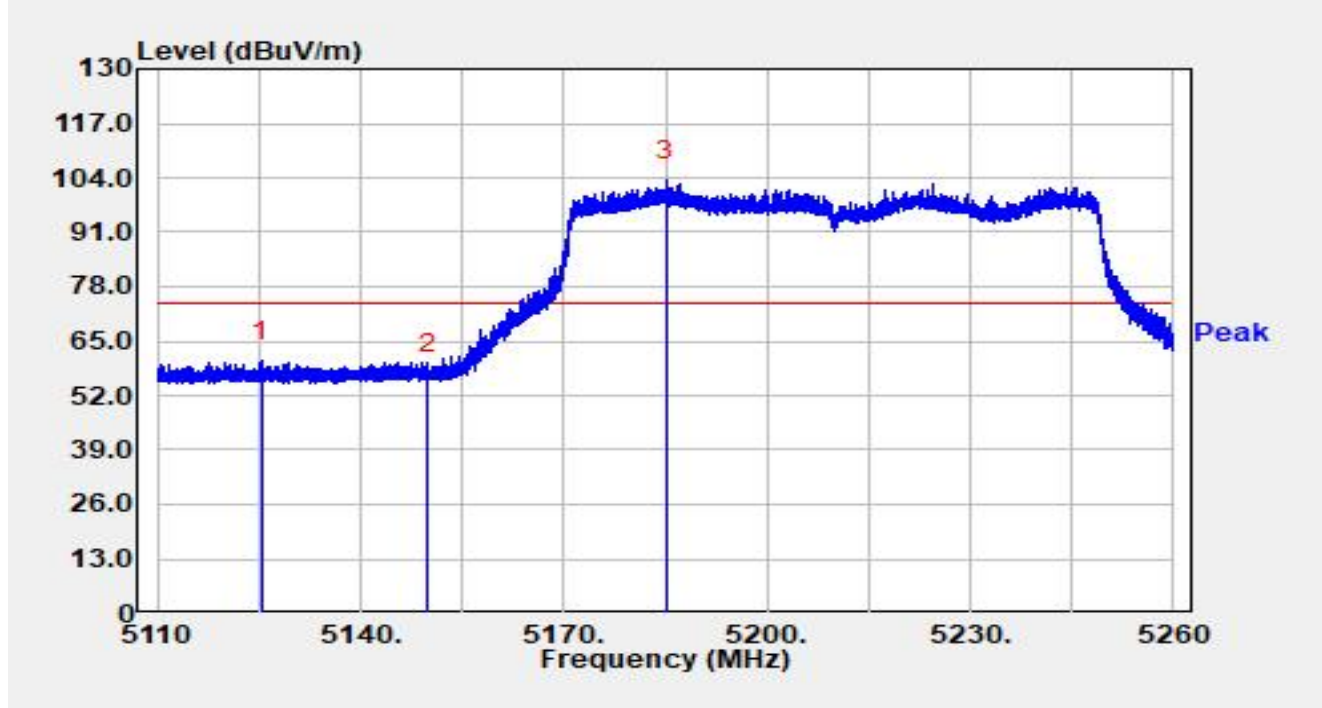


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5125.330	40.65	19.53	60.18	-13.82	74.00	Peak
2		5150.000	37.52	19.78	57.30	-16.70	74.00	Peak
3		5185.045	83.95	19.56	103.50	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

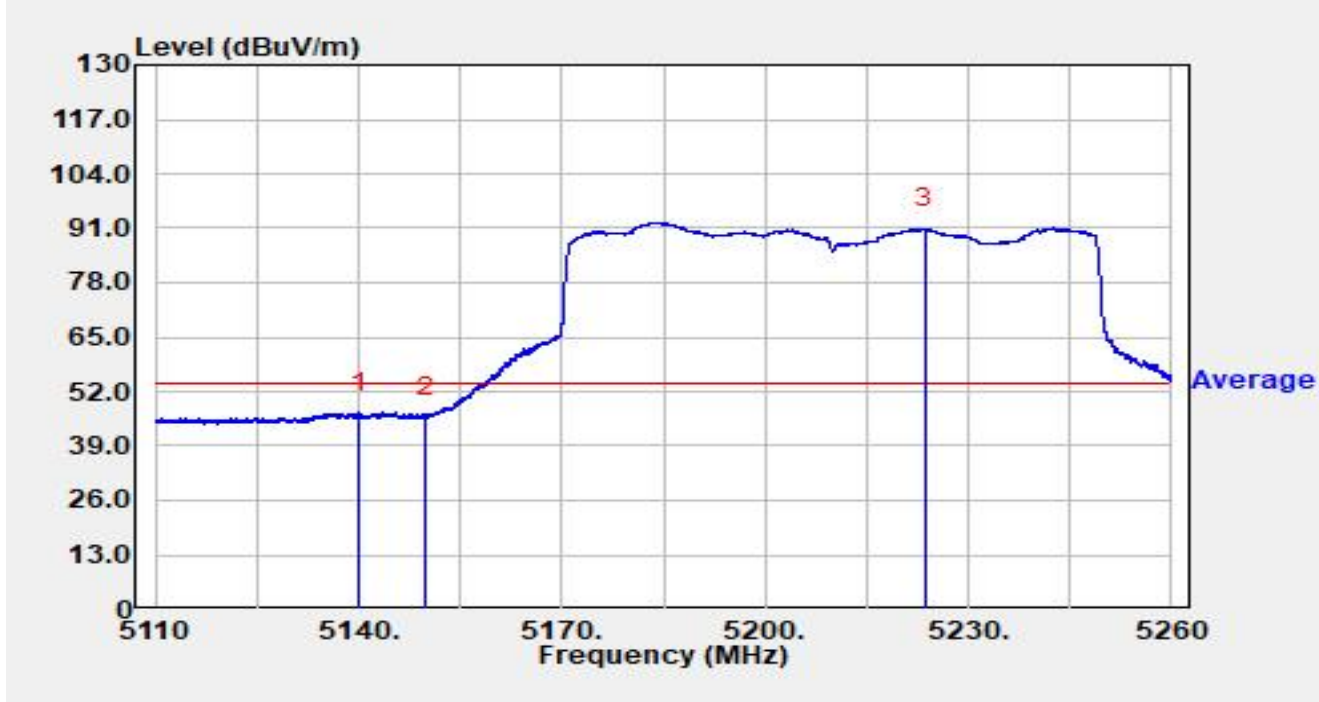


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5140.030	27.42	19.66	47.09	-6.91	54.00	Average
2		5150.000	26.16	19.78	45.94	-8.06	54.00	Average
3		5223.580	71.49	19.42	90.91	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

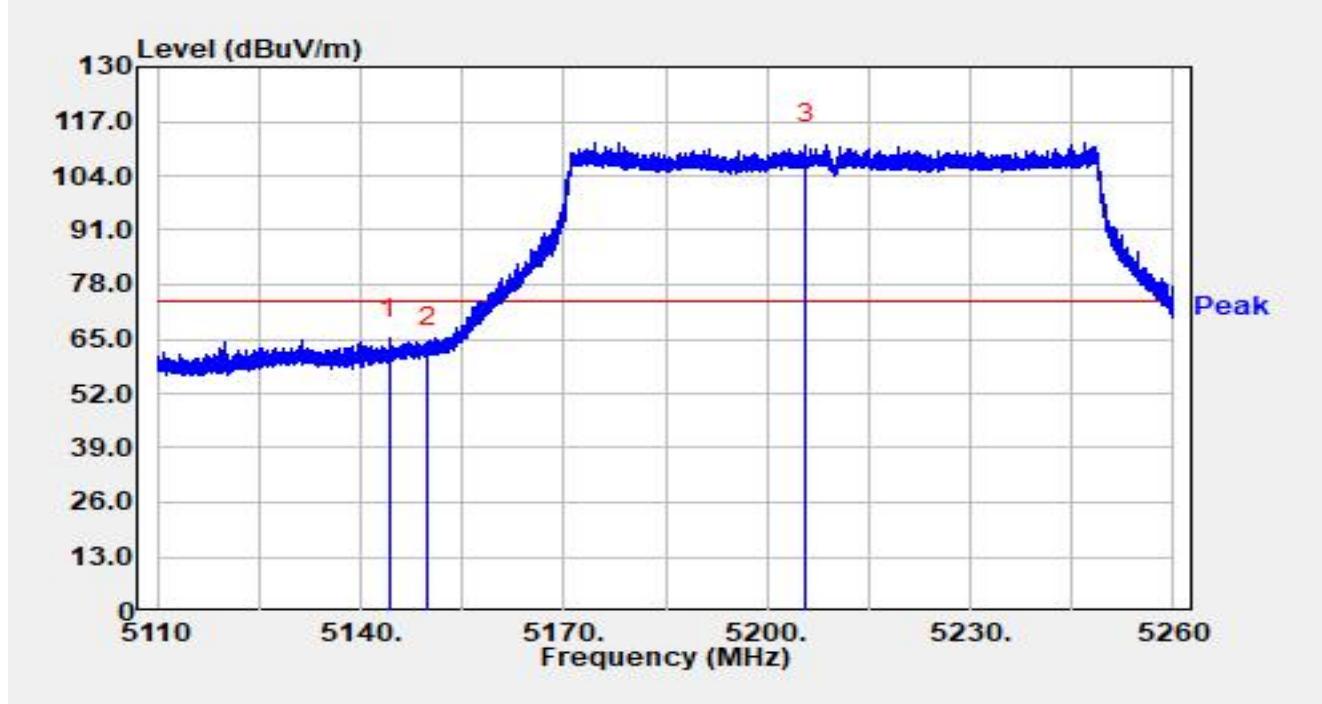


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5144.200	45.30	19.72	65.02	-8.98	74.00	Peak
2		5150.000	43.44	19.78	63.22	-10.78	74.00	Peak
3		5205.775	92.21	19.29	111.51	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

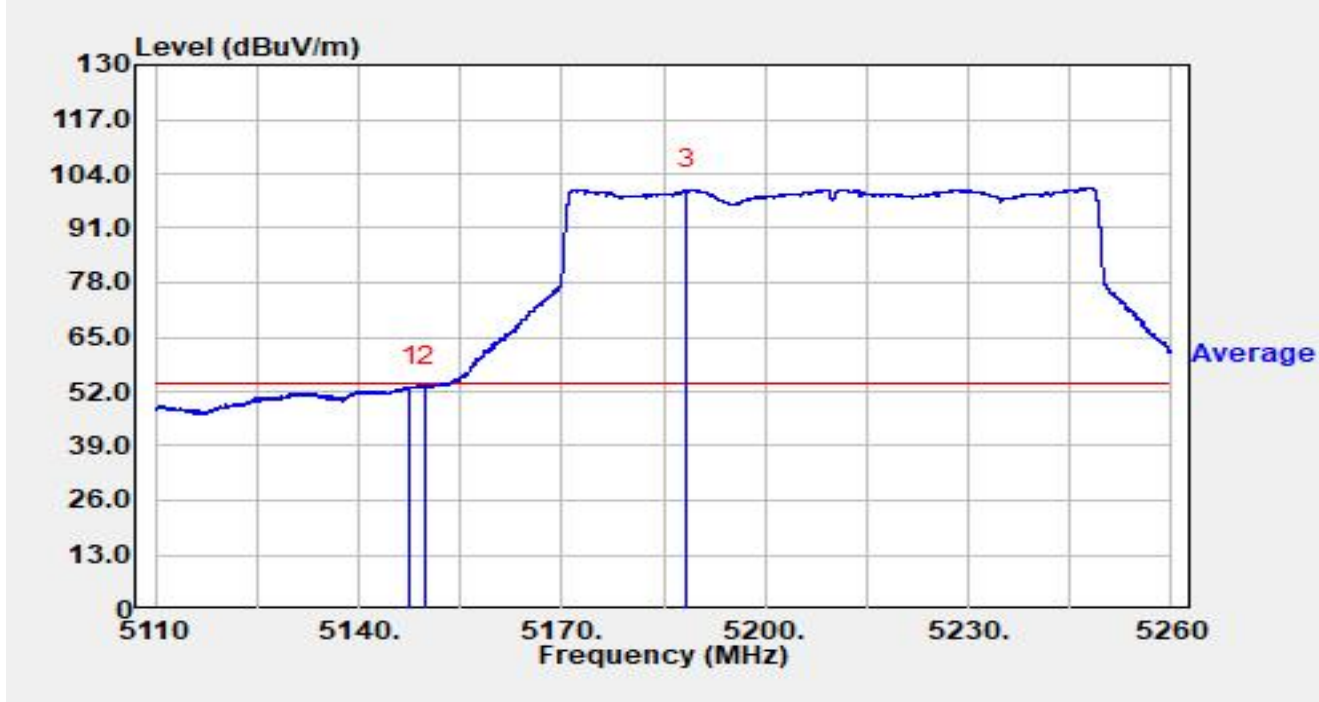


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5147.530	33.39	19.77	53.15	-0.85	54.00	Average
2	*	5150.000	33.42	19.78	53.20	-0.80	54.00	Average
3		5188.510	80.72	19.49	100.21	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

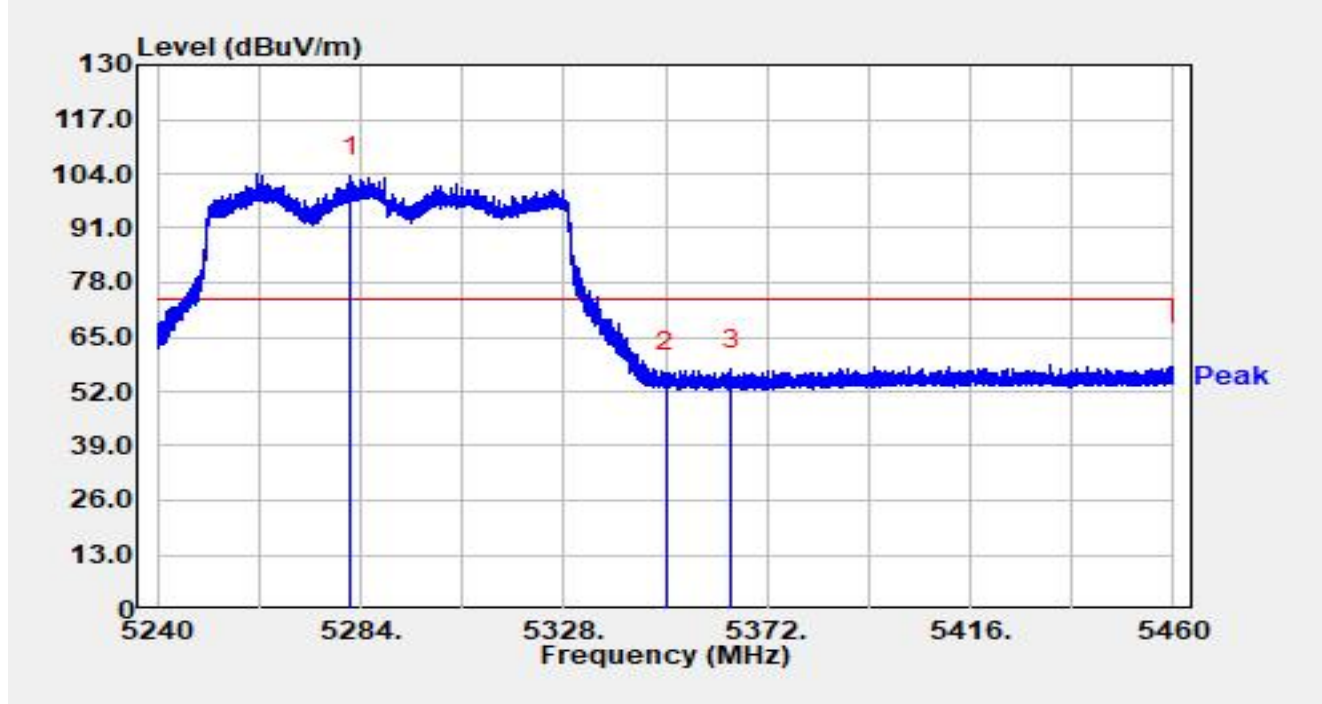


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5281.888	84.22	19.09	103.31	N/A	N/A	Peak
2		5350.000	37.15	19.40	56.55	-17.45	74.00	Peak
3	*	5364.322	37.87	19.31	57.18	-16.82	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

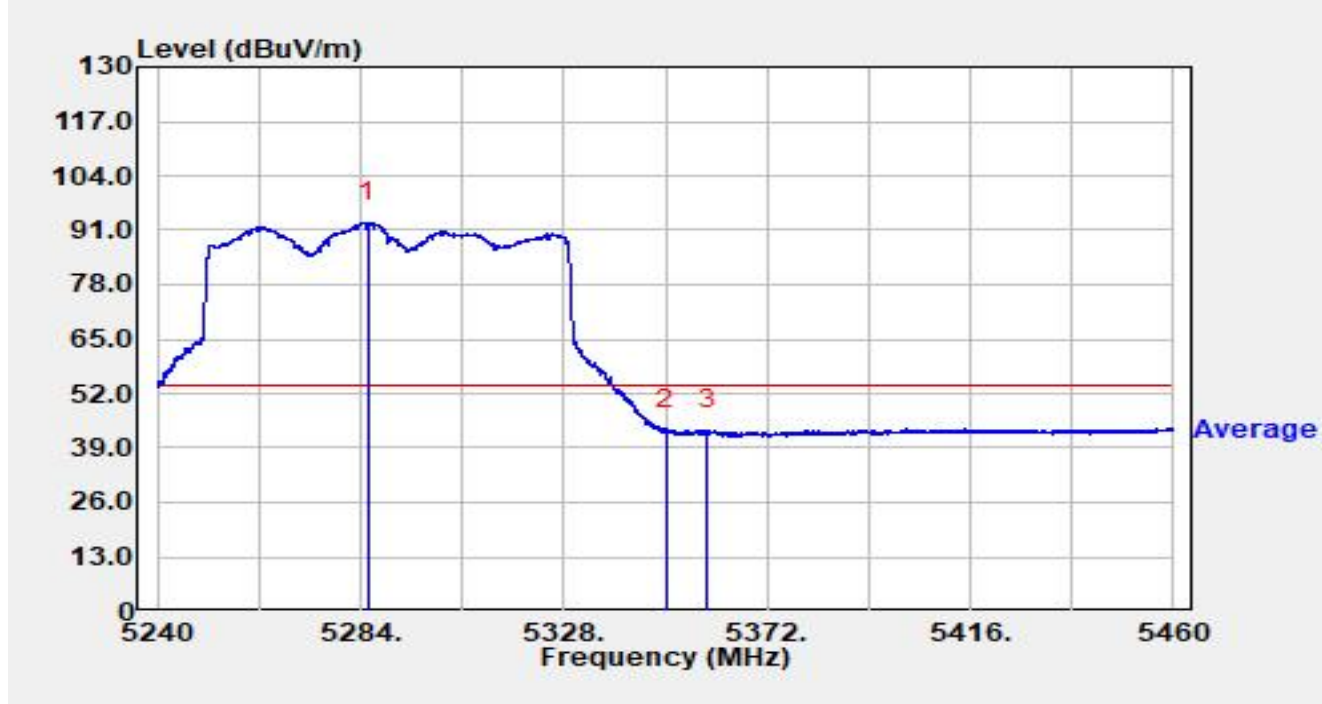


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5285.716	73.60	19.12	92.72	N/A	N/A	Average
2	*	5350.000	24.02	19.40	43.42	-10.58	54.00	Average
3		5358.998	23.87	19.33	43.20	-10.80	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

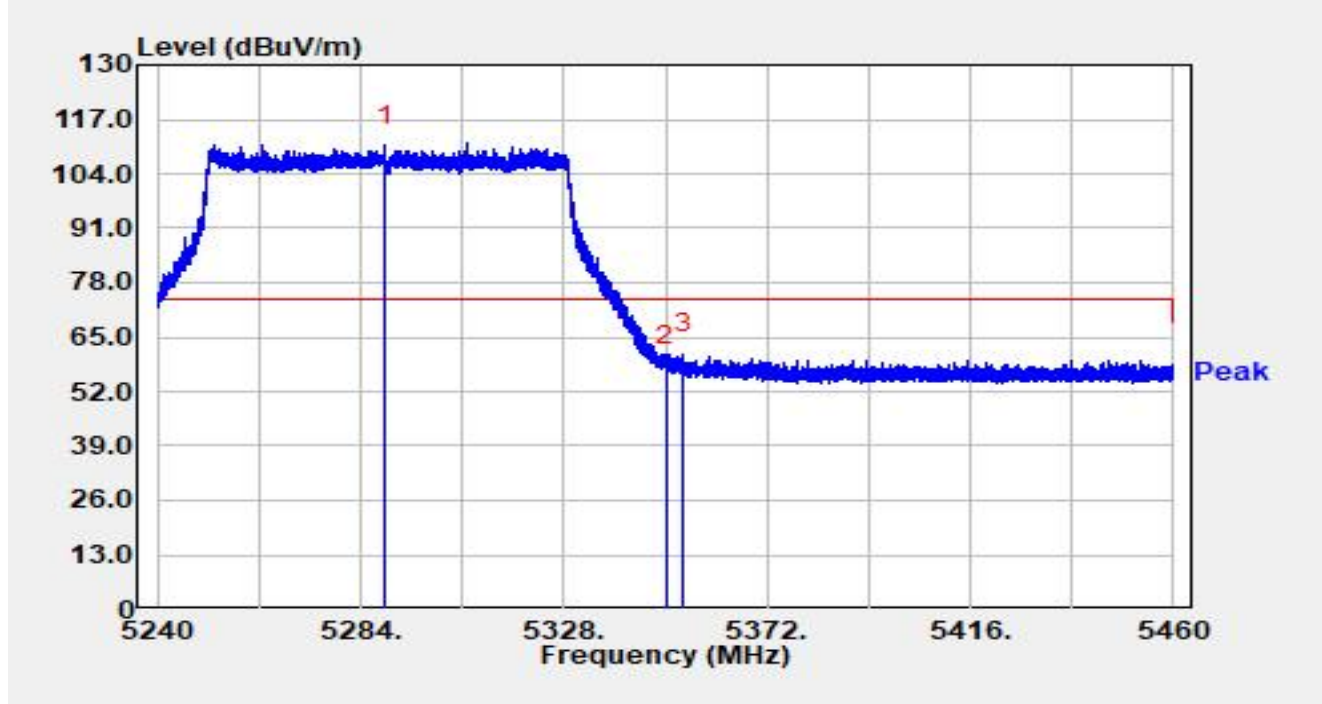


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5289.346	91.44	19.19	110.63	N/A	N/A	Peak
2		5350.000	38.72	19.40	58.12	-15.88	74.00	Peak
3	*	5353.938	41.53	19.35	60.88	-13.12	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

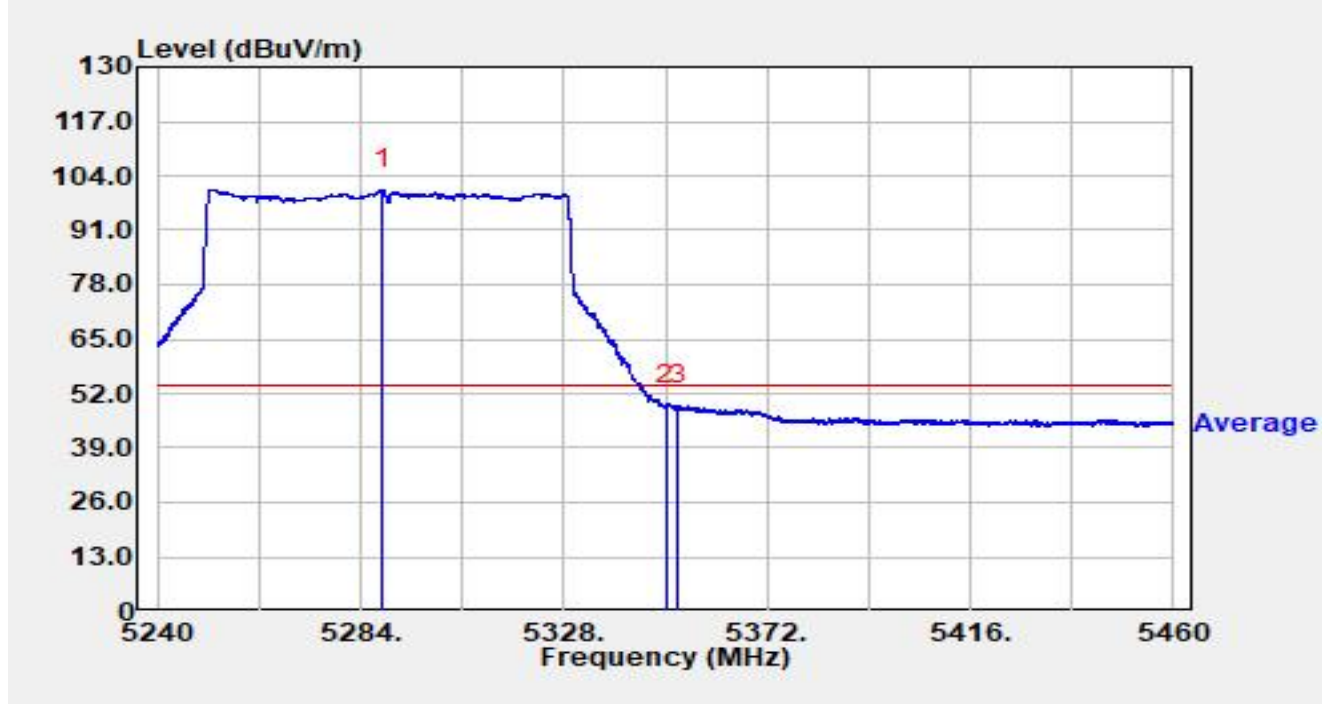


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5288.884	81.40	19.18	100.58	N/A	N/A	Average
2		5350.000	29.72	19.40	49.12	-4.88	54.00	Average
3	*	5352.684	29.87	19.35	49.22	-4.78	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

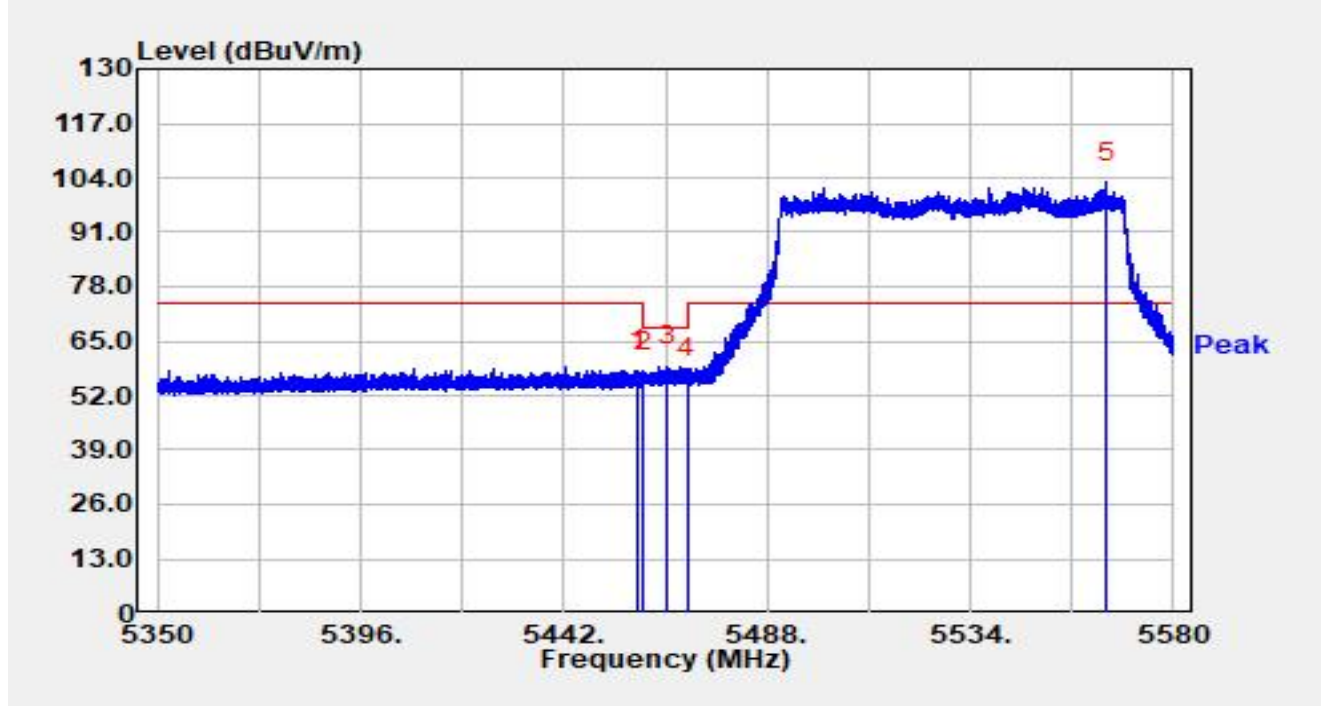


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.744	38.21	19.72	57.93	-16.07	74.00	Peak
2		5460.000	38.12	19.74	57.87	-10.33	68.20	Peak
3	*	5465.483	39.25	19.84	59.09	-9.11	68.20	Peak
4		5470.000	36.24	19.92	56.16	-12.04	68.20	Peak
5		5564.912	82.74	20.12	102.86	N/A	N/A	Peak

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

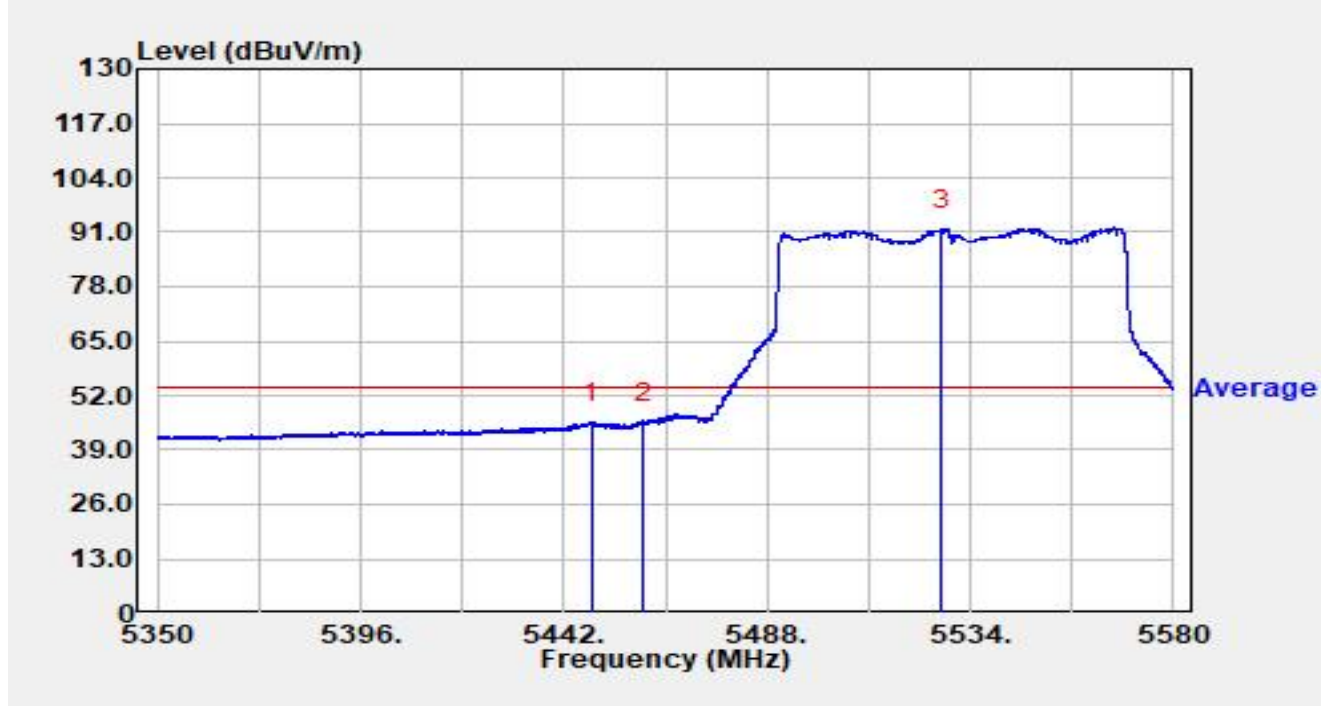


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5448.417	25.96	19.65	45.61	-8.39	54.00	Average
2		5460.000	25.55	19.74	45.29	-8.71	54.00	Average
3		5527.629	72.00	19.62	91.62	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

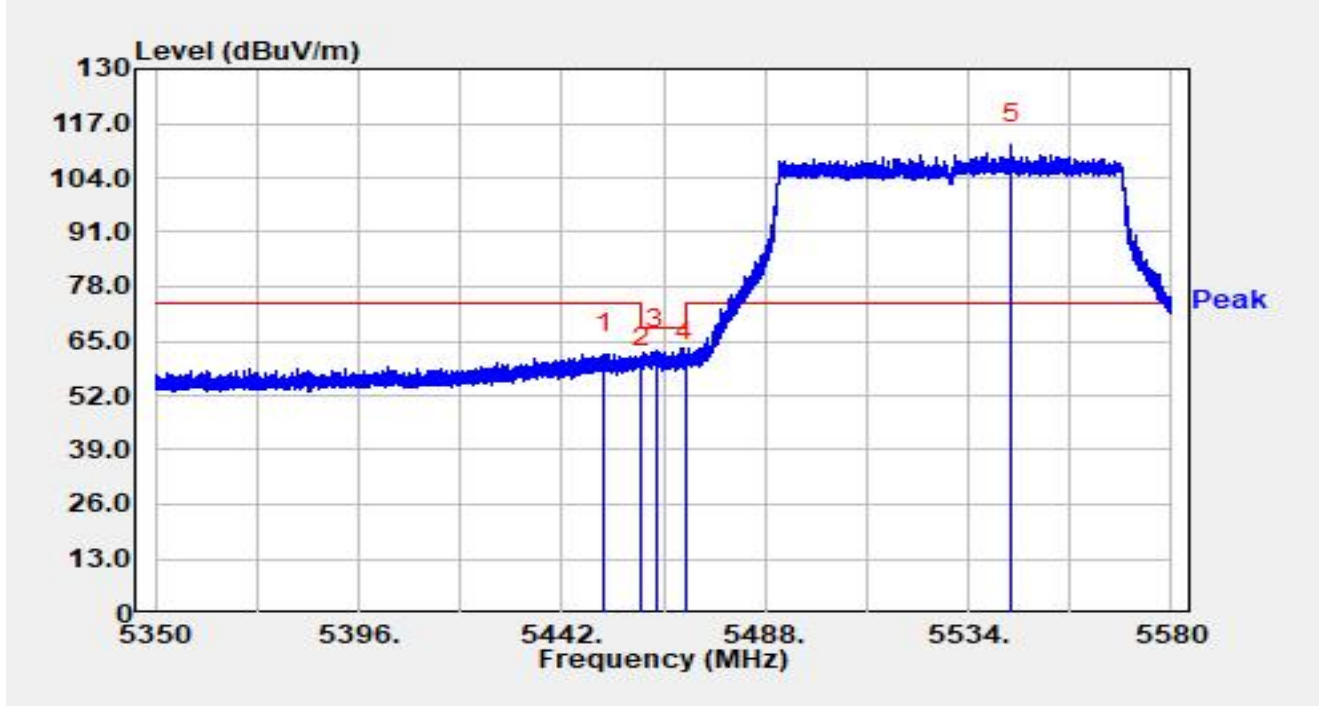


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5451.545	42.26	19.64	61.90	-12.10	74.00	Peak
2		5460.000	38.90	19.74	58.64	-9.56	68.20	Peak
3	*	5463.229	43.11	19.80	62.91	-5.29	68.20	Peak
4		5470.000	39.93	19.92	59.85	-8.35	68.20	Peak
5		5543.729	92.03	19.96	111.99	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

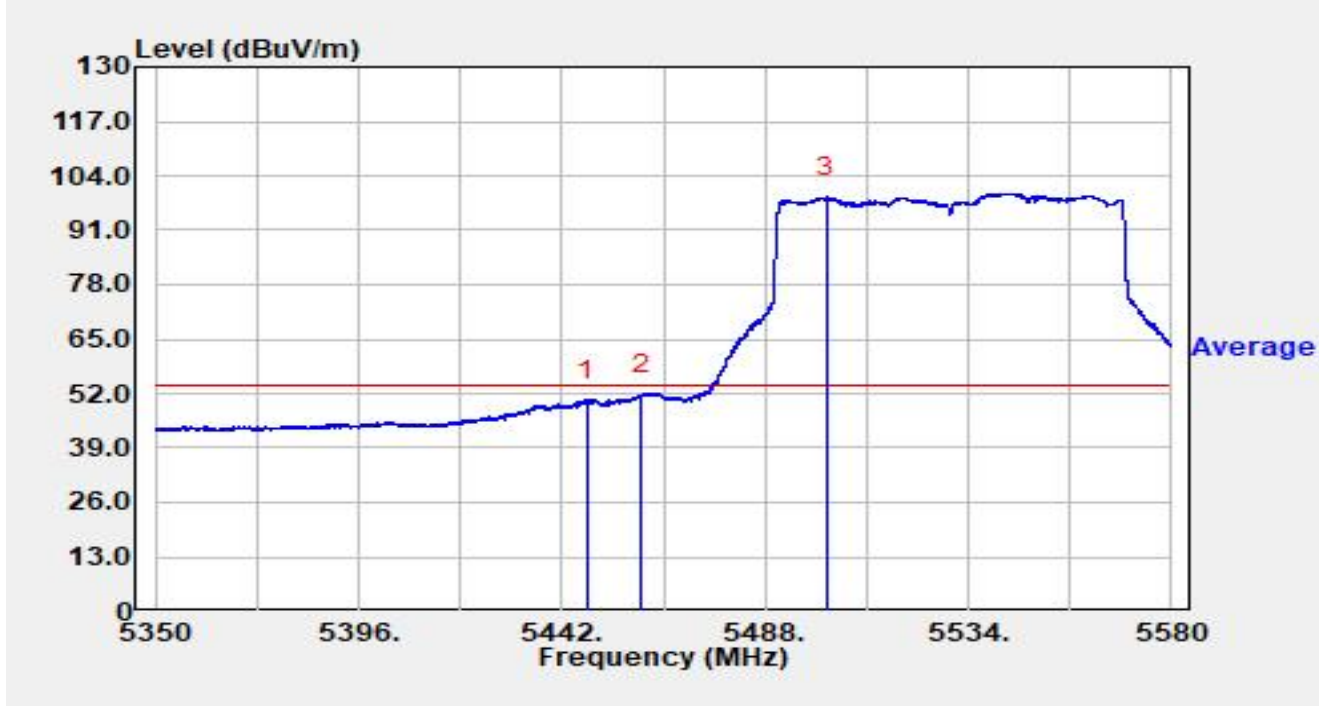


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5447.566	30.88	19.65	50.53	-3.47	54.00	Average
2	*	5460.000	31.77	19.74	51.51	-2.49	54.00	Average
3		5501.869	79.15	19.70	98.85	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5610MHz		

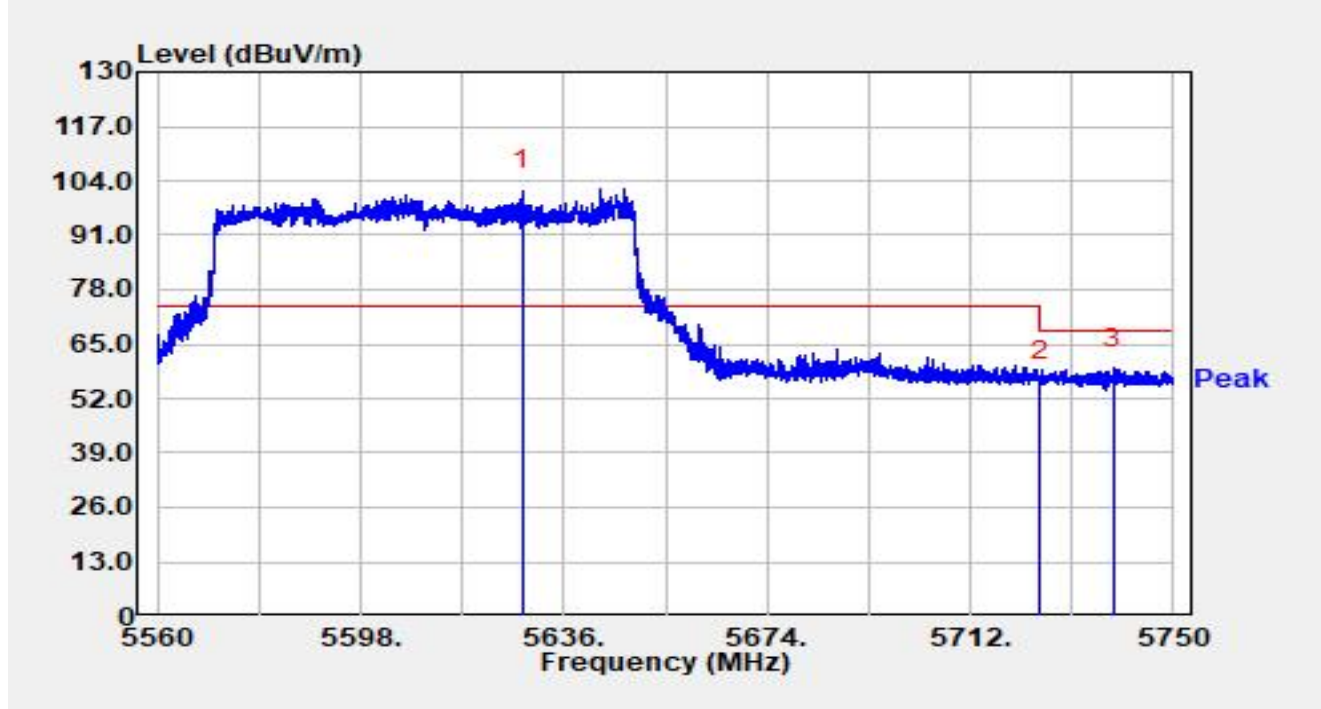


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5628.191	81.12	20.57	101.68	N/A	N/A	Peak
2		5725.000	35.02	21.24	56.26	-11.94	68.20	Peak
3	*	5738.866	38.25	21.11	59.36	-8.84	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5610MHz		

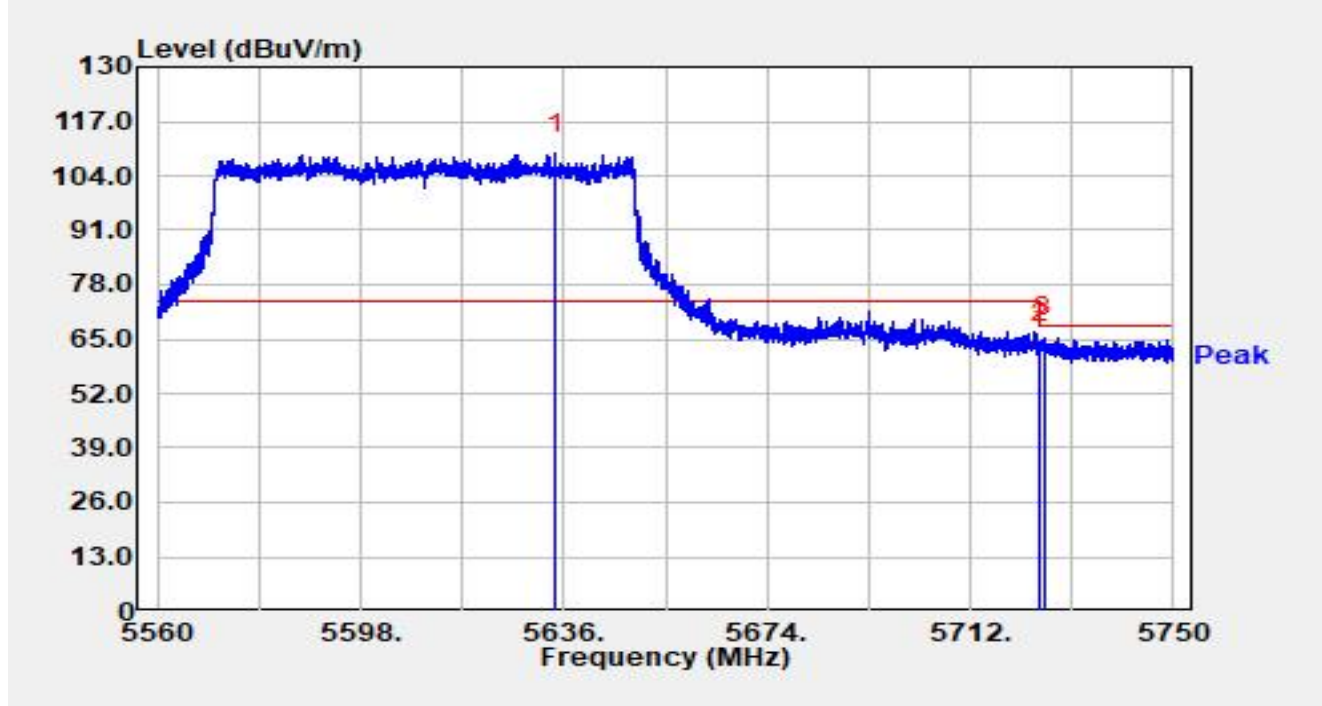


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5634.442	88.57	20.62	109.19	N/A	N/A	Peak
2		5725.000	42.66	21.24	63.90	-4.30	68.20	Peak
3	*	5725.756	44.06	21.25	65.30	-2.90	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5.8G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5775MHz		

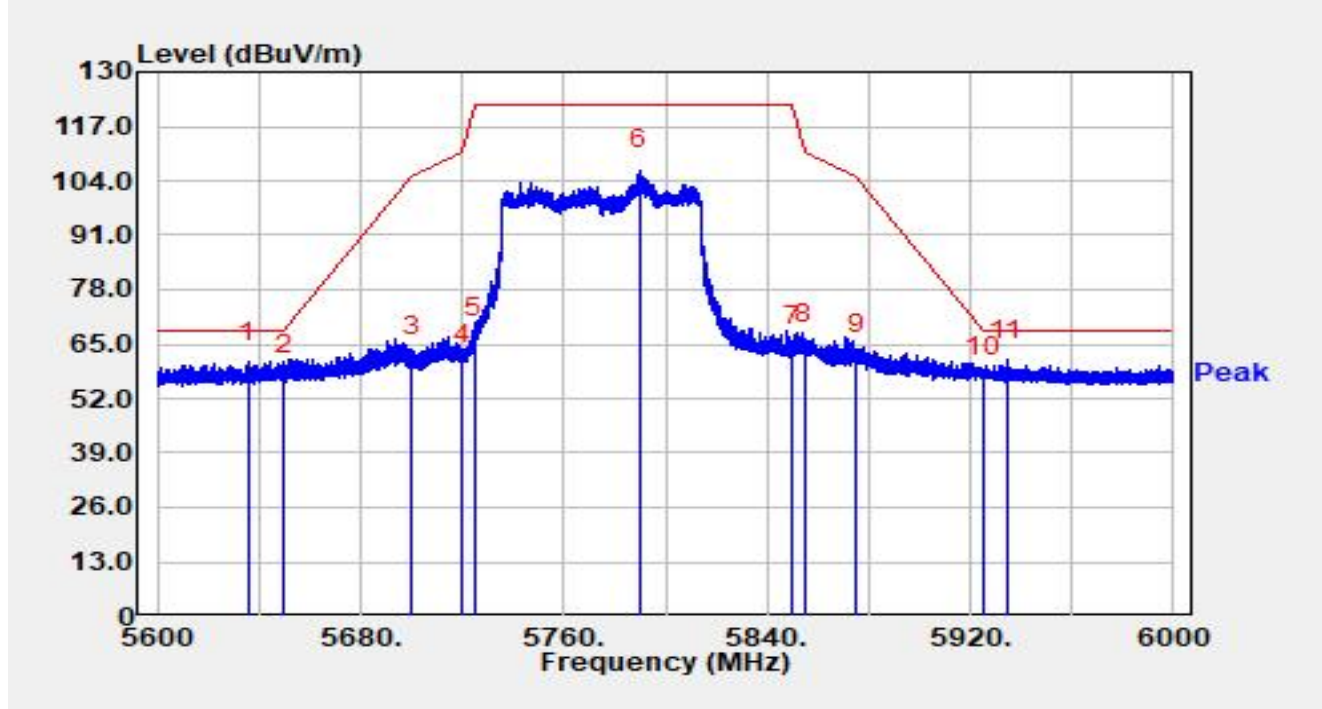

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5635.520	39.96	20.63	60.59	-7.61	68.20	Peak
2		5650.000	36.89	20.60	57.49	-10.71	68.20	Peak
3		5700.000	40.94	20.96	61.91	-43.29	105.20	Peak
4		5720.000	39.11	21.20	60.31	-50.49	110.80	Peak
5		5725.000	45.36	21.24	66.60	-55.60	122.20	Peak
6		5789.560	85.14	21.47	106.61	N/A	N/A	Peak
7		5850.000	42.92	21.49	64.41	-57.79	122.20	Peak
8		5855.000	43.48	21.54	65.02	-45.78	110.80	Peak
9		5875.000	41.03	21.60	62.63	-42.57	105.20	Peak
10		5925.000	35.32	21.59	56.91	-11.29	68.20	Peak
11	*	5934.640	39.48	21.63	61.10	-7.10	68.20	Peak


Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5.8G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5775MHz		

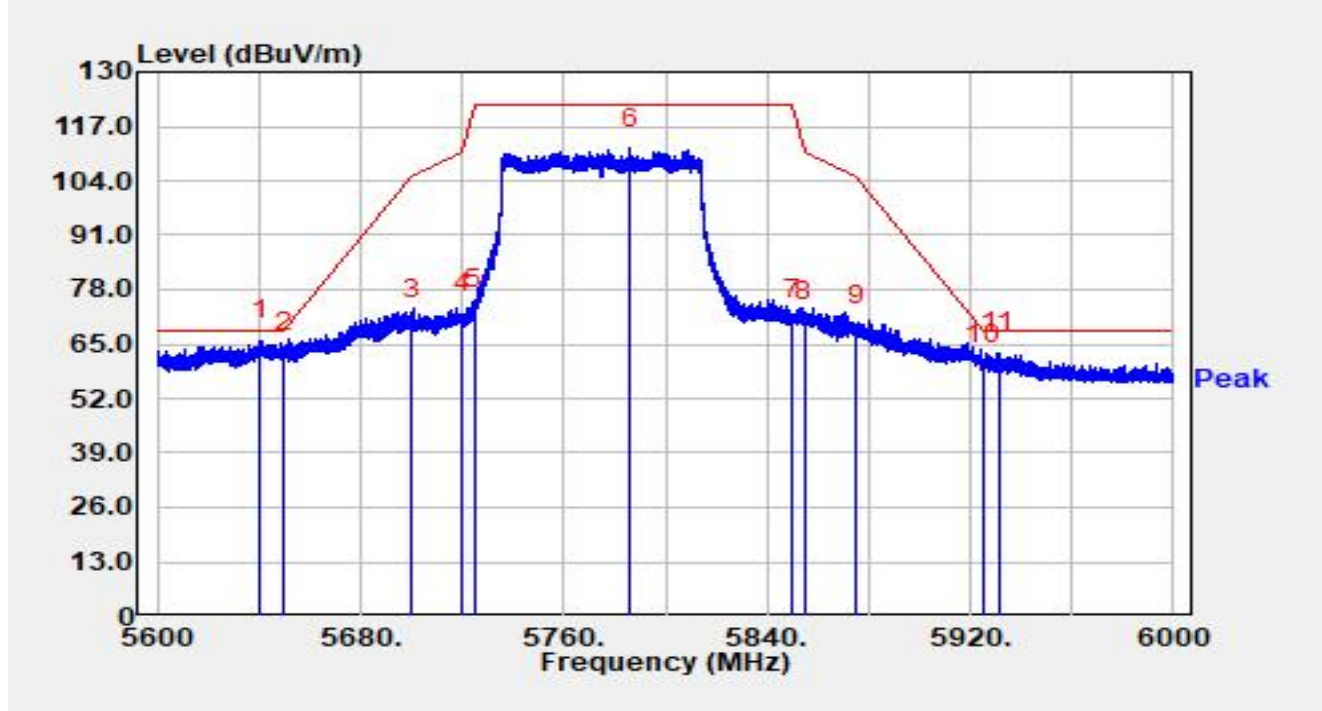

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5640.320	45.26	20.68	65.94	-2.26	68.20	Peak
2		5650.000	42.66	20.60	63.26	-4.94	68.20	Peak
3		5700.000	49.68	20.96	70.65	-34.55	105.20	Peak
4		5720.000	51.05	21.20	72.25	-38.55	110.80	Peak
5		5725.000	51.94	21.24	73.18	-49.02	122.20	Peak
6		5786.160	90.32	21.43	111.75	N/A	N/A	Peak
7		5850.000	49.48	21.49	70.97	-51.23	122.20	Peak
8		5855.000	48.80	21.54	70.34	-40.46	110.80	Peak
9		5875.000	47.80	21.60	69.40	-35.80	105.20	Peak
10		5925.000	38.73	21.59	60.33	-7.87	68.20	Peak
11		5931.440	41.30	21.62	62.92	-5.28	68.20	Peak


Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m)

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5250MHz		

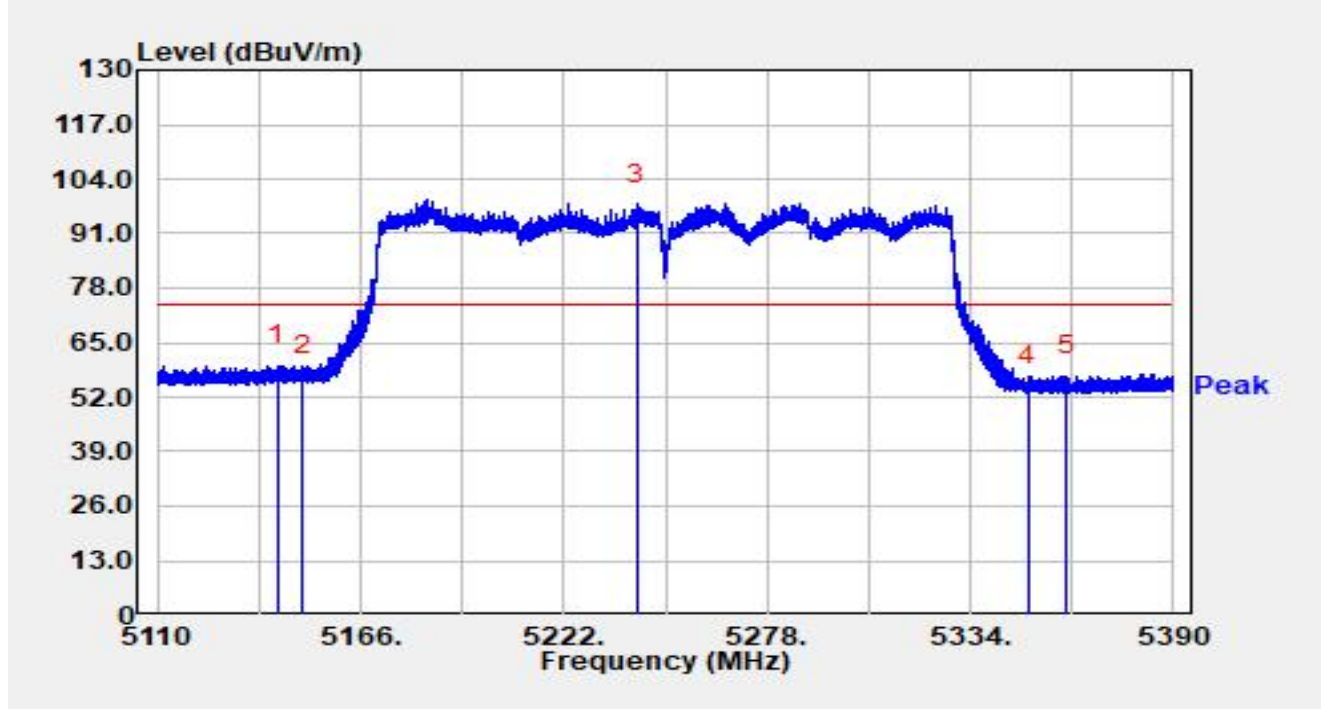


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5143.208	39.89	19.71	59.60	-14.40	74.00	Peak
2		5150.000	37.22	19.78	57.00	-17.00	74.00	Peak
3		5242.020	78.53	19.43	97.97	N/A	N/A	Peak
4		5350.000	35.52	19.40	54.92	-19.08	74.00	Peak
5		5360.544	37.80	19.32	57.13	-16.87	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5250MHz		

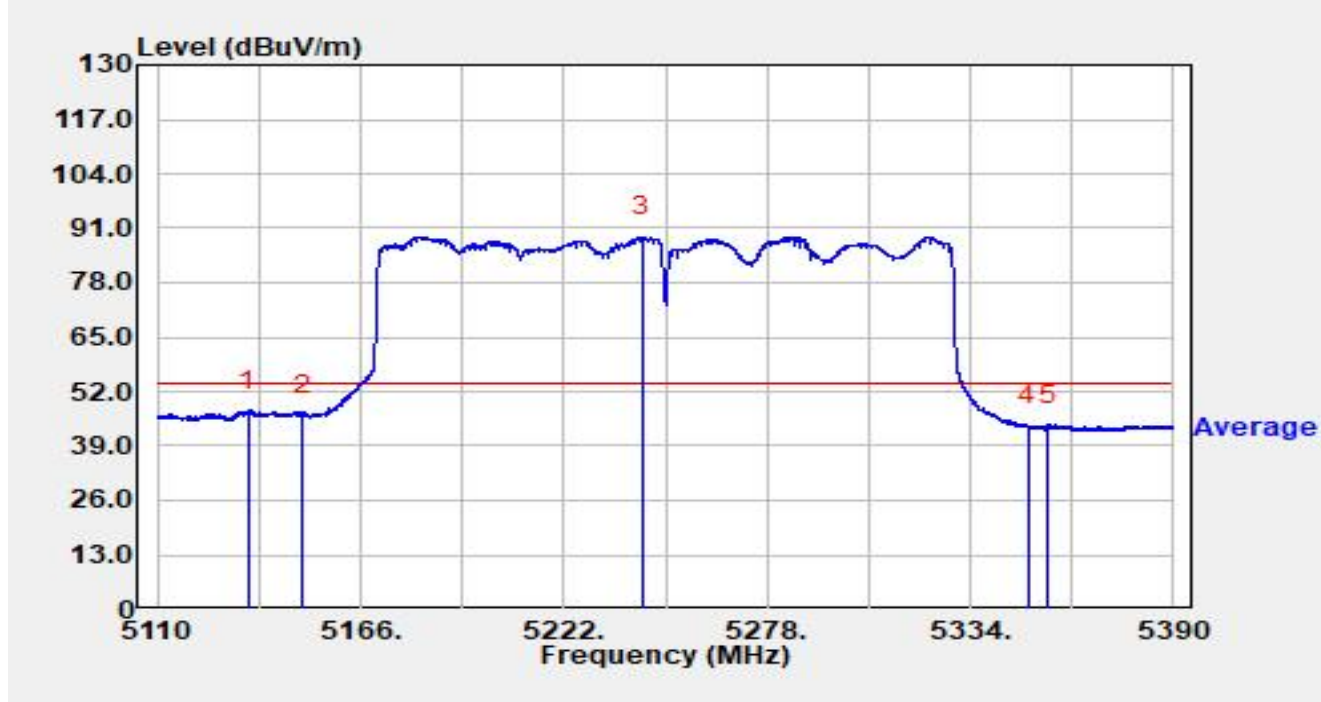


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5134.920	27.90	19.60	47.50	-6.50	54.00	Average
2		5150.000	26.67	19.78	46.45	-7.55	54.00	Average
3		5243.644	69.39	19.43	88.82	N/A	N/A	Average
4		5350.000	24.37	19.40	43.77	-10.23	54.00	Average
5		5355.420	24.71	19.34	44.05	-9.95	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5250MHz		

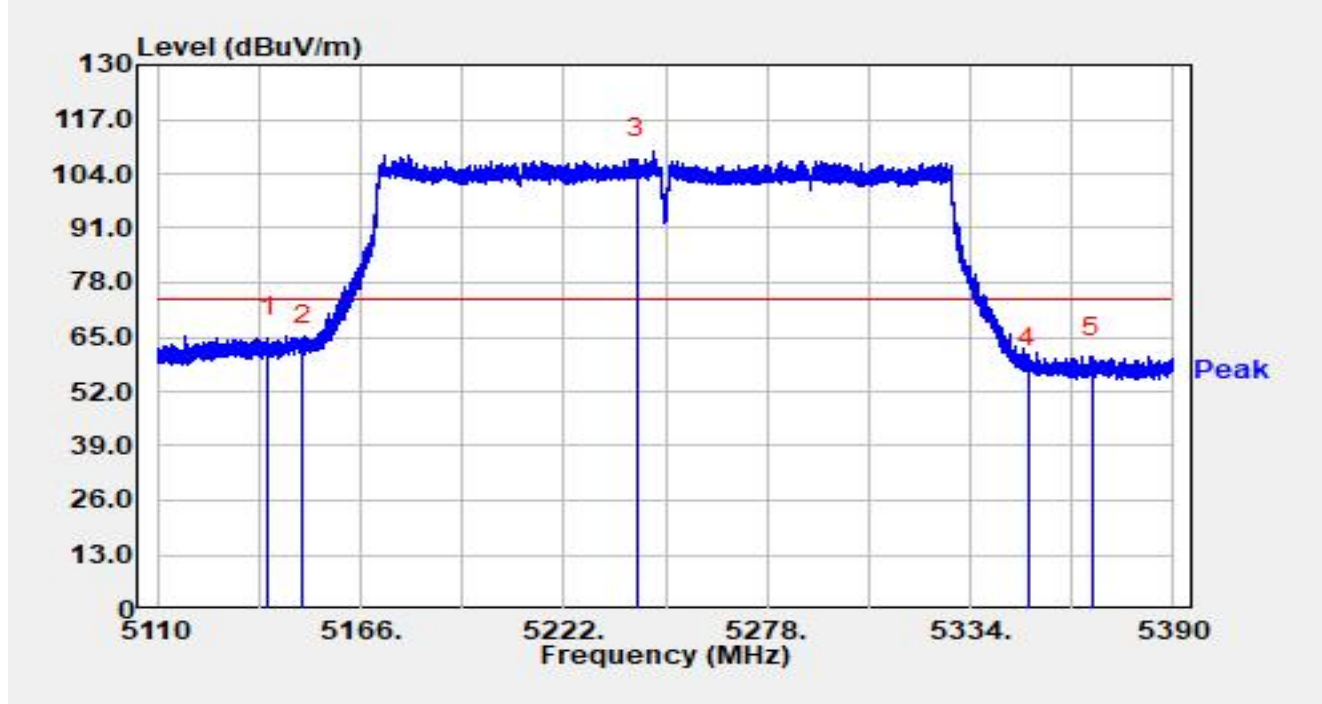


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5140.548	45.19	19.67	64.86	-9.14	74.00	Peak
2		5150.000	43.07	19.78	62.86	-11.14	74.00	Peak
3		5242.244	88.17	19.43	107.60	N/A	N/A	Peak
4		5350.000	38.27	19.40	57.67	-16.33	74.00	Peak
5		5367.684	40.98	19.31	60.29	-13.71	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5250MHz		

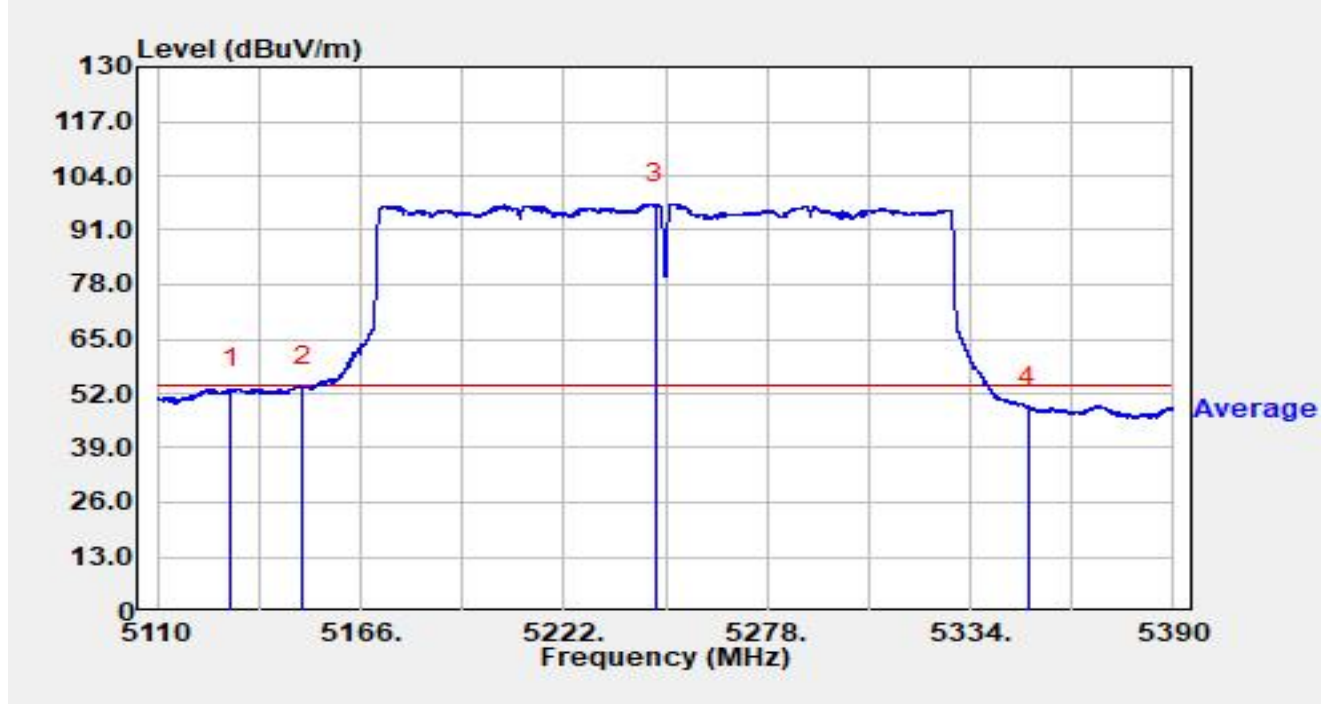


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5130.328	33.62	19.54	53.16	-0.84	54.00	Average
2	*	5150.000	33.82	19.78	53.60	-0.40	54.00	Average
3		5247.340	77.87	19.41	97.28	N/A	N/A	Average
4		5350.000	29.40	19.40	48.81	-5.19	54.00	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5570MHz		

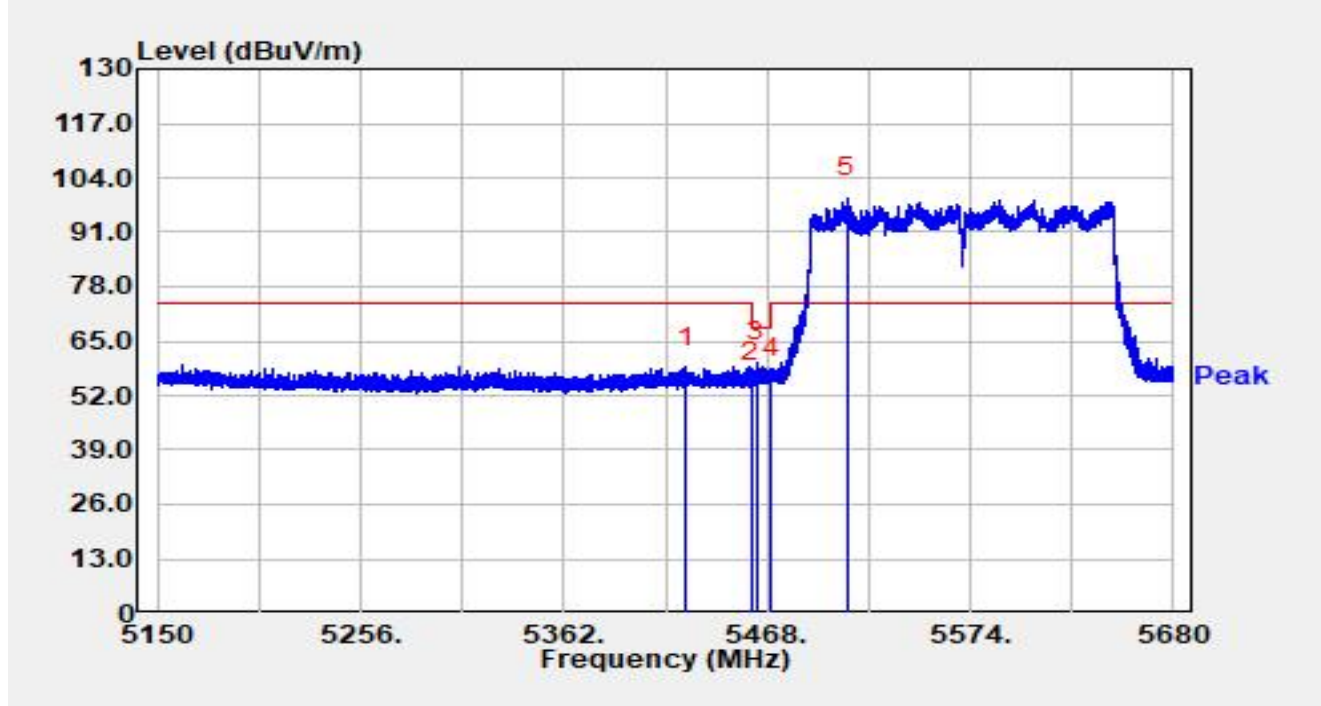


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5425.600	38.86	19.82	58.67	-15.33	74.00	Peak
2		5460.000	35.54	19.74	55.29	-12.91	68.20	Peak
3	*	5462.329	40.17	19.78	59.95	-8.25	68.20	Peak
4		5470.000	36.09	19.92	56.01	-12.19	68.20	Peak
5		5509.976	79.63	19.59	99.22	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5570MHz		

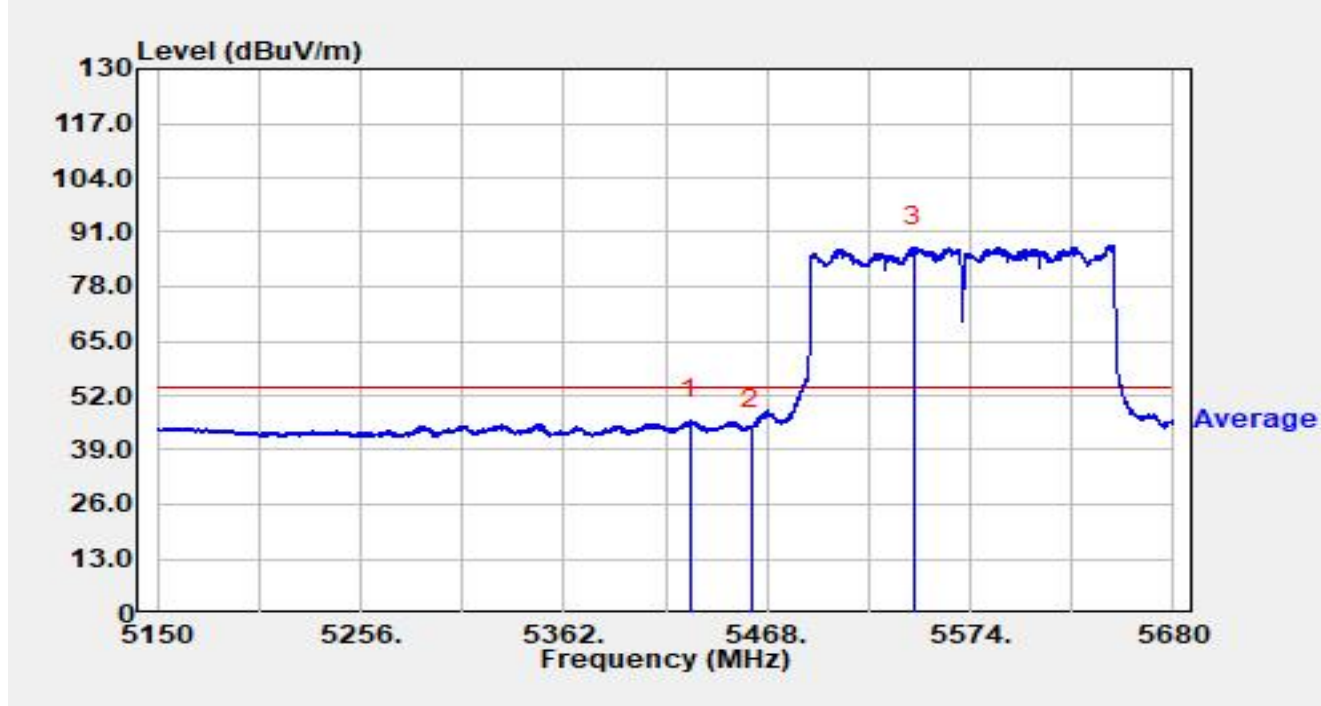


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5427.985	26.49	19.79	46.28	-7.72	54.00	Average
2		5460.000	24.39	19.74	44.13	-9.87	54.00	Average
3		5544.797	67.39	19.98	87.37	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5570MHz		

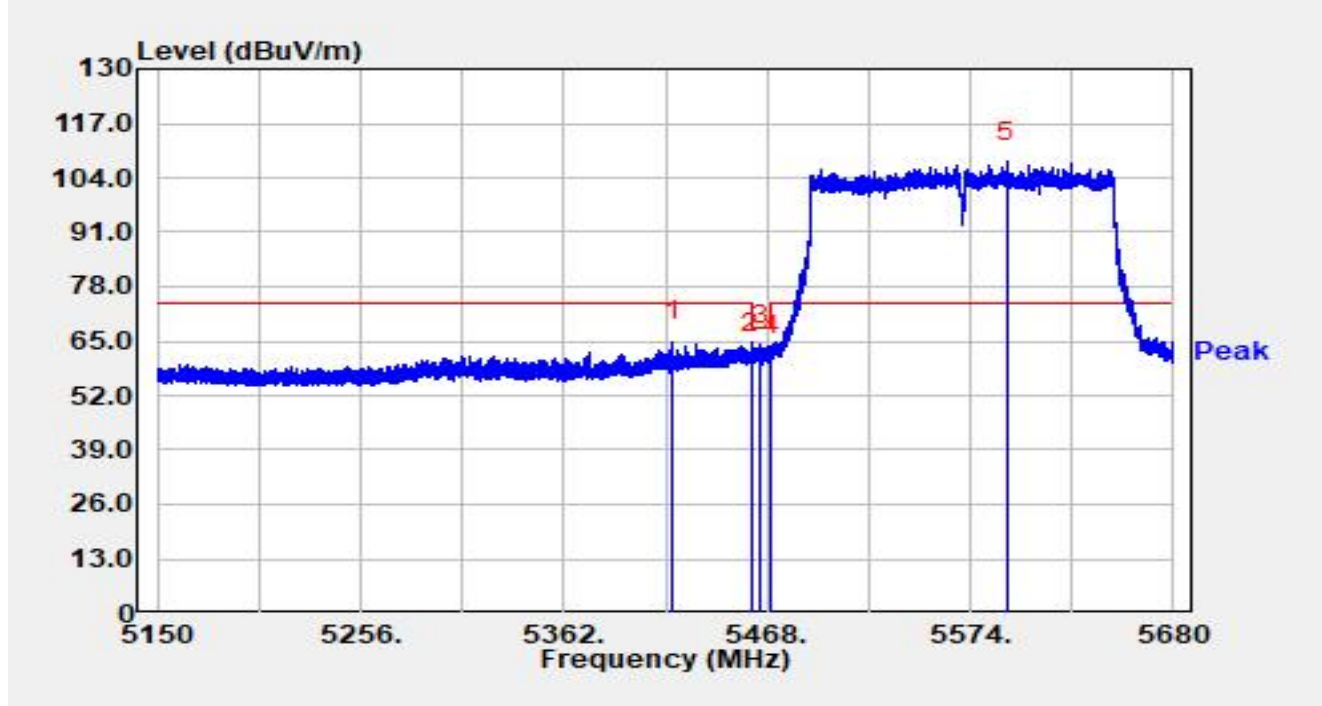


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5418.763	44.88	19.89	64.78	-9.22	74.00	Peak
2		5460.000	42.48	19.74	62.23	-5.97	68.20	Peak
3	*	5464.767	44.28	19.83	64.10	-4.10	68.20	Peak
4		5470.000	41.86	19.92	61.79	-6.41	68.20	Peak
5		5593.080	87.91	20.01	107.92	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5570MHz		

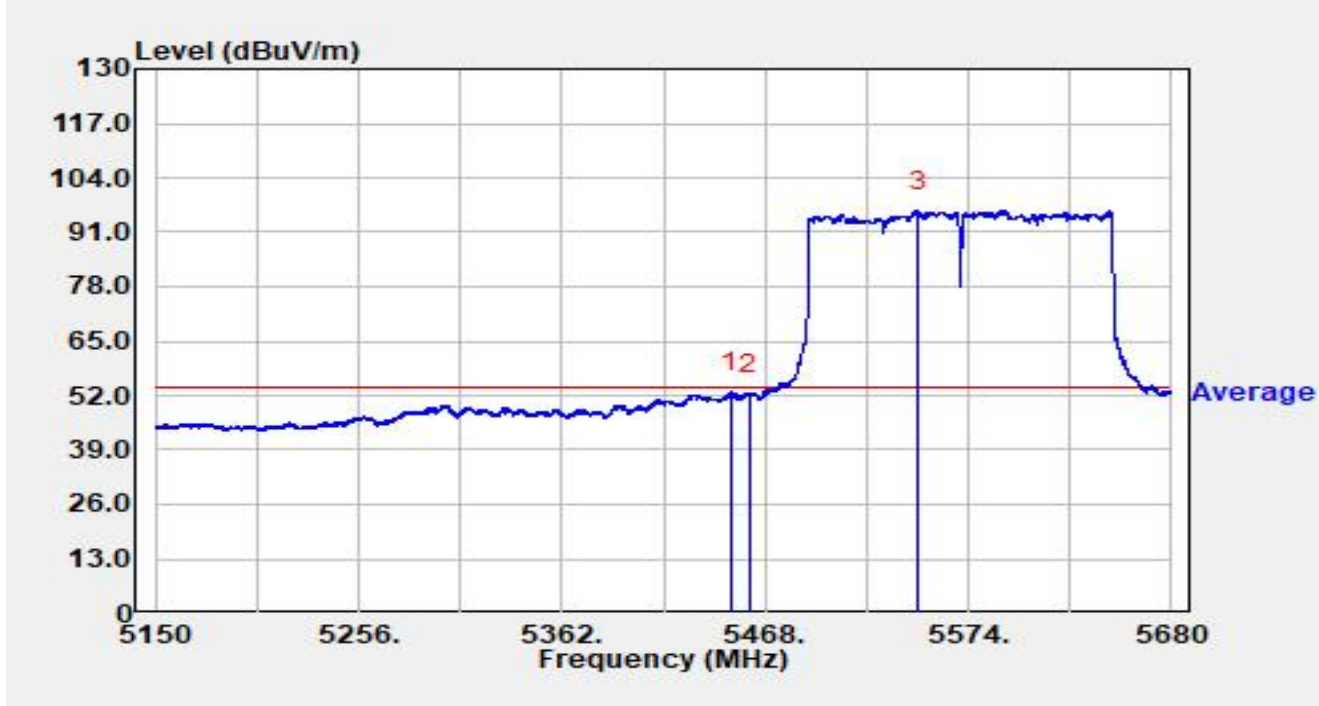


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5450.033	33.23	19.65	52.88	-1.12	54.00	Average
2		5460.000	32.64	19.74	52.38	-1.62	54.00	Average
3		5547.924	75.90	20.04	95.94	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m)

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5180MHz		

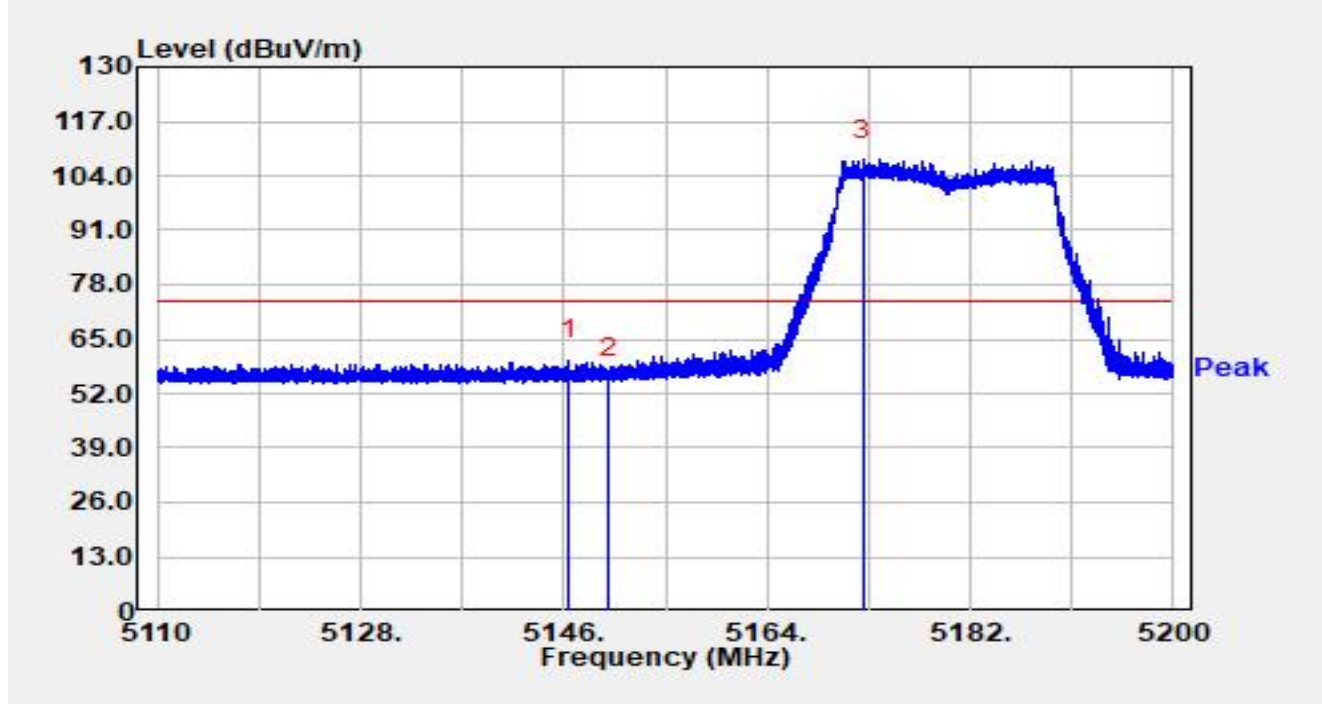


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.414	40.21	19.75	59.96	-14.04	74.00	Peak
2		5150.000	35.99	19.78	55.77	-18.23	74.00	Peak
3		5172.487	88.05	19.77	107.82	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5180MHz		

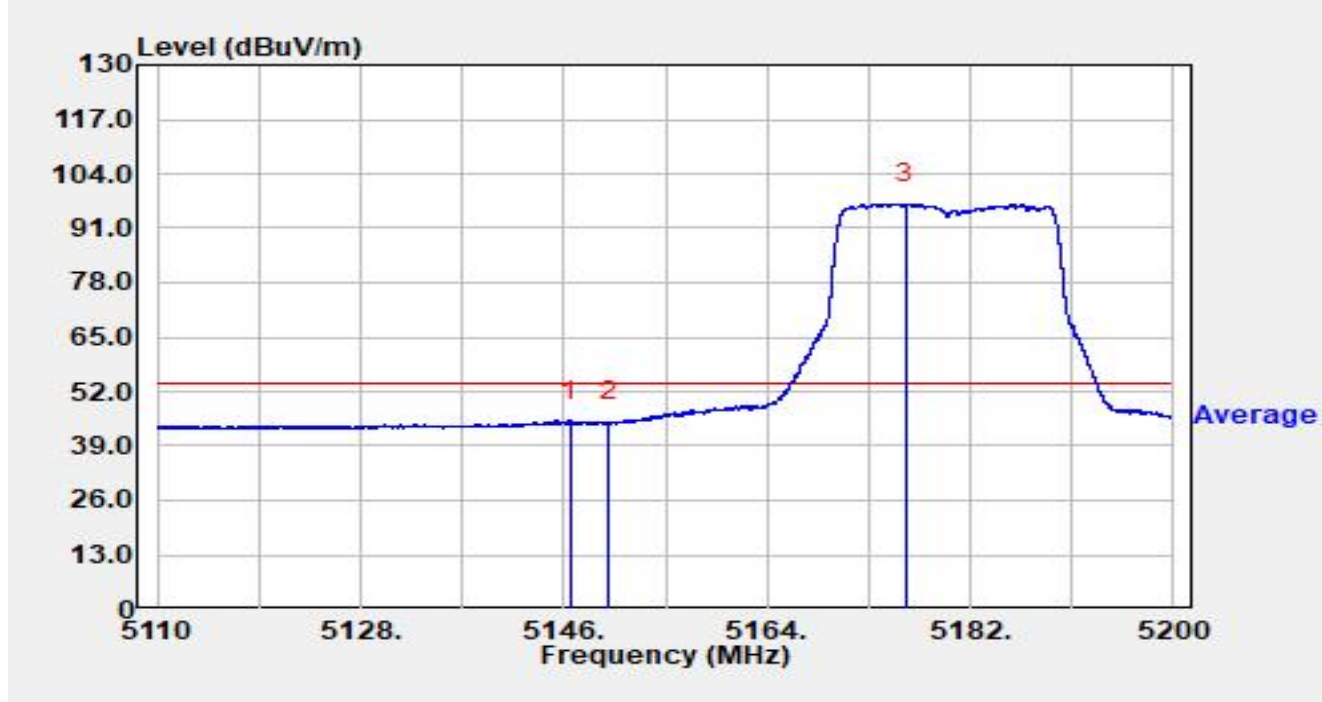


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.513	25.30	19.75	45.05	-8.95	54.00	Average
2		5150.000	24.92	19.78	44.70	-9.30	54.00	Average
3		5176.312	76.99	19.71	96.70	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5180MHz		

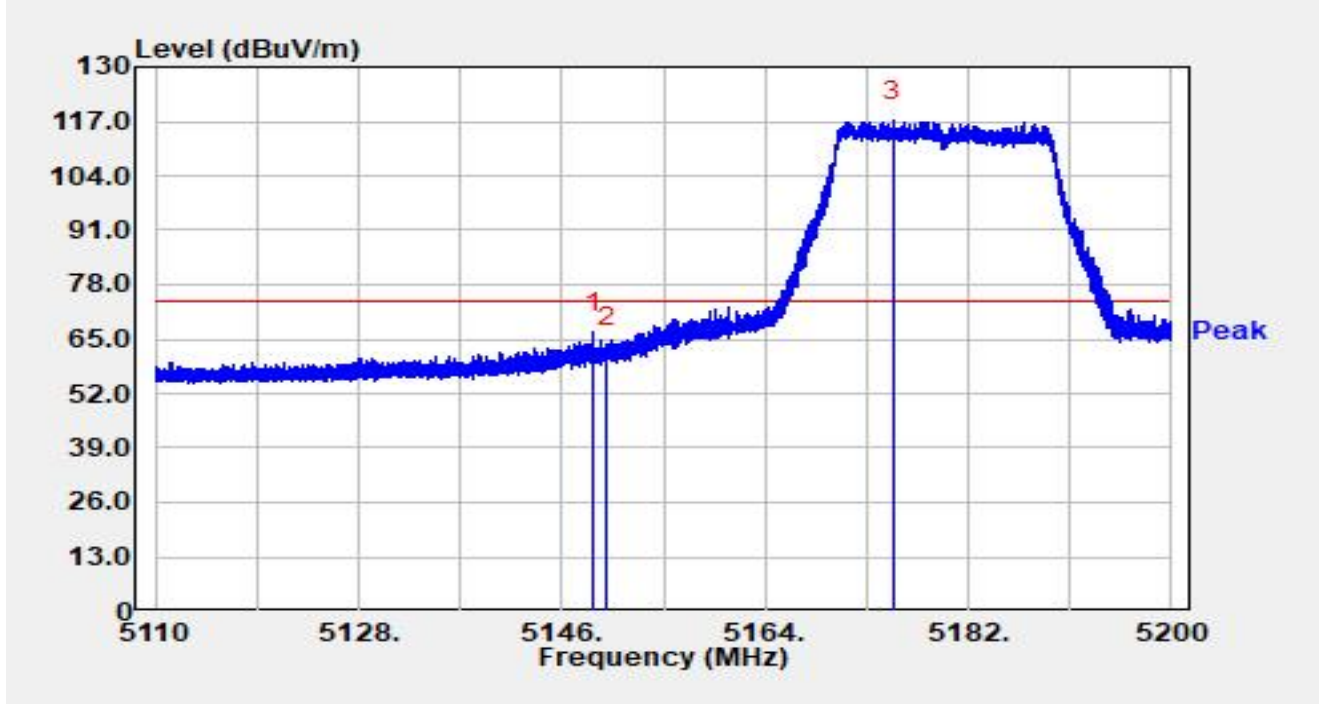


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.799	46.90	19.78	66.67	-7.33	74.00	Peak
2		5150.000	43.40	19.78	63.18	-10.82	74.00	Peak
3		5175.340	97.40	19.72	117.12	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5180MHz		

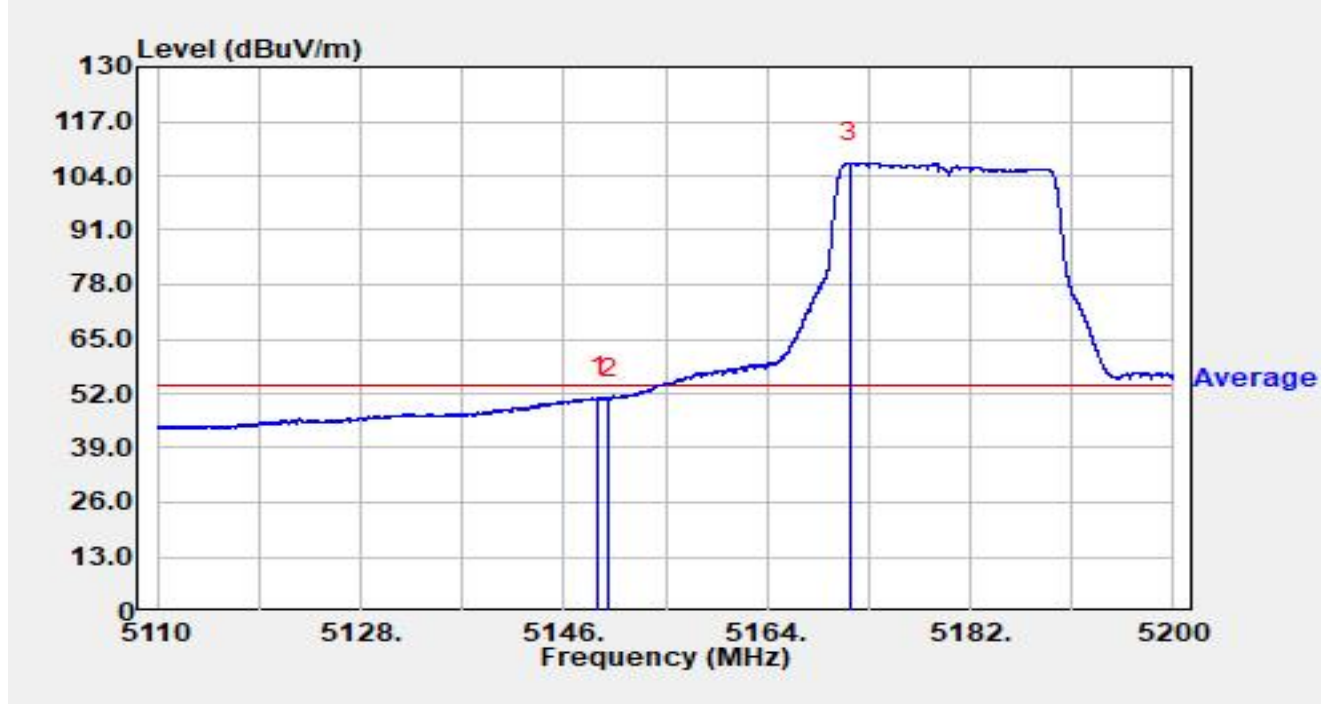


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.069	31.35	19.78	51.12	-2.88	54.00	Average
2		5150.000	30.89	19.78	50.68	-3.32	54.00	Average
3		5171.353	87.34	19.78	107.12	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5320MHz		

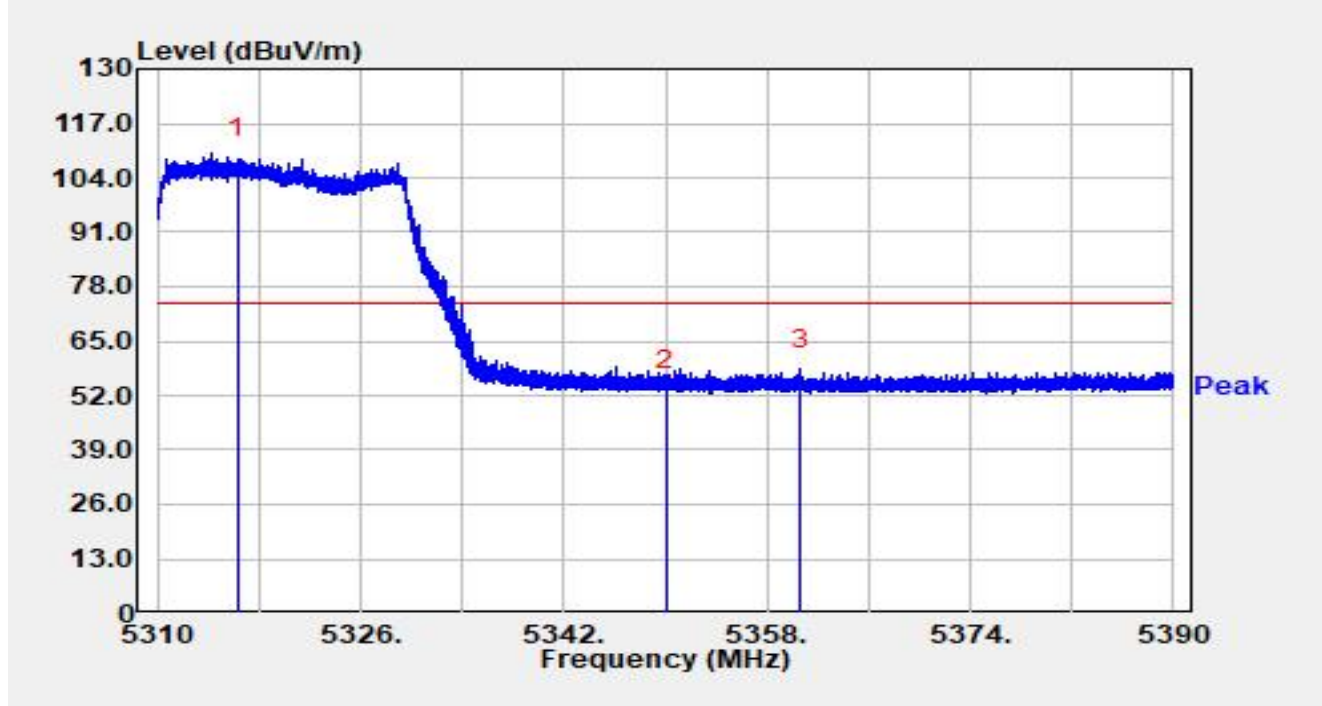


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5316.304	88.80	19.72	108.51	N/A	N/A	Peak
2		5350.000	33.93	19.40	53.33	-20.67	74.00	Peak
3	*	5360.672	38.93	19.32	58.25	-15.75	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5320MHz		

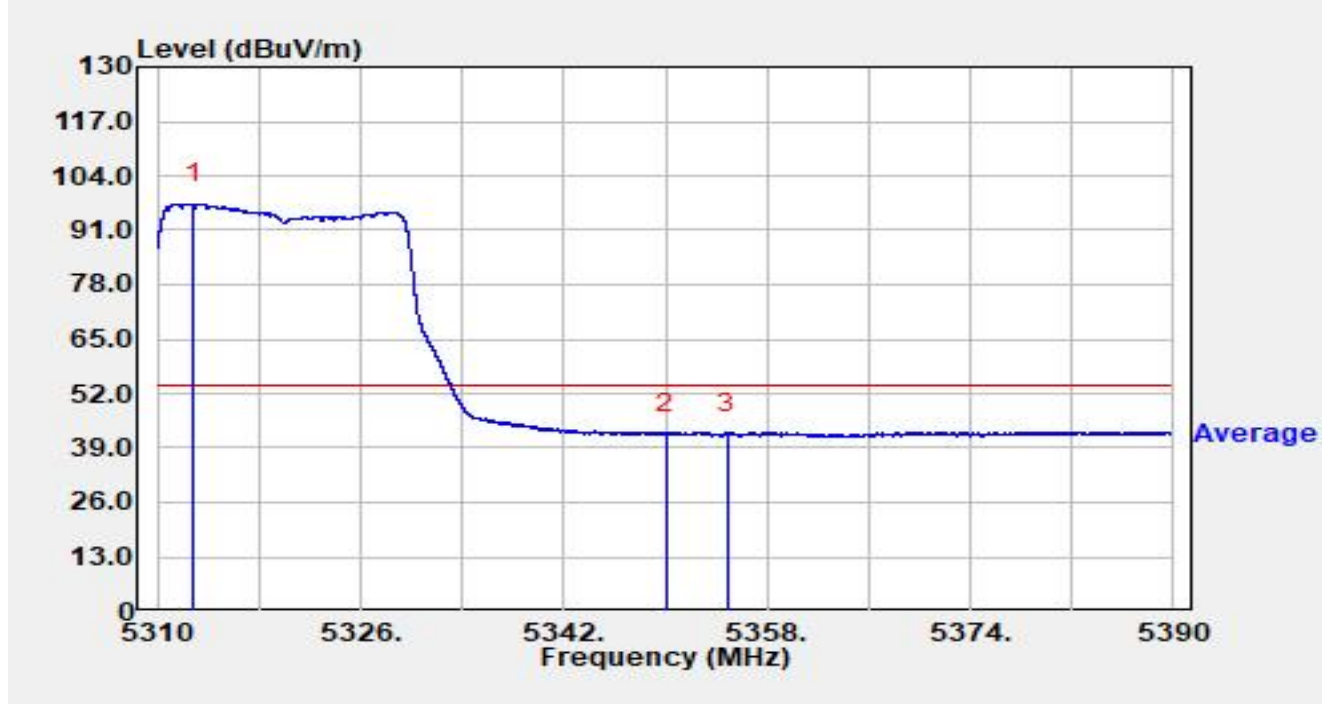


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5312.816	77.67	19.63	97.29	N/A	N/A	Average
2		5350.000	22.98	19.40	42.38	-11.62	54.00	Average
3	*	5354.872	23.30	19.34	42.65	-11.35	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5320MHz		

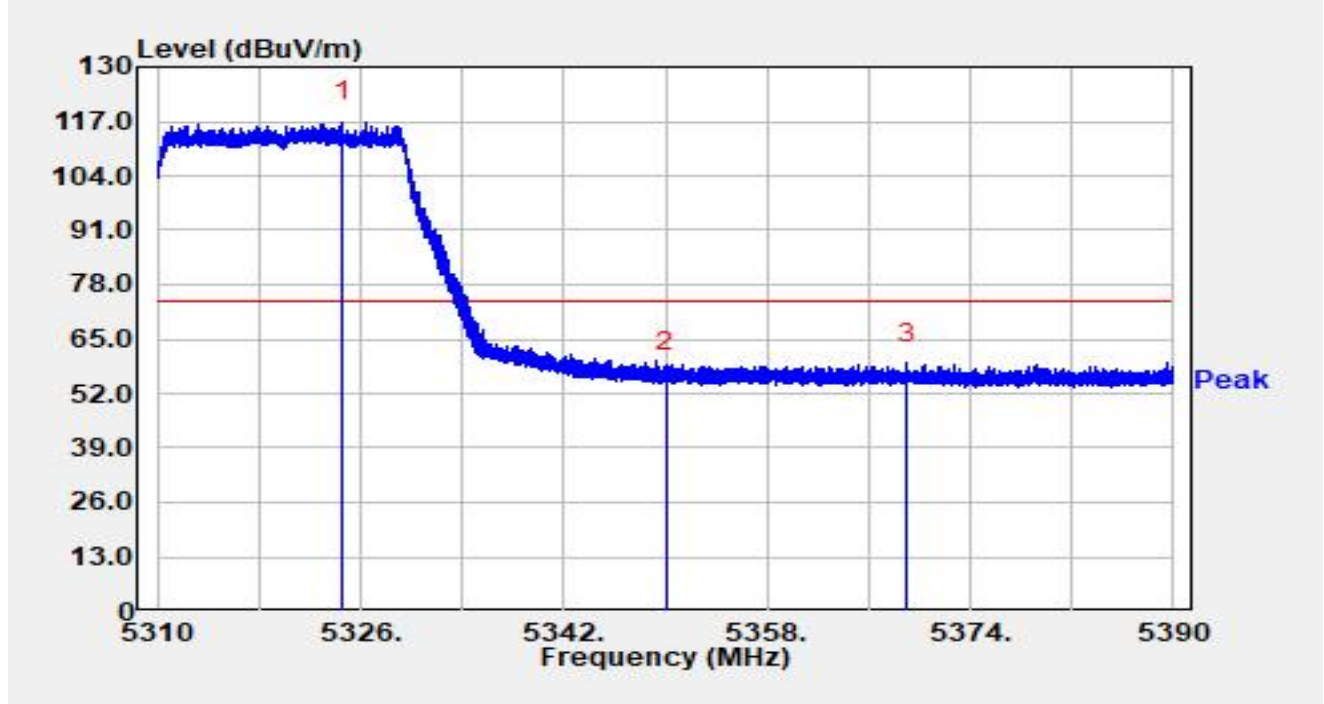


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5324.600	97.15	19.80	116.95	N/A	N/A	Peak
2		5350.000	37.85	19.40	57.25	-16.75	74.00	Peak
3	*	5369.024	39.83	19.32	59.15	-14.85	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5320MHz		

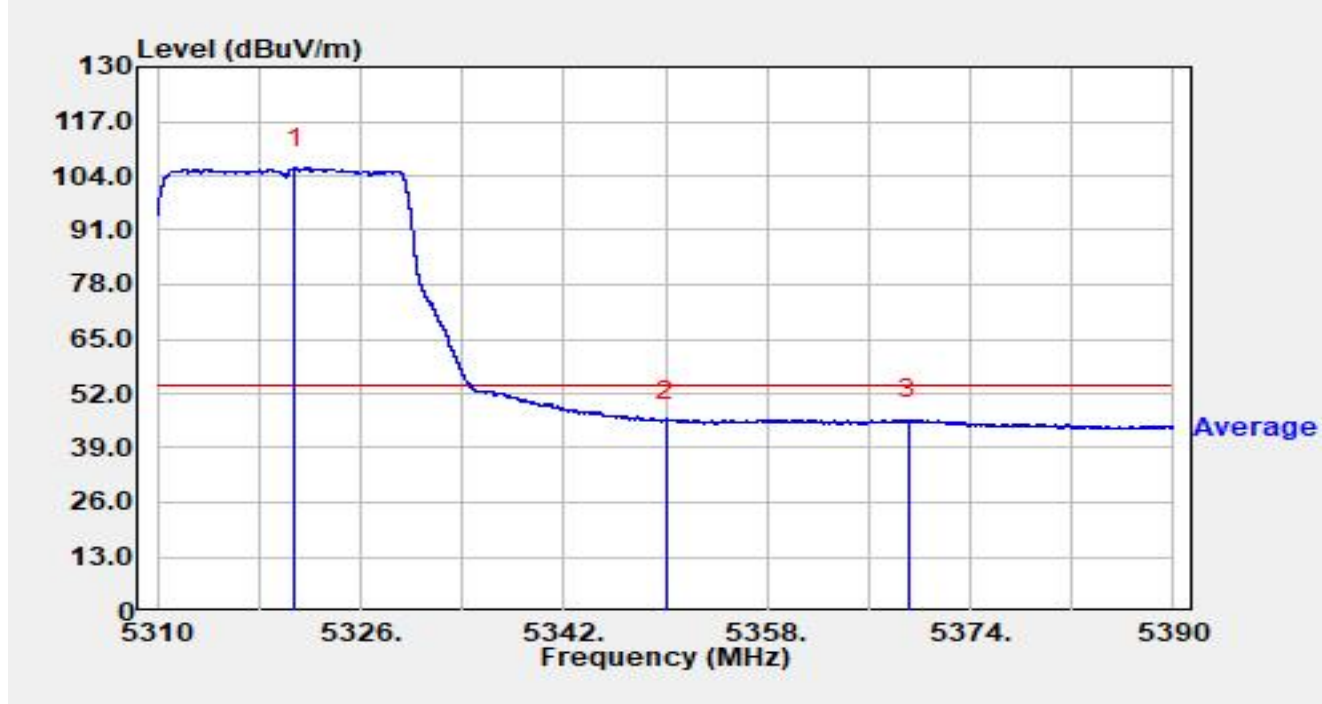


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5320.768	86.06	19.78	105.84	N/A	N/A	Average
2		5350.000	26.22	19.40	45.62	-8.38	54.00	Average
3	*	5369.096	26.50	19.32	45.82	-8.18	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5500MHz		

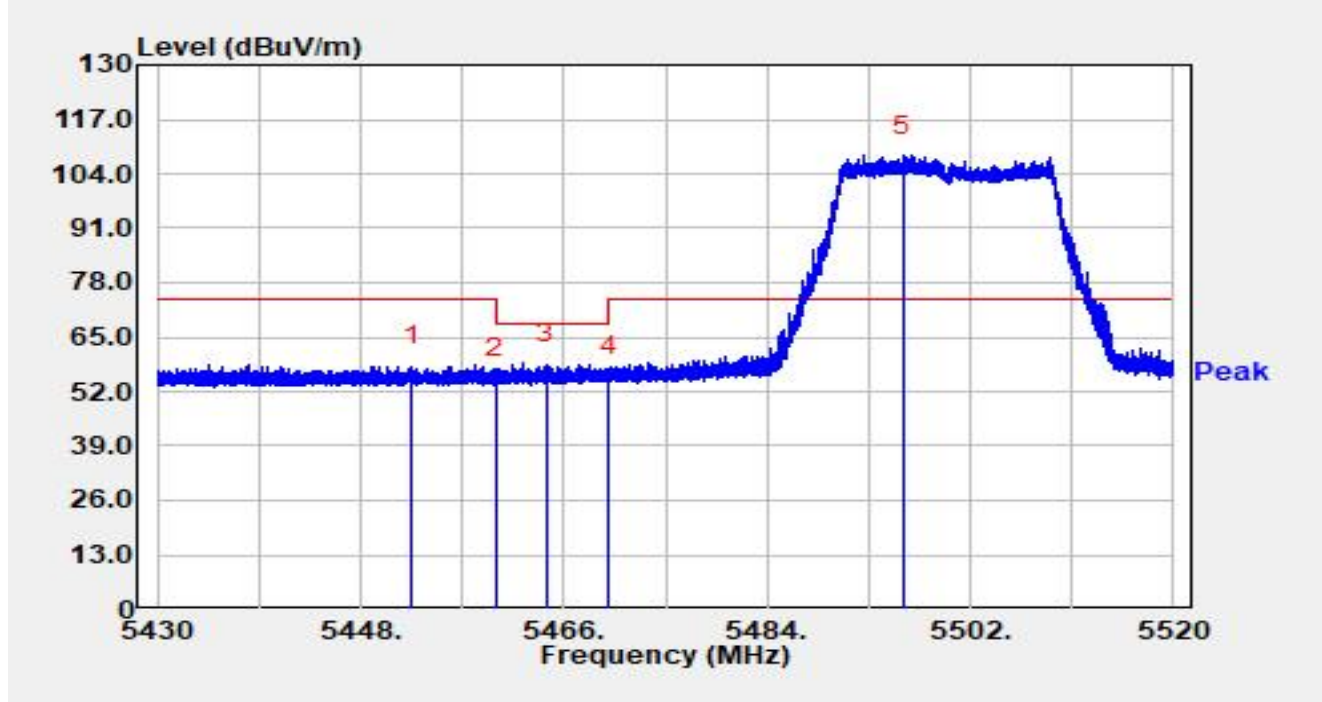


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5452.491	38.40	19.64	58.04	-15.96	74.00	Peak
2		5460.000	35.64	19.74	55.38	-12.82	68.20	Peak
3	*	5464.425	38.70	19.82	58.53	-9.67	68.20	Peak
4		5470.000	35.72	19.92	55.64	-12.56	68.20	Peak
5		5496.069	88.52	19.78	108.29	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5500MHz		

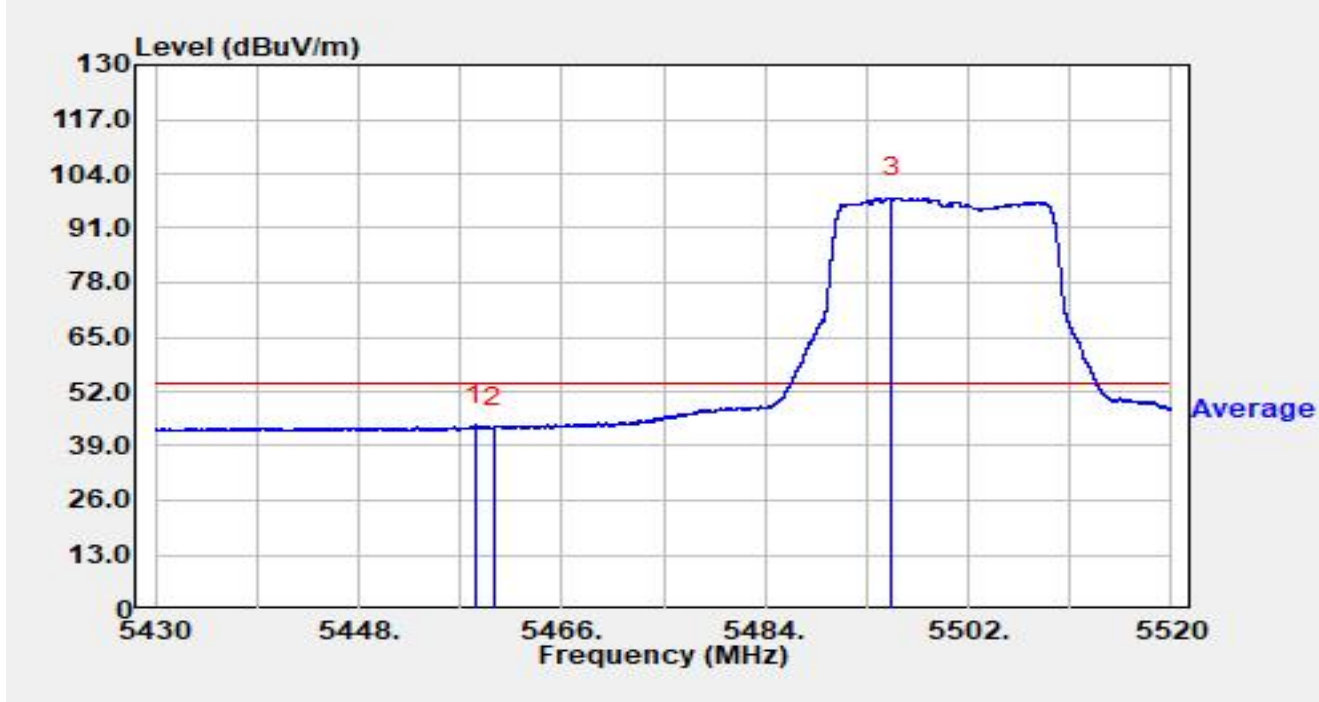


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.296	24.23	19.71	43.94	-10.06	54.00	Average
2		5460.000	23.52	19.74	43.26	-10.74	54.00	Average
3		5495.205	78.43	19.79	98.22	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5500MHz		

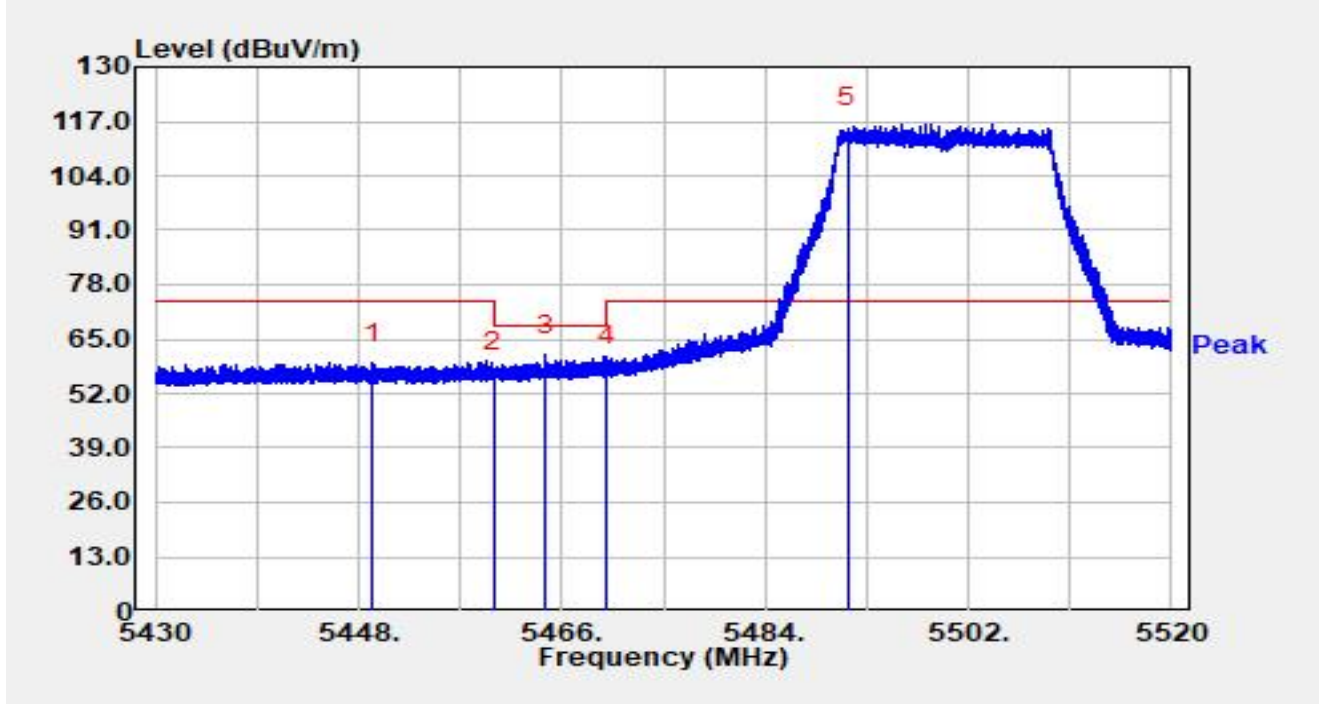


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5449.233	39.65	19.65	59.30	-14.70	74.00	Peak
2		5460.000	37.22	19.74	56.97	-11.23	68.20	Peak
3	*	5464.605	41.40	19.82	61.22	-6.98	68.20	Peak
4		5470.000	38.90	19.92	58.82	-9.38	68.20	Peak
5		5491.290	95.55	19.83	115.38	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5500MHz		

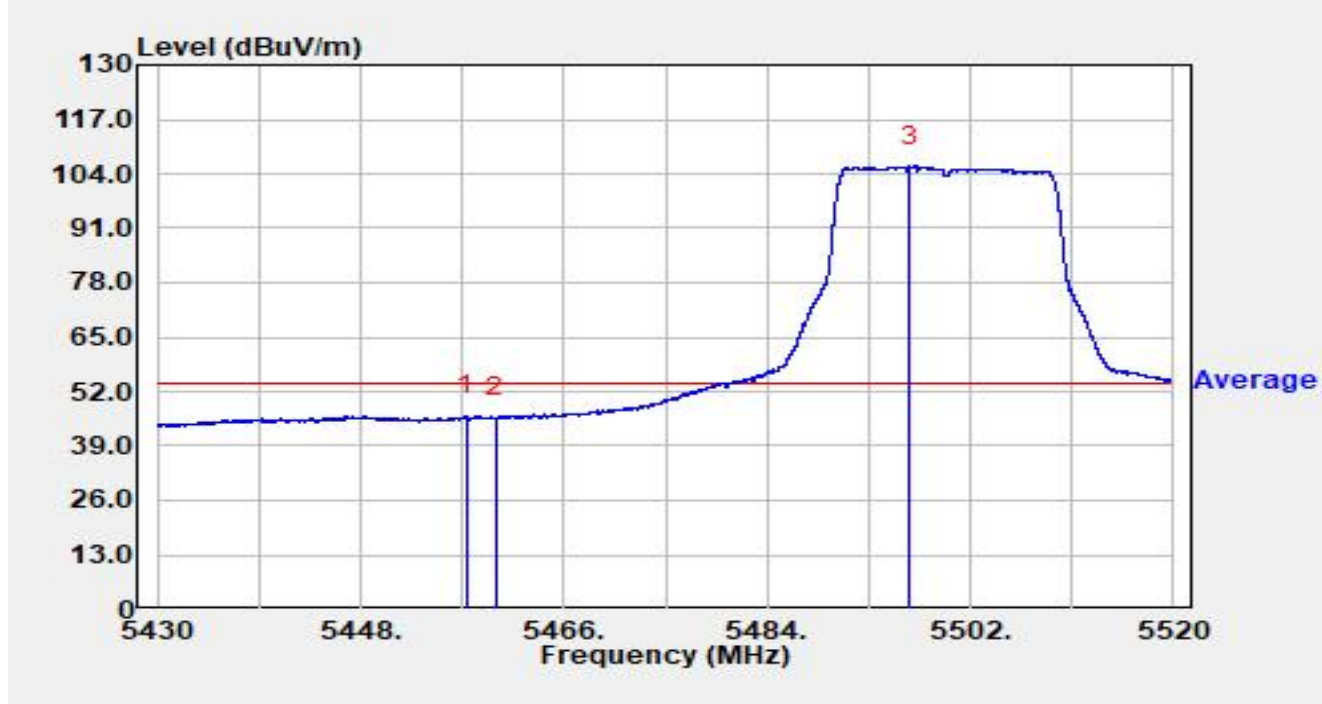


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.405	26.44	19.70	46.14	-7.86	54.00	Average
2		5460.000	25.95	19.74	45.69	-8.31	54.00	Average
3		5496.681	85.97	19.77	105.74	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5700MHz		

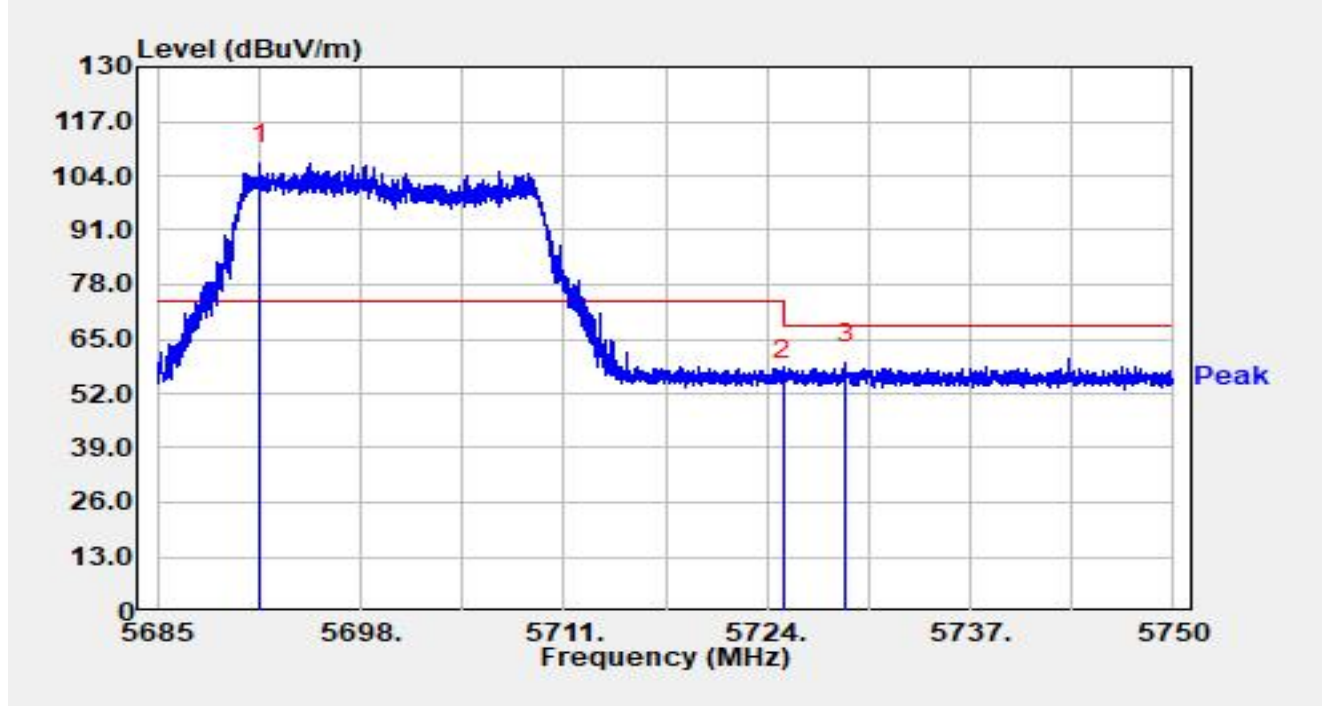


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5691.559	86.00	20.83	106.83	N/A	N/A	Peak
2		5725.000	33.71	21.24	54.95	-13.25	68.20	Peak
3	*	5728.999	38.03	21.22	59.24	-8.96	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5700MHz		

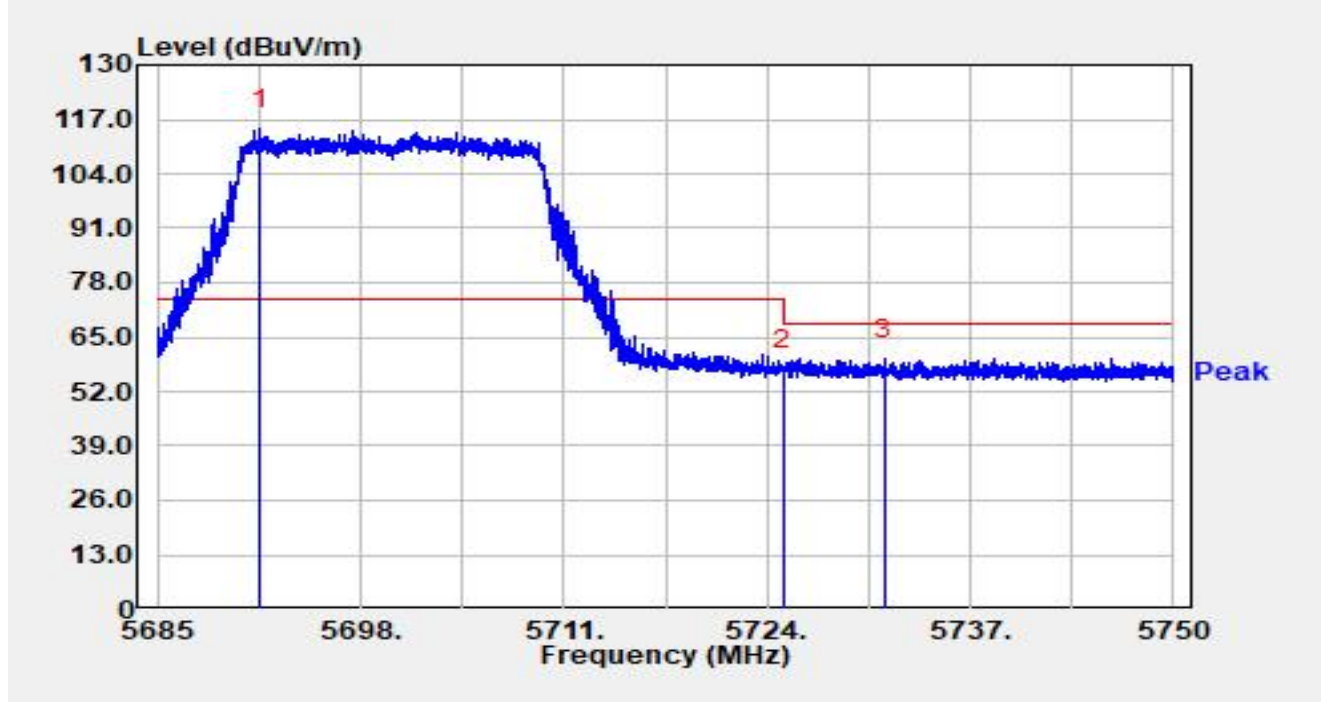


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5691.545	93.74	20.83	114.57	N/A	N/A	Peak
2		5725.000	36.00	21.24	57.24	-10.96	68.20	Peak
3	*	5731.521	38.51	21.19	59.70	-8.50	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5.8G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5745MHz		

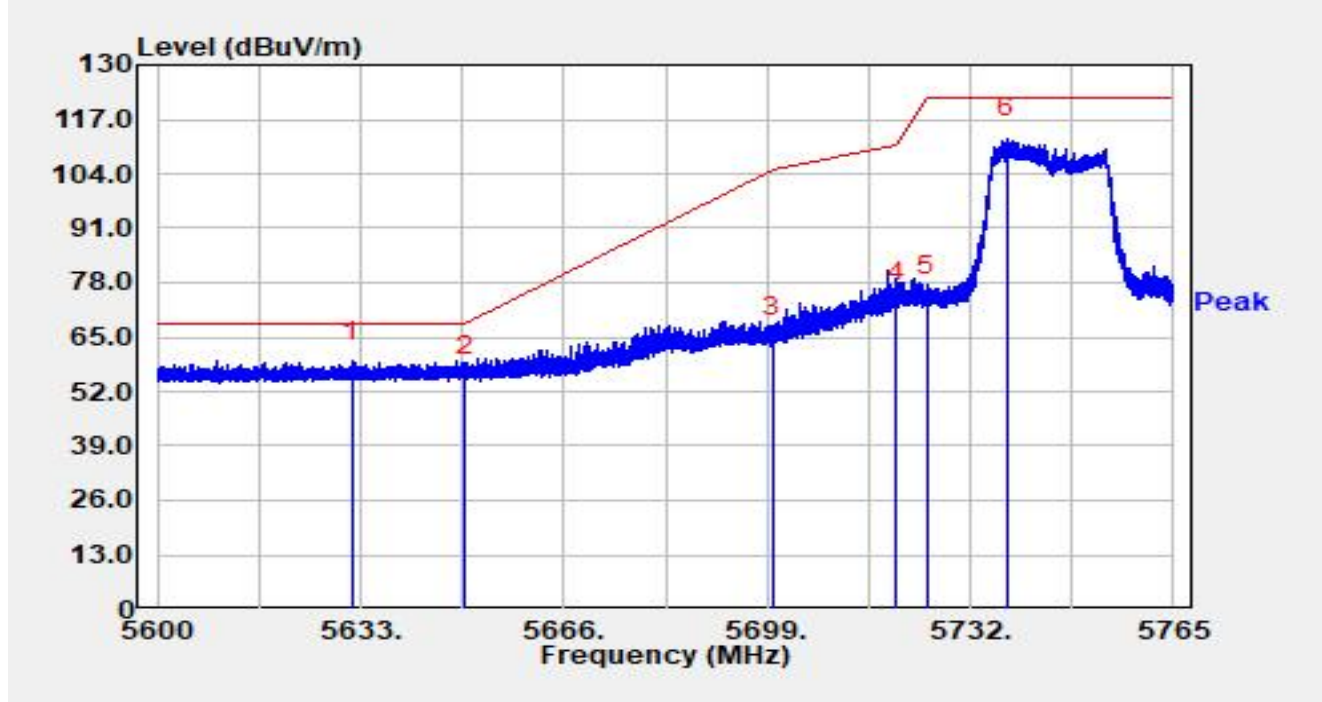


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5631.515	38.65	20.60	59.24	-8.96	68.20	Peak
2		5650.000	35.12	20.60	55.72	-12.48	68.20	Peak
3		5700.000	43.82	20.96	64.78	-40.42	105.20	Peak
4		5720.000	52.28	21.20	73.48	-37.32	110.80	Peak
5		5725.000	53.64	21.24	74.88	-47.32	122.20	Peak
6		5737.940	91.32	21.12	112.44	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5.8G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5745MHz		

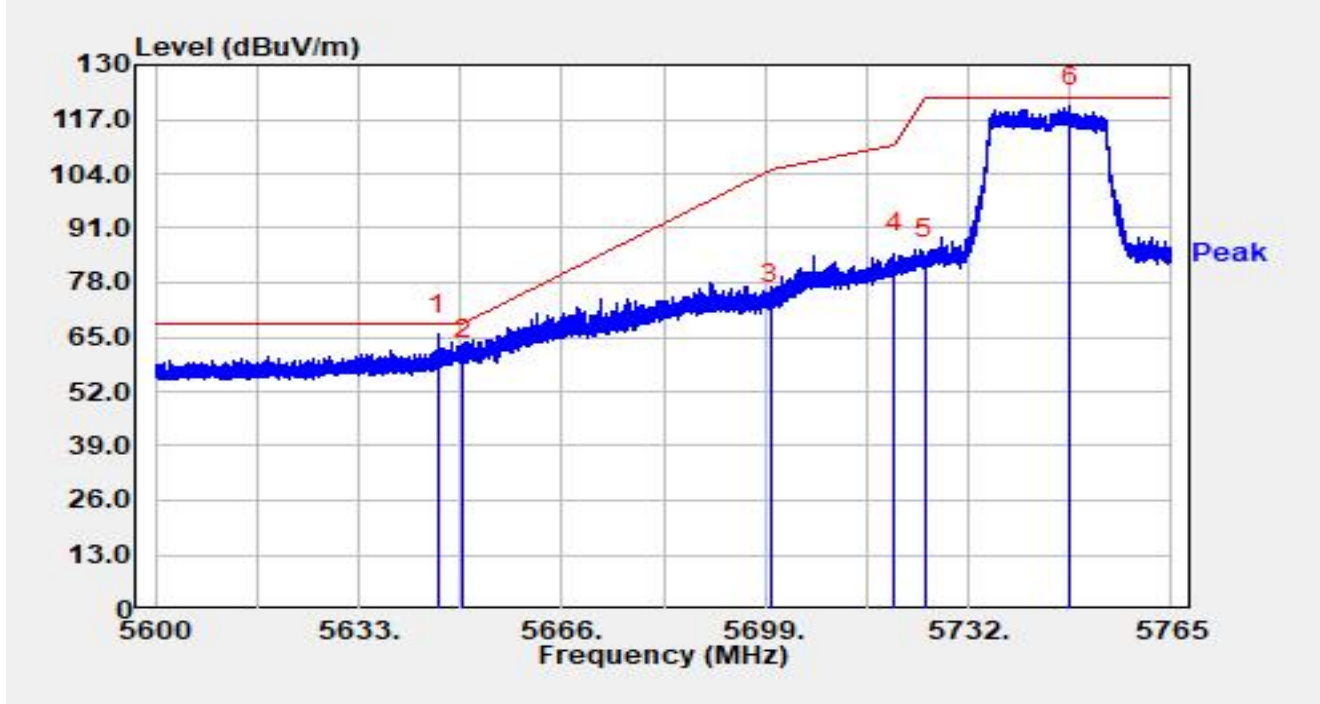


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5645.820	44.98	20.64	65.62	-2.58	68.20	Peak
2		5650.000	39.12	20.60	59.72	-8.48	68.20	Peak
3		5700.000	52.02	20.96	72.99	-32.21	105.20	Peak
4		5720.000	63.74	21.20	84.93	-25.87	110.80	Peak
5		5725.000	62.41	21.24	83.65	-38.55	122.20	Peak
6		5748.632	99.08	21.09	120.17	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5.8G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5825MHz		

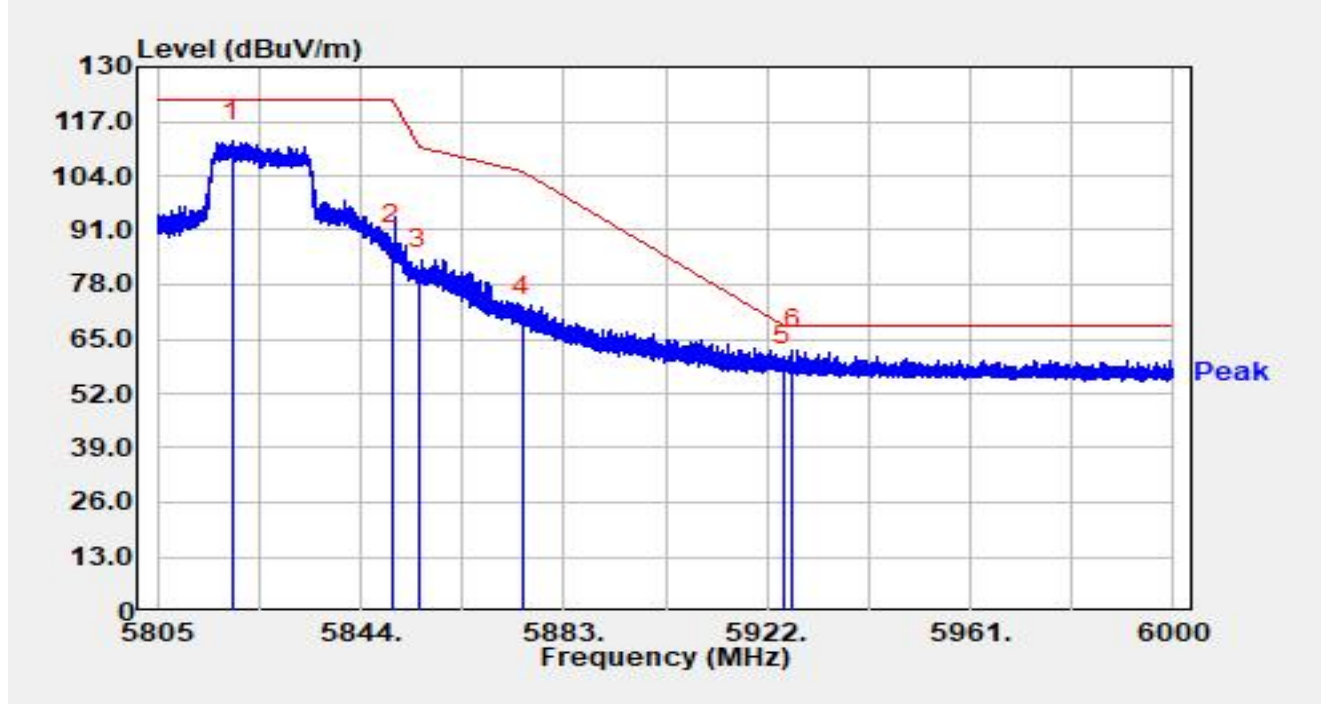


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5819.469	90.86	21.41	112.28	N/A	N/A	Peak
2		5850.000	66.16	21.49	87.65	-34.55	122.20	Peak
3		5855.000	59.96	21.54	81.49	-29.31	110.80	Peak
4		5875.000	48.94	21.60	70.54	-34.66	105.20	Peak
5		5925.000	36.99	21.59	58.58	-9.62	68.20	Peak
6	*	5926.875	40.82	21.60	62.42	-5.78	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5.8G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5825MHz		

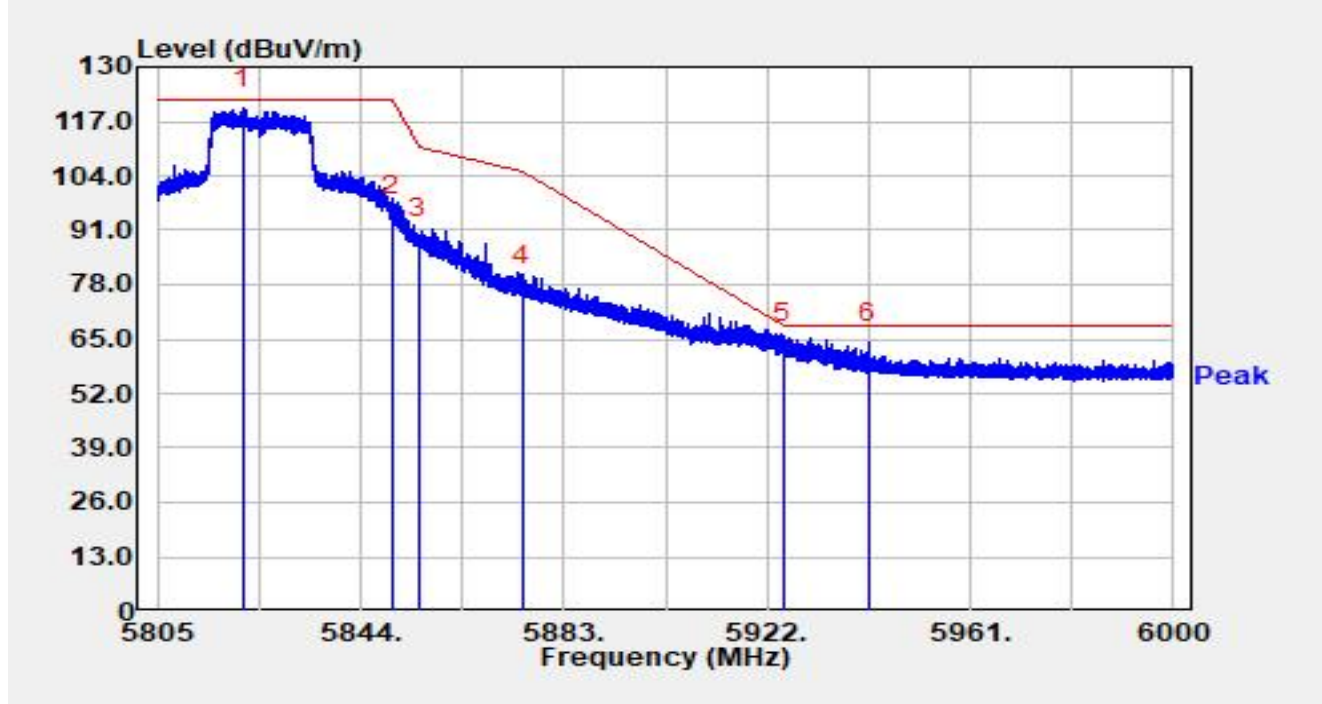


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5821.341	98.62	21.40	120.02	N/A	N/A	Peak
2		5850.000	73.16	21.49	94.64	-27.56	122.20	Peak
3		5855.000	67.48	21.54	89.02	-21.78	110.80	Peak
4		5875.000	56.37	21.60	77.97	-27.23	105.20	Peak
5		5925.000	42.32	21.59	63.91	-4.29	68.20	Peak
6	*	5941.363	42.53	21.64	64.17	-4.03	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5190MHz		

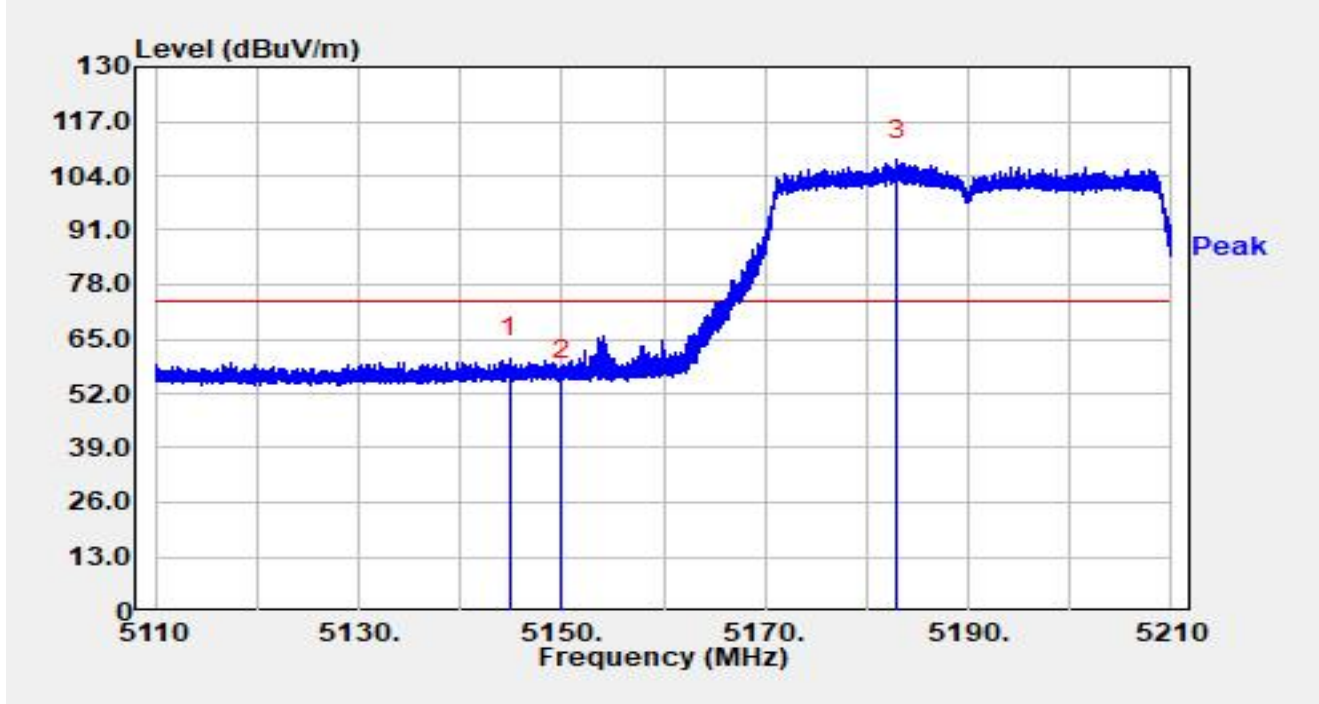


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5144.830	40.79	19.73	60.52	-13.48	74.00	Peak
2		5150.000	35.47	19.78	55.25	-18.75	74.00	Peak
3		5183.030	88.19	19.60	107.78	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5190MHz		

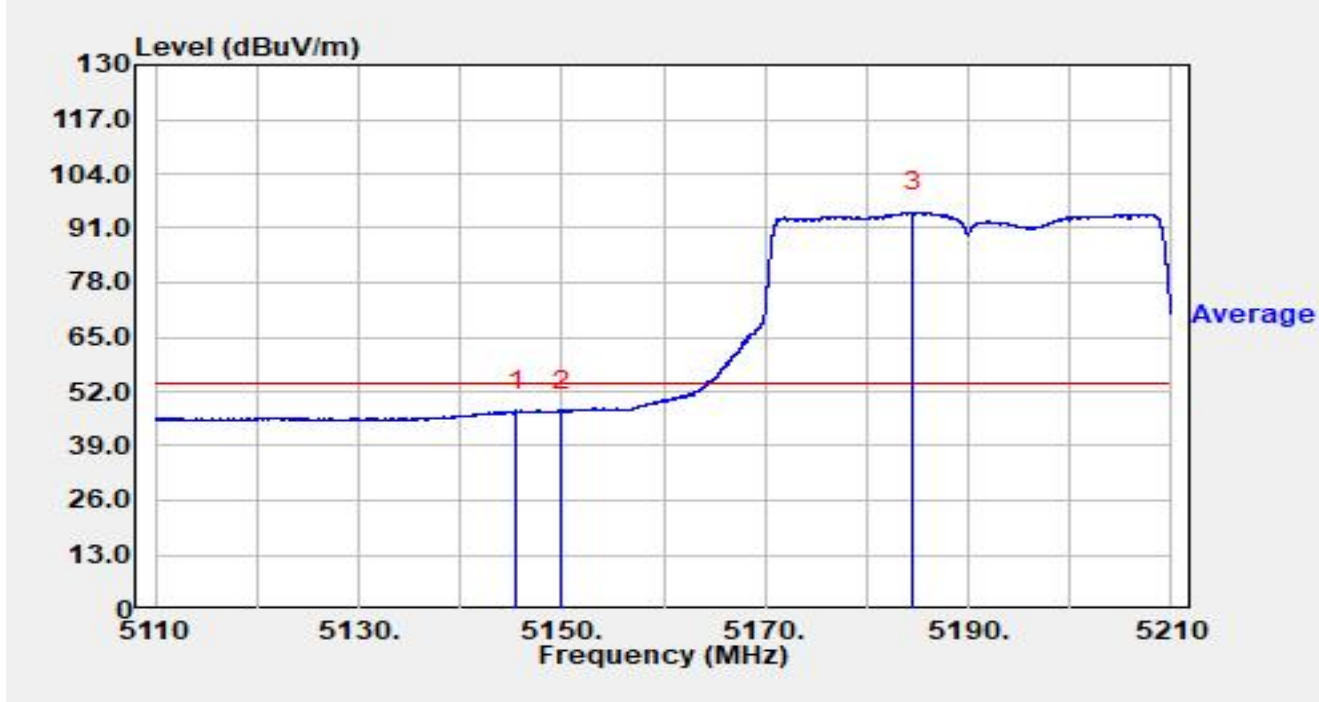


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5145.530	27.62	19.74	47.36	-6.64	54.00	Average
2		5150.000	27.58	19.78	47.36	-6.64	54.00	Average
3	*	5184.600	75.33	19.57	94.89	40.89	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5190MHz		

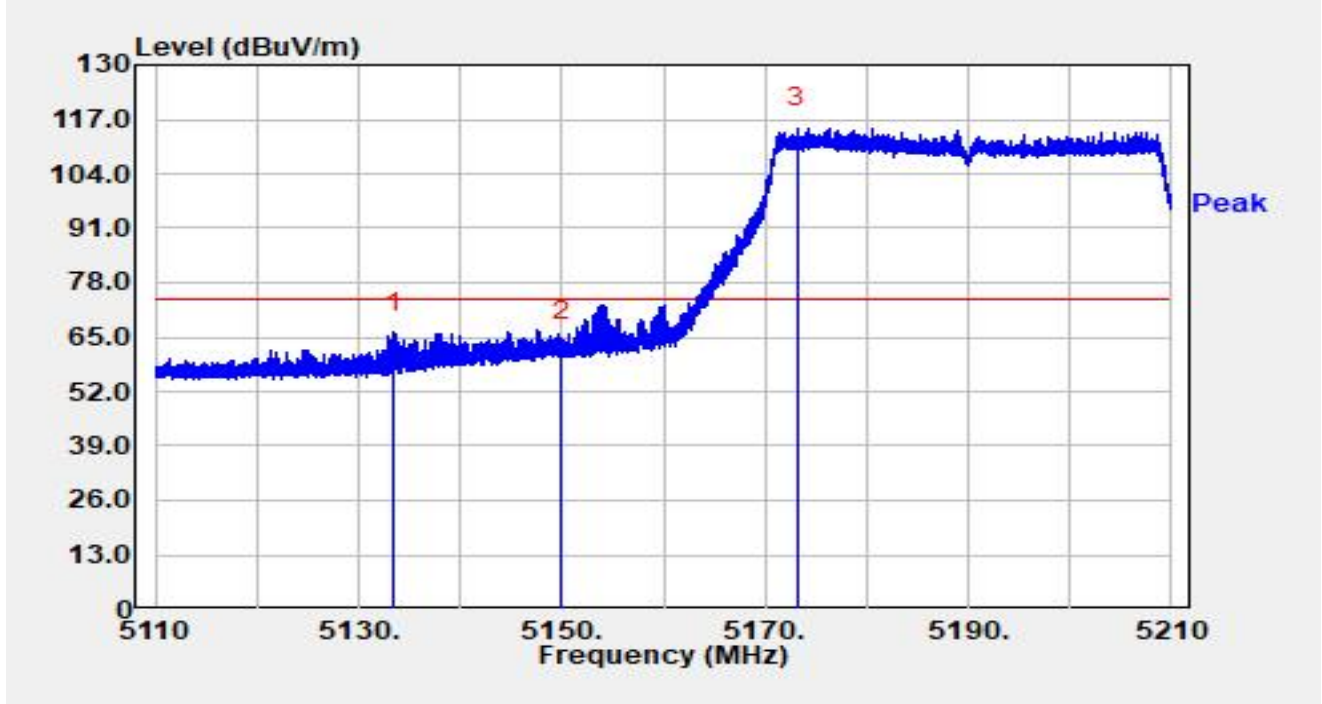


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5133.520	46.59	19.58	66.16	-7.84	74.00	Peak
2		5150.000	44.14	19.78	63.92	-10.08	74.00	Peak
3		5173.140	95.21	19.76	114.96	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5190MHz		

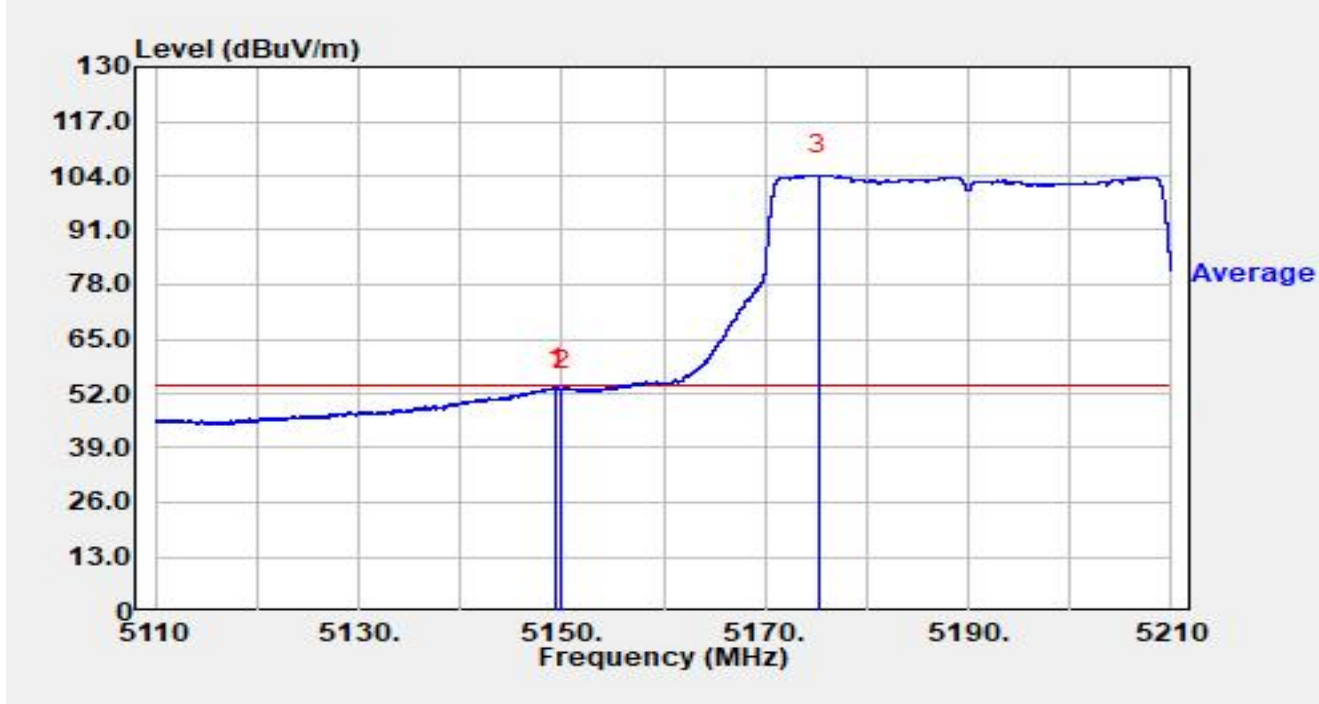


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.430	33.55	19.78	53.33	-0.67	54.00	Average
2		5150.000	33.20	19.78	52.98	-1.02	54.00	Average
3		5175.290	84.39	19.72	104.12	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5310MHz		

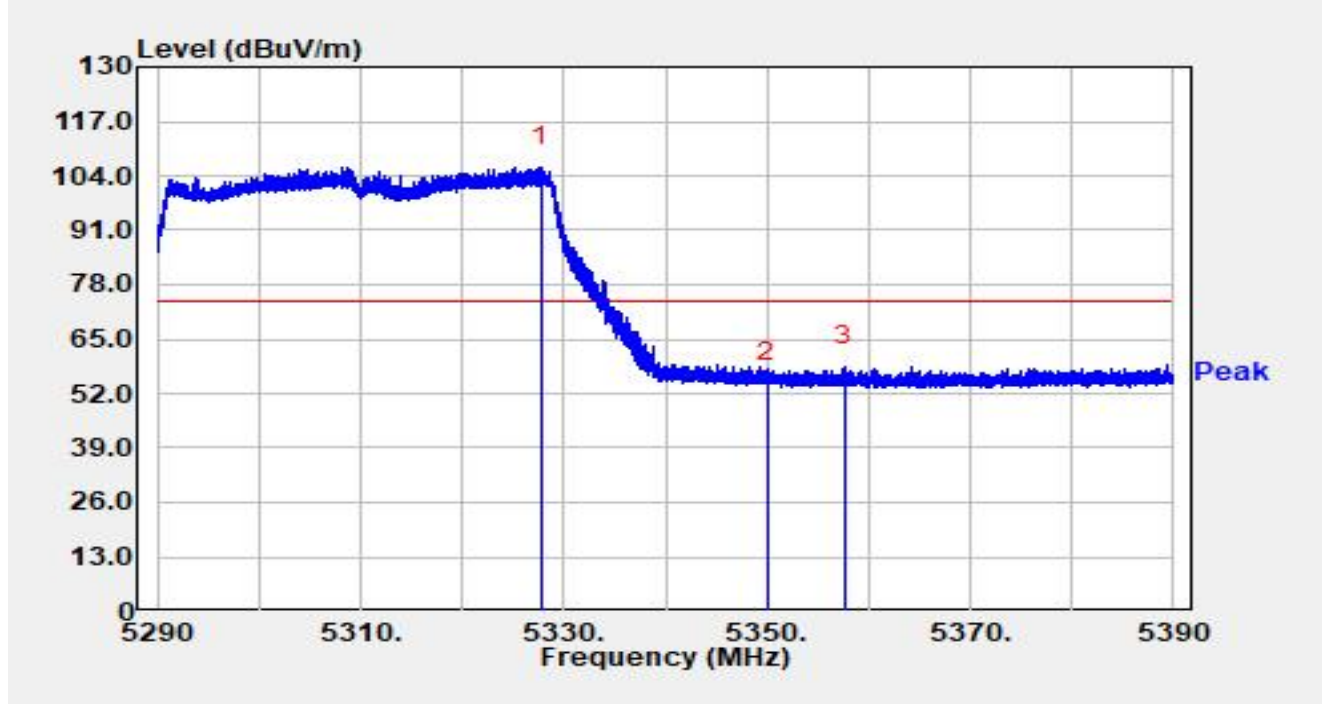


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.790	86.35	19.82	106.17	N/A	N/A	Peak
2		5350.000	35.46	19.40	54.86	-19.14	74.00	Peak
3	*	5357.560	39.25	19.33	58.58	-15.42	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5310MHz		

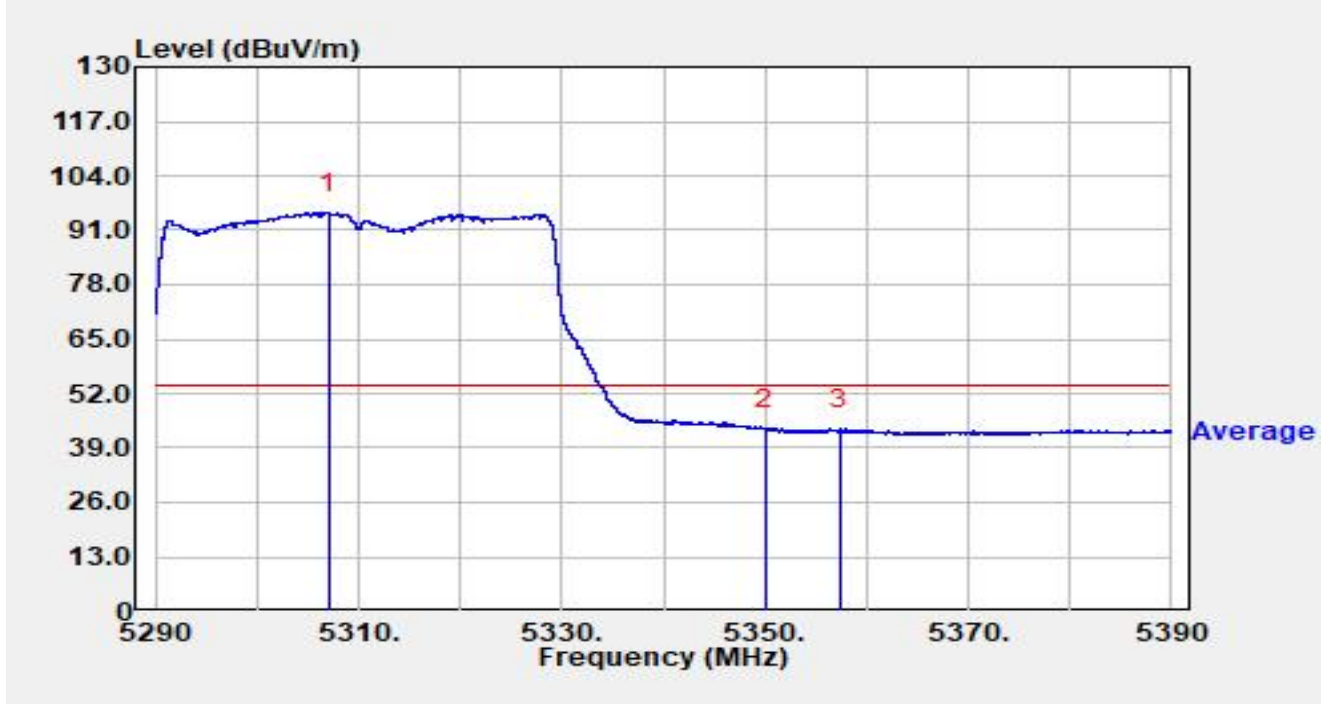


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5307.040	75.62	19.51	95.13	N/A	N/A	Average
2	*	5350.000	24.25	19.40	43.65	-10.35	54.00	Average
3		5357.350	24.13	19.34	43.46	-10.54	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5310MHz		

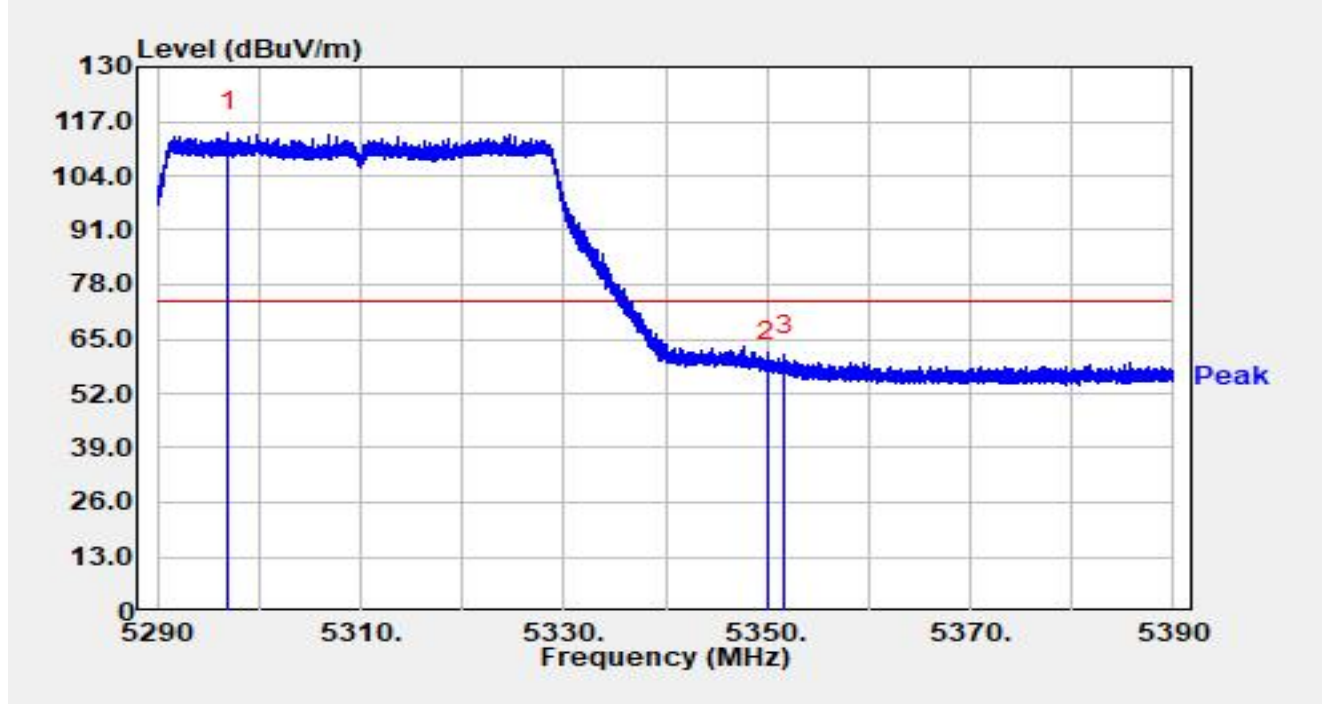


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5296.970	95.01	19.33	114.33	N/A	N/A	Peak
2		5350.000	40.16	19.40	59.56	-14.44	74.00	Peak
3	*	5351.680	41.72	19.36	61.08	-12.92	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5310MHz		

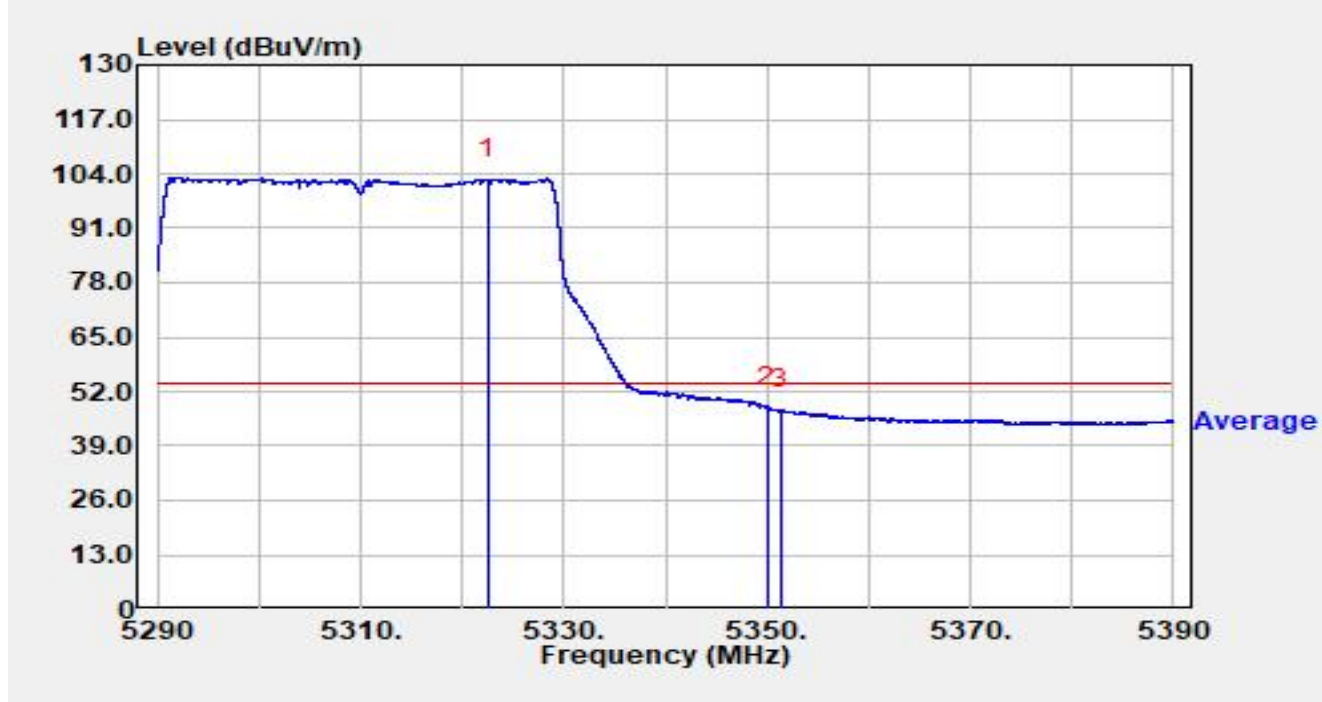


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5322.460	82.97	19.79	102.76	N/A	N/A	Average
2	*	5350.000	28.88	19.40	48.28	-5.72	54.00	Average
3		5351.270	28.25	19.37	47.62	-6.38	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5510MHz		

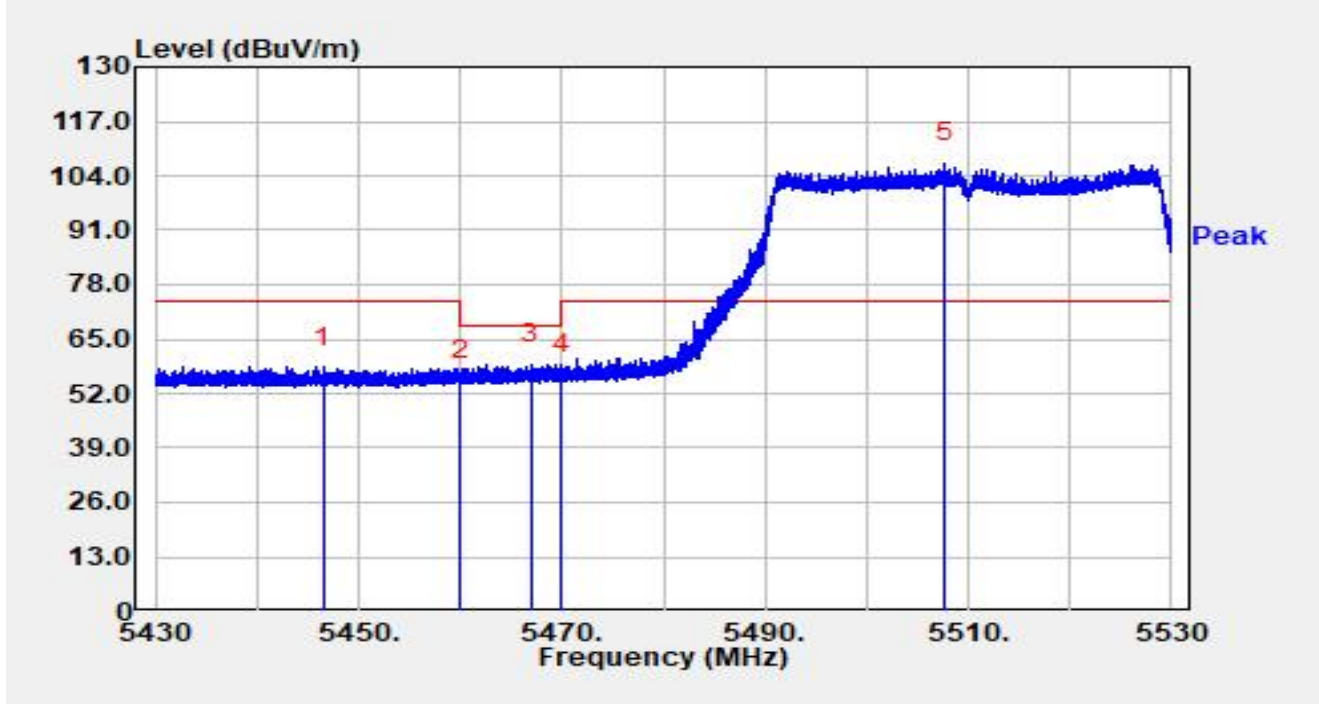


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5446.560	38.67	19.65	58.32	-15.68	74.00	Peak
2		5460.000	35.42	19.74	55.16	-13.04	68.20	Peak
3	*	5466.990	39.07	19.87	58.93	-9.27	68.20	Peak
4		5470.000	36.53	19.92	56.46	-11.74	68.20	Peak
5		5507.660	87.46	19.62	107.09	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5510MHz		

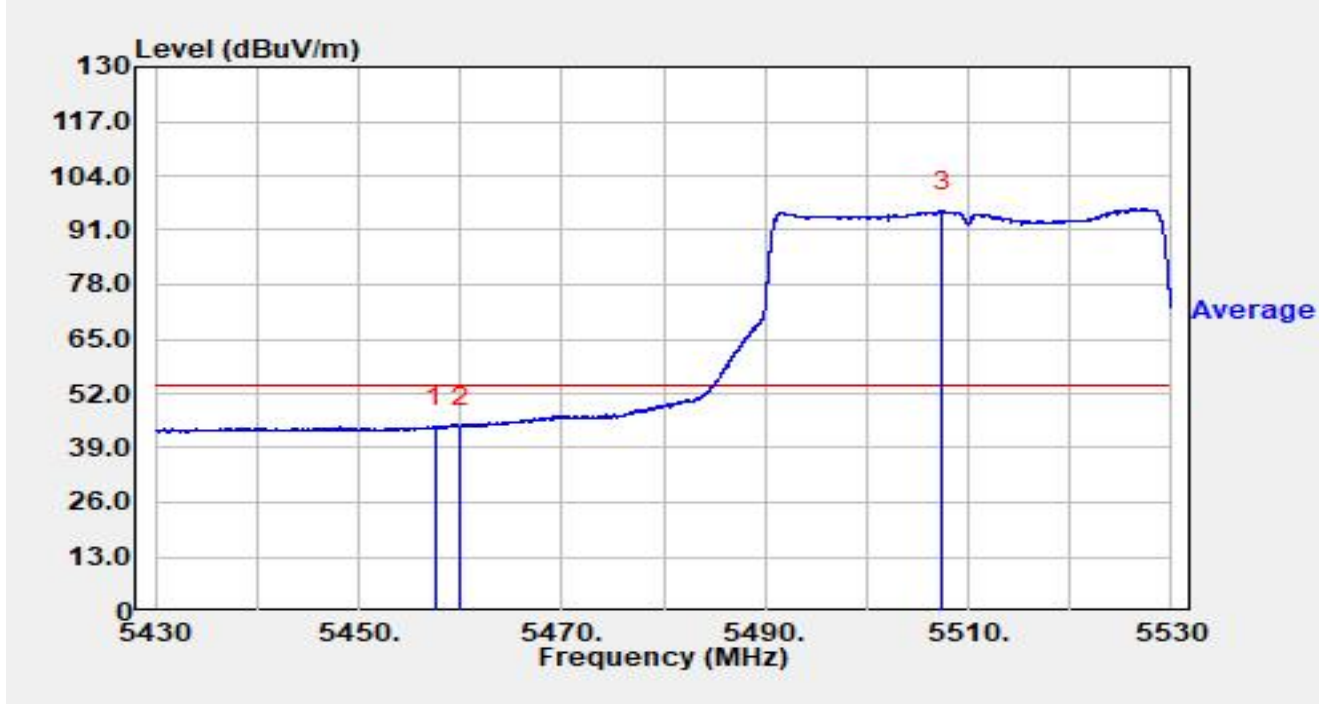


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.490	24.44	19.70	44.14	-9.86	54.00	Average
2		5460.000	24.30	19.74	44.04	-9.96	54.00	Average
3		5507.420	75.83	19.63	95.46	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5510MHz		

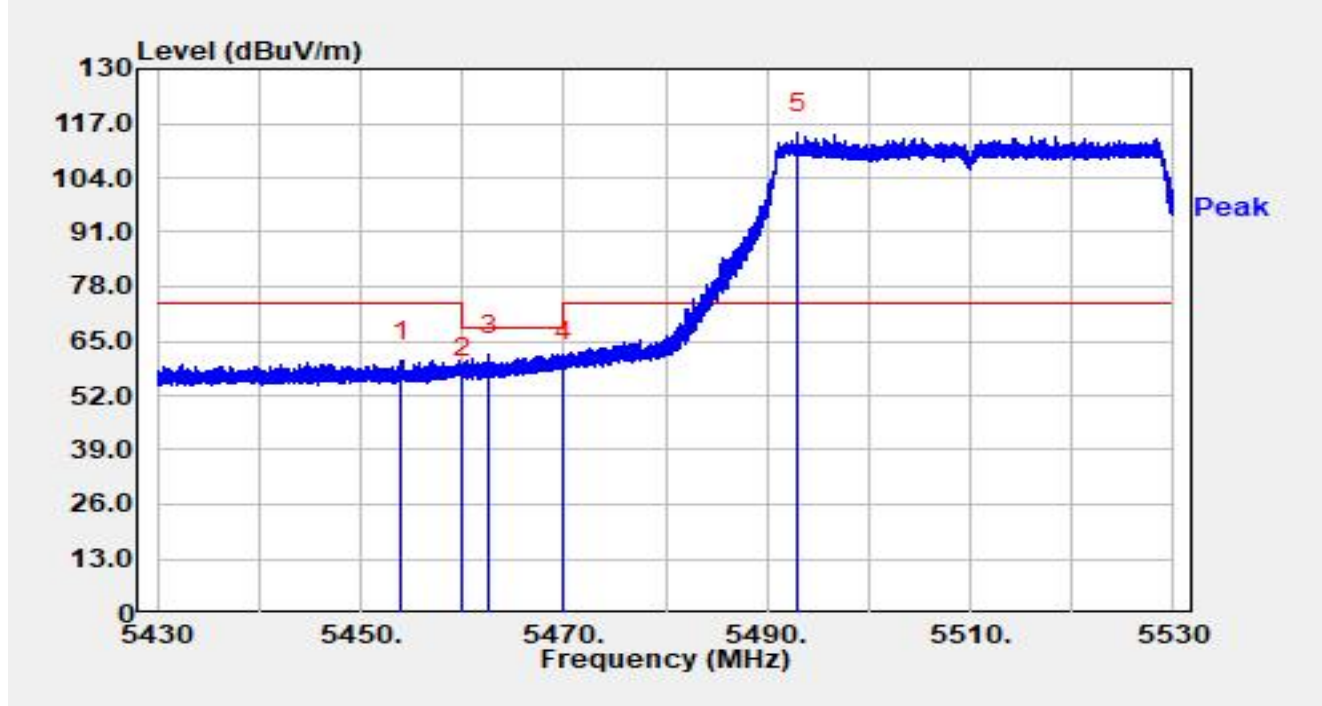


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5453.950	40.60	19.63	60.23	-13.77	74.00	Peak
2		5460.000	36.59	19.74	56.33	-11.87	68.20	Peak
3	*	5462.580	41.89	19.79	61.68	-6.52	68.20	Peak
4		5470.000	40.25	19.92	60.17	-8.03	68.20	Peak
5		5492.990	94.92	19.82	114.74	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5510MHz		

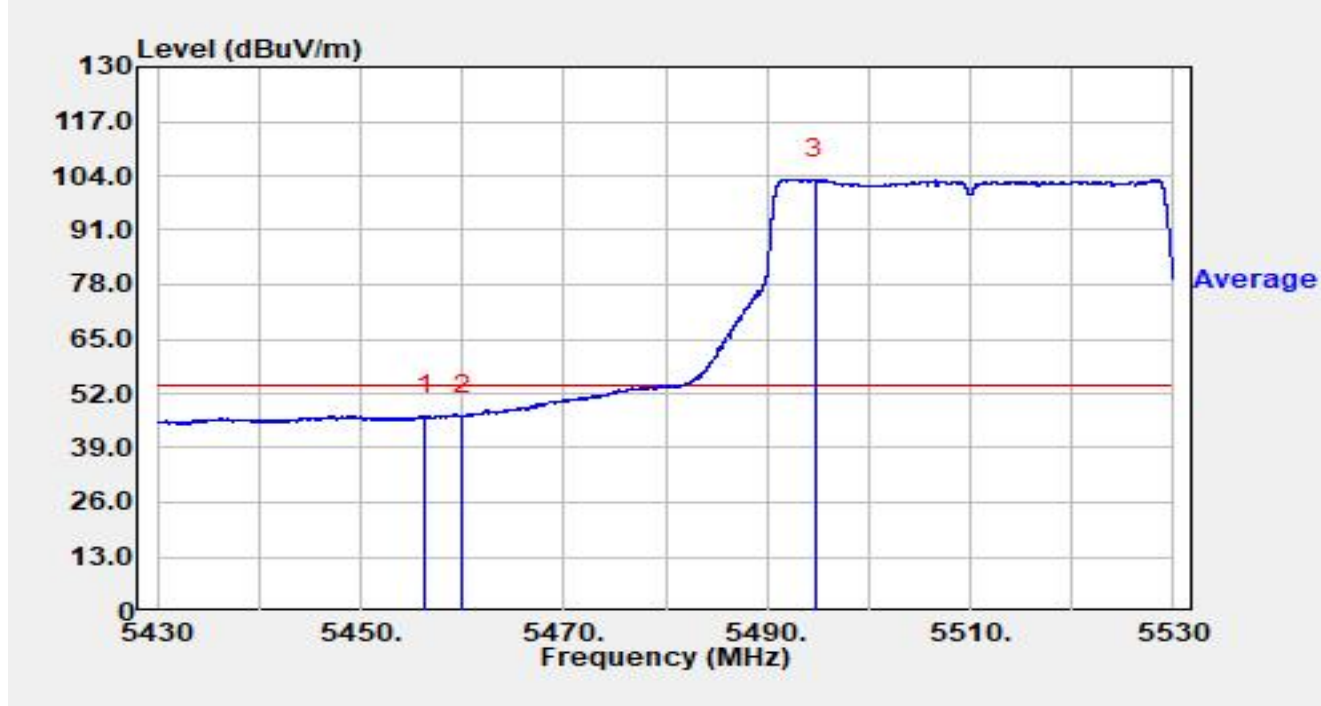


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5456.300	26.95	19.68	46.63	-7.37	54.00	Average
2		5460.000	26.88	19.74	46.63	-7.37	54.00	Average
3		5494.730	83.25	19.79	103.05	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5670MHz		

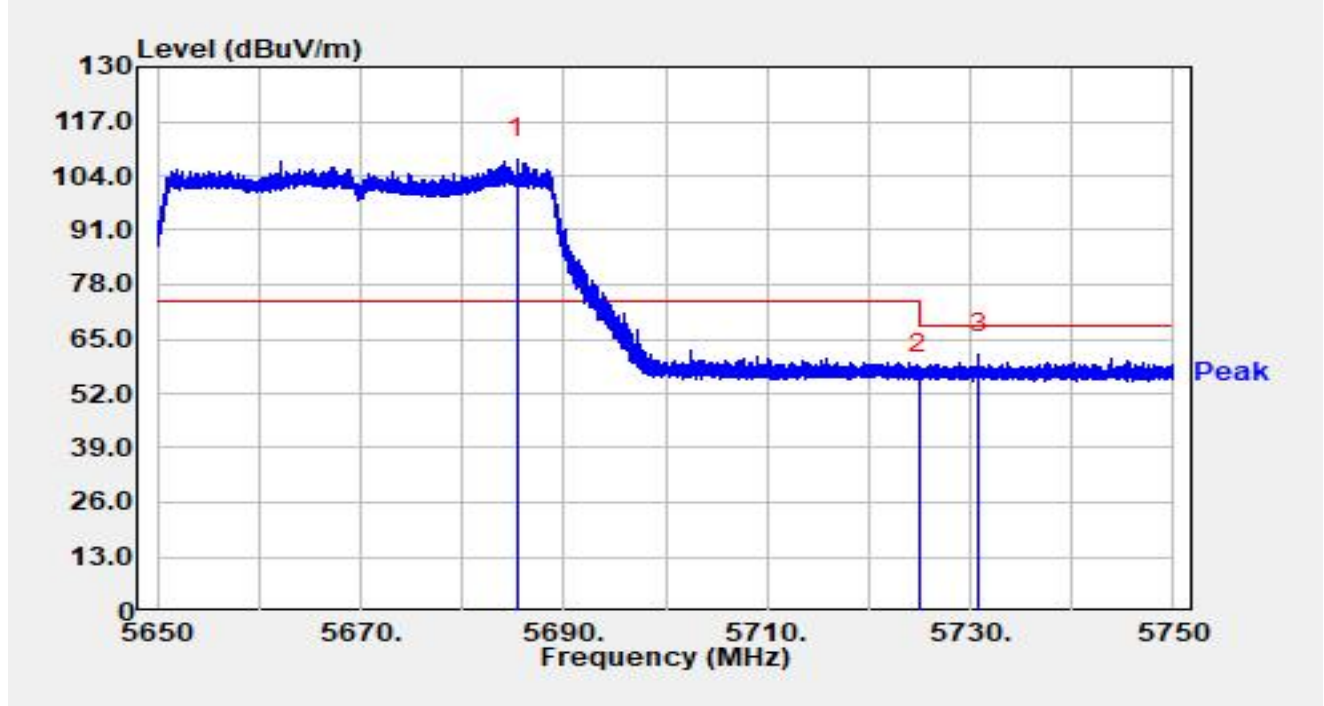


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5685.440	87.20	20.72	107.93	N/A	N/A	Peak
2		5725.000	35.28	21.24	56.52	-11.68	68.20	Peak
3	*	5730.910	40.26	21.20	61.46	-6.74	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5670MHz		

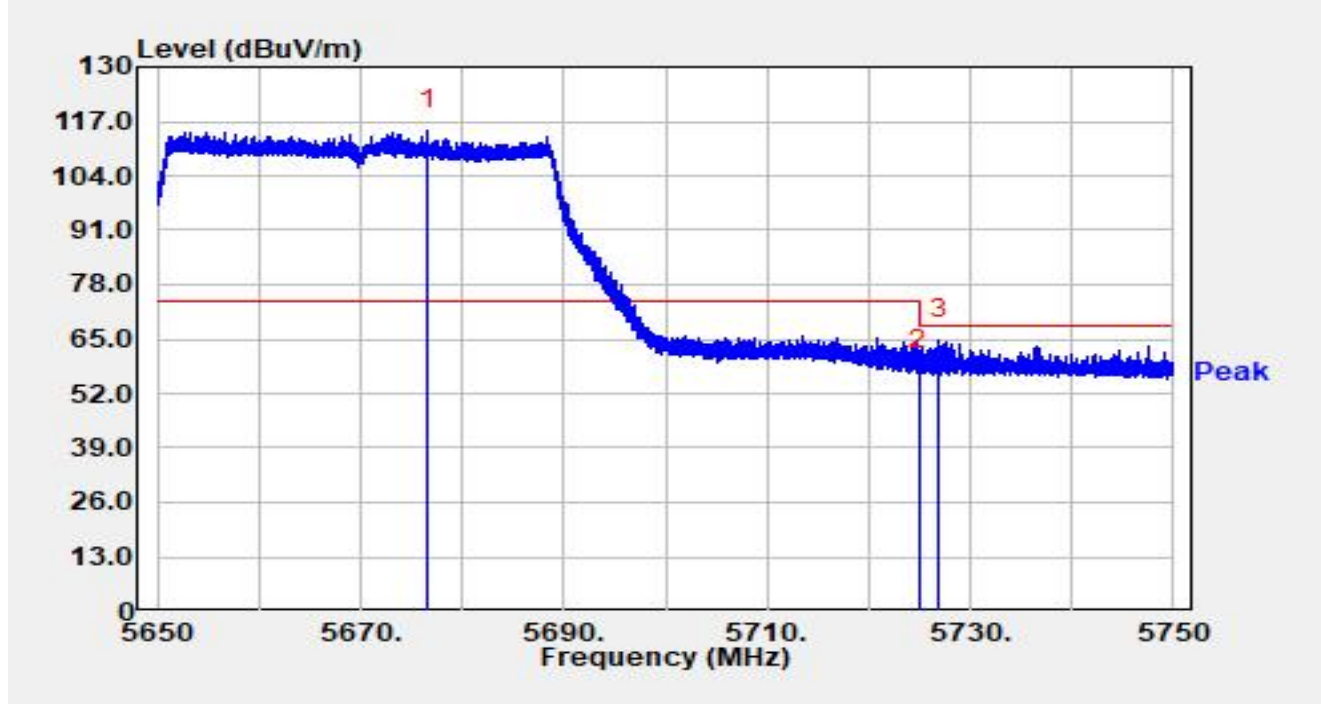


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5676.650	94.39	20.56	114.95	N/A	N/A	Peak
2		5725.000	36.38	21.24	57.62	-10.58	68.20	Peak
3	*	5726.900	43.62	21.24	64.86	-3.34	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5.8G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5755MHz		

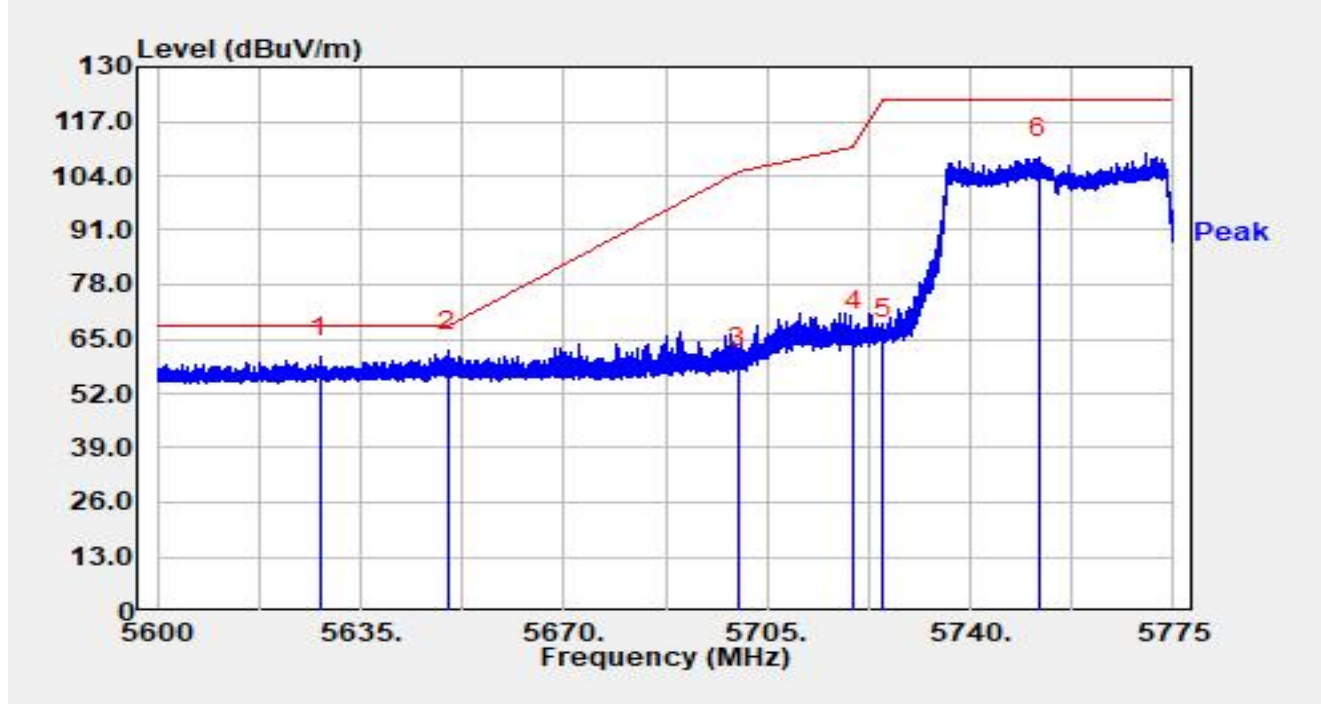


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5628.053	40.16	20.56	60.73	-7.47	68.20	Peak
2	*	5650.000	41.51	20.60	62.11	-6.09	68.20	Peak
3		5700.000	37.34	20.96	58.30	-46.90	105.20	Peak
4		5720.000	45.87	21.20	67.07	-43.73	110.80	Peak
5		5725.000	43.83	21.24	65.07	-57.13	122.20	Peak
6		5751.777	87.23	21.11	108.33	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-20
Limit	FCC_5.8G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5755MHz		

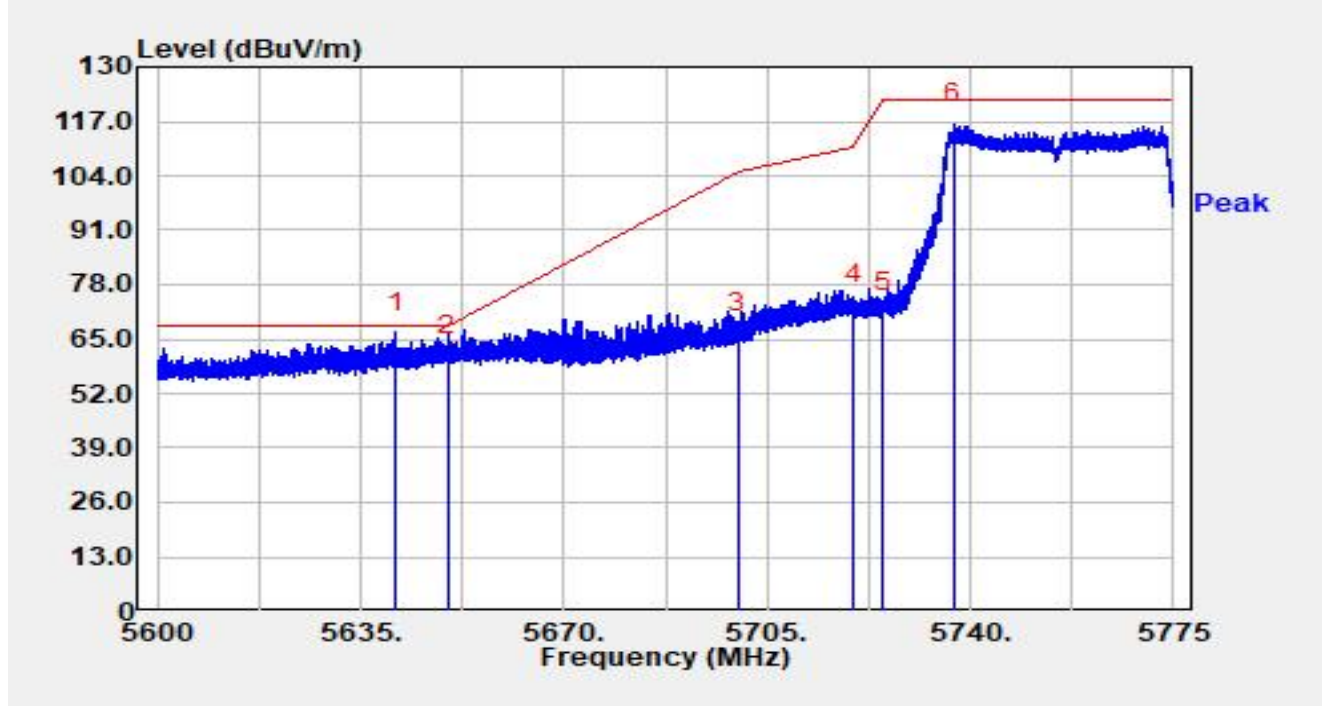


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5641.020	45.97	20.68	66.65	-1.55	68.20	Peak
2		5650.000	40.45	20.60	61.05	-7.15	68.20	Peak
3		5700.000	45.42	20.96	66.39	-38.81	105.20	Peak
4		5720.000	52.09	21.20	73.29	-37.51	110.80	Peak
5		5725.000	50.05	21.24	71.29	-50.91	122.20	Peak
6		5737.112	95.18	21.13	116.31	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-21
Limit	FCC_5.8G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5795MHz		

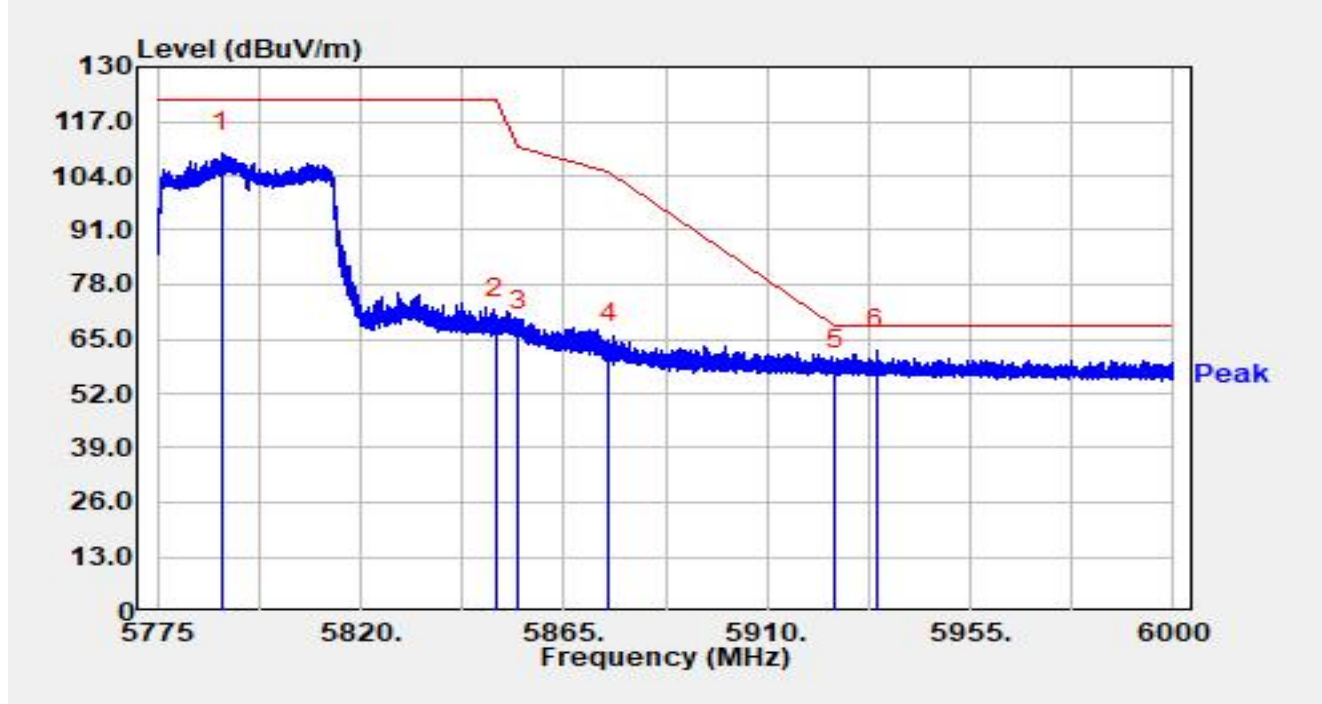


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5789.265	88.00	21.46	109.46	N/A	N/A	Peak
2		5850.000	48.49	21.49	69.98	-52.22	122.20	Peak
3		5855.000	45.36	21.54	66.90	-43.90	110.80	Peak
4		5875.000	42.66	21.60	64.26	-40.94	105.20	Peak
5		5925.000	36.08	21.59	57.68	-10.52	68.20	Peak
6	*	5934.075	40.90	21.63	62.52	-5.68	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-21
Limit	FCC_5.8G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5795MHz		

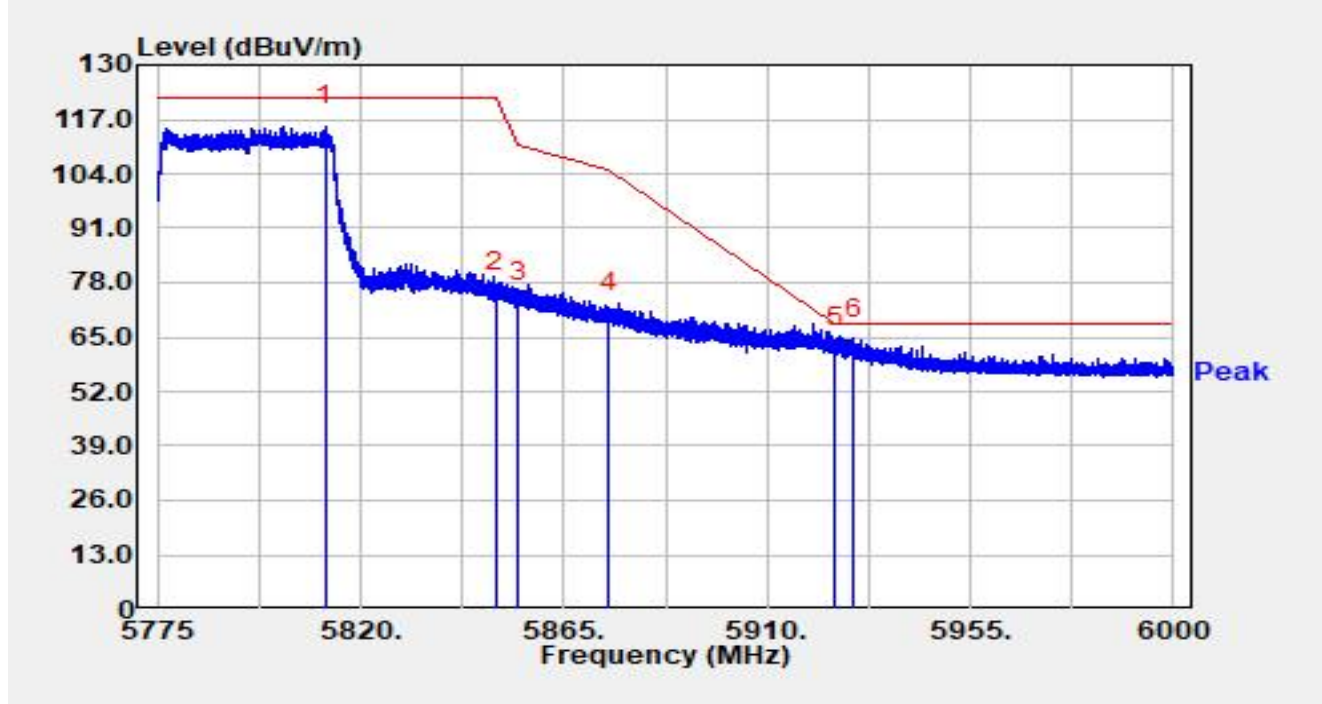


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5812.192	93.84	21.48	115.32	N/A	N/A	Peak
2		5850.000	54.13	21.49	75.62	-46.58	122.20	Peak
3		5855.000	51.74	21.54	73.28	-37.52	110.80	Peak
4		5875.000	49.11	21.60	70.71	-34.49	105.20	Peak
5		5925.000	40.92	21.59	62.51	-5.69	68.20	Peak
6	*	5929.260	42.95	21.62	64.57	-3.63	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-21
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5210MHz		

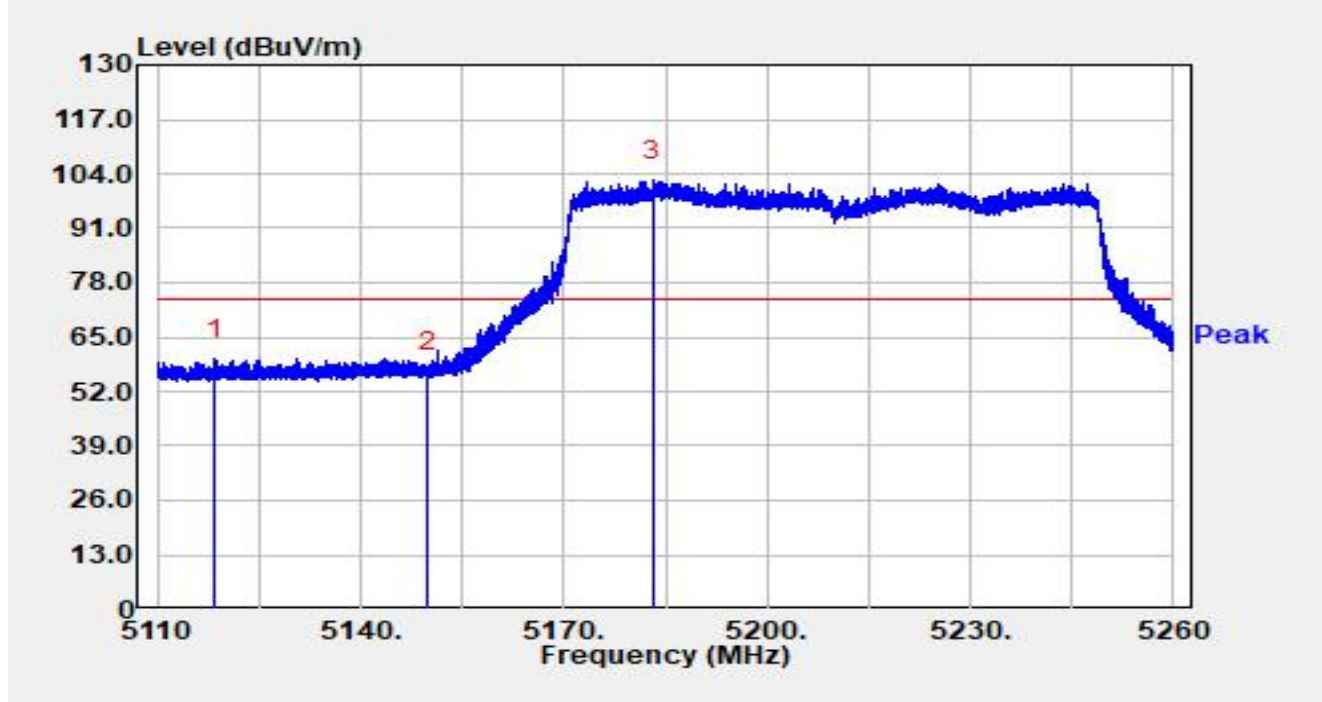


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5118.580	40.26	19.51	59.77	-14.23	74.00	Peak
2		5150.000	36.77	19.78	56.56	-17.44	74.00	Peak
3		5183.095	82.87	19.59	102.47	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-21
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5210MHz		

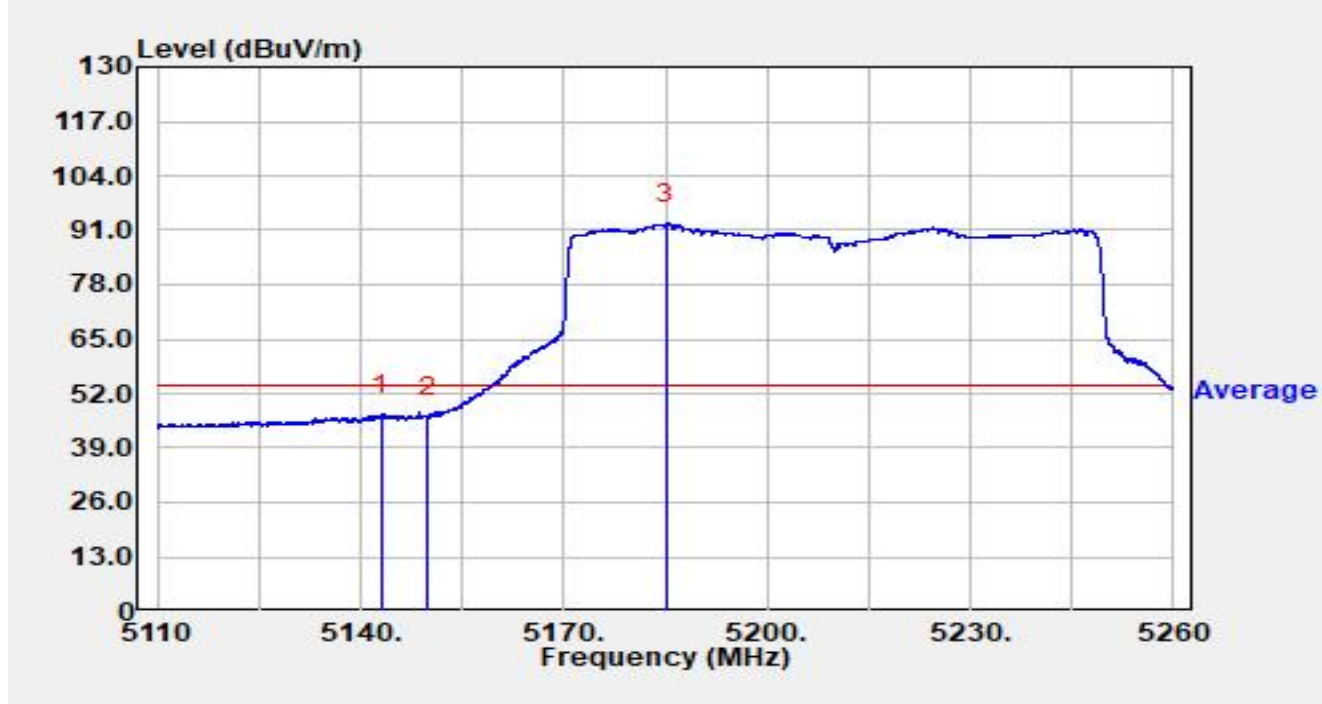


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5142.985	27.21	19.70	46.92	-7.08	54.00	Average
2		5150.000	26.77	19.78	46.55	-7.45	54.00	Average
3		5185.105	72.95	19.56	92.51	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-21
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5210MHz		

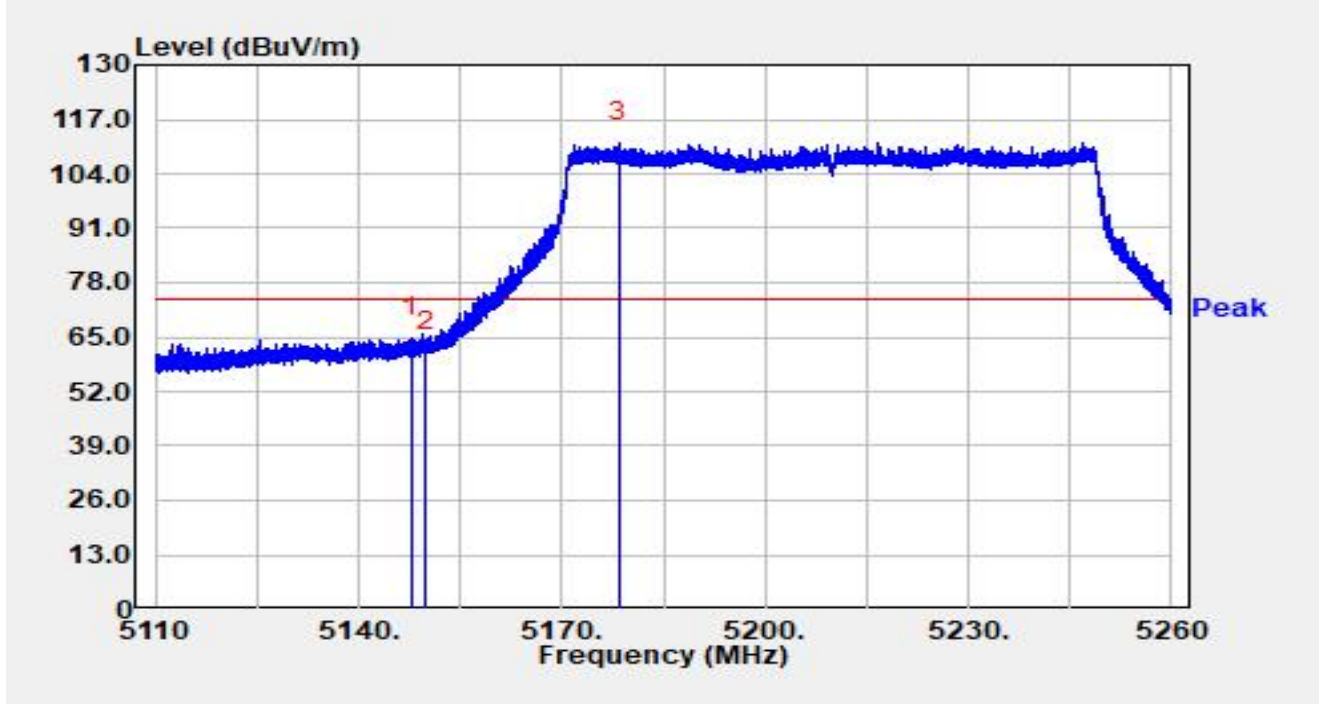


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.800	45.05	19.77	64.82	-9.18	74.00	Peak
2		5150.000	42.01	19.78	61.80	-12.20	74.00	Peak
3		5178.475	91.83	19.67	111.50	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-21
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5210MHz		

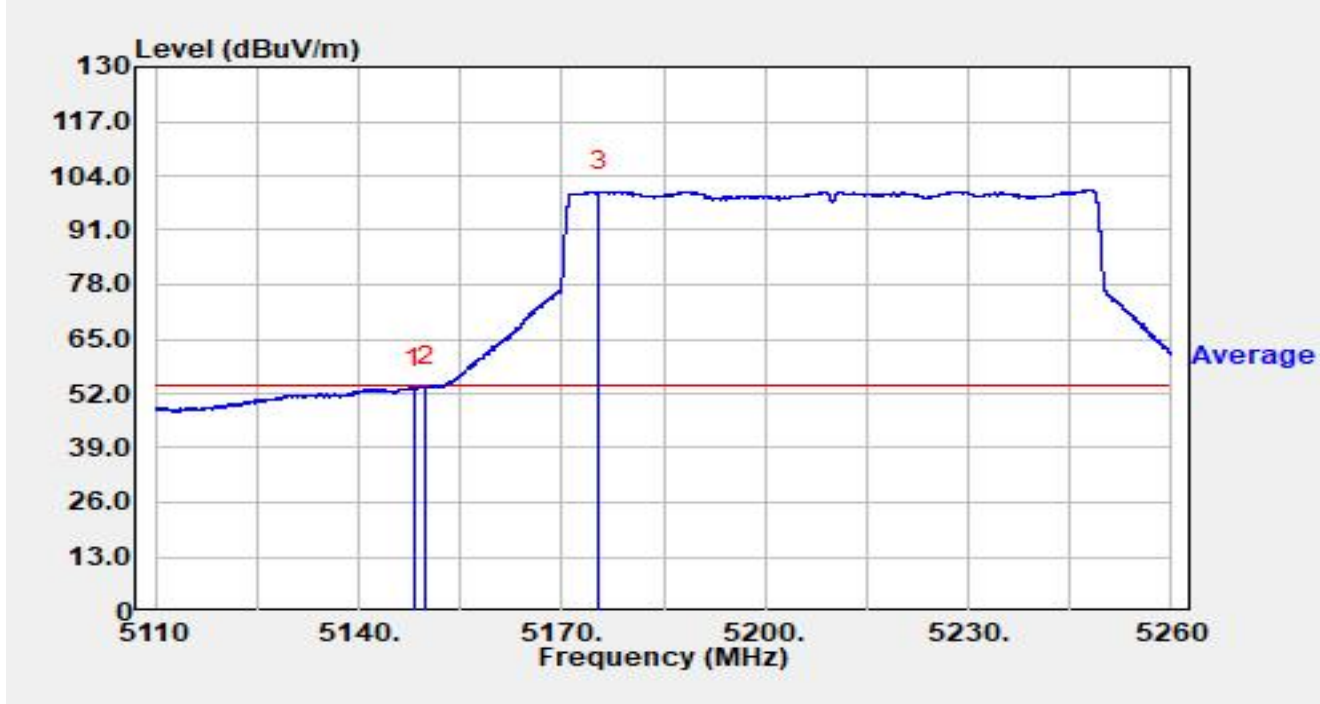


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5148.160	33.55	19.77	53.32	-0.68	54.00	Average
2	*	5150.000	33.84	19.78	53.62	-0.38	54.00	Average
3		5175.520	80.47	19.72	100.19	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-21
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5530MHz		

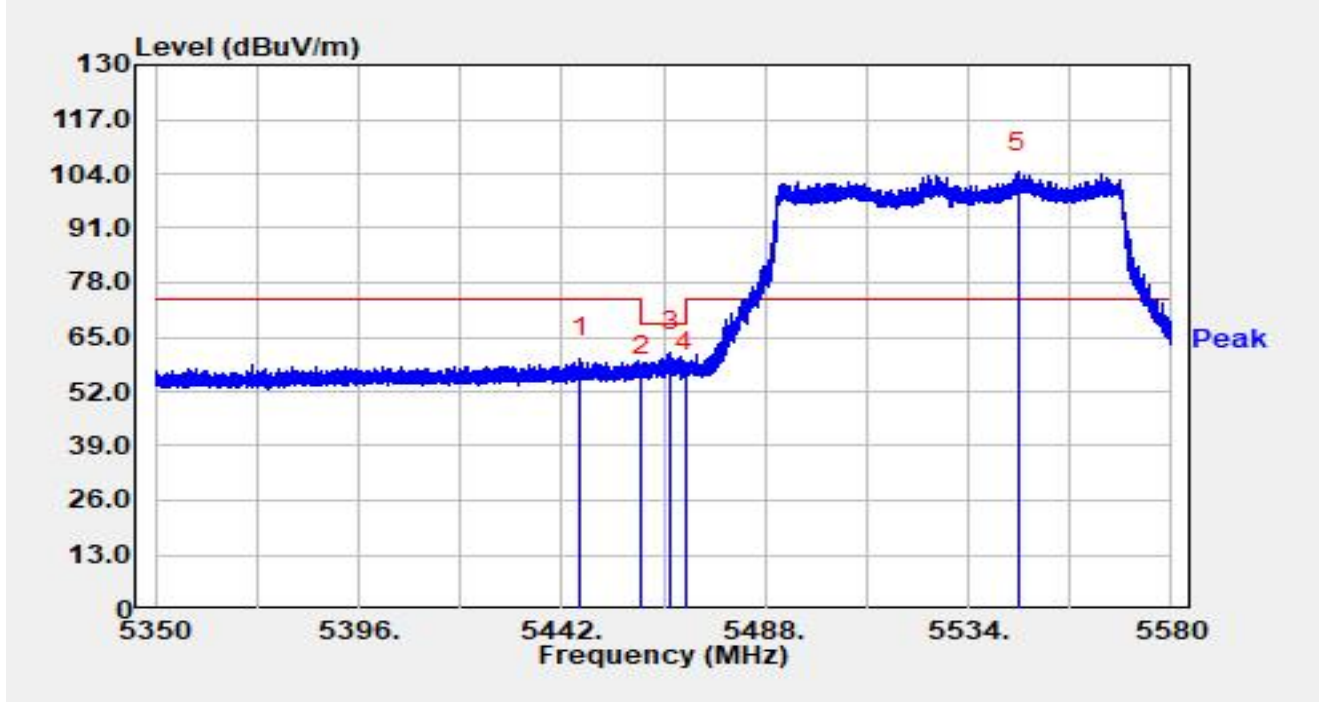


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5446.255	40.24	19.66	59.89	-14.11	74.00	Peak
2		5460.000	35.97	19.74	55.71	-12.49	68.20	Peak
3	*	5466.633	41.60	19.86	61.46	-6.74	68.20	Peak
4		5470.000	36.97	19.92	56.89	-11.31	68.20	Peak
5		5545.408	84.46	19.99	104.46	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-21
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5530MHz		

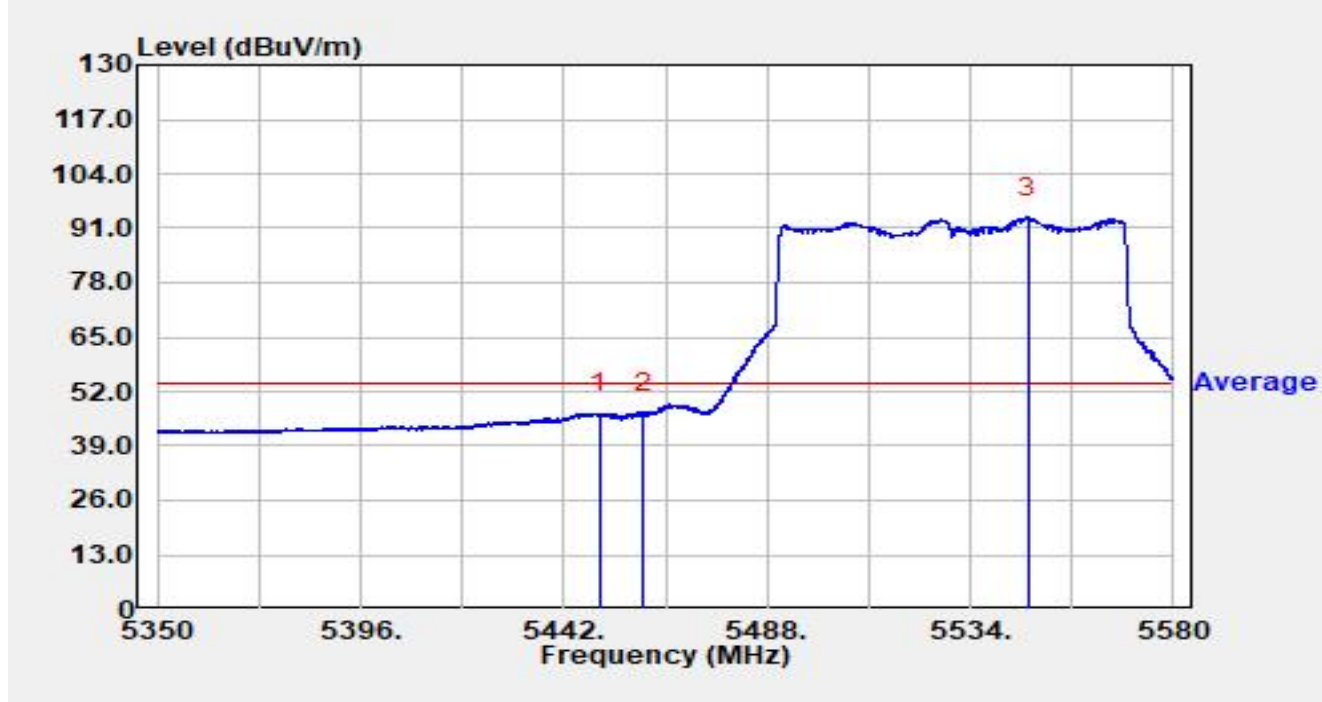


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5450.096	27.18	19.65	46.82	-7.18	54.00	Average
2		5460.000	27.05	19.74	46.79	-7.21	54.00	Average
3		5547.064	73.48	20.02	93.51	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-21
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5530MHz		

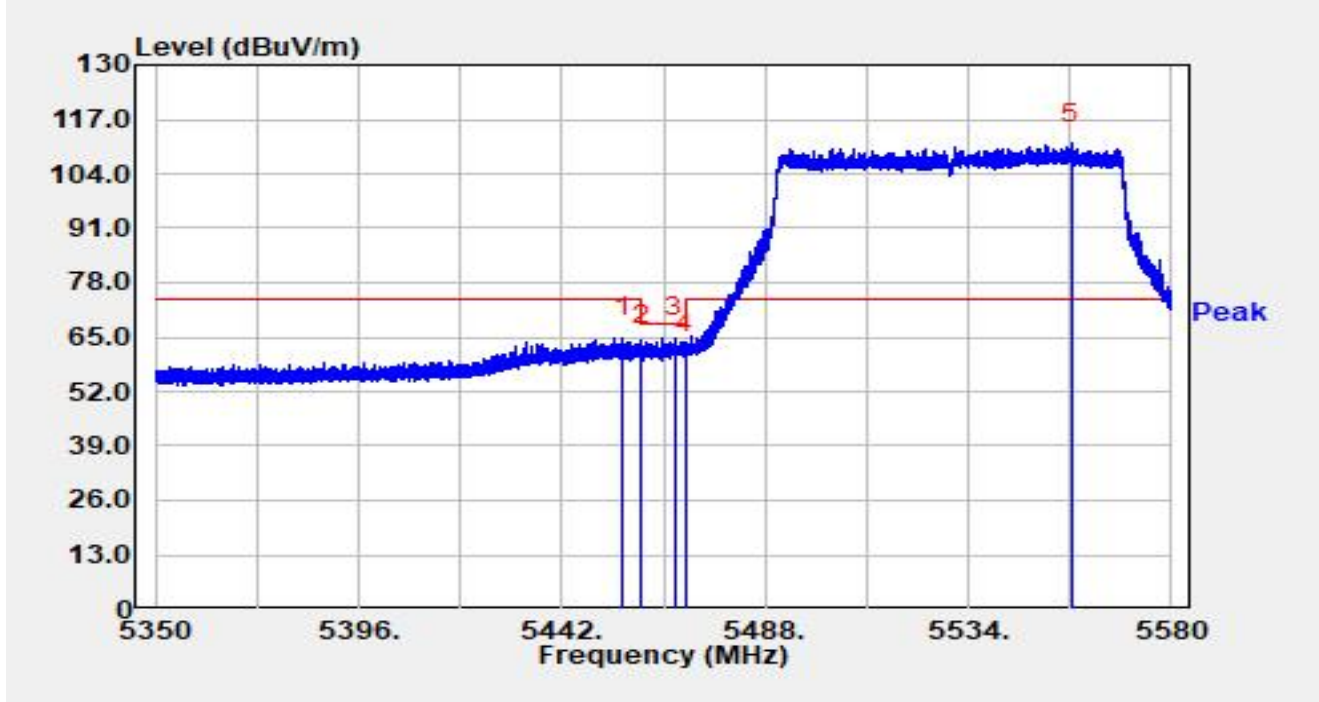


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5455.869	45.17	19.67	64.83	-9.17	74.00	Peak
2		5460.000	43.51	19.74	63.26	-4.94	68.20	Peak
3	*	5467.484	44.92	19.88	64.80	-3.40	68.20	Peak
4		5470.000	41.39	19.92	61.31	-6.89	68.20	Peak
5		5557.322	91.08	20.15	111.23	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-21
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5530MHz		

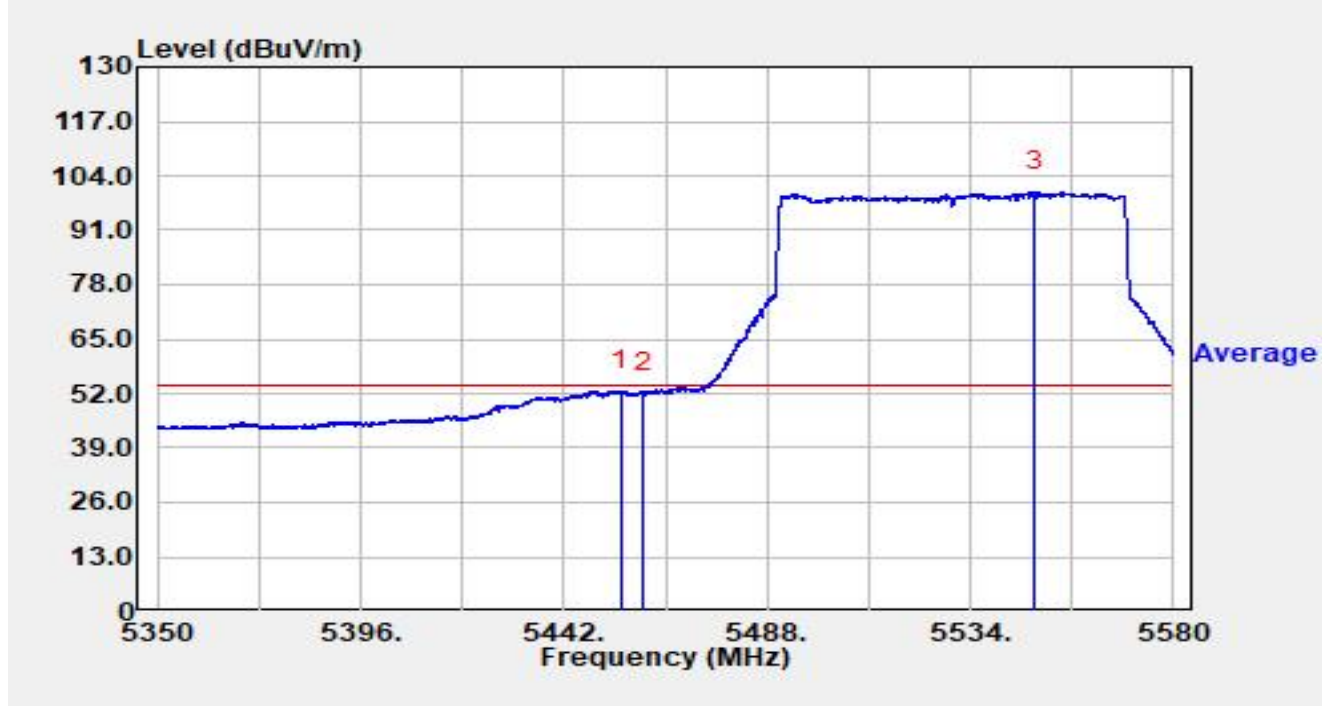


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5454.880	32.90	19.65	52.54	-1.46	54.00	Average
2		5460.000	32.42	19.74	52.16	-1.84	54.00	Average
3		5548.467	80.19	20.05	100.23	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-21
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5610MHz		

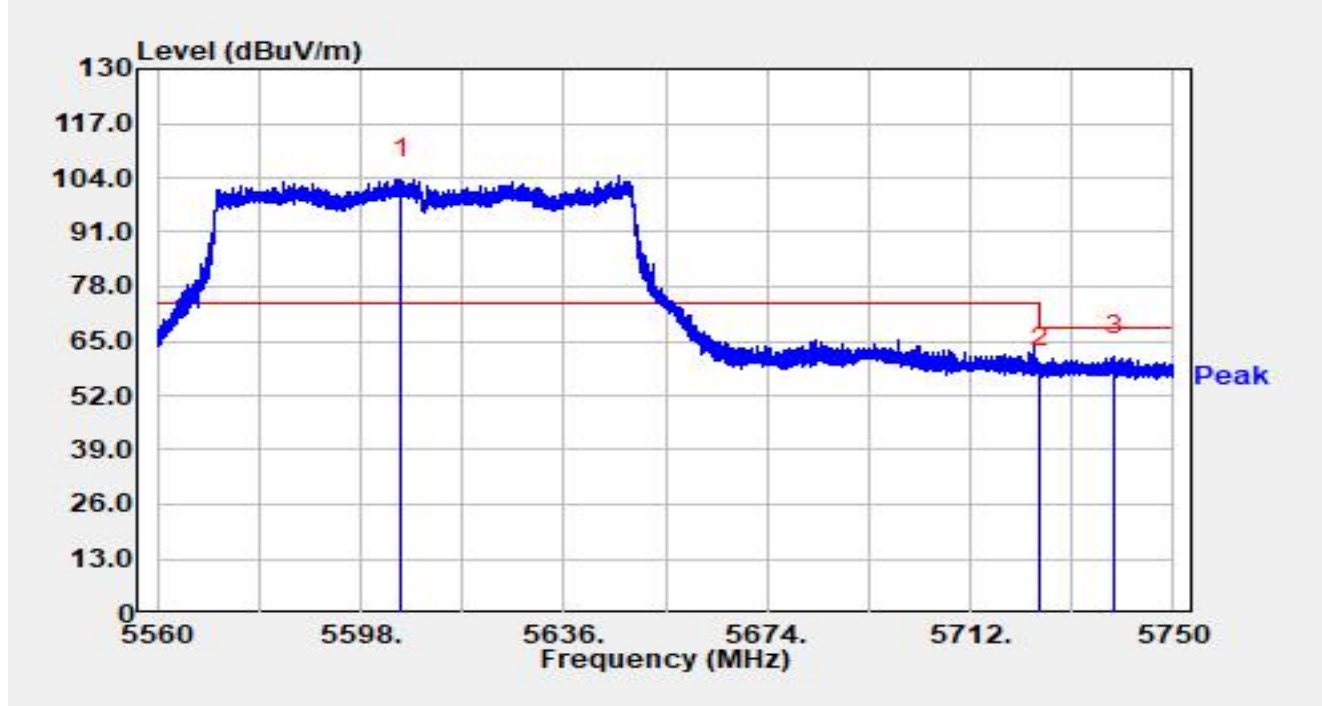


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5605.562	83.49	20.10	103.59	N/A	N/A	Peak
2		5725.000	37.52	21.24	58.76	-9.44	68.20	Peak
3	*	5738.923	40.39	21.11	61.50	-6.70	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-21
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5610MHz		

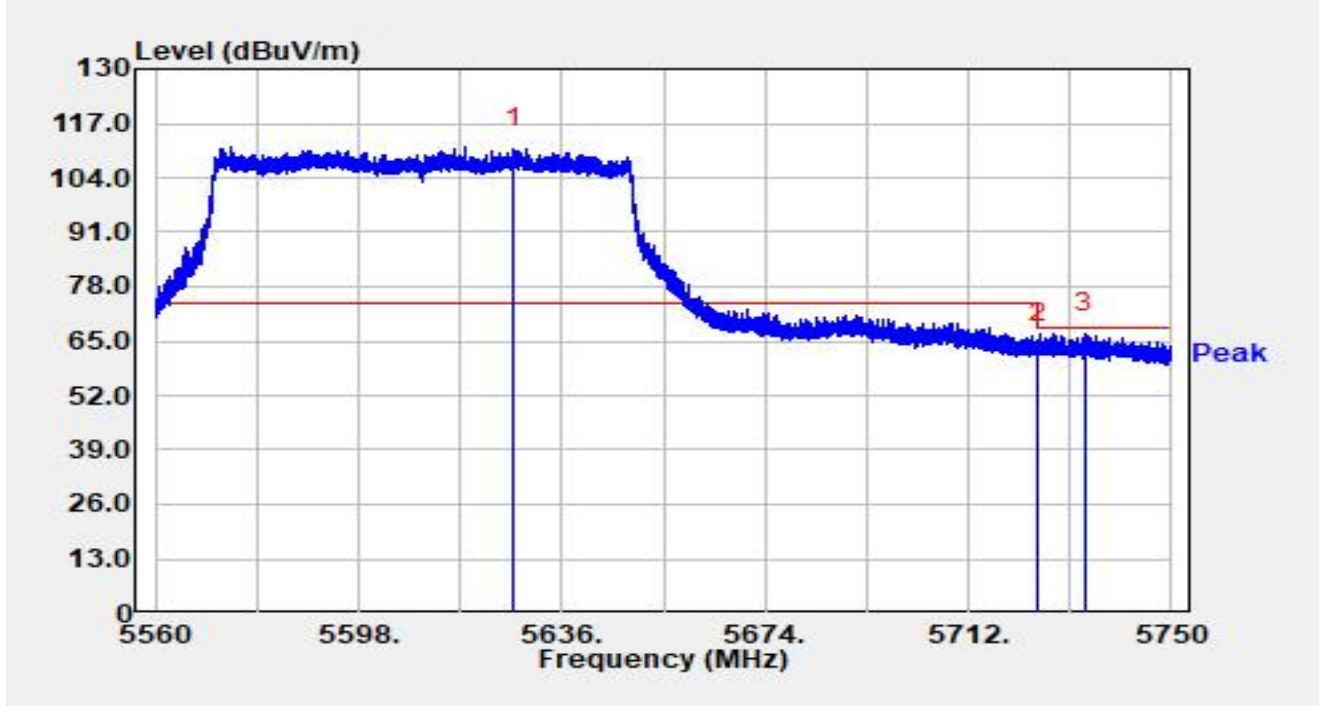


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5627.051	90.51	20.56	111.06	N/A	N/A	Peak
2		5725.000	43.45	21.24	64.69	-3.51	68.20	Peak
3	*	5733.736	45.60	21.17	66.77	-1.43	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-21
Limit	FCC_5.8G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5775MHz		

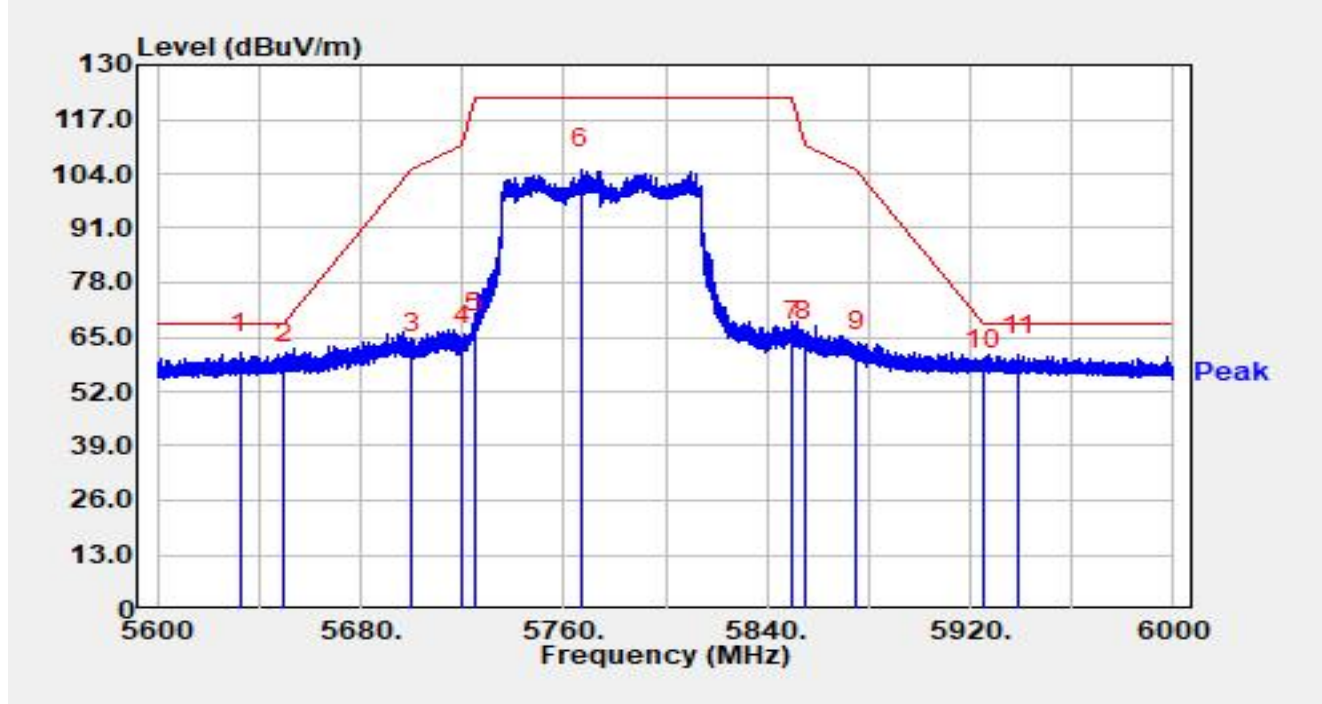

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5632.800	40.61	20.61	61.22	-6.98	68.20	Peak
2		5650.000	38.14	20.60	58.74	-9.46	68.20	Peak
3		5700.000	40.31	20.96	61.27	-43.93	105.20	Peak
4		5720.000	42.06	21.20	63.26	-47.54	110.80	Peak
5		5725.000	44.51	21.24	65.75	-56.45	122.20	Peak
6		5766.840	83.96	21.23	105.19	N/A	N/A	Peak
7		5850.000	42.44	21.49	63.93	-58.27	122.20	Peak
8		5855.000	42.45	21.54	63.99	-46.81	110.80	Peak
9		5875.000	39.80	21.60	61.40	-43.80	105.20	Peak
10		5925.000	35.42	21.59	57.02	-11.18	68.20	Peak
11		5938.920	39.14	21.63	60.77	-7.43	68.20	Peak


Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).

3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-21
Limit	FCC_5.8G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5775MHz		

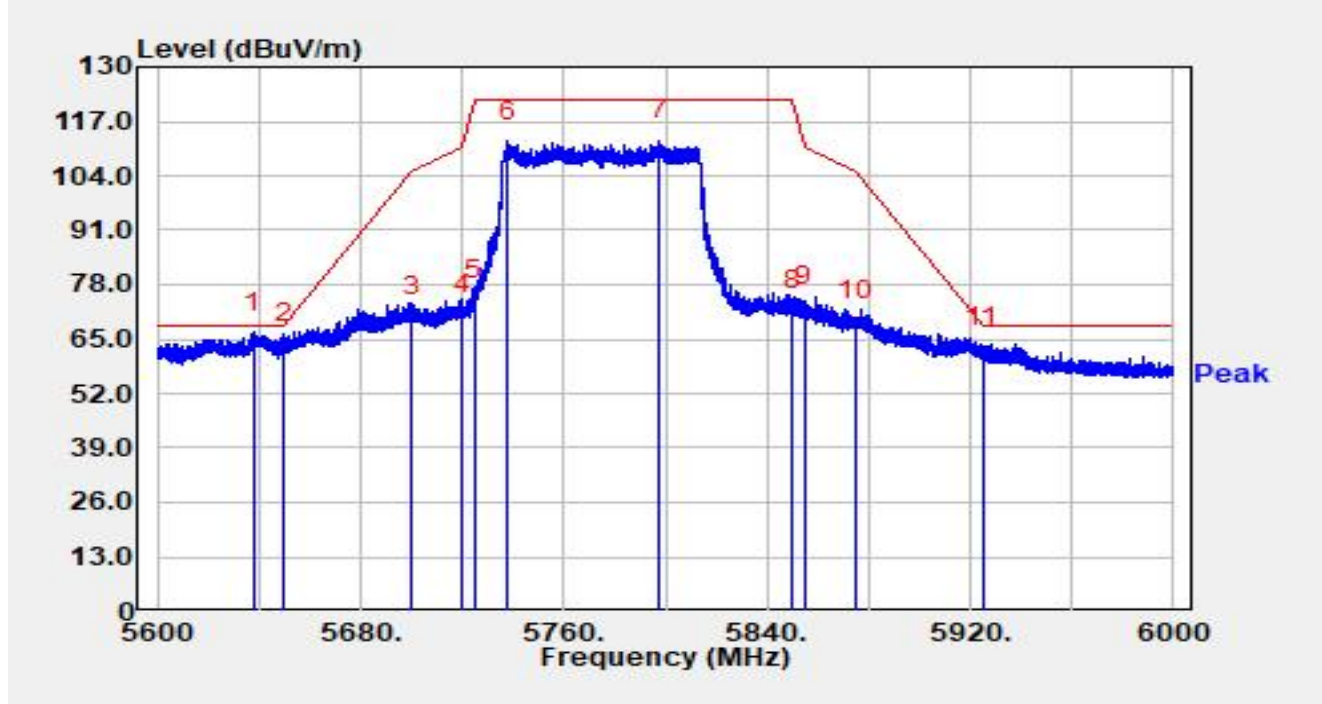


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5637.600	46.05	20.65	66.70	-1.50	68.20	Peak
2		5650.000	43.47	20.60	64.07	-4.13	68.20	Peak
3		5700.000	49.63	20.96	70.59	-34.61	105.20	Peak
4		5720.000	49.91	21.20	71.11	-39.69	110.80	Peak
5		5725.000	53.21	21.24	74.45	-47.75	122.20	Peak
6		5738.000	91.07	21.12	112.19	-10.01	122.20	Peak
7		5797.720	90.85	21.50	112.35	N/A	N/A	Peak
8		5850.000	50.47	21.49	71.96	-50.24	122.20	Peak
9		5855.000	51.22	21.54	72.76	-38.04	110.80	Peak
10		5875.000	47.89	21.60	69.49	-35.71	105.20	Peak
11		5925.000	41.44	21.59	63.04	-5.16	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-21
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 5250MHz		

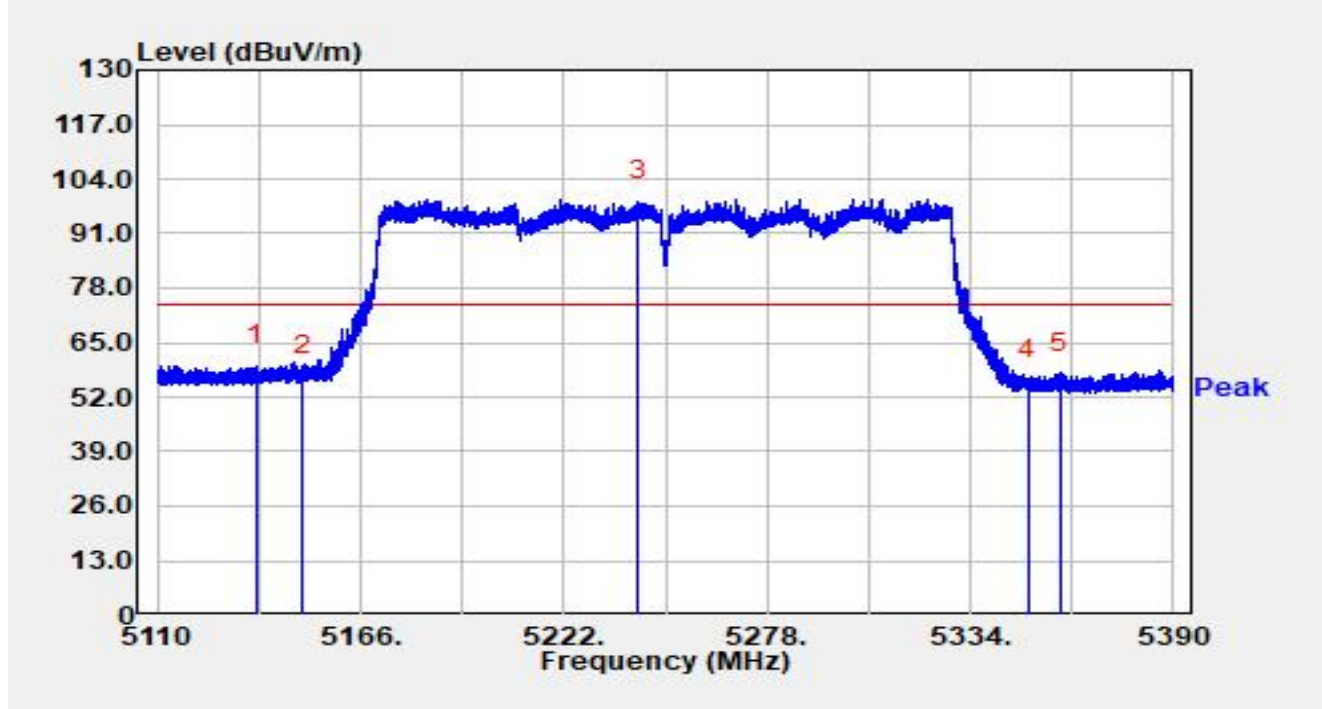


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5137.104	39.74	19.62	59.36	-14.64	74.00	Peak
2		5150.000	37.22	19.78	57.00	-17.00	74.00	Peak
3		5242.608	79.30	19.43	98.73	N/A	N/A	Peak
4		5350.000	36.93	19.40	56.33	-17.67	74.00	Peak
5		5358.864	38.44	19.33	57.77	-16.23	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-21
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 5250MHz		

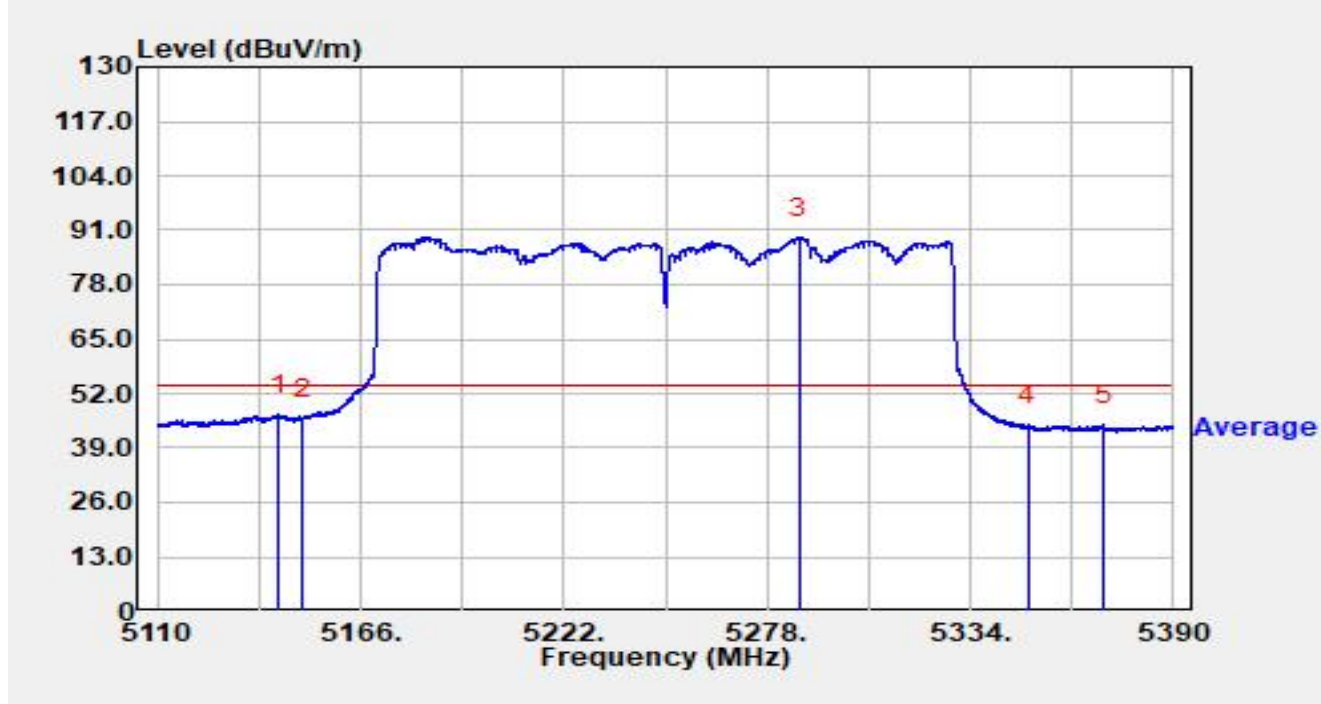


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5143.460	27.37	19.71	47.08	-6.92	54.00	Average
2		5150.000	26.22	19.78	46.00	-8.00	54.00	Average
3		5286.736	70.00	19.14	89.14	N/A	N/A	Average
4		5350.000	24.84	19.40	44.24	-9.76	54.00	Average
5		5370.736	25.04	19.36	44.40	-9.60	54.00	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-21
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 5250MHz		

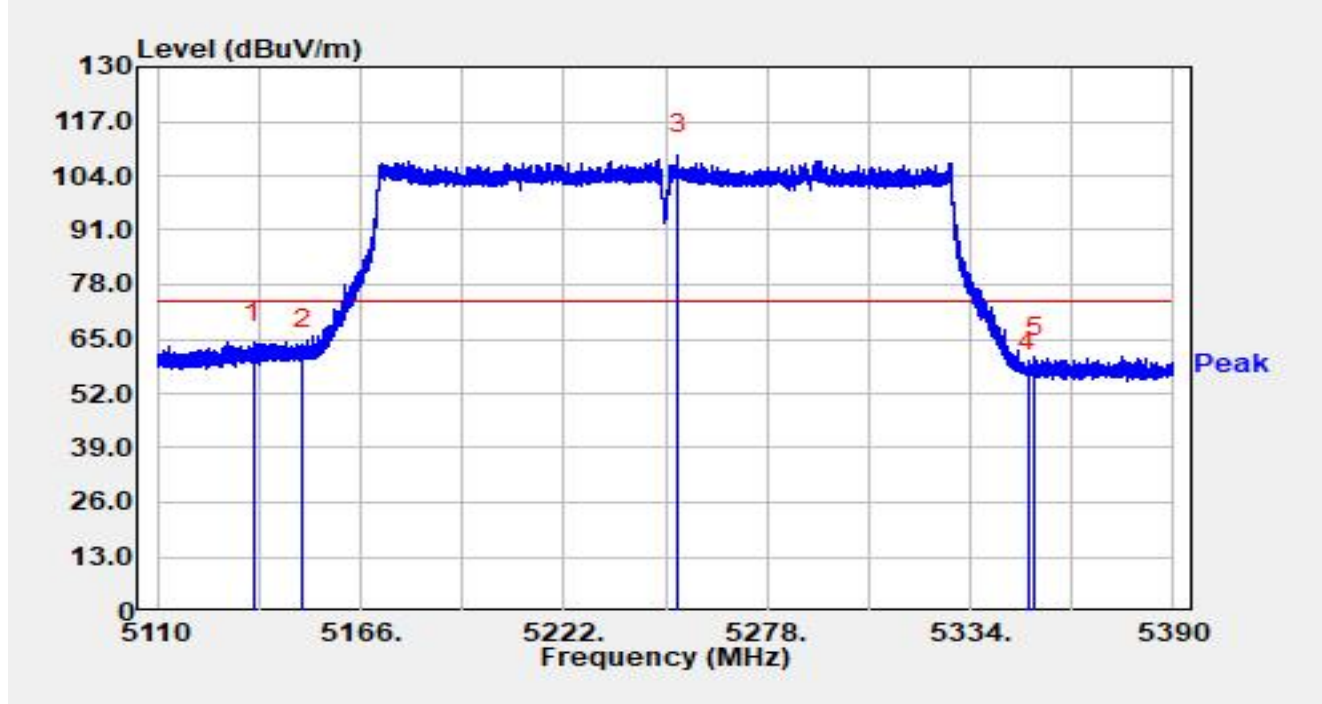


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5136.628	44.48	19.62	64.09	-9.91	74.00	Peak
2		5150.000	42.89	19.78	62.68	-11.32	74.00	Peak
3		5253.444	89.59	19.34	108.93	N/A	N/A	Peak
4		5350.000	37.70	19.40	57.10	-16.90	74.00	Peak
5		5351.780	41.40	19.36	60.76	-13.24	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-21
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 5250MHz		

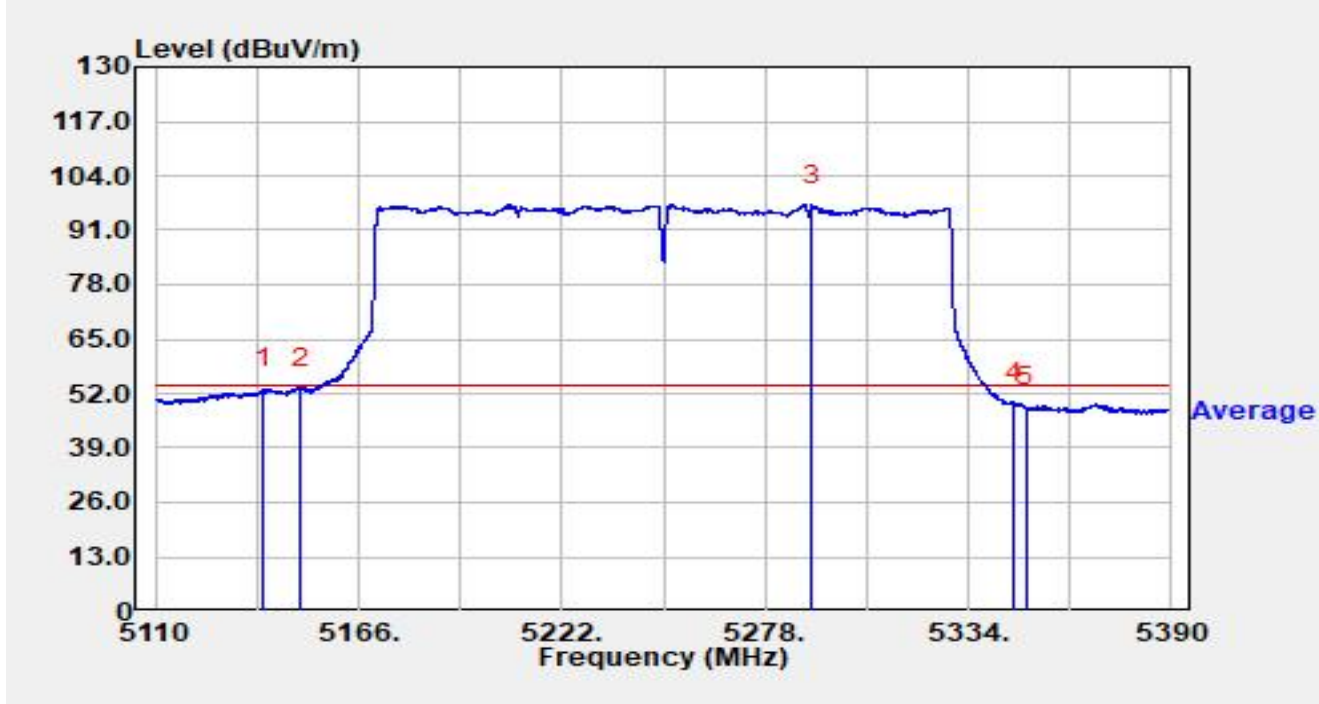


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5139.624	33.35	19.66	53.01	-0.99	54.00	Average
2	*	5150.000	33.51	19.78	53.29	-0.71	54.00	Average
3		5291.020	77.77	19.22	96.99	N/A	N/A	Average
4		5346.656	30.20	19.49	49.69	-4.31	54.00	Average
5		5350.000	29.31	19.40	48.72	-5.28	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-21
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 5570MHz		

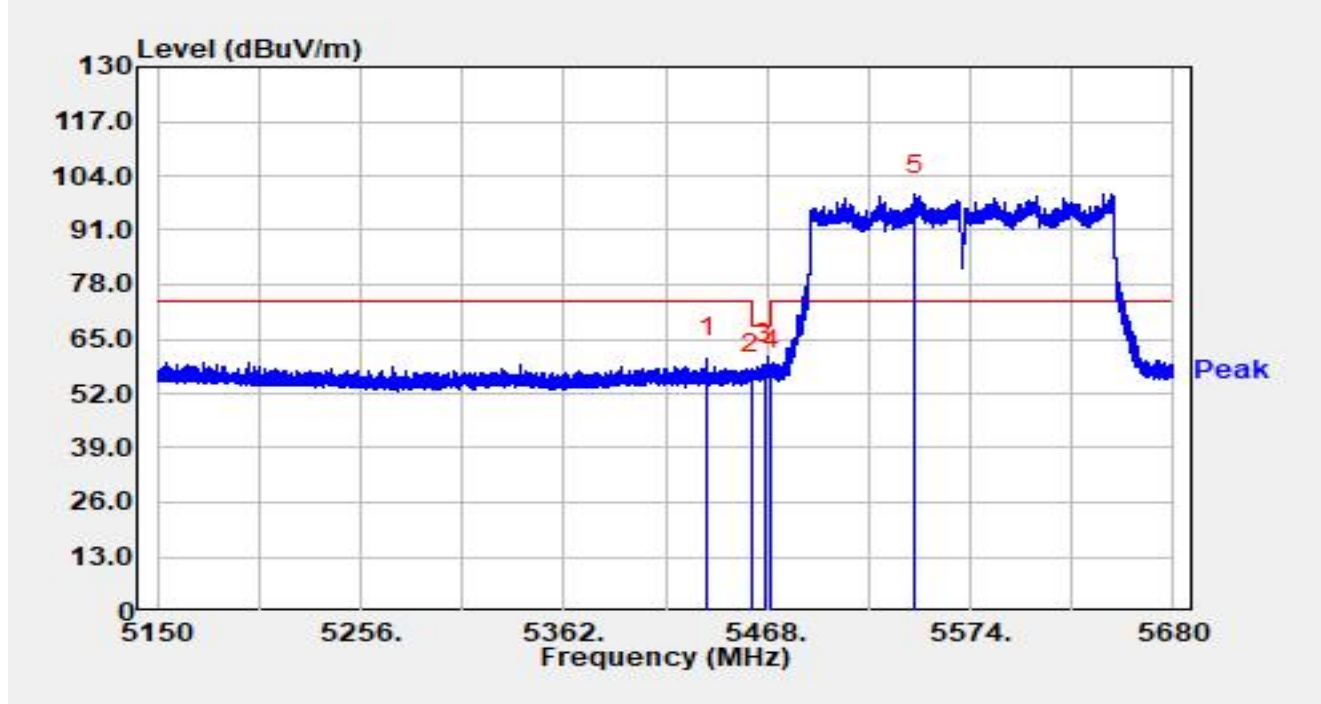


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5436.624	40.79	19.69	60.48	-13.52	74.00	Peak
2		5460.000	36.80	19.74	56.55	-11.65	68.20	Peak
3	*	5466.516	39.15	19.86	59.01	-9.19	68.20	Peak
4		5470.000	37.81	19.92	57.73	-10.47	68.20	Peak
5		5545.327	79.51	19.99	99.50	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-21
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 5570MHz		

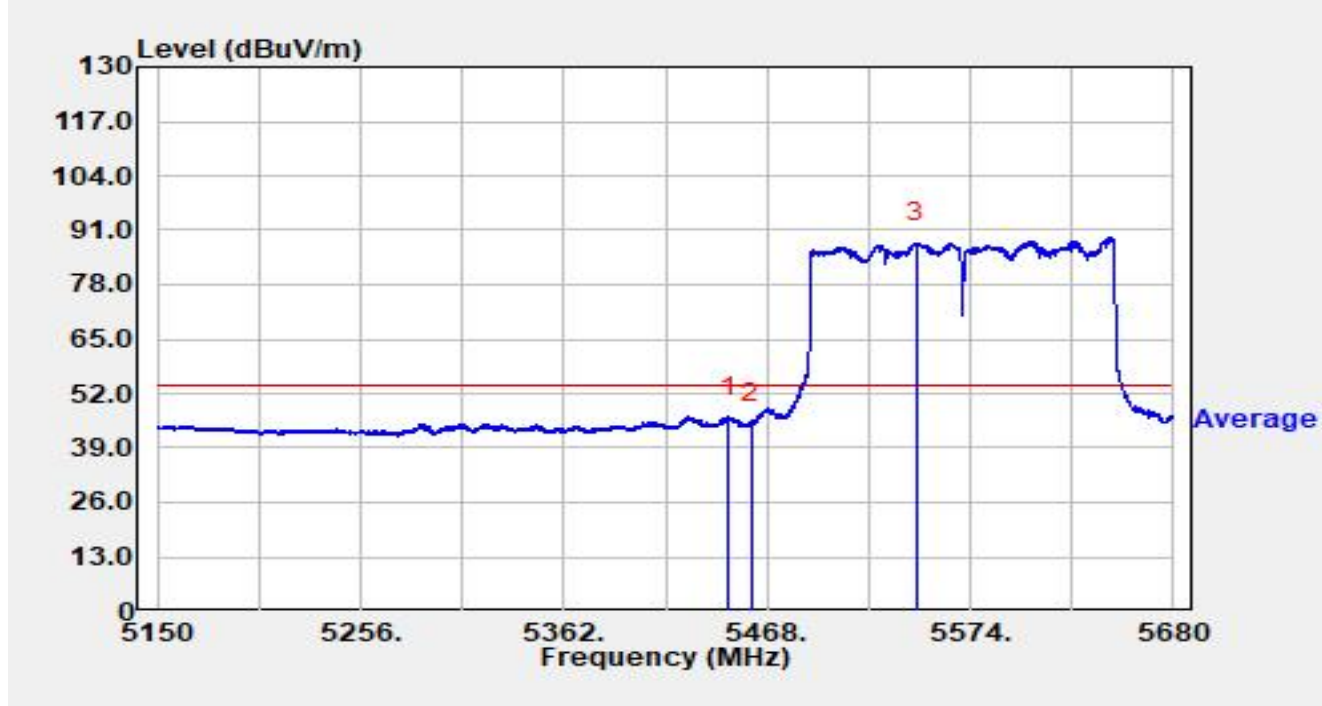


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5447.754	26.81	19.65	46.46	-7.54	54.00	Average
2		5460.000	25.34	19.74	45.08	-8.92	54.00	Average
3		5545.645	67.99	20.00	87.99	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-21
Limit	FCC_5G_RE(3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 5570MHz		

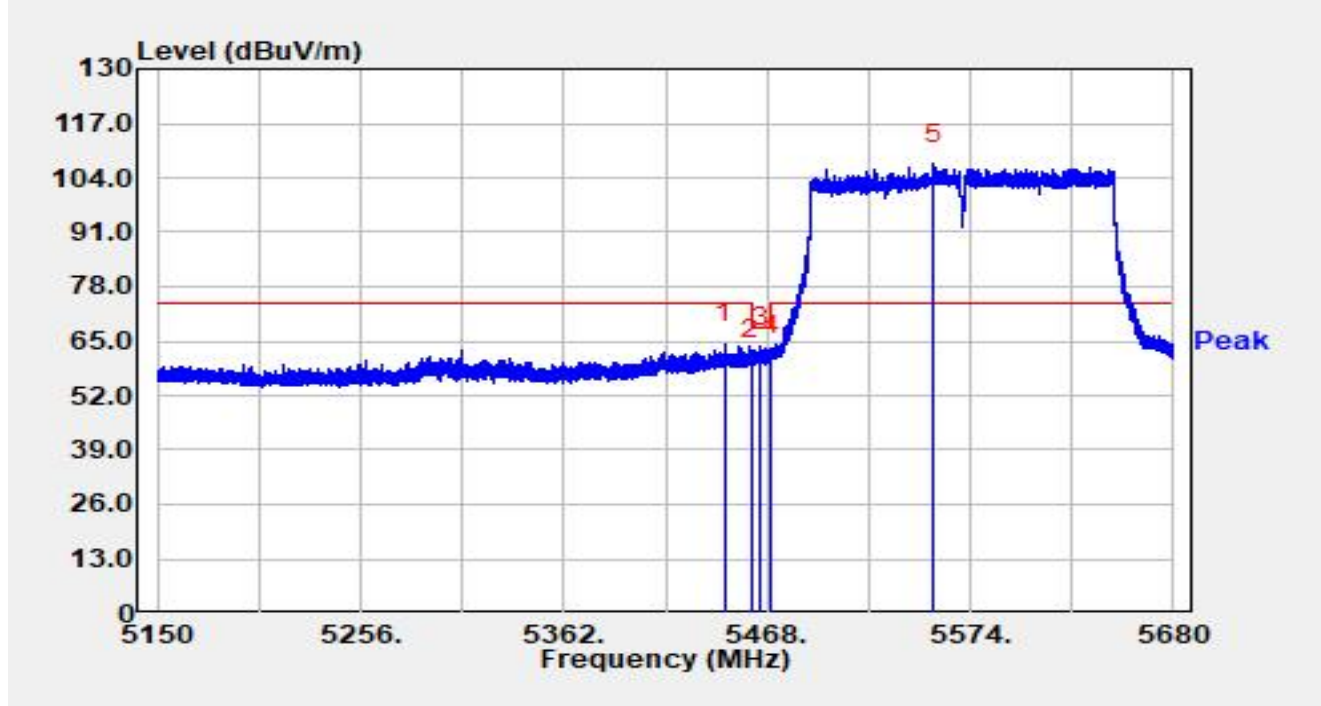


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5445.899	44.79	19.66	64.45	-9.55	74.00	Peak
2		5460.000	40.95	19.74	60.69	-7.51	68.20	Peak
3	*	5464.343	43.82	19.82	63.64	-4.56	68.20	Peak
4		5470.000	41.67	19.92	61.59	-6.61	68.20	Peak
5		5555.026	87.21	20.14	107.36	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-21
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 5570MHz		

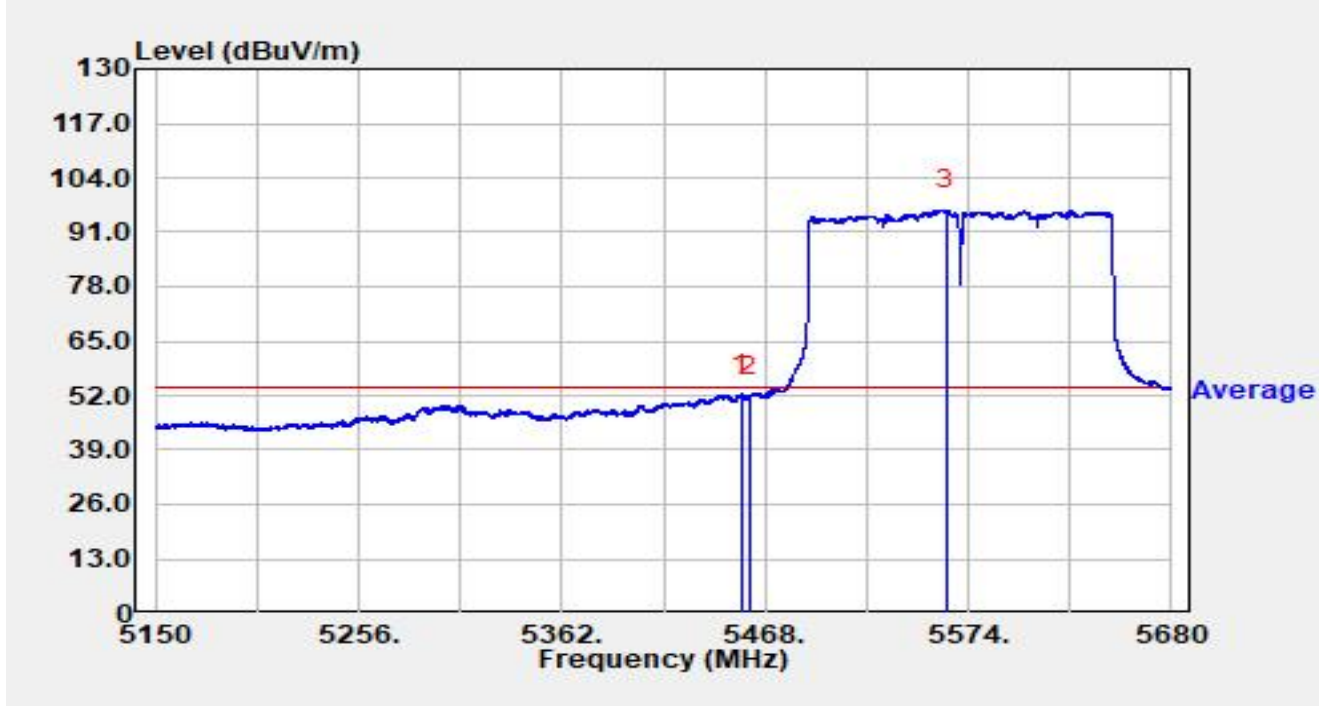


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5455.439	32.63	19.66	52.29	-1.71	54.00	Average
2		5460.000	32.00	19.74	51.74	-2.26	54.00	Average
3		5562.605	76.22	20.13	96.35	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-03-12
Limit	FCC_5G_RE(3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT240 at 5650MHz		

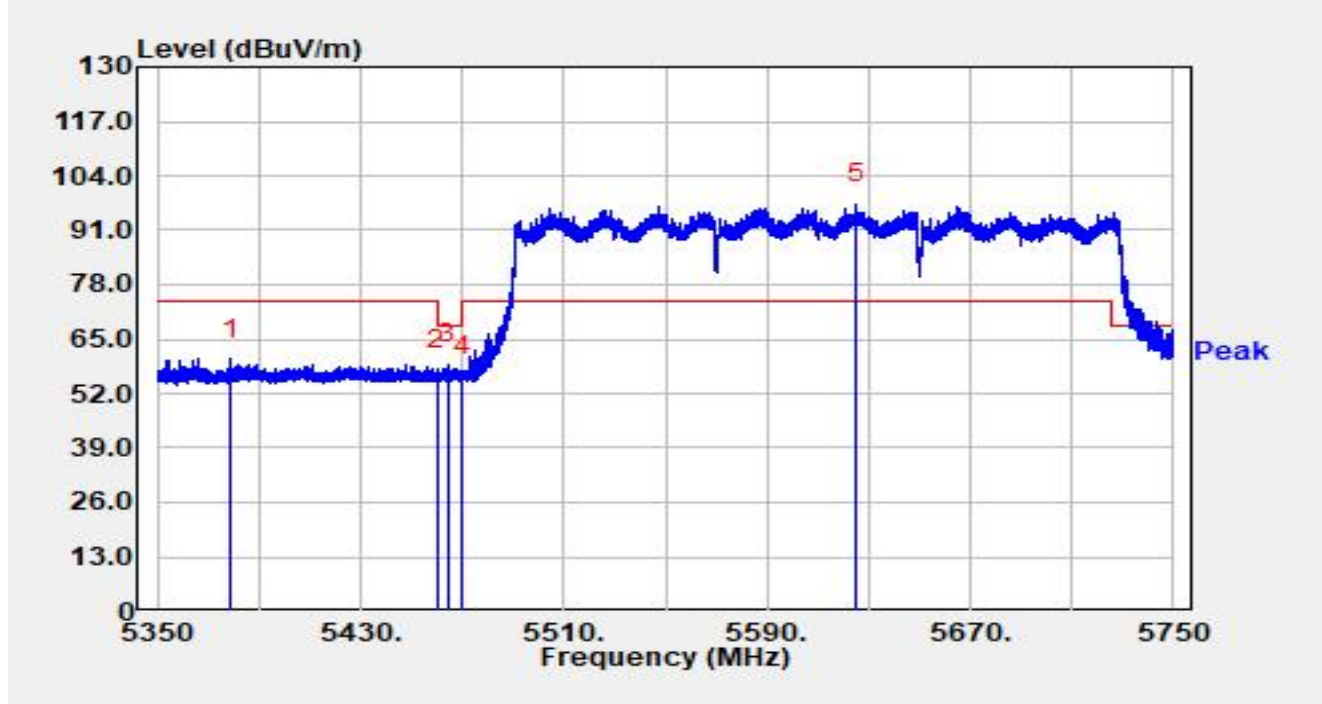


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5378.920	40.10	20.11	60.22	-13.78	74.00	Peak
2		5460.000	37.37	20.40	57.76	-10.44	68.20	Peak
3	*	5464.480	38.75	20.36	59.10	-9.10	68.20	Peak
4		5470.000	35.98	20.31	56.29	-11.91	68.20	Peak
5		5625.320	76.74	20.49	97.23	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-03-12
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT240 at 5650MHz		

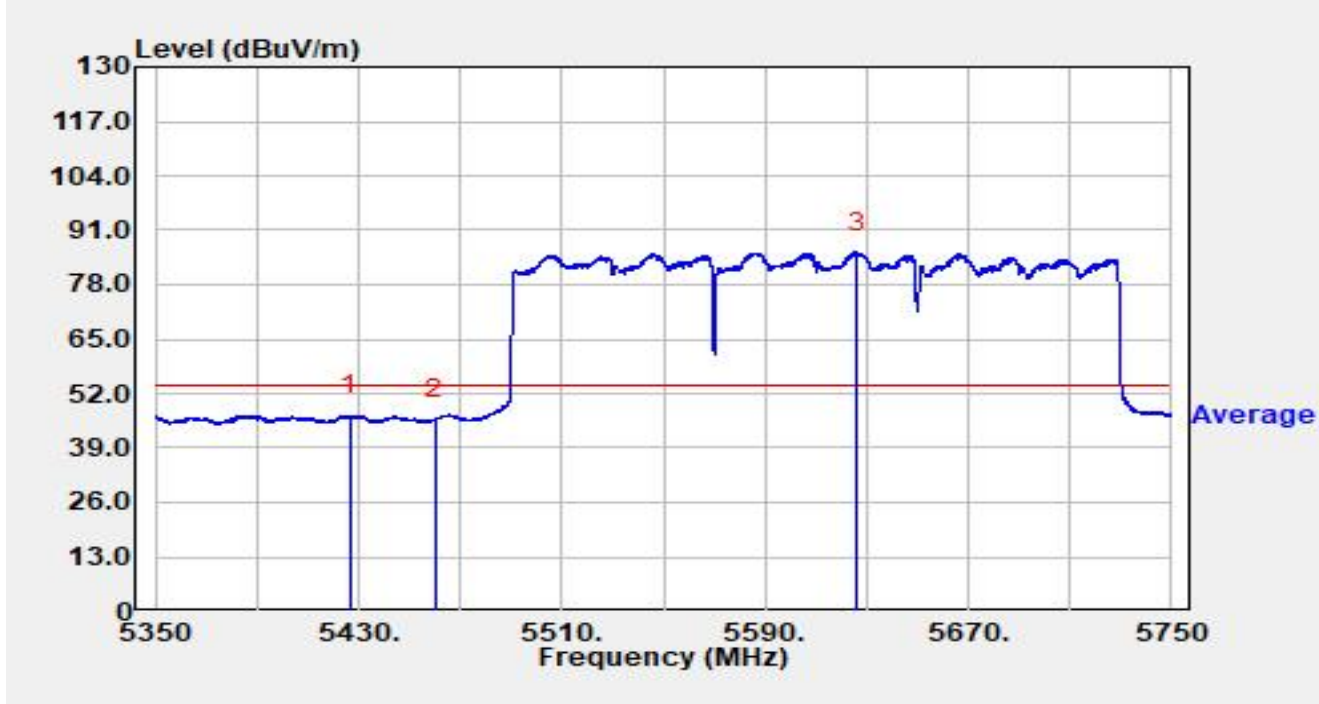


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5426.680	26.49	20.35	46.84	-7.16	54.00	Average
2		5460.000	25.48	20.40	45.87	-8.13	54.00	Average
3		5626.400	65.19	20.48	85.67	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-03-12
Limit	FCC_5G_RE(3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT240 at 5650MHz		

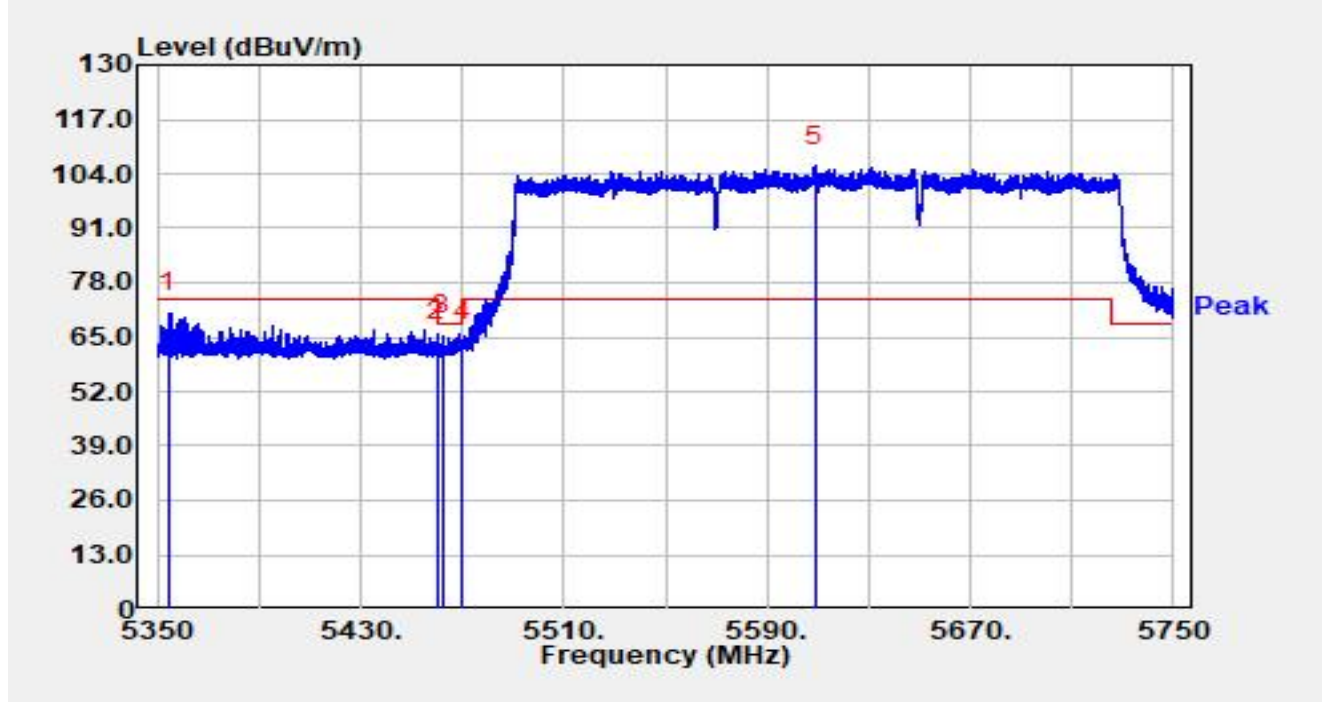


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5354.520	50.61	20.07	70.67	-3.33	74.00	Peak
2		5460.000	43.75	20.40	64.15	-4.05	68.20	Peak
3	*	5462.440	44.91	20.37	65.28	-2.92	68.20	Peak
4		5470.000	43.83	20.31	64.13	-4.07	68.20	Peak
5		5608.760	85.40	20.46	105.86	N/A	N/A	Peak

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-03-12
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT240 at 5650MHz		

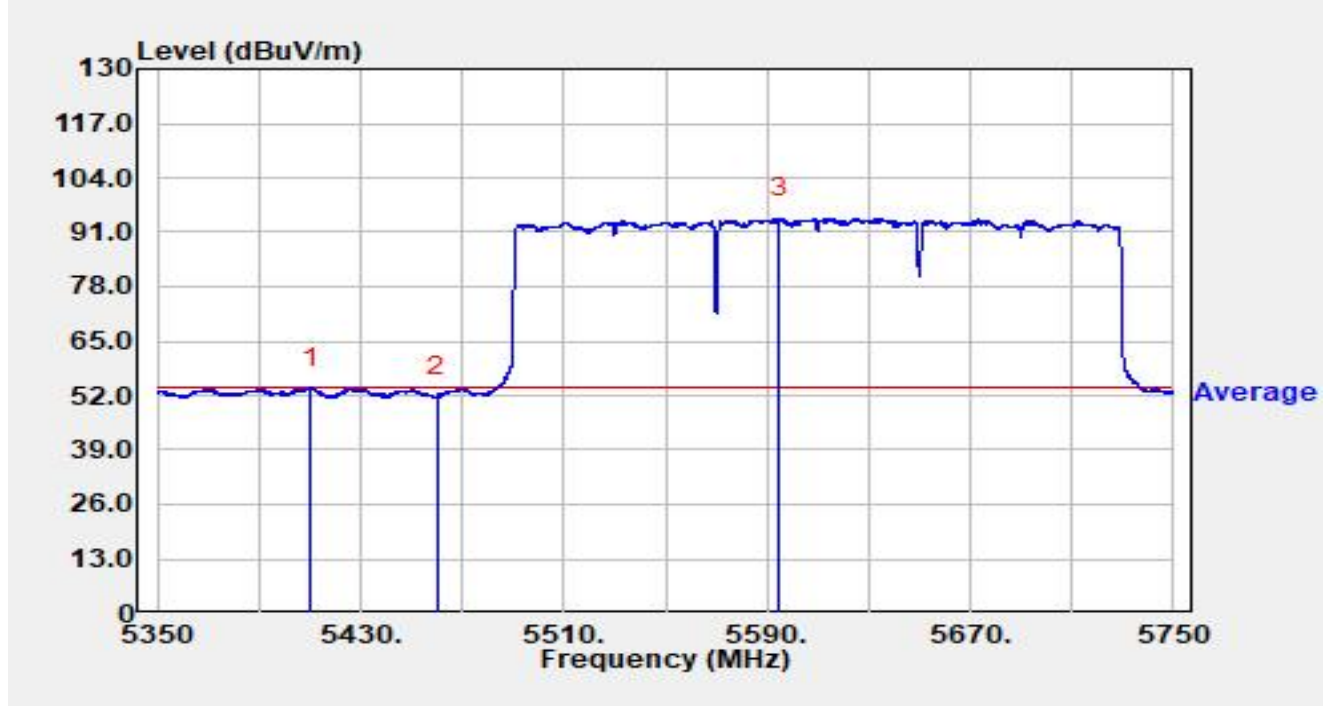


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5410.520	33.41	20.40	53.81	-0.19	54.00	Average
2		5460.000	31.26	20.40	51.66	-2.34	54.00	Average
3		5595.000	73.99	20.36	94.35	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.9 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2025-03-13
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Factor	ENV216_101683_L1_Filter Off_C	Polarity	Line1
EUT	Deco BE65-Outdoor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5745MHz		

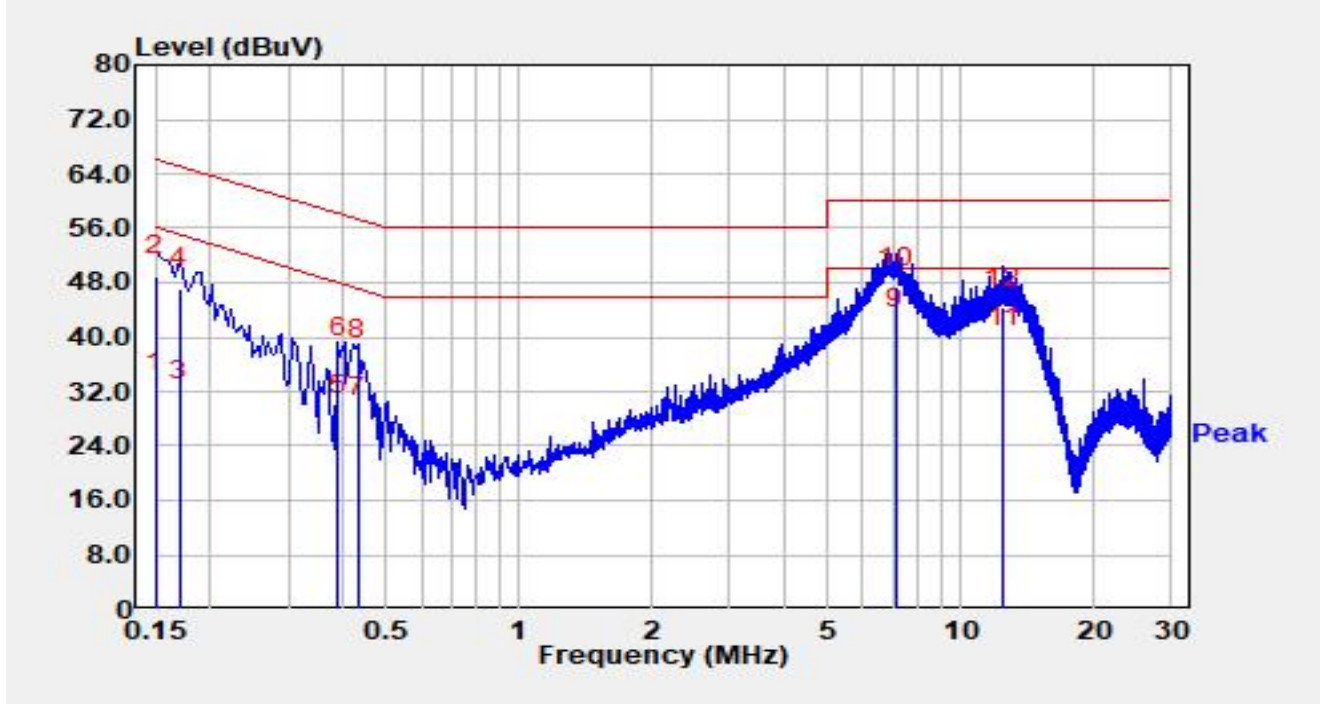


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.150	22.00	9.82	31.82	-24.18	56.00	Average
2		0.150	39.10	9.82	48.92	-17.08	66.00	QP
3		0.170	20.70	9.82	30.52	-24.44	54.96	Average
4		0.170	37.40	9.82	47.22	-17.74	64.96	QP
5		0.390	18.50	9.88	28.38	-19.68	48.06	Average
6		0.390	27.20	9.88	37.08	-20.98	58.06	QP
7		0.430	18.30	9.90	28.20	-19.06	47.25	Average
8		0.430	26.80	9.90	36.70	-20.56	57.25	QP
9	*	7.110	31.00	10.26	41.26	-8.74	50.00	Average
10		7.110	37.10	10.26	47.36	-12.64	60.00	QP
11		12.520	28.10	10.45	38.55	-11.45	50.00	Average
12		12.520	33.90	10.45	44.35	-15.65	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.

2. $C.F \text{ (dB)} = LISN \text{ Factor (dB)} + \text{Cable Loss (dB)}$.
3. $\text{Measurement (dB}\mu\text{V)} = \text{Reading (dB}\mu\text{V)} + C.F \text{ (dB)}$.

Site	WZ-SR2	Test Date	2025-03-13
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Factor	ENV216_101683_N_Filter Off_C	Polarity	Neutral
EUT	Deco BE65-Outdoor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5745MHz		

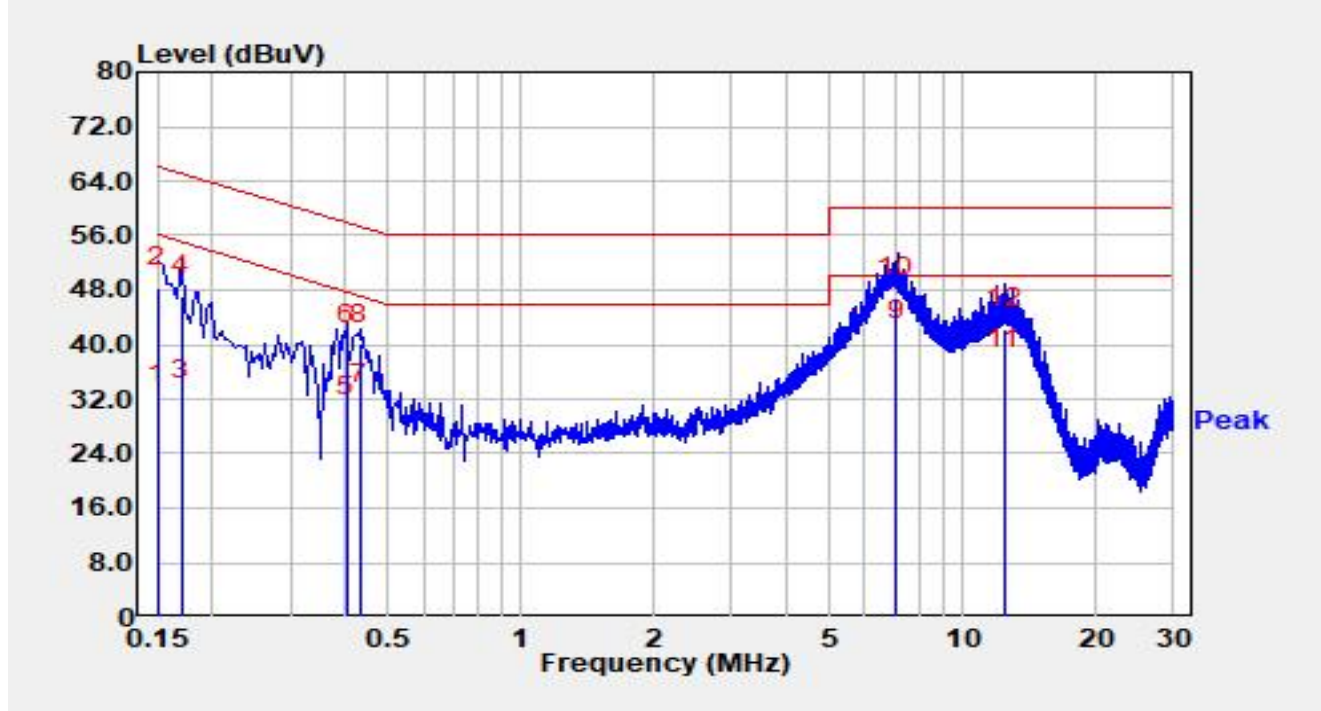

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.150	21.10	10.13	31.23	-24.77	56.00	Average
2		0.150	38.20	10.13	48.33	-17.67	66.00	QP
3		0.170	21.60	10.12	31.72	-23.24	54.96	Average
4		0.170	37.00	10.12	47.12	-17.84	64.96	QP
5		0.402	19.30	10.14	29.44	-18.38	47.81	Average
6		0.402	29.80	10.14	39.94	-17.88	57.81	QP
7		0.430	21.00	10.14	31.14	-16.11	47.25	Average
8		0.430	29.90	10.14	40.04	-17.21	57.25	QP
9	*	7.070	30.20	10.51	40.71	-9.29	50.00	Average
10		7.070	36.40	10.51	46.91	-13.09	60.00	QP
11		12.440	25.80	10.72	36.52	-13.48	50.00	Average
12		12.440	31.60	10.72	42.32	-17.68	60.00	QP

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).

3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Appendix B – Test Setup Photograph

Refer to “R25S1008026-UT” file.

Appendix C – EUT Photograph

Refer to “R25S1008026-UE” file.

The End
