Report No.: A2503084-C01-R01

10. BAND EDGE COMPLIANCE

10.1.Limit


All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

10.2.Test Procedure


All restriction band and non- restriction band have been tested , only worse case is reported.

10.3.Test setup

For conducted method




For Radiated Method

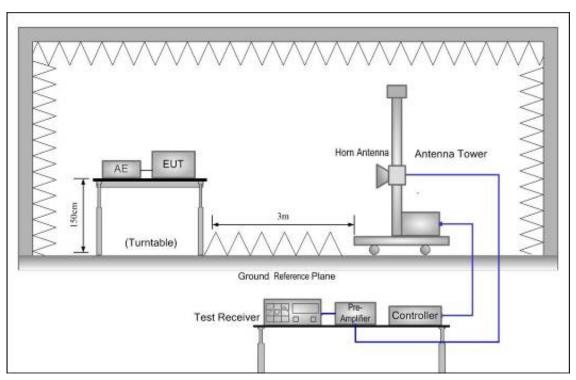

10.4.Test Result


PASS. (See below detailed test data)

Test Mode: GFSK-Low Hopping-off





Frequency in MHz


Test Mode: GFSK-High Hopping-off



Test Mode: GFSK-Low Hopping-on









Note: 1. *:Maximum data; x:Over limit; !:over margin.


2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

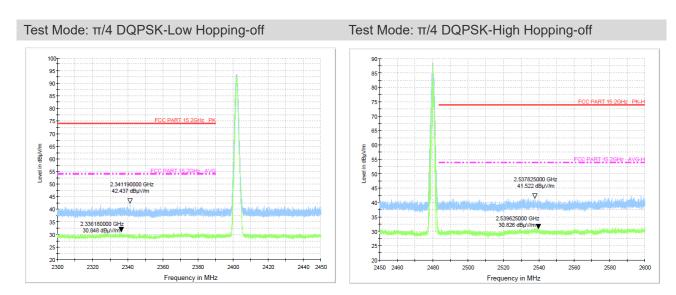


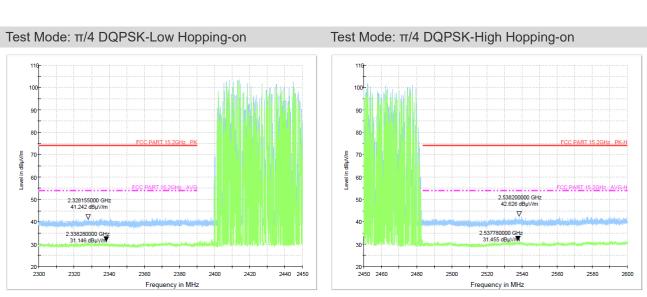

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

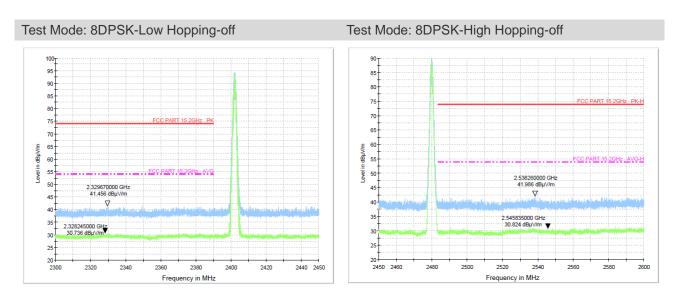

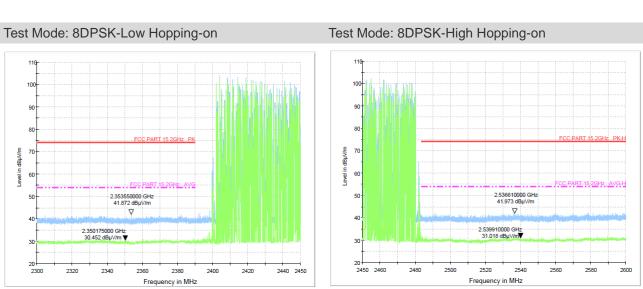


Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Conducted Method

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

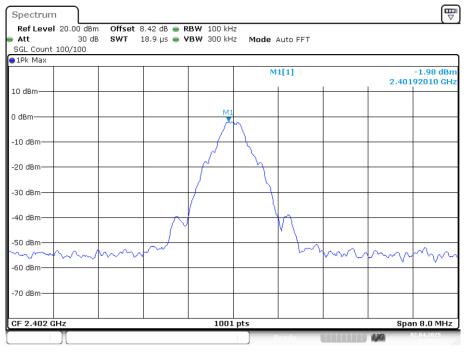


Date: 2.APR.2025 12:17:23

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

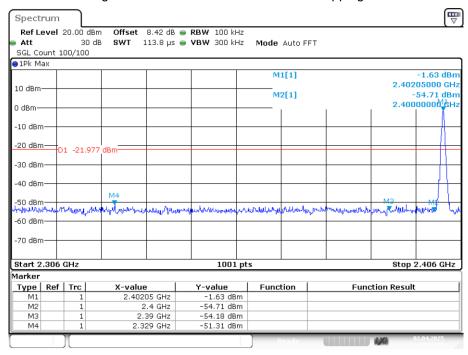


Date: 2.APR.2025 12:17:29

Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

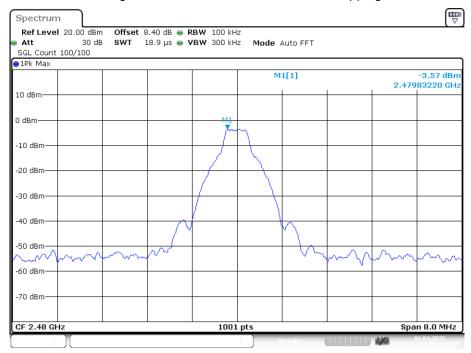


Date: 2.APR.2025 12:23:09

Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

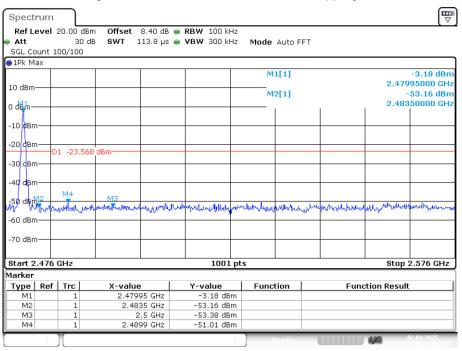


Date: 2.APR.2025 12:23:15

Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

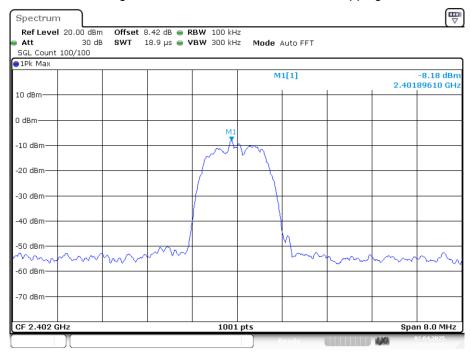


Date: 2.APR.2025 12:46:36

Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

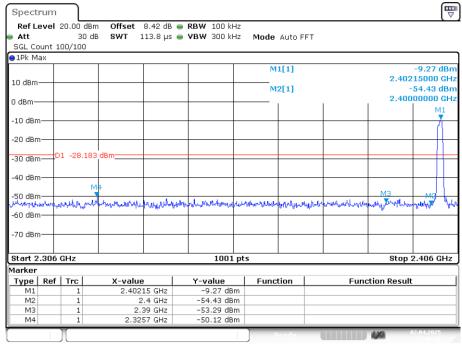


Date: 2.APR.2025 12:46:42

Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

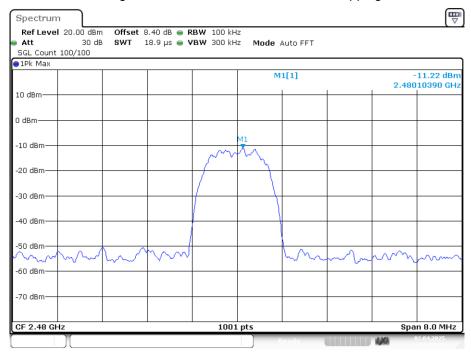


Date: 2.APR.2025 12:54:27

Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission

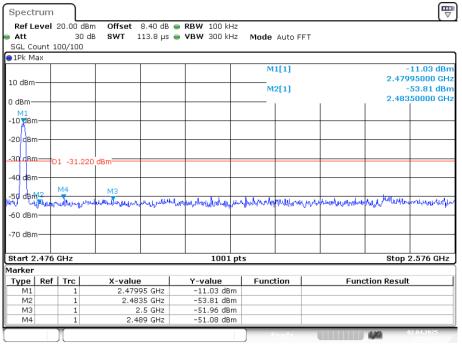


Date: 2.APR.2025 12:54:33

Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref

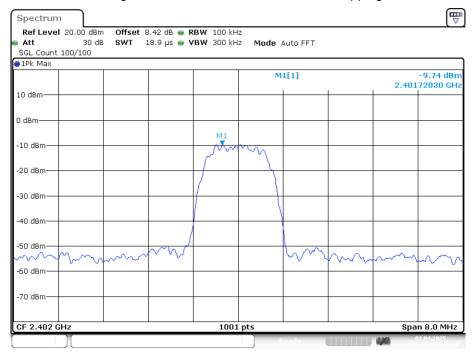


Date: 2.APR.2025 15:56:31

Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

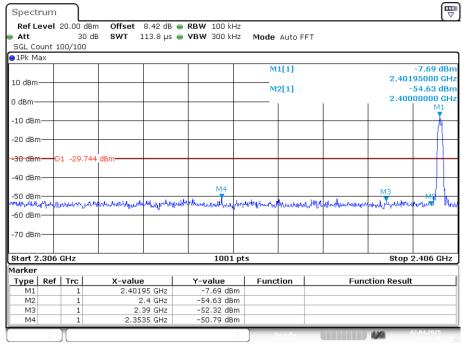


Date: 2.APR.2025 15:56:37

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref

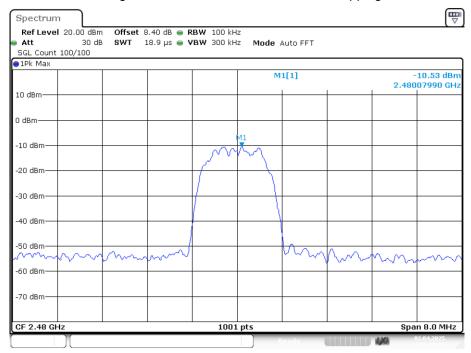

Date: 2.APR.2025 15:55:11

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission

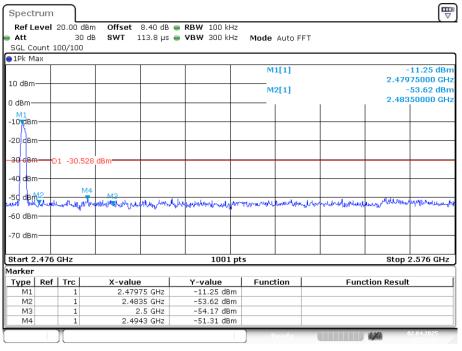


Date: 2.APR.2025 15:55:16

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref



Date: 2.APR.2025 12:28:53

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

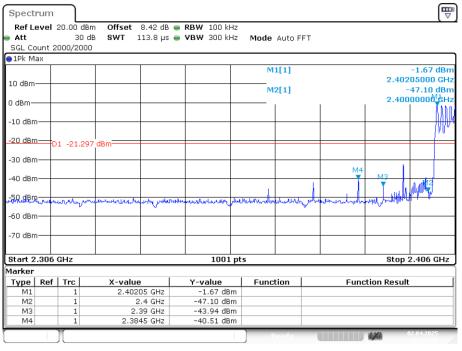


Date: 2.APR.2025 12:29:48

Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref



Date: 2.APR.2025 12:35:15

Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

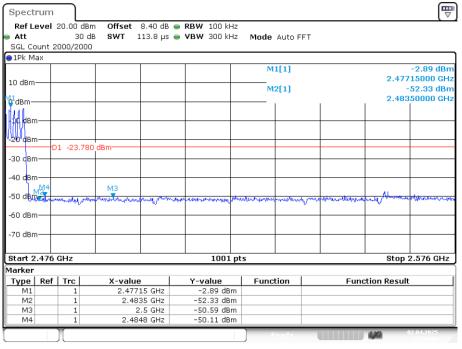


Date: 2.APR.2025 12:36:09

Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref



Date: 2.APR.2025 12:59:02

Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission

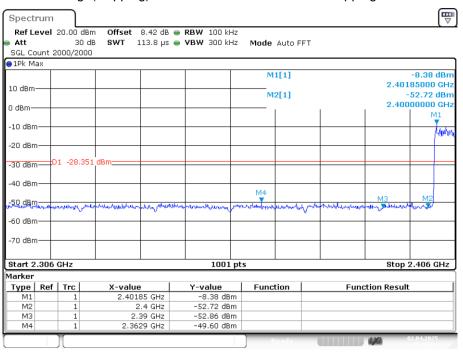


Date: 2.APR.2025 13:00:01

Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref



Date: 2.APR.2025 13:12:44

Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission

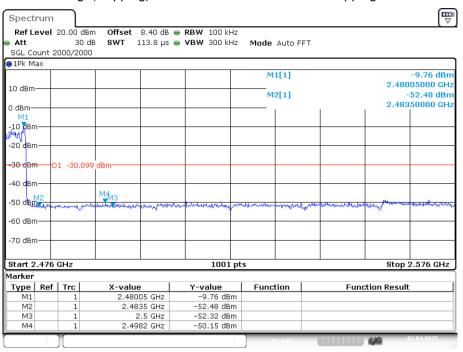


Date: 2.APR.2025 13:13:39

Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref




Date: 2.APR.2025 15:58:45

Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission

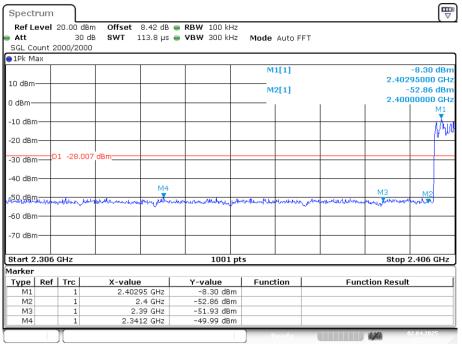


Date: 2.APR.2025 15:59:44

Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref

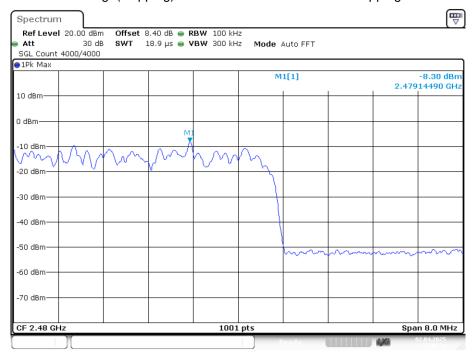

Date: 2.APR.2025 16:06:50

Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission

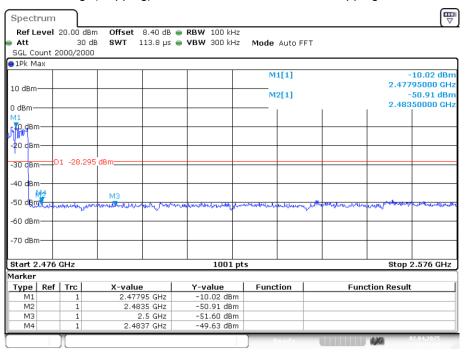

Date: 2.APR.2025 16:07:44

11. POWER LINE CONDUCTED EMISSIONS

11.1.Limit

	Maximum RF Line Voltage	
Frequency	Quasi-Peak Level	Average Level
	dB(μV)	dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50


Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

11.2.Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

11.3.Test setup

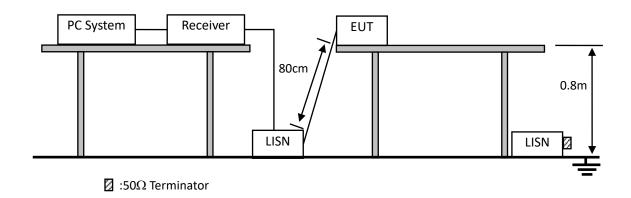

11.4.Test Result

Not applicable for equipment operated with battery or DC power supply.

12. ANTENNA REQUIREMENTS

12.1.Limit


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2.Result

The EUT antenna is Internal Antenna. It complies with the standard requirement.

13.TEST SETUP PHOTO

13.1.Photo of Radiated Emission test

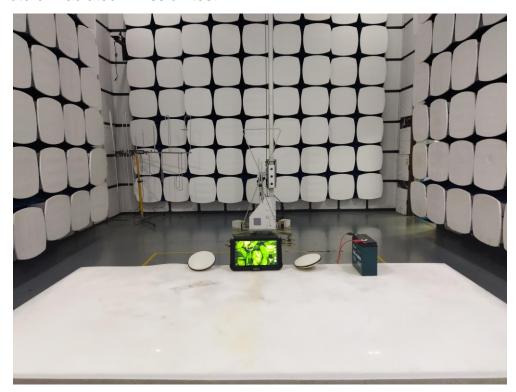



14. EUT PHOTO



















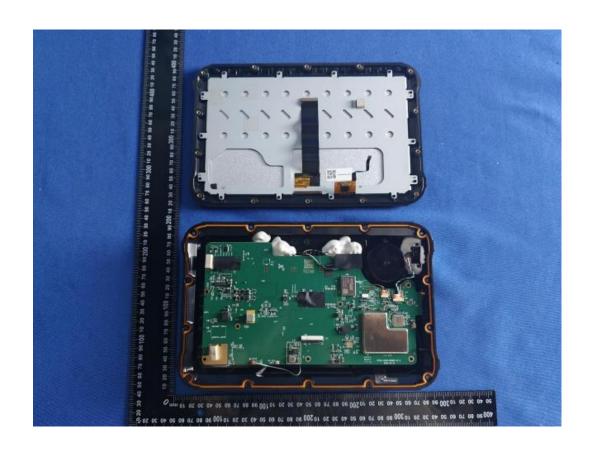


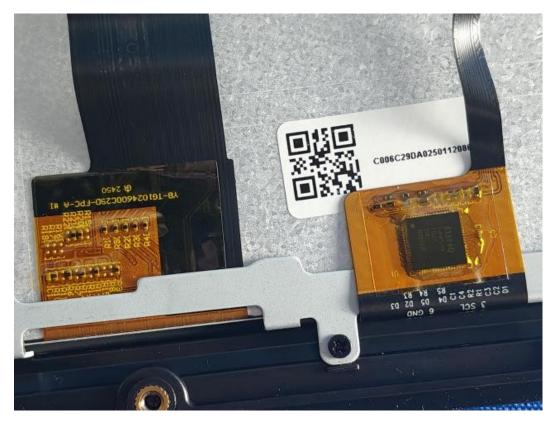








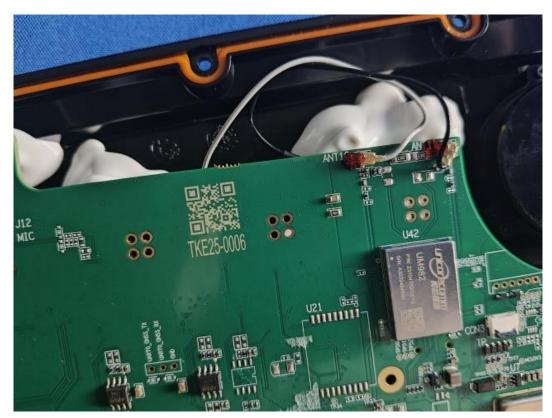











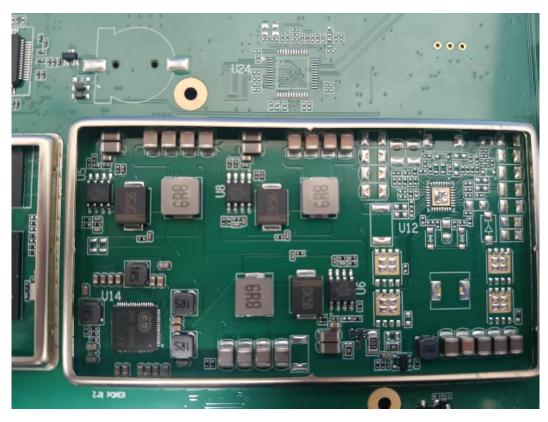


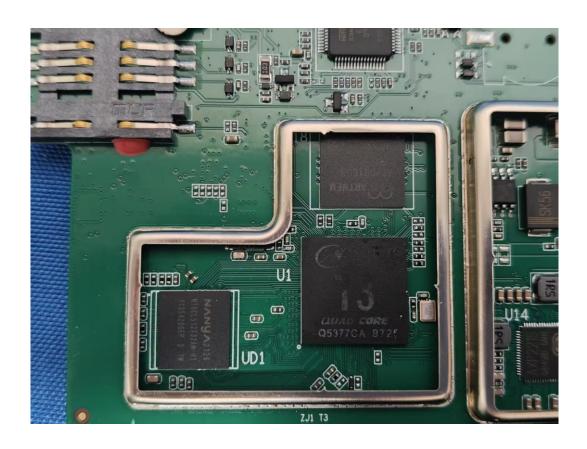


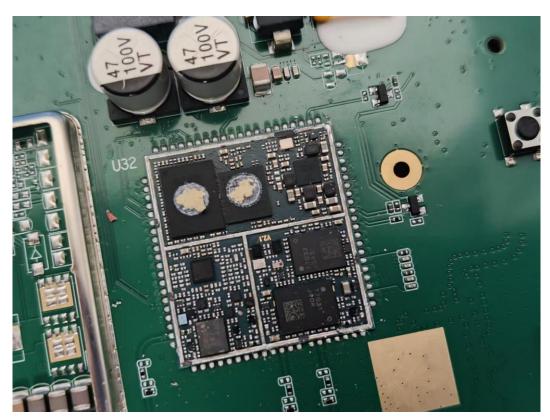

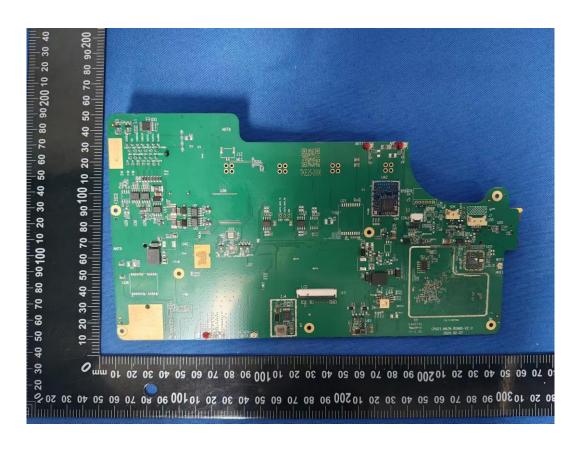

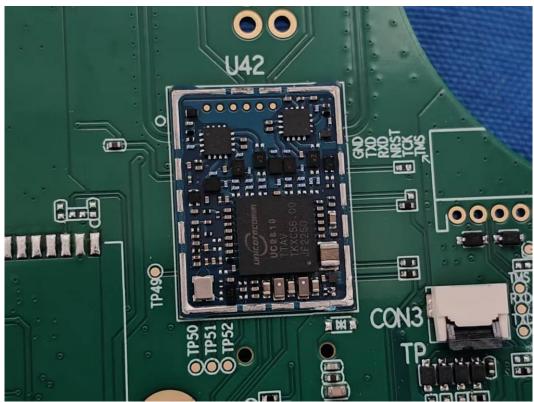

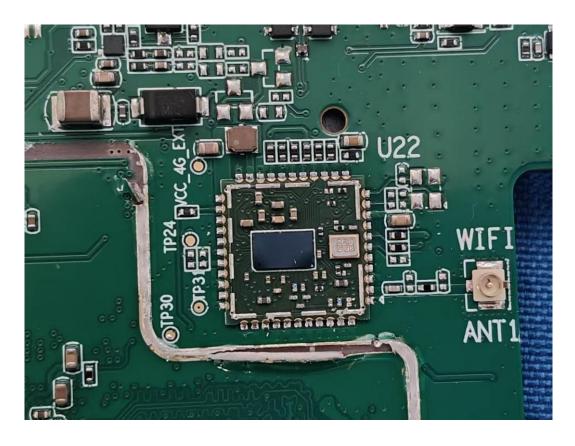

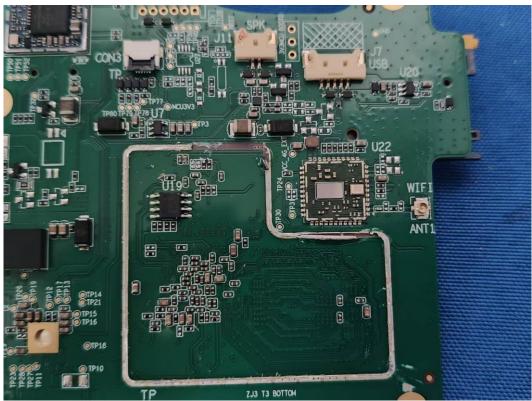

-----END OF REPORT-----