



FCC Part 15, Subpart C, Section 15.247
Test Report

On

Outdoor XT2 Blink Camera Module
FCC ID: 2AF77-H1981653

Customer Name: Immedia Semiconductor, LLC

Customer P.O.: 2D-02586616

Date of Report: January 8, 2020

Test Report No.: R-6458N-3

Test Start Date: November 27, 2019

Test Finish Date: December 4, 2019

Test Engineer: T. Hannemann

Test Technician: M. Seamans

Approved By: S. Wentworth

Report Prepared By: P. Harris

Our letters, procedures and reports are for the exclusive use of the customer to whom they are addressed and their communication or the use of the name of Retlif Testing Laboratories must receive our prior written approval. Our letters, procedures and reports apply only to the sample tested and are not necessarily indicative of the qualities of apparently identical or similar products. The letters, procedures and reports and the name of Retlif Testing Laboratories or insignia are not to be used under any circumstances in advertising to the general public. This test report shall not be reproduced, except in full, without the written approval of Retlif Testing Laboratories.



40 YEARS OF TESTING EXCELLENCE

Technical Information

Report Number: R-6458N-3

Customer: Immedia Semiconductor, LLC

Address: 100 Riverpark Drive
North Reading, MA 01864

Manufacturer: Immedia Semiconductor, LLC

Manufacturer Address: 100 Riverpark Drive
North Reading, MA 01864

Test Sample: Outdoor XT2 Blink Camera Module

Model Number: BCM00201U

Serial Number: 807-000-198 (Conducted Testing)
857-000-302 (Radiated Testing)

FCC ID: 2AF77-H1981653

Type: Digital Transmission - Direct Sequence Spread Spectrum Transmitter

Power Requirements: 5 VDC via External 120 VAC power adapter or 3 VDC via internal batteries

Frequency of Operation: 2412 MHz to 2462 MHz

Equipment Class: DTS

Antenna Type: Internal PCB Antenna – 2.0 dBi Gain

Equipment Use: Used in a Home Monitoring System

Test Specification:

FCC Rules and Regulations Part 15, Subpart C, Section 15.247

Test Procedure:

ANSI C63.4:2014

ANSI C63.10:2013

FCC 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019

Test Facility:

Retlif Testing Laboratories

101 New Boston Road

Goffstown, NH 03045

FCC Designation Number: US5327



Retlif Testing Laboratories

Report No. R-6458N-3

Tests Performed

FCC Part 15, Subpart C	Test Method
15.247(a)(2)	Occupied Bandwidth (6dB Bandwidth)
15.247(b)(3)	Power Output
15.247(d)	Antenna Port, Conducted Emissions
15.247(e)	Antenna Port, Power Density
15.247(d)	Spurious Radiated Emissions, 30 MHz to 25 GHz
15.207(a)	Conducted Emissions, Power Leads, 150 kHz to 30 MHz

EUT Operation:

The EUT is an outdoor Wi-Fi connected home security camera. The camera has a passive infrared motion sensor that can be used to trigger recording of video clips that are sent by Wi-Fi to internet based servers that relay the clips to the users' mobile device. The EUT can also receive commands from the user to start transmission of video or update status.

Table 1 – Support Equipment

Description	Manufacturer	Model Number	Serial Number
Radiated Testing			
Long-Range USB Adapter	ALFA Network	AWUS036NHA	180636A0001785
Laptop PC	HP	Probook 450G5	5CD88466QTY
Sync Module	Immedia Semiconductor	BSM00200U	270-090-633
Barcode Scanner	Symbol	DS6708-SR	2460000ION
Camera Quiescent Current Tester	Immedia Semiconductor	SW Rev16	114
Conducted Testing			
Laptop PC	HP	Probook 450G5	5CD88466QTY



Retlif Testing Laboratories

Report No. R-6458N-3

Certification and Signatures

We certify that this report is a true representation of the results obtained from the tests of the equipment stated. We further certify that the measurements shown in this report were made in accordance with the procedures indicated and vouch for the qualifications of all Retlif Testing Laboratories personnel taking them.



Scott Wentworth
Branch Manager



Todd Hannemann
EMC Test Engineer
iNARTE Certified Technician ATL-0255-T

Non-Warranty Provision

The testing services have been performed, findings obtained and reports prepared in accordance with generally accepted laboratory principles and practices. This warranty is in lieu of all others, either expressed or implied.

Non-Endorsement

This test report contains only findings and results arrived at after employing the specific test procedures and standards listed herein. It is not intended to constitute a recommendation, endorsement or certification of the product or material tested. This report must not be used by the client to claim product endorsement by ANSI National Accreditation Board (ANAB).



Retlif Testing Laboratories

Report No. R-6458N-3

Revision History

Revisions to this document are listed below; the latest revised document supersedes all previous issues of this document:

Revision	Date	Pages Affected
-	January 8, 2020	Original Release



Retlif Testing Laboratories

Report No. R-6458N-3

Requirements and Test Results

Requirement:

FCC Section 15.247(a)(2)

Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz

Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands. The minimum 6 dB bandwidths shall be at least 500 kHz.

- **Results:**

The minimum 6 dB bandwidth measured 8,717 kHz which complies with the requirement that the Bandwidth be no less than 500 kHz.

Requirement:

FCC Sections 15.247(b)(3)

Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

For systems using digital modulation in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antenna and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antenna and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

- **Results:**

The maximum measured peak conducted output power was 67.76 mW. The maximum antenna gain of the PCB antenna is 2.0 dBi. The device was found to meet the power output requirements of 15.247 (b)(3) including de facto EIRP.



Retlif Testing Laboratories

Report No. R-6458N-3

Requirements and Test Results (con't)

Requirement:

FCC Section 15.247(d):

Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) must also comply with the radiated emissions limits specified in Section 15.209(a) (see Section 15.205(c)).

- **Results:**

In any 100 kHz bandwidth outside the frequency band in which the Spread spectrum intentional radiator was operating, the radio frequency power that was produced by the intentional radiator was at least 20 dB below that in the 100 kHz bandwidth within the band that contained the highest level of the desired power. All emissions, which fell within the restricted bands specified in 15.205(a), were measured and found to be in compliance with the limits specified in 15.209(a).



Retlif Testing Laboratories

Report No. R-6458N-3

Requirements and Test Results (con't)

Requirement:

FCC Section 15.247(e):

Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

- **Results:**

The power spectral density conducted from the intentional radiator to the antenna was not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density was determined in accordance with Section 15.247(b)(3), herein.

Requirement:

FCC Section 15.209(a) - Radiated Emission Limits, General Requirements

Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in Table 2.

Table 2 - Radiated Emission Limits

Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 to 88	100	3
88 to 216	150	3
216 to 960	200	3
Above 960	500	3

- **Results:**

The field strength of spurious radiated emissions did not exceed the limits specified in Table 2.



Retlif Testing Laboratories

Report No. R-6458N-3

Requirements and Test Results (con't)

Requirement:

FCC Section 15.207(a) - Conducted Limits

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits shown in Table 3, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of the paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Table 3 - Conducted Emission Limits

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50
*Decreases due to logarithm of the frequency		

- **Results:**

The conducted emissions observed did not exceed the limits specified in Table 3.



Retlif Testing Laboratories

Report No. R-6458N-3

Requirements and Test Results (con't)

Field Strength Calculation/Conversion:

The maximized field strength of the emission was obtained as follows:

$$C_R = M_R + C_F$$

Where:

C_R = Corrected Reading in dB μ V/m

M_R = Uncorrected Meter Reading in dB μ V

C_F = Correction Factor in dB (Antenna Factor, Pre-amp + Cable Loss)

Example:

$$M_R = 15.35 \text{ dB}\mu\text{V}$$

$$C_F = 16.85 \text{ dB}$$

$$C_R = 15.35 \text{ dB}\mu\text{V} + 16.85 = 32.2 \text{ dB}\mu\text{V/m}$$

dB μ V/M is converted to uV/M for comparison to the specified limit using the formula:

$$\text{invLog dB}\mu\text{V/M}/20$$

$$32.2 \text{ dB}\mu\text{V/m} = 40.74 \text{ uV/m}$$

RF Power Conversion:

Power readings in dBm may be converted to mW using the formula:

$$\text{InvLog dBm}/10$$

$$\text{Example: } 20\text{dBm} = 100\text{mW}$$



Retlif Testing Laboratories

Report No. R-6458N-3

Requirements and Test Results (con't)

FCC Section 15.247 (i)

RF Exposure Limits

Spread Spectrum Transmitters operating under 15.247 must be operated in a manner that ensures the public is not exposed to RF energy levels in excess of the commission's guidelines. Based on the transmitter power and maximum antenna gain (see calculation below) the minimum separation distance was calculated to determine the distance for acceptable MPE power density levels to meet both the Occupational/Controlled Exposure and the General Population/Uncontrolled Exposure requirements of FCC Part 1.1310. The calculation below uses the more stringent General Population MPE Limits.

$$S = \frac{PG}{4\pi D^2}$$

D = Minimum Separation Distance in cm

S = Max allowed Power Density in mW/cm²

Per 1.1310 For the Frequency of 2480 MHz S = 1 mW/cm²

Power = Max Power Input to Antenna = 67.76mW

Gain = Max Power Gain of Antenna = 2 dBi = 1.58 numeric

$$1 \text{ mW/cm}^2 = \frac{67.76 \times 1.58}{4 \times (3.14) \times D^2} = \frac{107.06}{12.56 \times D^2}$$

$$D^2 = \frac{107.06}{12.56 \times 1}$$

The test sample has an internal antenna and the minimum separation distance will always be maintained.



Retlif Testing Laboratories

Report No. R-6458N-3

Equipment List

FCC Section 15.247(a)(2) Occupied Bandwidth (6 dB Bandwidth)

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	11/6/2018	12/31/2019
5250	DIGI-SENSE	HYGROMETER	0 - 50 deg. c, 10 - 90 % RH	20250-30	10/7/2019	10/31/2020
5229	FLORIDA RS TECHNOLOGY	CABLE, COAXIAL	DC - 40 GHz	FLRST-2.92 (1026)	11/01/2019	11/30/2020

FCC Section 15.247(b)(3) Power Output

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	11/6/2018	12/31/2019
5250	DIGI-SENSE	HYGROMETER	0 - 50 deg. c, 10 - 90 % RH	20250-30	10/7/2019	10/31/2020
5229	FLORIDA RS TECHNOLOGY	CABLE, COAXIAL	DC - 40 GHz	FLRST-2.92 (1026)	11/01/2019	11/30/2020

FCC Section 15.247(d) Antenna Port, Conducted Emissions

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	11/6/2018	12/31/2019
5250	DIGI-SENSE	HYGROMETER	0 - 50 deg. c, 10 - 90 % RH	20250-30	10/7/2019	10/31/2020
5229	FLORIDA RS TECHNOLOGY	CABLE, COAXIAL	DC - 40 GHz	FLRST-2.92 (1026)	11/01/2019	11/30/2020

FCC Section 15.247(e) Antenna Port, Power Density

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	11/6/2018	12/31/2019
5250	DIGI-SENSE	HYGROMETER	0 - 50 deg. c, 10 - 90 % RH	20250-30	10/7/2019	10/31/2020
5229	FLORIDA RS TECHNOLOGY	CABLE, COAXIAL	DC - 40 GHz	FLRST-2.92 (1026)	11/01/2019	11/30/2020



Retlif Testing Laboratories

Report No. R-6458N-3

**FCC Section 15.247(d)
Spurious Radiated Emissions, 30 MHz to 25 GHz**

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
1232	AGILENT / HP	PRE-AMPLIFIER	1 - 26.5 GHz	8449B	5/24/2019	5/31/2020
3430	MCS	ANTENNA, HORN	18 - 26.5 GHz	K-5039	No Calibration Required	
4029B	RETLIF	OPEN AREA TEST SITE, ATTENUATION	3 / 10 Meters	RNH	9/30/2019	9/30/2021
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	11/6/2018	12/31/2019
5188	Cybertron	COMPUTER, CONTROL	N/A	TSVQJA2221	No Calibration Required	
5195	ETS / EMCO	ANTENNA, DOUBLE RIDGED GUIDE	1 - 18 GHz	3117	1/23/2019	7/31/2020
5211	COM-POWER	GENERATOR, COMB	1 MHz - 1 GHz	CGO-501	5/1/2019	5/31/2020
5229	FLORIDA RS TECHNOLOGY	CABLE, COAXIAL	DC - 40 GHz	FLRST-2.92 (102ö)	11/1/2019	11/30/2020
5234	PASTERNAK	CABLE, COAXIAL	10 kHz - 18 GHz	PE302-230	8/14/2019	8/31/2020
5242	TELEDYNE MICROWAVE	CABLE, COAXIAL	10 kHz - 6 GHz	PR90-195-1275, 106'	9/12/2019	9/30/2020
8549	EMCO	ANTENNA, LOG PERIODIC	200 MHz - 1 GHz	3146	6/29/2019	6/30/2022
8550	EMCO	ANTENNA, BICONICAL	30 - 300 MHz	3110B	6/29/2019	6/30/2022

**FCC Section 15.207(b)
Conducted Emissions, Power Leads, 150 kHz to 30 MHz**

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	11/6/2018	12/31/2019
5133	NARDA MICROWAVE	ATTENUATOR, COAXIAL	10 dB, DC - 12.4 GHz, 2 W	757C-10	11/8/2019	11/30/2020
5188	Cybertron	COMPUTER, CONTROL	N/A	TSVQJA2221	No Calibration Required	
5209	SOLAR ELECTRONICS	LISN	50 uH, 150 kHz - 30 MHz	21106-50-BP-25-BNC	5/16/2019	5/31/2020
5210	SOLAR ELECTRONICS	LISN	50 uH, 150 kHz - 30 MHz	21106-50-BP-25-BNC	5/16/2019	5/31/2020
5250	DIGI-SENSE	HYGROMETER	0 - 50 deg. c, 10 - 90 % RH	20250-30	10/7/2019	10/31/2020



Retlif Testing Laboratories

Report No. R-6458N-3

Test Photographs
Occupied Bandwidth (6dB Bandwidth)



EUT Configuration



Test Setup



Retlif Testing Laboratories

Report No. R-6458N-3

**FCC Part 15, Subpart C, Section 15.247(a)(2)
Occupied Bandwidth (6 dB Bandwidth)
Test Data**




Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Occupied Bandwidth
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (a)(2)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (OFDM) at 2412 MHz
Technician:	M. Seamans
Date(s):	December 2 nd , 2019
Temp/ Relative Humidity:	20.9 °C / 25.0 %
Notes:	6dB Bandwidth: 15.681 MHz

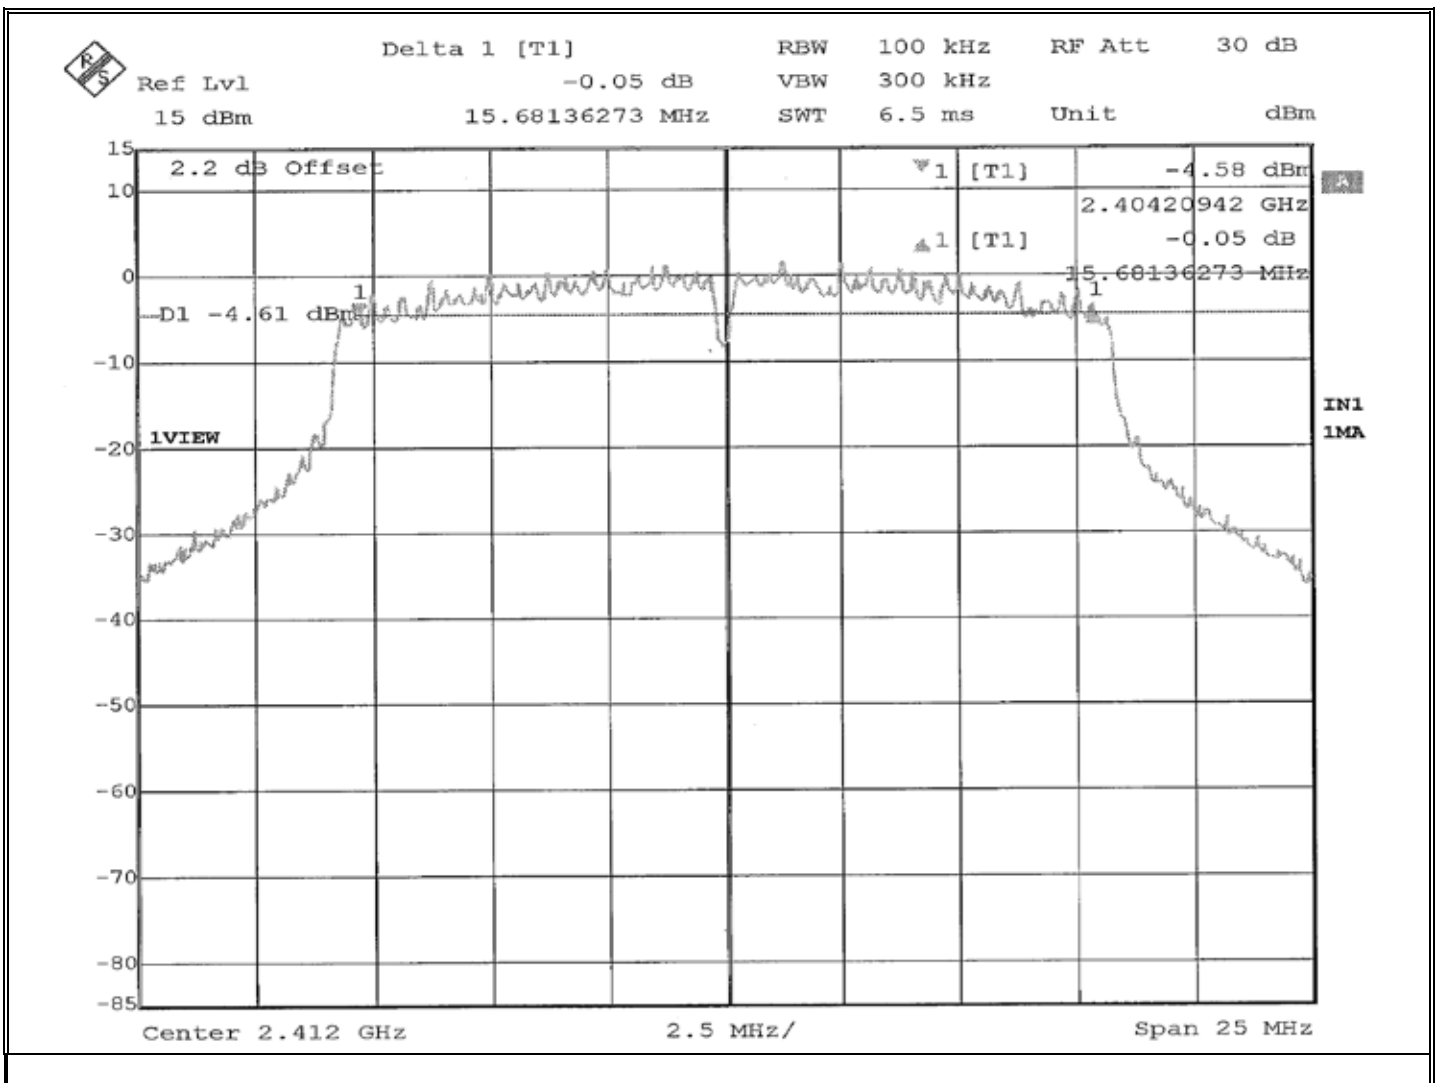


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Occupied Bandwidth
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (a)(2)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (OFDM) at 2437 MHz
Technician:	M. Seamans
Date(s):	December 2 nd , 2019
Temp/ Relative Humidity:	20.9 °C / 25.0 %
Notes:	6dB Bandwidth: 15.430 MHz

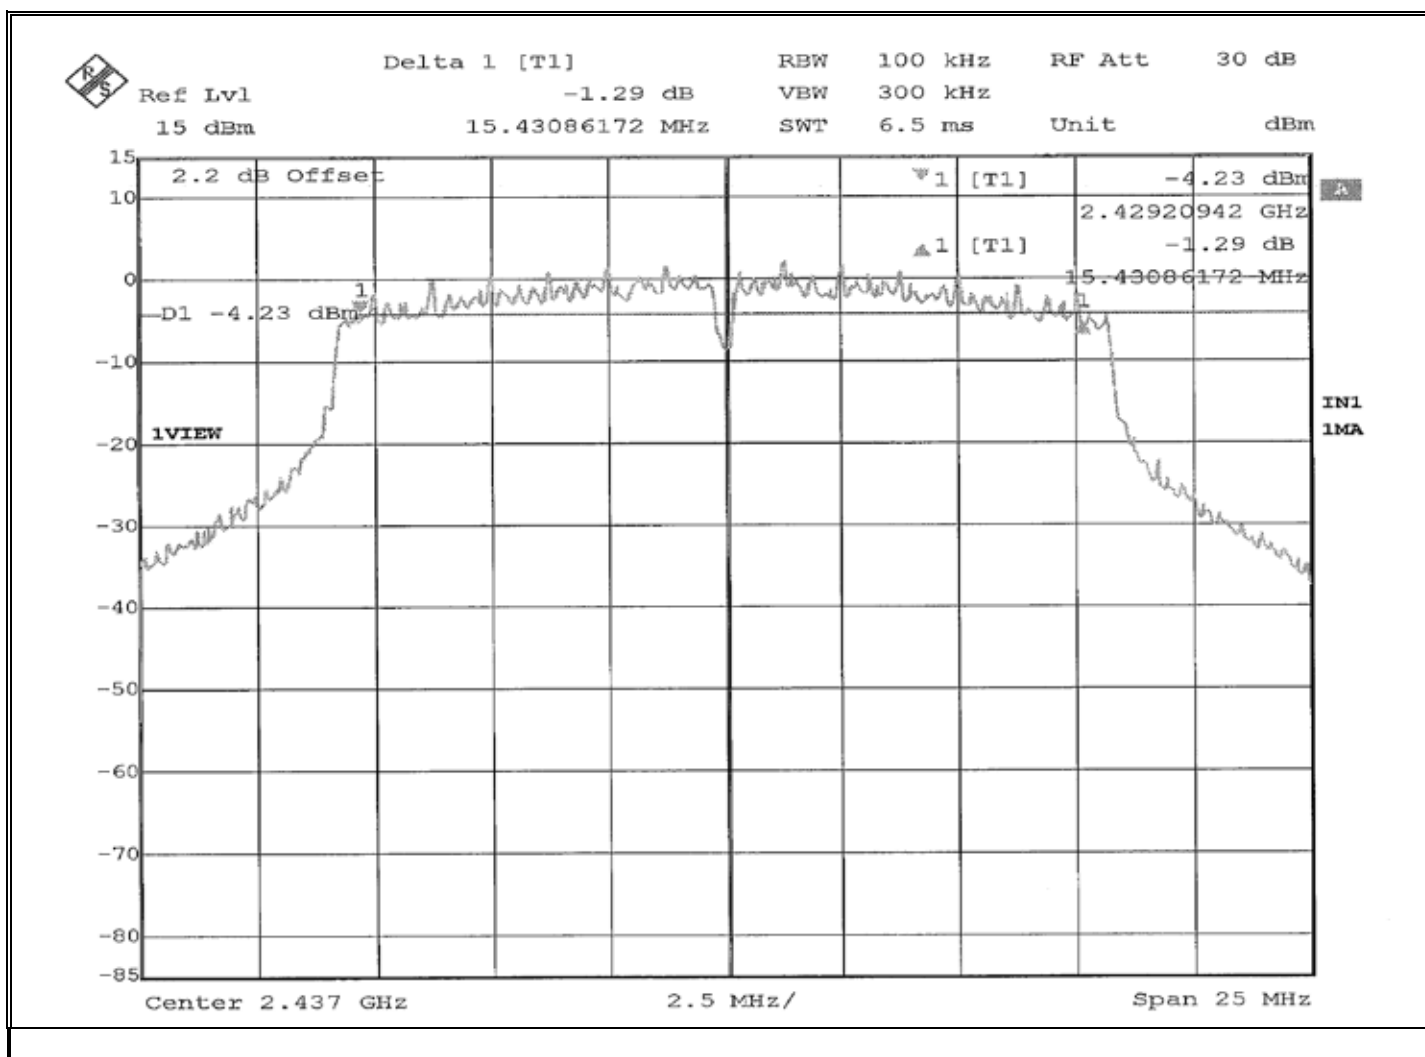


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Occupied Bandwidth
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (a)(2)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (OFDM) at 2462 MHz
Technician:	M. Seamans
Date(s):	December 2 nd , 2019
Temp/ Relative Humidity:	20.9 °C / 25.0 %
Notes:	6dB Bandwidth: 15.230 MHz

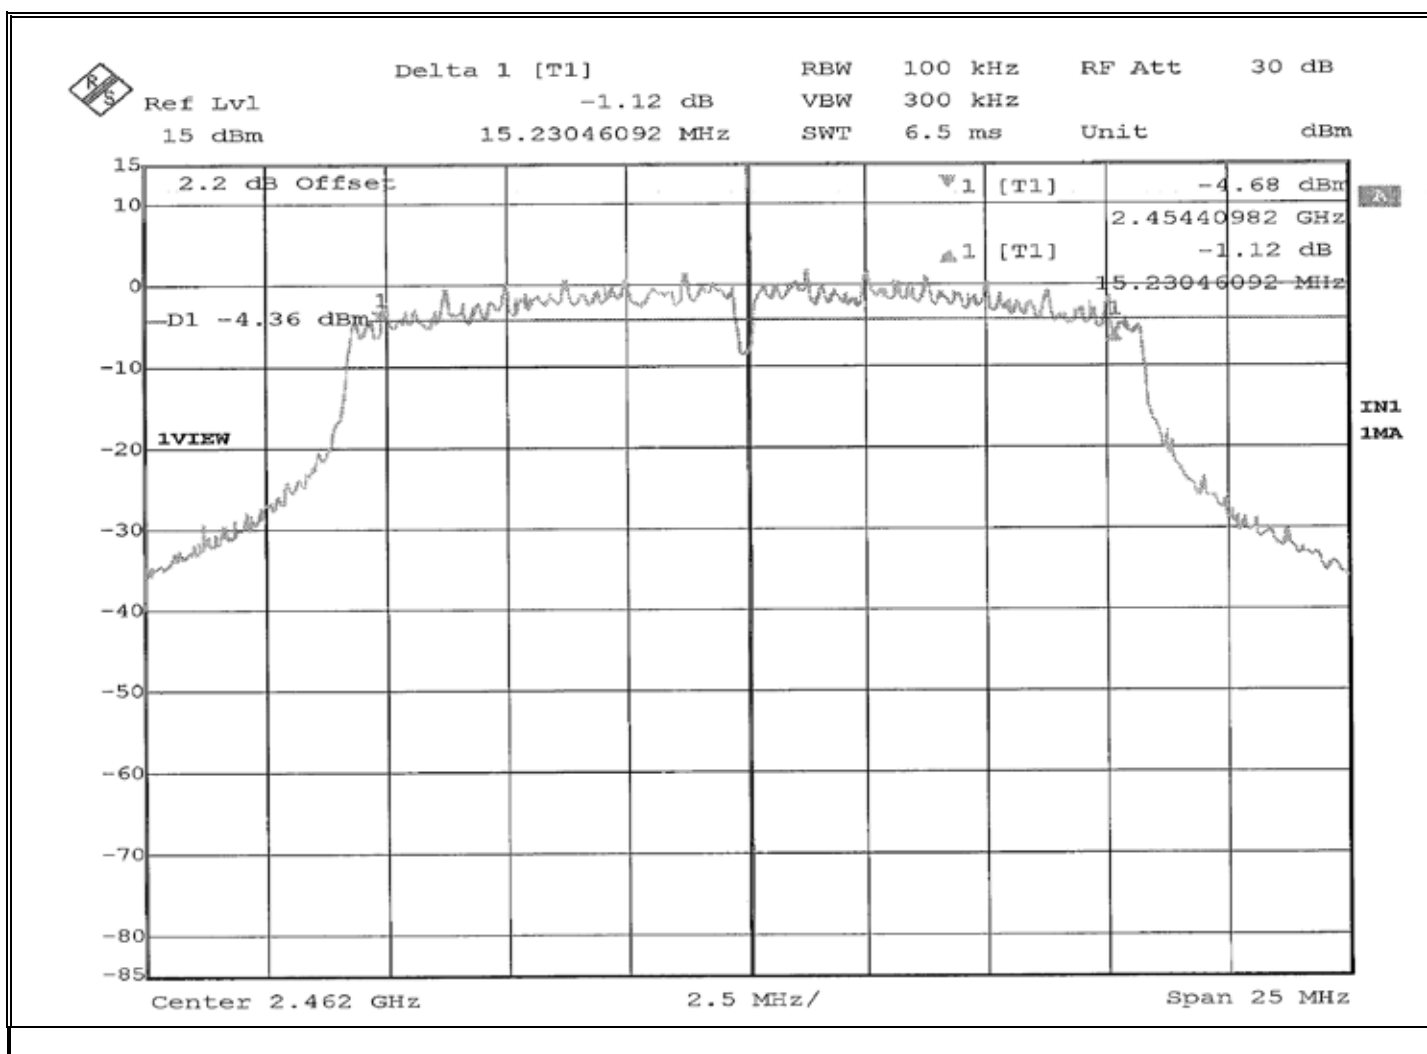


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Occupied Bandwidth
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (a)(2)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (DSSS) at 2412 MHz
Technician:	M. Seamans
Date(s):	December 2 nd , 2019
Temp/ Relative Humidity:	20.9 °C / 25.0 %
Notes:	6dB Bandwidth: 8.717 MHz

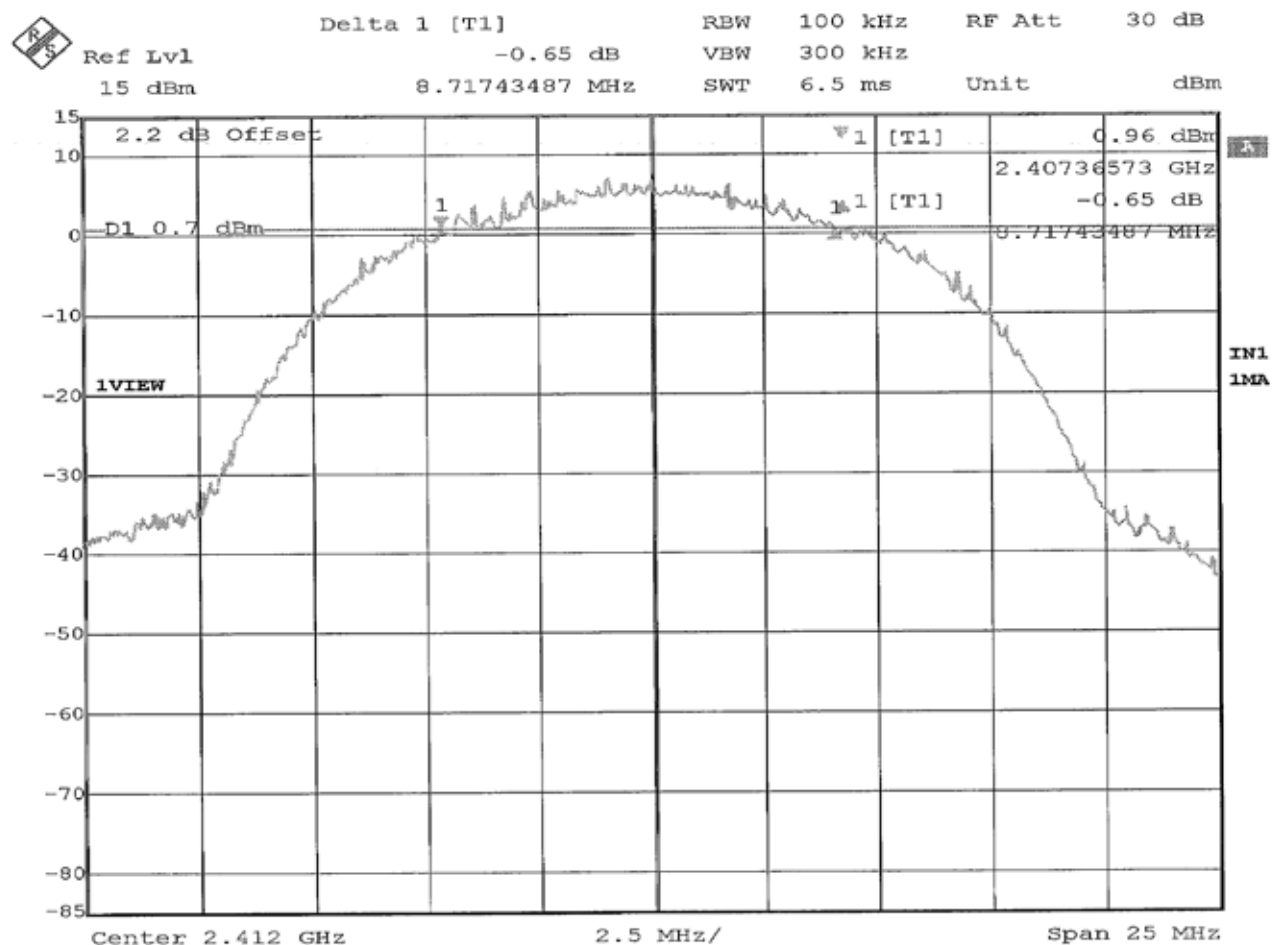


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Occupied Bandwidth
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (a)(2)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (DSSS) at 2437 MHz
Technician:	M. Seamans
Date(s):	December 2 nd , 2019
Temp/ Relative Humidity:	20.9 °C / 25.0 %
Notes:	6dB Bandwidth: 9.218 MHz

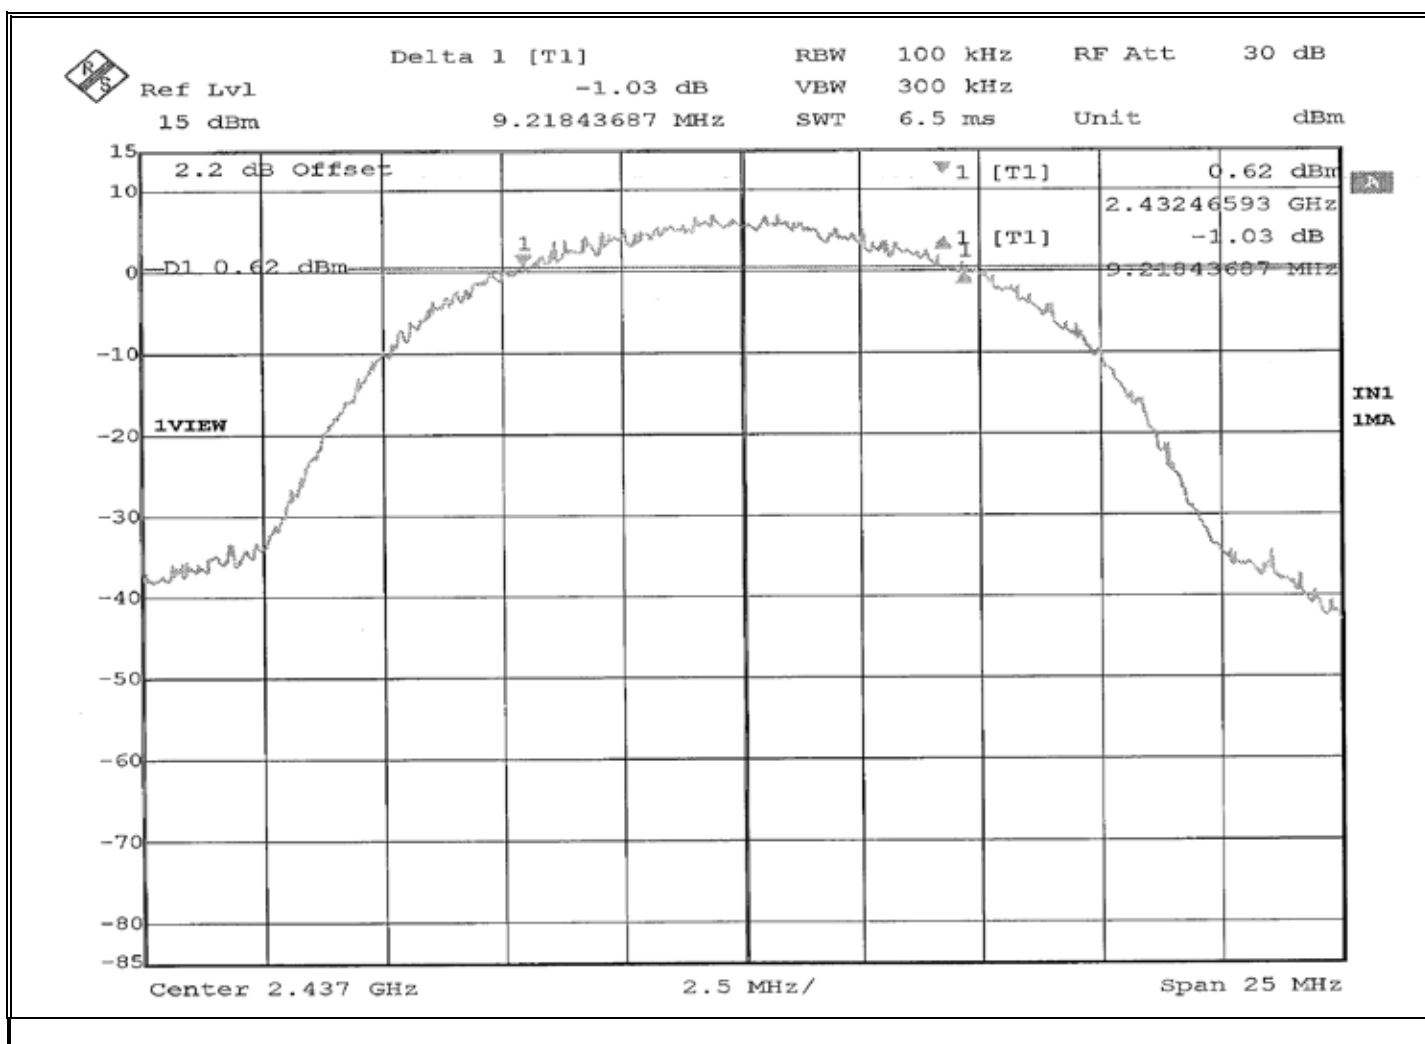


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Occupied Bandwidth
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (a)(2)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (DSSS) at 2462 MHz
Technician:	M. Seamans
Date(s):	December 2 nd , 2019
Temp/ Relative Humidity:	20.9 °C / 25.0 %
Notes:	6dB Bandwidth: 10.270 MHz

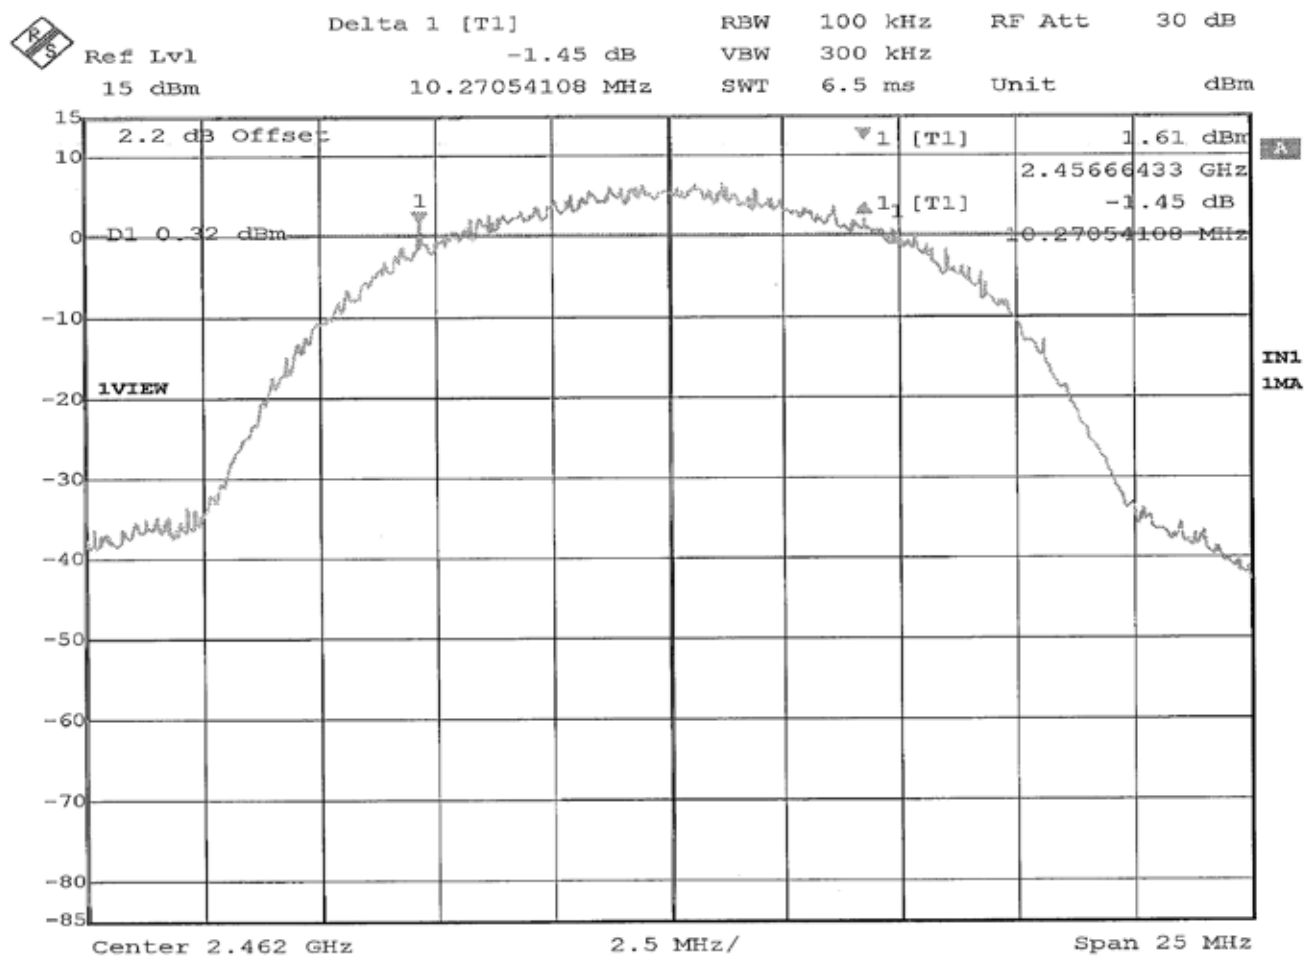


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Occupied Bandwidth
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (a)(2)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (Non11) at 2412 MHz
Technician:	M. Seamans
Date(s):	December 2 nd , 2019
Temp/ Relative Humidity:	20.9 °C / 25.0 %
Notes:	6dB Bandwidth: 15.180 MHz

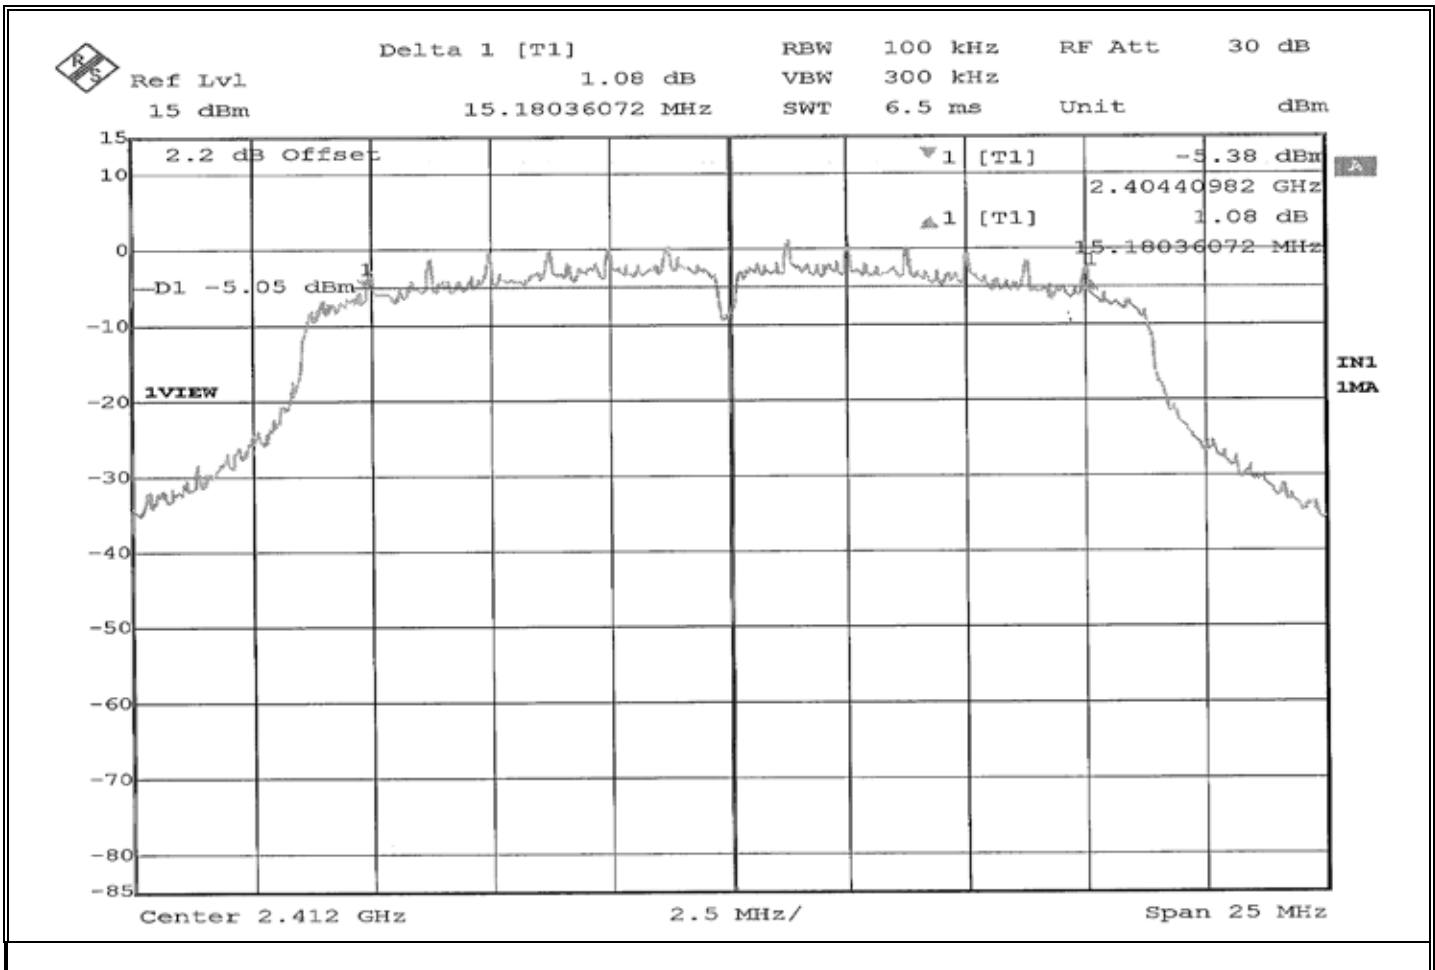


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Occupied Bandwidth
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (a)(2)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (Non11) at 2437 MHz
Technician:	M. Seamans
Date(s):	December 2 nd , 2019
Temp/ Relative Humidity:	20.9 °C / 25.0 %
Notes:	6dB Bandwidth: 15.180 MHz

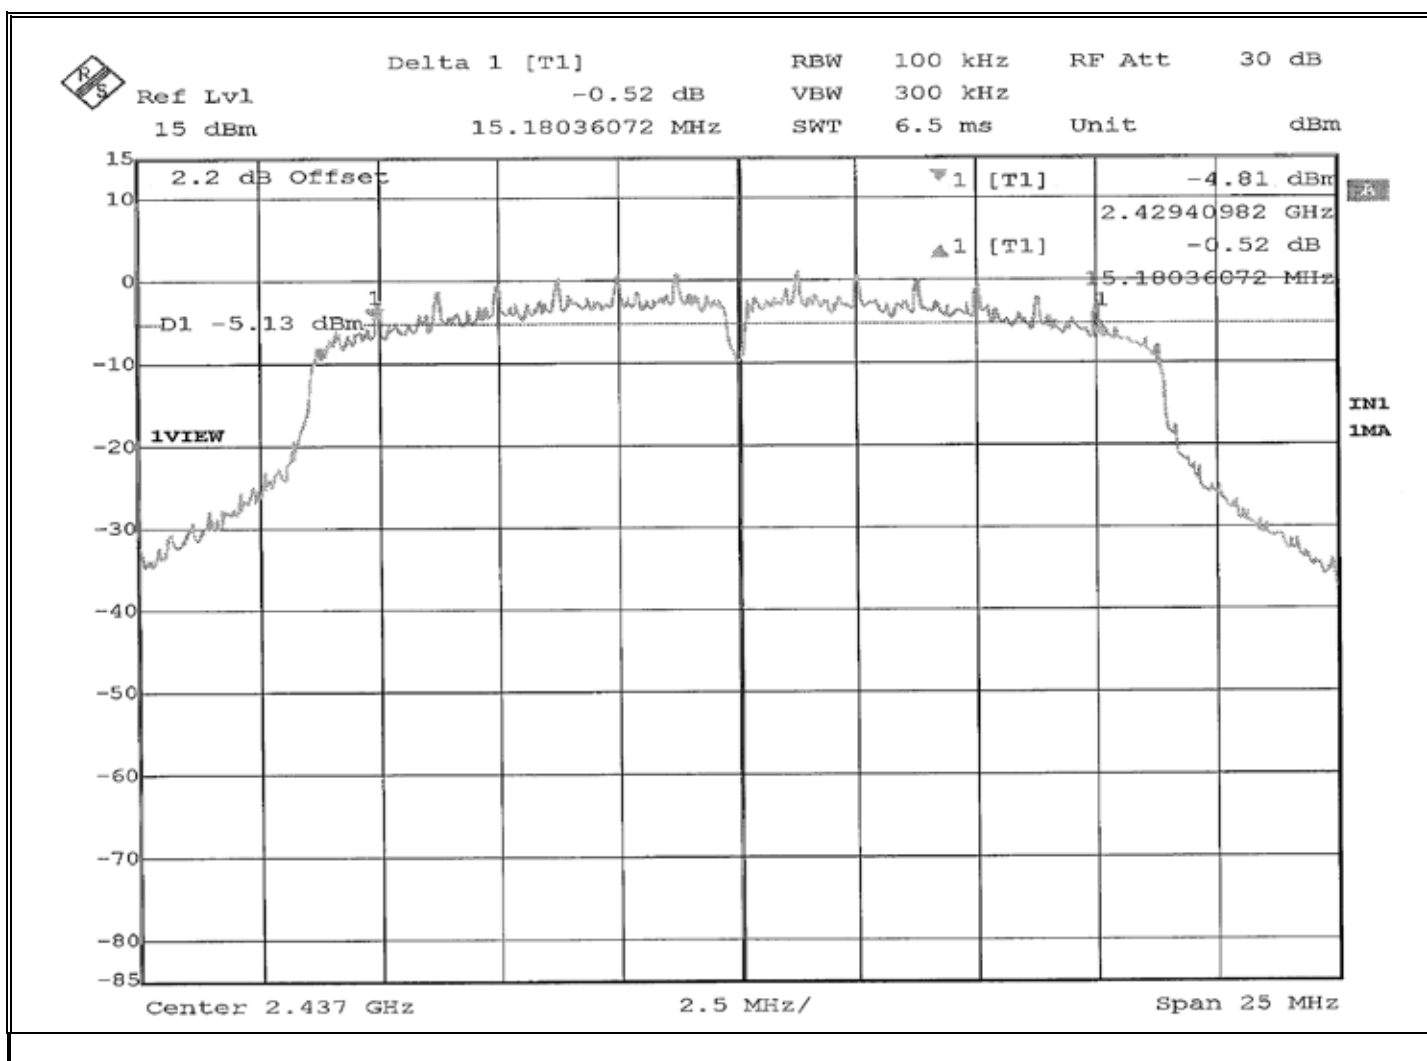


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Occupied Bandwidth
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (a)(2)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (Non11) at 2462 MHz
Technician:	M. Seamans
Date(s):	December 2 nd , 2019
Temp/ Relative Humidity:	20.9 °C / 25.0 %
Notes:	6dB Bandwidth: 15.180 MHz

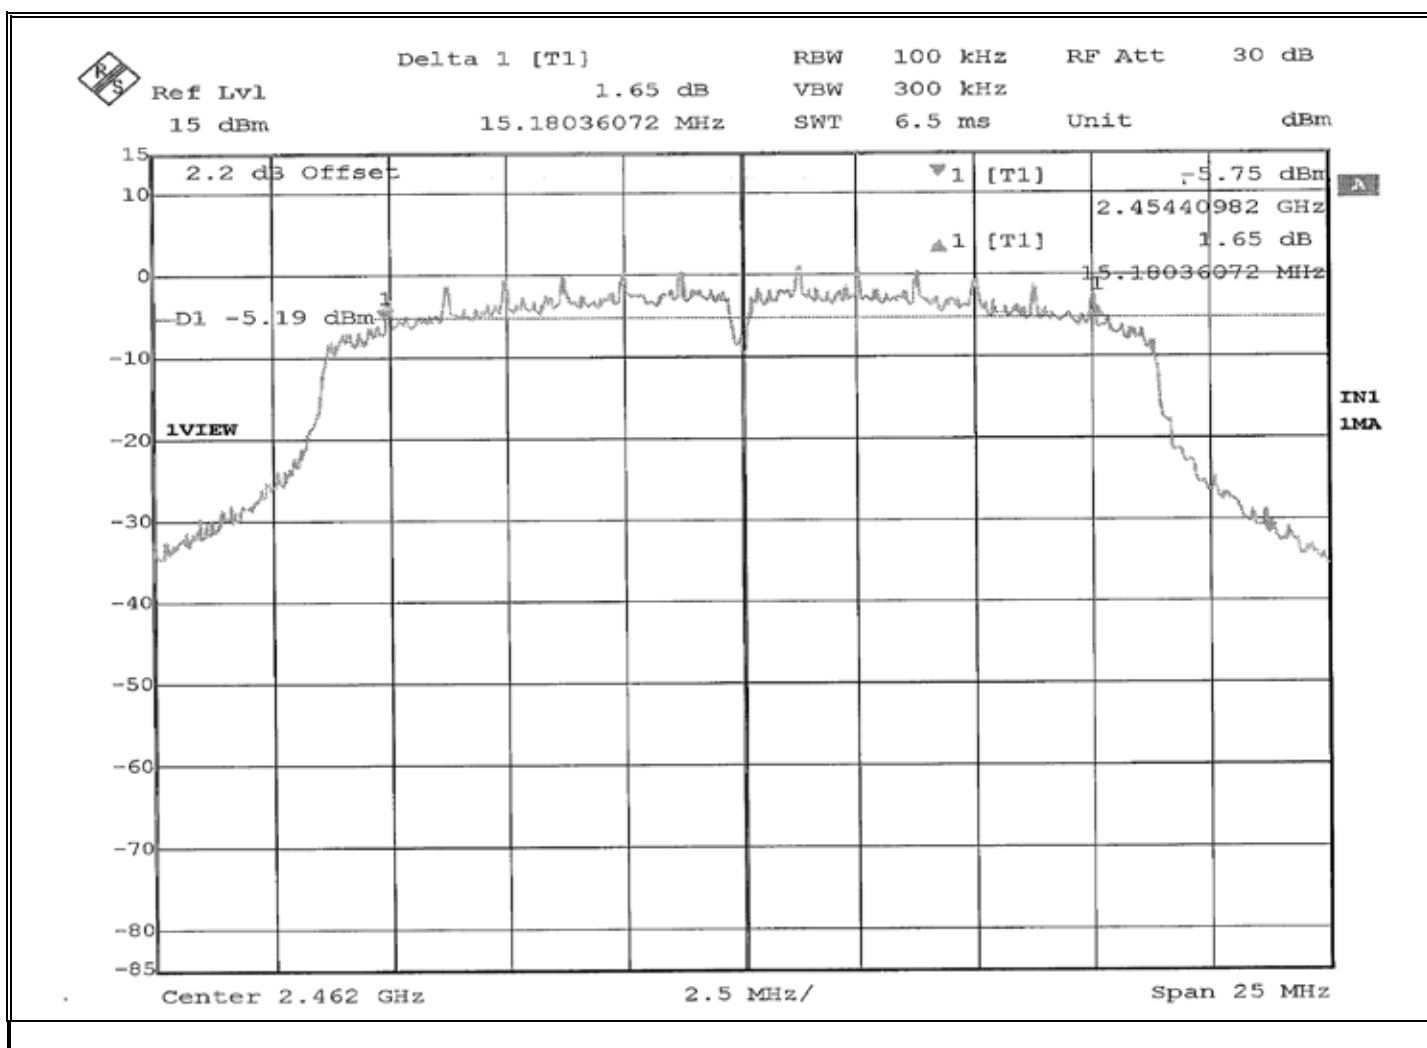

Retlif Testing Laboratories

Report No. R-6458N-3

Test Photographs Conducted Emissions, Power Output



EUT Configuration



Test Setup



Retlif Testing Laboratories

Report No. R-6458N-3

**FCC Part 15, Subpart C, Section 15.247(b)(3)
Conducted Emissions, Power Output
Test Data**



Retlif Testing Laboratories


Report No. R-6458N-3

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Peak Power Output
Customer	Immedia Semiconductor LLC
Job Number	R-6458N-3
Test Sample	Outdoor XT2 Blink Camera Module
Model Number	BCM00201U
Serial Number	877-000-198
Test Specification	FCC Part 15, Subpart C Paragraph 15.247 (b)(3)
Operating Mode	Transmitting modulated signal (OFDM) at 2412 MHz
Technician	M. Seamans
Date	December 2 nd , 2019

Notes: Measurement method: AVGSA-3

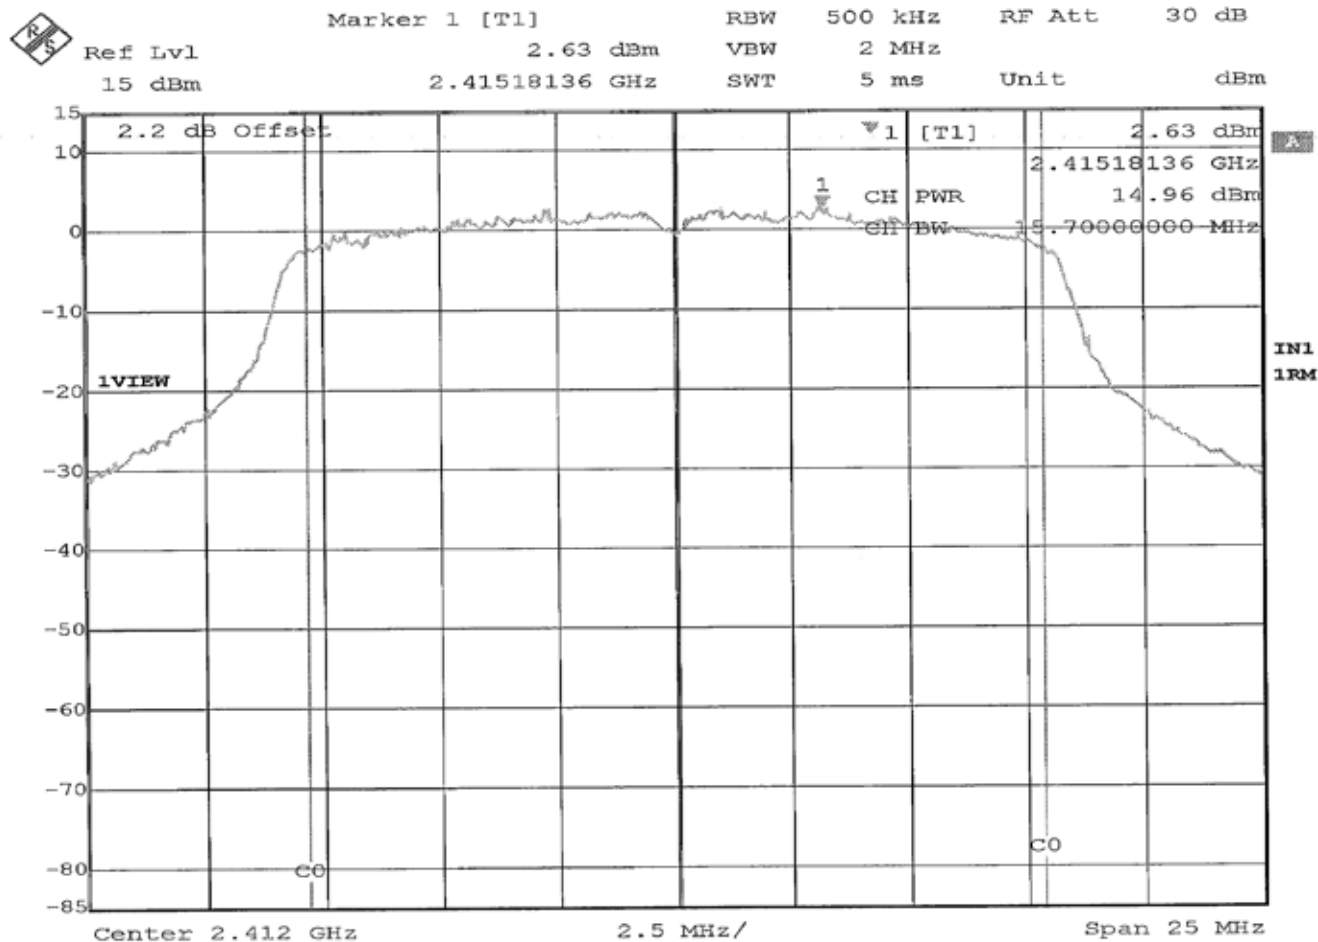

Power Output: 14.96 dBm



Retlif Testing Laboratories


Report No. R-6458N-3

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Peak Power Output
Customer	Immedia Semiconductor LLC
Job Number	R-6458N-3
Test Sample	Outdoor XT2 Blink Camera Module
Model Number	BCM00201U
Serial Number	877-000-198
Test Specification	FCC Part 15, Subpart C Paragraph 15.247 (b)(3)
Operating Mode	Transmitting modulated signal (OFDM) at 2437 MHz
Technician	M. Seamans
Date	December 2 nd , 2019

Notes: Measurement method: AVGSA-3

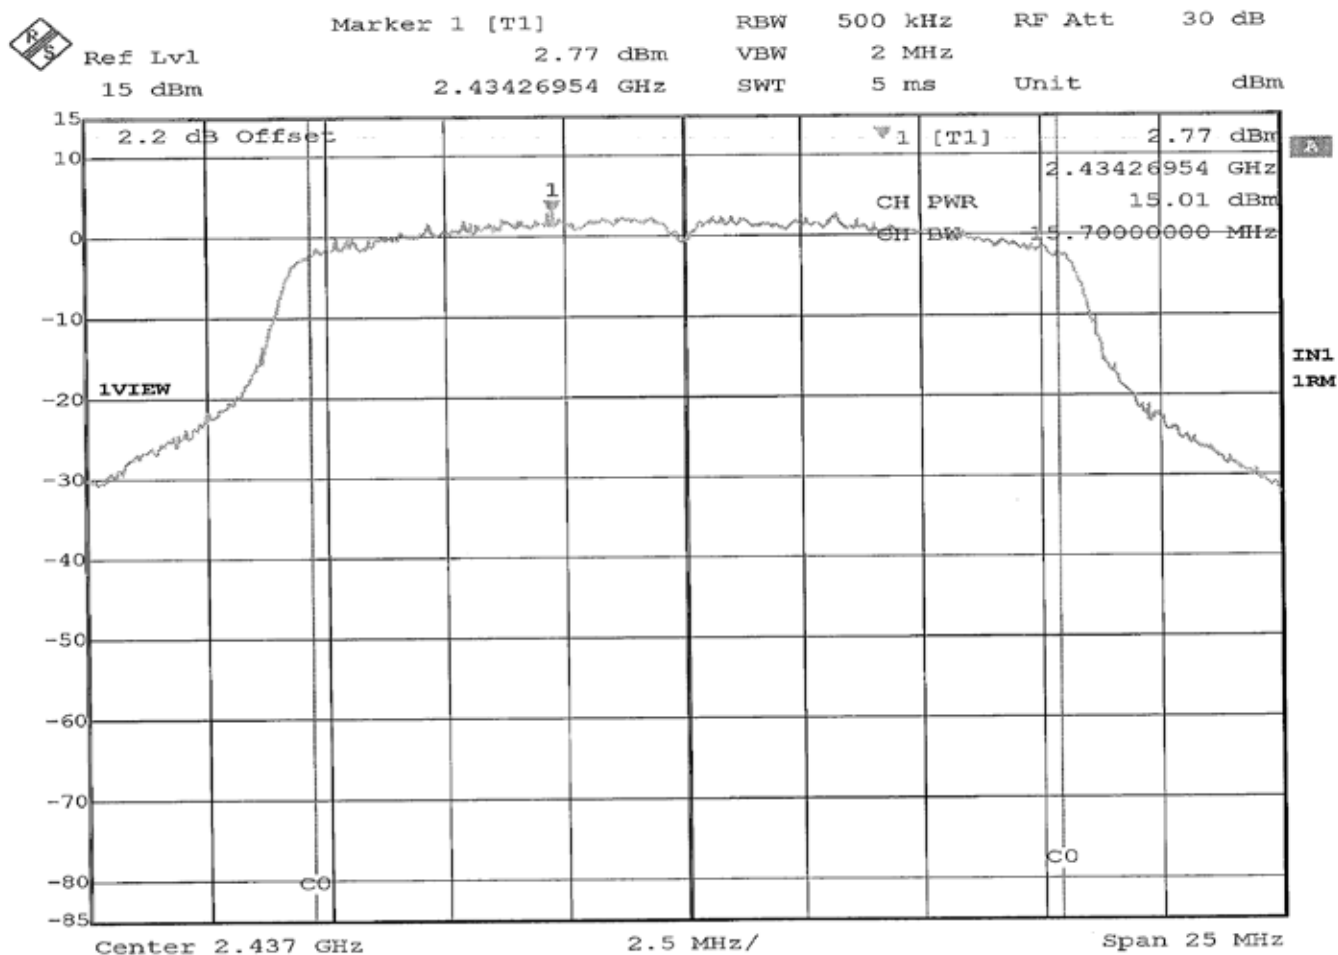

Power Output: 15.01 dBm



Retlif Testing Laboratories


Report No. R-6458N-3

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Peak Power Output
Customer	Immedia Semiconductor LLC
Job Number	R-6458N-3
Test Sample	Outdoor XT2 Blink Camera Module
Model Number	BCM00201U
Serial Number	877-000-198
Test Specification	FCC Part 15, Subpart C Paragraph 15.247 (b)(3)
Operating Mode	Transmitting modulated signal (OFDM) at 2462 MHz
Technician	M. Seamans
Date	December 2 nd , 2019

Notes: Measurement method: AVGSA-3

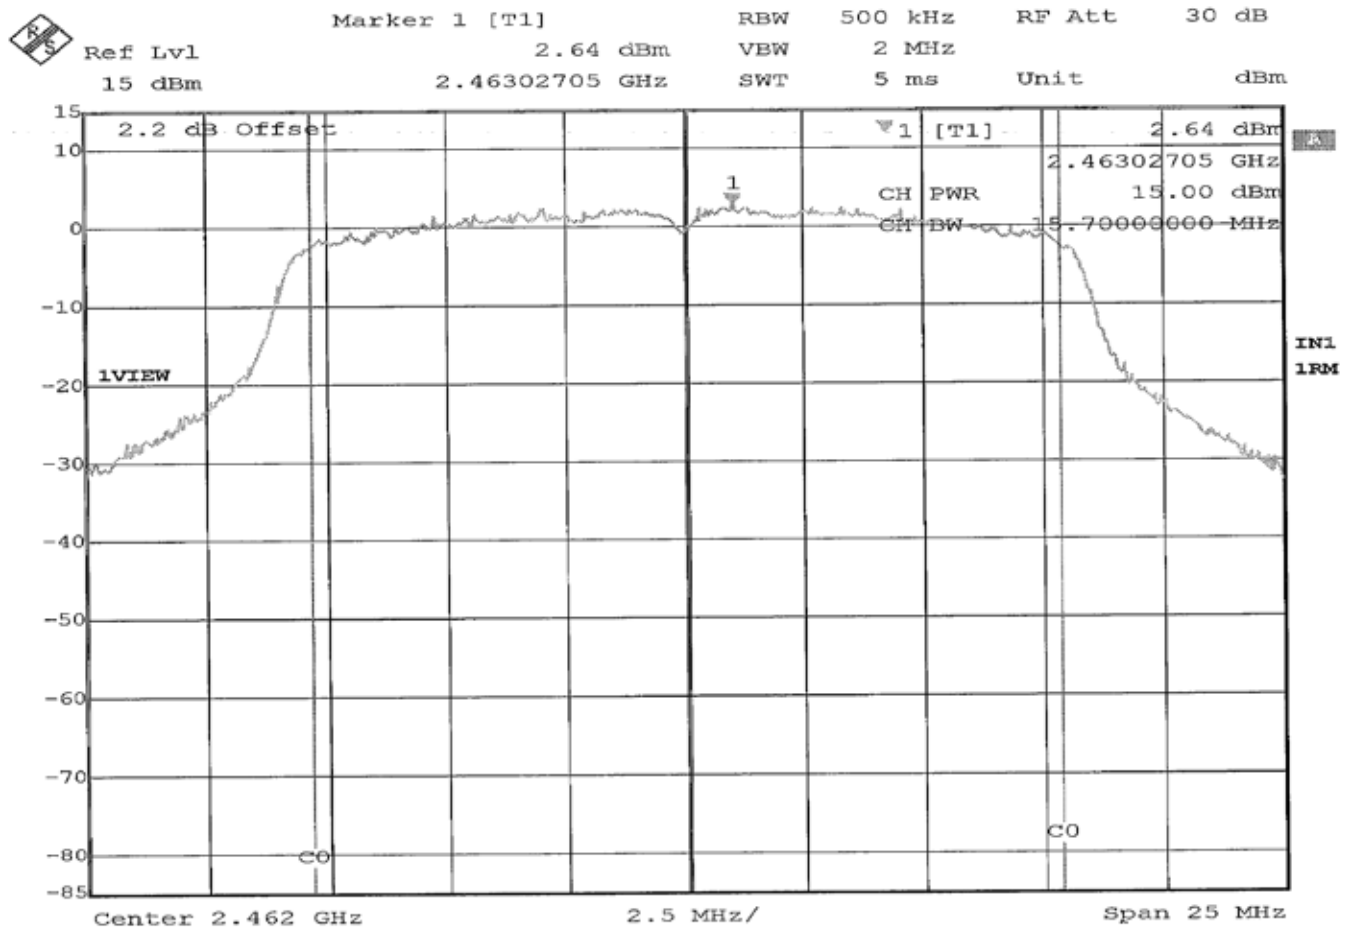

Power Output: 15.00 dBm



Retlif Testing Laboratories


Report No. R-6458N-3

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Peak Power Output
Customer	Immedia Semiconductor LLC
Job Number	R-6458N-3
Test Sample	Outdoor XT2 Blink Camera Module
Model Number	BCM00201U
Serial Number	877-000-198
Test Specification	FCC Part 15, Subpart C Paragraph 15.247 (b)(3)
Operating Mode	Transmitting modulated signal (DSSS) at 2412 MHz
Technician	M. Seamans
Date	December 2 nd , 2019

Notes: Measurement method: AVGSA-3

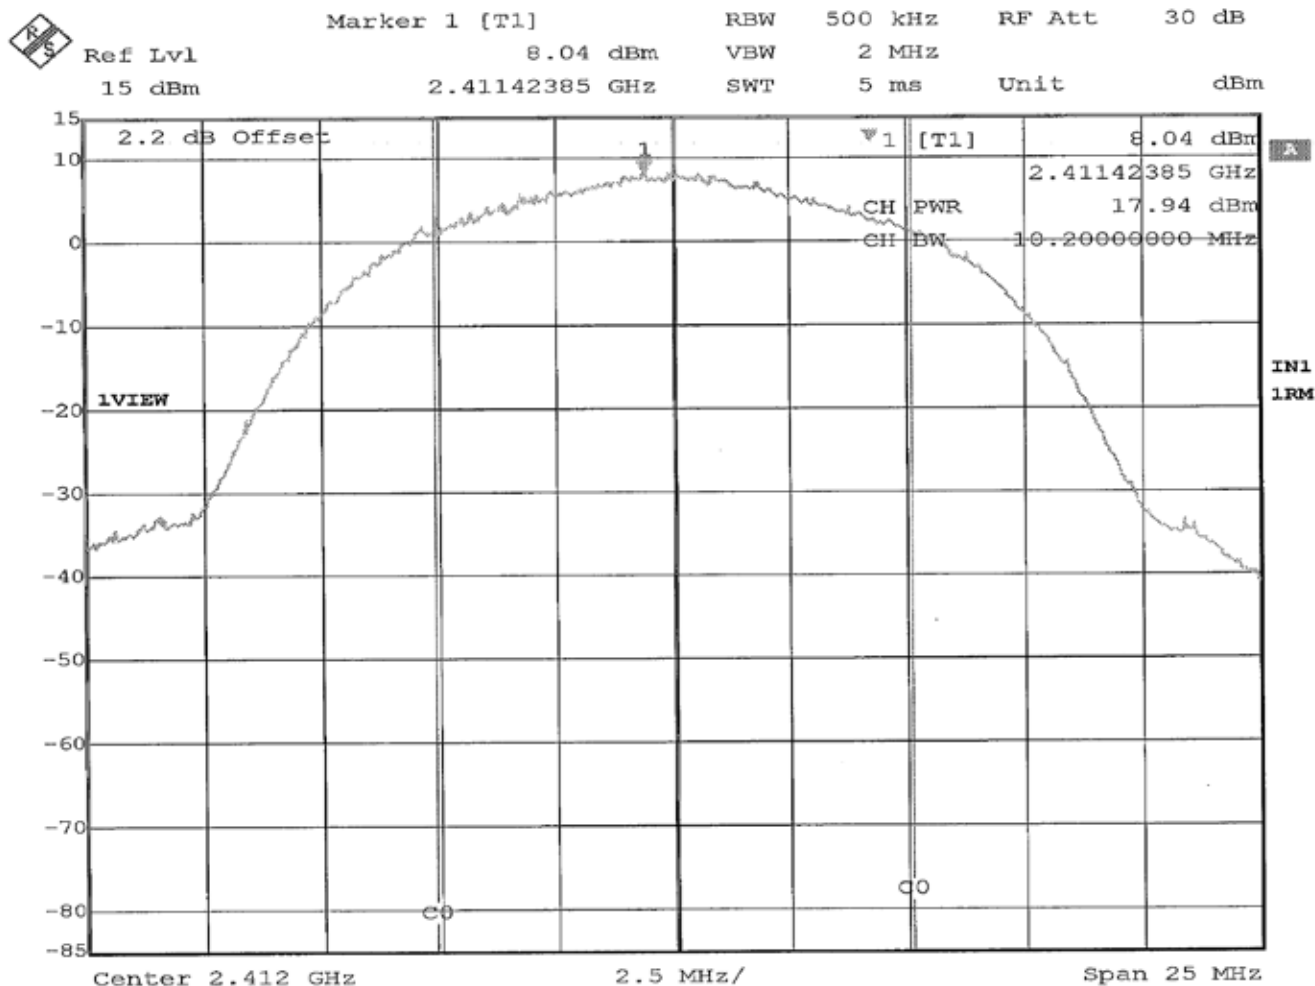

Power Output: 17.94 dBm



Retlif Testing Laboratories


Report No. R-6458N-3

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Peak Power Output
Customer	Immedia Semiconductor LLC
Job Number	R-6458N-3
Test Sample	Outdoor XT2 Blink Camera Module
Model Number	BCM00201U
Serial Number	877-000-198
Test Specification	FCC Part 15, Subpart C Paragraph 15.247 (b)(3)
Operating Mode	Transmitting modulated signal (DSSS) at 2437 MHz
Technician	M. Seamans
Date	December 2 nd , 2019

Notes: Measurement method: AVGSA-3

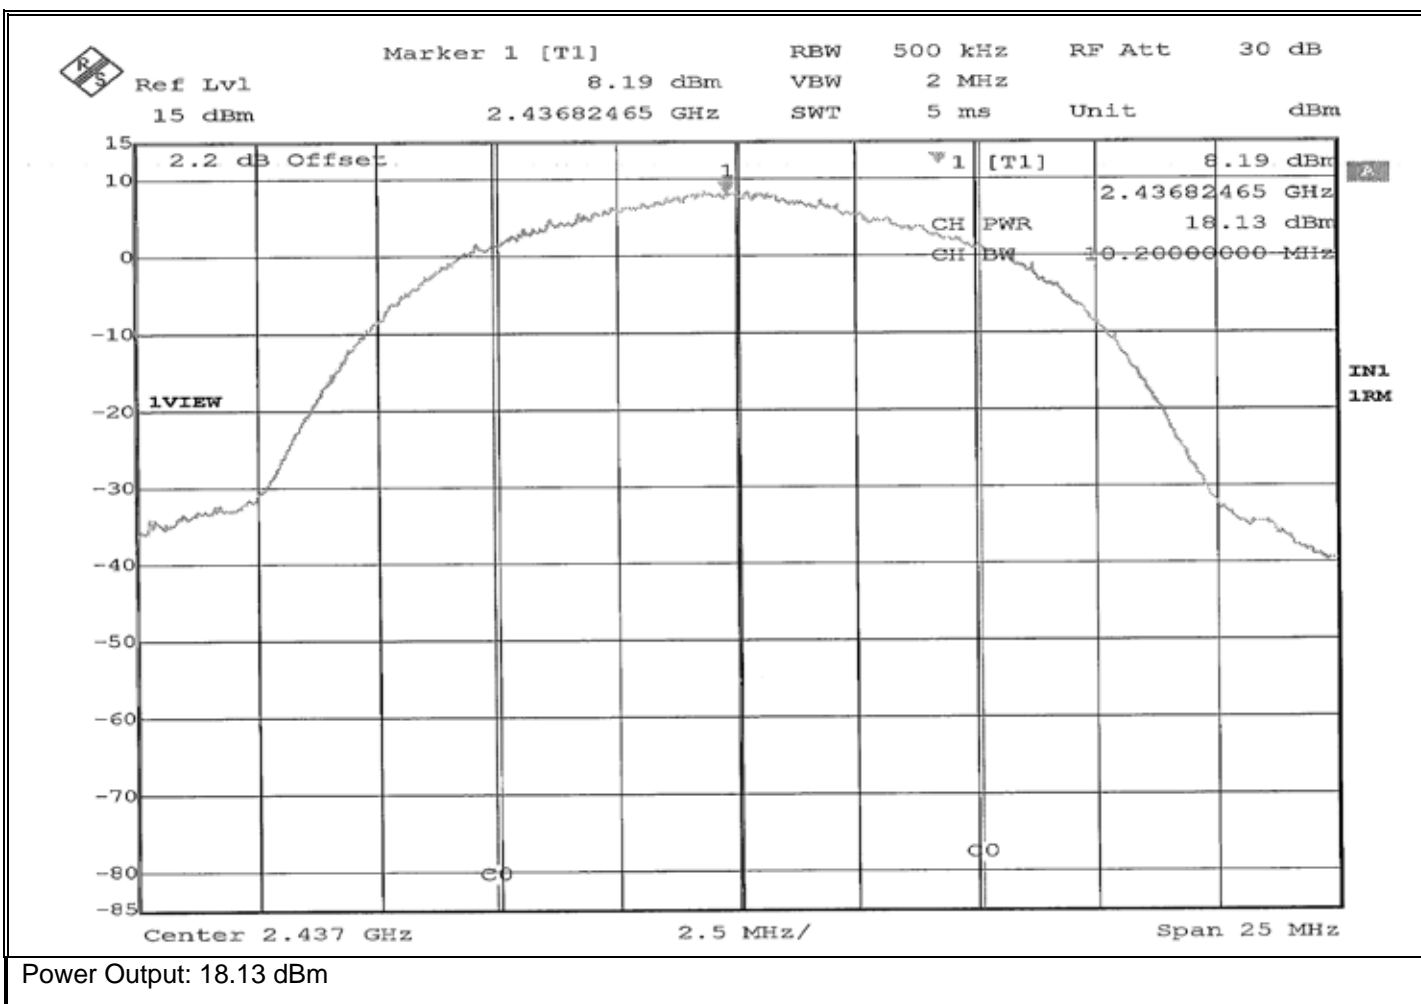

Retlif Testing Laboratories


Report No. R-6458N-3

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Peak Power Output
Customer	Immedia Semiconductor LLC
Job Number	R-6458N-3
Test Sample	Outdoor XT2 Blink Camera Module
Model Number	BCM00201U
Serial Number	877-000-198
Test Specification	FCC Part 15, Subpart C Paragraph 15.247 (b)(3)
Operating Mode	Transmitting modulated signal (DSSS) at 2462 MHz
Technician	M. Seamans
Date	December 2 nd , 2019

Notes: Measurement method: AVGSA-3

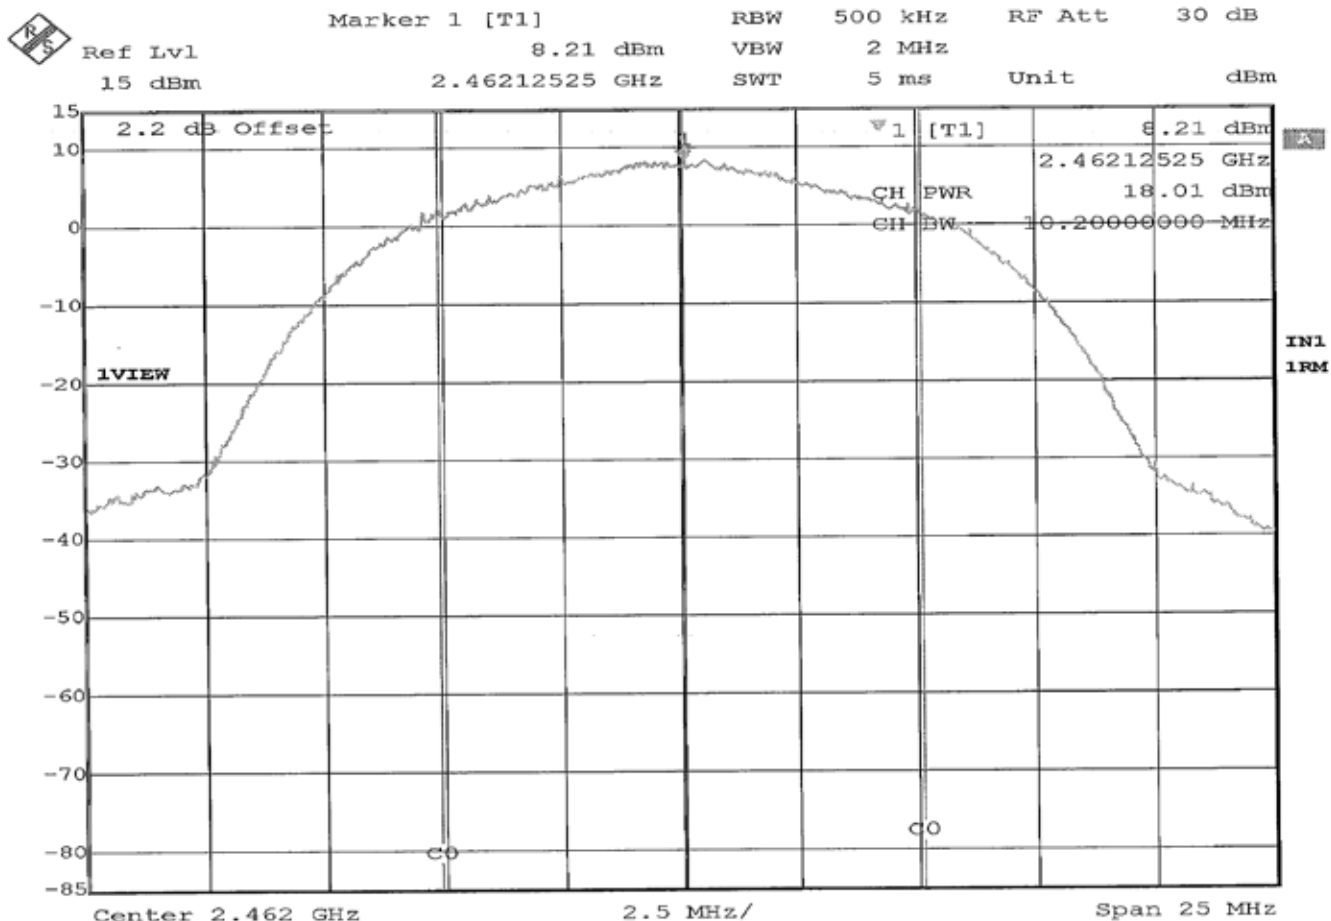

Power Output: 18.01 dBm



Retlif Testing Laboratories


Report No. R-6458N-3

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Peak Power Output
Customer	Immedia Semiconductor LLC
Job Number	R-6458N-3
Test Sample	Outdoor XT2 Blink Camera Module
Model Number	BCM00201U
Serial Number	877-000-198
Test Specification	FCC Part 15, Subpart C Paragraph 15.247 (b)(3)
Operating Mode	Transmitting modulated signal (Non11) at 2412 MHz
Technician	M. Seamans
Date	December 2 nd , 2019

Notes: Measurement method: AVGSA-3

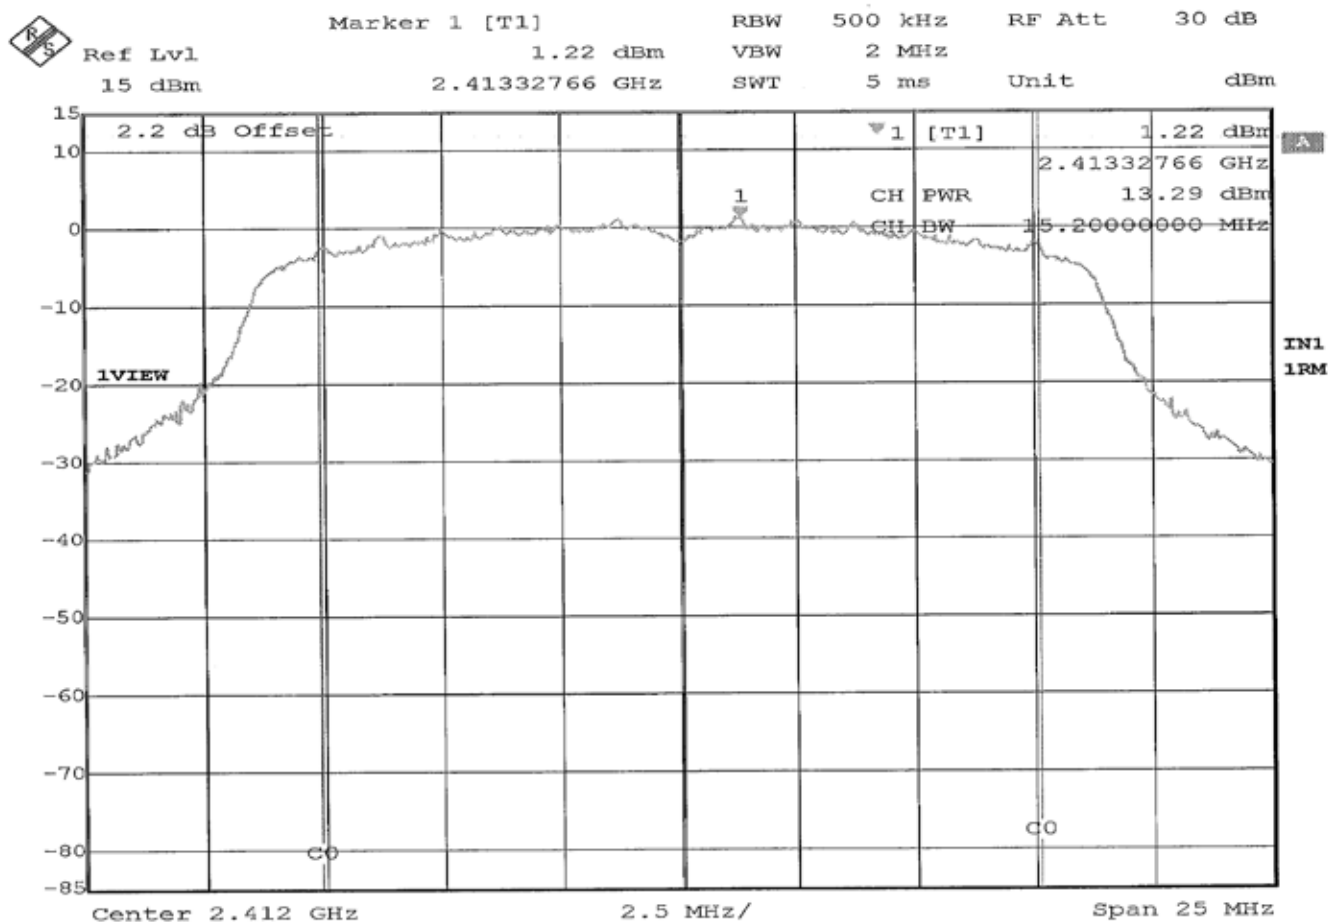

Power Output: 13.29 dBm

RETLIF TESTING LABORATORIES




Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Test Method	Peak Power Output
Customer	Immedia Semiconductor LLC
Job Number	R-6458N-3
Test Sample	Outdoor XT2 Blink Camera Module
Model Number	BCM00201U
Serial Number	877-000-198
Test Specification	FCC Part 15, Subpart C Paragraph 15.247 (b)(3)
Operating Mode	Transmitting modulated signal (Non11) at 2437 MHz
Technician	M. Seamans
Date	December 2 nd , 2019

Notes: Measurement method: AVGSA-3

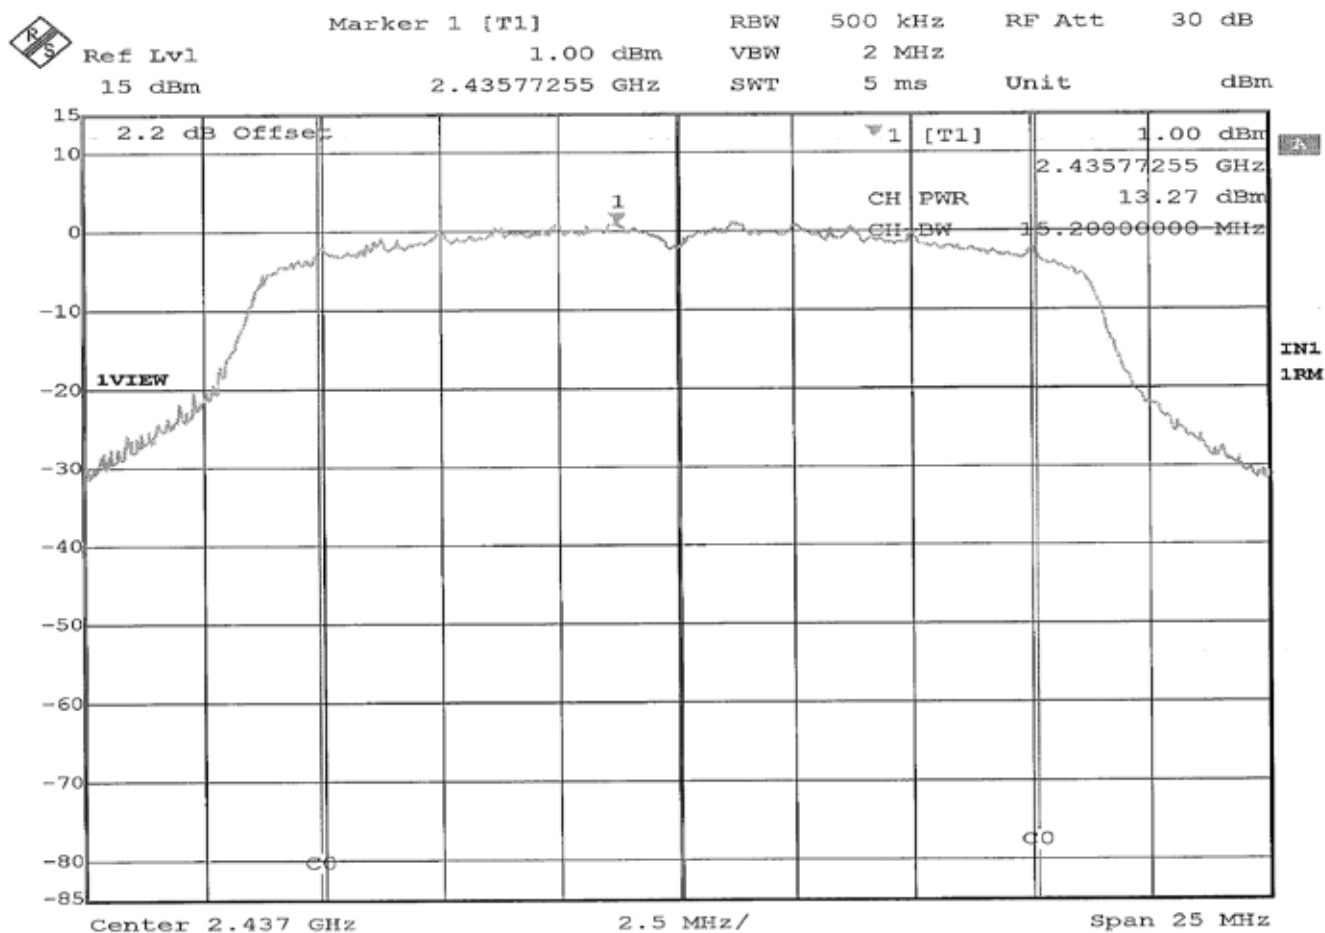

Power Output: 13.27 dBm

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET




Retlif Testing Laboratories

Report No. R-6458N-3

Test Method	Peak Power Output
Customer	Immedia Semiconductor LLC
Job Number	R-6458N-3
Test Sample	Outdoor XT2 Blink Camera Module
Model Number	BCM00201U
Serial Number	877-000-198
Test Specification	FCC Part 15, Subpart C Paragraph 15.247 (b)(3)
Operating Mode	Transmitting modulated signal (Non11) at 2462 MHz
Technician	M. Seamans
Date	December 2 nd , 2019

Notes: Measurement method: AVGSA-3

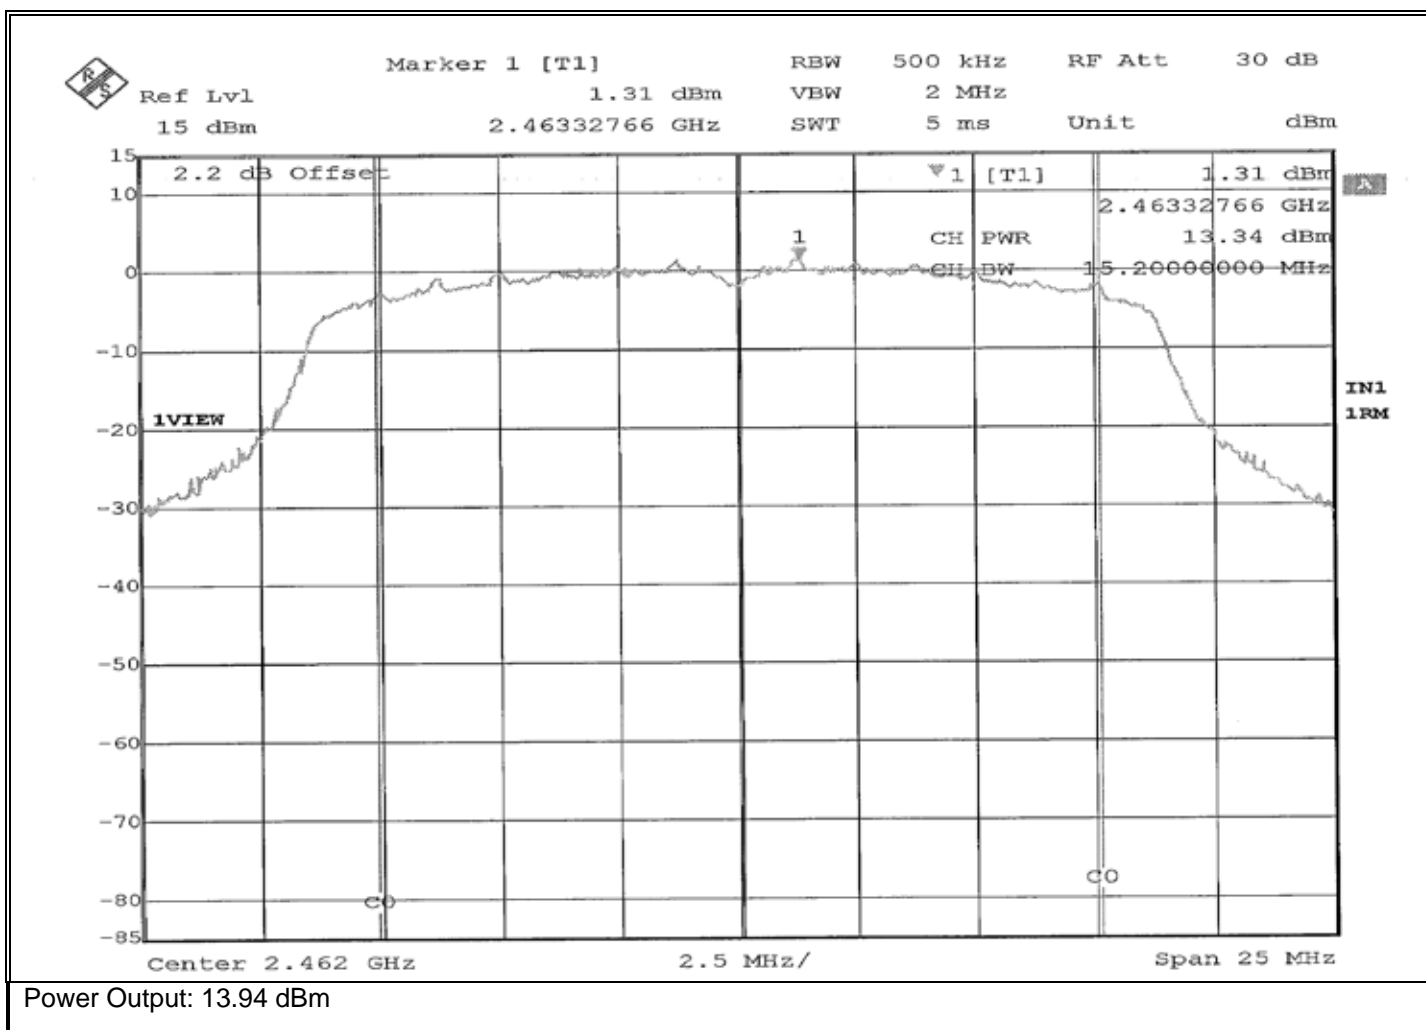

Retlif Testing Laboratories

Report No. R-6458N-3

Test Photographs

Antenna Port, Conducted Emissions



EUT Configuration



Test Setup



Retlif Testing Laboratories

Report No. R-6458N-3

**FCC Part 15, Subpart C, Section 15.247(d)
Antenna Port, Conducted Emissions
Band Edge Test Data**



Retlif Testing Laboratories

Report No. R-6458N-3

Conducted Out of Band




Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Conducted Out of Band
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (d)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (OFDM) at 2412 MHz
Technician:	M. Seamans
Date(s):	December 3 rd , 2019
Temp/ Relative Humidity:	19.5 °C / 30.0 %
Notes:	Limit: -28.23 dBm

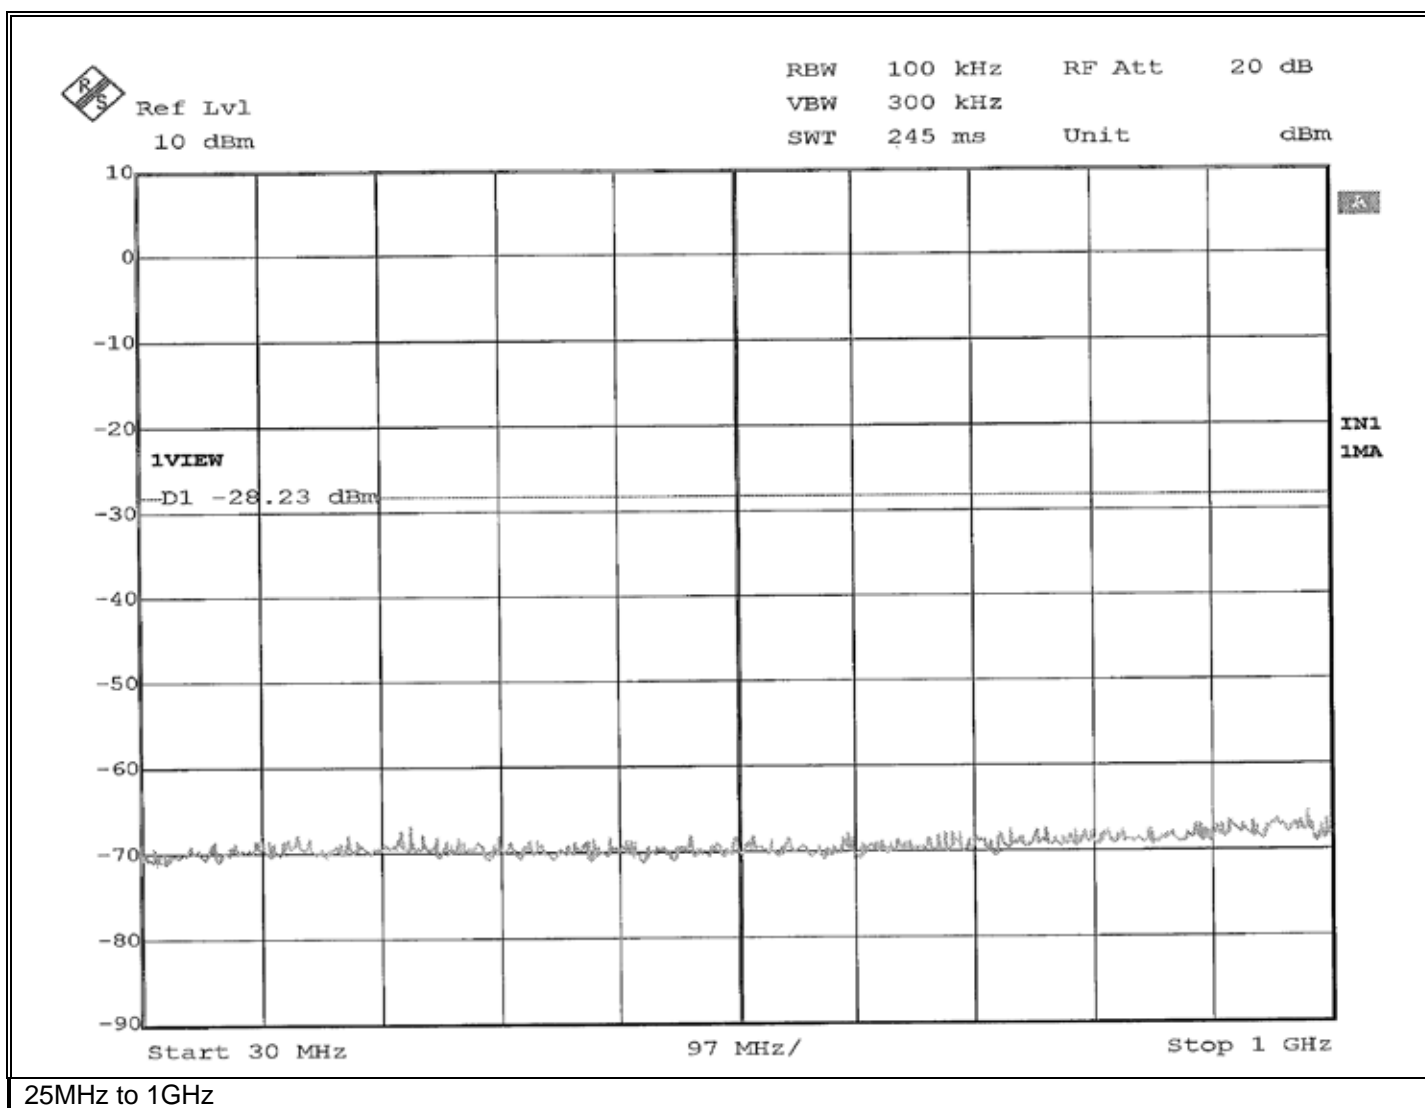


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Conducted Out of Band
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (d)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (OFDM) at 2412 MHz
Technician:	M. Seamans
Date(s):	December 3 rd , 2019
Temp/ Relative Humidity:	19.5 °C / 30.0 %
Notes:	Limit: -28.23 dBm

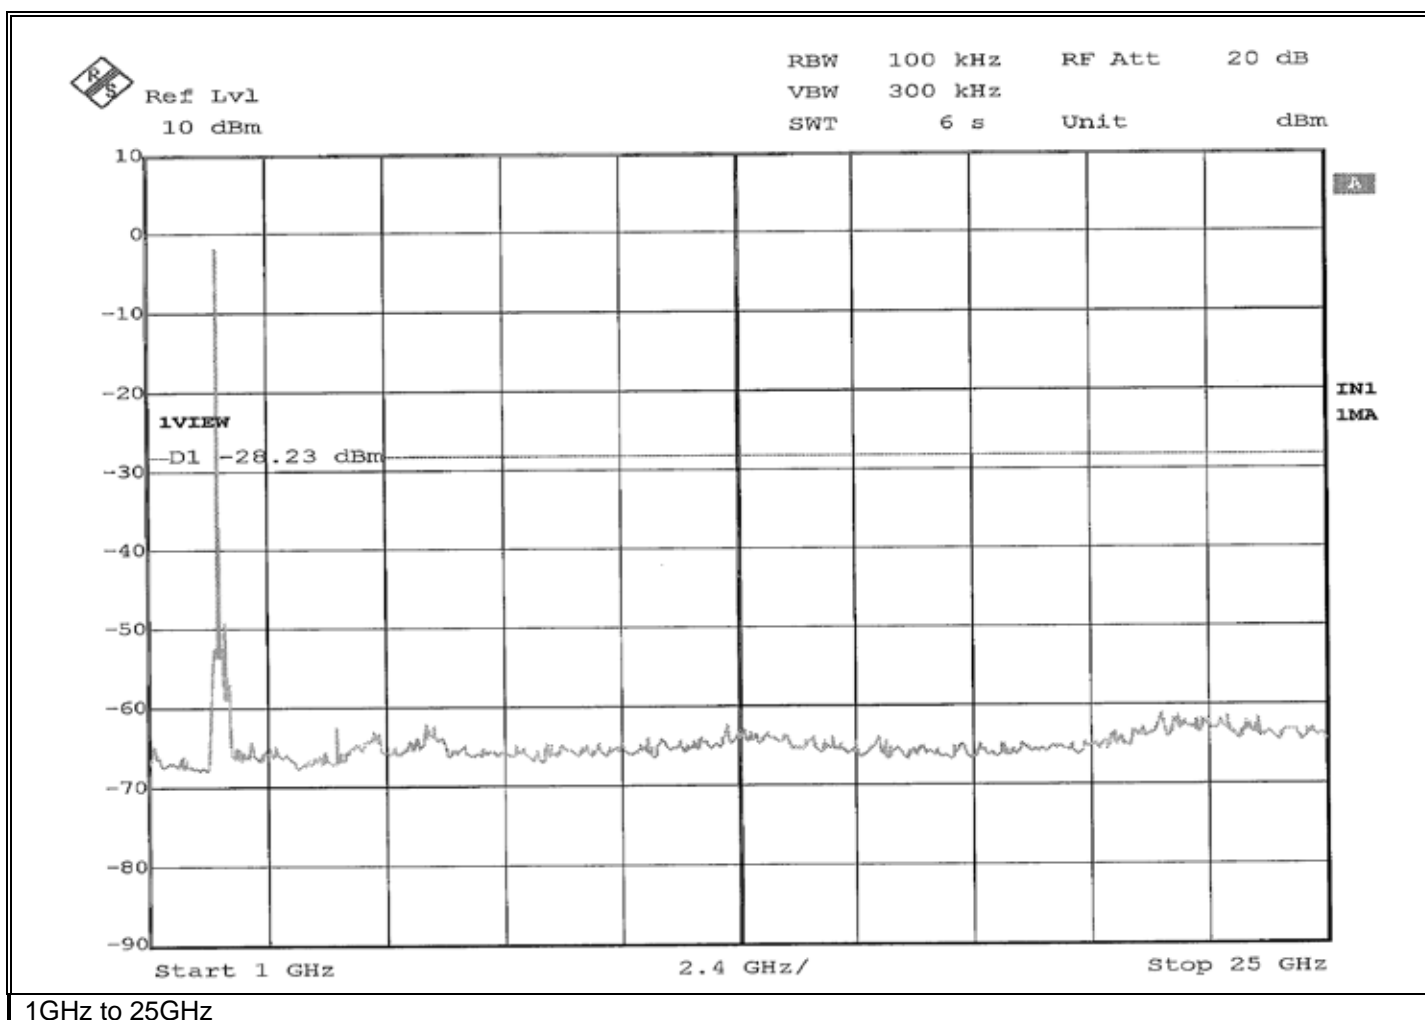


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Conducted Out of Band
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (d)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (OFDM) at 2437 MHz
Technician:	M. Seamans
Date(s):	December 3 rd , 2019
Temp/ Relative Humidity:	19.5 °C / 30.0 %
Notes:	Limit: -28.23 dBm

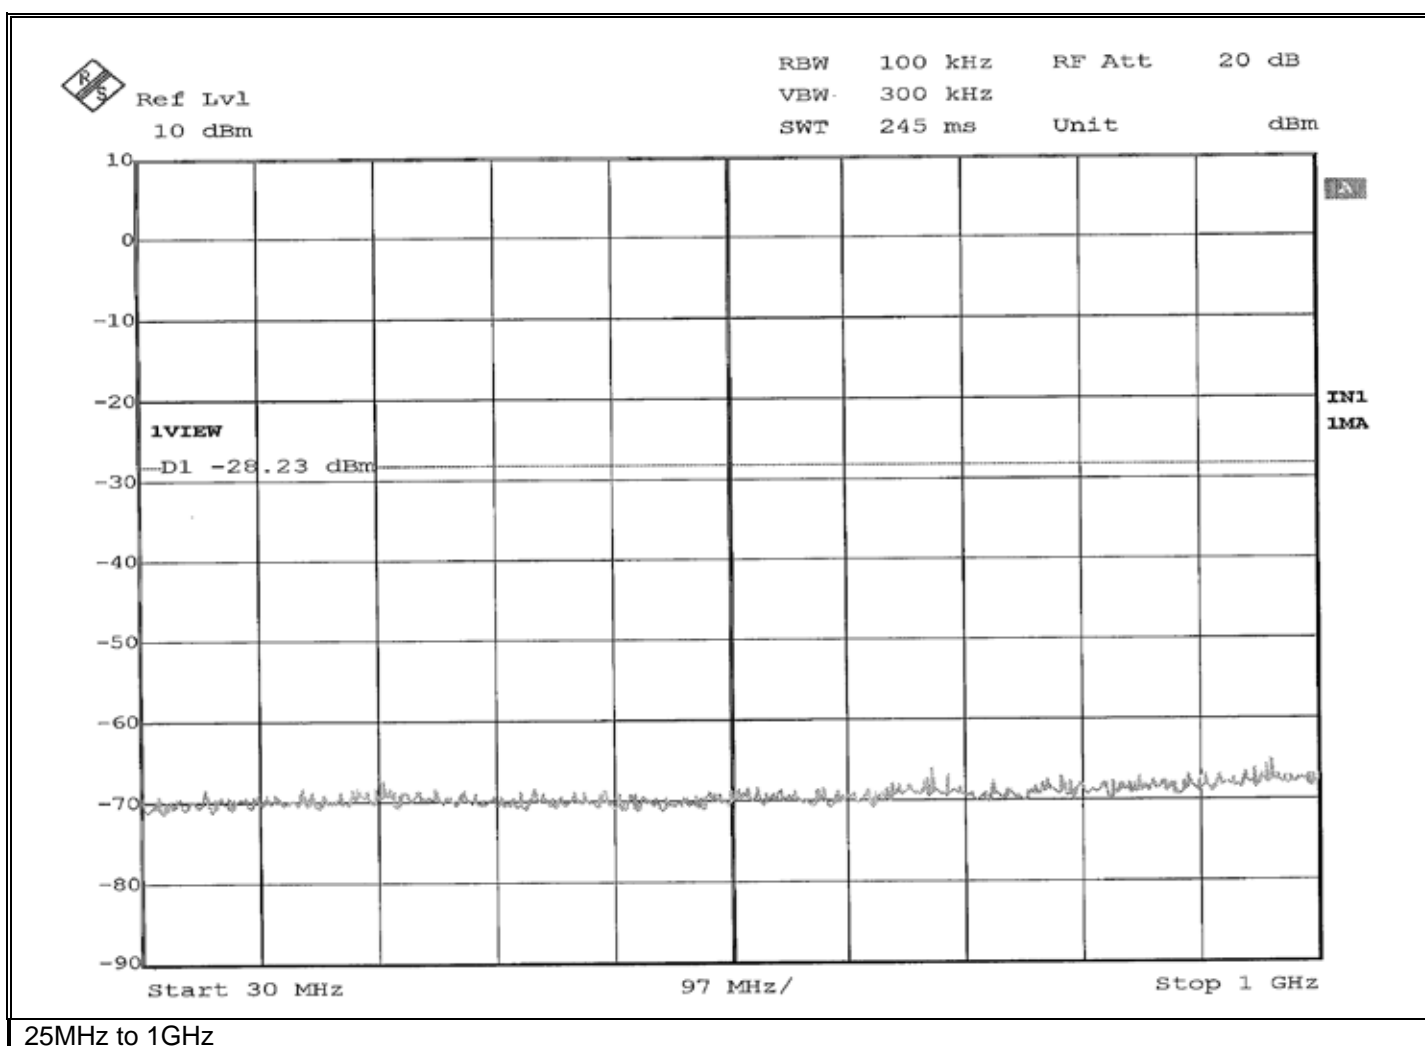


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Conducted Out of Band
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (d)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (OFDM) at 2437 MHz
Technician:	M. Seamans
Date(s):	December 3 rd , 2019
Temp/ Relative Humidity:	19.5 °C / 30.0 %
Notes:	Limit: -28.23 dBm

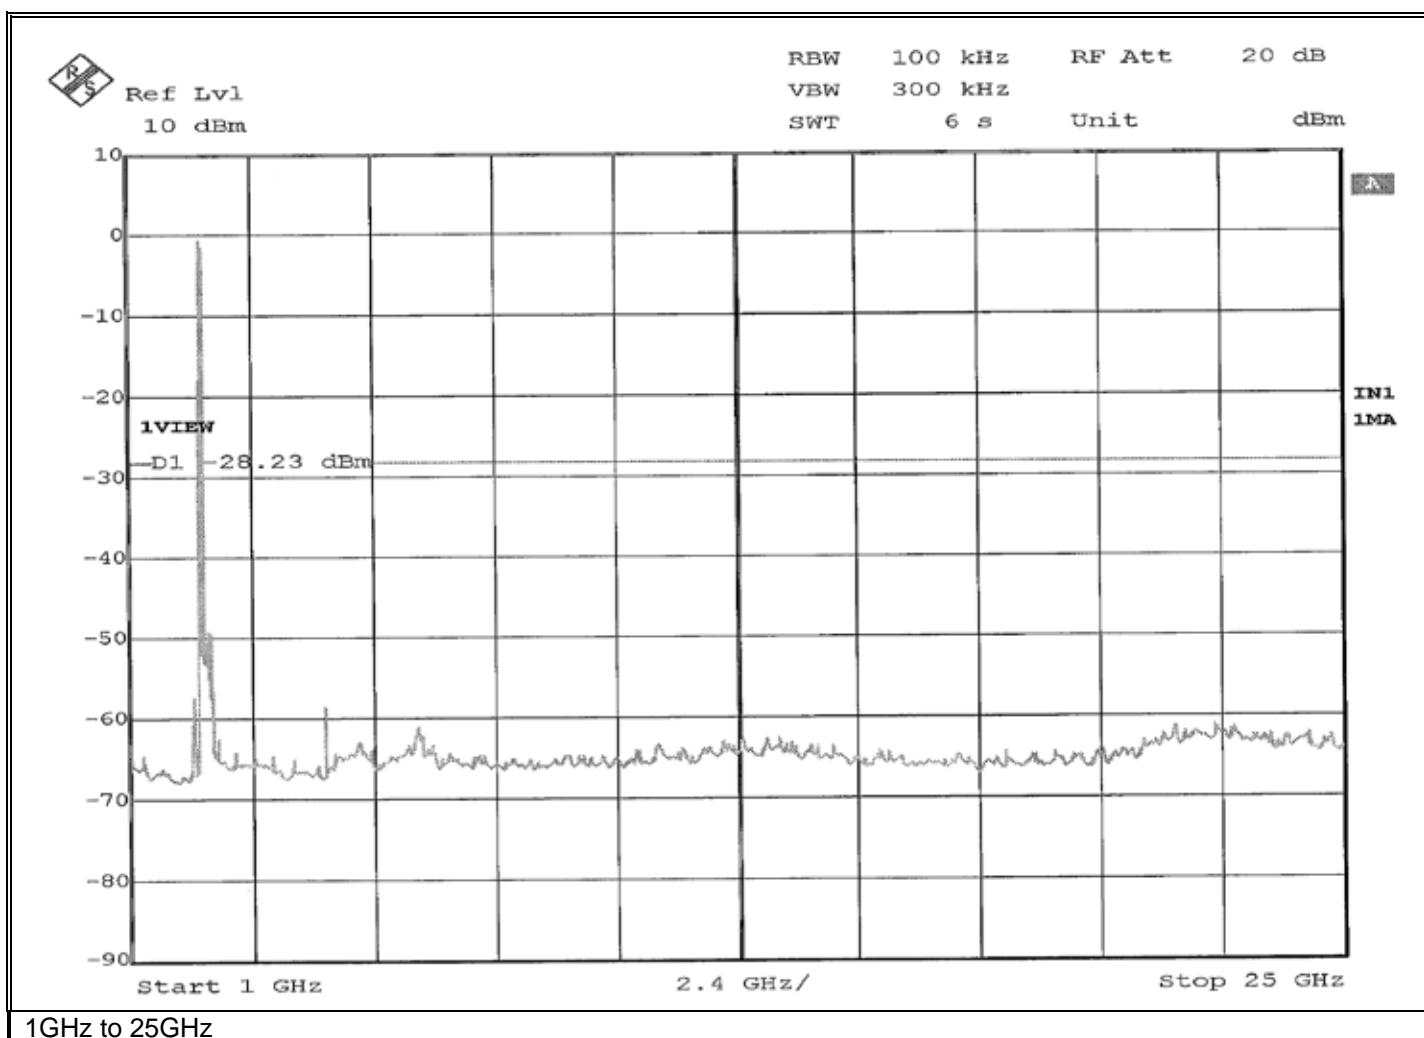


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Conducted Out of Band
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (d)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (OFDM) at 2462 MHz
Technician:	M. Seamans
Date(s):	December 3 rd , 2019
Temp/ Relative Humidity:	19.5 °C / 30.0 %
Notes:	Limit: -28.23 dBm

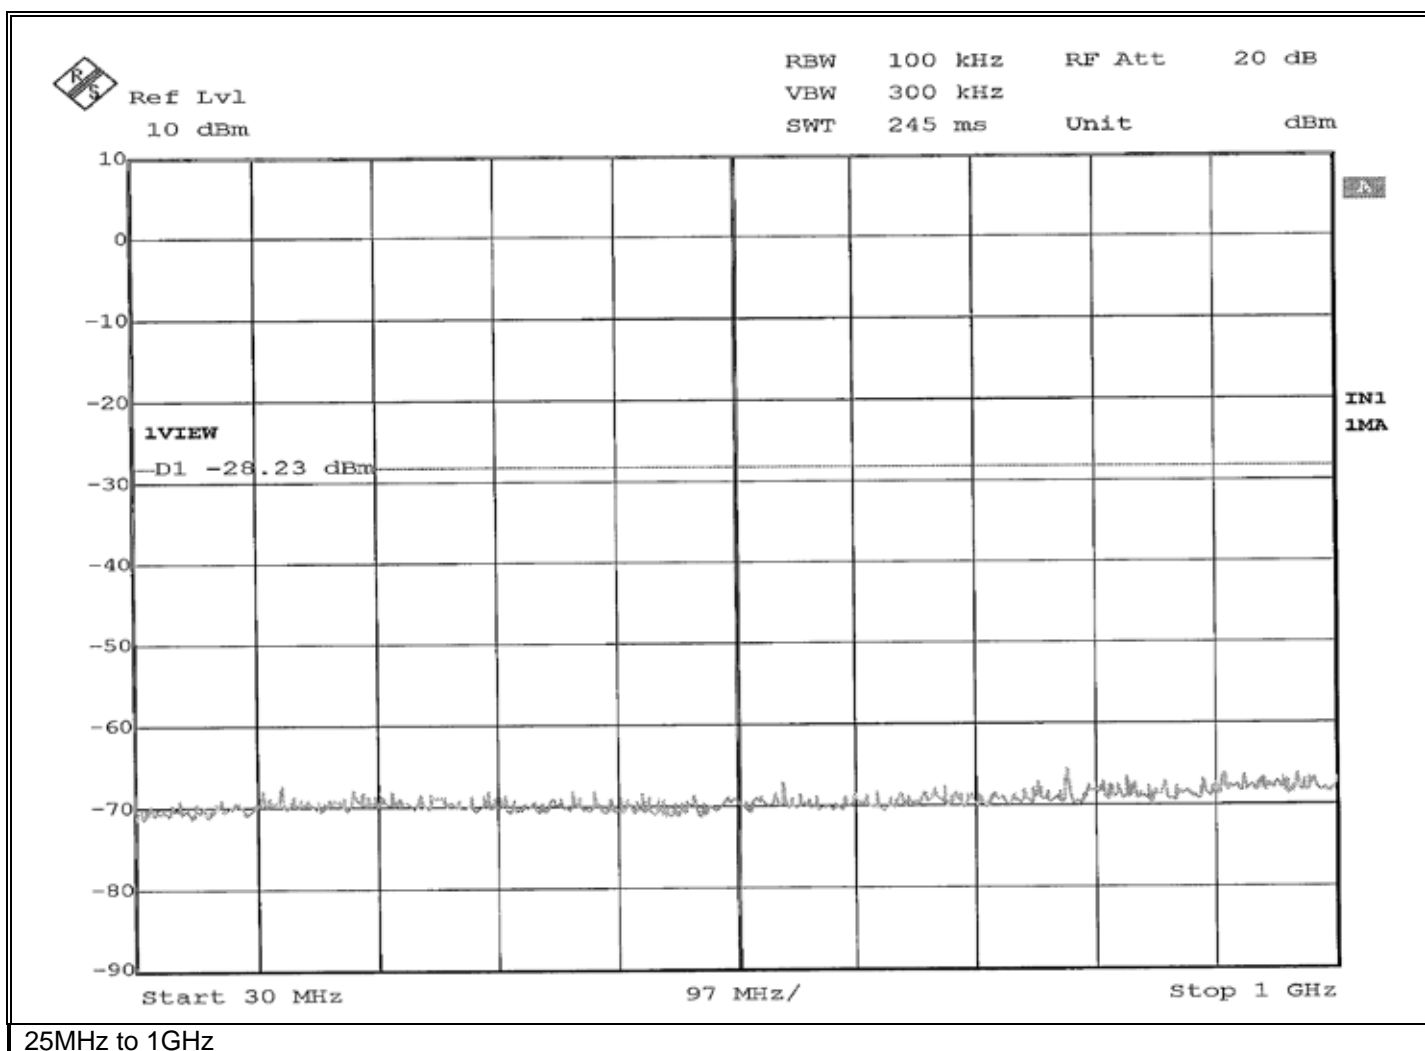


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Conducted Out of Band
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (d)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (OFDM) at 2462 MHz
Technician:	M. Seamans
Date(s):	December 3 rd , 2019
Temp/ Relative Humidity:	19.5 °C / 30.0 %
Notes:	Limit: -28.23 dBm

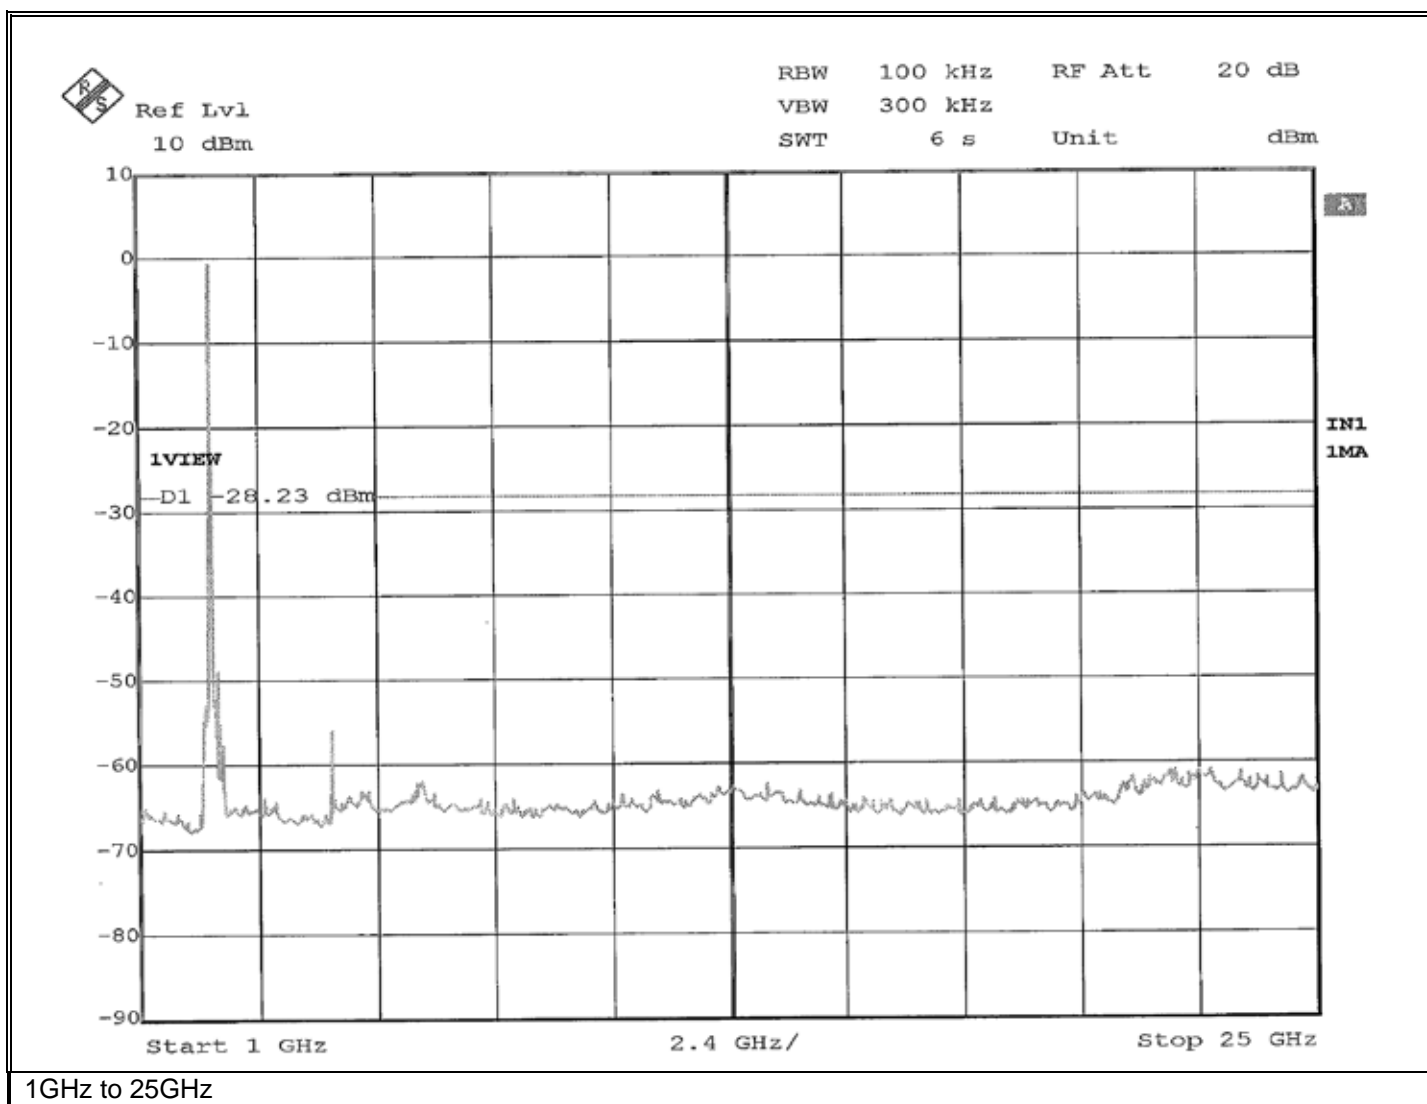


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Conducted Out of Band
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (d)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (DSSS) at 2412 MHz
Technician:	M. Seamans
Date(s):	December 3 rd , 2019
Temp/ Relative Humidity:	19.5 °C / 30.0 %
Notes:	Limit: -23.21 dBm

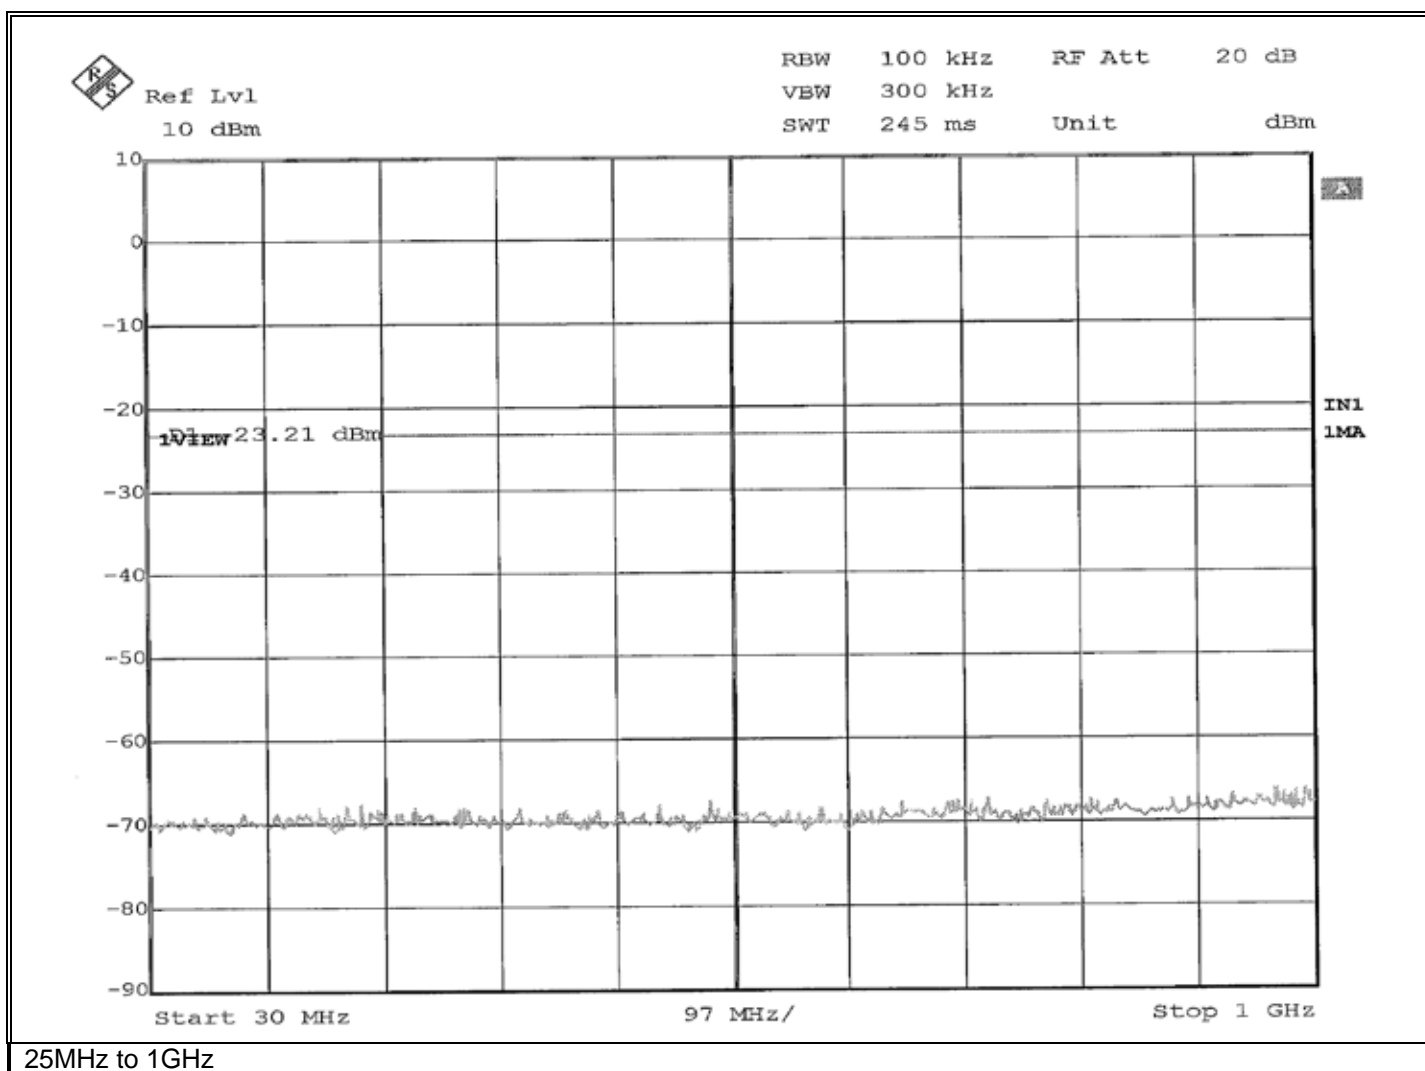


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Conducted Out of Band
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (d)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (DSSS) at 2412 MHz
Technician:	M. Seamans
Date(s):	December 3 rd , 2019
Temp/ Relative Humidity:	19.5 °C / 30.0 %
Notes:	Limit: -23.21 dBm

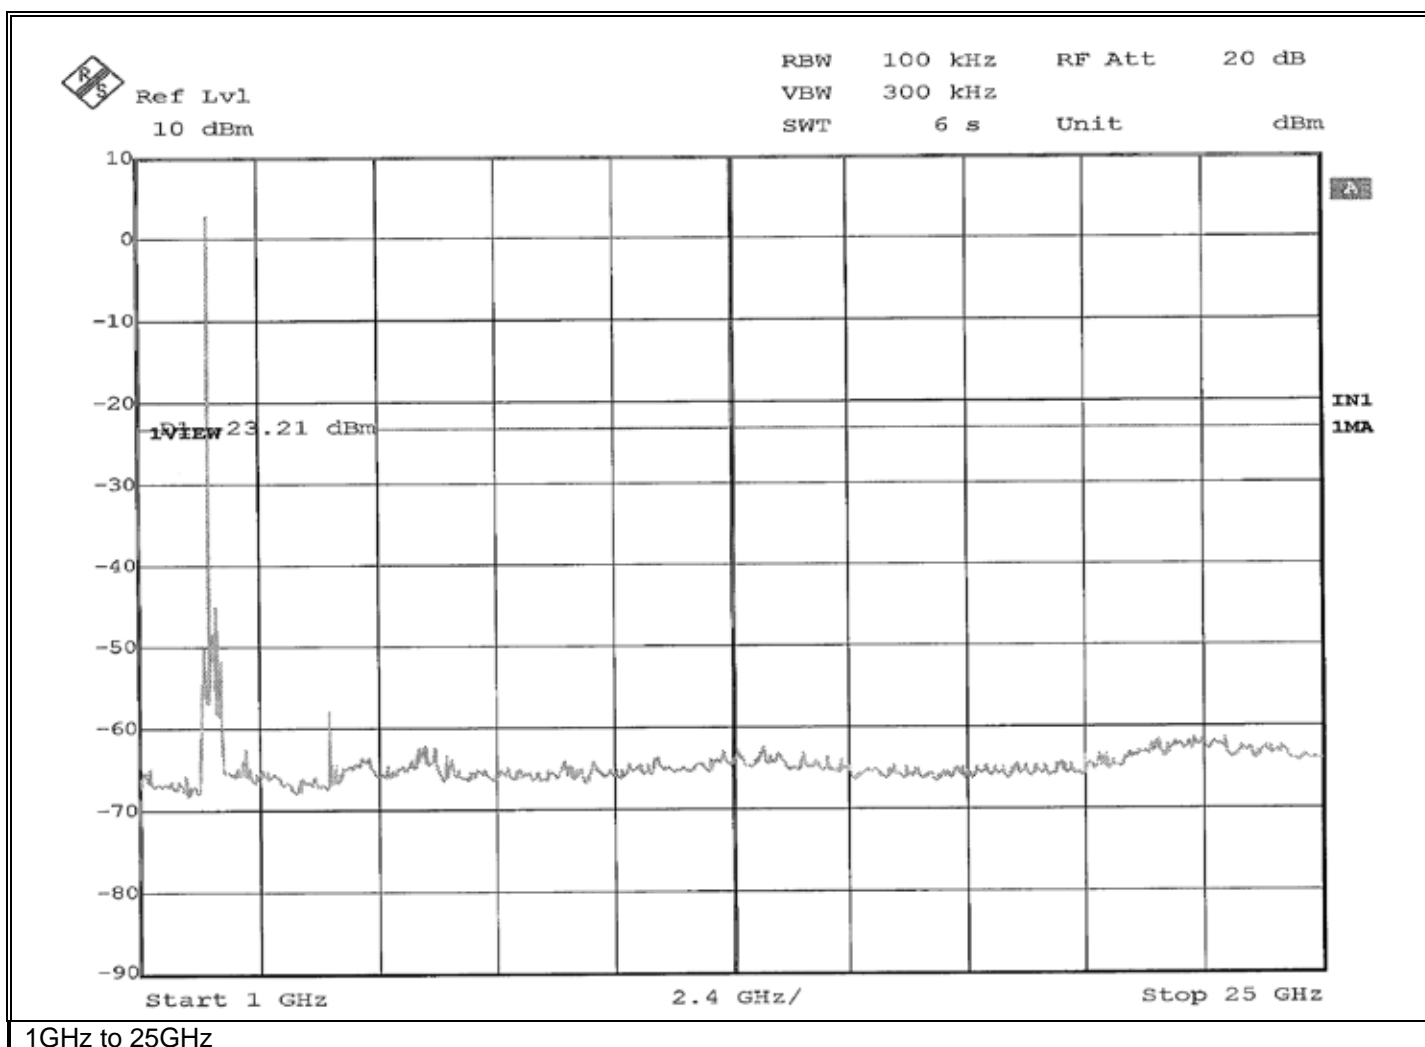


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Conducted Out of Band
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (d)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (DSSS) at 2437 MHz
Technician:	M. Seamans
Date(s):	December 3 rd , 2019
Temp/ Relative Humidity:	19.5 °C / 30.0 %
Notes:	Limit: -23.21 dBm

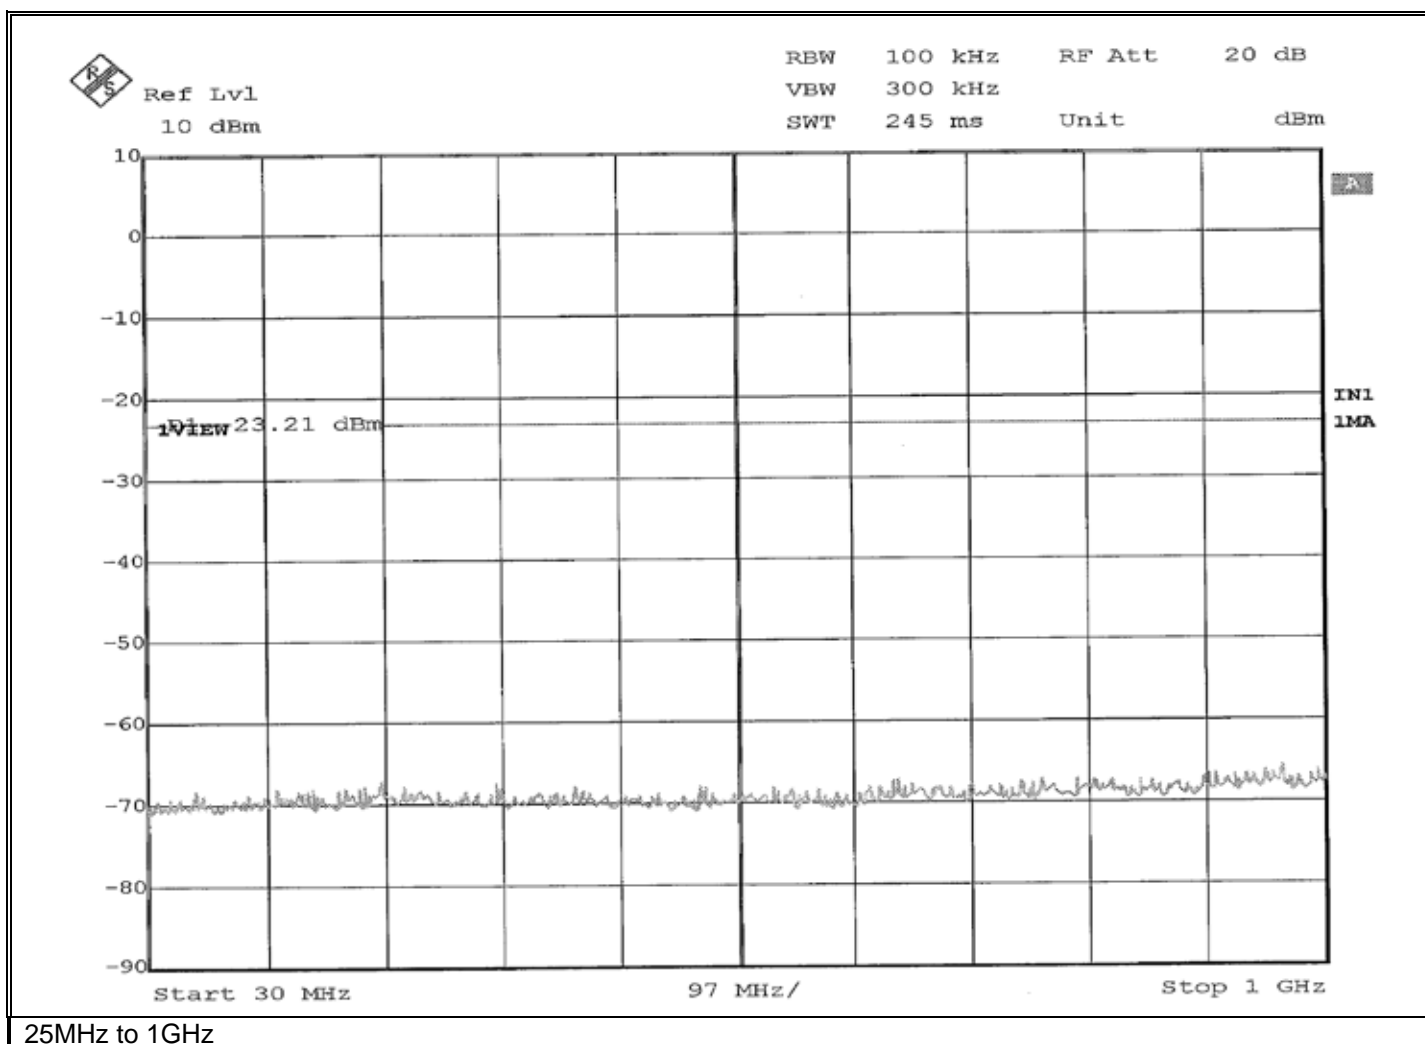


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Conducted Out of Band
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (d)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (DSSS) at 2437 MHz
Technician:	M. Seamans
Date(s):	December 3 rd , 2019
Temp/ Relative Humidity:	19.5 °C / 30.0 %
Notes:	Limit: -23.21 dBm

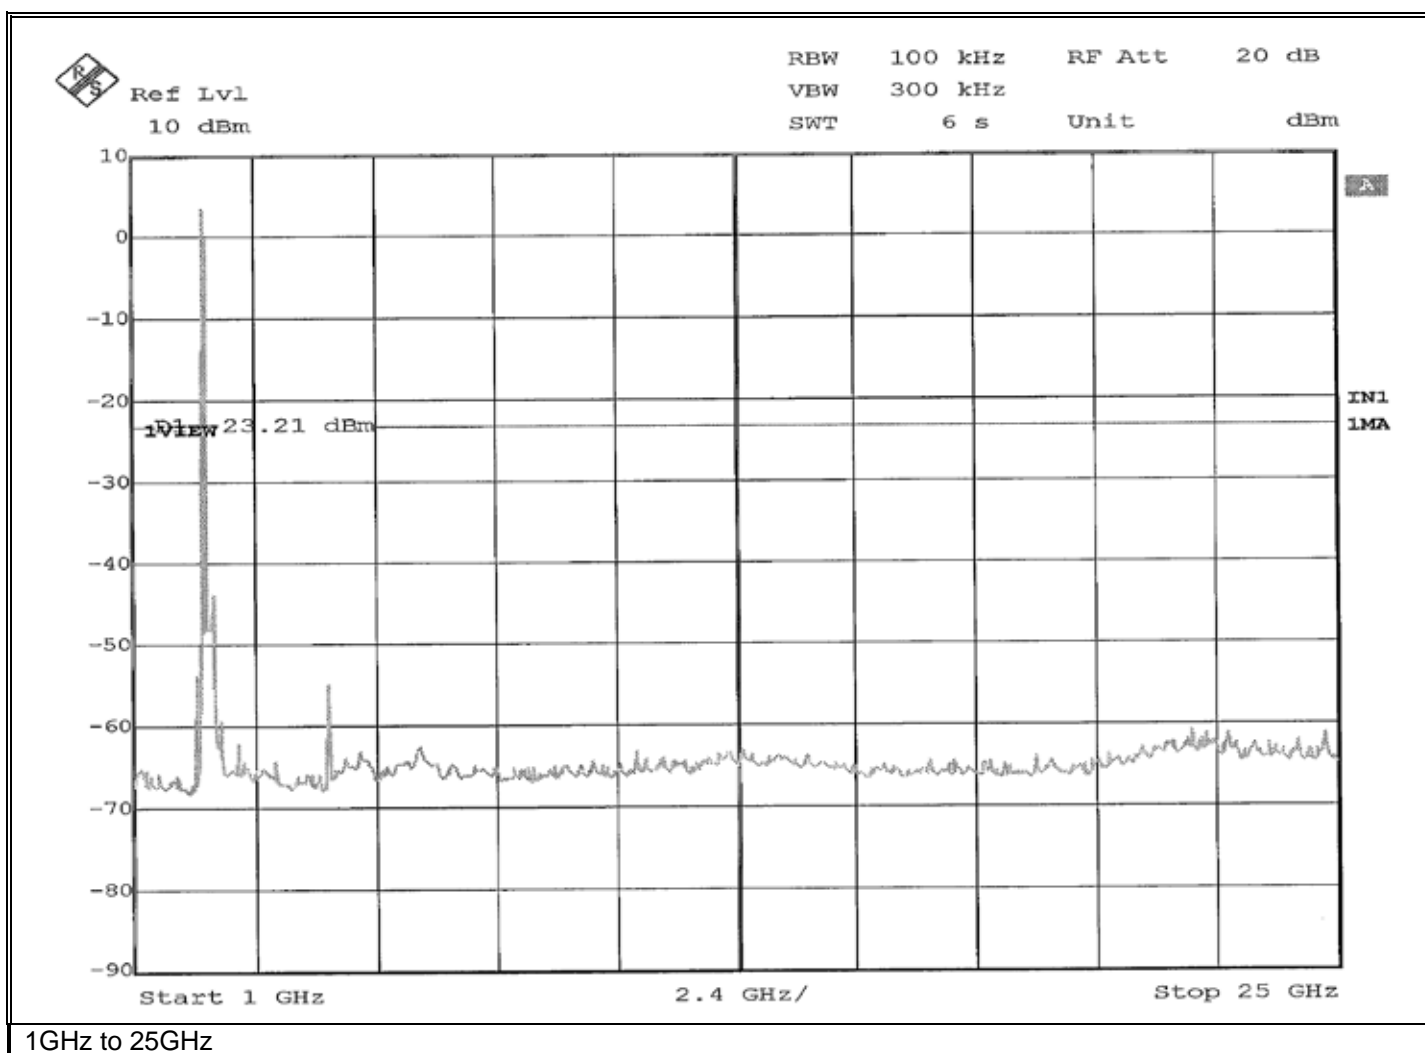


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Conducted Out of Band
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (d)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (DSSS) at 2462 MHz
Technician:	M. Seamans
Date(s):	December 3 rd , 2019
Temp/ Relative Humidity:	19.5 °C / 30.0 %
Notes:	Limit: -23.21 dBm

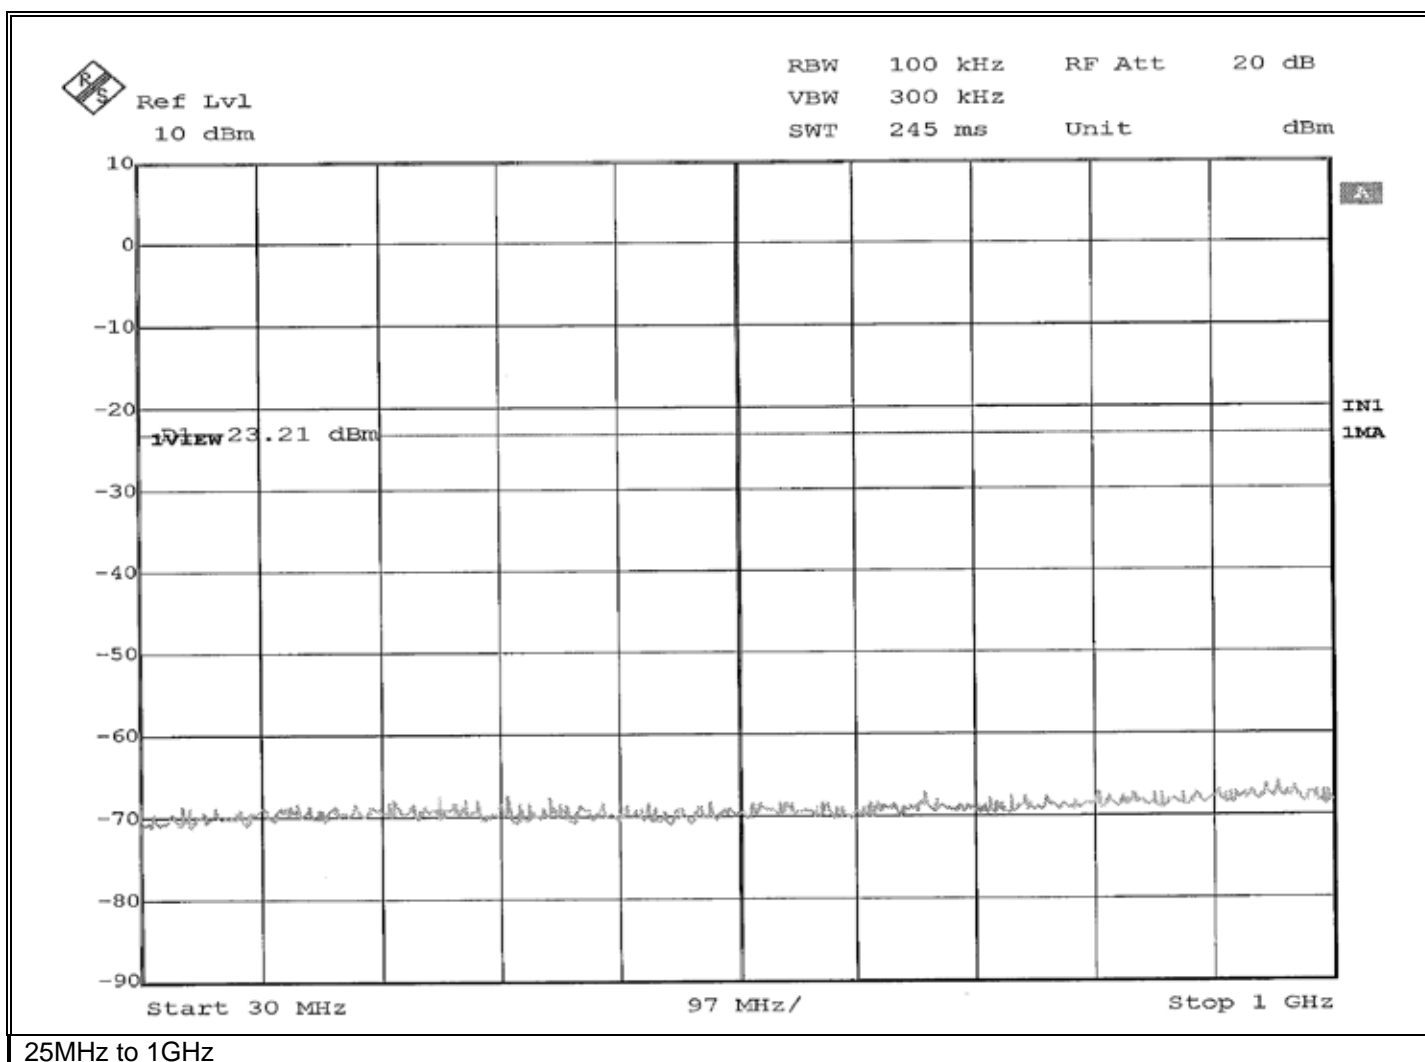


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Conducted Out of Band
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (d)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (DSSS) at 2462 MHz
Technician:	M. Seamans
Date(s):	December 3 rd , 2019
Temp/ Relative Humidity:	19.5 °C / 30.0 %
Notes:	Limit: -23.21 dBm

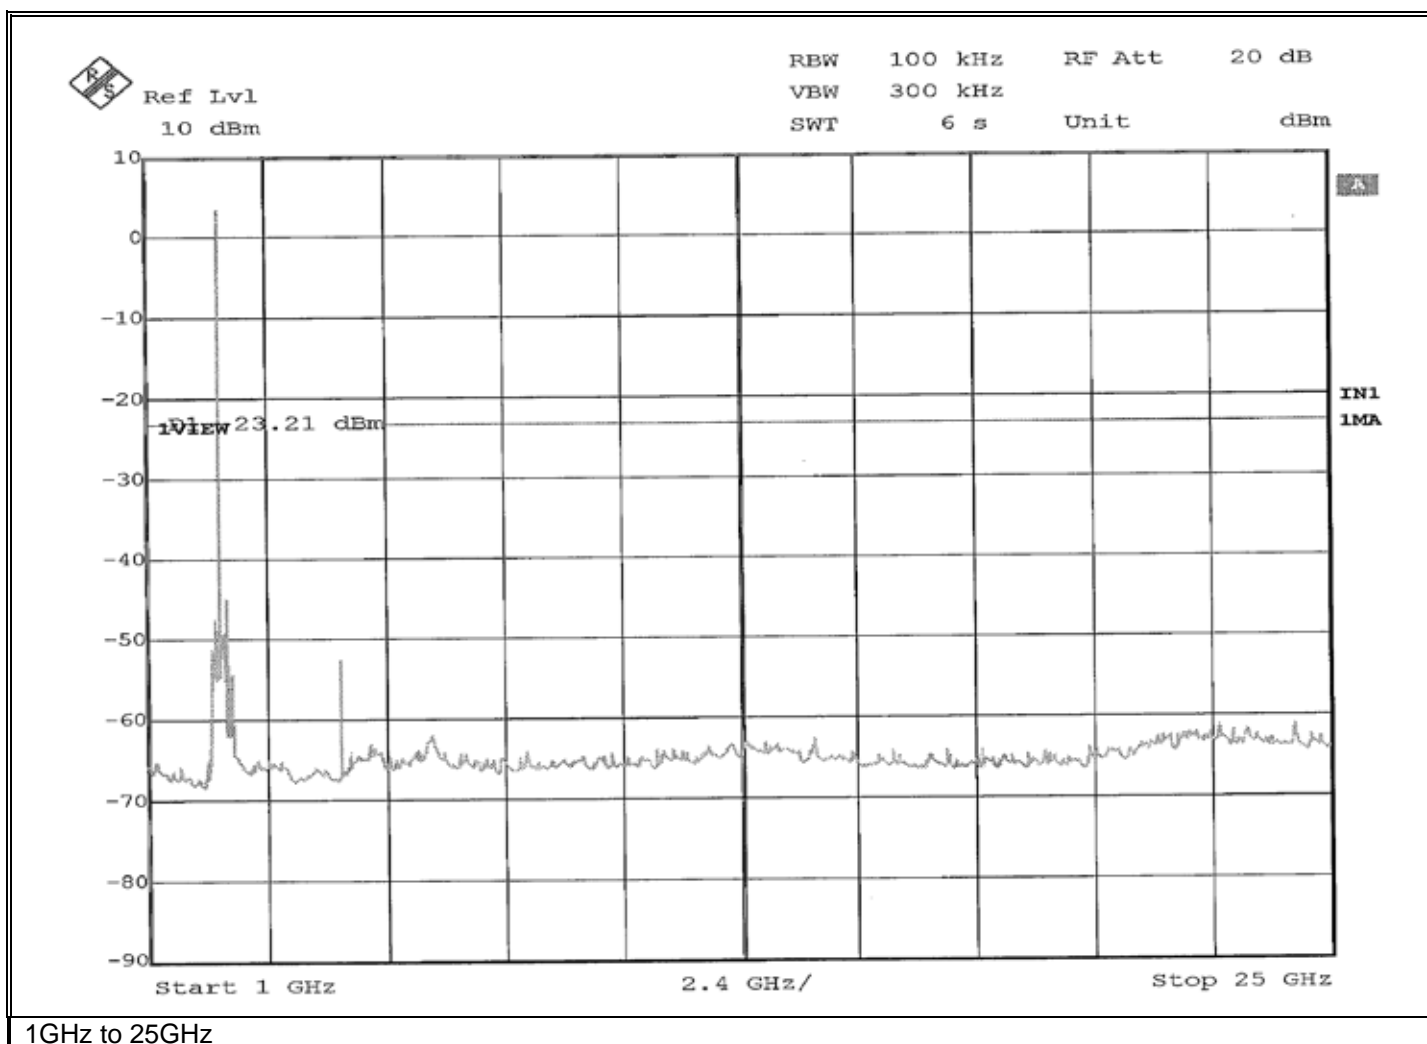


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Conducted Out of Band
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (d)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (Non11) at 2412 MHz
Technician:	M. Seamans
Date(s):	December 3 rd , 2019
Temp/ Relative Humidity:	19.5 °C / 30.0 %
Notes:	Limit: -23.21 dBm

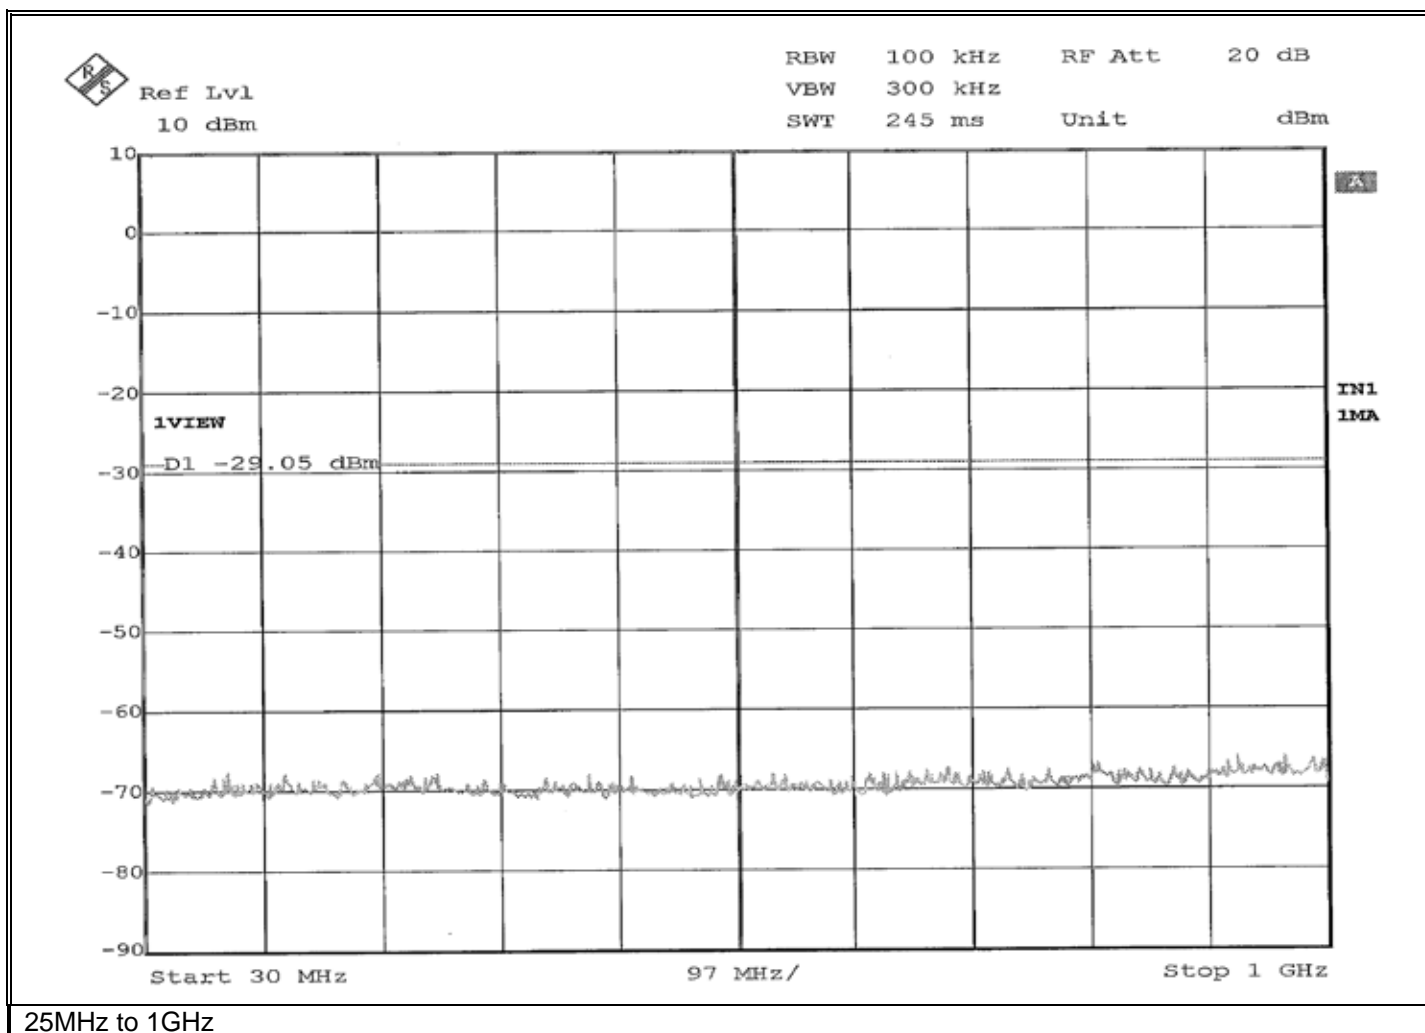


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Conducted Out of Band
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (d)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (Non11) at 2412 MHz
Technician:	M. Seamans
Date(s):	December 3 rd , 2019
Temp/ Relative Humidity:	19.5 °C / 30.0 %
Notes:	Limit: -23.21 dBm

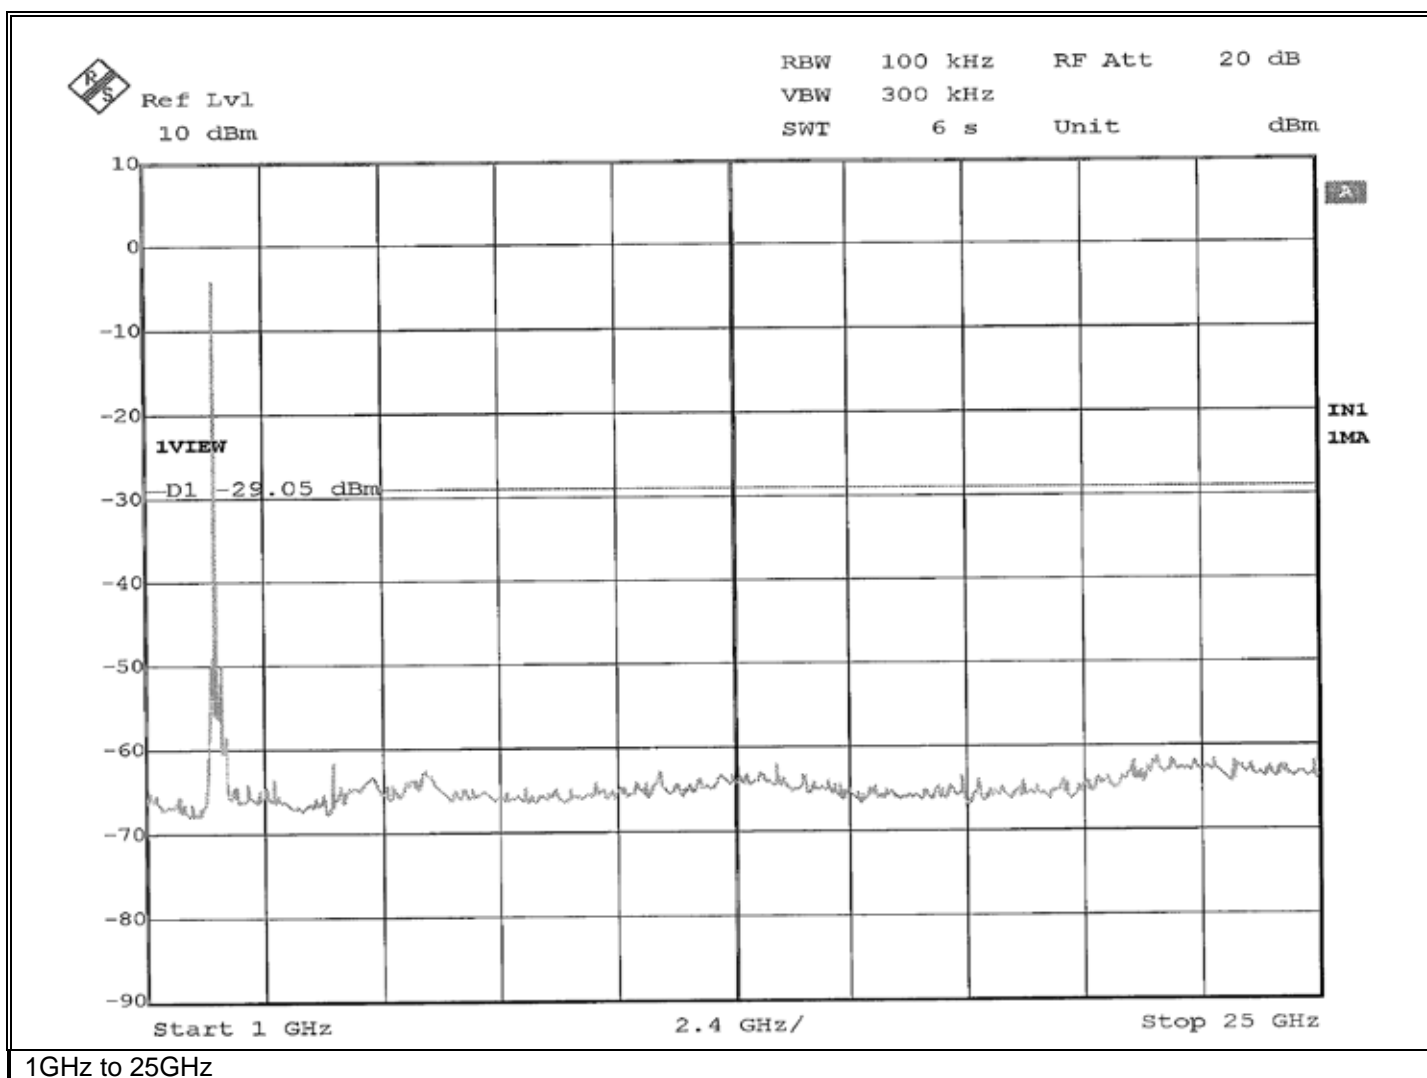


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Conducted Out of Band
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (d)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (Non11) at 2437 MHz
Technician:	M. Seamans
Date(s):	December 3 rd , 2019
Temp/ Relative Humidity:	19.5 °C / 30.0 %
Notes:	Limit: -23.21 dBm

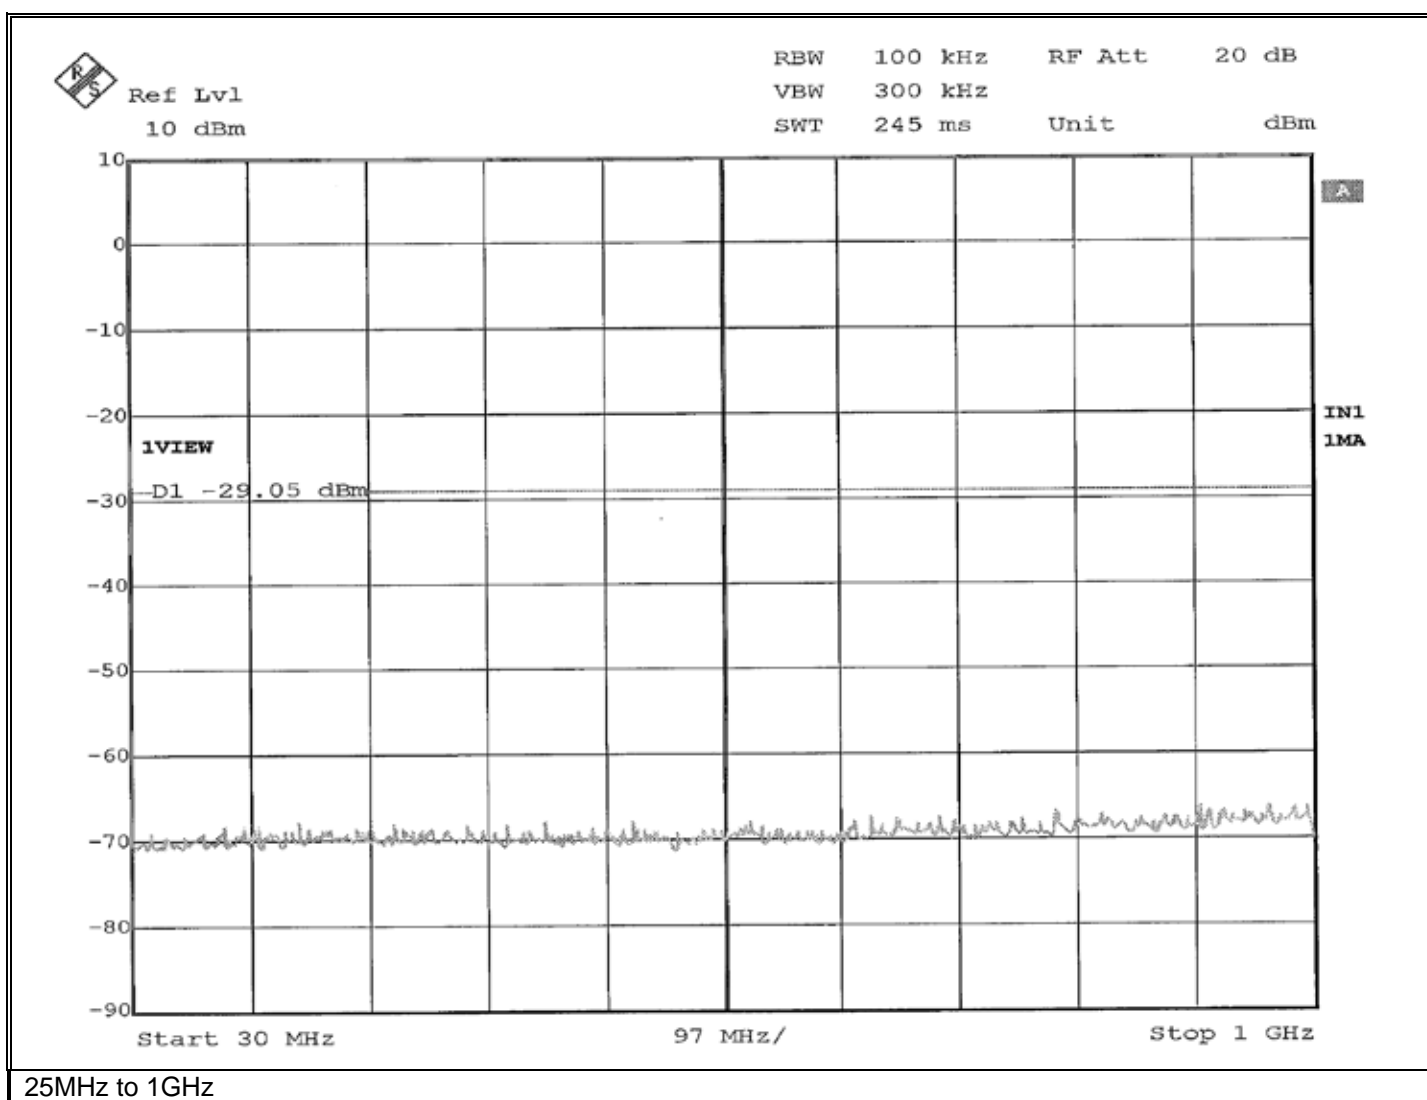


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Conducted Out of Band
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (d)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (Non11) at 2437 MHz
Technician:	M. Seamans
Date(s):	December 3 rd , 2019
Temp/ Relative Humidity:	19.5 °C / 30.0 %
Notes:	Limit: -23.21 dBm

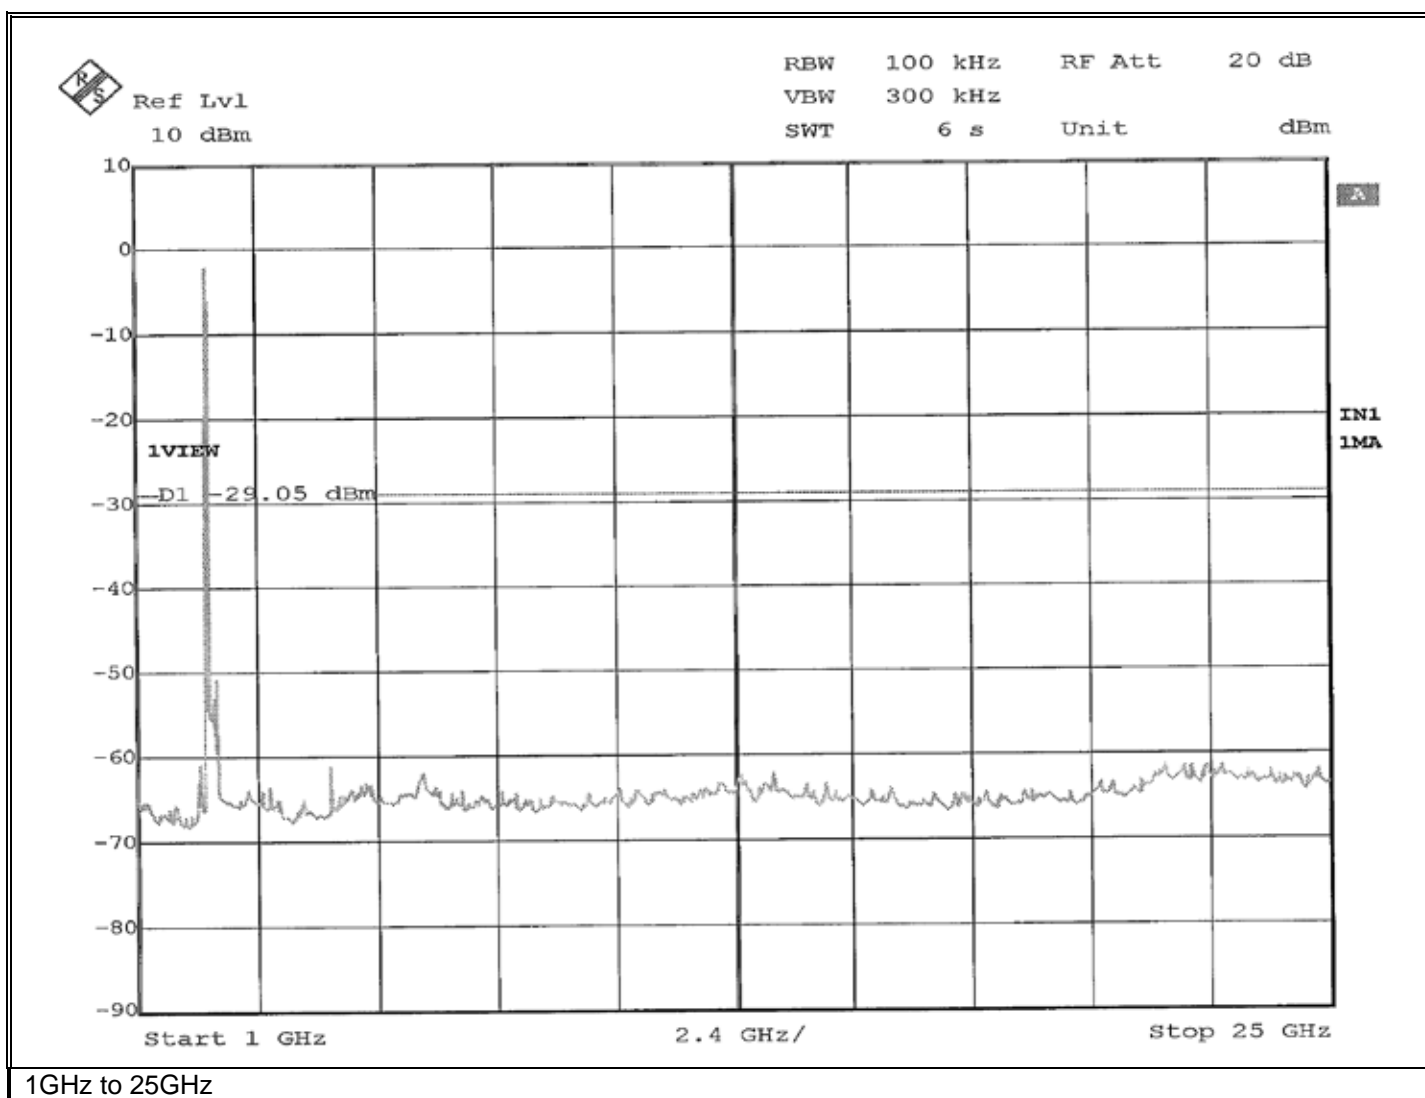


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Conducted Out of Band
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (d)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (Non11) at 2462 MHz
Technician:	M. Seamans
Date(s):	December 3 rd , 2019
Temp/ Relative Humidity:	19.5 °C / 30.0 %
Notes:	Limit: -23.21 dBm

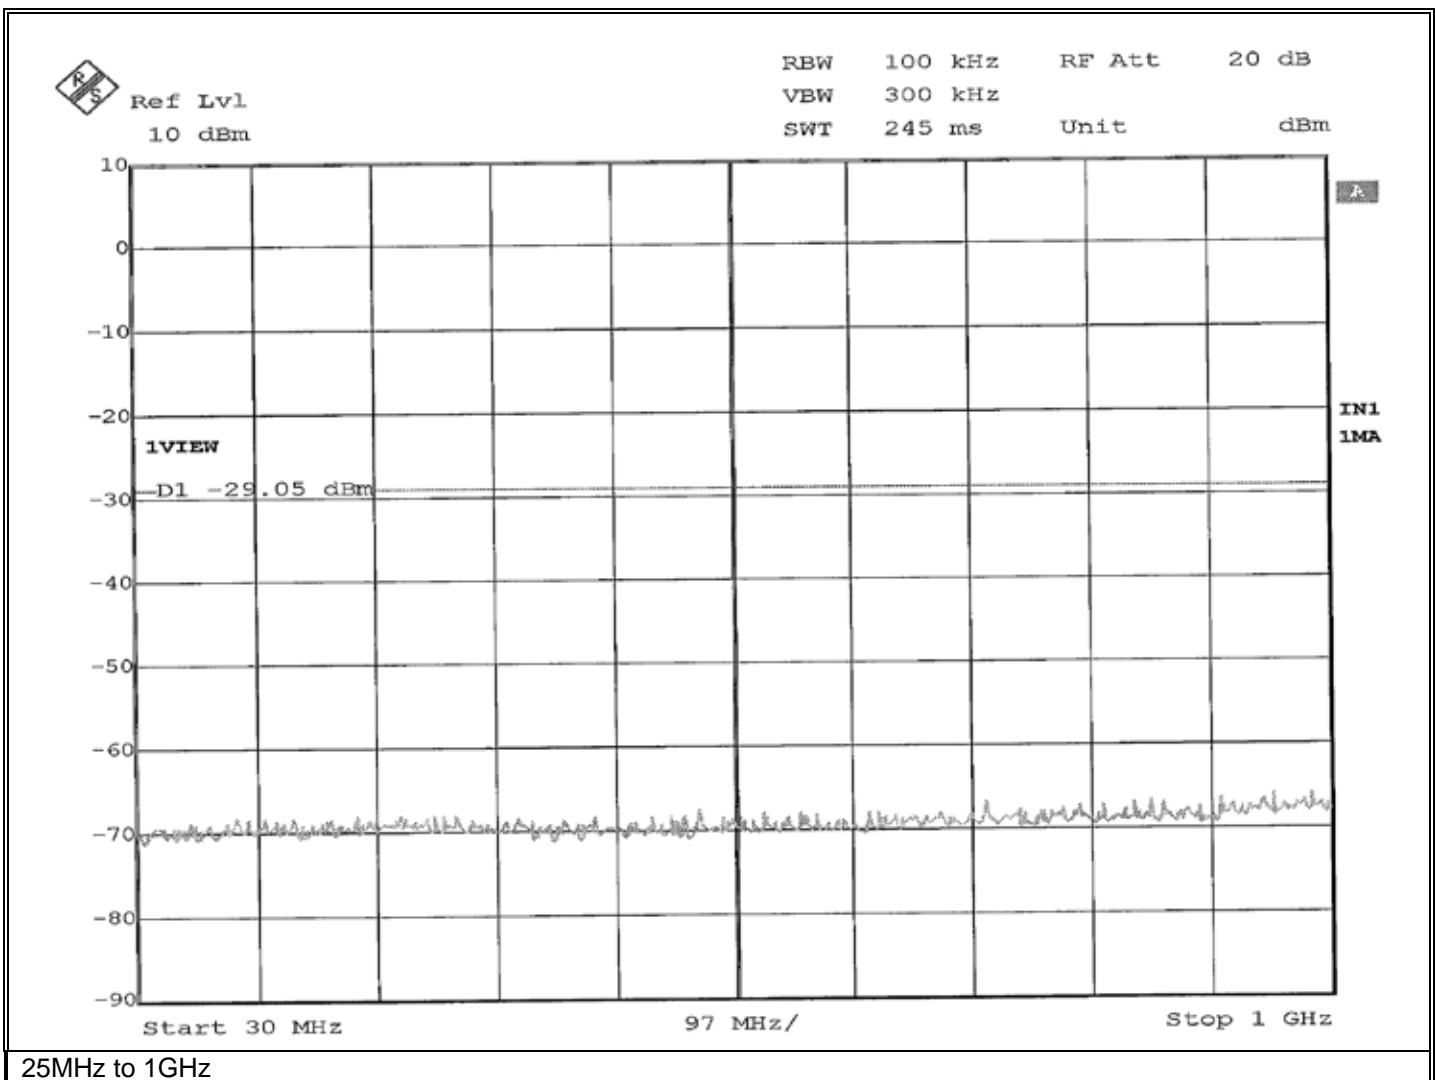


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Conducted Out of Band
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (d)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (Non11) at 2462 MHz
Technician:	M. Seamans
Date(s):	December 3 rd , 2019
Temp/ Relative Humidity:	19.5 °C / 30.0 %
Notes:	Limit: -23.21 dBm

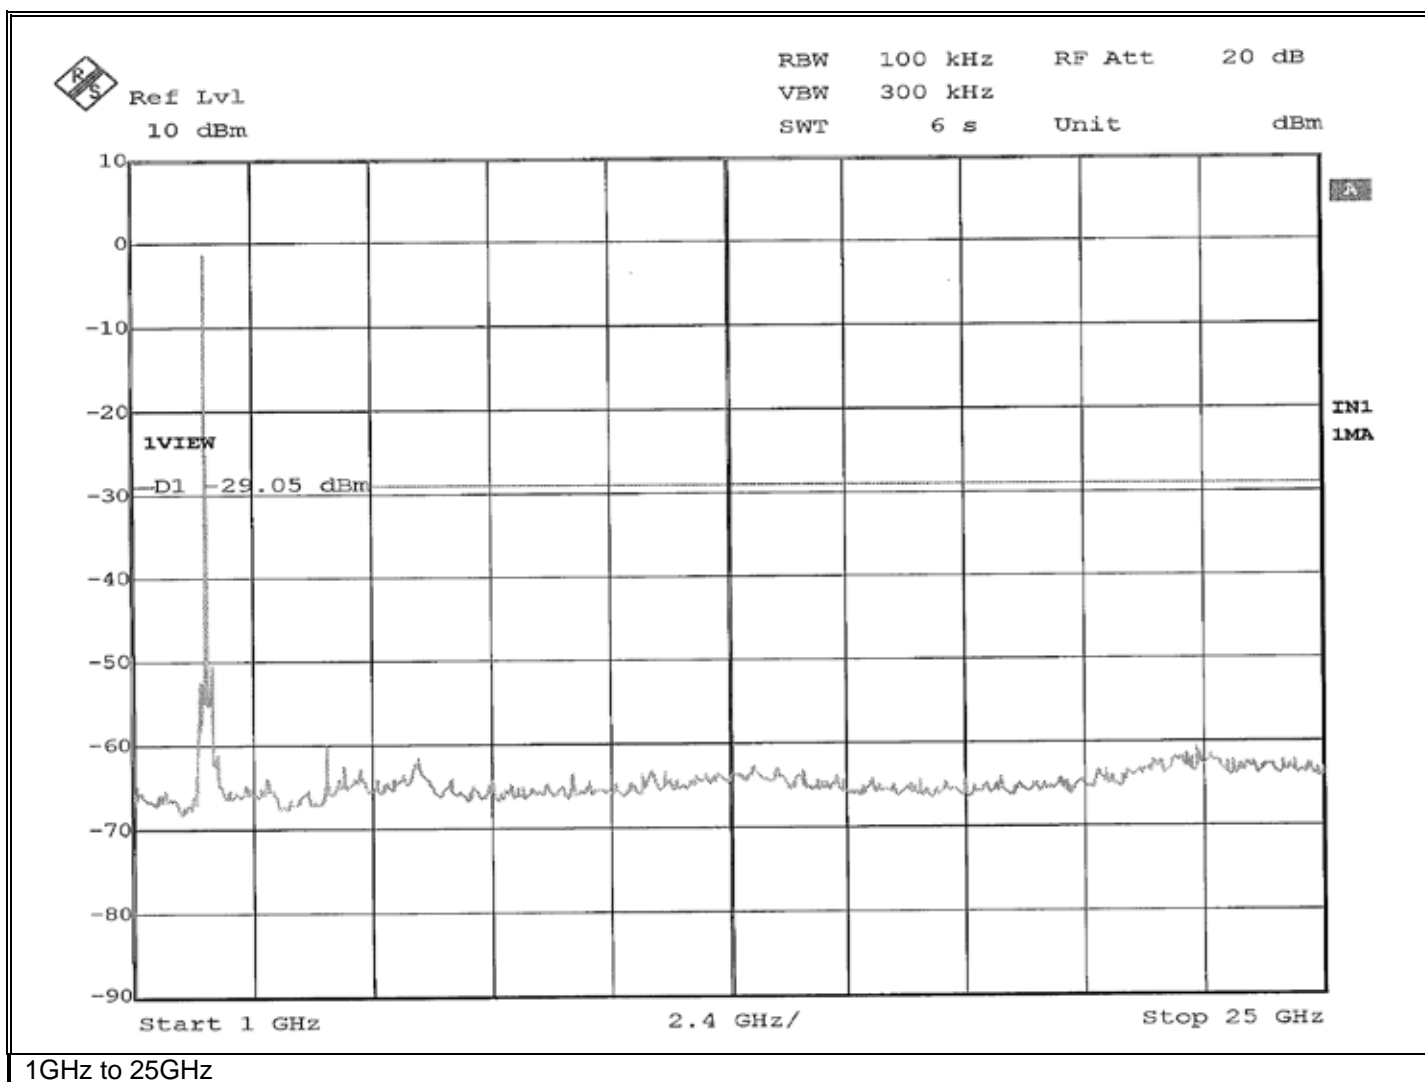

Retlif Testing Laboratories

Report No. R-6458N-3

Band Edge




Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Band Edge
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (d)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (OFDM) at 2412 MHz
Technician:	M. Seamans
Date(s):	December 3 rd , 2019
Temp/ Relative Humidity:	19.5 °C / 30.0 %
Notes:	Reading: -52.55 dBm Limit: -28.23 dBm

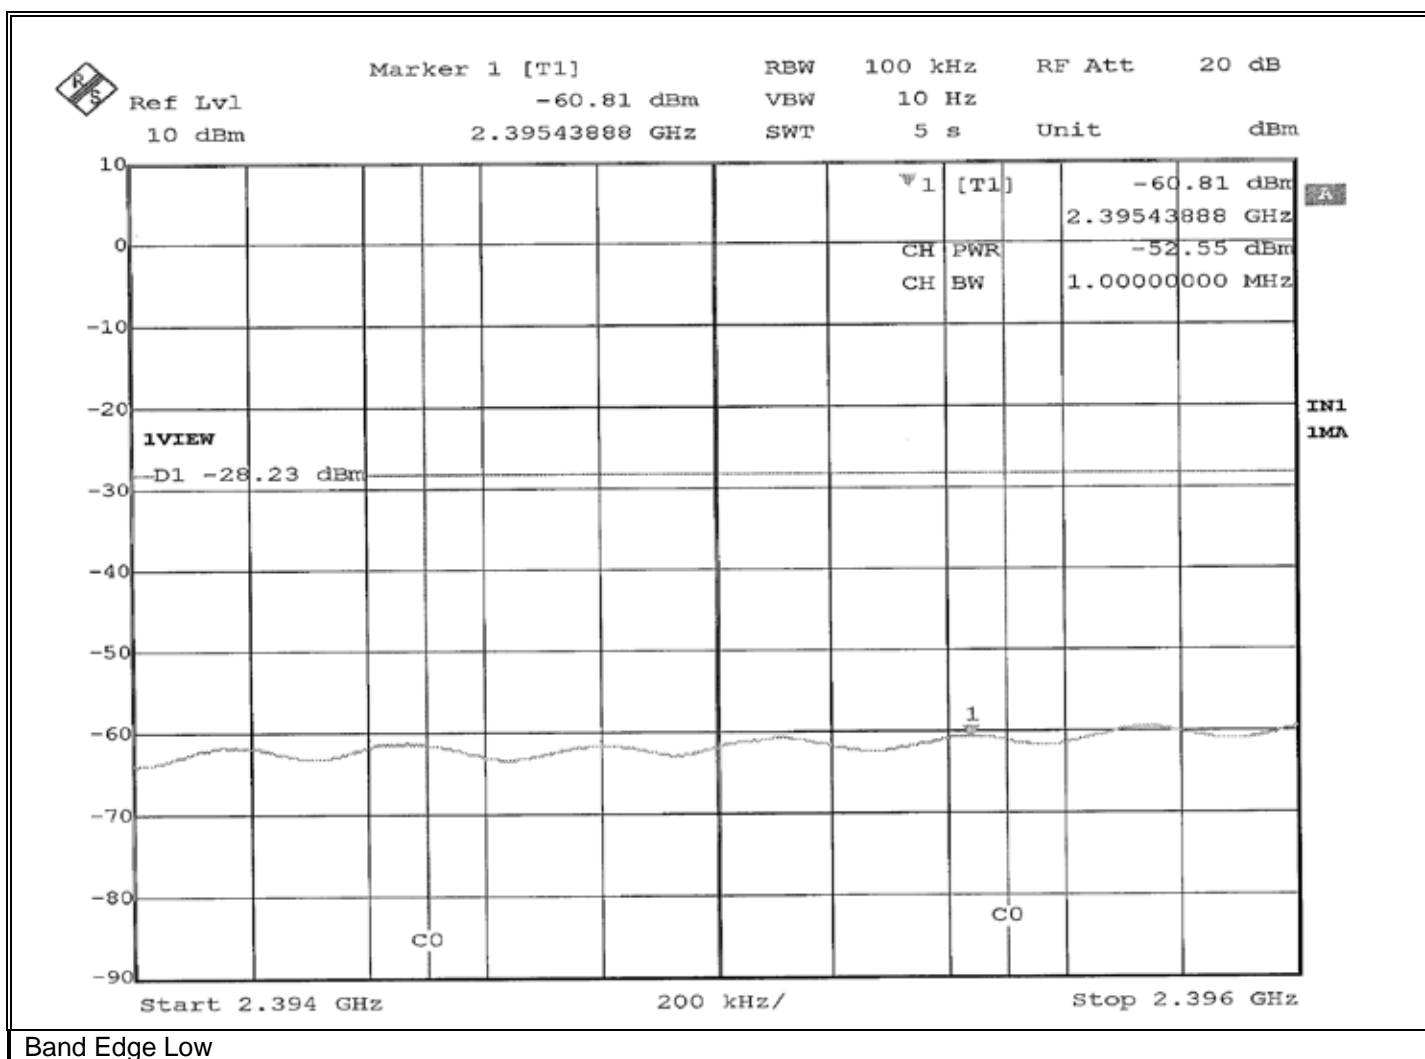


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Band Edge
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (d)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (OFDM) at 2462 MHz
Technician:	M. Seamans
Date(s):	December 3 rd , 2019
Temp/ Relative Humidity:	19.5 °C / 30.0 %
Notes:	Reading: -58.09 dBm Limit: -28.23 dBm

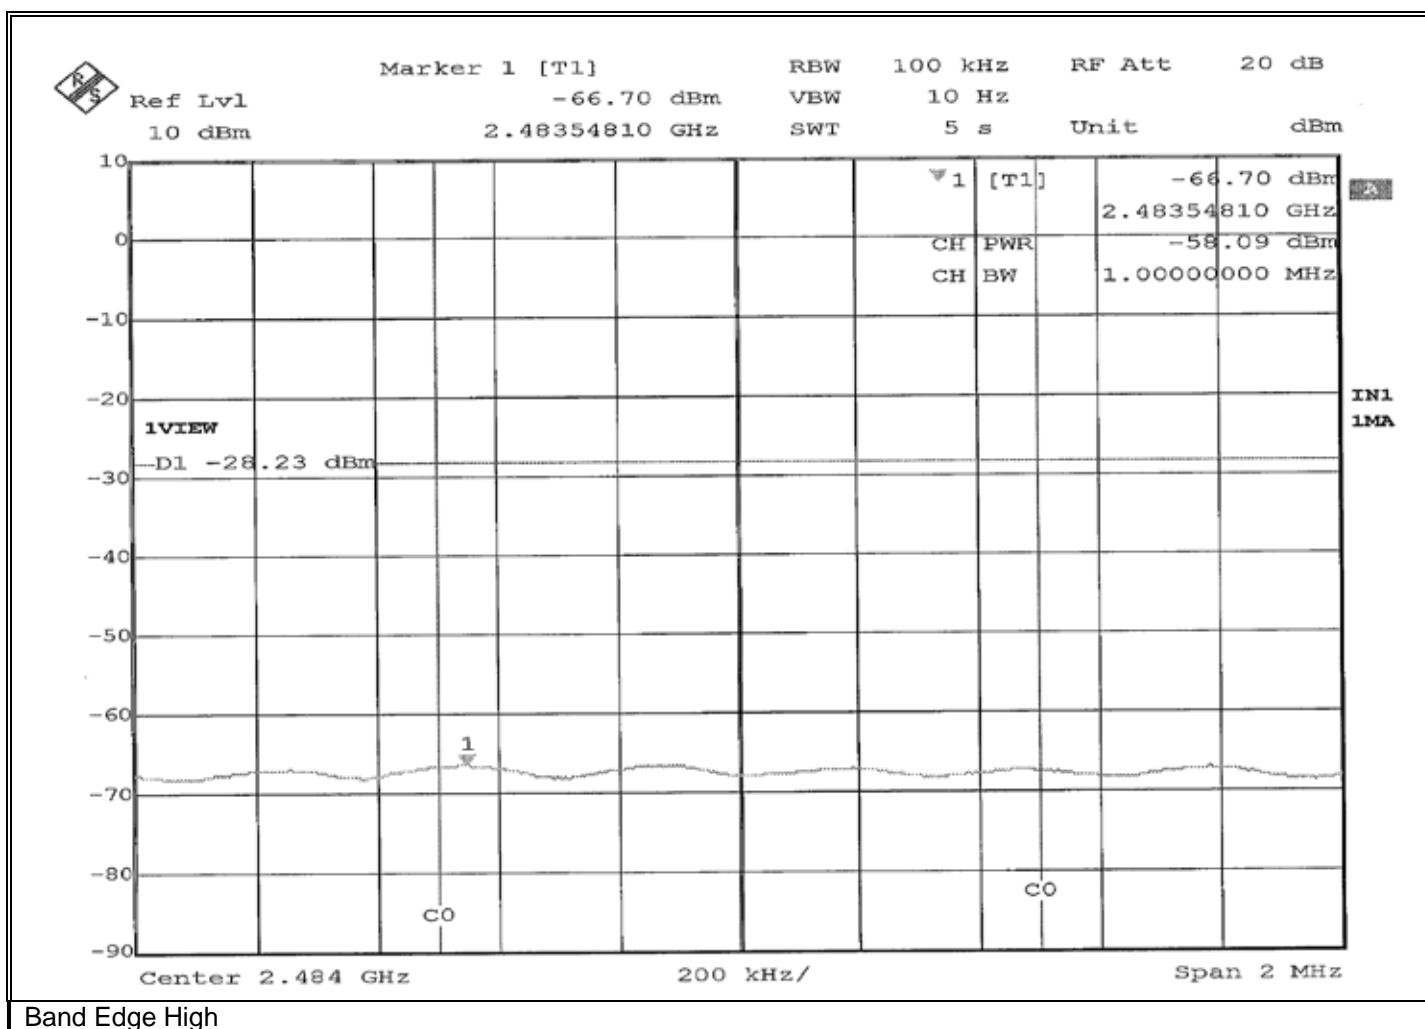


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Band Edge
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (d)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (DSSS) at 2412 MHz
Technician:	M. Seamans
Date(s):	December 3 rd , 2019
Temp/ Relative Humidity:	19.5 °C / 30.0 %
Notes:	Reading: -48.14 dBm Limit: -23.21 dBm

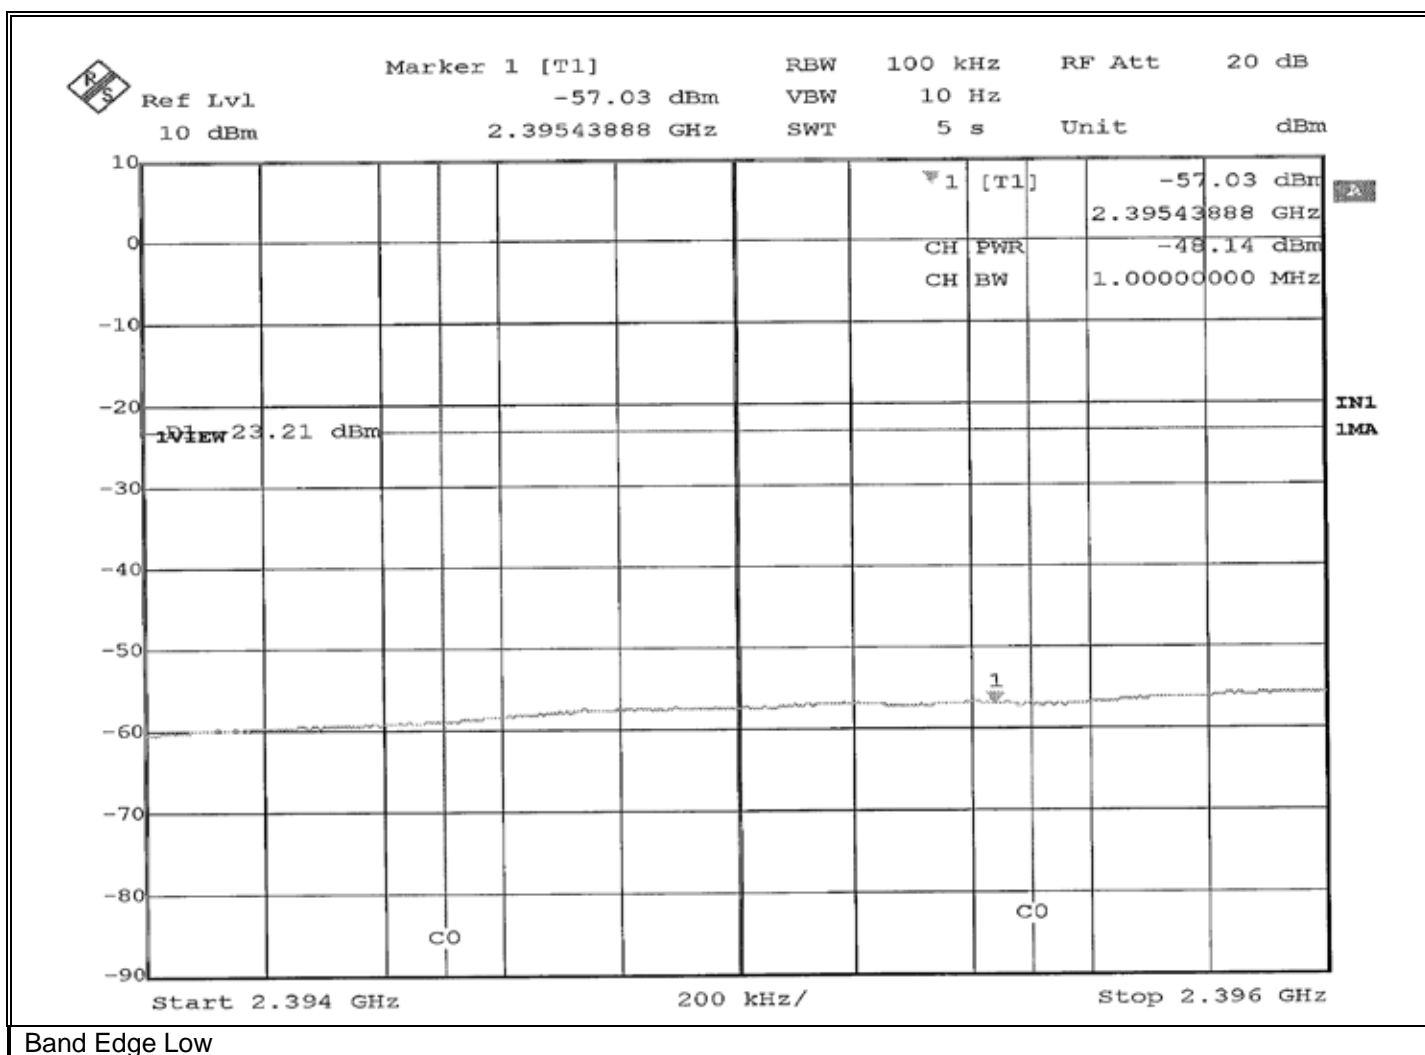


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Band Edge
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (d)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (DSSS) at 2462 MHz
Technician:	M. Seamans
Date(s):	December 3 rd , 2019
Temp/ Relative Humidity:	19.5 °C / 30.0 %
Notes:	Reading: -57.20 dBm Limit: -23.21 dBm

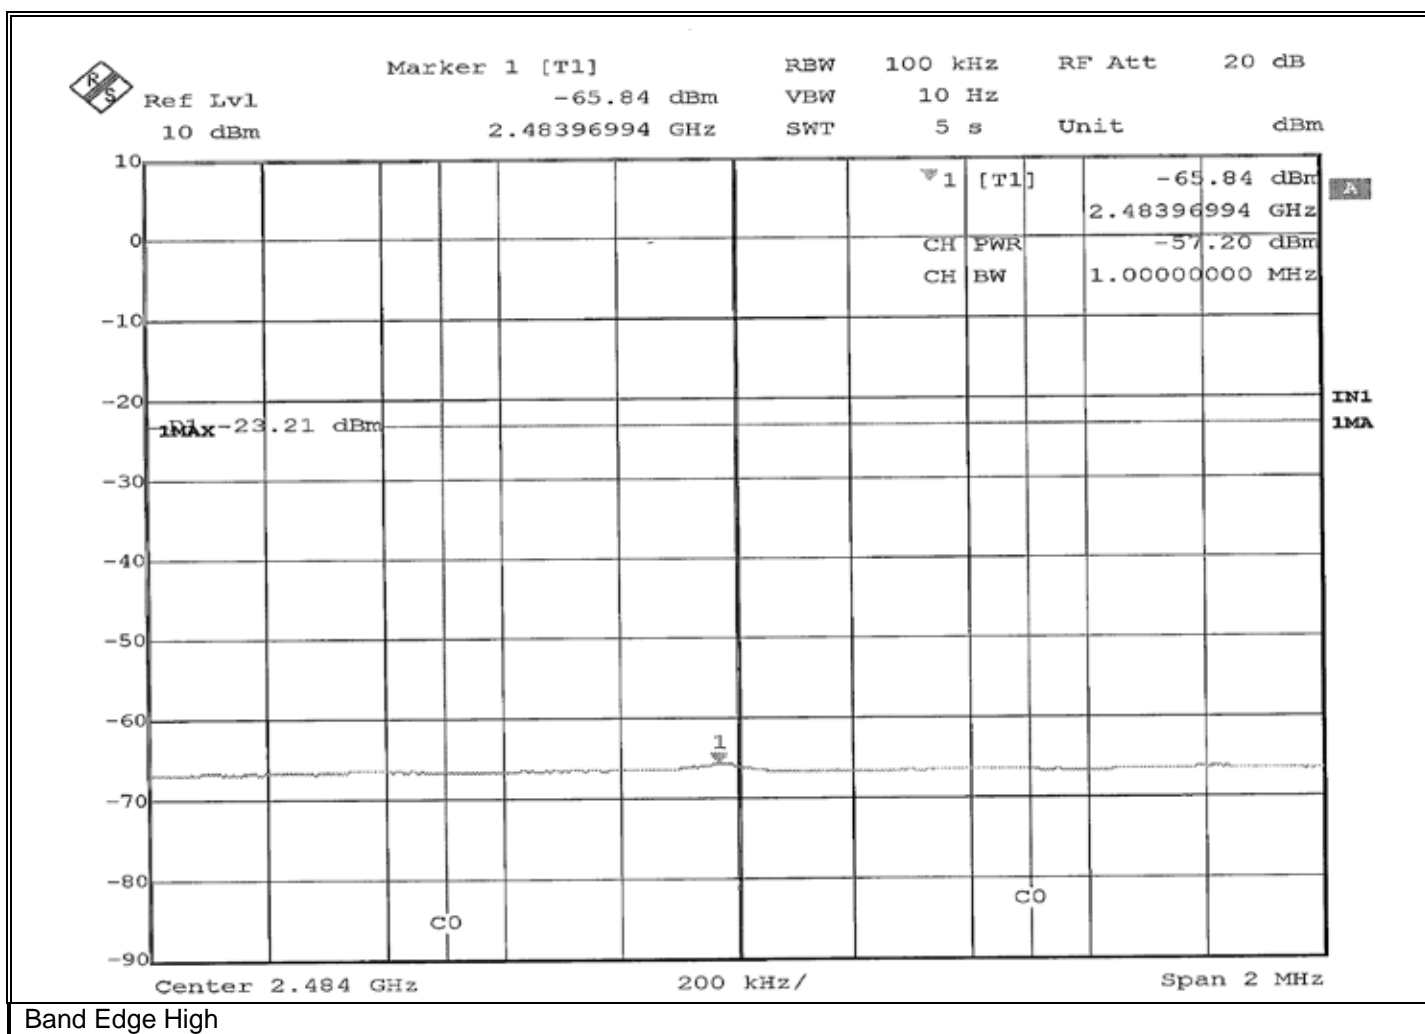


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Band Edge
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (d)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (Non11) at 2412 MHz
Technician:	M. Seamans
Date(s):	December 3 rd , 2019
Temp/ Relative Humidity:	19.5 °C / 30.0 %
Notes:	Reading: -49.36 dBm Limit: -29.05 dBm

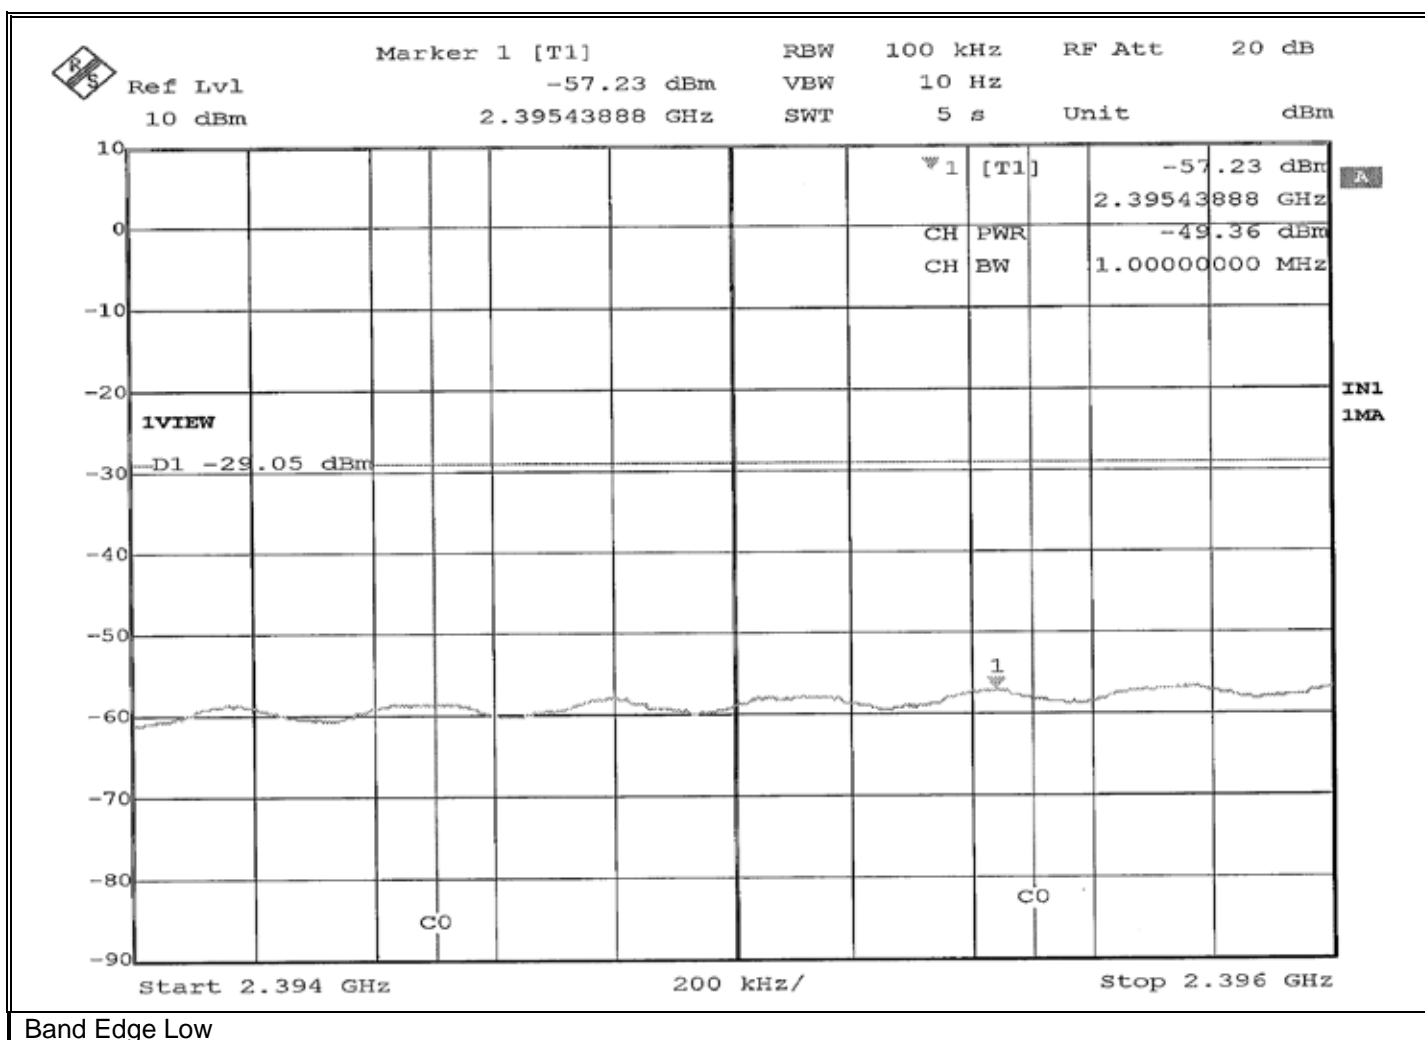


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Band Edge
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (d)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (Non11) at 2462 MHz
Technician:	M. Seamans
Date(s):	December 3 rd , 2019
Temp/ Relative Humidity:	19.5 °C / 30.0 %
Notes:	Reading: -57.28 dBm Limit: -29.05 dBm

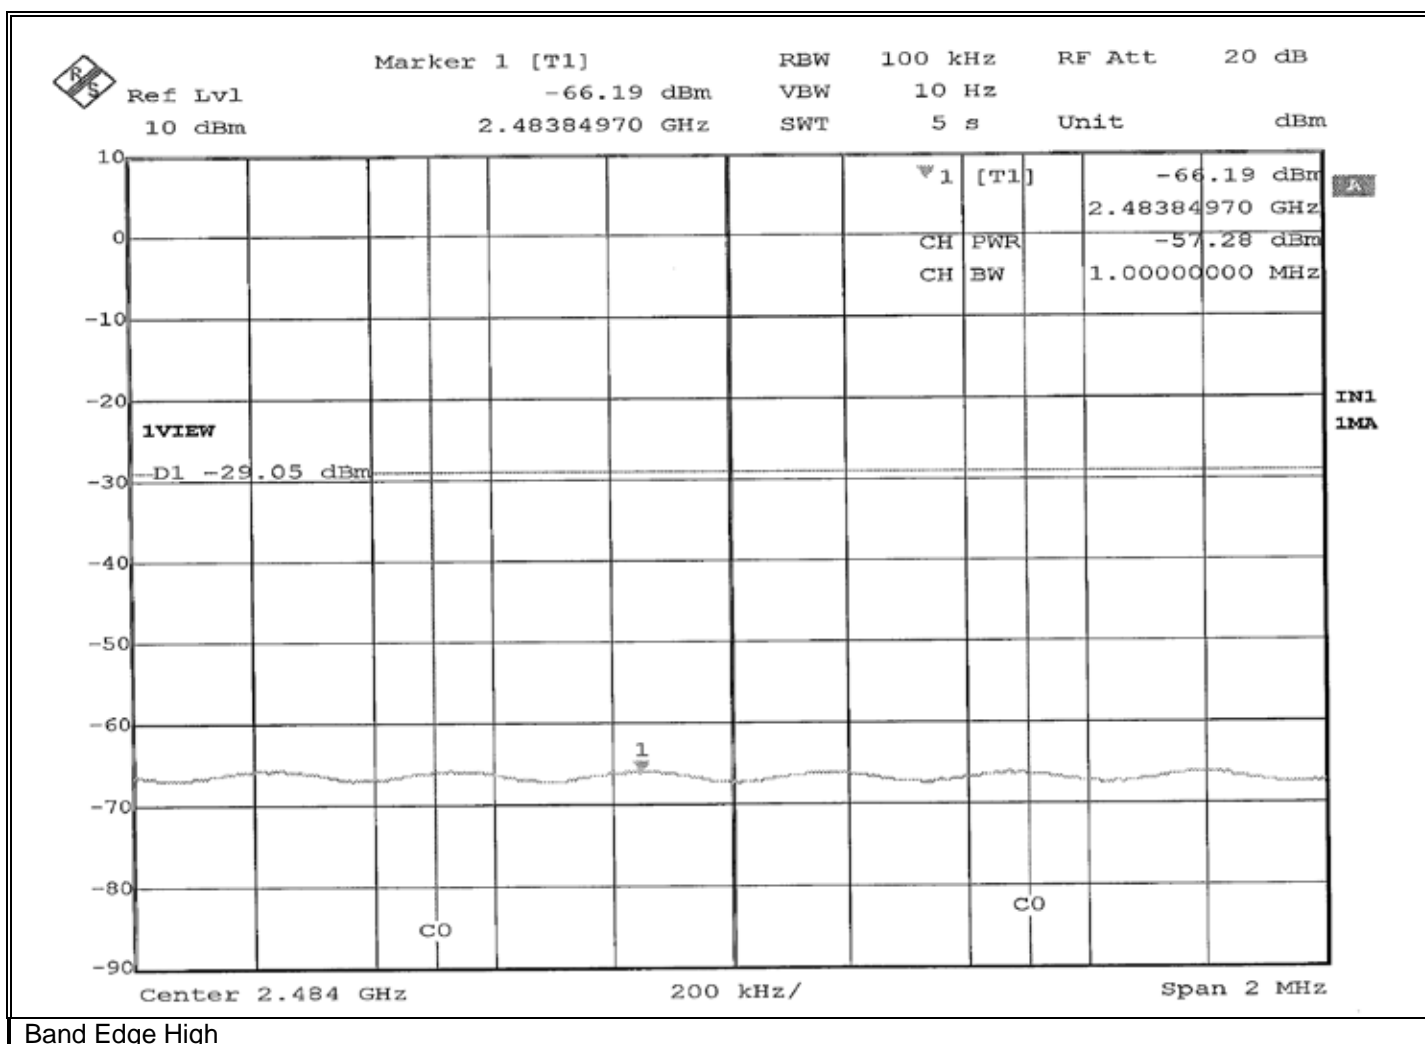

Retlif Testing Laboratories

Report No. R-6458N-3

Test Photographs
Antenna Port, Power Density



EUT Configuration



Test Setup



Retlif Testing Laboratories

Report No. R-6458N-3

**FCC Part 15, Subpart C, Section 15.247(e)
Antenna Port, Power Density
Test Data**




Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Power Spectral Density
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (e)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (OFDM) at 2412 MHz
Technician:	M. Seamans
Date(s):	December 2 nd , 2019
Temp/ Relative Humidity:	21.4 °C / 25.0 %
Notes:	Power Spectral Density: -0.82 dBm

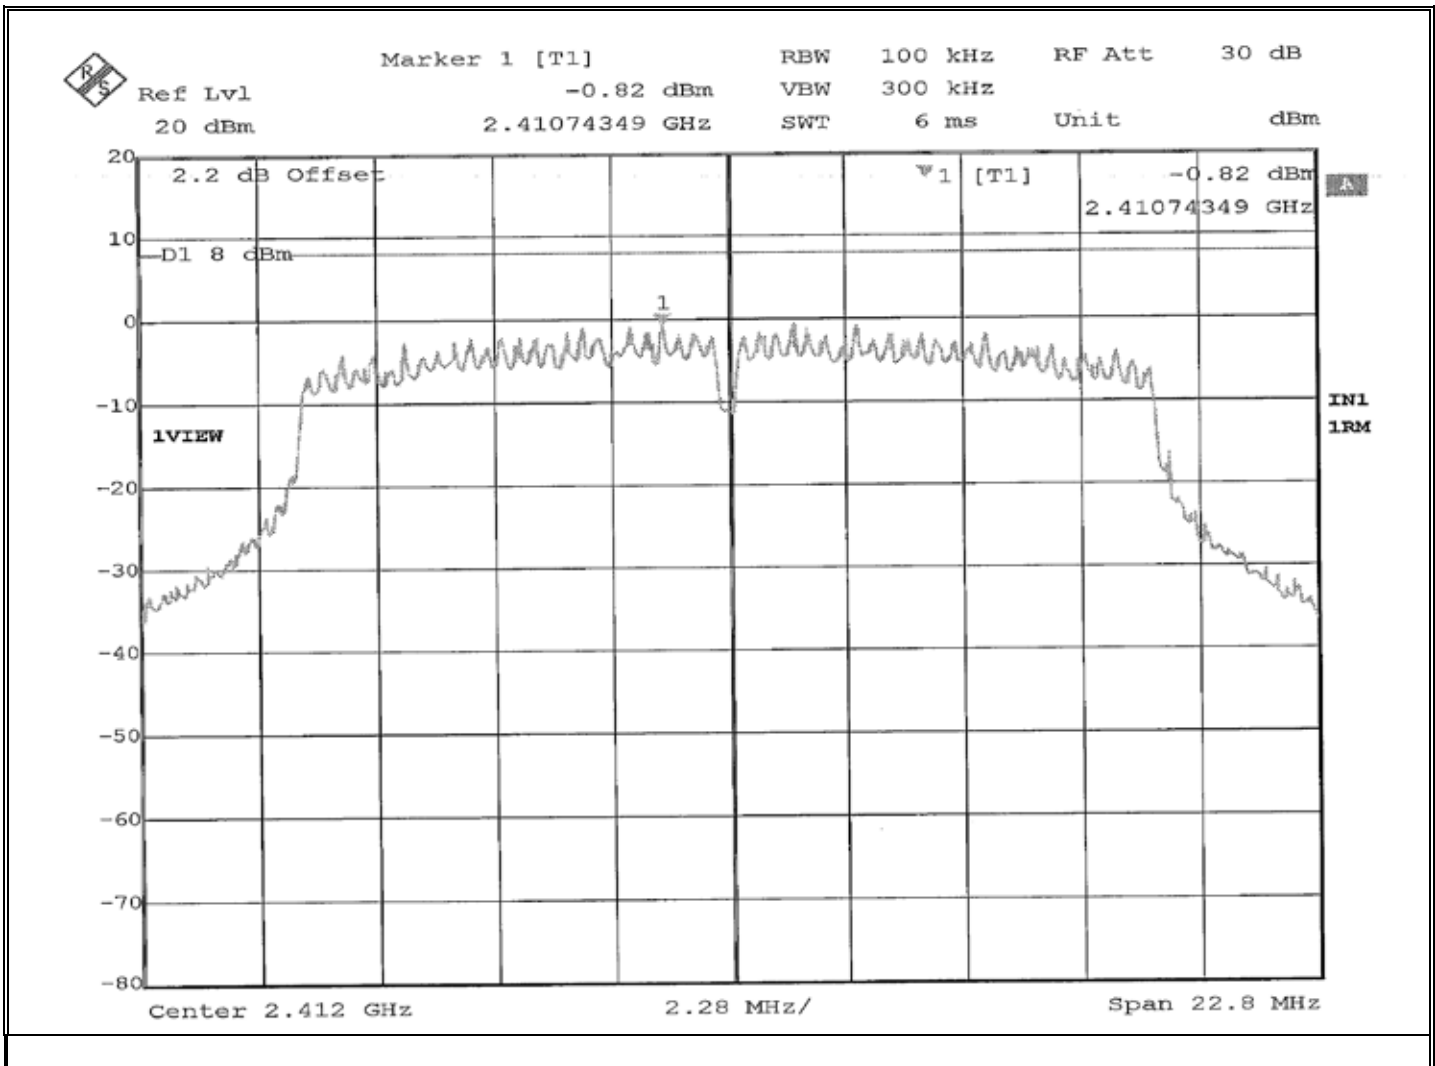


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Power Spectral Density
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (e)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (OFDM) at 2437 MHz
Technician:	M. Seamans
Date(s):	December 2 nd , 2019
Temp/ Relative Humidity:	21.4 °C / 25.0 %
Notes:	Power Spectral Density: -0.41 dBm

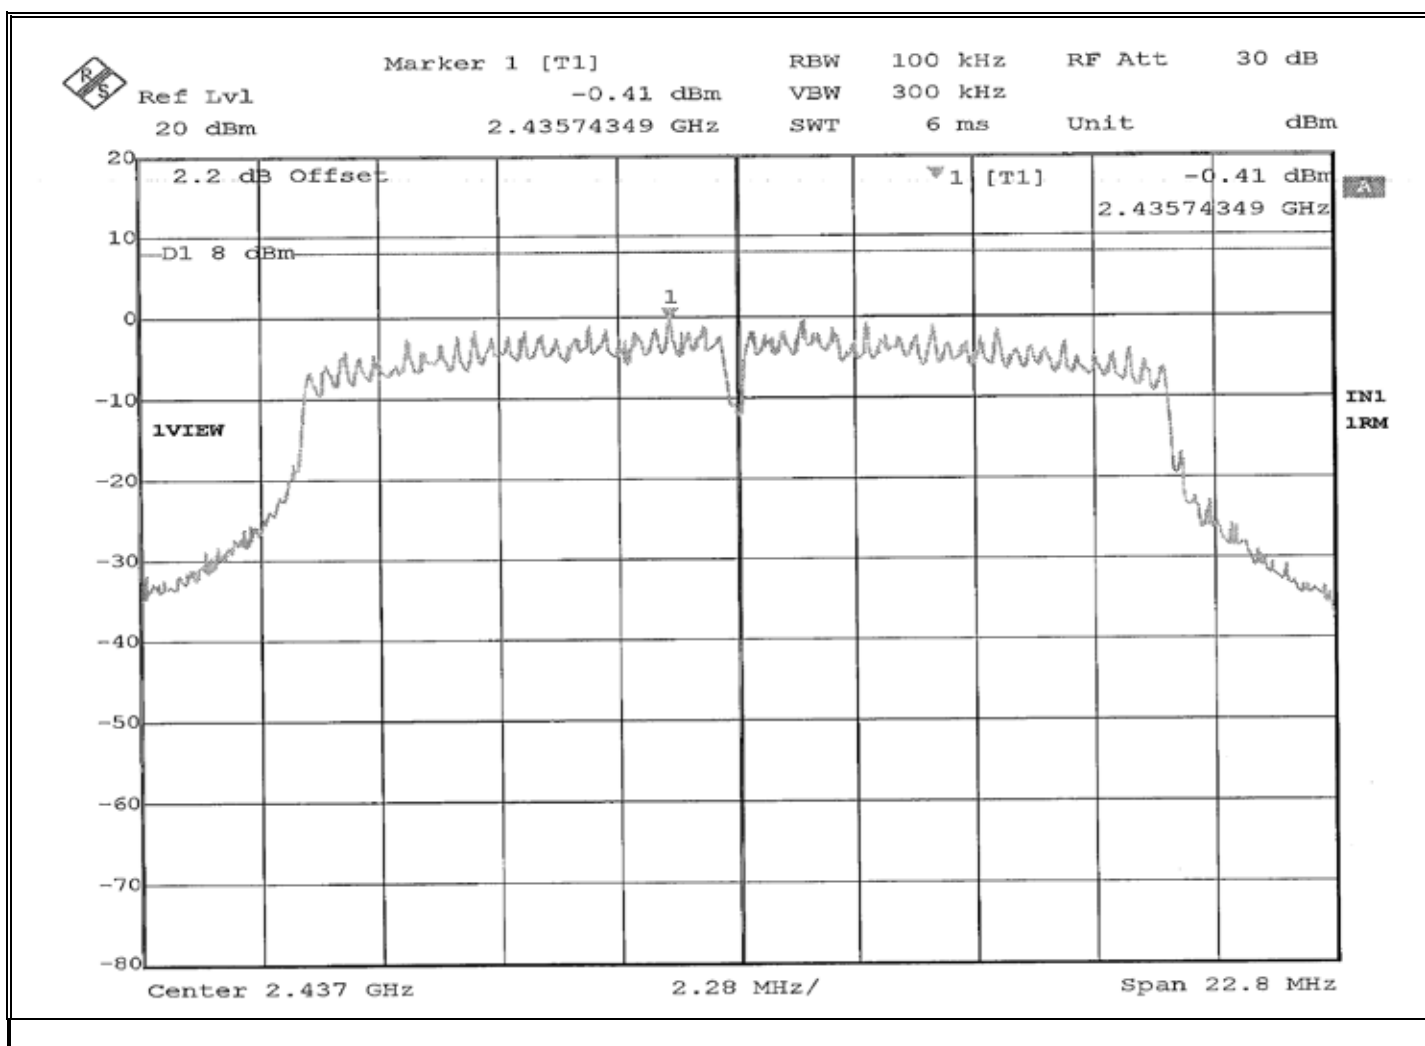


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Power Spectral Density
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (e)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (OFDM) at 2462 MHz
Technician:	M. Seamans
Date(s):	December 2 nd , 2019
Temp/ Relative Humidity:	21.4 °C / 25.0 %
Notes:	Power Spectral Density: -0.68 dBm

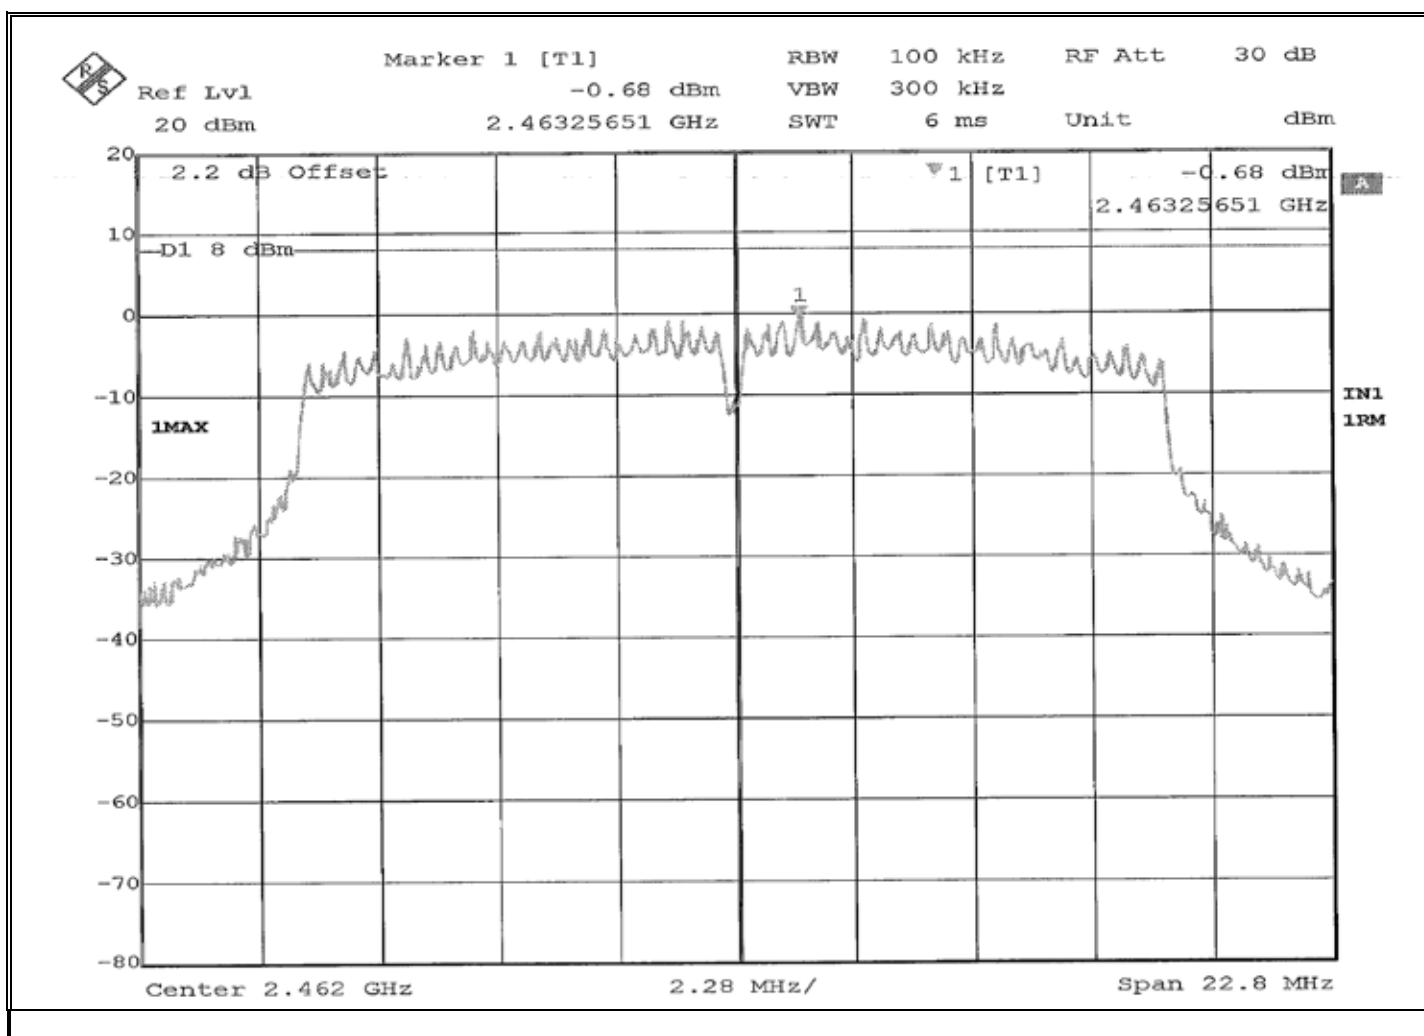


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Power Spectral Density
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (e)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (DSSS) at 2412 MHz
Technician:	M. Seamans
Date(s):	December 2 nd , 2019
Temp/ Relative Humidity:	21.4 °C / 25.0 %
Notes:	Power Spectral Density: 4.48 dBm

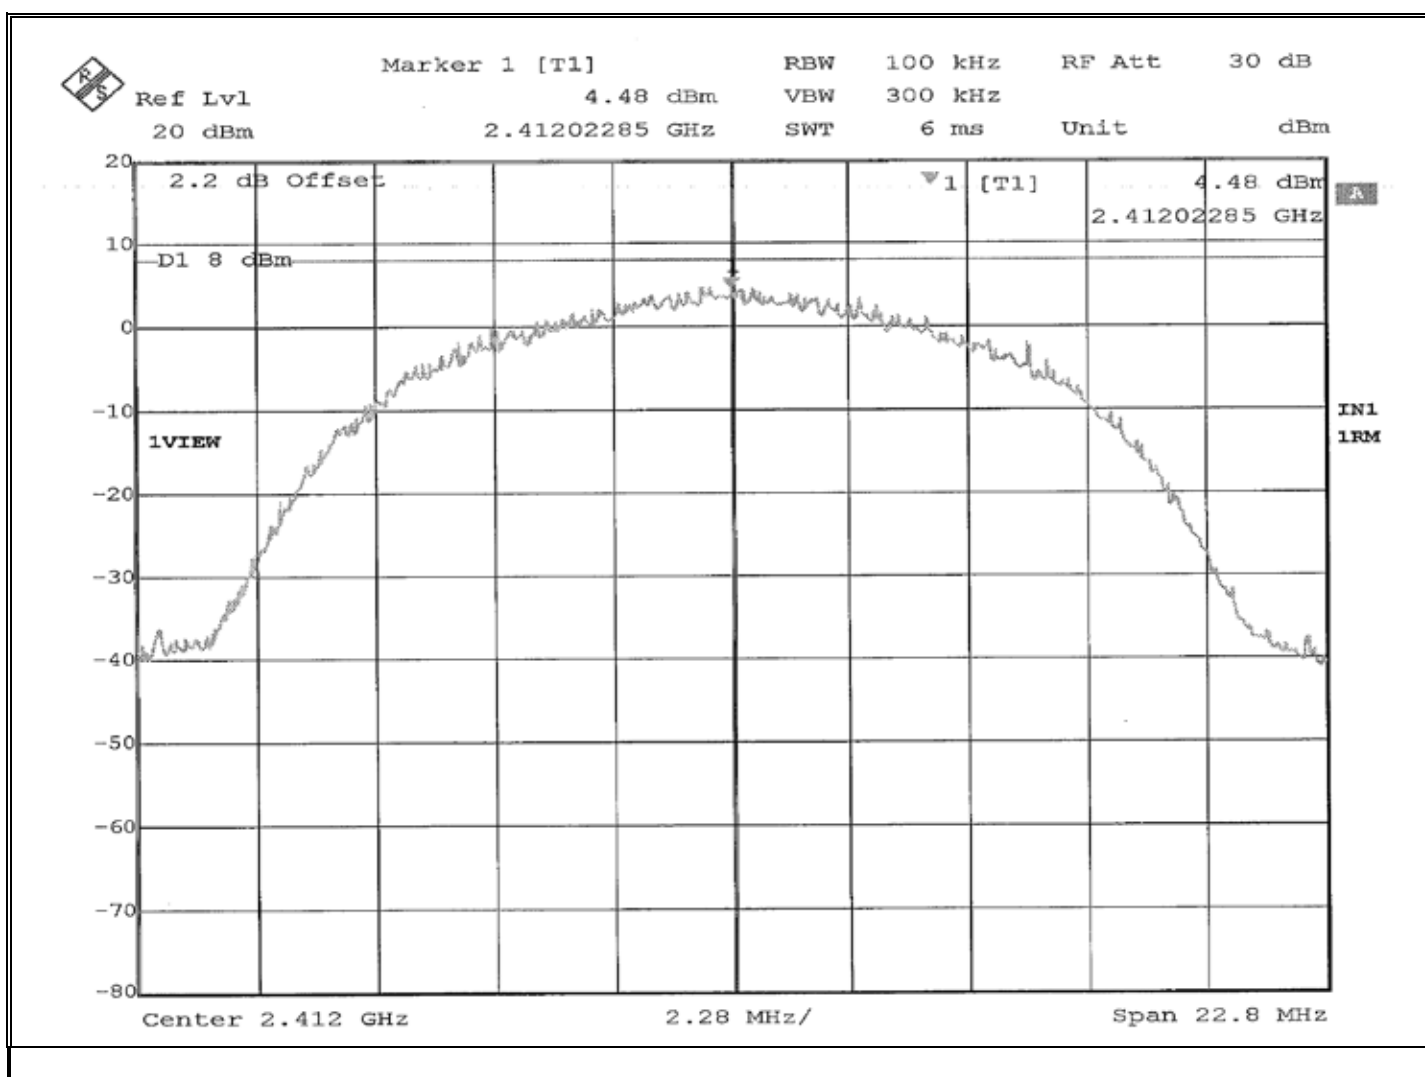


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Power Spectral Density
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (e)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (DSSS) at 2437 MHz
Technician:	M. Seamans
Date(s):	December 2 nd , 2019
Temp/ Relative Humidity:	21.4 °C / 25.0 %
Notes:	Power Spectral Density: 4.39 dBm

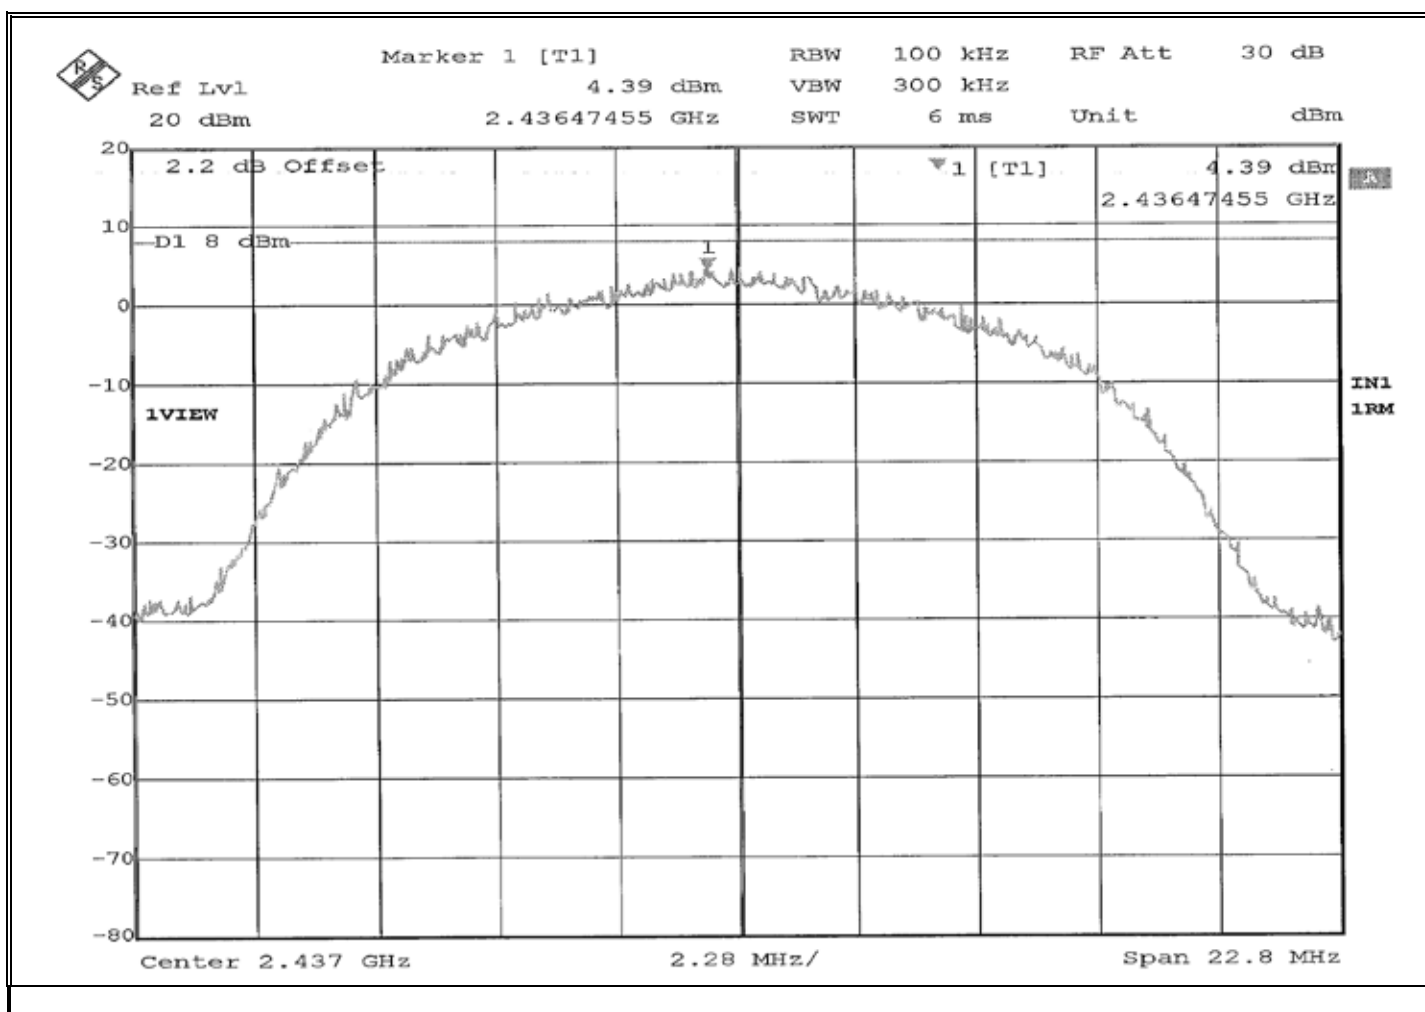


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Power Spectral Density
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (e)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (DSSS) at 2462 MHz
Technician:	M. Seamans
Date(s):	December 2 nd , 2019
Temp/ Relative Humidity:	21.4 °C / 25.0 %
Notes:	Power Spectral Density: 4.50 dBm

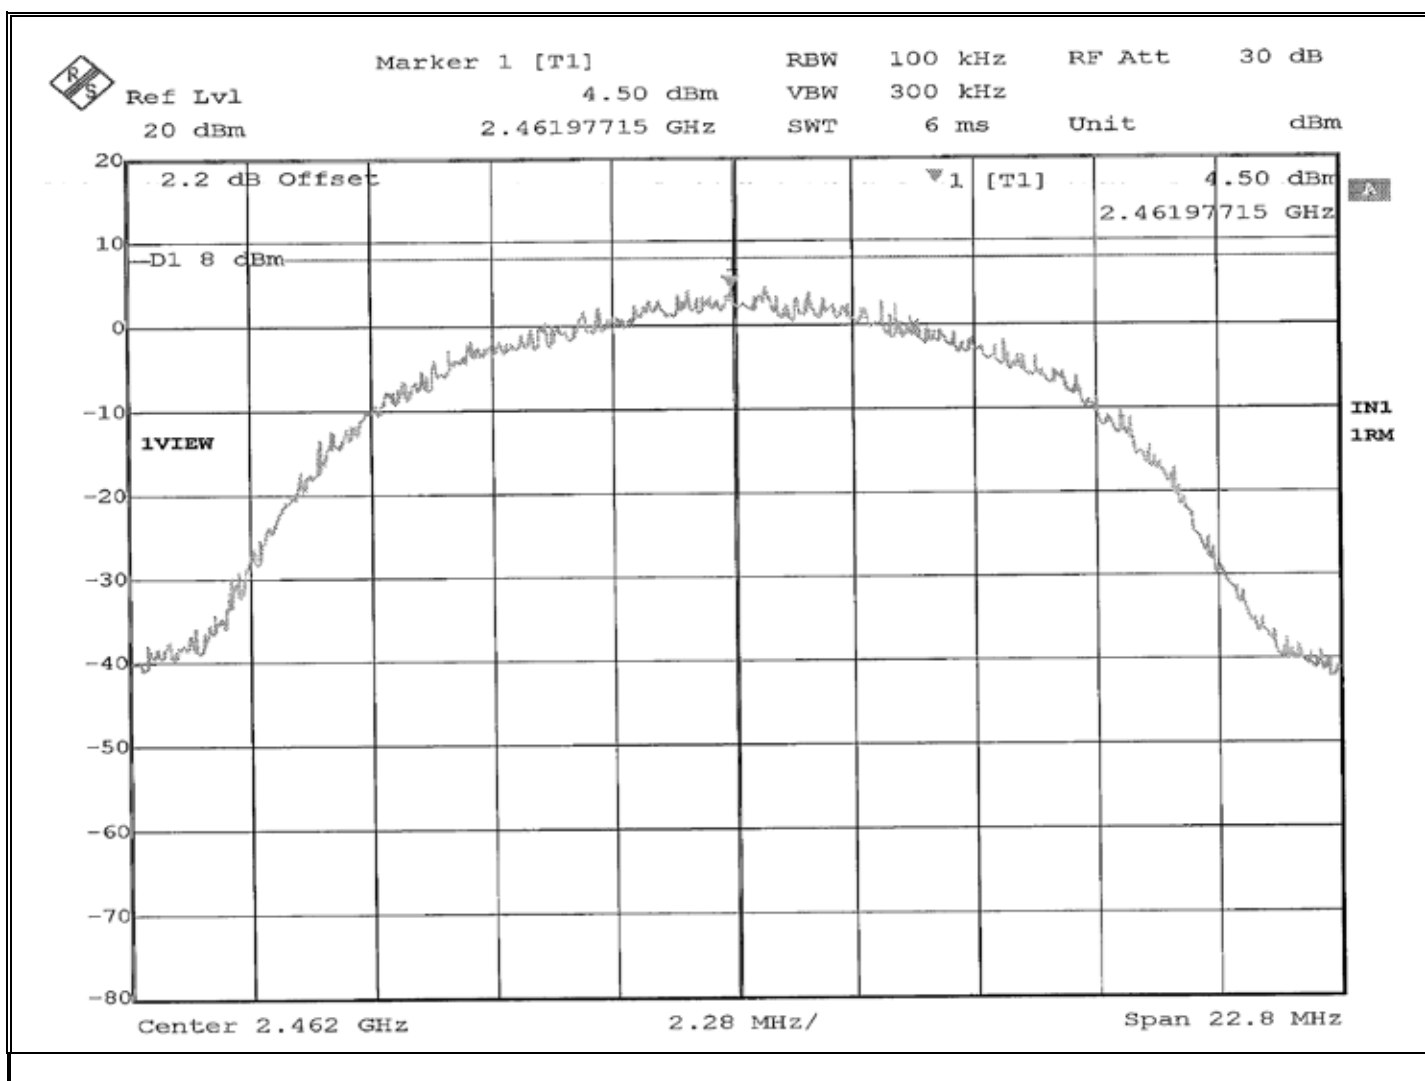


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Power Spectral Density
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (e)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (Non11) at 2412 MHz
Technician:	M. Seamans
Date(s):	December 2 nd , 2019
Temp/ Relative Humidity:	21.4 °C / 25.0 %
Notes:	Power Spectral Density: -1.45 dBm

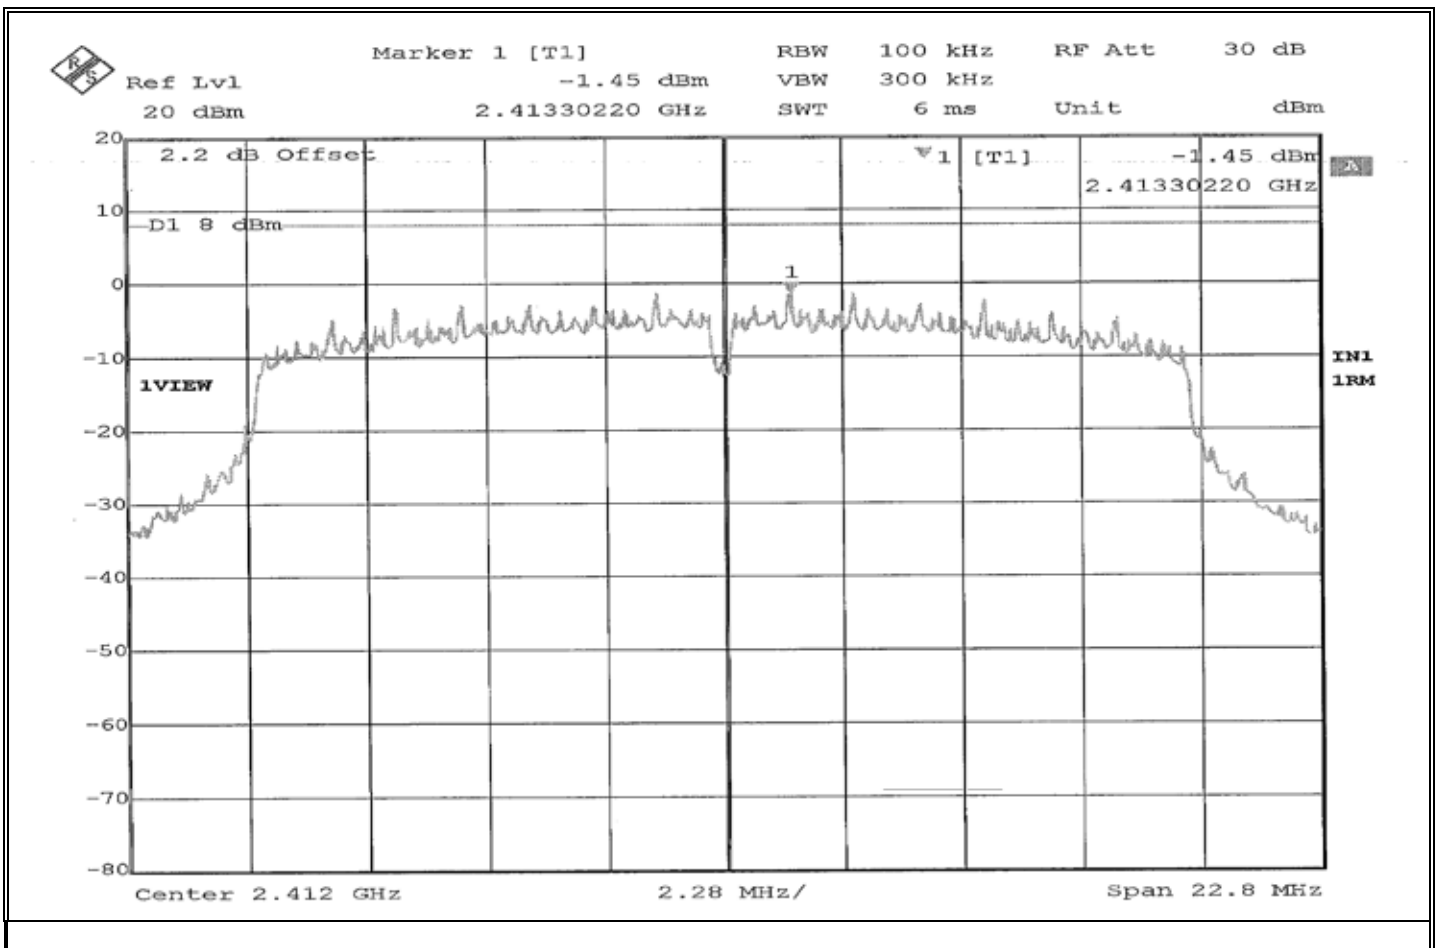


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Power Spectral Density
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (e)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (Non11) at 2437 MHz
Technician:	M. Seamans
Date(s):	December 2 nd , 2019
Temp/ Relative Humidity:	21.4 °C / 25.0 %
Notes:	Power Spectral Density: -1.26 dBm

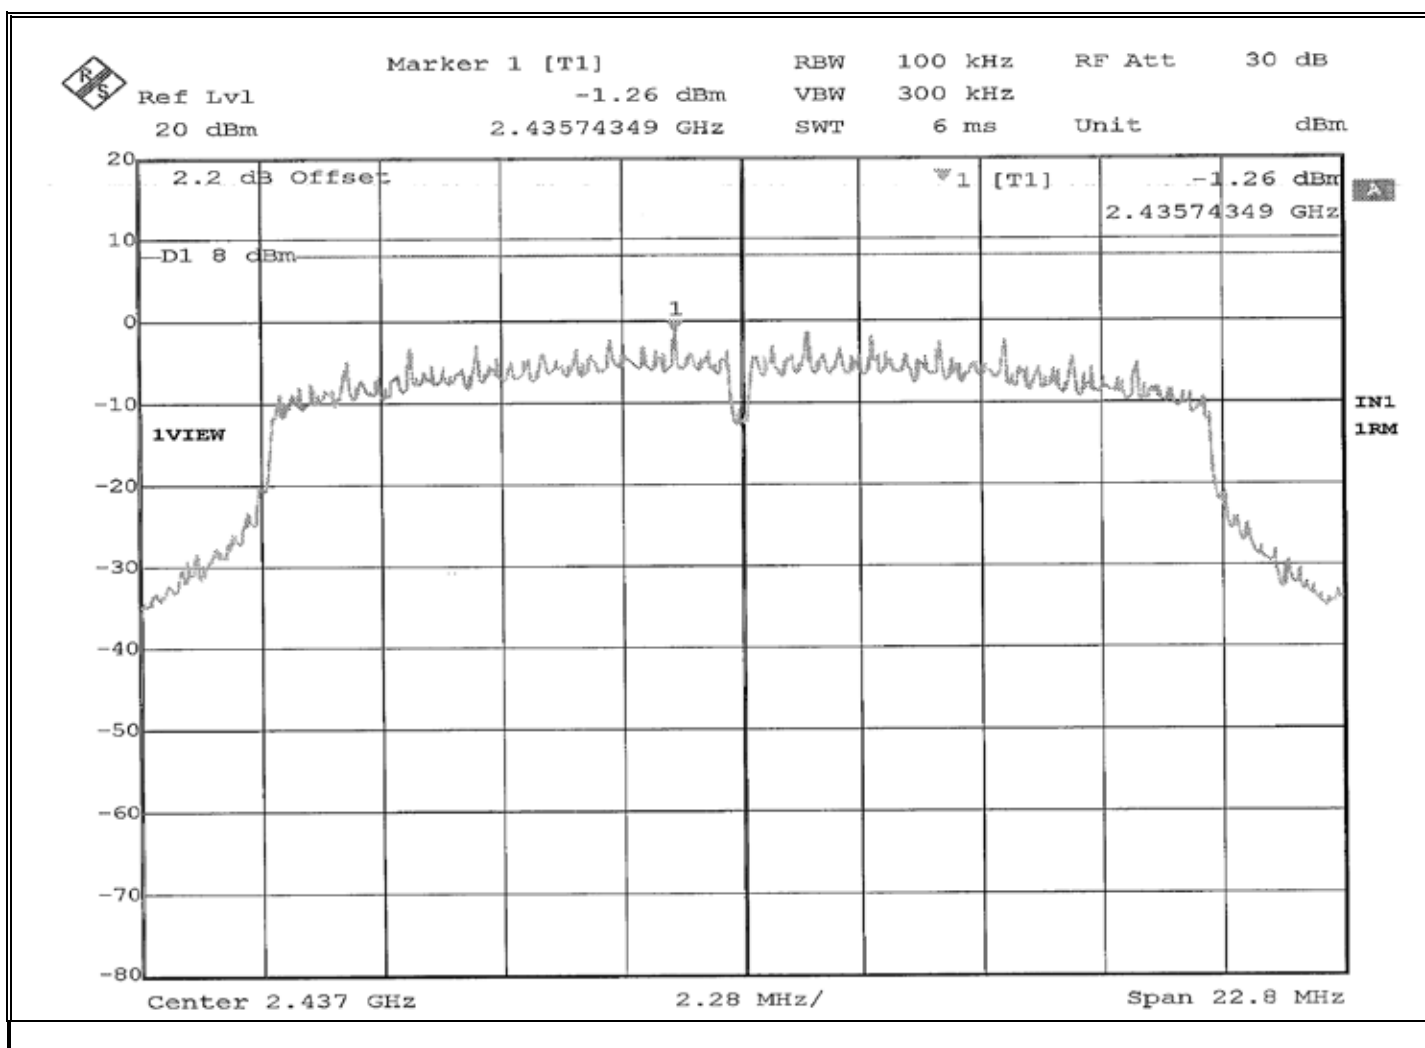


Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Method:	Power Spectral Density
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.247 (e)
Job Number:	R-6458N-3
Customer:	Immedia Semiconductor LLC.
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	877-000-198
Operating Mode:	Transmitting modulated signal (Non11) at 2462 MHz
Technician:	M. Seamans
Date(s):	December 2 nd , 2019
Temp/ Relative Humidity:	21.4 °C / 25.0 %
Notes:	Power Spectral Density: -1.69 dBm

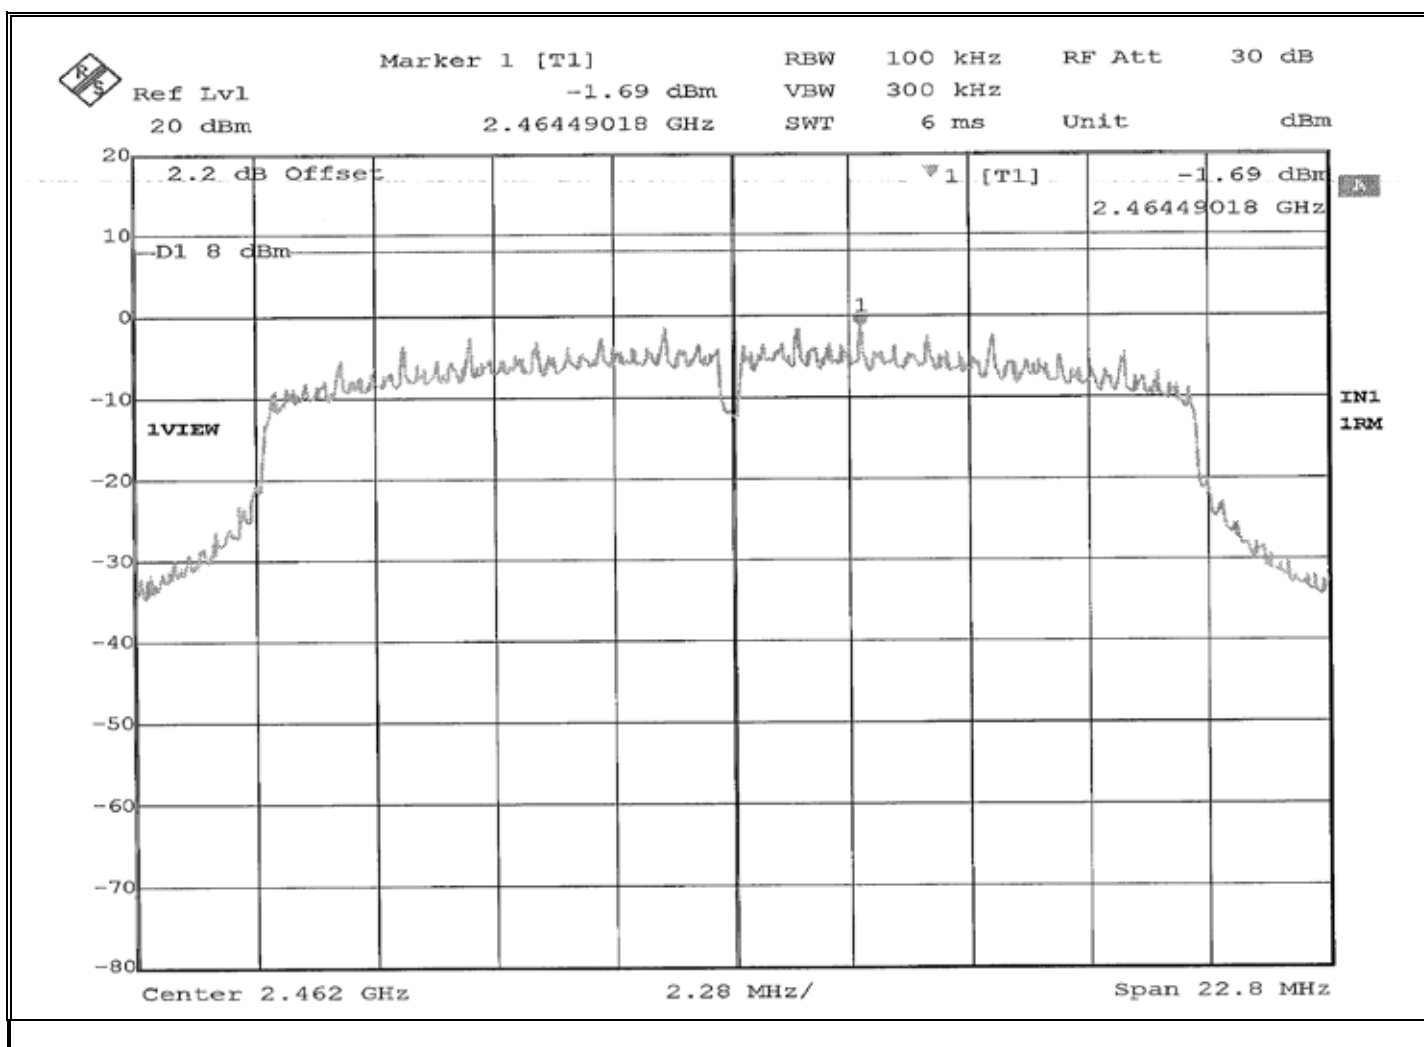

Retlif Testing Laboratories

Report No. R-6458N-3

Test Photographs
Spurious Radiated Emissions, 30 MHz to 25 GHz



EUT Configuration



Retlif Testing Laboratories

Report No. R-6458N-3

Test Photographs
Spurious Radiated Emissions, 30 MHz to 25 GHz



Horizontal Polarization, 30 to 200 MHz



Vertical Polarization, 30 to 200 MHz



Retlif Testing Laboratories

Report No. R-6458N-3

Test Photographs
Spurious Radiated Emissions, 30 MHz to 25 GHz



Horizontal Polarization, 200 MHz to 1 GHz

Vertical Polarization, 200 MHz to 1 GHz



Retlif Testing Laboratories

Report No. R-6458N-3

Test Photographs
Spurious Radiated Emissions, 30 MHz to 25 GHz



Horizontal Polarization, 1 to 18 GHz



Vertical Polarization, 1 to 18 GHz



Retlif Testing Laboratories

Report No. R-6458N-3

Test Photographs
Spurious Radiated Emissions, 30 MHz to 25 GHz



Horizontal Polarization, 18 to 25 GHz



Vertical Polarization, 18 to 25 GHz



Retlif Testing Laboratories

Report No. R-6458N-3

**FCC Part 15, Subpart B, Section 15.209(a)
Spurious Radiated Emissions, 30 MHz to 25 GHz
Test Data**



Retlif Testing Laboratories

Report No. R-6458N-3

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Immedia Semiconductor LLC	
Job Number	R-6458N-3	
Test Sample	Outdoor XT2 Blink Camera Module	
Model Number	BCM00201U	
Serial Number	807-000-302	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Streaming video to laptop	
Technician	M. Seamans	
Date	December 4 th , 2019	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading		Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m		uV/m	uV/m
37.50	-	-	-	-		-	100.00
	38.00	7.05	12.35	19.40	*	9.33	
38.25	-	-	-	-		-	100.00
73.00	-	-	-	-		-	100.00
	74.00	14.77	8.63	23.40	*	14.79	
74.60	-	-	-	-		-	100.00
74.80	-	-	-	-		-	100.00
	75.00	11.40	8.60	20.00	*	10.00	
75.20	-	-	-	-		-	100.00
108.00	-	-	-	-		-	150.00
	115.00	5.34	14.56	19.90	*	9.89	
	-	-	-	-		-	
121.94	-	-	-	-		-	150.00
123.00	-	-	-	-		-	150.00
	130.00	6.43	14.67	21.10	*	11.35	
	-	-	-	-		-	
138.00	-	-	-	-		-	150.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum. * This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).



Retlif Testing Laboratories

Report No. R-6458N-3

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Immedia Semiconductor LLC	
Job Number	R-6458N-3	
Test Sample	Outdoor XT2 Blink Camera Module	
Model Number	BCM00201U	
Serial Number	807-000-302	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Streaming video to laptop	
Technician	M. Seamans	
Date	December 4 th , 2019	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
149.90	-	-	-	-			-	150.00
	150.00	8.03	14.37	22.40	*		13.18	
150.05	-	-	-	-			-	150.00
156.52	-	-	-	-			-	150.00
	156.52	7.43	15.27	22.70	*		13.65	
156.52	-	-	-	-			-	150.00
156.70	-	-	-	-			-	150.00
	156.80	7.39	15.31	22.70	*		13.65	
156.90	-	-	-	-			-	150.00
162.01	-	-	-	-			-	150.00
	165.00	6.80	16.50	23.30	*		14.62	
167.17	-	-	-	-			-	150.00
167.72	-	-	-	-			-	150.00
	170.00	13.34	17.26	30.60	*		33.88	
173.20	-	-	-	-			-	150.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum. * This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).



Retlif Testing Laboratories

Report No. R-6458N-3

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Immedia Semiconductor LLC	
Job Number	R-6458N-3	
Test Sample	Outdoor XT2 Blink Camera Module	
Model Number	BCM00201U	
Serial Number	807-000-302	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Streaming video to laptop	
Technician	M. Seamans	
Date	December 4 th , 2019	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading		Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m		uV/m	uV/m
240.00	-	-	-	-		-	200.00
	260.00	6.98	15.42	22.40	*	13.18	
285.00	-	-	-	-		-	200.00
322.80	-	-	-	-		-	200.00
	330.00	6.57	17.63	24.20	*	16.22	
335.40	-	-	-	-		-	200.00
399.90	-	-	-	-		-	200.00
	405.00	7.40	19.20	26.60	*	21.38	
410.00	-	-	-	-		-	200.00
608.00	-	-	-	-		-	200.00
	611.00	7.65	23.65	31.30	*	36.73	
614.00	-	-	-	-		-	200.00
960.00	-	-	-	-		-	500.00
	975.00	8.27	29.83	38.10	*	80.35	
1240.00	-	-	-	-		-	500.00
1300.00	-	-	-	-		-	500.00
	1350.00	32.74	-3.49	29.25	*	29.01	
1427.00	-	-	-	-		-	500.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum. * This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).



Retlif Testing Laboratories

Report No. R-6458N-3

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Immedia Semiconductor LLC	
Job Number	R-6458N-3	
Test Sample	Outdoor XT2 Blink Camera Module	
Model Number	BCM00201U	
Serial Number	807-000-302	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Streaming video to laptop	
Technician	M. Seamans	
Date	December 4 th , 2019	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
1435.00	-	-	-	-			-	500.00
	1500.00	33.04	-2.71	30.33	*		32.85	
1646.50	-	-	-	-			-	500.00
1660.00	-	-	-	-			-	500.00
	1680.00	33.87	-1.87	32.00	*		39.81	
1710.00	-	-	-	-			-	500.00
1718.80	-	-	-	-			-	500.00
	1720.00	33.27	-1.70	31.57	*		37.89	
1722.20	-	-	-	-			-	500.00
2200.00	-	-	-	-			-	500.00
	2250.00	32.56	-0.02	32.54	*		42.36	
2300.00	-	-	-	-			-	500.00
2310.00	-	-	-	-			-	500.00
	2360.00	33.56	0.21	33.77	*		48.81	
2390.00	-	-	-	-			-	500.00
2483.50	-	-	-	-			-	500.00
	2490.00	32.52	0.47	32.99	*		44.62	
2500.00	-	-	-	-			-	500.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum. * This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).



Retlif Testing Laboratories

Report No. R-6458N-3

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Immedia Semiconductor LLC	
Job Number	R-6458N-3	
Test Sample	Outdoor XT2 Blink Camera Module	
Model Number	BCM00201U	
Serial Number	807-000-302	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Streaming video to laptop	
Technician	M. Seamans	
Date	December 4 th , 2019	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
2690.00	-	-	-	-			-	500.00
	-	-	-	-			-	
	2750.00	32.74	0.94	33.68	*		48.31	
	-	-	-	-			-	
2900.00	-	-	-	-			-	500.00
3260.00	-	-	-	-			-	500.00
	3263.00	32.34	1.91	34.25	*		51.28	
3267.00	-	-	-	-			-	500.00
3332.00	-	-	-	-			-	500.00
	3336.00	32.29	2.05	34.34	*		52.12	
3339.00	-	-	-	-			-	500.00
3345.00	-	-	-	-			-	500.00
	3350.00	32.50	2.08	34.58	*		53.58	
3358.00	-	-	-	-			-	500.00
3600.00	-	-	-	-			-	500.00
	-	-	-	-			-	
	3700.00	31.78	2.73	34.51	*		53.15	
	-	-	-	-			-	

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum. * This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).



Retlif Testing Laboratories

Report No. R-6458N-3

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Immedia Semiconductor LLC	
Job Number	R-6458N-3	
Test Sample	Outdoor XT2 Blink Camera Module	
Model Number	BCM00201U	
Serial Number	807-000-302	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Streaming video to laptop	
Technician	M. Seamans	
Date	December 4 th , 2019	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz

TEST PARAMETERS

Restricted Band MHz	Measured Frequency MHz	Meter Reading dBuV	Correction Factor dB	Corrected Reading dBuV/m		Converted Reading uV/m	Limit at 3M uV/m
	-	-	-	-		-	
4400.00	-	-	-	-		-	500.00
4500.00	-	-	-	-		-	500.00
	4800.00	34.90	4.42	39.32	*	92.47	
5150.00	-	-	-	-		-	500.00
5350.00	-	-	-	-		-	500.00
	5400.00	31.30	5.23	36.53	*	67.07	
5460.00	-	-	-	-		-	500.00
7250.00	-	-	-	-		-	500.00
	7440.00	33.35	7.37	40.72	*	108.64	
7750.00	-	-	-	-		-	500.00
8025.00	-	-	-	-		-	500.00
	8300.00	33.09	7.71	40.80	*	109.65	
8500.00	-	-	-	-		-	500.00
9000.00	-	-	-	-		-	500.00
	9100.00	33.53	8.38	41.91	*	124.59	
9200.00	-	-	-	-		-	500.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum. * This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).



Retlif Testing Laboratories

Report No. R-6458N-3

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Immedia Semiconductor LLC	
Job Number	R-6458N-3	
Test Sample	Outdoor XT2 Blink Camera Module	
Model Number	BCM00201U	
Serial Number	807-000-302	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Streaming video to laptop	
Technician	M. Seamans	
Date	December 4 th , 2019	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
9300.00	-	-	-	-			-	500.00
	9400.00	33.67	8.87	42.54	*		133.97	
9500.00	-	-	-	-			-	500.00
10600.00	-	-	-	-			-	500.00
	12200.00	33.93	13.53	47.46	*		236.05	
12700.00	-	-	-	-			-	500.00
13250.00	-	-	-	-			-	500.00
	13300.00	34.65	15.07	49.72	*		306.20	
13400.00	-	-	-	-			-	500.00
14470.00	-	-	-	-			-	500.00
	14490.00	33.84	15.37	49.21	*		288.74	
14500.00	-	-	-	-			-	500.00
15350.00	-	-	-	-			-	500.00
	15800.00	35.36	16.33	51.69	*		384.15	
16200.00	-	-	-	-			-	500.00
17700.00	-	-	-	-			-	500.00
	19240.00	33.90	-4.05	29.85	*		31.08	
21400.00	-	-	-	-			-	500.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum. * This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).



Retlif Testing Laboratories

Report No. R-6458N-3

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Immedia Semiconductor LLC	
Job Number	R-6458N-3	
Test Sample	Outdoor XT2 Blink Camera Module	
Model Number	BCM00201U	
Serial Number	807-000-302	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Streaming video to laptop	
Technician	M. Seamans	
Date	December 4 th , 2019	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz

TEST PARAMETERS

[illegible]

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum. * This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).



Retlif Testing Laboratories

Report No. R-6458N-3

Test Photographs
Conducted Emissions, Power Leads, 150 kHz to 30 MHz



EUT Configuration



Retlif Testing Laboratories

Report No. R-6458N-3



Test Setup



Retlif Testing Laboratories

Report No. R-6458N-3

**FCC Part 15, Subpart B, Section 15.207(a)
Conducted Emissions, Power Leads, 150 kHz to 30 MHz
Test Data**



Retlif Testing Laboratories

Report No. R-6458N-3

EMISSIONS TEST DATA SHEET

Test Specification:	FCC Part 15, Subpart B, Section 15.207(a), Conducted Emissions
Method:	ANSI C63.4, Section 7., AC power-line conducted emission measurements
Job Number/Customer:	R-6458N-3 / Immedia Semiconductor LLC
Test Sample:	Outdoor XT2 Blink Camera Module
Model Number:	BCM00201U
Serial Number:	807-000-302
Operating Mode:	Streaming video to laptop
Technician:	M. Seamans
Date(s):	December 4 th , 2019
Temp/ Relative Humidity:	20.4 °C / 25.0 %
Lead Tested:	120 VAC 60 Hz

Frequency	Lead Tested	Peak Meter Reading	Quasi-Peak Meter Reading	Average Meter Reading	Quasi-Peak Limit	Average Limit
MHz		dBuV	dBuV	dBuV	dBuV	dBuV
0.151	Hot	51.58	42.20	27.00	65.94	55.94
0.170	Neutral	48.69	41.50	27.70	64.96	54.96
0.246	Hot	44.77	35.20	24.00	61.89	51.89
0.193	Neutral	46.42	38.60	22.60	63.91	53.91
0.480	Hot	45.73	44.80	39.20	56.34	46.34
0.481	Neutral	45.73	43.10	37.80	56.32	46.32
0.500	Hot	50.32	47.70	42.40	56	46
0.498	Neutral	52.29	47.10	41.80	56.03	46.03
0.517	Hot	47.68	41.70	35.70	56	46
0.519	Neutral	48.83	38.60	30.70	56	46
1.009	Hot	41.21	34.60	26.50	56	46
0.921	Neutral	41.33	32.60	24.80	56	46

The frequency range was scanned from 0.15 MHz to 30 MHz.

The six highest emissions relative to the limit are presented.

The emissions observed from the EUT do not exceed the specified limits.



Retlif Testing Laboratories

Report No. R-6458N-3