FCC-

TEST REPORT

REPORT NO.: 25278B/1/400F

No. 25278B/1/400F

Date: <u>2001-03-27</u> Page 2 of 10

FCC listed testlab acc. to Section 2.948 of the FCC - Rules

in compliance with the requirements of ANSI C63.4 - 1992

Product : Surfer King -- 49 MHz Receiver

Model : 91211R49

Importer: ECHO TOYS LTD

Manufacturer: ECHO TOYS LTD

Date: <u>2001-03-27</u> Page 3 of 10

TABLE OF CONTENTS

1.	Cover	sheet
----	-------	-------

- 2. Introduction
- 3. Table of Contents
- 4. Laboratory Report
- 5. Summary of Testresults
- 6. Test Equipment List
- 7. Radiated Emission Testprocedure
- 8. Interference Radiation (Datasheet)
- 9. Cohere Plot at Fundamental Frequency
- 10. Notes for Radiation Measurement (acc. to ANSI C63.4 1992)

No. 25278B/1/400F

Date: 2001-03-27

Page 4 of 10

LABORATORY - REPORT

APPLICANT: ECHO TOYS LTD

ADDRESS: 8 A&B, Block 1, Tai Ping Industrial Centre

57 Ting Kok Road

Taipo, NT HONG KONG

DATE OF SAMPLE RECEIVED: 2001-01-19

DATE OF TESTING: 2001-03-27

DESCRIPTION OF SAMPLE:

Product: Surfer King -- 49 MHz Receiver

Manufacturer: ECHO TOYS LTD

Model number: 91211R49

Rating: DC 9V ('AA' Size Battery x 6)

Country of Origin: P.R. CHINA

INVESTIGATIONS Measurements to the relevant clauses of F.C.C. Rules and Regulations

REQUESTED: Part 15 Subpart B – 'Unintentional Radiators'

RESULTS: See the attached test sheets

CONCLUSIONS From the measurement data obtained, the tested sample was considered

to have COMPLIED with the requirements for the relevant clauses of Federal Communications Commission Rules as specified above.

Authorized Signature

No. 25278B/1/400F

Date: 2001-03-27

Page 5 of 10

Summary of Test Results

Interference Radiation:

Test result: O.K.

Test data: See attached data sheet

Interference Voltage:

Test result: N.A.
Test data: N.A.

PHOTOGRAPH OF THE SAMPLE



FCC – Test Report Date: 2001-03-27

No. 25278B/1/400F

Page 6 of 10


TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	Serial No.	Remark		
Test Receiver	Rohde & Schwarz	ESH 3	863497/015	10KHz – 30MHz		
Test Receiver	Rohde & Schwarz	ESVP	860688/022	25MHz – 1,300 MHz		
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127		2 x 10A, 50Ω, 50μH 10KHz-30MHz		
Antenna System	Schwarzbeck	BBA 9106 / UHALP 9107		30MHz – 1000MHz		
Antenna Mast System	Schwarzbeck	AM9104		Max. 4 meters height		
Spectrum Analyzer with Q. Peak	Tektronix	2712	B023006	9KHz – 1.8GHz		
Interface for Spectrum 2712	Tektronix	TD3F14A				
Test Receiver	Rohde & Schwarz	ESH 3 892580/006		10KHz – 30MHz		
Test Receiver	Rohde & Schwarz	ESVP	863512/012	25MHz – 1,300 MHz		
Impulse Limiter	Rohde & Schwarz	ESH-3-Z2				
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127		2 x 10A, 50Ω, 50μH 10KHz-30MHz		
Antenna System	Schwarzbeck	BBA 9106 / UHALP 9107		30MHz – 1000MHz		
Signal Generator	Rohde & Schwarz	SWS 2	879113/42	100KHz – 1040 MHz		
Digital Multimeter	Tektronix	DM2510G	DM- 2510GTW105 55	10KHz – 30MHz		
Turntable with Controller	Drehtisch	DT312		ф120 cm		

No. 25278B/1/400F

Date: <u>2001-03-27</u> Page 7 of 10

Radiated Emission Testprocedure

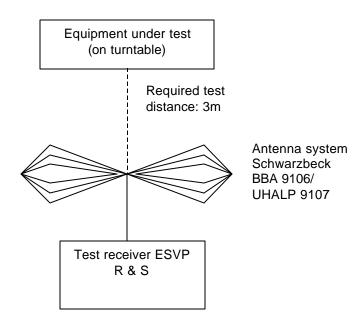

Unintentional Radiators

Measurement of Radiated Emissions (30MHz-1000MHz) Acc: FCC Part 15 Subpart B

IECC Ref: Model: Applicant:	25278B/1/400F 91211R49 ECHO TOYS LTD	Test Equipment Receiver: ESVP Rohde & Schwarz Antenna: Schwarzbeck BBA 9106 and UHALP 9107
Ser.Nr.:	1	
Set under test: Connected sets: Operating mode:	Surfer King - Power "On"	

1. Standby mode

Frequency (MHz)	Н	orz. Reading dB(µV)	Ve	ert. Reading dΒ(μV)	Antenna Factor (dB)	L	loriz. Test Result (μV/m)	•	Vert. Test Result (µV/m)	Limit (µV/m)
42	<	16	<	16	14.0	٧	31.8	٧	31.8	100.0
45	<	16	٧	16	13.1	٧	28.6	٧	28.6	100.0
50.4	<	16	٧	16	11.6	٧	23.9	٧	23.9	100.0
55	<	16	٧	16	10.0	٧	19.9	٧	19.9	100.0
200	<	16	<	16	16.5	٧	42.2	<	42.2	150.0
400	<	16	٧	16	18.3	٧	51.9	٧	51.9	200.0
1000	<	16	<	16	26.5	٧	133.4	<	133.4	500.0

2. Motor running mode (motor noise measurement only)

Frequency (MHz)	Но	orz. Reading dB(µV)	Ve	ert. Reading dB(µV)	Antenna Factor (dB)	Н	loriz. Test Result (µV/m)	•	Vert. Test Result (µV/m)	Limit (μV/m)
30	'	16	<	16	18.4	٧	52.5	<	52.5	100.0
200	٧	16	<	16	16.5	<	42.2	٧	42.2	150.0
400	٧	16	<	16	18.3	<	51.9	٧	51.9	200.0
1000	<	16	<	16	26.5	<	133.4	<	133.4	500.0

Note: A further test was performed with the signal generator set at -60dBm at the fundamental frequency to cohere the emissions as specified in section 12.1.1.1 of ANSI C63.4-1992. All emissions observed complies with the FCC limits (refer to the cohere plot on page 9).

			Date:
	×	O.K.	
Test result:			Operator:

No. 25278B/1/400F

Page 9 of 10


Date: 2001-03-27

Cohere Plot at fundamental frequency

Sample location: Less than 0.5m from the measuring antenna

Applied signal: - 60dBm (non-modulated, 49.86 MHz)

Remark: Self-cohere

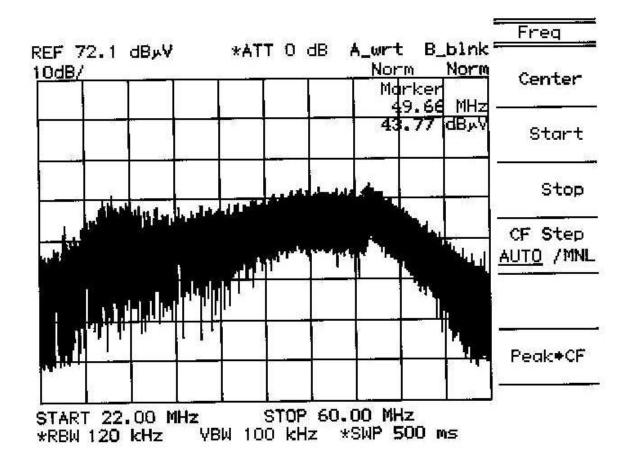

No. 25278B/1/400F

Date: 2001-03-27

Page 10 of 10

Notes for Radiation Measurement

1. Measurement facility:

Measurement facility located at Fanling (Hong Kong), placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules.

2. Distance between the EUT and measuring antenna:

3 meters.

3. Measuring instrumentations:

Rohde & Schwarz ESVP Test Receiver (20 - 1300 MHz) with a CISPR weighting QP detector, 6 dB bandwidth set at 120 KHz.

4. Measuring antenna:

Broad-band antenna for the frequency range 30 - 300 MHz and frequency range 300 - 1000 MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable included in the Antenna Factor for measurement data. The antennas are capable of measuring both horizontal and vertical polarizations.

5. Frequency range scanned:

The frequency range 30 - 1000 MHz has been scanned. Readings of the highest emissions relating to the limit were reported as above.

6. Arrangement of EUT:

During the test, the sample was operated at rated supply voltage and arranged for maximum emissions.

7. Measuring Procedure:

In **accordance** with the relevant sections of the American National Standards Institute (ANSI) C63.4-1992 'Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz'.