

[TestMode: TX b high channel]; [Polarity: Horizontal]


Radiated Emission Measurement

Project No.: REH

Data :#9

2023/5/4

107.0 dBuV/m

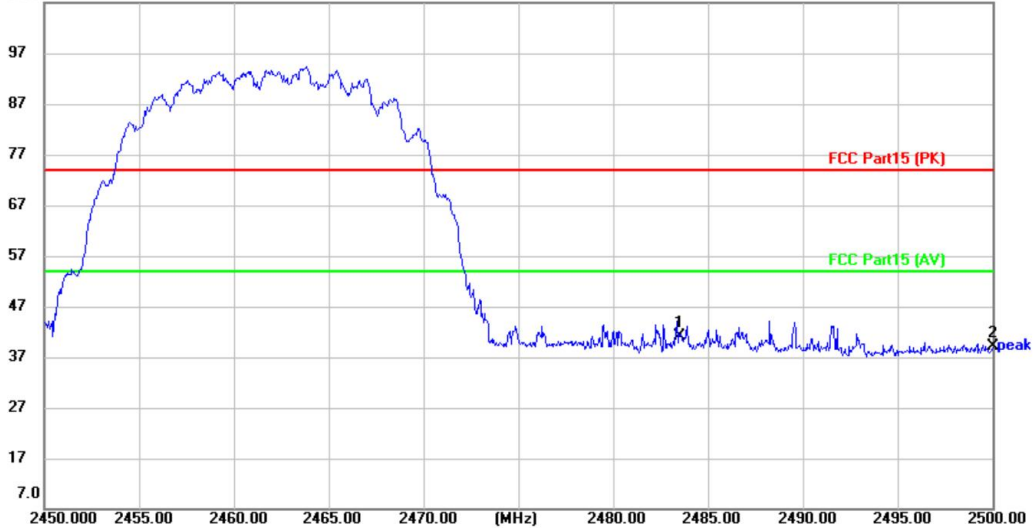

Site

Polarization: **Horizontal**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: LED PC GU10 wifi, 5.5W, 50W EQ, 40

M/N: GU10-5.5-RGB9T/B159/15D/CB

Mode: 2.4GWiFi-11B-TX-H

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	45.01	-3.96	41.05	74.00	-32.95	peak	
2		2500.000	43.18	-4.00	39.18	74.00	-34.82	peak	

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Receiver: ESR_1


Spectrum Analyzer:

FSP40

Test Result: Pass

[TestMode: TX g low channel]; [Polarity: Horizontal]

Radiated Emission Measurement

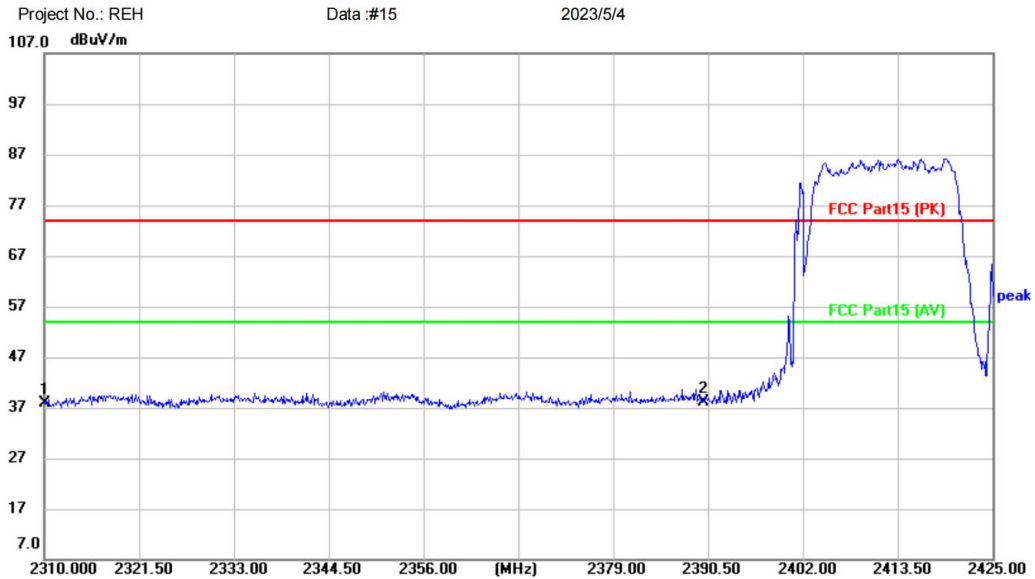

Site Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: LED PC GU10 wifi, 5.5W, 50W EQ, 40
M/N: GU10-5.5-RGB9T/B159/15D/CB
Mode: 2.4GWiFi-11G-TX-L
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	42.20	-4.27	37.93	74.00	-36.07	peak	
2	*	2390.000	41.90	-3.82	38.08	74.00	-35.92	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)


Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass

[TestMode: TX g low channel]; [Polarity: Vertical]

Radiated Emission Measurement

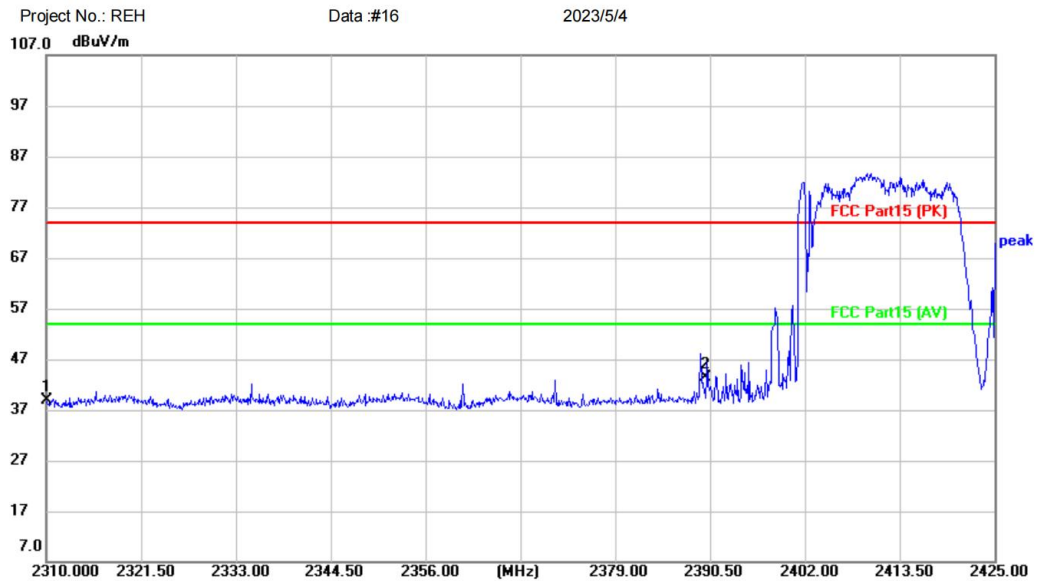

Site Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: LED PC GU10 wifi, 5.5W, 50W EQ, 40
M/N: GU10-5.5-RGB9T/B159/15D/CB
Mode: 2.4GWiFi-11G-TX-L
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	43.26	-4.27	38.99	74.00	-35.01	peak	
2	*	2390.000	47.18	-3.82	43.36	74.00	-30.64	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)


Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass

[TestMode: TX g high channel]; [Polarity: Vertical]

Radiated Emission Measurement

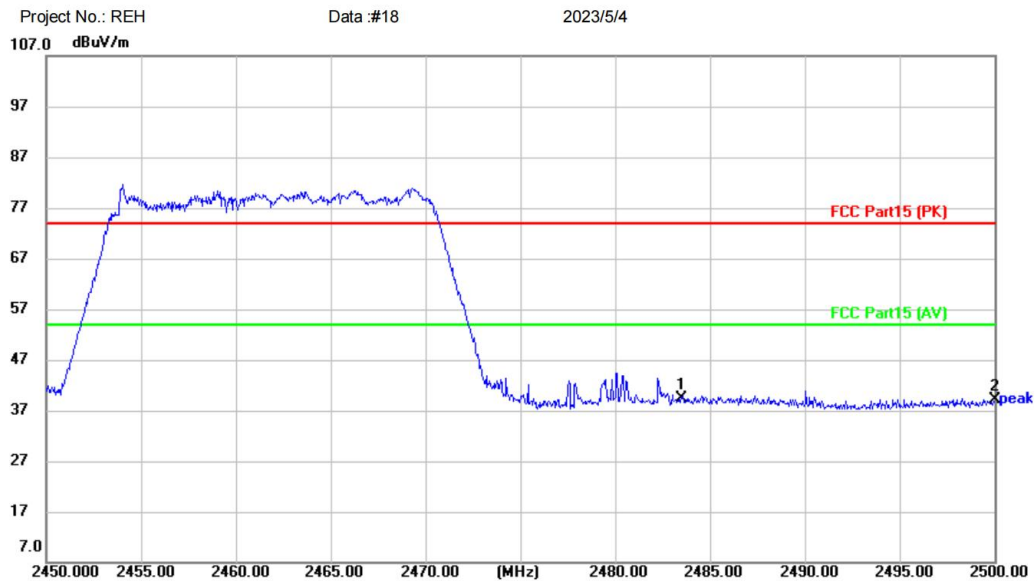

Site Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: LED PC GU10 wifi, 5.5W, 50W EQ, 40
M/N: GU10-5.5-RGB9T/B159/15D/CB
Mode: 2.4GWiFi-11G-TX-H
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	43.26	-3.96	39.30	74.00	-34.70	peak	
2		2500.000	43.24	-4.00	39.24	74.00	-34.76	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)


Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass

[TestMode: TX g high channel]; [Polarity: Horizontal]

Radiated Emission Measurement

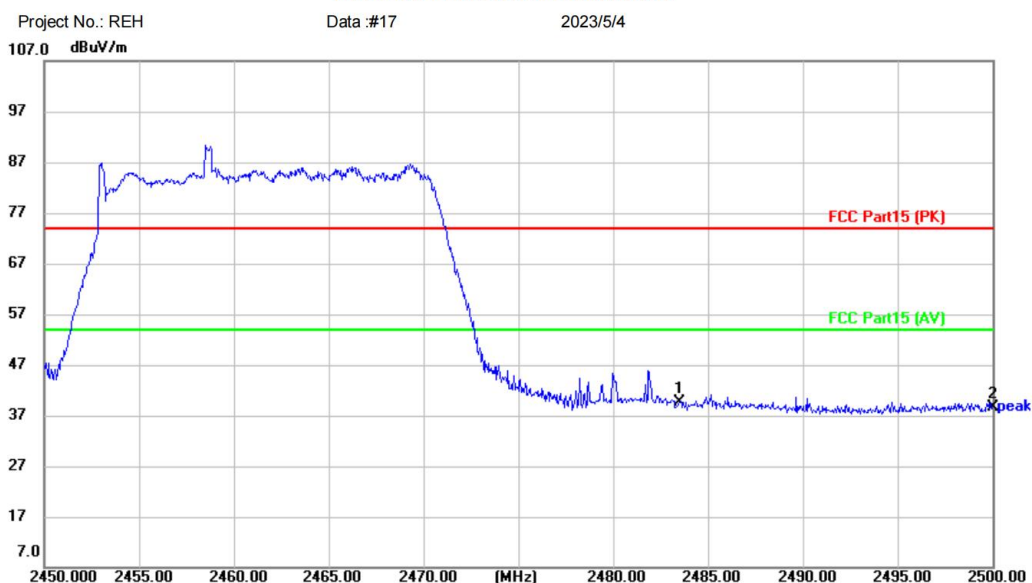

Site Limit: FCC Part15 (PK) Polarization: **Horizontal** Temperature: (C)
Power: Humidity: %RH
EUT: LED PC GU10 wifi, 5.5W, 50W EQ, 40
M/N: GU10-5.5-RGB9T/B159/15D/CB
Mode: 2.4GWiFi-11G-TX-H
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	43.70	-3.96	39.74	74.00	-34.26	peak	
2		2500.000	42.58	-4.00	38.58	74.00	-35.42	peak	

*:Maximum data x:Over limit !:over margin

⟨Reference Only


Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass

[TestMode: TX n20 low channel]; [Polarity: Horizontal]

Radiated Emission Measurement

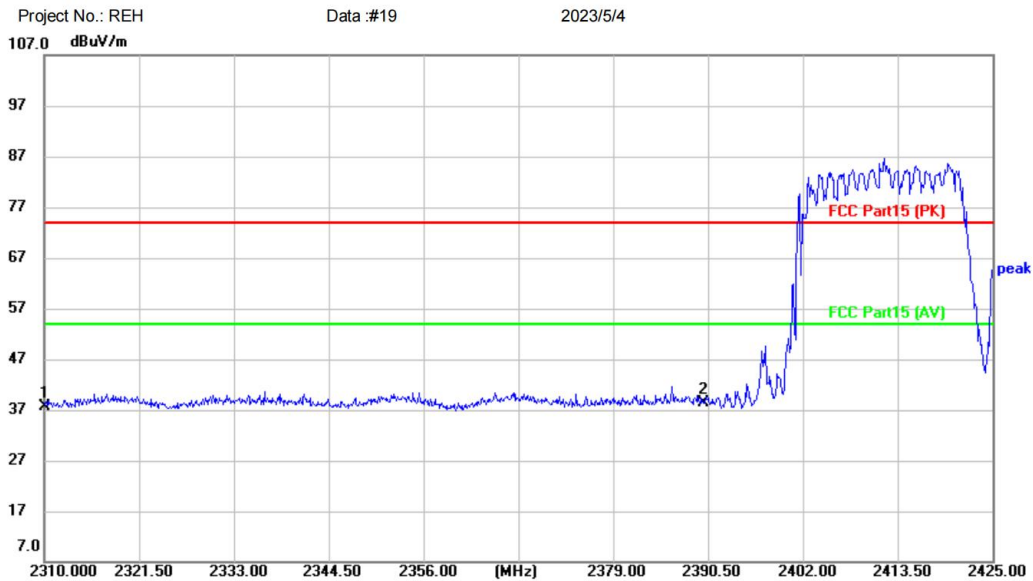

Site Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: LED PC GU10 wifi, 5.5W, 50W EQ, 40
M/N: GU10-5.5-RGB9T/B159/15D/CB
Mode: 2.4GWiFi-11N20-TX-L
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	41.84	-4.27	37.57	74.00	-36.43	peak	
2	*	2390.000	42.11	-3.82	38.29	74.00	-35.71	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)


Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass

[TestMode: TX n20 low channel]; [Polarity: Vertical]

Radiated Emission Measurement

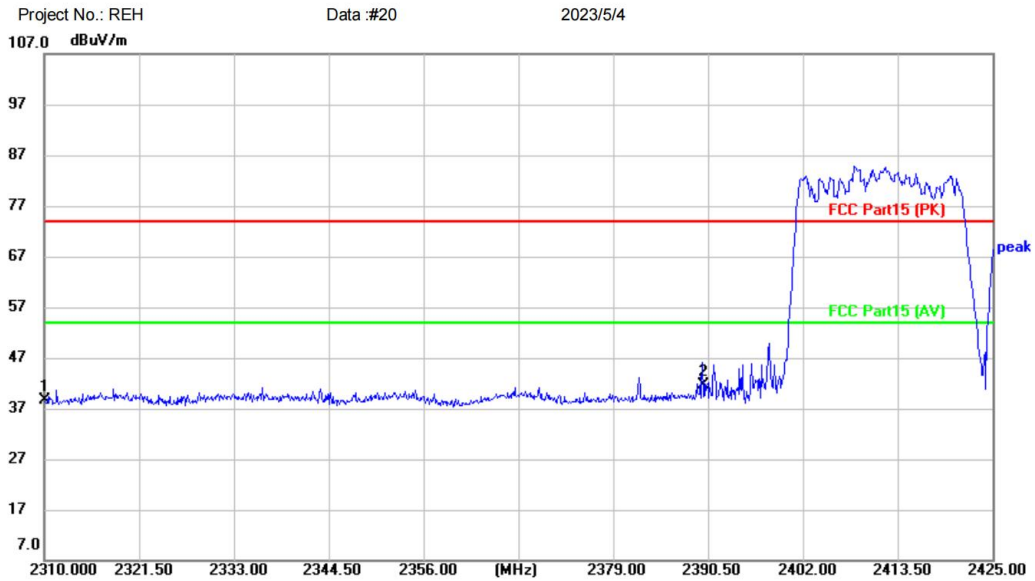

Site Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: LED PC GU10 wifi, 5.5W, 50W EQ, 40
M/N: GU10-5.5-RGB9T/B159/15D/CB
Mode: 2.4GWiFi-11N20-TX-L
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	42.78	-4.27	38.51	74.00	-35.49	peak	
2	*	2390.000	45.44	-3.82	41.62	74.00	-32.38	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass

[TestMode: TX n20 high channel]; [Polarity: Vertical]


Radiated Emission Measurement

Project No.: REH

Data :#22

2023/5/4

107.0 dBuV/m

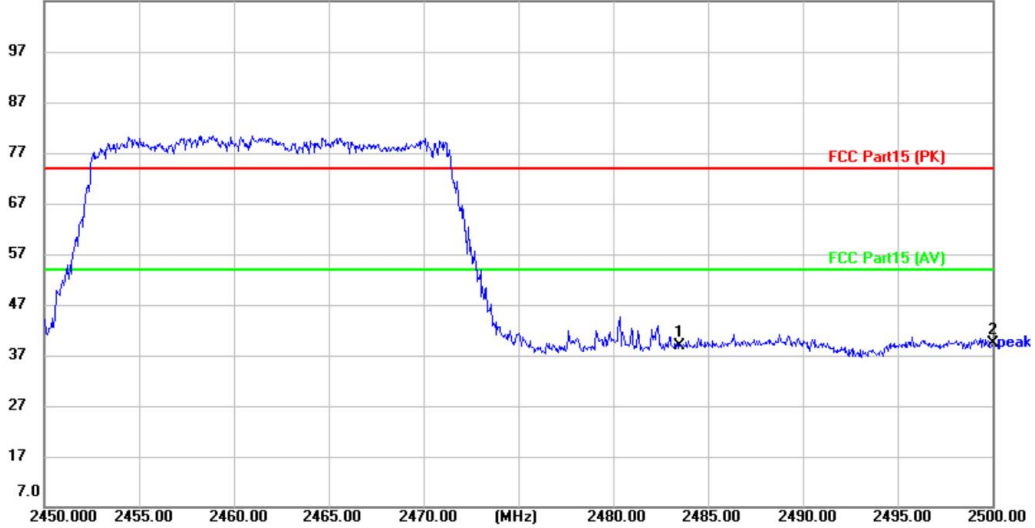

Site

Polarization: **Vertical**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: LED PC GU10 wifi, 5.5W, 50W EQ, 40

M/N: GU10-5.5-RGB9T/B159/15D/CB

Mode: 2.4GWiFi-11N20-TX-H

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2483.500	42.74	-3.96	38.78	74.00	-35.22	peak	
2	*	2500.000	43.41	-4.00	39.41	74.00	-34.59	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR_1


Spectrum Analyzer:

FSP40

Test Result: Pass

[TestMode: TX n20 high channel]; [Polarity: Horizontal]

Radiated Emission Measurement

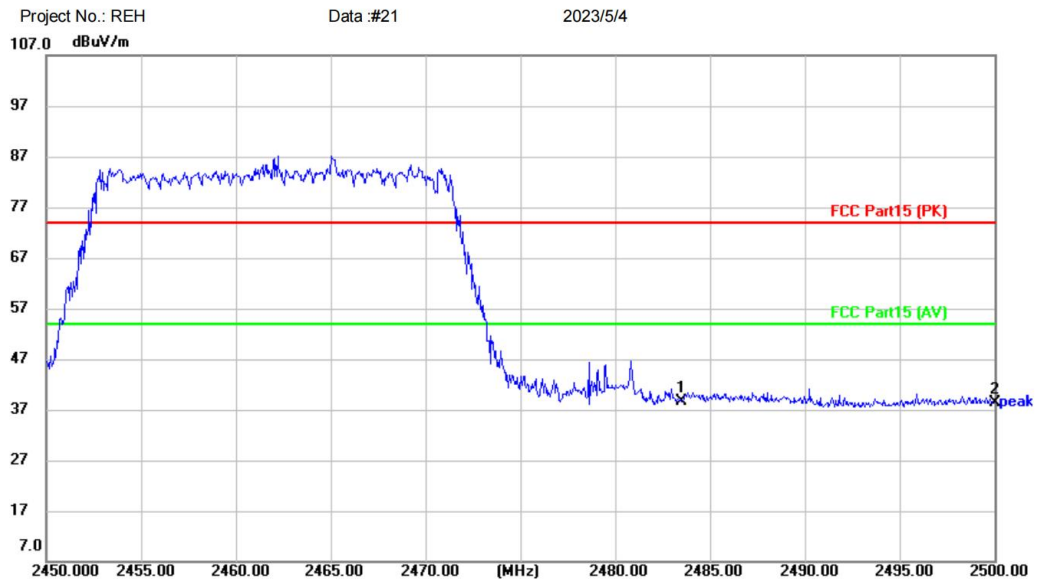

Site Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: LED PC GU10 wifi, 5.5W, 50W EQ, 40
M/N: GU10-5.5-RGB9T/B159/15D/CB
Mode: 2.4GWiFi-11N20-TX-H
Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	42.65	-3.96	38.69	74.00	-35.31	peak	
2		2500.000	42.36	-4.00	38.36	74.00	-35.64	peak	

*:Maximum data x:Over limit !:over margin (Reference Only)
Receiver: ESR_1 Spectrum Analyzer: FSP40

Test Result: Pass

[TestMode: TX n40 low channel]; [Polarity: Horizontal]

Radiated Emission Measurement

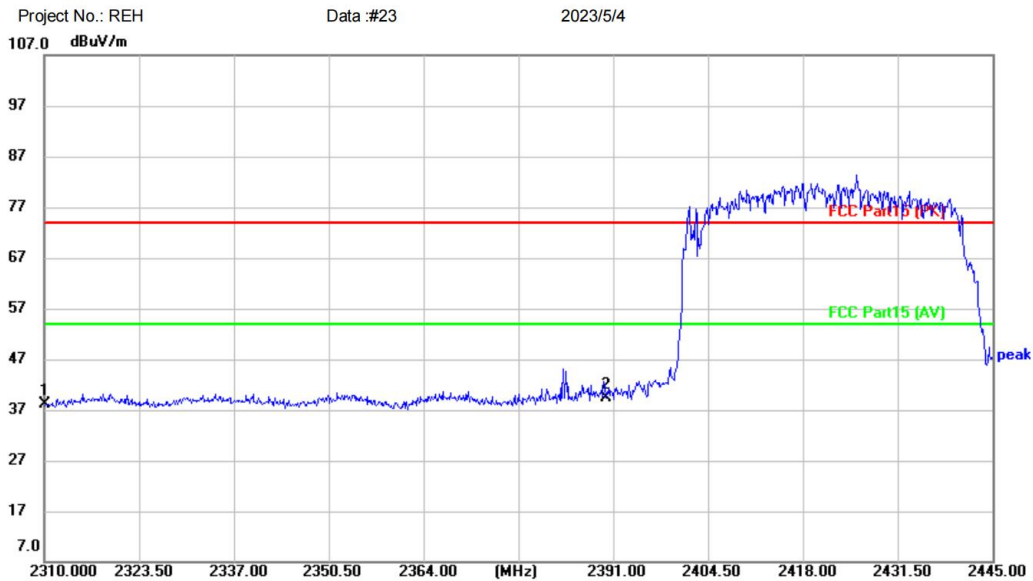

Site Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: LED PC GU10 wifi, 5.5W, 50W EQ, 40
M/N: GU10-5.5-RGB9T/B159/15D/CB
Mode: 2.4GWiFi-11N40-TX-L
Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	42.50	-4.27	38.23	74.00	-35.77	peak	
2	*	2390.000	43.24	-3.82	39.42	74.00	-34.58	peak	

*:Maximum data x:Over limit !:over margin (Reference Only)
Receiver: ESR_1 Spectrum Analyzer: FSP40

Test Result: Pass

[TestMode: TX n40 low channel]; [Polarity: Vertical]

Radiated Emission Measurement

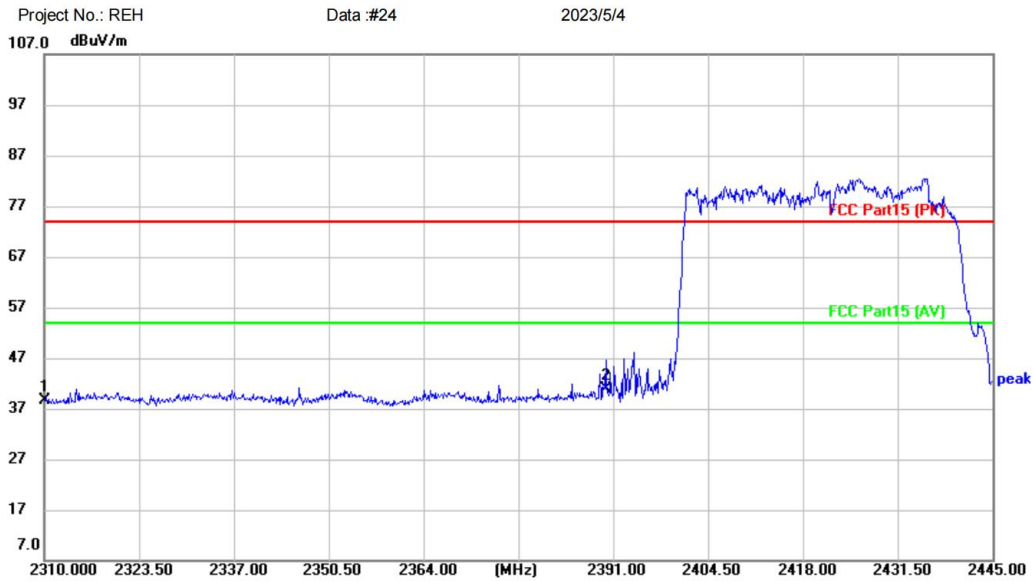

Site Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: LED PC GU10 wifi, 5.5W, 50W EQ, 40
M/N: GU10-5.5-RGB9T/B159/15D/CB
Mode: 2.4GWiFi-11N40-TX-L
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2310.000	42.81	-4.27	38.54	74.00	-35.46	peak	
2	*	2390.000	44.79	-3.82	40.97	74.00	-33.03	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)


Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass

[TestMode: TX n40 high channel]; [Polarity: Vertical]

Radiated Emission Measurement

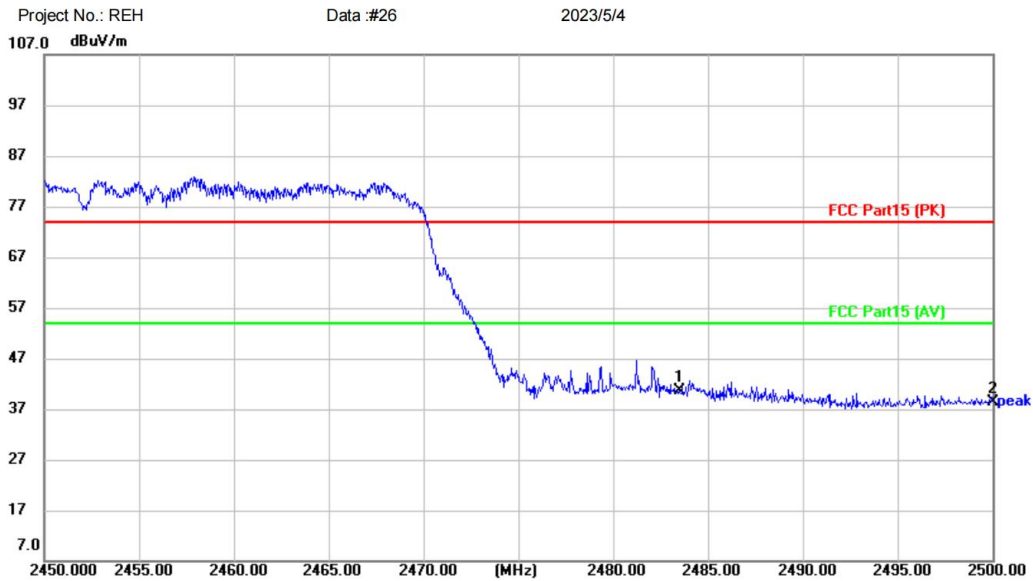

Site Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: LED PC GU10 wifi, 5.5W, 50W EQ, 40
M/N: GU10-5.5-RGB9T/B159/15D/CB
Mode: 2.4GWiFi-11N40-TX-H
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	44.48	-3.96	40.52	74.00	-33.48	peak	
2		2500.000	42.30	-4.00	38.30	74.00	-35.70	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR_1


Spectrum Analyzer:

FSP40

Test Result: Pass

[TestMode: TX n40 high channel]; [Polarity: Horizontal]

Radiated Emission Measurement

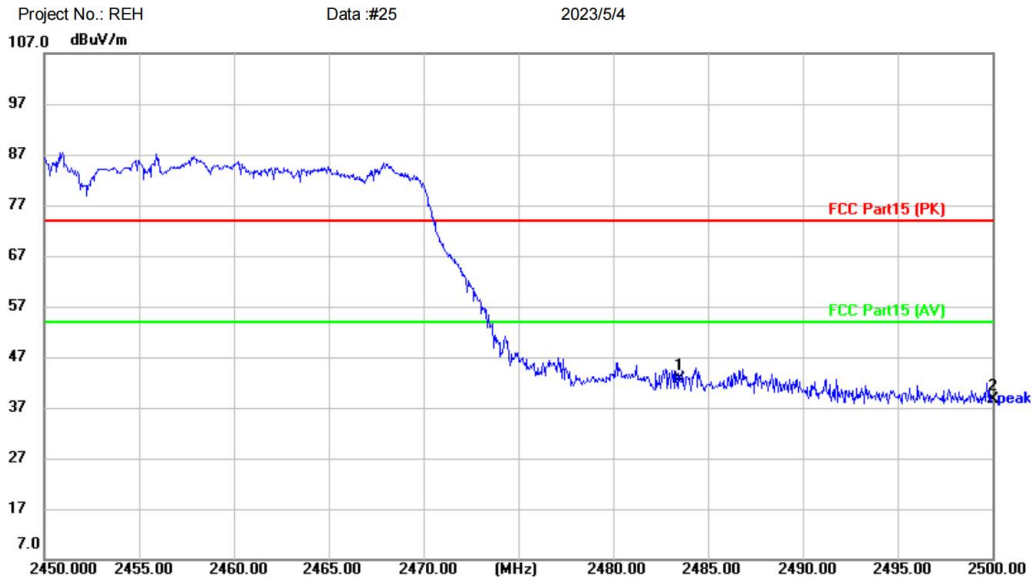

Site Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: LED PC GU10 wifi, 5.5W, 50W EQ, 40
M/N: GU10-5.5-RGB9T/B159/15D/CB
Mode: 2.4GWiFi-11N40-TX-H
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2483.500	46.58	-3.96	42.62	74.00	-31.38	peak	
2		2500.000	42.66	-4.00	38.66	74.00	-35.34	peak	

*:Maximum data x:Over limit !:over margin (Reference Only)
Receiver: ESR_1 Spectrum Analyzer: FSP40

Test Result: Pass

Remark:

1. Final Level = Receiver Read level + Correct factor
2. Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

BlueAsia


13 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

13.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
--------	--

13.2 BLOCK DIAGRAM OF TEST SETUP

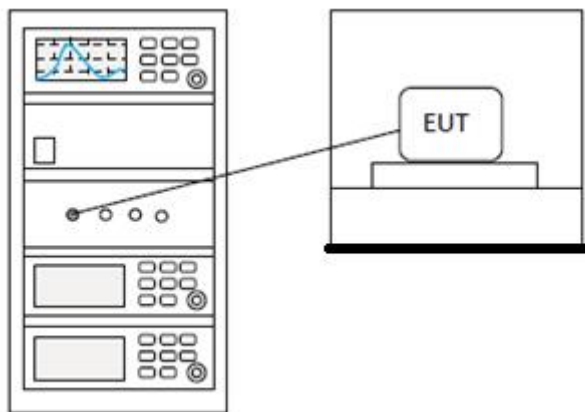

13.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


14 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

14.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
--------	--

14.2 BLOCK DIAGRAM OF TEST SETUP

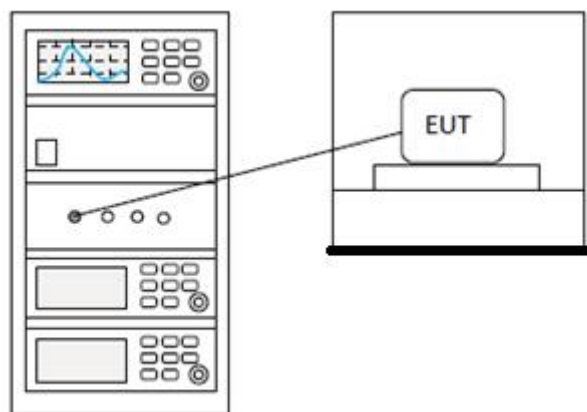

14.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


15 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

15.1 LIMITS

Limit:	≥500 kHz
--------	----------

15.2 BLOCK DIAGRAM OF TEST SETUP

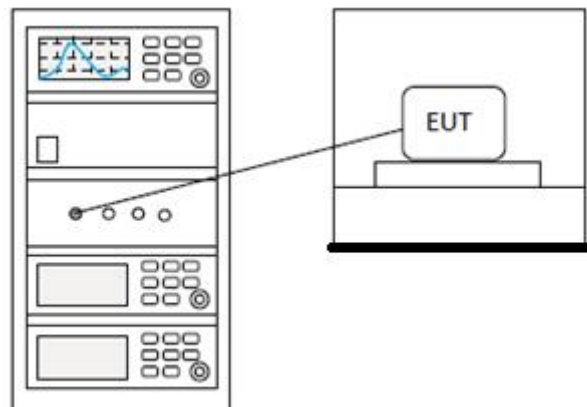

15.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


16 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

16.1 LIMITS

Limit:	≤8dBm in any 3 kHz band during any time interval of continuous transmission
--------	---

16.2 BLOCK DIAGRAM OF TEST SETUP

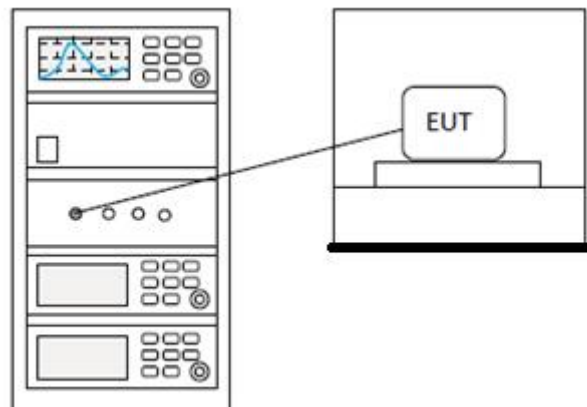

16.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


17 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5 & Section 11.9.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

17.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq \text{hopping channels} < 50$
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

17.2 BLOCK DIAGRAM OF TEST SETUP

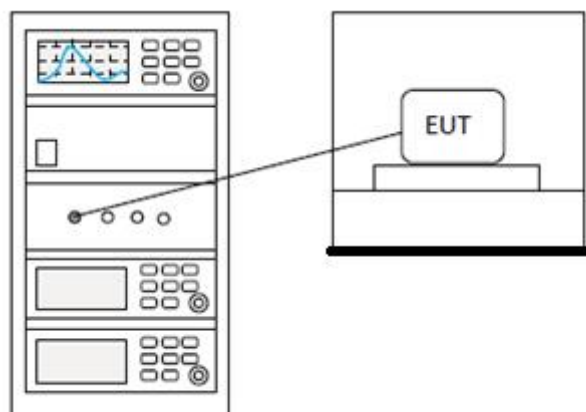

17.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

18 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

18.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

18.2 BLOCK DIAGRAM OF TEST SETUP

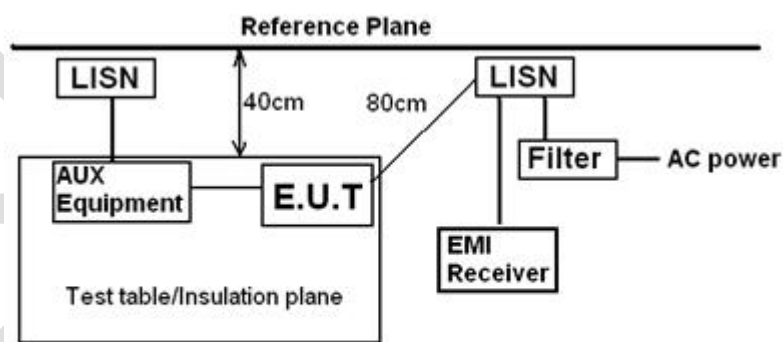

Remark:
E.U.T: Equipment Under Test
LISN: Line Impedance Stabilization Network
Test table height=0.8m

18.3 PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,


4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: $LISN = Read\ Level + Cable\ Loss + LISN\ Factor$

18.4 TEST DATA

[TestMode: Transmitting mode]; [Line: Line] ;[Power:AC120V/60Hz]

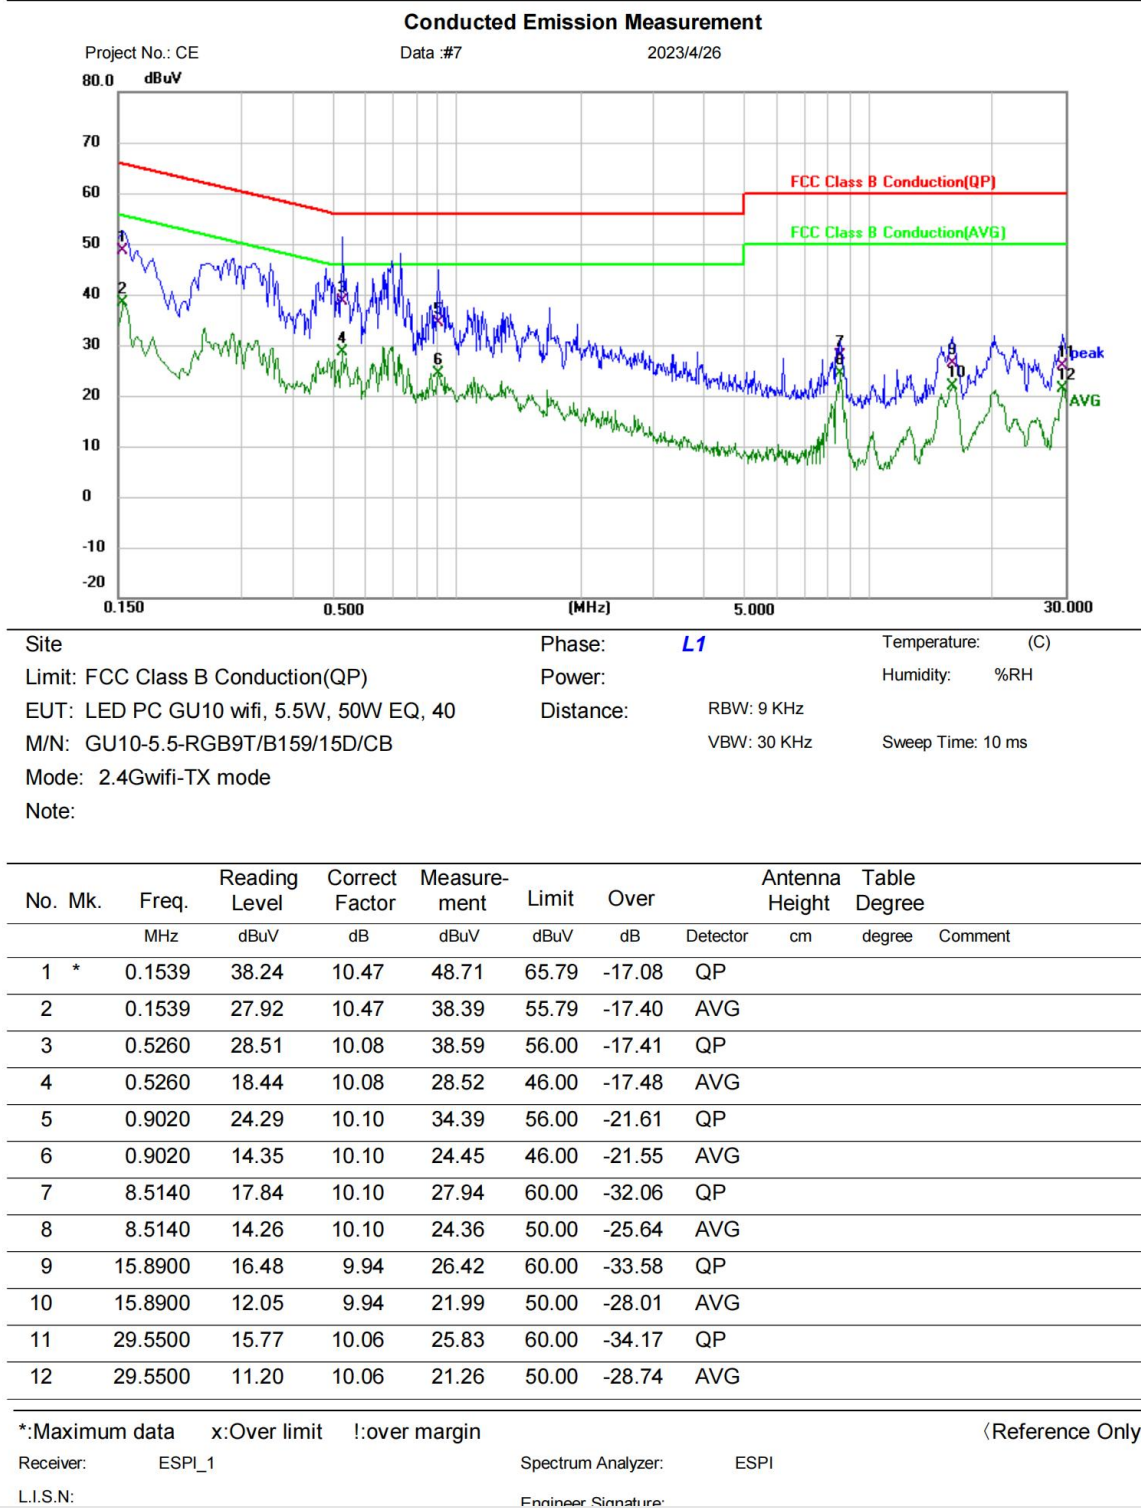

Test Result: Pass

[TestMode: Transmitting mode]; [Line: Neutral] ;[Power:AC120V/60Hz]


Conducted Emission Measurement

Project No.: CE

Data :#8

2023/4/26

80.0 dBuV

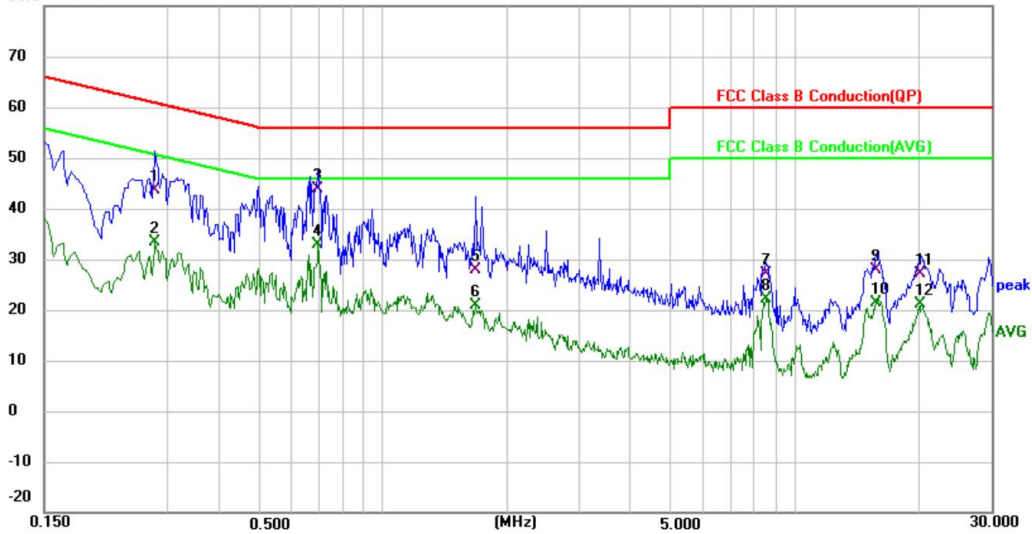

Site

Phase: **N**

Temperature: (C)

Limit: FCC Class B Conduction(QP)

Power:

Humidity: %RH

EUT: LED PC GU10 wifi, 5.5W, 50W EQ, 40

Distance: RBW: 9 KHz

M/N: GU10-5.5-RGB9T/B159/15D/CB

VBW: 30 KHz

Sweep Time: 10 ms

Mode: 2.4Gwifi-TX mode

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV	dBuV	dB	cm	degree	Comment
1		0.2779	33.54	10.07	43.61	60.88	-17.27	QP		
2		0.2779	23.23	10.07	33.30	50.88	-17.58	AVG		
3	*	0.6940	33.88	10.03	43.91	56.00	-12.09	QP		
4		0.6940	22.92	10.03	32.95	46.00	-13.05	AVG		
5		1.6780	17.82	10.08	27.90	56.00	-28.10	QP		
6		1.6780	10.90	10.08	20.98	46.00	-25.02	AVG		
7		8.5140	17.19	9.90	27.09	60.00	-32.91	QP		
8		8.5140	12.31	9.90	22.21	50.00	-27.79	AVG		
9		15.7900	17.84	10.03	27.87	60.00	-32.13	QP		
10		15.7900	11.47	10.03	21.50	50.00	-28.50	AVG		
11		20.2939	17.07	10.00	27.07	60.00	-32.93	QP		
12		20.2939	11.07	10.00	21.07	50.00	-28.93	AVG		

*:Maximum data x:Over limit !:over margin

<Reference Only

Receiver: ESPI_1

Spectrum Analyzer: ESPI

L.I.S.N:

Engineer Signature:

Test Result: Pass

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

BlueAsia


19 APPENDIX

Appendix1


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	11.832	30	Pass
NVNT	b	2437	Ant1	12.358	30	Pass
NVNT	b	2462	Ant1	12.089	30	Pass
NVNT	g	2412	Ant1	8.607	30	Pass
NVNT	g	2437	Ant1	8.231	30	Pass
NVNT	g	2462	Ant1	8.725	30	Pass
NVNT	n20	2412	Ant1	7.895	30	Pass
NVNT	n20	2437	Ant1	7.719	30	Pass
NVNT	n20	2462	Ant1	8.261	30	Pass
NVNT	n40	2422	Ant1	6.428	30	Pass
NVNT	n40	2437	Ant1	6.404	30	Pass
NVNT	n40	2452	Ant1	7.014	30	Pass


Power NVNT b 2412MHz Ant1

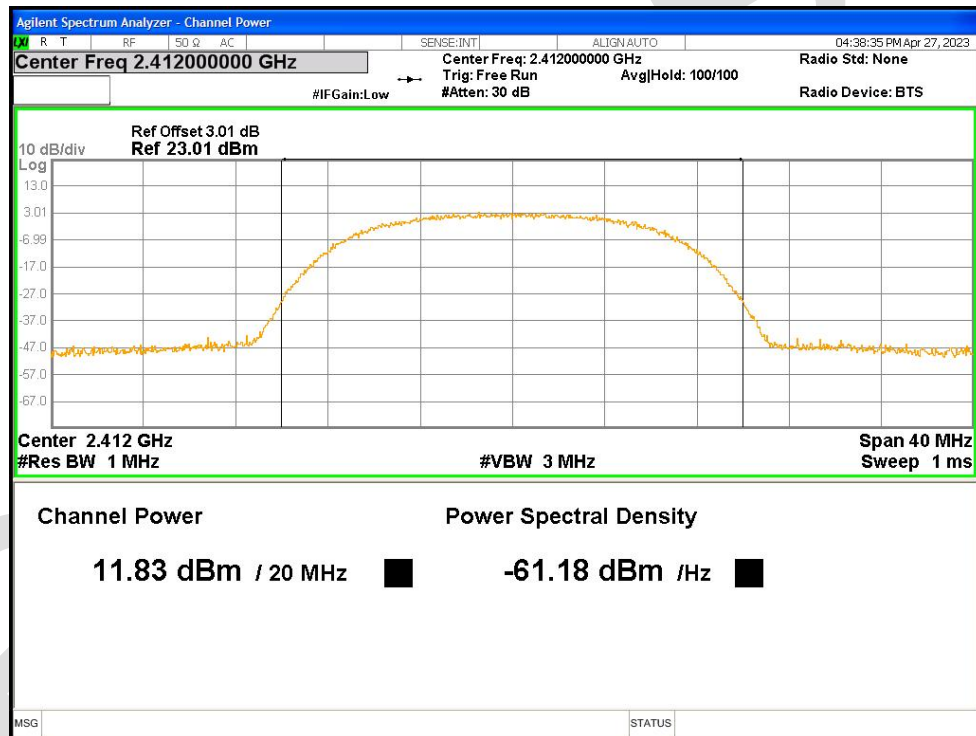


Power NVNT b 2437MHz Ant1

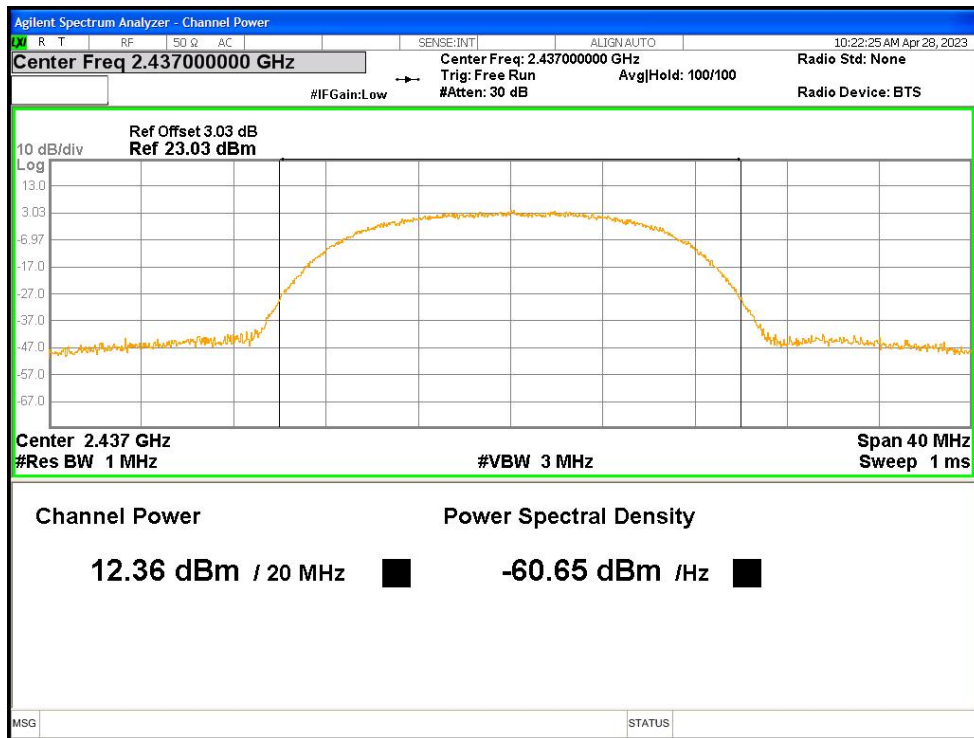


Power NVNT b 2462MHz Ant1

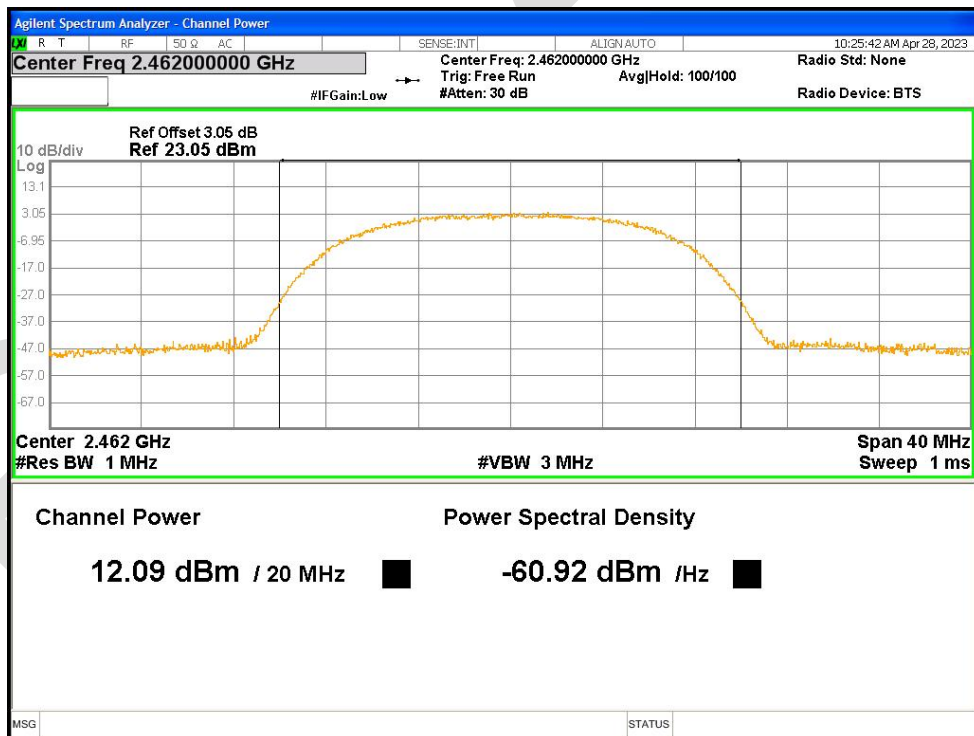


Power NVNT g 2412MHz Ant1

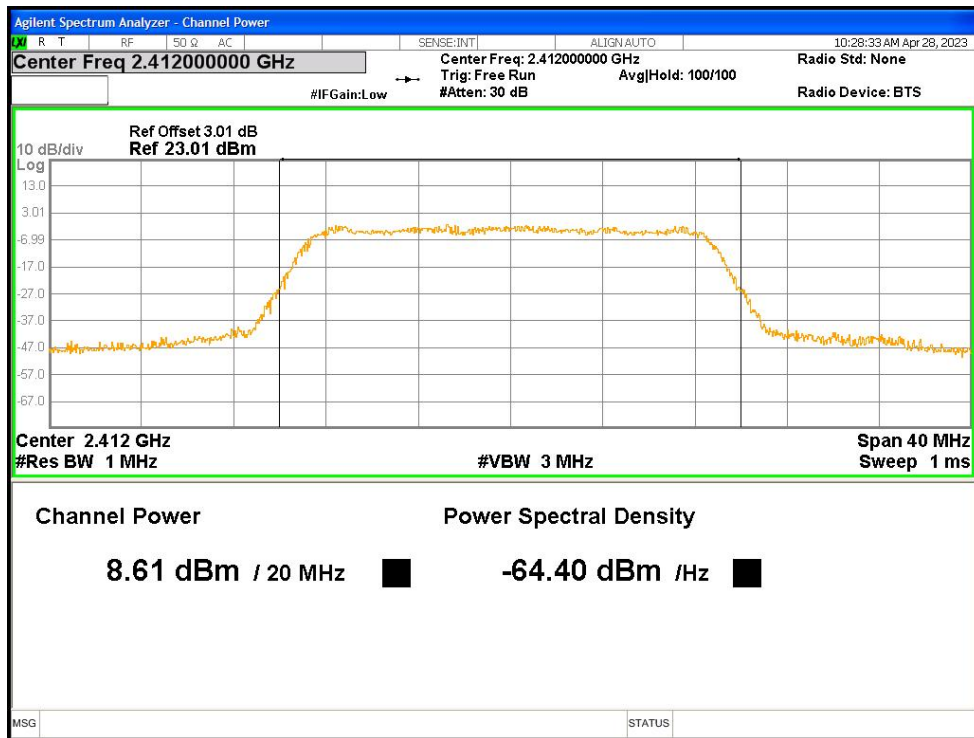


Power NVNT g 2437MHz Ant1

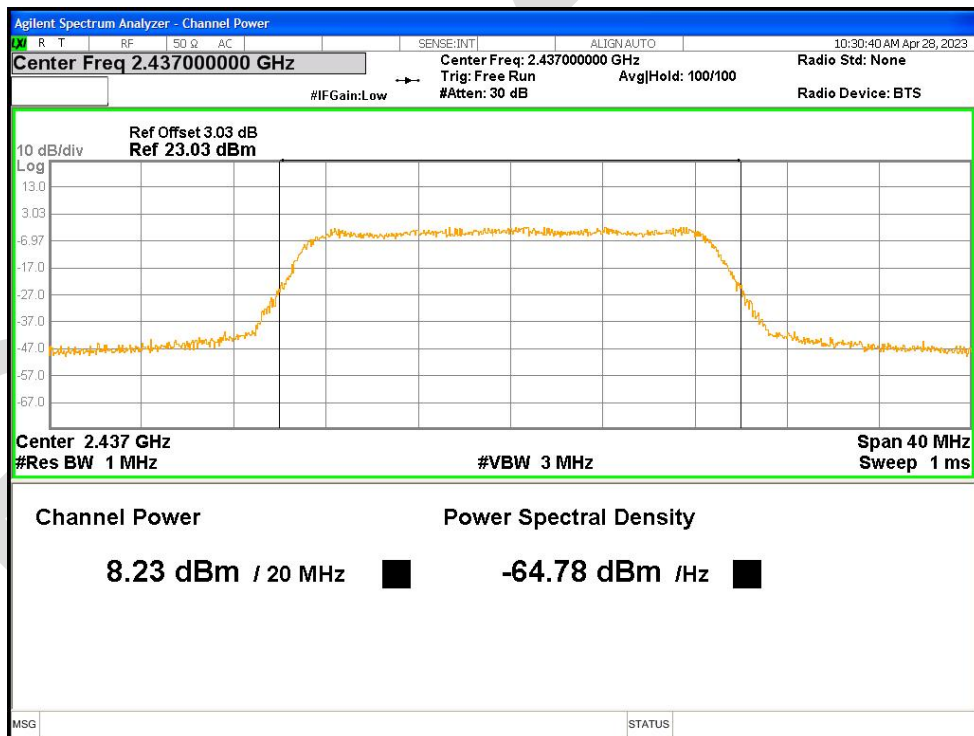


Power NVNT g 2462MHz Ant1

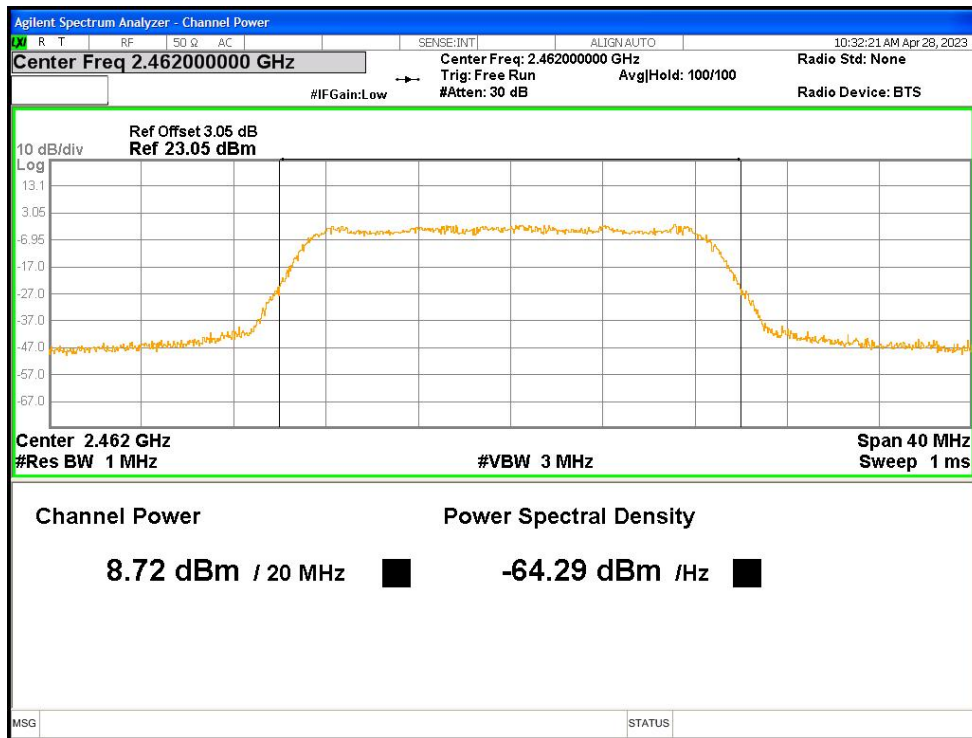


Power NVNT n20 2412MHz Ant1

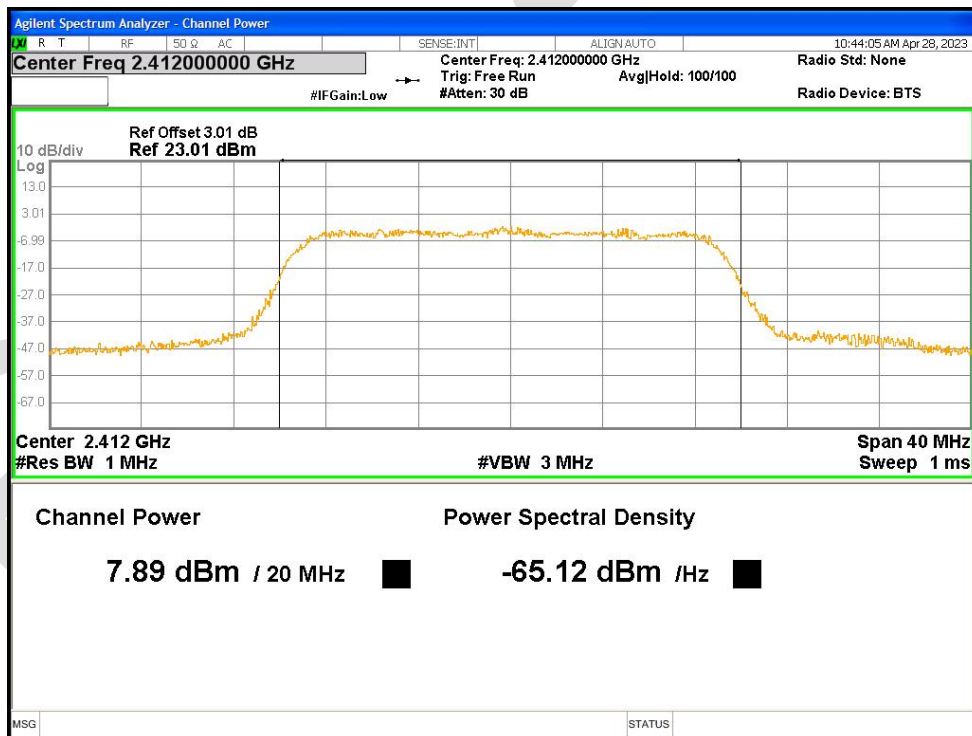

Power NVNT n20 2437MHz Ant1

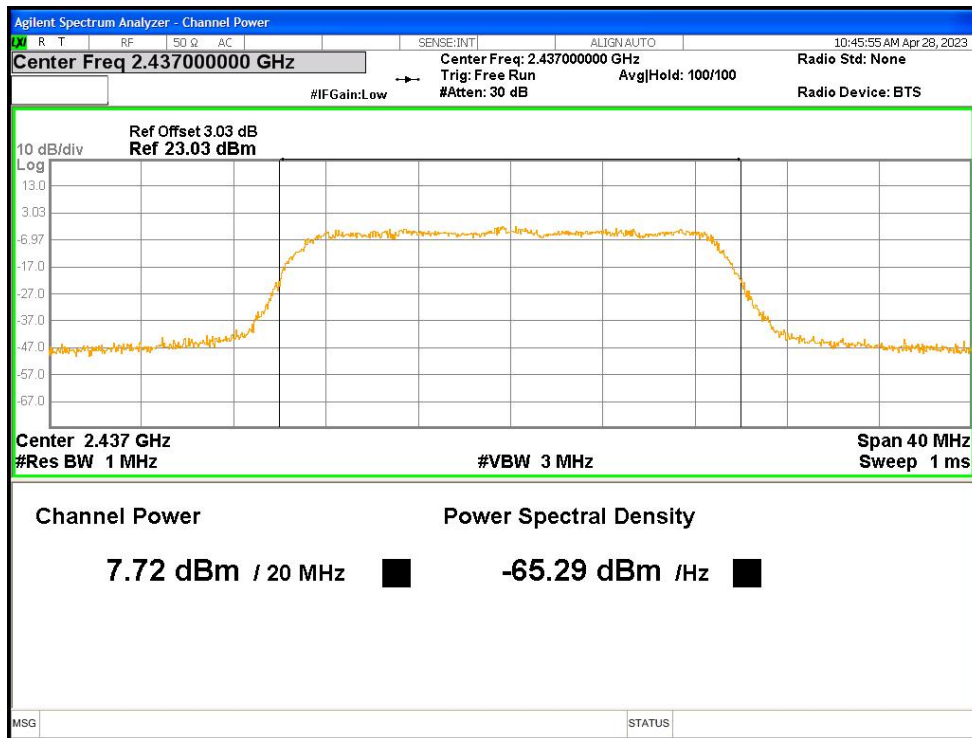

Power NVNT n20 2462MHz Ant1

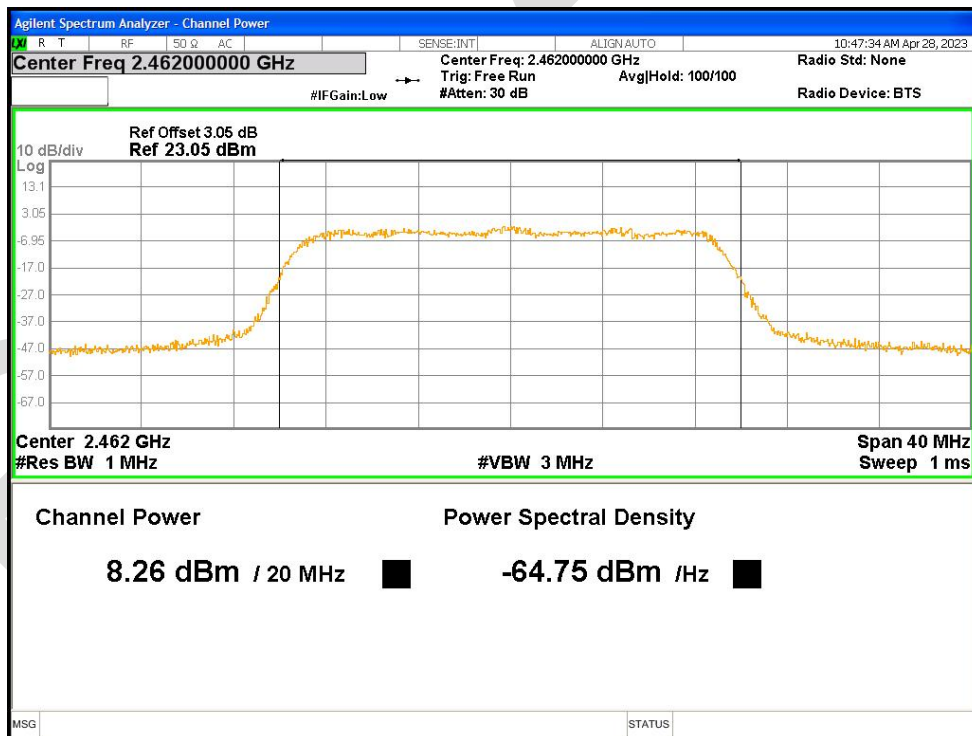

Power NVNT n40 2422MHz Ant1