

Test Laboratory: Compliance Certification Services

1_Lenovo M-Note Metal LCD Cover_WLAN_Gwinette

DUT: Lenovo ; Type: M-note Metal LCD Cover; Serial: n/a

Communication System: CDMA PCS band; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section


Room Ambient Temperature: 23 deg. C; Liquid Temperature: 22 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552 ; ConvF(7.82, 7.82, 7.82); Calibrated: 3/19/2005
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

M-ch_WLAN off/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.057 mW/g

M-ch_WLAN off/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 5.76 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.073 W/kg
SAR(1 g) = 0.047 mW/g; SAR(10 g) = 0.028 mW/g
Maximum value of SAR (measured) = 0.059 mW/g

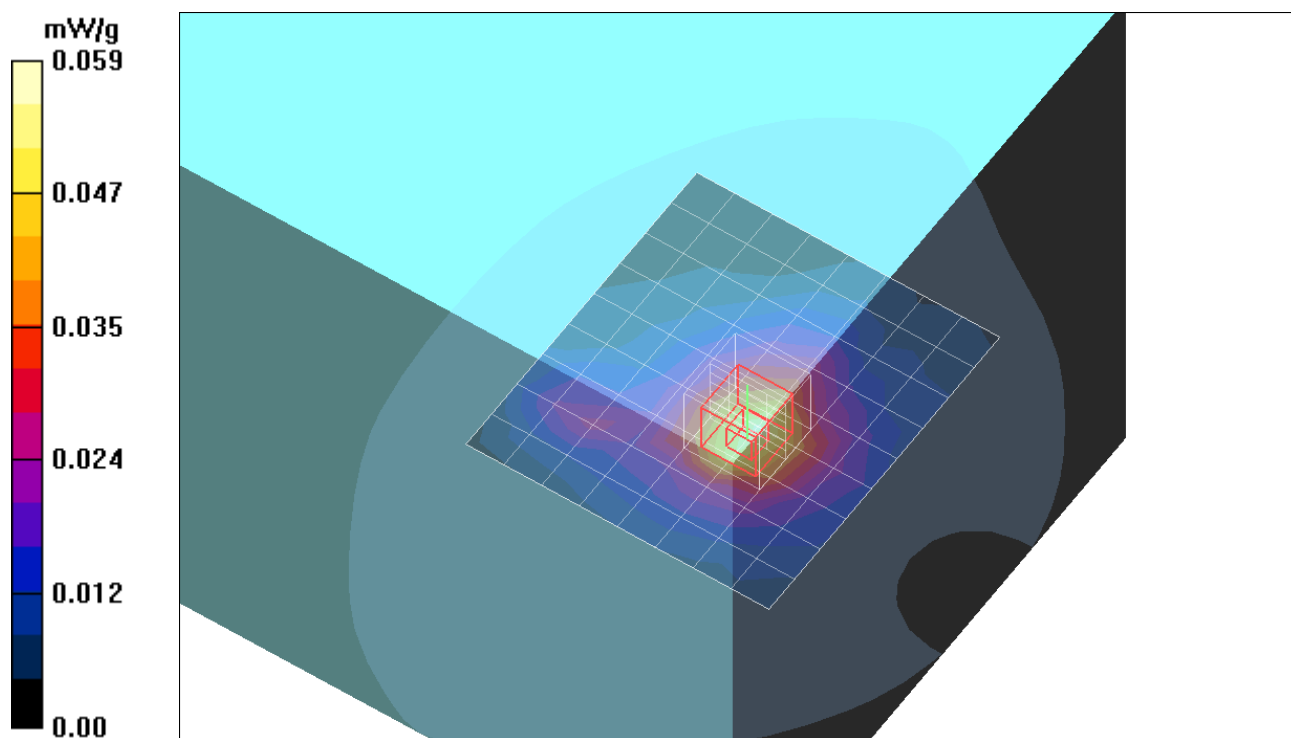

Test Laboratory: Compliance Certification Services

1_Lenovo M-Note Metal LCD Cover_WLAN_Gwinette

DUT: Lenovo ; Type: M-note Metal LCD Cover; Serial: n/a

Communication System: CDMA PCS band; Frequency: 1851.25 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23 deg. C; Liquid Temperature: 22 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552 ; ConvF(7.82, 7.82, 7.82); Calibrated: 3/19/2005
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

L-ch_WLAN on/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.055 mW/g

L-ch_WLAN on/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 6.07 V/m; Power Drift = -0.176 dB

Peak SAR (extrapolated) = 0.078 W/kg

SAR(1 g) = 0.050 mW/g; SAR(10 g) = 0.030 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.063 mW/g

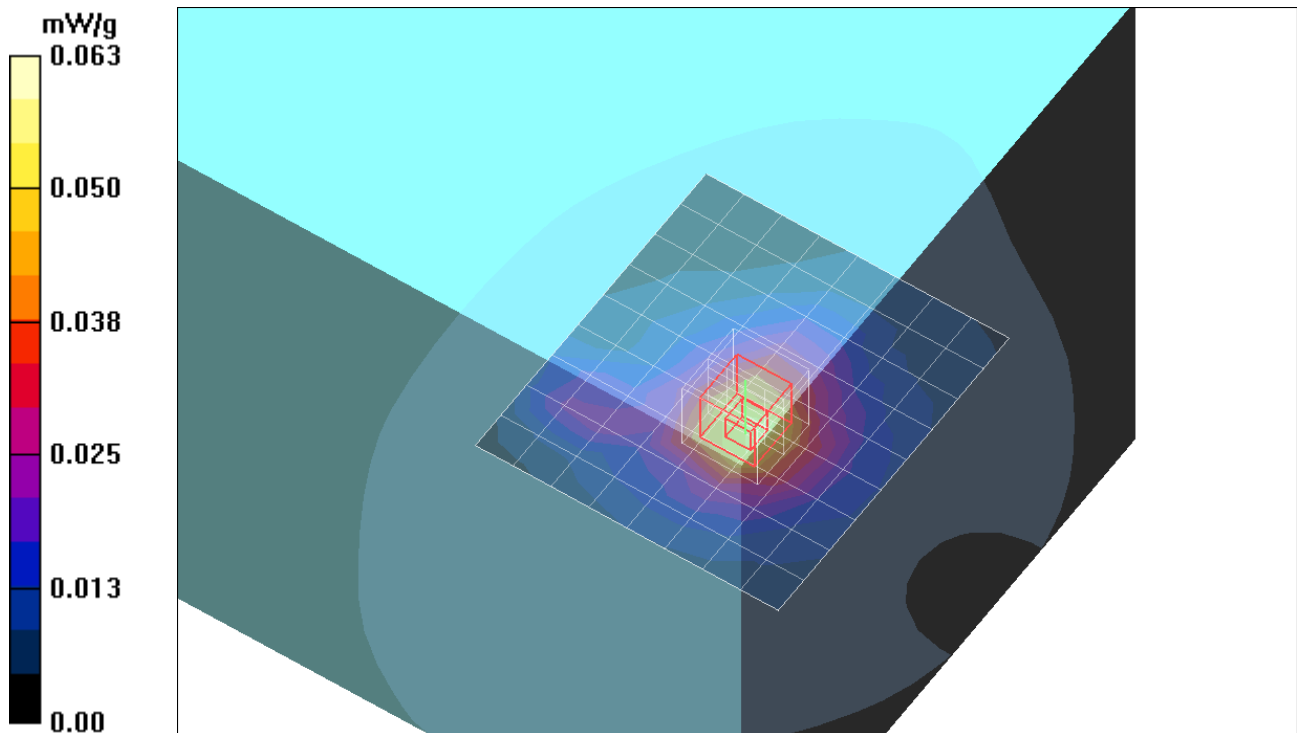

Test Laboratory: Compliance Certification Services

1_Lenovo M-Note Metal LCD Cover_WLAN_Gwinette


DUT: Lenovo ; Type: M-note Metal LCD Cover; Serial: n/a

Communication System: CDMA PCS band; Frequency: 1851.25 MHz;Duty Cycle: 1:1

L-ch_WLAN on/Z Scan (1x1x41): Measurement grid: dx=20mm, dy=20mm, dz=2.5mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.038 mW/g

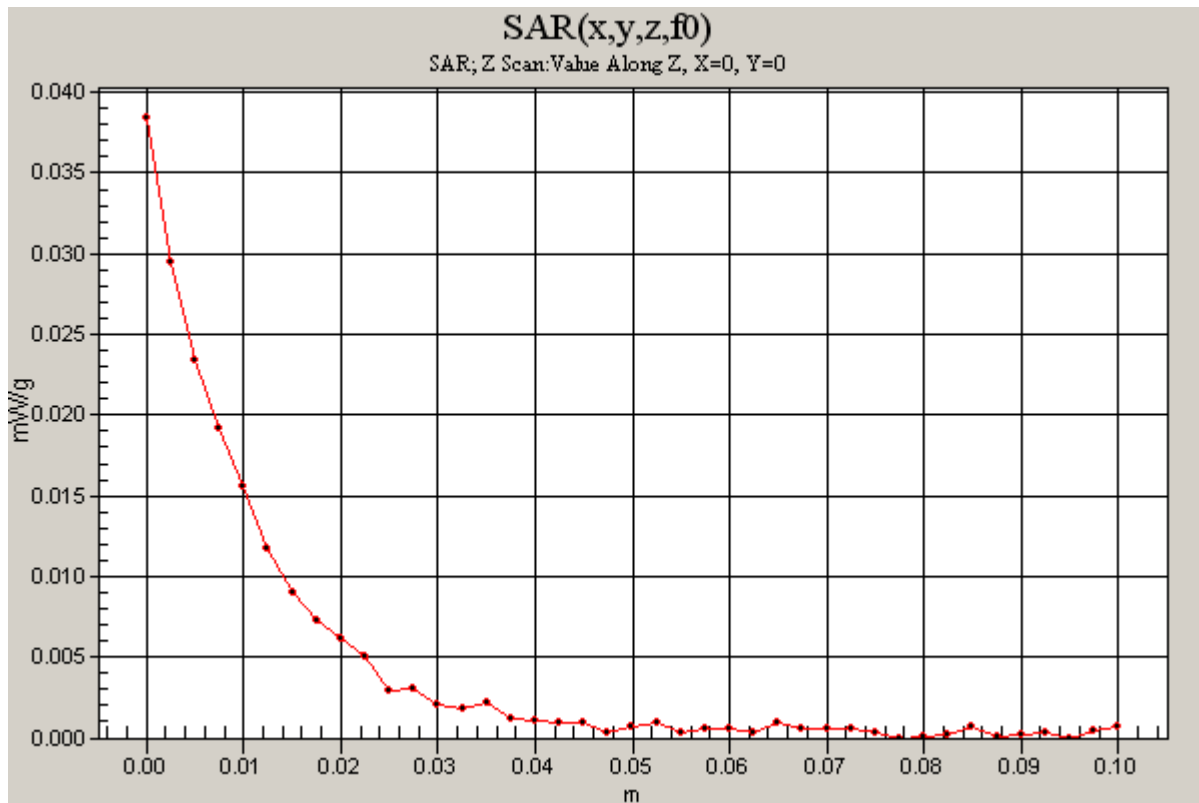

Test Laboratory: Compliance Certification Services

1_Lenovo M-Note Metal LCD Cover_WLAN_Gwinette

DUT: Lenovo ; Type: M-note Metal LCD Cover; Serial: n/a

Communication System: CDMA PCS band; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.53 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Room Ambient Temperature: 23 deg. C; Liquid Temperature: 22 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552 ; ConvF(7.82, 7.82, 7.82); Calibrated: 3/19/2005
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

M-ch_WLAN on/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.056 mW/g


M-ch_WLAN on/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.76 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 0.074 W/kg

SAR(1 g) = 0.047 mW/g; SAR(10 g) = 0.028 mW/g

Maximum value of SAR (measured) = 0.059 mW/g

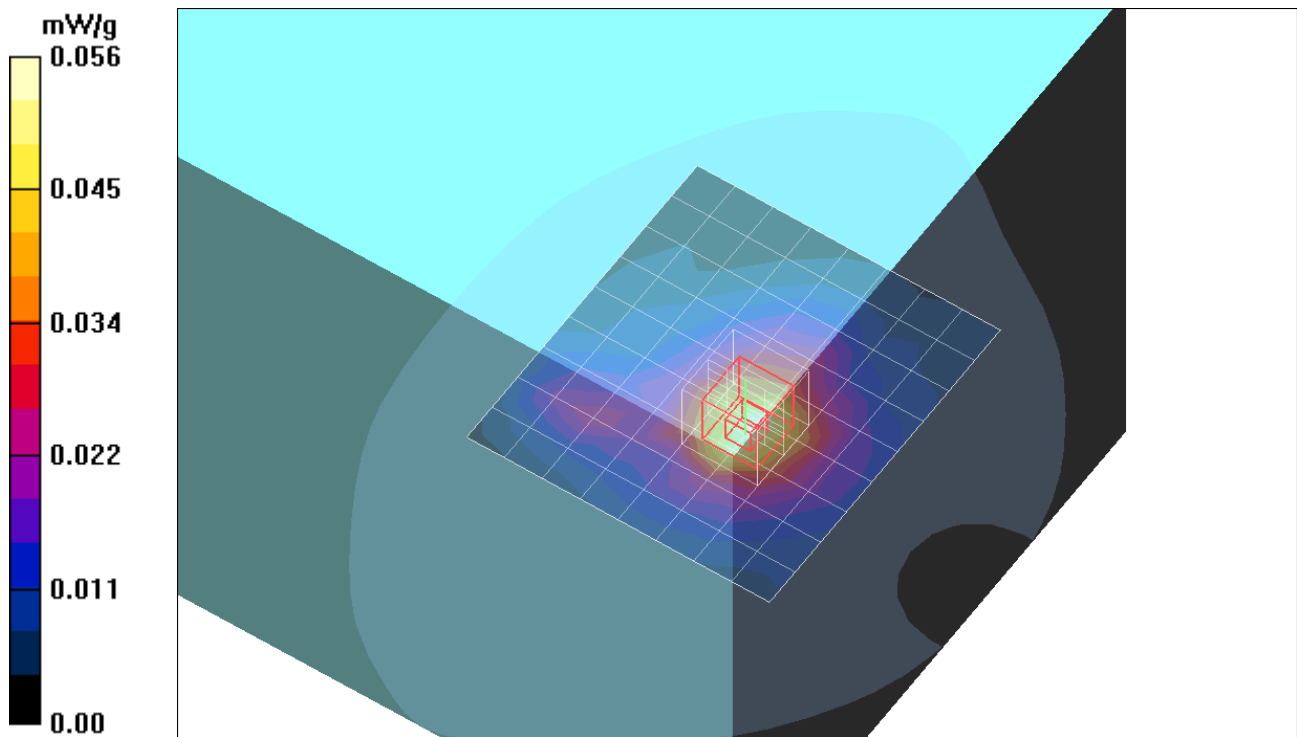

Test Laboratory: Compliance Certification Services

1_Lenovo M-Note Metal LCD Cover_WLAN_Gwinette

DUT: Lenovo ; Type: M-note Metal LCD Cover; Serial: n/a

Communication System: CDMA PCS band; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23 deg. C; Liquid Temperature: 22 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552 ; ConvF(7.82, 7.82, 7.82); Calibrated: 3/19/2005
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

H-ch_WLAN on/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.059 mW/g

H-ch_WLAN on/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 5.80 V/m; Power Drift = -0.133 dB

Peak SAR (extrapolated) = 0.077 W/kg

SAR(1 g) = 0.048 mW/g; SAR(10 g) = 0.029 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.060 mW/g

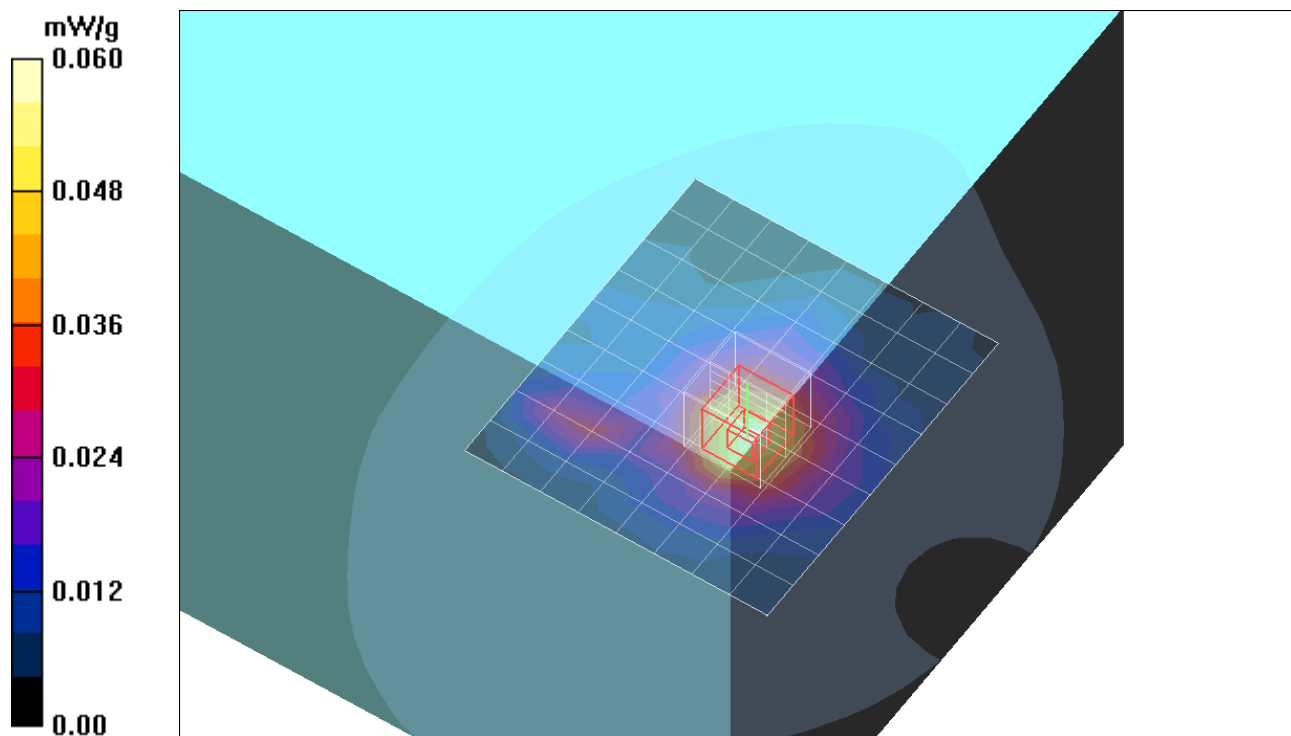

Test Laboratory: Compliance Certification Services

2_Lenovo W-Note Plastic LCD Cover_WLAN_Gwinette

DUT: Lenovo ; Type: M-note Metal LCD Cover; Serial: n/a

Communication System: CDMA PCS band; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.53 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Room Ambient Temperature: 23 deg. C; Liquid Temperature: 22 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552 ; ConvF(7.82, 7.82, 7.82); Calibrated: 3/19/2005
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

M-ch_WLAN off/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.043 mW/g


M-ch_WLAN off/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.49 V/m; Power Drift = -0.143 dB

Peak SAR (extrapolated) = 0.060 W/kg

SAR(1 g) = 0.038 mW/g; SAR(10 g) = 0.024 mW/g

Maximum value of SAR (measured) = 0.048 mW/g

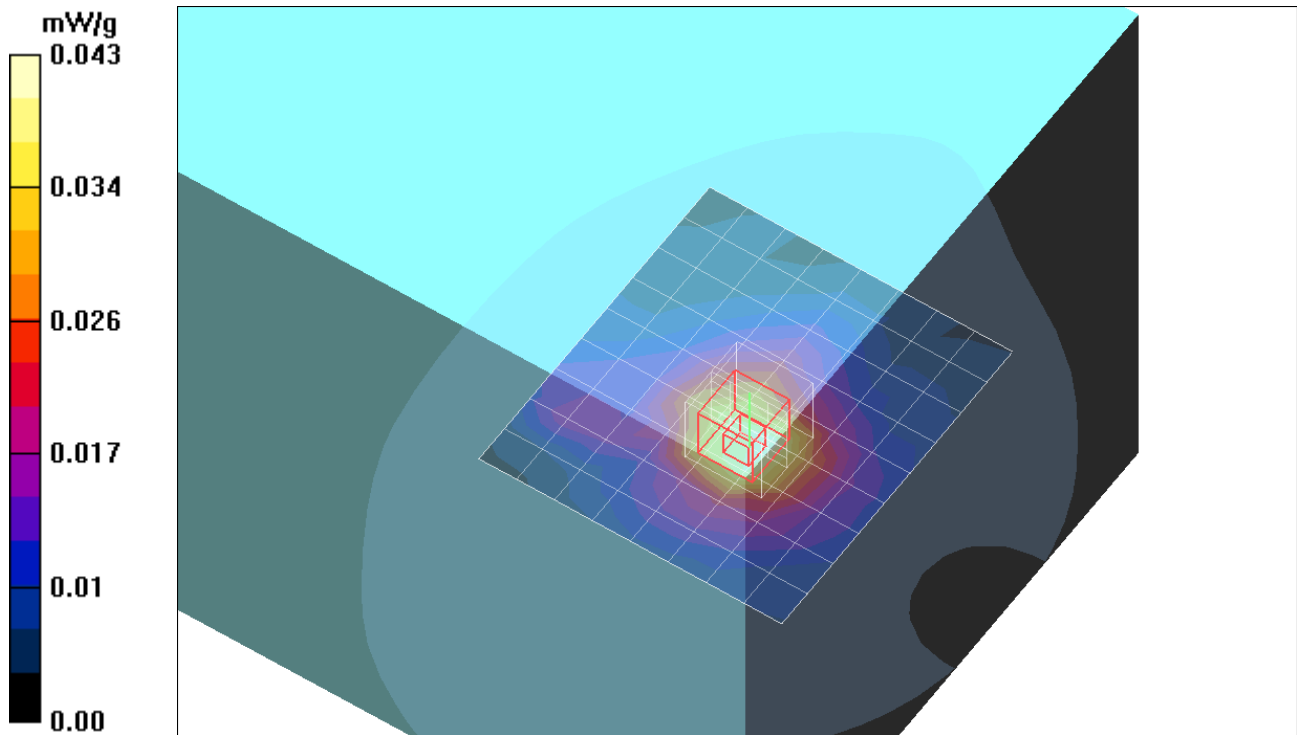

Test Laboratory: Compliance Certification Services

2_Lenovo W-Note Plastic LCD Cover_WLAN_Gwinette

DUT: Lenovo ; Type: M-note Metal LCD Cover; Serial: n/a

Communication System: CDMA PCS band; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.53 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Room Ambient Temperature: 23 deg. C; Liquid Temperature: 22 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552 ; ConvF(7.82, 7.82, 7.82); Calibrated: 3/19/2005
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

M-ch_WLAN on/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.042 mW/g


M-ch_WLAN on/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.43 V/m; Power Drift = -0.138 dB

Peak SAR (extrapolated) = 0.062 W/kg

SAR(1 g) = 0.038 mW/g; SAR(10 g) = 0.023 mW/g

Maximum value of SAR (measured) = 0.047 mW/g

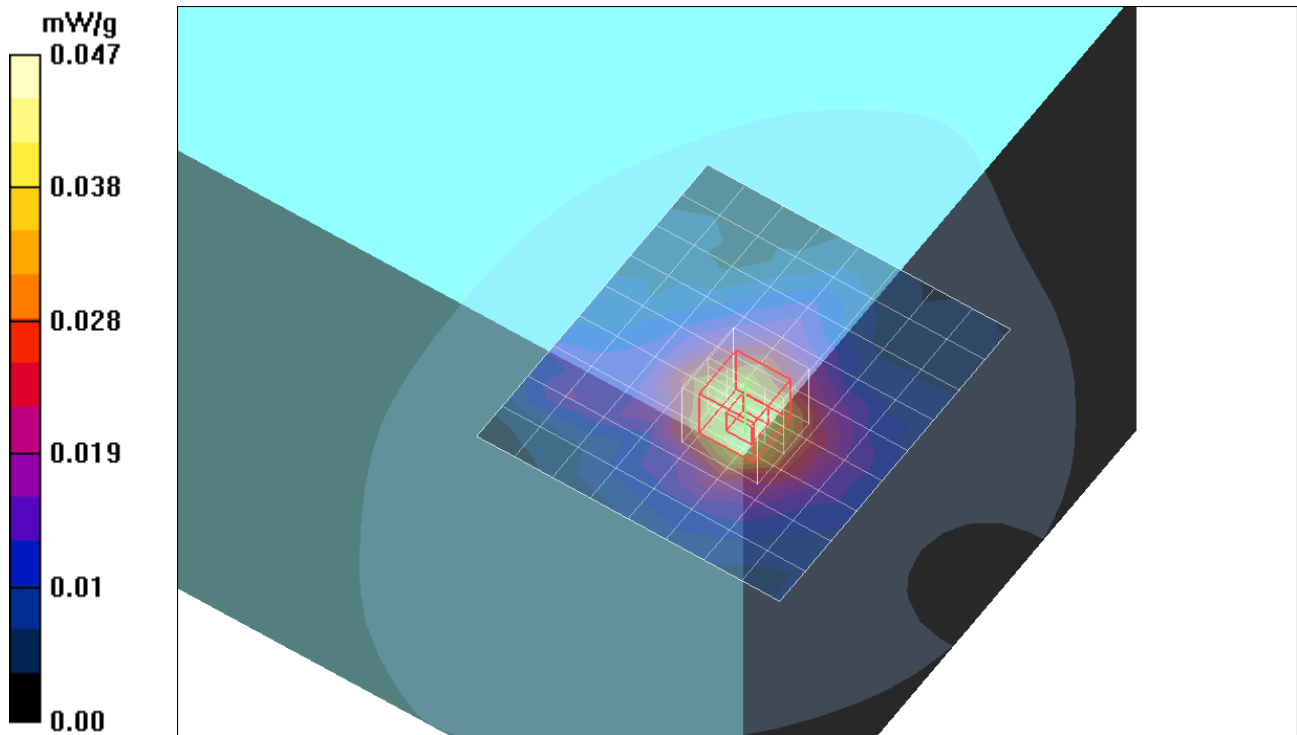

Test Laboratory: Compliance Certification Services

2_Lenovo W-Note Plastic LCD Cover_WLAN_Gwinette

DUT: Lenovo ; Type: M-note Metal LCD Cover; Serial: n/a

Communication System: CDMA PCS band; Frequency: 1880 MHz;Duty Cycle: 1:1

M-ch_WLAN on/Z Scan (1x1x41): Measurement grid: dx=20mm, dy=20mm, dz=2.5mm
Maximum value of SAR (measured) = 0.030 mW/g

