


Test Mode	UNII-3_TX AX(HE80) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
155	5775	1.09	0.80	1.89	29.99	Complies


CH155

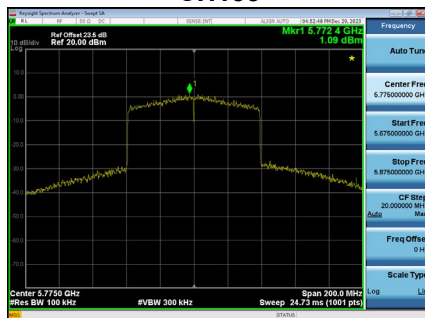

Test Mode	UNII-3_TX AX(HE80) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
155	5775	-0.12	0.80	0.68	29.99	Complies

CH155

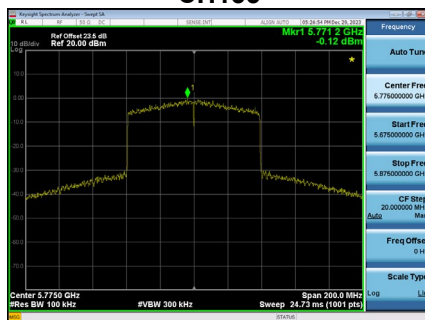

Test Mode	UNII-3_TX AX(HE80) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
155	5775	4.33	29.99	Complies

APPENDIX H - FREQUENCY STABILITY

Test Mode	UNII-1
-----------	--------

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)
Center Frequency	5180.0000
138	5180.0004
120	5180.0032
102	5180.0060
Maximum Deviation (MHz)	0.0060
Maximum Deviation (ppm)	1.1583

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
Center Frequency	5180.0000
0	5180.0124
10	5180.0180
20	5180.0160
30	5180.0200
40	5180.0232
Maximum Deviation (MHz)	0.0232
Maximum Deviation (ppm)	4.4788

Test Mode	UNII-3
-----------	--------

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)
Center Frequency	5745.0000
138	5745.0056
120	5744.9996
102	5745.0036
Maximum Deviation (MHz)	0.0056
Maximum Deviation (ppm)	0.9748

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
Center Frequency	5745.0000
0	5745.0056
10	5745.0084
20	5745.0108
30	5745.0128
40	5745.0152
Maximum Deviation (MHz)	0.0152
Maximum Deviation (ppm)	2.6458

End of Test Report