

FCC RF Test Report

APPLICANT : FIH CO., LTD.

EQUIPMENT: Internet Gateway

BRAND NAME : FIH

MODEL NAME : FWF100V5L

FCC ID : RYQFWF100V5L STANDARD : 47 CFR Part 2, 96

CLASSIFICATION : Citizens Band End User Devices (CBE)

EQUIPMENT TYPE: End User Equipment

TEST DATE(S) : Aug. 15, 2022 ~ Nov. 02, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

JasonJia

Approved by: Jason Jia





Report No.: FG262206B

Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L Page Number : 1 of 22 Issued Date : Jan. 09, 2023

Report Version : 01



FCC RF Test Report

Report No.: FG262206B

Table of Contents

History of this test report	3
Summary of Test Result	4
1 General Description	5
1.1 Applicant	5
Feature of Equipment Under Test Maximum EIRP Power and Emission Designator	
1.5 Testing Site	
1.6 Test Software	
1.7 Applied Standards	7
2 Test Configuration of Equipment Under Test	8
2.1 Test Mode	9 9
3 Conducted Test Items	11
3.1 Measuring Instruments 3.2 Conducted Output Power 3.3 EIRP 3.4 Occupied Bandwidth 3.5 Conducted Band Edge 3.6 Conducted Spurious Emission 3.7 Frequency Stability	12 13 14 15
4 Radiated Test Items	18
4.1 Measuring Instruments	18 19 20
5 List of Measuring Equipment	21
6 Uncertainty of Evaluation	22
Appendix A. Test Results of Conducted Test Appendix B. Test Results of Radiated Test Appendix C. Test Setup Block groups	

Appendix C. Test Setup Photographs

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L

Report Version : 01

PORTON LAB. F	CC RF	Test	Rep
---------------	-------	------	-----

History of this test report

Report No.	Version	Description	Issued Date
FG262206B	01	Initial issue of report	Jan. 09, 2023

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L

: 3 of 22 Page Number Issued Date : Jan. 09, 2023

Report No. : FG262206B

Report Version



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark	
3.2	§2.1046	Conducted Output Power	Reporting only	-	
-	§96.41	§96.41 Peak-to-Average Ratio Not Required			
		Maximum E.I.R.P	Pass	-	
3.3	§96.41	Maximum Power Spectral Density	Not Required	Not applicable for End User Devices	
3.4	§2.1049 §96.41	Occupied Bandwidth	Reporting only	-	
3.5	§2.1051 §96.41	Conducted Band Edge Measurement Adjacent Channel Leakage Ratio	Pass	-	
3.6	§2.1051 §96.41	Conducted Spurious Emission	Pass		
3.7	§2.1055	Frequency Stability for Temperature & Voltage	Pass	-	
4.4	§2.1051 §96.41	Radiated Spurious Emission	Pass	Under limit 4.81 dB at 7230.000 MHz	

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L Page Number : 4 of 22 Issued Date : Jan. 09, 2023

Report No.: FG262206B

Report Version : 01



1 General Description

1.1 Applicant

FIH CO., LTD.

No.4, Minsheng St., Tu-Cheng Dist., New Taipei City 23679, Taiwan

1.2 Manufacturer

FIH CO., LTD.

No.4, Minsheng St., Tu-Cheng Dist., New Taipei City 23679, Taiwan

1.3 Feature of Equipment Under Test

Product Feature					
Equipment	Internet Gateway				
Brand Name	FIH				
Model Name	FWF100V5L				
FCC ID	RYQFWF100V5L				
Tx Frequency	LTE Band 48: 3550 MHz ~ 3700 MHz				
Rx Frequency	LTE Band 48: 3550 MHz ~ 3700 MHz				
Bandwidth	5MHz / 10MHz / 15MHz / 20MHz				
Maximum Output Power to Antenna	Ant 1: 20.97 dBm				
Maximum Output Fower to Antenna	Ant 2: 21.52 dBm				
Antenna Type / Gain	Ant.1: Monopole Antenna type with gain 0.97 dBi				
Antenna Type / Cam	Ant.2: Monopole Antenna type with gain -0.04 dBi				
Type of Modulation	QPSK / 16QAM / 64QAM				
	Conducted: 358835490000905/358835490003404				
IMEL Code	Radiation:				
IMEI Code	358835490000293 for Sample 1				
	358835490011118 for Sample 2				
EUT Stage	Identical Prototype				

Report No.: FG262206B

Remark:

- 1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
- 2. The maximum EIRP is calculated from output power and antenna gain, only the maximum EIRP of Ant. 1 is shown in the report.
- 3. There are three types of EUT, the differences could be referred to the FWF100V5L_Operational Description of Product Equality Declaration which is exhibit separately. According to the difference, we choose sample 1 to full test and the sample 2 is verified for the difference for RSE testing.
- 4. The device supports two PAs for LTE Band 48(main PA for Ant.1, other PA for Ant.2).

 Sporton International Inc. (Kunshan)
 Page Number
 : 5 of 22

 TEL: +86-512-57900158
 Issued Date
 : Jan. 09, 2023

FAX: +86-512-57900958 Report Version : 01

FCC ID: RYQFWF100V5L Report Template No.: BU5-FGLTE96 Version 2.4



1.4 Maximum EIRP Power and Emission Designator

Ľ	TE Band 48	QP	SK	16QAM/64QAM		
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)	
20	3560~3690	0.1563	17M9G7D	0.1245	17M9W7D	

Report No.: FG262206B

Note: All modulations have been tested, only the maximum bandwidth and the worst test results of PSK & QAM are shown in the report.

1.5 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)						
	No. 1098, Pengxi North	n Road, Kunshan Econom	ic Development Zone				
Test Site Location	Jiangsu Province 215300 People's Republic of China						
rest Site Location	TEL: +86-512-57900158						
	FAX: +86-512-57900958						
	FCC Test Firm						
Test Site No.	Sporton Site No.	FCC Designation No.	Registration No.				
	03CH04-KS TH01-KS	CN1257	314309				

1.6 Test Software

Item	Site	Manufacturer	Name	Version	
1.	03CH04-KS	AUDIX	E3	6.2009-8-24al	

 Sporton International Inc. (Kunshan)
 Page Number
 : 6 of 22

 TEL: +86-512-57900158
 Issued Date
 : Jan. 09, 2023

FAX: +86-512-57900958 Report Version : 01
FCC ID: RYQFWF100V5L Report Template No.: BU5-FGLTE96 Version 2.4

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- + ANSI C63.26-2015
- 47 CFR Part 2, 96
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 940660 D01 Part 96 CBRS v03
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

- **1.** All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L Page Number : 7 of 22 Issued Date : Jan. 09, 2023

Report No.: FG262206B

Report Version : 01



Test Configuration of Equipment Under Test 2

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

			Bandwidth (MHz)			N	Modulatio	n		RB#		Test Channel				
Test Items	Band	1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	М	Н
Max. Output Power	48		-	v	v	v	v	v	v	v	v	v	٧	v	٧	٧
Adjacent Channel Leakage Ratio	48	-	-	v	v	v	v	v	v	v	٧		v	٧	v	v
26dB and 99% Bandwidth	48	-	-				v	v	v				>		٧	
Conducted Band Edge	48	-	-	٧	v	v	v	V	v	٧	٧		٧	٧	٧	٧
Conducted Spurious Emission	48	-		v	v	v	v	v			v		٧	v	v	v
E.R.P / E.I.R.P	48			٧	v	v	v	v	v	v	٧			٧	٧	v
Frequency Stability	48	-			v			v			٧				٧	
Radiated Spurious Emission	48						w	orst Case	•						٧	
Remark	 The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 															

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L


: 8 of 22 Page Number Issued Date : Jan. 09, 2023

Report No.: FG262206B

Report Version : 01



2.2 Connection Diagram of Test System

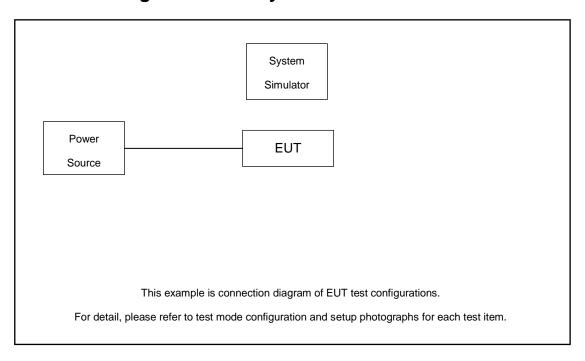

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C/MT8000	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 8.72 dB.

Example:

 $Offset(dB) = RF \ cable \ loss(dB).$

= 8.72 (dB)

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L Page Number : 9 of 22 Issued Date : Jan. 09, 2023

Report No.: FG262206B

Report Version : 01



2.5 Frequency List of Low/Middle/High Channels

LTE Band 48 Channel and Frequency List									
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest					
20	Channel	55340	55990	56640					
20	Frequency	3560.0	3625.0	3690.0					
45	Channel	55315	55990	56665					
15	Frequency	3557.5	3625.0	3692.5					
10	Channel	55290	55990	56690					
10	Frequency	3555.0	3625.0	3695.0					
5	Channel	55265	55990	56715					
	Frequency	3552.5	3625.0	3697.5					

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L Page Number : 10 of 22 Issued Date : Jan. 09, 2023

Report No. : FG262206B

Report Version : 01




3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power



3.1.3 PSD, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

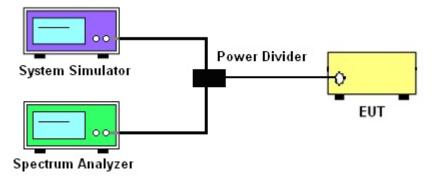

3.1.4 Frequency Stability

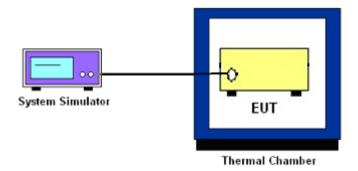

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L Page Number : 11 of 22 Issued Date : Jan. 09, 2023

Report No.: FG262206B

Report Version : 01



3.2 Conducted Output Power

3.2.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.2.2 Test Procedures

- The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through the system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L

: 12 of 22 Page Number Issued Date : Jan. 09, 2023

Report No.: FG262206B

Report Version : 01



3.3 EIRP

3.3.1 Description of the EIRP Measurement

EIRP limits for CBRS equipment as below table:

De	evice	Maximum EIRP	Maximum PSD
		(dBm/10 MHz)	(dBm/MHz)
Applied	End User Device	23	n/a
	Category A CBSD	30	20
	Category B CBSD	47	37

Remark: The worst case EIRP shown in this section is found with LTE operating only using 1RB. As such, the EIRP/10MHz and full channel EIRP values will be identical since 1RB is fully contained within all available channel bandwidths for LTE Band 48 (i.e. 5, 10, 15, 20MHz)

3.3.2 Test Procedures for EIRP

- Establishing a communications link with the call box (Base station) to measure the Maximum conducted power, the parameters were set to force the EUT transmitting at maximum output power level. Use the average power measurement function to measure total channel power of each channel bandwidth (per ANSI C63.26-2015 Section 5.2.1)
- Determining ERP and/or EIRP from conducted RF output power measurements (Per ANSI C63.26-2015 Section 5.2.5.5)

$$EIRP = P_T + G_T - L_C$$
, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

 G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L Page Number : 13 of 22 Issued Date : Jan. 09, 2023

Report No.: FG262206B

Report Version : 01

3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the

total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and

one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB

below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit

bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of

the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.

2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.

The span range for the spectrum analyzer shall be between two and five times the anticipated

OBW.

The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated 3.

OBW, and the VBW shall be at least 3 times the RBW.

4. Set the detection mode to peak, and the trace mode to max hold.

5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to

stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.

(this is the reference value)

6. Determine the "-26 dB down amplitude" as equal to (Reference Value – X).

7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of

the spectral display such that each marker is at or slightly below the "-X dB down amplitude"

determined in step 6. If a marker is below this "-X dB down amplitude" value it shall be placed

as close as possible to this value. The OBW is the positive frequency difference between the

two markers.

Use the 99 % power bandwidth function of the spectrum analyzer and report the measured 8.

bandwidth.

: 14 of 22 Page Number

Issued Date : Jan. 09, 2023

Report Version

: 01

Report No.: FG262206B

3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

Part 96.41 (e) (1) (i)

For CBSD the emission limits outside the fundamental are as follows:

Within 0 MHz to 10 MHz above and below the assigned channel ≤ −13 dBm/MHz

Greater than 10 MHz above and below the assigned channel ≤ -25 dBm/MHz

Part 96.41 (e) (1) (ii)

For End User Devices the emission limits outside the fundamental are as follows:

Within 0 MHz to B MHz above and below the assigned channel ≤ −13 dBm/MHz

Greater than B MHz above and below the assigned channel ≤ -25 dBm/MHz

where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device.

Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

Part 96.41 (e) (2)

For CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The band edges of low and high channels for the highest RF powers were measured.
- 3. Set RBW >= 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
- 4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
- 5. Offset has included the duty factor for LTE Band 48. Duty factor =10 log (1/x), where x is the measured duty cycle.
- 6. Set spectrum analyzer with RMS detector.
- The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L Page Number : 15 of 22 Issued Date : Jan. 09, 2023

Report No.: FG262206B

Report Version : 01

SPORTON LAB. FCC RF Test Report

3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

96.41 (e)(2)

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
- 6. Set spectrum analyzer with RMS detector.
- 7. Taking the record of maximum spurious emission.
- 8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 9. The limit line is -40dBm/MHz.

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L Page Number : 16 of 22 Issued Date : Jan. 09, 2023

Report No.: FG262206B

Report Version : 01



3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

- The EUT was set up in the thermal chamber and connected with the system simulator. 1.
- 2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

- The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.
- 2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- 3. The variation in frequency was measured for the worst case.

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L

: 17 of 22 Page Number Issued Date : Jan. 09, 2023

Report No.: FG262206B

Report Version : 01




4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test below 30MHz

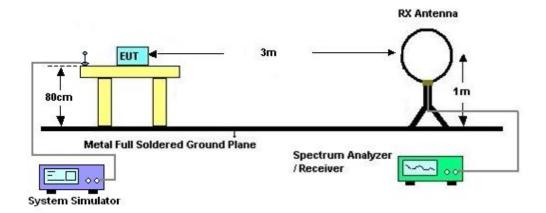

4.2.2 For radiated test from 30MHz to 1GHz

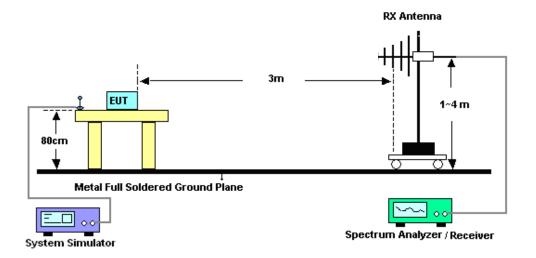

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L Page Number : 18 of 22 Issued Date : Jan. 09, 2023


Report No.: FG262206B

Report Version : 01



Report No.: FG262206B

4.2.3 For radiated test above 1GHz

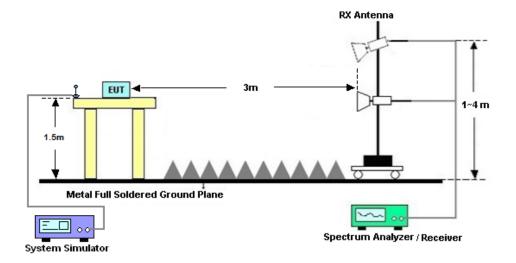

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L Page Number : 19 of 22 Issued Date : Jan. 09, 2023

Report Version : 01

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI C63.26-2015.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

- The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
- 5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
- 6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.

EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain ERP (dBm) = EIRP - 2.15

8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is -40dBm/MHz

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L Page Number : 20 of 22 Issued Date : Jan. 09, 2023

Report No.: FG262206B

Report Version : 01



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 13, 2021	Aug. 27, 2022~ Aug. 30, 2022	Oct. 12, 2022	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	Aug. 25, 2022	Aug. 27, 2022~ Aug. 30, 2022	Aug. 24, 2023	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH Jul. 15, 2022		Aug. 27, 2022~ Aug. 30, 2022	Jul. 14, 2023	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 13, 2021	Aug. 15, 2022~	Oct. 12, 2022	Radiation (03CH04-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 12, 2022	Nov. 02, 2022	Oct. 11, 2023	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Aug. 15, 2022~	Oct. 29, 2022	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 29, 2022	Nov. 02, 2022	Oct. 28, 2023	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	May 24, 2022	Aug. 15, 2022~ Nov. 02, 2022	May 23, 2023	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1284	1GHz~18GHz	Jan. 05, 2022	Aug. 15, 2022~ Nov. 02, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Aug. 15, 2022~ Nov. 02, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Jan. 05, 2022	Aug. 15, 2022~ Nov. 02, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 05, 2022	Aug. 15, 2022~ Nov. 02, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz-18Ghz	Oct. 13, 2021	Aug. 15, 2022~	Oct. 12, 2022	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz-18Ghz	Oct. 12, 2022	Nov. 02, 2022	Oct. 11, 2023	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A02370	1Ghz-18Ghz	Oct. 13, 2021 Aug. 15, 2022~ Nov. 02, 2022		Oct. 12, 2022	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A02370	1Ghz-18Ghz			Oct. 11, 2023	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 15, 2022~ Nov. 02, 2022	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 15, 2022~ Nov. 02, 2022	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 15, 2022~ Nov. 02, 2022	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L Page Number : 21 of 22 Issued Date : Jan. 09, 2023

Report No.: FG262206B

Report Version : 01



6 Uncertainty of Evaluation

Uncertainty of Conducted Measurement

Test Item	Uncertainty			
Conducted Power	±0.46 dB			
Conducted Emissions	±0.48 dB			
Occupied Channel Bandwidth	±0.1 %			

<u>Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)</u>

Measuring Uncertainty for a Level of	
Confidence of 95% (U = 2Uc(y))	3.3dB

<u>Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)</u>

Measuring Uncertainty for a Level of	2.8dB
Confidence of 95% (U = 2Uc(y))	2.0UB

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of	2.8dB
Confidence of 95% (U = 2Uc(y))	2.0UB

----- THE END -----

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L Page Number : 22 of 22 Issued Date : Jan. 09, 2023

Report No.: FG262206B

Report Version : 01



Appendix A. Test Results of Conducted Test

Tost Engineer :	Simla Wang	Temperature :	22~23°C	
Test Engineer :	Simle Wang	Relative Humidity :	40~42%	

Conducted Output Power(Average power) and EIRP

Antenna 1:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	EIRP(W)		
Channel				55340	55990	56640			
Frequency (MHz)			3560	3625	3690	L	M	Н	
20	QPSK	1	0	20.97	20.54	20.82	0.1563	0.1416	0.1510
20	QPSK	1	99	20.82	20.41	20.86	0.1510	0.1374	0.1524
20	QPSK	100	0	19.90	19.46	19.89	0.1222	0.1104	0.1219
20	16QAM	1	0	19.98	19.52	19.88	0.1245	0.1119	0.1216
20	64QAM	1	0	18.64	18.20	18.54	0.0914	0.0826	0.0893
Channel			55315	55990	56665	EIRP(W)			
Frequency (MHz)			3557.5	3625	3692.5	L	M	Н	
15	QPSK	1	0	20.91	20.49	20.45	0.1542	0.1400	0.1387
15	16QAM	1	0	19.88	19.49	19.42	0.1216	0.1112	0.1094
Channel			55290	55990	56690	EIRP(W)			
	Frequency (MHz)			3555	3625	3695	L	M	Н
10	QPSK	1	0	20.94	20.53	20.55	0.1552	0.1413	0.1419
10	16QAM	1	0	19.87	19.49	19.47	0.1213	0.1112	0.1107
Channel			55265	55990	56715	EIRP(W)			
Frequency (MHz)			3552.5	3625	3697.5	L	M	Н	
5	QPSK	1	0	20.93	20.49	20.58	0.1549	0.1400	0.1429
5	16QAM	1	0	19.91	19.49	19.50	0.1225	0.1112	0.1114


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L Report No.: FG262206B



t Report No. : FG262206B

LTE Band 48



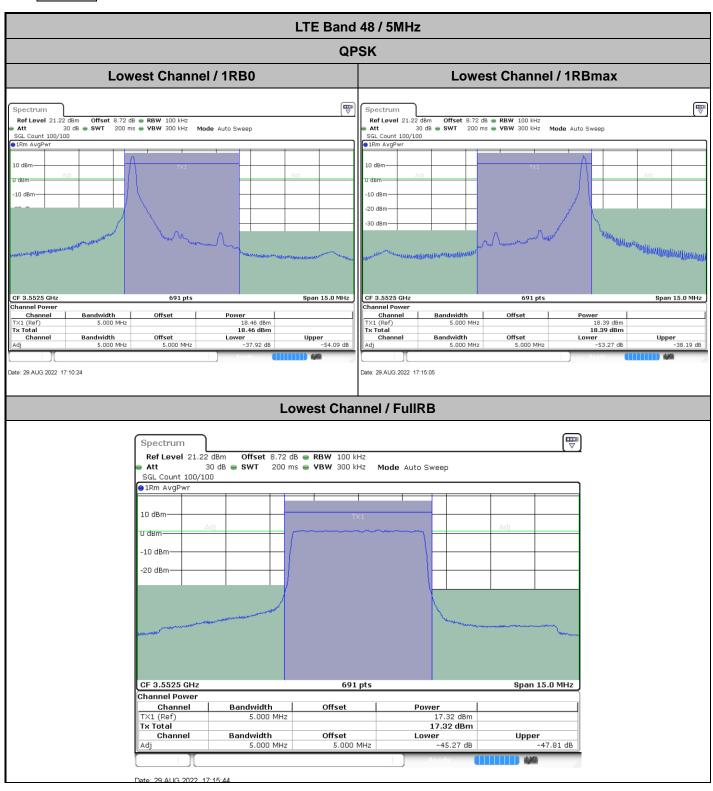


Page Number


: A2 of A159

Sporton International Inc. (Kunshan)

CC RF Test Report No. : FG262206B

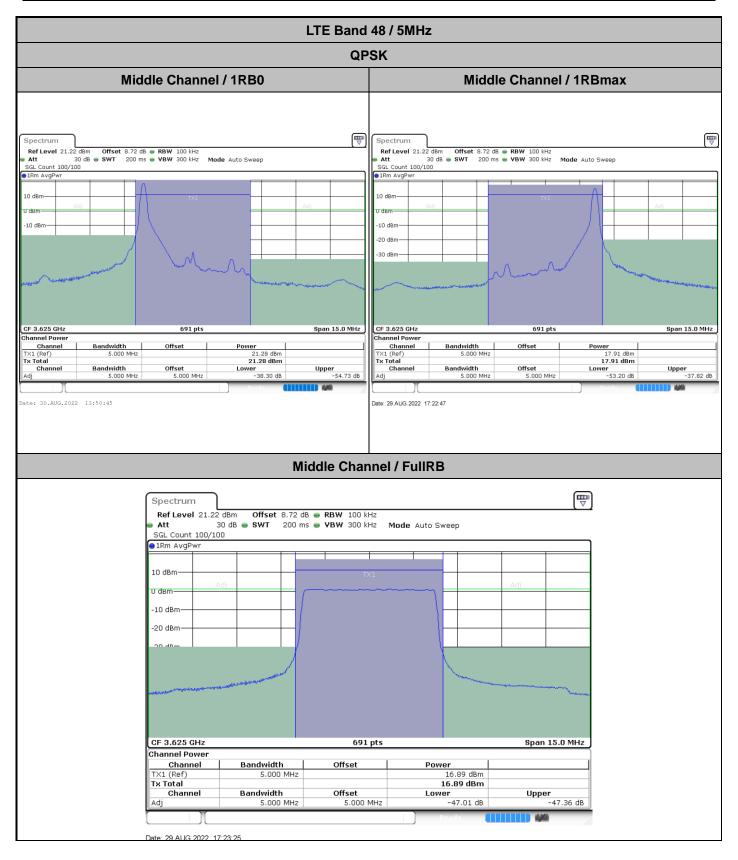




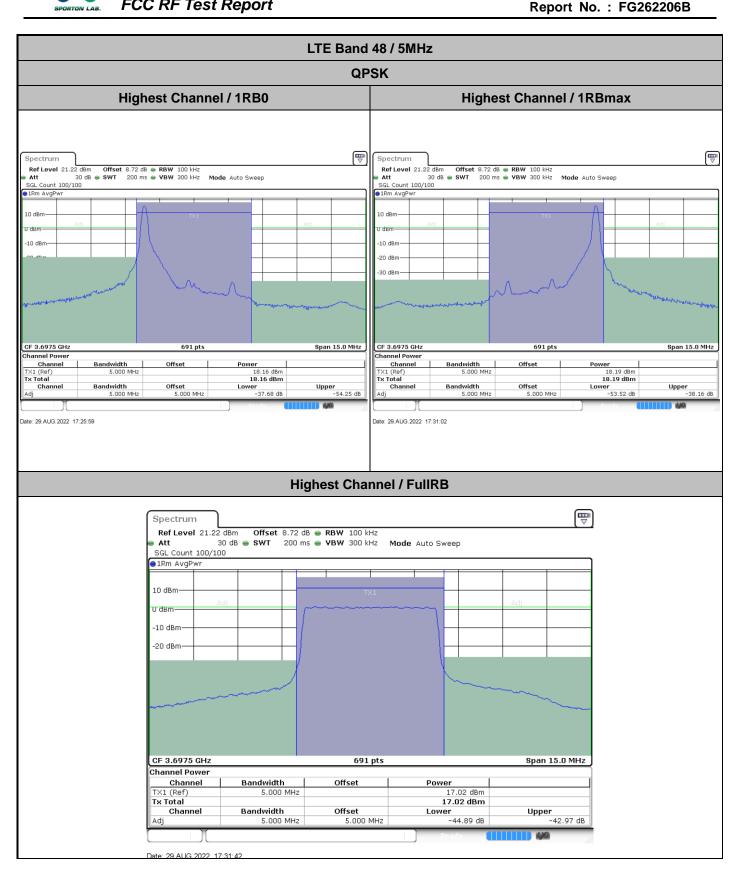


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L : A4 of A159

CC RF Test Report No. : FG262206B

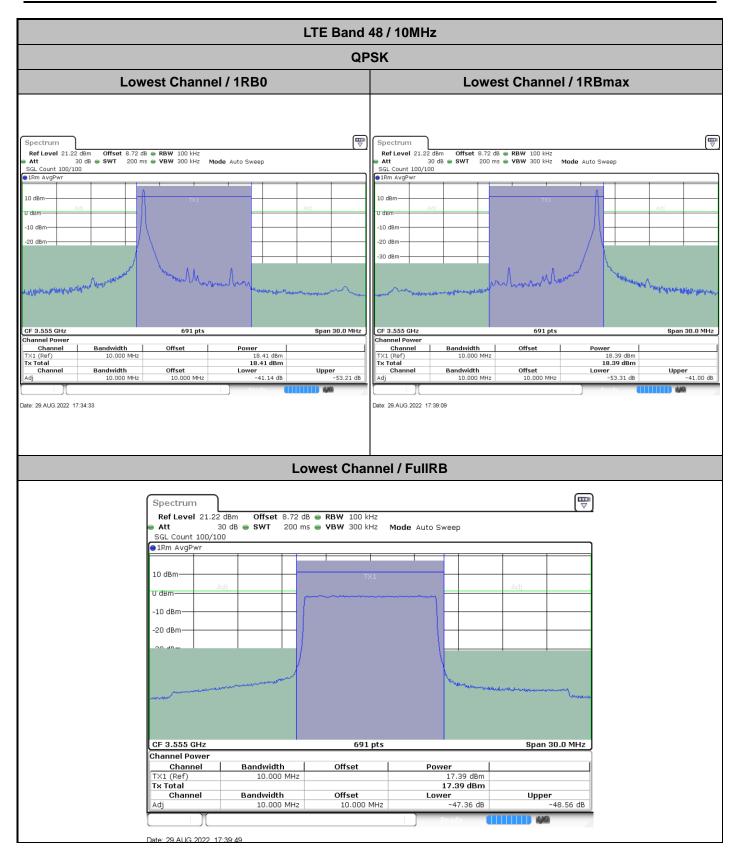


CC RF Test Report No.: FG262206B

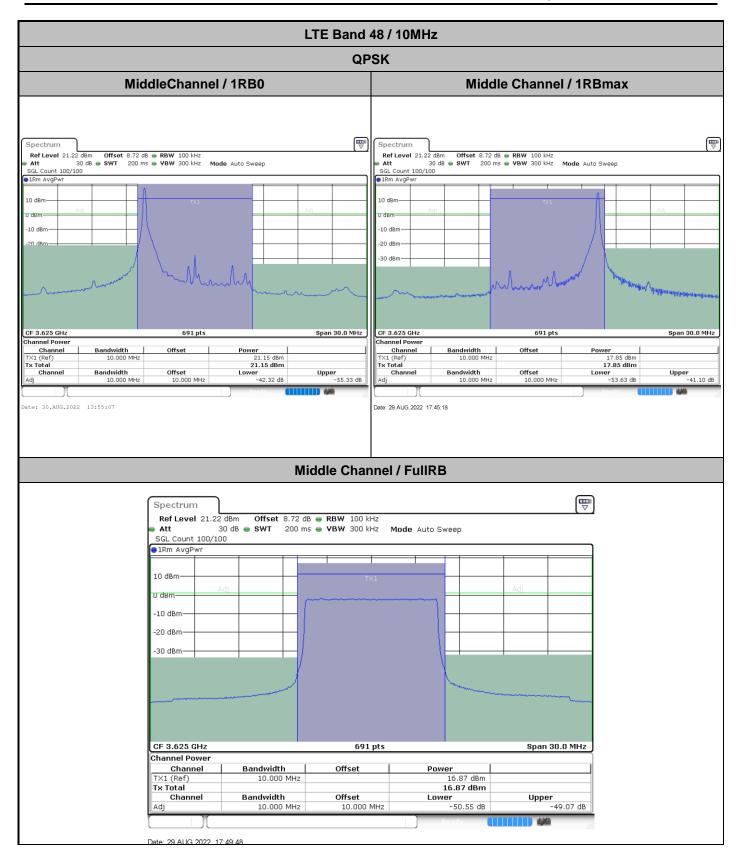


CC RF Test Report No. : FG262206B



CC RF Test Report No. : FG262206B

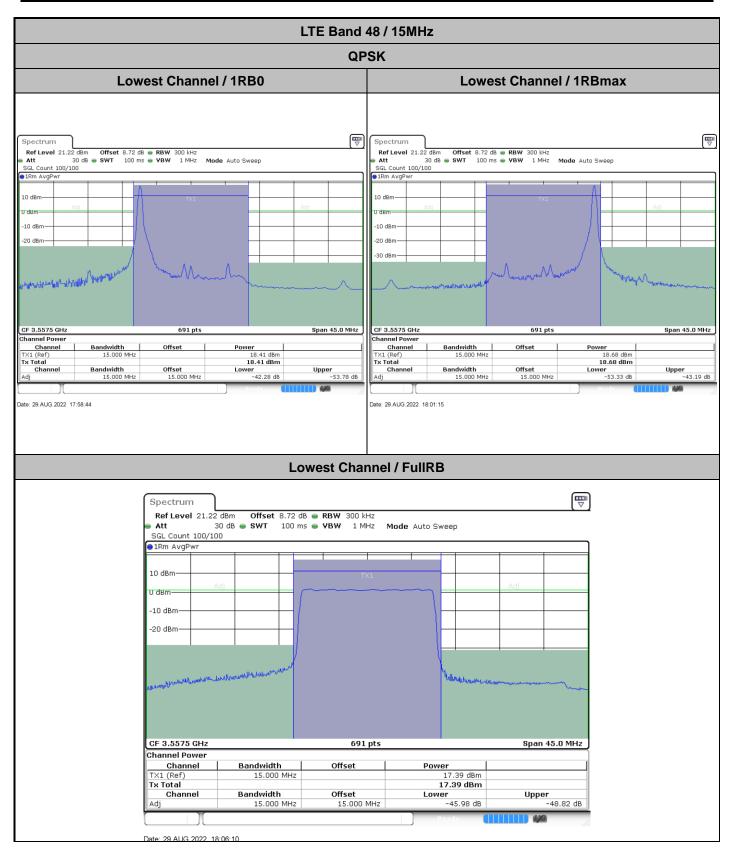




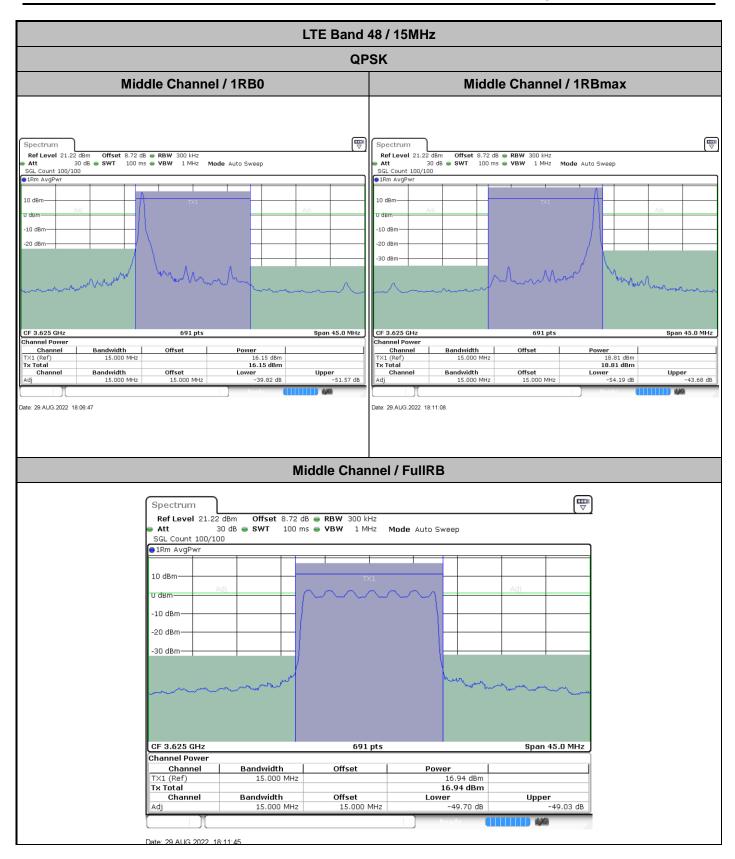


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L Report No.: FG262206B


CC RF Test Report No. : FG262206B

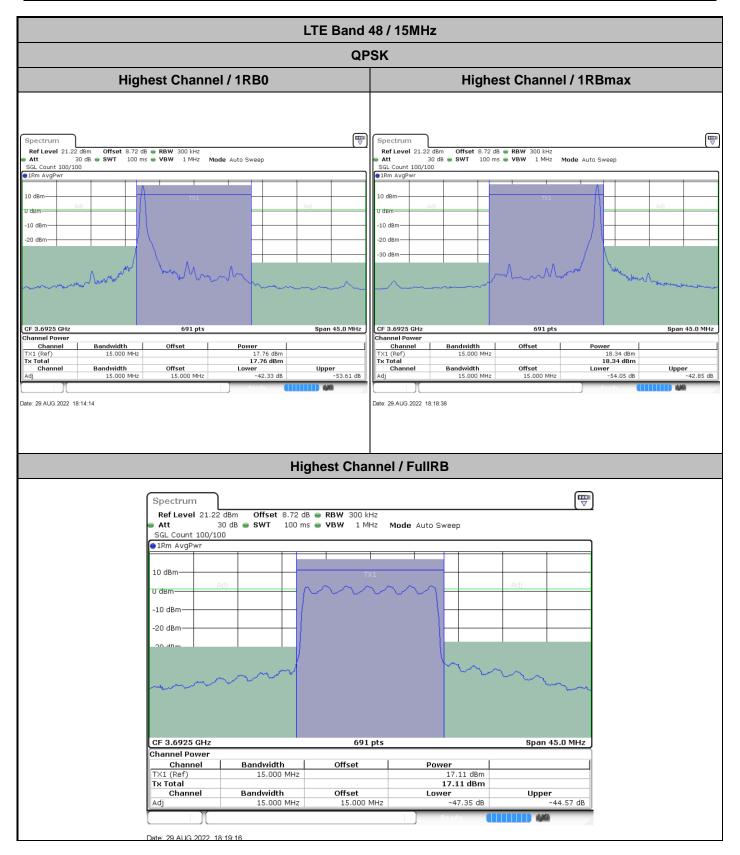


FCC RF Test Report Report No.: FG262206B LTE Band 48 / 20MHz

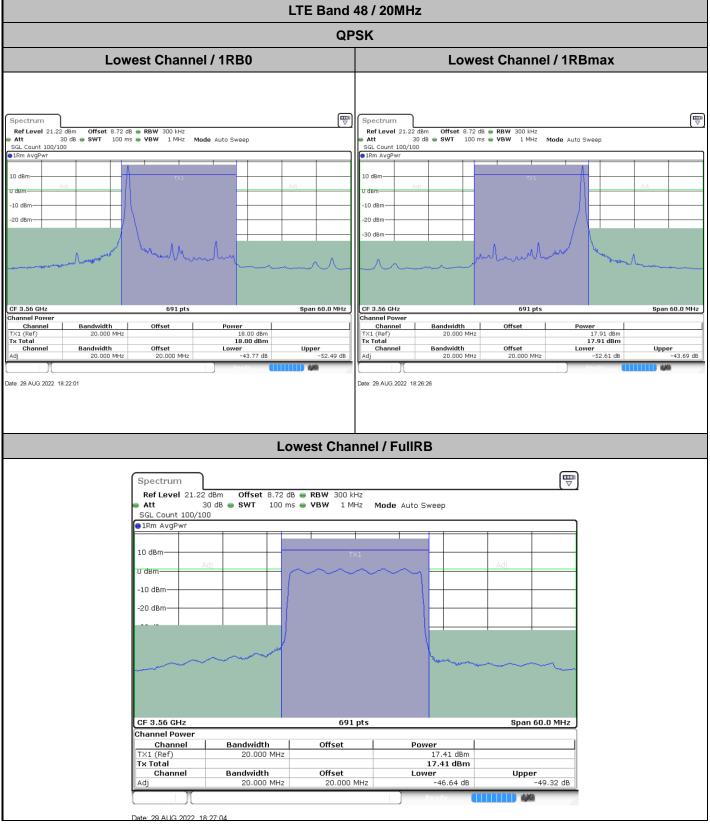


FCC RF Test Report No. : FG262206B

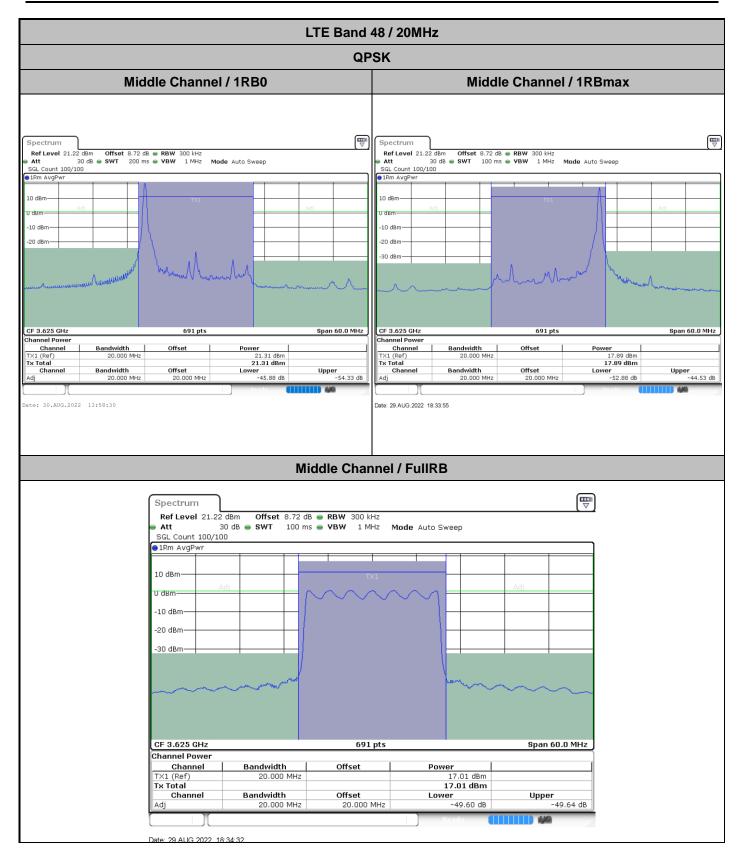


CC RF Test Report No. : FG262206B

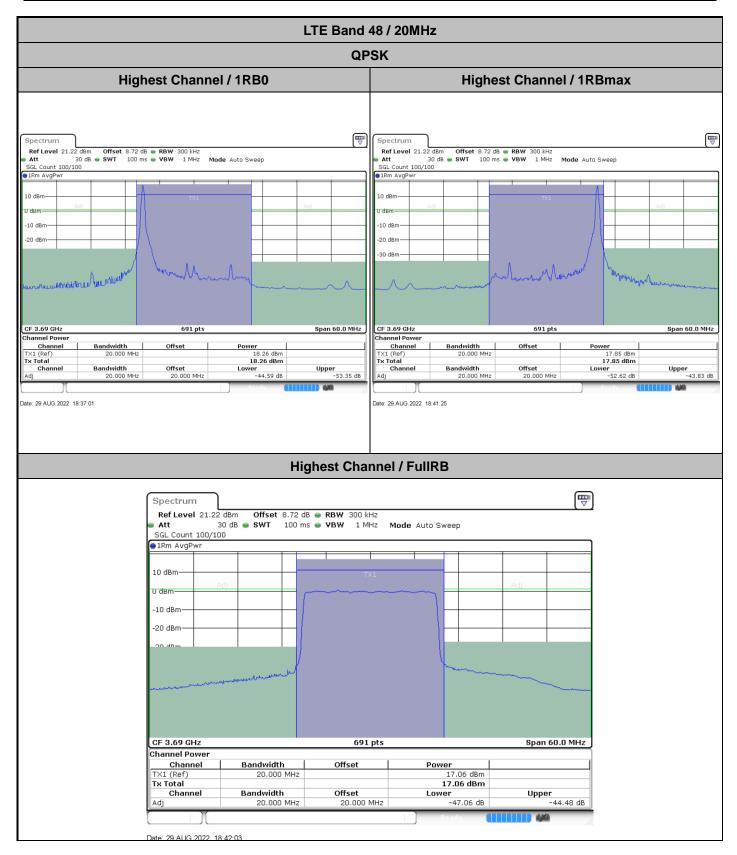



CC RF Test Report Report No. : FG262206B

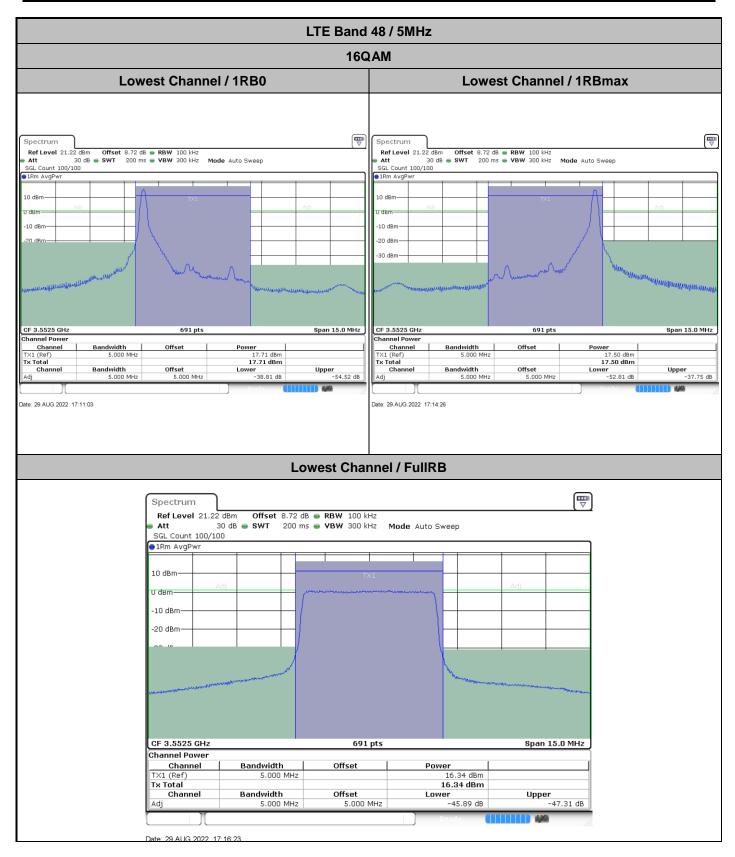

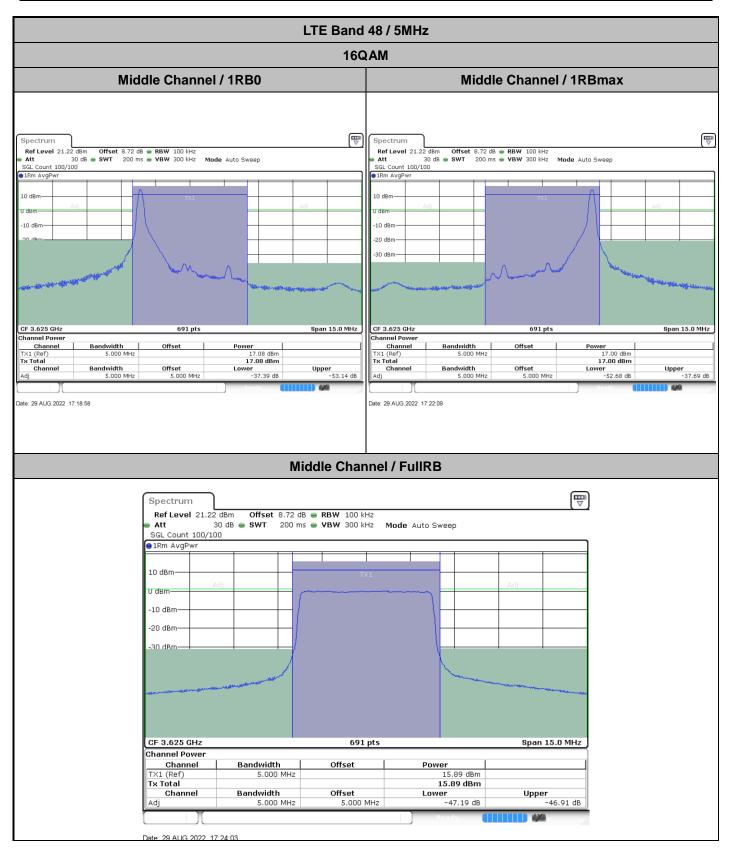


FCC RF Test Report

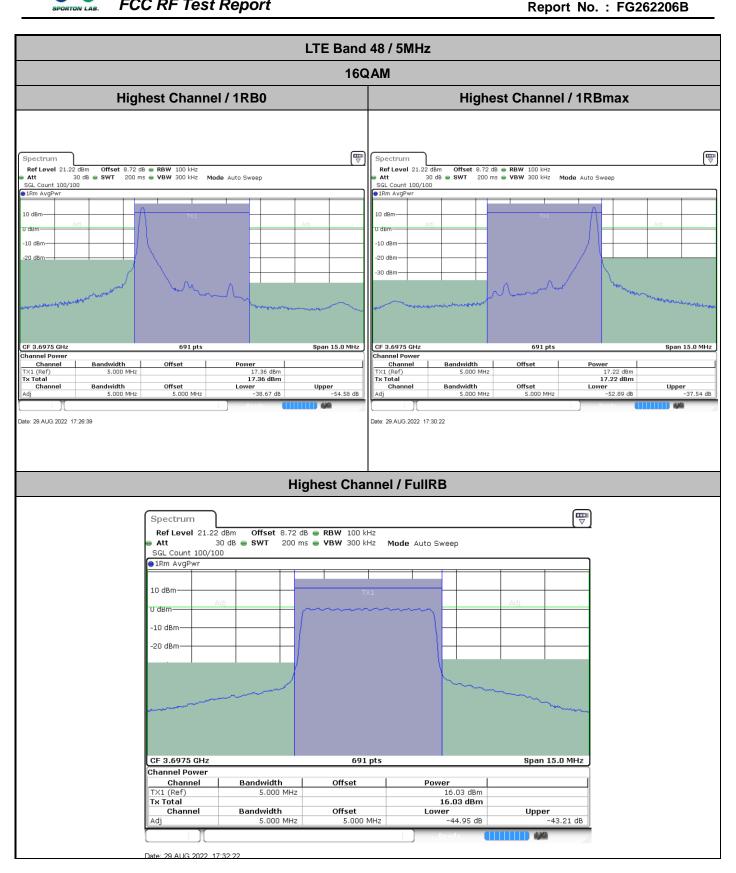

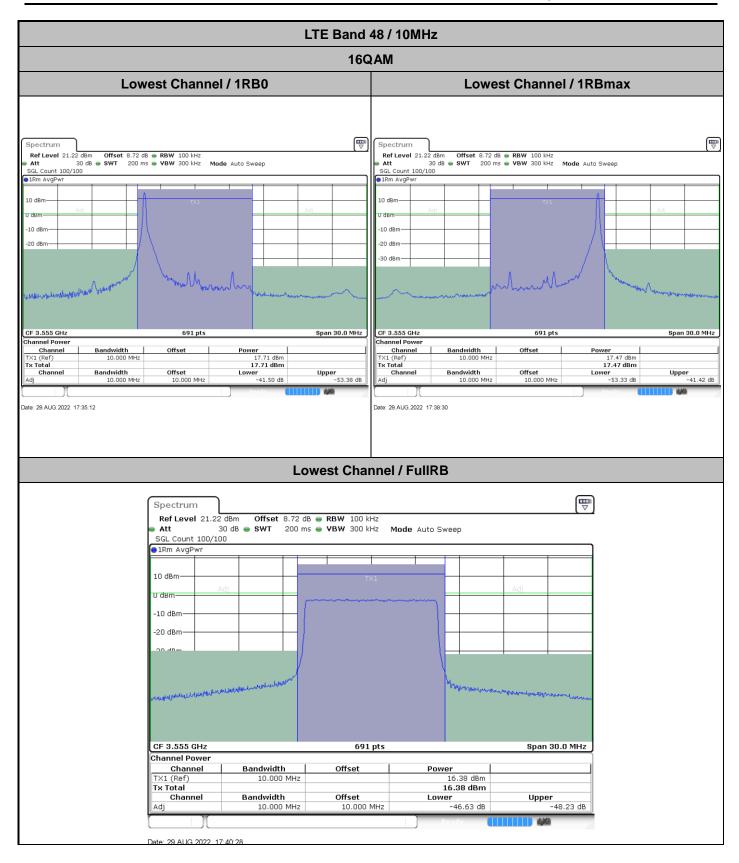


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L Page Number

: A17 of A159

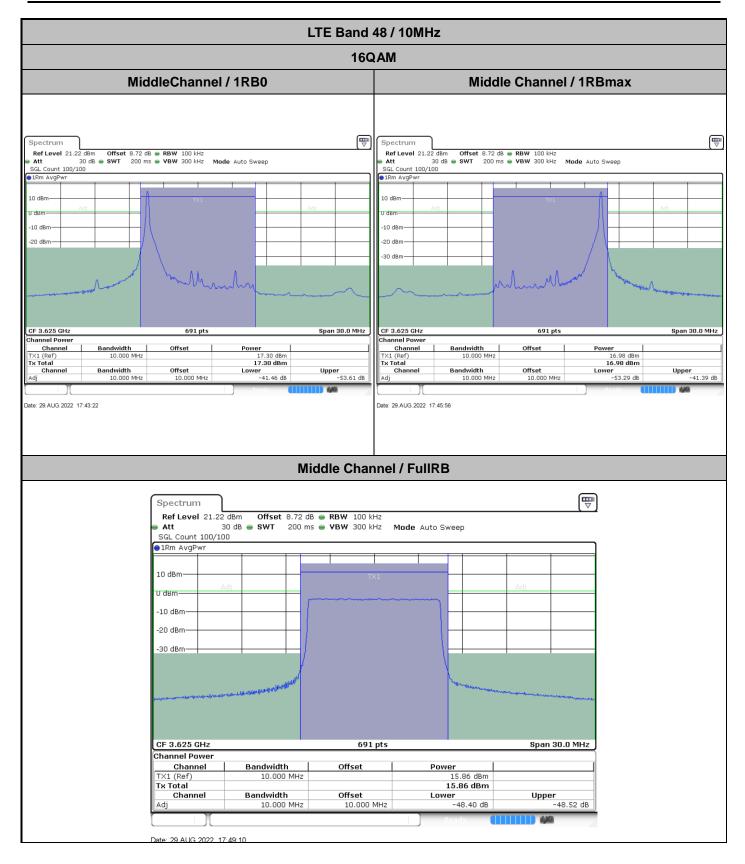




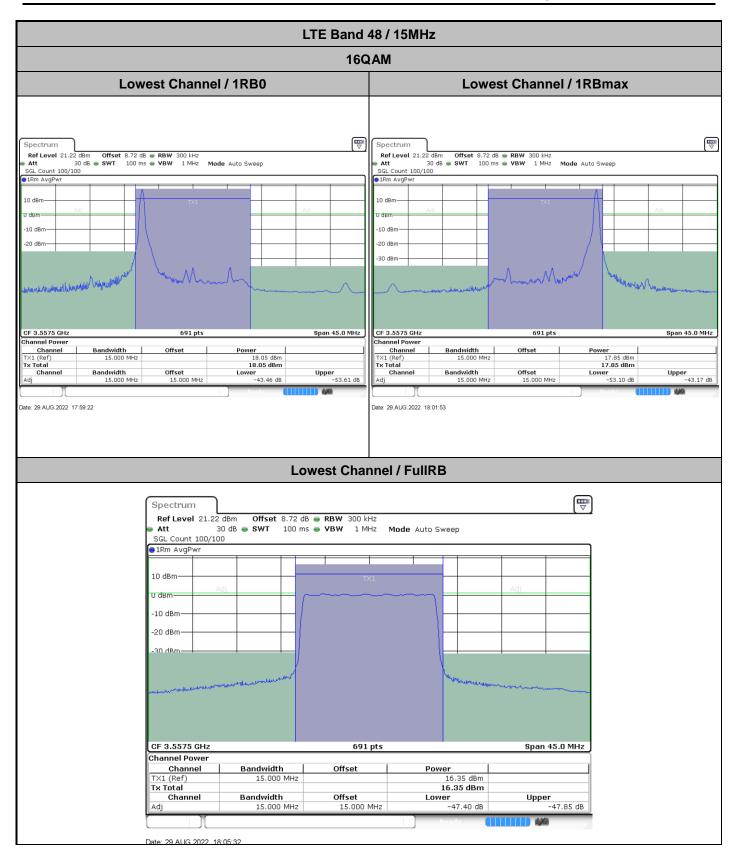


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L Page Number

: A20 of A159


FCC RF Test Report

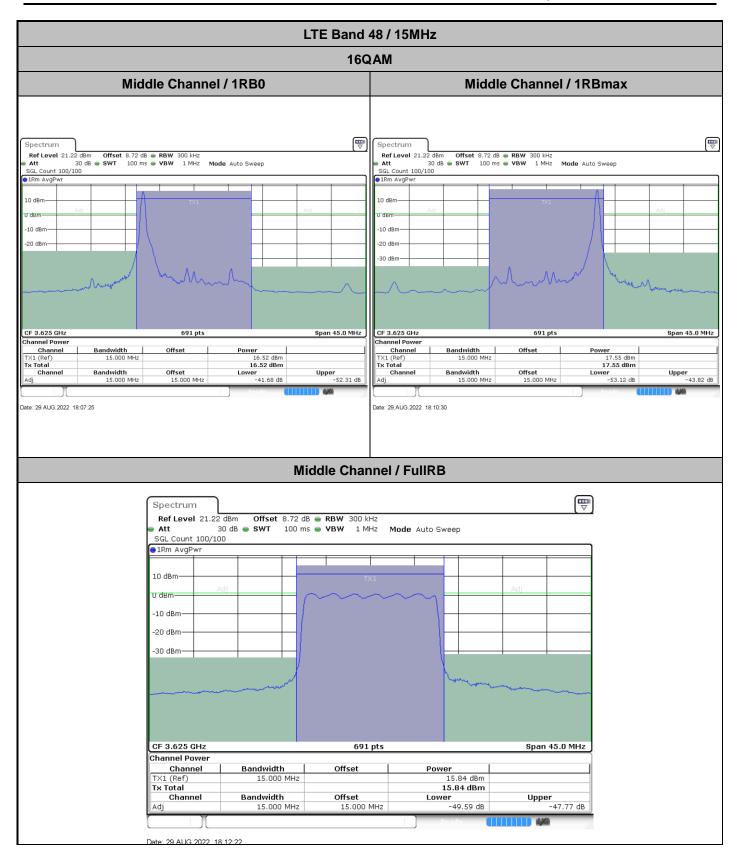

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L : A21 of A159

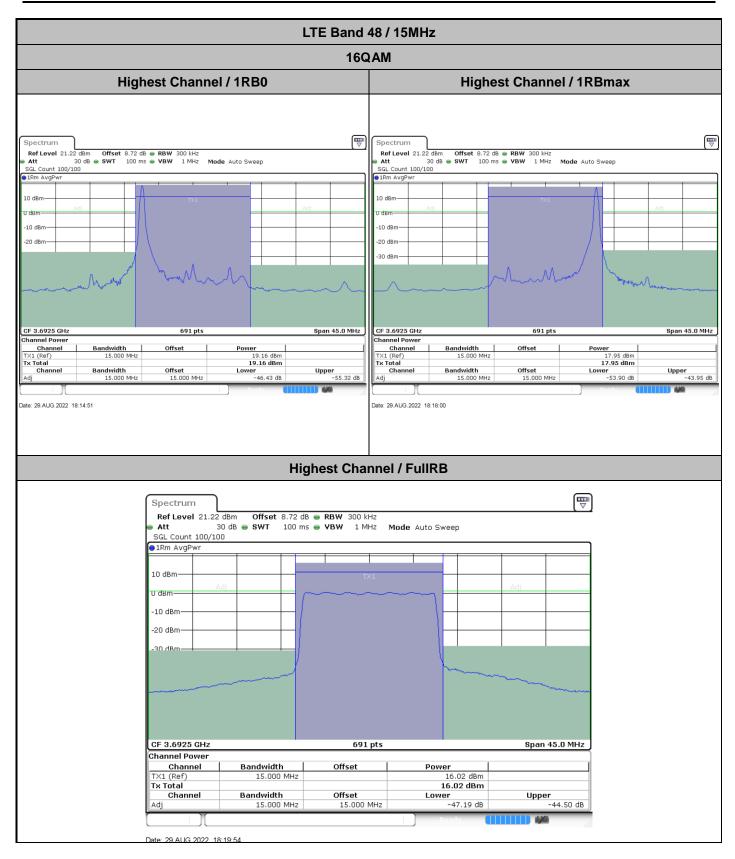



FCC RF Test Report

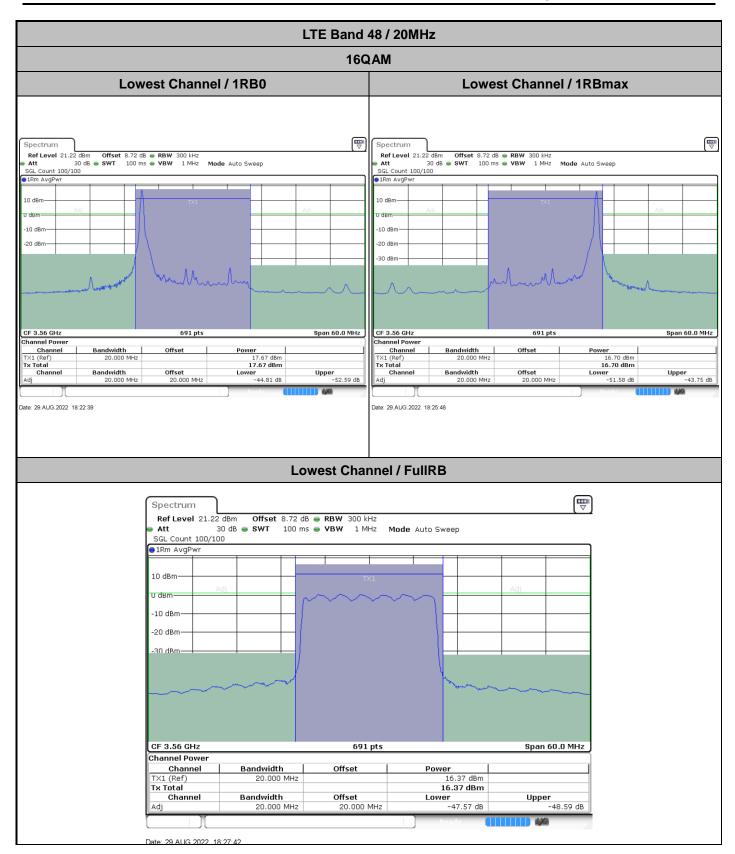



TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L



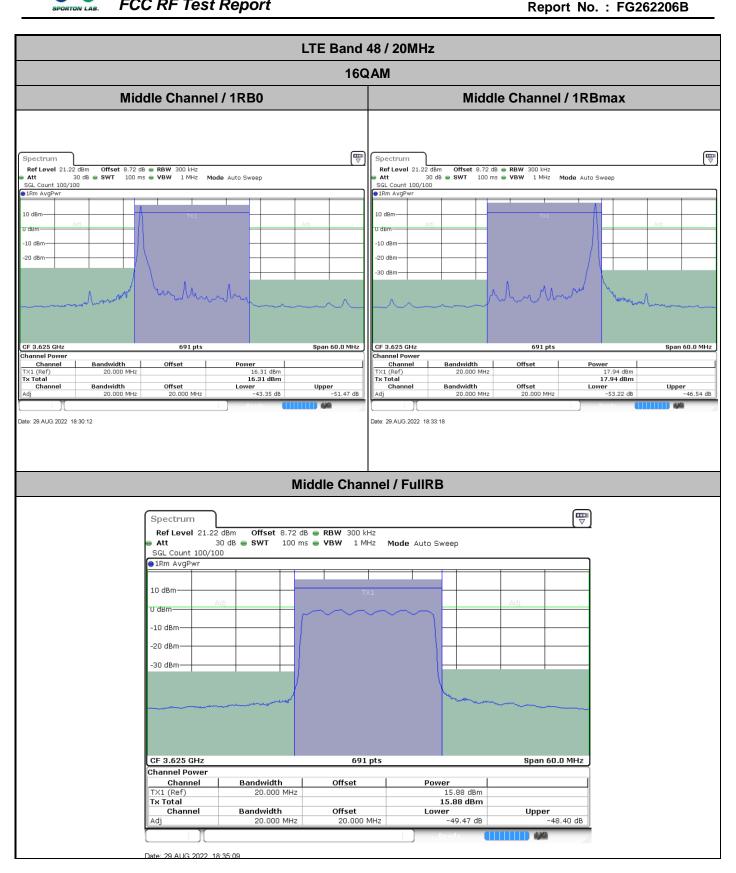

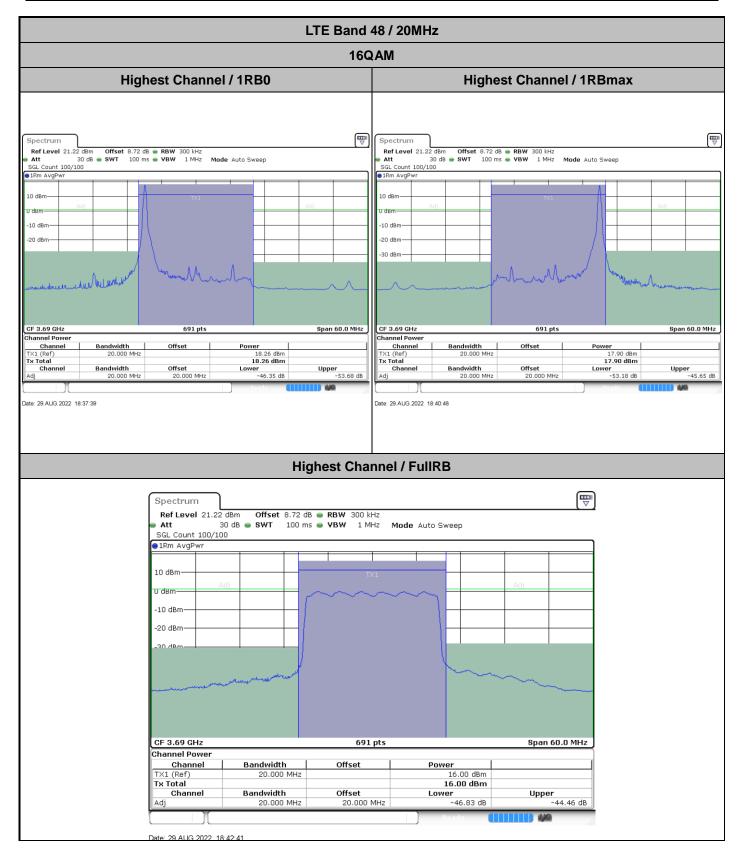

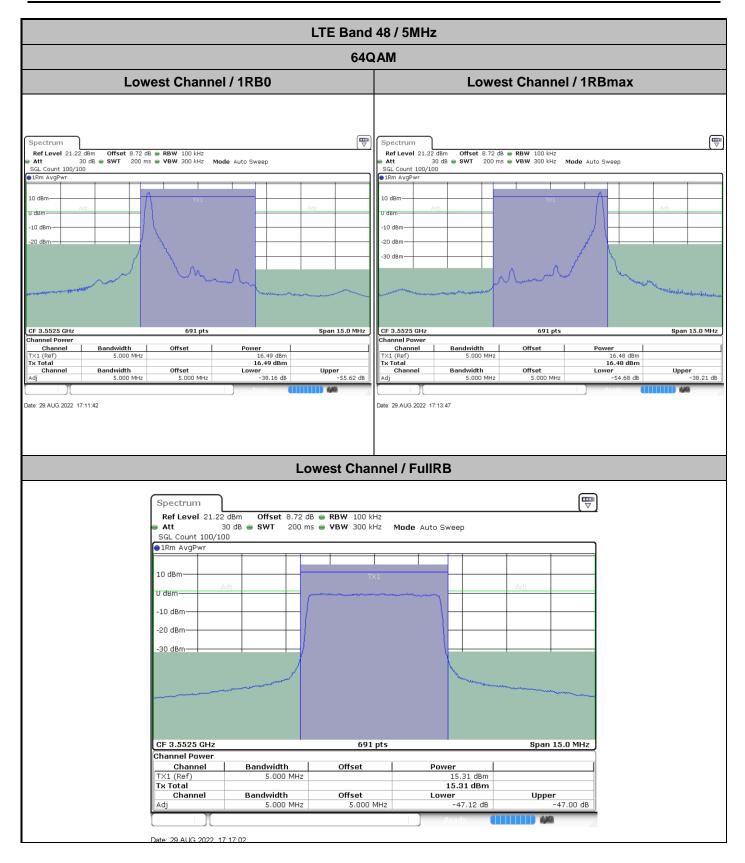

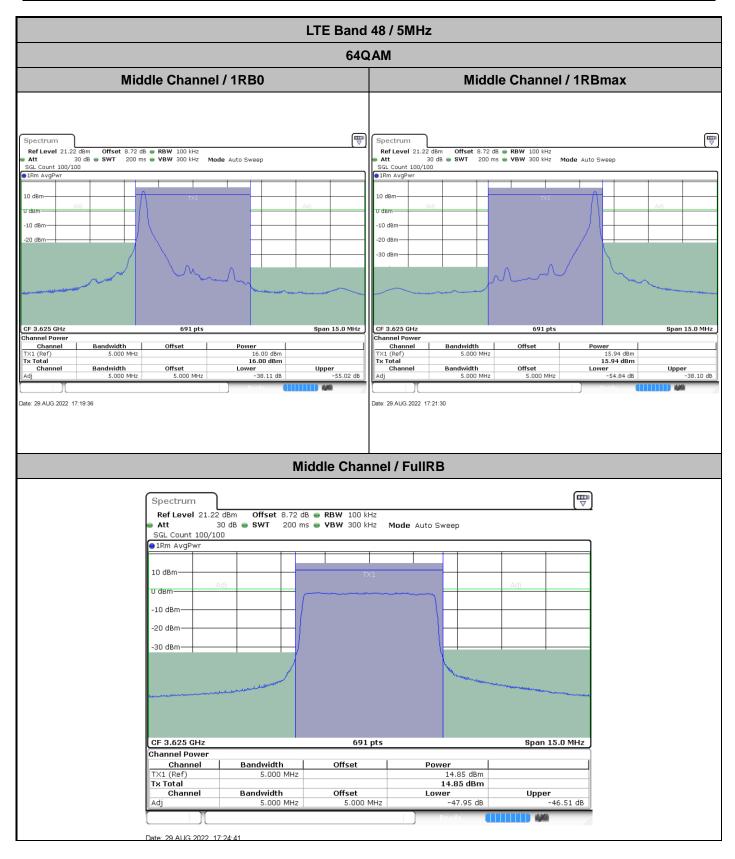





Report No.: FG262206B LTE Band 48 / 10MHz 64QAM MiddleChannel / 1RB0 Middle Channel / 1RBmax Spectrum Spectrum Ref Level 21.22 dBm Offse Att 30 dB • SWT Ref Level 21.22 dBm Att 30 dB
 Offset
 8.72 dB
 ■ RBW
 100 kHz

 SWT
 200 ms
 ■ VBW
 300 kHz
 Mode
 Auto Sweep
 Offset 8.72 dB ● RBW 100 kHz SWT 200 ms ● VBW 300 kHz 30 dB . SWT Mode Auto Sween SGL Count 100/100 Count 100/100 CF 3.625 GHz 691 pts Span 30.0 MHz CF 3.625 GHz 691 pts Span 30.0 MHz Channel TX1 (Ref) Tx Total Channel TX1 (Ref) Tx Total Bandwidth 10.000 MHz Offset Power Bandwidth 10.000 MHz Offset 16.18 dBm 16.18 dBm 15.88 dBm 15.88 dBm Upper -53.52 dB Lower -53.27 dB Upper -41.22 dB Bandwidth 10.000 MHz Bandwidth 10.000 MHz Channe Offset 10.000 MHz Channe Offset 10.000 MHz Date: 29.AUG.2022 17:44:01 Date: 29.AUG.2022 17:46:35 Middle Channel / FullRB Spectrum
 Ref Level
 21.22 dBm
 Offset
 8.72 dB
 RBW
 100 kHz

 Att
 30 dB
 SWT
 200 ms
 VBW
 300 kHz
 Att Mode Auto Sweep SGL Count 100/100 ●1Rm AvgPwr 10 dBm u dBm--10 dBm -20 dBm -30 dBm

691 pts

Power

14.86 dBm 14.86 dBm

Lower -48.83 dB

Offset

Offset 10.000 MHz

Sporton International Inc. (Kunshan)

CF 3.625 GHz

Channel Power

Channel

Channel

Bandwidth

10.000 MHz

Bandwidth 10.000 MHz

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: RYQFWF100V5L Span 30.0 MHz

Upper -47.82 dB

