


Test Mode	Channel	Polarization	Verdict
11ac VHT40	5755	Vertical	PASS

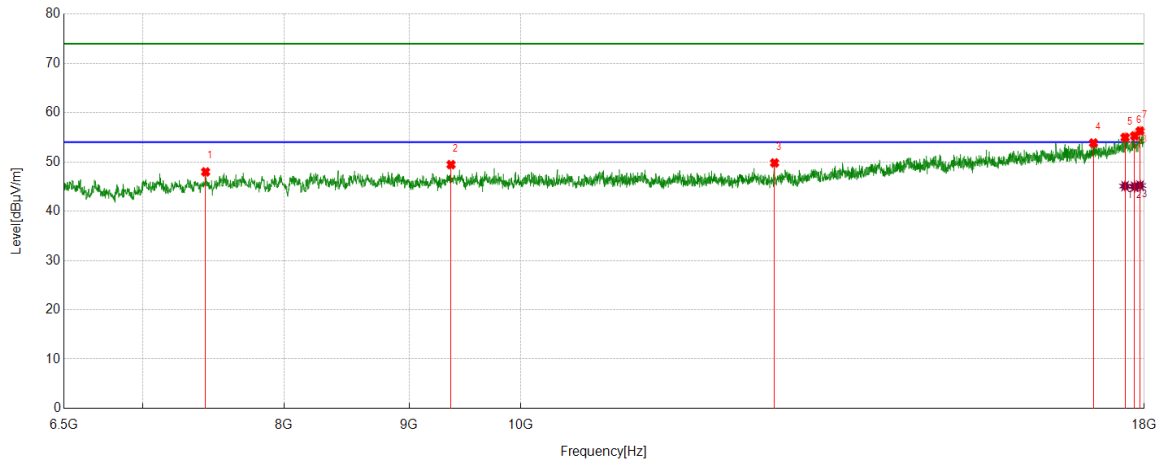

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7429.7383	43.73	4.25	47.98	74.00	-26.02	Vertical
2	9363.9773	42.98	6.47	49.45	74.00	-24.55	Vertical
3	12703.3672	40.91	8.90	49.81	74.00	-24.19	Vertical
4	17158.4431	37.37	16.47	53.84	74.00	-20.16	Vertical
5	17677.9463	36.87	18.10	54.97	74.00	-19.03	Vertical
6	17837.0562	36.19	19.09	55.28	74.00	-18.72	Vertical
7	17930.9885	36.90	19.37	56.27	74.00	-17.73	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17677.9463	26.99	18.10	45.09	54.00	-8.91	Vertical
2	17837.0562	25.89	19.09	44.98	54.00	-9.02	Vertical
3	17930.9885	25.84	19.37	45.21	54.00	-8.79	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5795	Horizontal	PASS

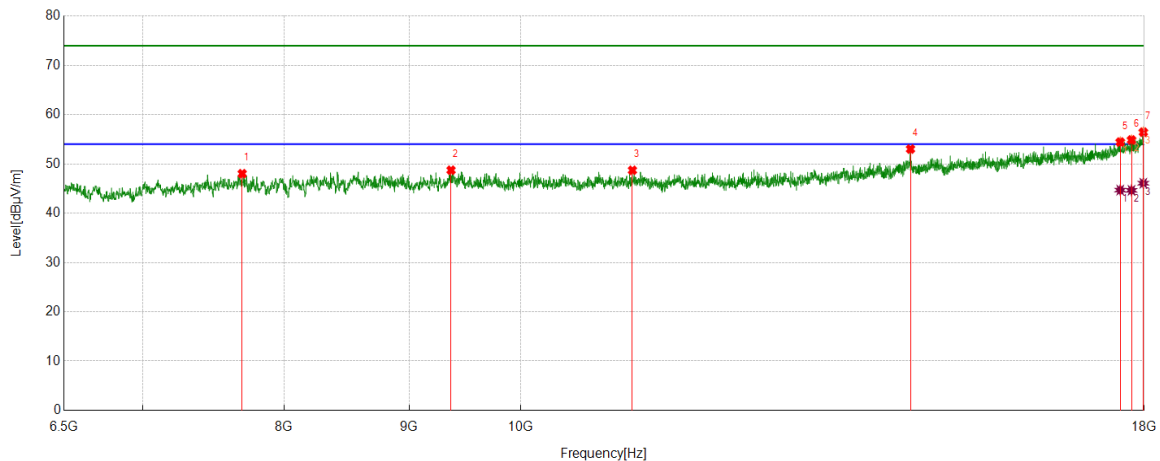

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7690.4484	42.88	5.14	48.02	74.00	-25.98	Horizontal
2	9363.9773	42.26	6.47	48.73	74.00	-25.27	Horizontal
3	11110.3517	41.39	7.32	48.71	74.00	-25.29	Horizontal
4	14440.1567	40.15	12.87	53.02	74.00	-20.98	Horizontal
5	17597.4329	36.41	18.03	54.44	74.00	-19.56	Horizontal
6	17785.2976	36.13	18.74	54.87	74.00	-19.13	Horizontal
7	17984.6641	36.65	19.80	56.45	74.00	-17.55	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17597.4329	26.66	18.03	44.69	54.00	-9.31	Horizontal
2	17785.2976	25.90	18.74	44.64	54.00	-9.36	Horizontal
3	17984.6641	26.29	19.80	46.09	54.00	-7.91	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5795	Vertical	PASS

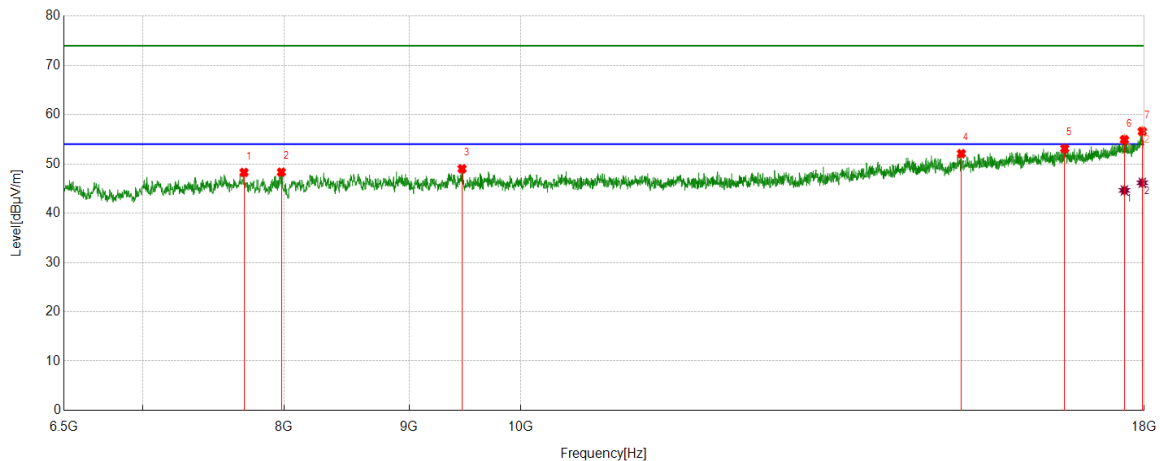

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7703.8673	42.84	5.44	48.28	74.00	-25.72	Vertical
2	7979.9133	42.96	5.36	48.32	74.00	-25.68	Vertical
3	9461.7436	42.49	6.53	49.02	74.00	-24.98	Vertical
4	15149.4416	38.83	13.26	52.09	74.00	-21.91	Vertical
5	16700.2834	37.07	16.06	53.13	74.00	-20.87	Vertical
6	17666.4444	36.86	18.07	54.93	74.00	-19.07	Vertical
7	17967.4112	36.98	19.63	56.61	74.00	-17.39	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17666.4444	26.56	18.07	44.63	54.00	-9.37	Vertical
2	17967.4112	26.54	19.63	46.17	54.00	-7.83	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5180	Horizontal	PASS

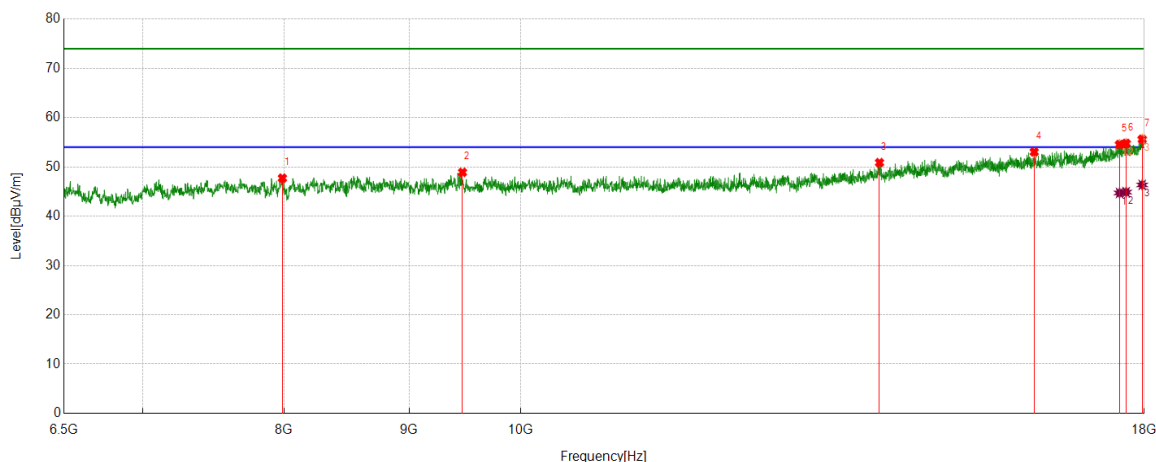

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7987.5813	42.17	5.55	47.72	74.00	-26.28	Horizontal
2	9465.5776	42.40	6.50	48.90	74.00	-25.10	Horizontal
3	14024.1707	38.99	11.88	50.87	74.00	-23.13	Horizontal
4	16226.7878	37.67	15.37	53.04	74.00	-20.96	Horizontal
5	17585.9310	36.53	18.01	54.54	74.00	-19.46	Horizontal
6	17695.1992	36.54	18.23	54.77	74.00	-19.23	Horizontal
7	17965.4942	35.98	19.63	55.61	74.00	-18.39	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17585.9310	26.71	18.01	44.72	54.00	-9.28	Horizontal
2	17695.1992	26.66	18.23	44.89	54.00	-9.11	Horizontal
3	17965.4942	26.72	19.63	46.35	54.00	-7.65	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5180	Vertical	PASS

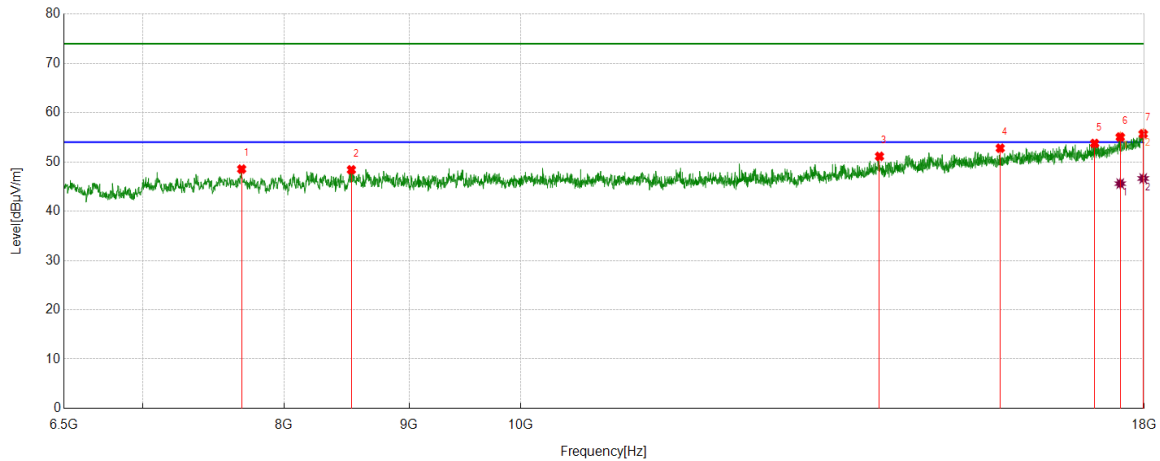

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7686.6144	43.35	5.19	48.54	74.00	-25.46	Vertical
2	8524.3374	42.08	6.32	48.40	74.00	-25.60	Vertical
3	14024.1707	39.25	11.88	51.13	74.00	-22.87	Vertical
4	15714.9525	38.73	14.05	52.78	74.00	-21.22	Vertical
5	17177.6129	37.19	16.56	53.75	74.00	-20.25	Vertical
6	17597.4329	37.03	18.03	55.06	74.00	-18.94	Vertical
7	17982.7471	35.89	19.81	55.70	74.00	-18.30	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17597.4329	27.57	18.03	45.60	54.00	-8.40	Vertical
2	17982.7471	26.83	19.81	46.64	54.00	-7.36	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5200	Horizontal	PASS

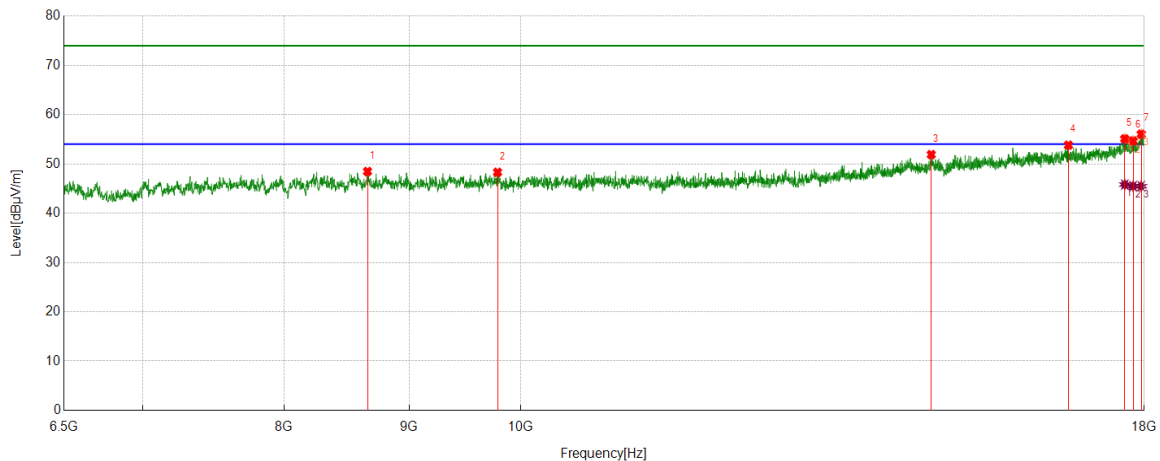

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8654.6924	42.20	6.27	48.47	74.00	-25.53	Horizontal
2	9783.7973	41.89	6.42	48.31	74.00	-25.69	Horizontal
3	14725.7876	39.10	12.80	51.90	74.00	-22.10	Horizontal
4	16757.7930	37.67	16.14	53.81	74.00	-20.19	Horizontal
5	17672.1954	37.01	18.08	55.09	74.00	-18.91	Horizontal
6	17812.1354	35.73	18.94	54.67	74.00	-19.33	Horizontal
7	17950.1584	36.56	19.49	56.05	74.00	-17.95	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17672.1954	27.73	18.08	45.81	54.00	-8.19	Horizontal
2	17812.1354	26.55	18.94	45.49	54.00	-8.51	Horizontal
3	17950.1584	25.99	19.49	45.48	54.00	-8.52	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5200	Vertical	PASS

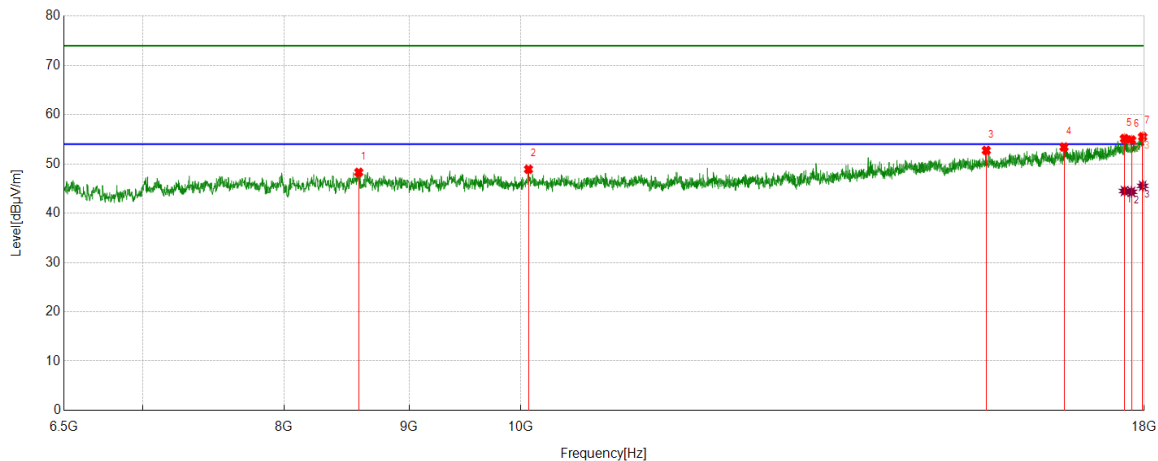

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8583.7640	42.06	6.24	48.30	74.00	-25.70	Vertical
2	10073.2622	42.29	6.62	48.91	74.00	-25.09	Vertical
3	15509.8350	38.90	13.84	52.74	74.00	-21.26	Vertical
4	16688.7815	37.71	15.71	53.42	74.00	-20.58	Vertical
5	17668.3614	37.08	18.07	55.15	74.00	-18.85	Vertical
6	17785.2976	36.11	18.74	54.85	74.00	-19.15	Vertical
7	17973.1622	35.83	19.69	55.52	74.00	-18.48	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17668.3614	26.43	18.07	44.50	54.00	-9.50	Vertical
2	17785.2976	25.59	18.74	44.33	54.00	-9.67	Vertical
3	17973.1622	25.86	19.69	45.55	54.00	-8.45	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5240	Horizontal	PASS

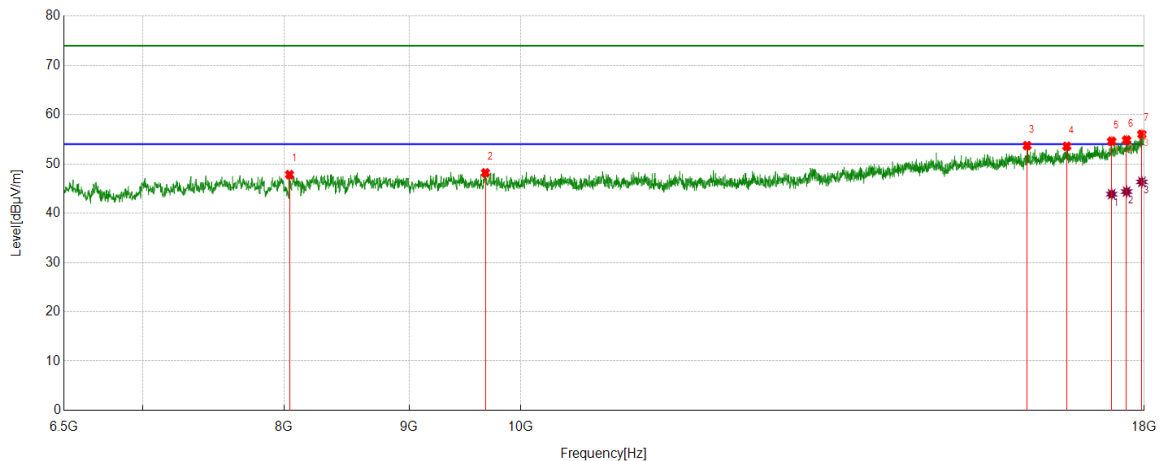

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8041.2569	42.22	5.61	47.83	74.00	-26.17	Horizontal
2	9672.6121	41.71	6.49	48.20	74.00	-25.80	Horizontal
3	16117.5196	38.84	14.88	53.72	74.00	-20.28	Horizontal
4	16732.8721	37.50	16.08	53.58	74.00	-20.42	Horizontal
5	17455.5759	36.98	17.62	54.60	74.00	-19.40	Horizontal
6	17702.8671	36.54	18.30	54.84	74.00	-19.16	Horizontal
7	17959.7433	36.40	19.63	56.03	74.00	-17.97	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17455.5759	26.24	17.62	43.86	54.00	-10.14	Horizontal
2	17702.8671	26.08	18.30	44.38	54.00	-9.62	Horizontal
3	17959.7433	26.73	19.63	46.36	54.00	-7.64	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11ax HE20	5240	Vertical	PASS

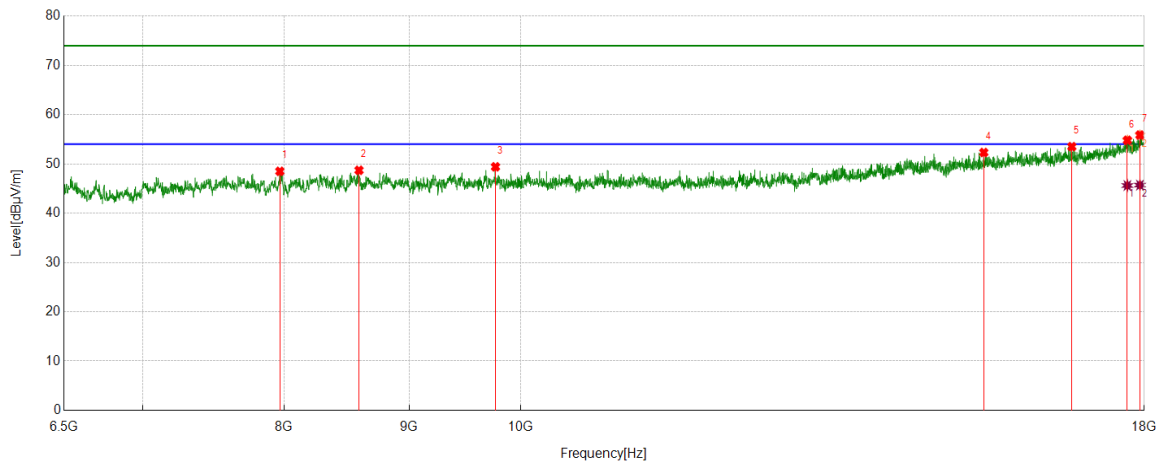

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7968.4114	43.02	5.48	48.50	74.00	-25.50	Vertical
2	8585.6809	42.57	6.14	48.71	74.00	-25.29	Vertical
3	9764.6274	42.92	6.49	49.41	74.00	-24.59	Vertical
4	15473.4122	38.34	13.98	52.32	74.00	-21.68	Vertical
5	16813.3856	37.25	16.26	53.51	74.00	-20.49	Vertical
6	17716.2860	36.37	18.43	54.80	74.00	-19.20	Vertical
7	17927.1545	36.49	19.37	55.86	74.00	-18.14	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17716.2860	27.19	18.43	45.62	54.00	-8.38	Vertical
2	17927.1545	26.33	19.37	45.70	54.00	-8.30	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5260	Horizontal	PASS

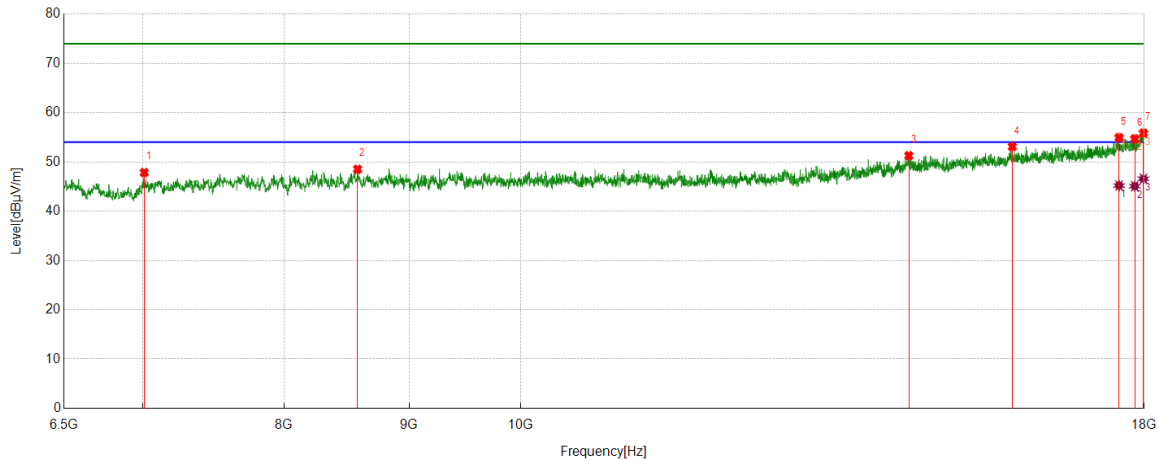

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7011.8353	44.27	3.57	47.84	74.00	-26.16	Horizontal
2	8574.1790	42.20	6.31	48.51	74.00	-25.49	Horizontal
3	14417.1529	38.36	12.91	51.27	74.00	-22.73	Horizontal
4	15895.1492	38.51	14.59	53.10	74.00	-20.90	Horizontal
5	17578.2630	37.00	17.94	54.94	74.00	-19.06	Horizontal
6	17840.8901	35.60	19.08	54.68	74.00	-19.32	Horizontal
7	17986.5811	36.05	19.80	55.85	74.00	-18.15	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17578.2630	27.27	17.94	45.21	54.00	-8.79	Horizontal
2	17840.8901	26.00	19.08	45.08	54.00	-8.92	Horizontal
3	17986.5811	26.79	19.80	46.59	54.00	-7.41	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5260	Vertical	PASS

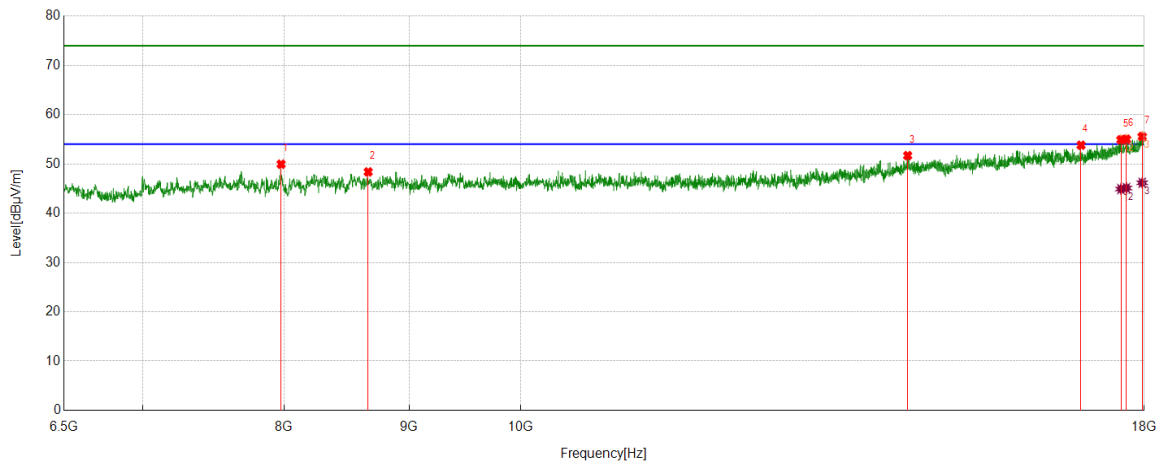

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7977.9963	44.58	5.37	49.95	74.00	-24.05	Vertical
2	8660.4434	41.93	6.45	48.38	74.00	-25.62	Vertical
3	14401.8170	38.94	12.76	51.70	74.00	-22.30	Vertical
4	16959.0765	37.70	16.10	53.80	74.00	-20.20	Vertical
5	17608.9348	36.85	18.06	54.91	74.00	-19.09	Vertical
6	17700.9502	36.74	18.28	55.02	74.00	-18.98	Vertical
7	17965.4942	35.94	19.63	55.57	74.00	-18.43	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17608.9348	26.85	18.06	44.91	54.00	-9.09	Vertical
2	17700.9502	26.82	18.28	45.10	54.00	-8.90	Vertical
3	17965.4942	26.54	19.63	46.17	54.00	-7.83	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5280	Horizontal	PASS

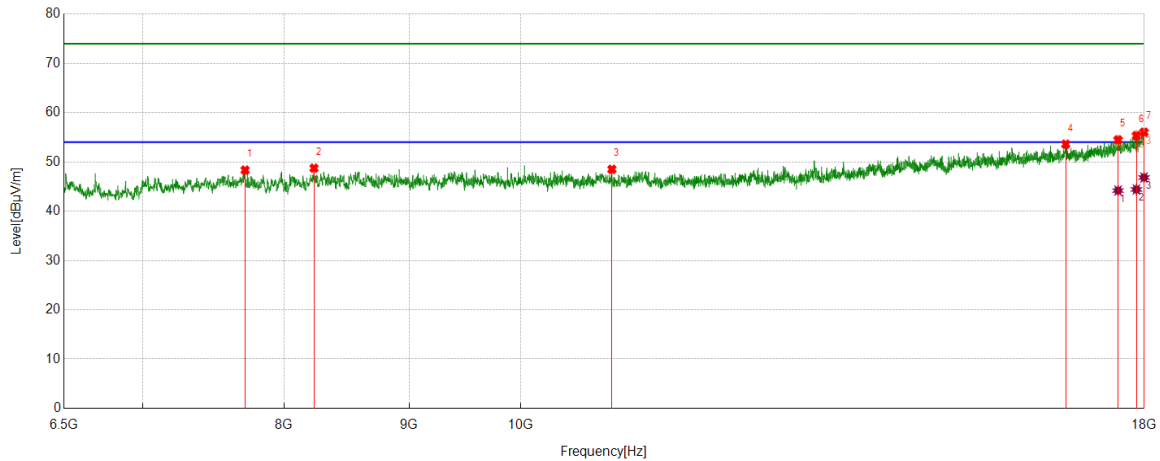

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7711.5353	43.17	5.16	48.33	74.00	-25.67	Horizontal
2	8229.1215	42.65	6.09	48.74	74.00	-25.26	Horizontal
3	10897.5663	41.30	7.20	48.50	74.00	-25.50	Horizontal
4	16715.6193	37.53	16.07	53.60	74.00	-20.40	Horizontal
5	17561.0102	36.68	17.79	54.47	74.00	-19.53	Horizontal
6	17867.7280	36.13	19.21	55.34	74.00	-18.66	Horizontal
7	17996.1660	36.27	19.76	56.03	74.00	-17.97	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17561.0102	26.40	17.79	44.19	54.00	-9.81	Horizontal
2	17867.7280	25.21	19.21	44.42	54.00	-9.58	Horizontal
3	17996.1660	27.07	19.76	46.83	54.00	-7.17	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5280	Vertical	PASS

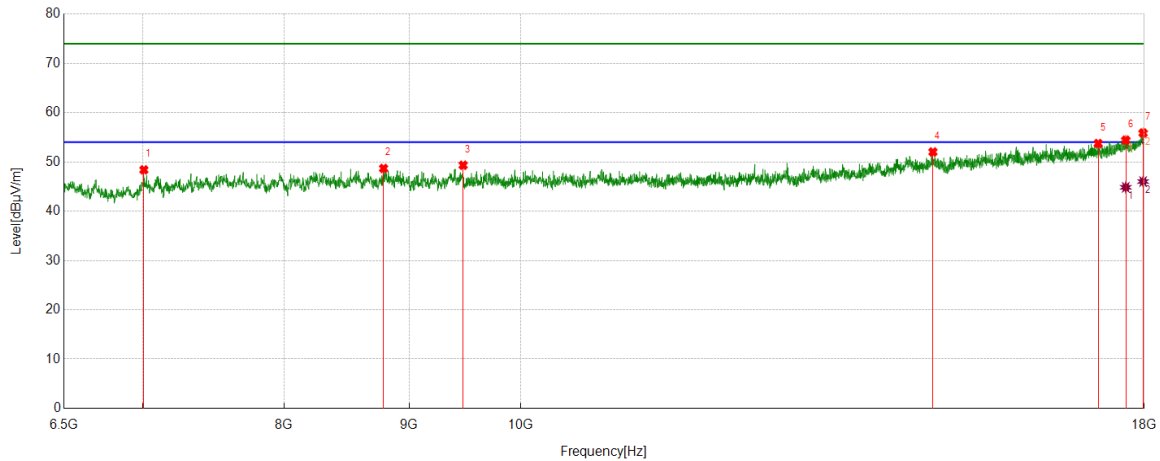

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7009.9183	44.87	3.52	48.39	74.00	-25.61	Vertical
2	8786.9645	42.47	6.21	48.68	74.00	-25.32	Vertical
3	9471.3286	42.88	6.45	49.33	74.00	-24.67	Vertical
4	14748.7915	39.16	12.86	52.02	74.00	-21.98	Vertical
5	17235.1225	36.97	16.76	53.73	74.00	-20.27	Vertical
6	17689.4482	36.23	18.18	54.41	74.00	-19.59	Vertical
7	17980.8301	36.06	19.81	55.87	74.00	-18.13	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17689.4482	26.67	18.18	44.85	54.00	-9.15	Vertical
2	17980.8301	26.21	19.81	46.02	54.00	-7.98	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5320	Horizontal	PASS

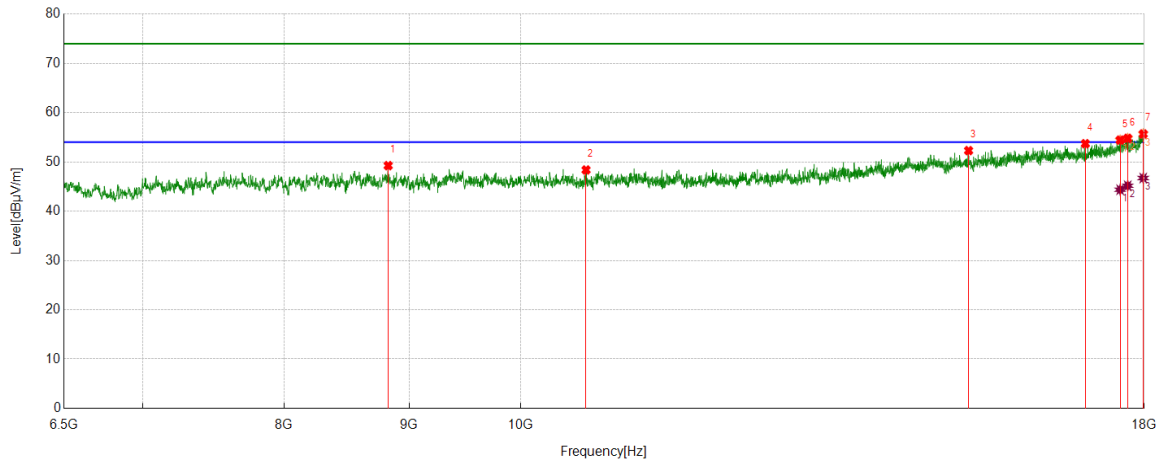

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8825.3042	43.00	6.25	49.25	74.00	-24.75	Horizontal
2	10634.9392	41.43	6.94	48.37	74.00	-25.63	Horizontal
3	15252.9588	38.87	13.43	52.30	74.00	-21.70	Horizontal
4	17028.0880	37.55	16.15	53.70	74.00	-20.30	Horizontal
5	17595.5159	36.39	18.04	54.43	74.00	-19.57	Horizontal
6	17722.0370	36.30	18.49	54.79	74.00	-19.21	Horizontal
7	17982.7471	35.87	19.81	55.68	74.00	-18.32	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17595.5159	26.32	18.04	44.36	54.00	-9.64	Horizontal
2	17722.0370	26.68	18.49	45.17	54.00	-8.83	Horizontal
3	17982.7471	26.92	19.81	46.73	54.00	-7.27	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5320	Vertical	PASS

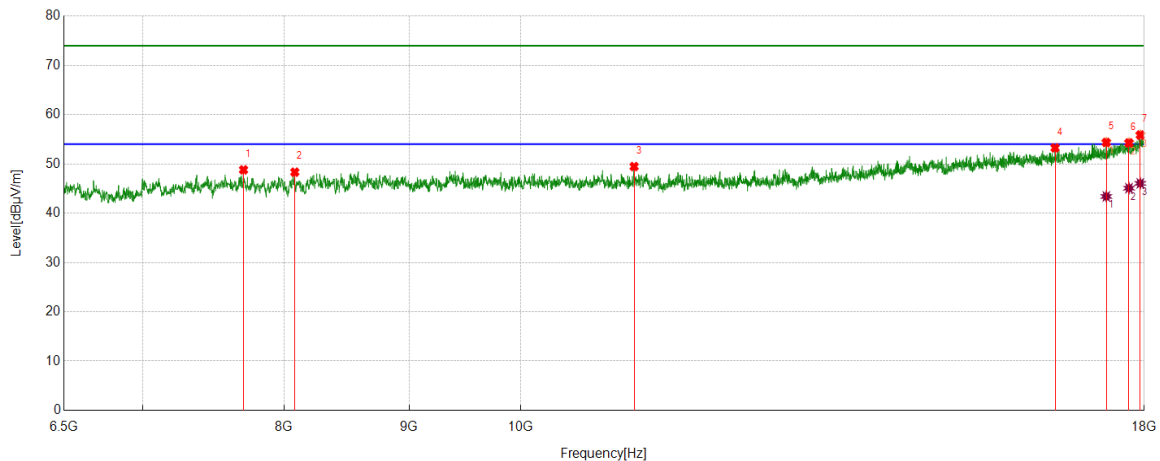

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7700.0333	43.18	5.62	48.80	74.00	-25.20	Vertical
2	8081.5136	42.87	5.46	48.33	74.00	-25.67	Vertical
3	11127.6046	42.20	7.27	49.47	74.00	-24.53	Vertical
4	16548.8415	37.41	15.85	53.26	74.00	-20.74	Vertical
5	17367.3946	37.04	17.32	54.36	74.00	-19.64	Vertical
6	17743.1239	35.70	18.57	54.27	74.00	-19.73	Vertical
7	17932.9055	36.48	19.39	55.87	74.00	-18.13	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17367.3946	26.08	17.32	43.40	54.00	-10.60	Vertical
2	17743.1239	26.51	18.57	45.08	54.00	-8.92	Vertical
3	17932.9055	26.67	19.39	46.06	54.00	-7.94	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5500	Horizontal	PASS

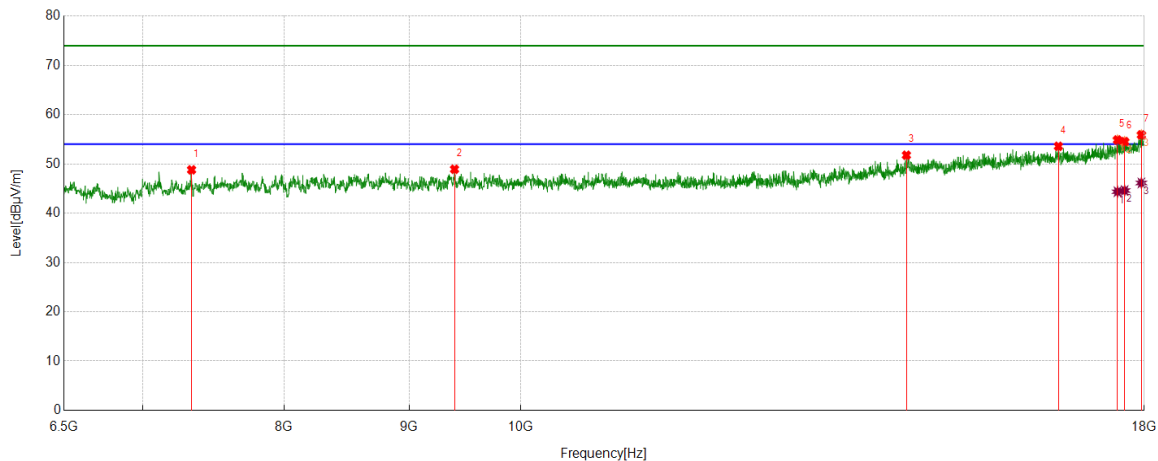

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7331.9720	44.91	3.89	48.80	74.00	-25.20	Horizontal
2	9394.6491	42.34	6.58	48.92	74.00	-25.08	Horizontal
3	14384.5641	39.02	12.75	51.77	74.00	-22.23	Horizontal
4	16600.6001	37.65	15.93	53.58	74.00	-20.42	Horizontal
5	17551.4252	37.13	17.74	54.87	74.00	-19.13	Horizontal
6	17670.2784	36.46	18.07	54.53	74.00	-19.47	Horizontal
7	17952.0753	36.38	19.52	55.90	74.00	-18.10	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17551.4252	26.62	17.74	44.36	54.00	-9.64	Horizontal
2	17670.2784	26.53	18.07	44.60	54.00	-9.40	Horizontal
3	17952.0753	26.62	19.52	46.14	54.00	-7.86	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11ax HE20	5500	Vertical	PASS

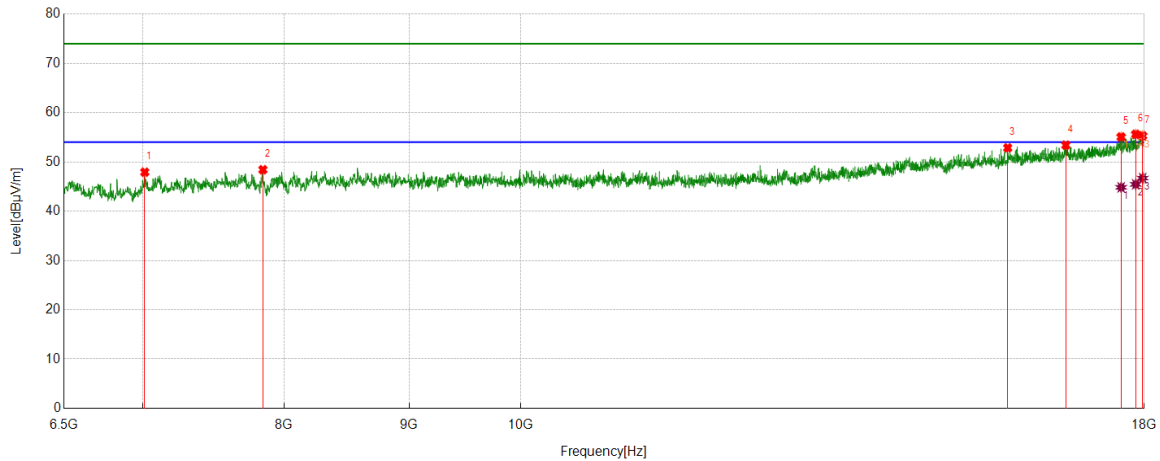

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7015.6693	44.26	3.66	47.92	74.00	-26.08	Vertical
2	7841.8903	43.06	5.36	48.42	74.00	-25.58	Vertical
3	15826.1377	38.35	14.50	52.85	74.00	-21.15	Vertical
4	16717.5363	37.23	16.18	53.41	74.00	-20.59	Vertical
5	17612.7688	37.01	18.06	55.07	74.00	-18.93	Vertical
6	17856.2260	36.39	19.22	55.61	74.00	-18.39	Vertical
7	17973.1622	35.62	19.69	55.31	74.00	-18.69	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17612.7688	26.78	18.06	44.84	54.00	-9.16	Vertical
2	17856.2260	26.23	19.22	45.45	54.00	-8.55	Vertical
3	17973.1622	27.03	19.69	46.72	54.00	-7.28	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5580	Horizontal	PASS

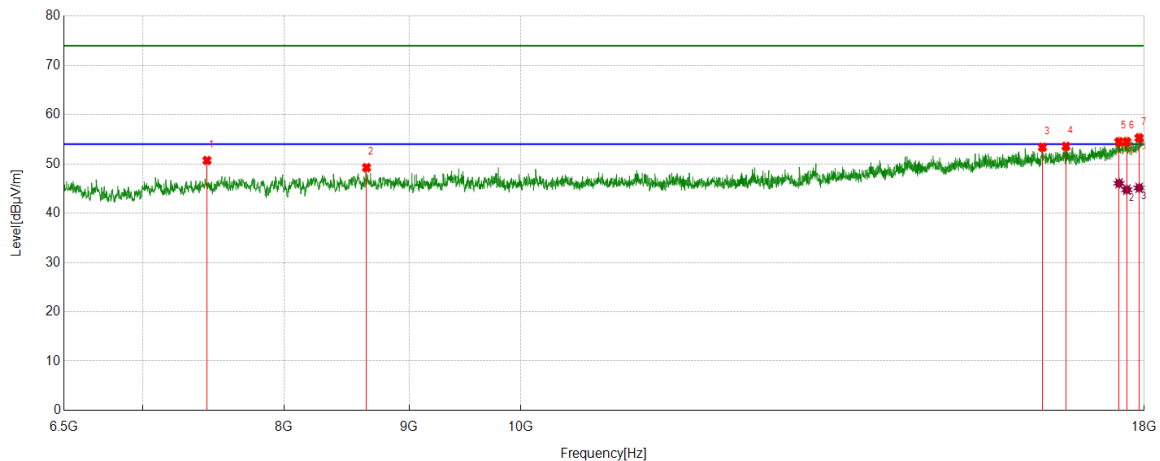

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7439.3232	46.50	4.20	50.70	74.00	-23.30	Horizontal
2	8647.0245	43.16	6.09	49.25	74.00	-24.75	Horizontal
3	16353.3089	38.37	15.02	53.39	74.00	-20.61	Horizontal
4	16719.4532	37.27	16.30	53.57	74.00	-20.43	Horizontal
5	17576.3461	36.57	17.93	54.50	74.00	-19.50	Horizontal
6	17706.7011	36.18	18.33	54.51	74.00	-19.49	Horizontal
7	17913.7356	36.00	19.29	55.29	74.00	-18.71	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17576.3461	28.14	17.93	46.07	54.00	-7.93	Horizontal
2	17706.7011	26.44	18.33	44.77	54.00	-9.23	Horizontal
3	17913.7356	25.85	19.29	45.14	54.00	-8.86	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5580	Vertical	PASS

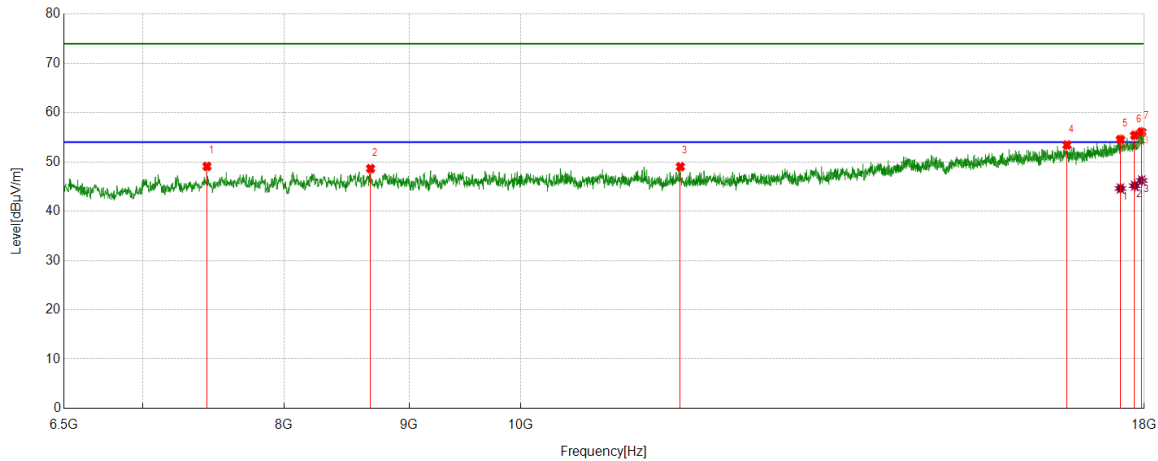

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7439.3232	44.90	4.20	49.10	74.00	-24.90	Vertical
2	8679.6133	42.52	6.13	48.65	74.00	-25.35	Vertical
3	11624.1040	41.45	7.58	49.03	74.00	-24.97	Vertical
4	16734.7891	37.40	16.04	53.44	74.00	-20.56	Vertical
5	17601.2669	36.52	18.03	54.55	74.00	-19.45	Vertical
6	17838.9732	36.31	19.09	55.40	74.00	-18.60	Vertical
7	17957.8263	36.49	19.60	56.09	74.00	-17.91	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17601.2669	26.58	18.03	44.61	54.00	-9.39	Vertical
2	17838.9732	26.09	19.09	45.18	54.00	-8.82	Vertical
3	17957.8263	26.63	19.60	46.23	54.00	-7.77	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5700	Horizontal	PASS

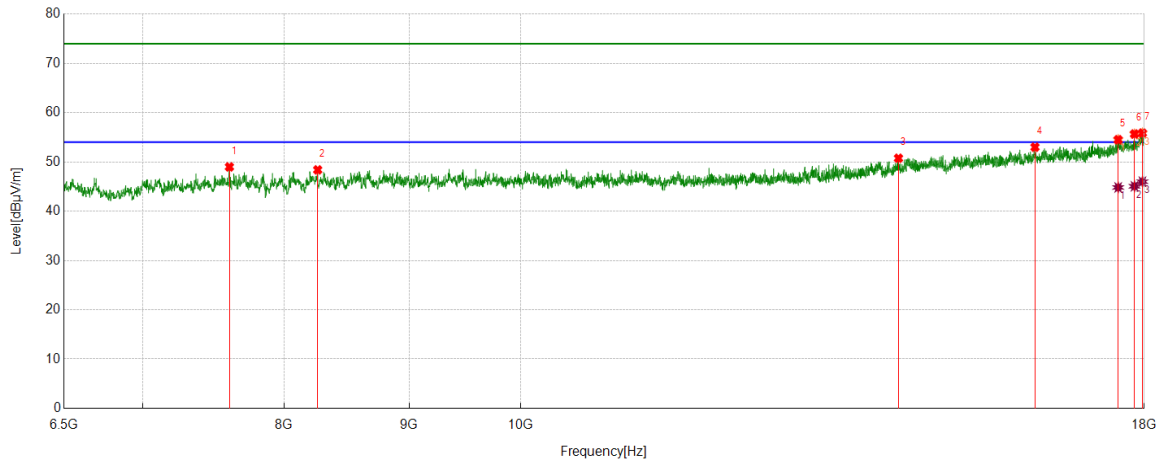

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7598.4331	44.03	4.96	48.99	74.00	-25.01	Horizontal
2	8257.8763	42.24	6.15	48.39	74.00	-25.61	Horizontal
3	14277.2129	38.62	12.13	50.75	74.00	-23.25	Horizontal
4	16238.2897	37.79	15.20	52.99	74.00	-21.01	Horizontal
5	17562.9272	36.69	17.82	54.51	74.00	-19.49	Horizontal
6	17835.1392	36.57	19.10	55.67	74.00	-18.33	Horizontal
7	17969.3282	36.23	19.63	55.86	74.00	-18.14	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17562.9272	27.00	17.82	44.82	54.00	-9.18	Horizontal
2	17835.1392	25.96	19.10	45.06	54.00	-8.94	Horizontal
3	17969.3282	26.36	19.63	45.99	54.00	-8.01	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5700	Vertical	PASS

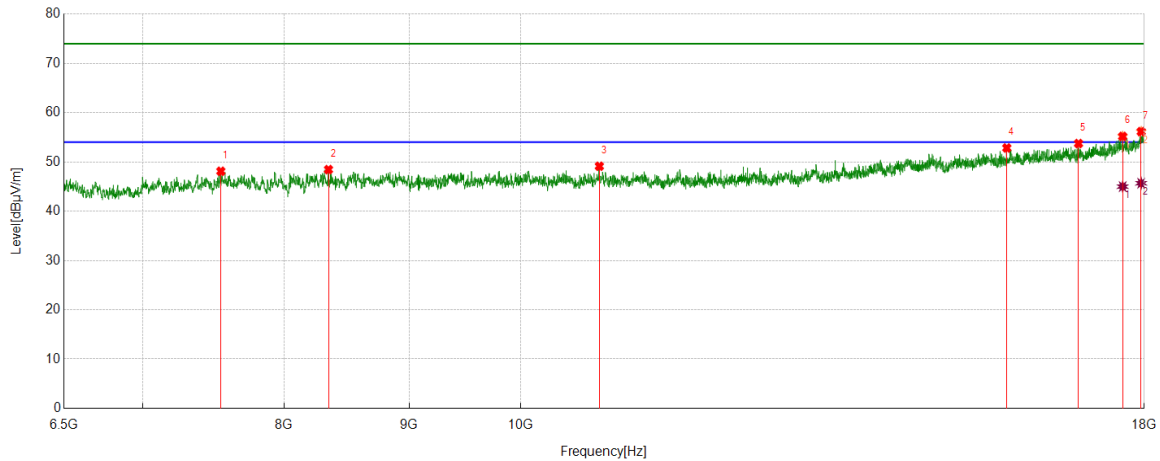

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7537.0895	43.60	4.51	48.11	74.00	-25.89	Vertical
2	8342.2237	42.61	5.84	48.45	74.00	-25.55	Vertical
3	10769.1282	42.02	7.11	49.13	74.00	-24.87	Vertical
4	15812.7188	38.51	14.32	52.83	74.00	-21.17	Vertical
5	16918.8198	37.63	16.10	53.73	74.00	-20.27	Vertical
6	17637.6896	37.17	18.01	55.18	74.00	-18.82	Vertical
7	17948.2414	36.67	19.48	56.15	74.00	-17.85	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17637.6896	26.98	18.01	44.99	54.00	-9.01	Vertical
2	17948.2414	26.20	19.48	45.68	54.00	-8.32	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5720	Horizontal	PASS

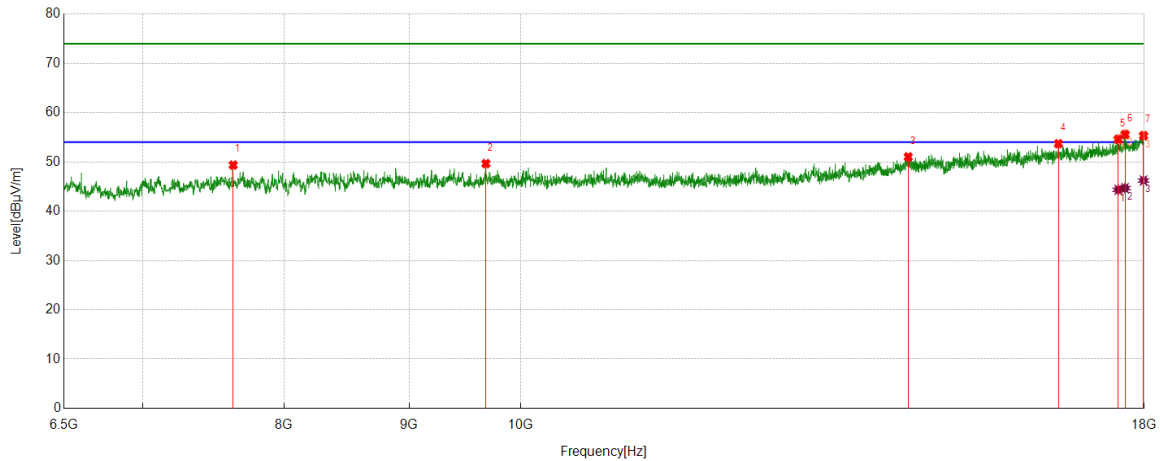

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7625.2709	44.18	5.18	49.36	74.00	-24.64	Horizontal
2	9676.4461	43.17	6.49	49.66	74.00	-24.34	Horizontal
3	14409.4849	38.16	12.88	51.04	74.00	-22.96	Horizontal
4	16600.6001	37.77	15.93	53.70	74.00	-20.30	Horizontal
5	17562.9272	36.78	17.82	54.60	74.00	-19.40	Horizontal
6	17677.9463	37.49	18.10	55.59	74.00	-18.41	Horizontal
7	17988.4981	35.53	19.81	55.34	74.00	-18.66	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17562.9272	26.53	17.82	44.35	54.00	-9.65	Horizontal
2	17677.9463	26.59	18.10	44.69	54.00	-9.31	Horizontal
3	17988.4981	26.42	19.81	46.23	54.00	-7.77	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5720	Vertical	PASS

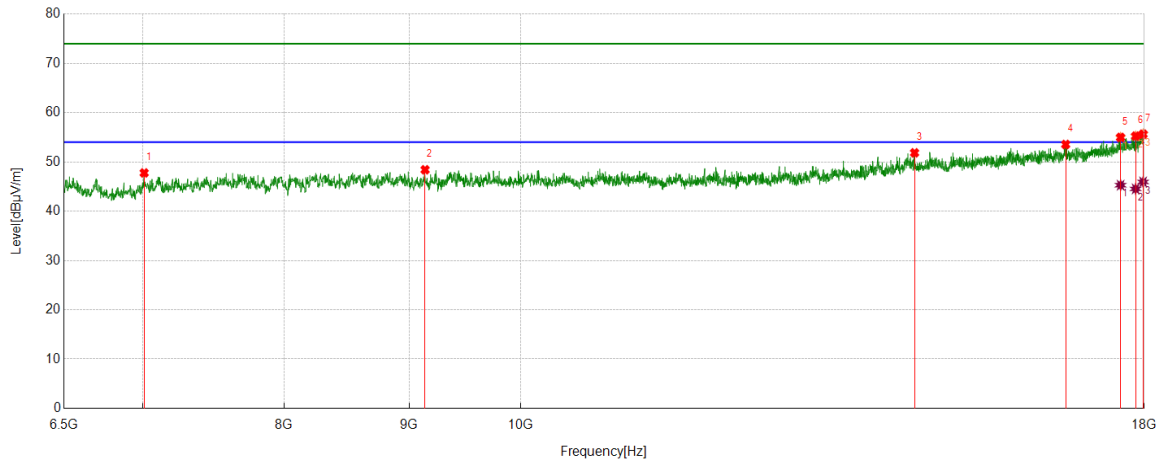

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7011.8353	44.20	3.57	47.77	74.00	-26.23	Vertical
2	9137.7730	42.58	5.83	48.41	74.00	-25.59	Vertical
3	14495.7493	39.02	12.83	51.85	74.00	-22.15	Vertical
4	16715.6193	37.48	16.07	53.55	74.00	-20.45	Vertical
5	17603.1839	36.94	18.04	54.98	74.00	-19.02	Vertical
6	17854.3091	36.05	19.19	55.24	74.00	-18.76	Vertical
7	17980.8301	35.83	19.81	55.64	74.00	-18.36	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17603.1839	27.24	18.04	45.28	54.00	-8.72	Vertical
2	17854.3091	25.34	19.19	44.53	54.00	-9.47	Vertical
3	17980.8301	26.13	19.81	45.94	54.00	-8.06	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5745	Horizontal	PASS

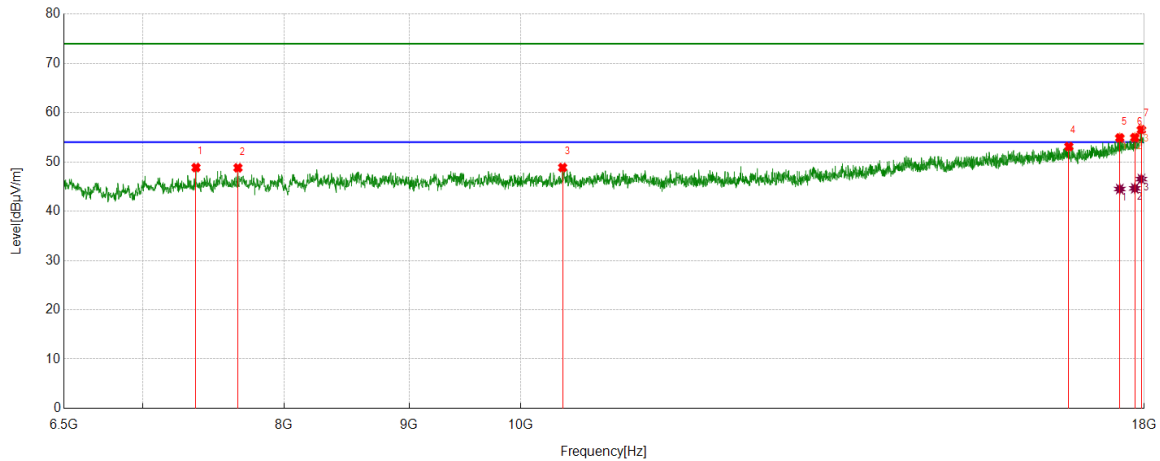

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7362.6438	44.64	4.21	48.85	74.00	-25.15	Horizontal
2	7659.7766	43.67	5.13	48.80	74.00	-25.20	Horizontal
3	10402.9838	42.16	6.70	48.86	74.00	-25.14	Horizontal
4	16765.4609	37.08	16.03	53.11	74.00	-20.89	Horizontal
5	17589.7650	36.84	18.04	54.88	74.00	-19.12	Horizontal
6	17840.8901	35.86	19.08	54.94	74.00	-19.06	Horizontal
7	17952.0753	37.02	19.52	56.54	74.00	-17.46	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17589.7650	26.46	18.04	44.50	54.00	-9.50	Horizontal
2	17840.8901	25.56	19.08	44.64	54.00	-9.36	Horizontal
3	17952.0753	27.00	19.52	46.52	54.00	-7.48	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11ax HE20	5745	Vertical	PASS

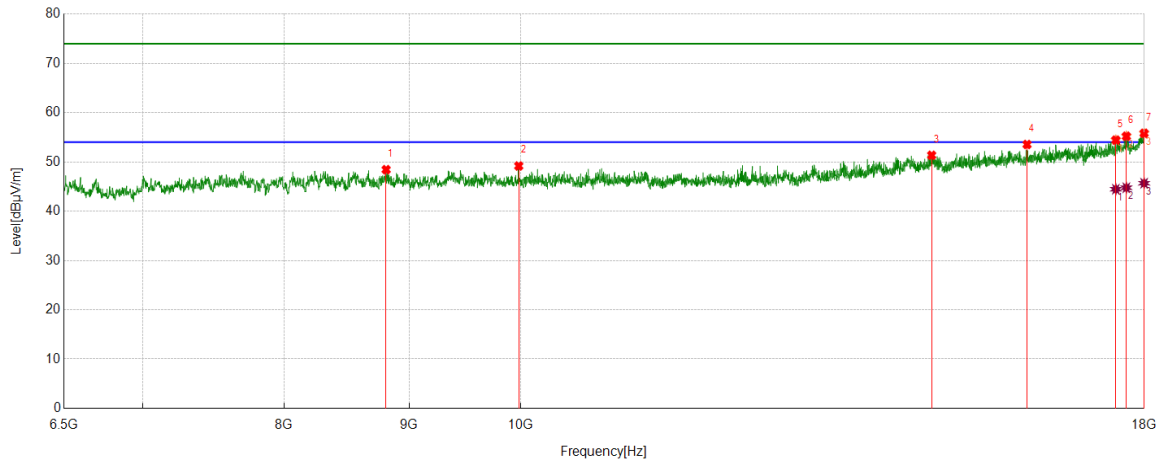

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8808.0513	42.14	6.29	48.43	74.00	-25.57	Vertical
2	9981.2469	42.59	6.59	49.18	74.00	-24.82	Vertical
3	14731.5386	38.54	12.81	51.35	74.00	-22.65	Vertical
4	16117.5196	38.66	14.88	53.54	74.00	-20.46	Vertical
5	17524.5874	36.84	17.59	54.43	74.00	-19.57	Vertical
6	17699.0332	36.95	18.26	55.21	74.00	-18.79	Vertical
7	17998.0830	36.06	19.75	55.81	74.00	-18.19	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17524.5874	26.87	17.59	44.46	54.00	-9.54	Vertical
2	17699.0332	26.50	18.26	44.76	54.00	-9.24	Vertical
3	17998.0830	25.93	19.75	45.68	54.00	-8.32	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5785	Horizontal	PASS

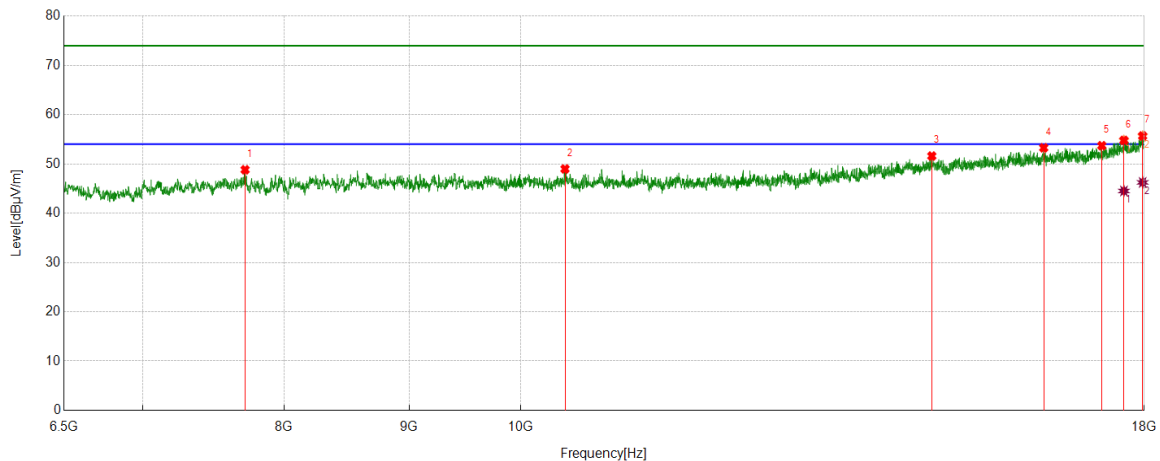

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7711.5353	43.66	5.16	48.82	74.00	-25.18	Horizontal
2	10425.9877	42.29	6.69	48.98	74.00	-25.02	Horizontal
3	14733.4556	38.78	12.83	51.61	74.00	-22.39	Horizontal
4	16372.4787	38.24	15.03	53.27	74.00	-20.73	Horizontal
5	17294.5491	36.67	17.03	53.70	74.00	-20.30	Horizontal
6	17658.7765	36.71	18.07	54.78	74.00	-19.22	Horizontal
7	17973.1622	35.99	19.69	55.68	74.00	-18.32	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17658.7765	26.44	18.07	44.51	54.00	-9.49	Horizontal
2	17973.1622	26.56	19.69	46.25	54.00	-7.75	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5785	Vertical	PASS

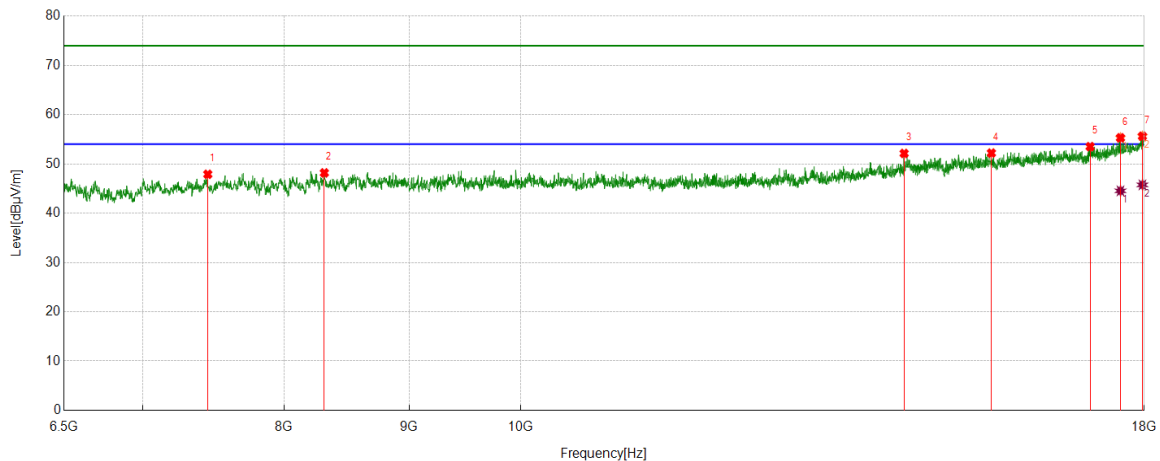

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7445.0742	43.76	4.14	47.90	74.00	-26.10	Vertical
2	8309.6349	41.84	6.34	48.18	74.00	-25.82	Vertical
3	14353.8923	39.48	12.65	52.13	74.00	-21.87	Vertical
4	15584.5974	38.55	13.66	52.21	74.00	-21.79	Vertical
5	17104.7675	37.08	16.43	53.51	74.00	-20.49	Vertical
6	17601.2669	37.27	18.03	55.30	74.00	-18.70	Vertical
7	17969.3282	36.00	19.63	55.63	74.00	-18.37	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17601.2669	26.51	18.03	44.54	54.00	-9.46	Vertical
2	17969.3282	26.12	19.63	45.75	54.00	-8.25	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5825	Horizontal	PASS

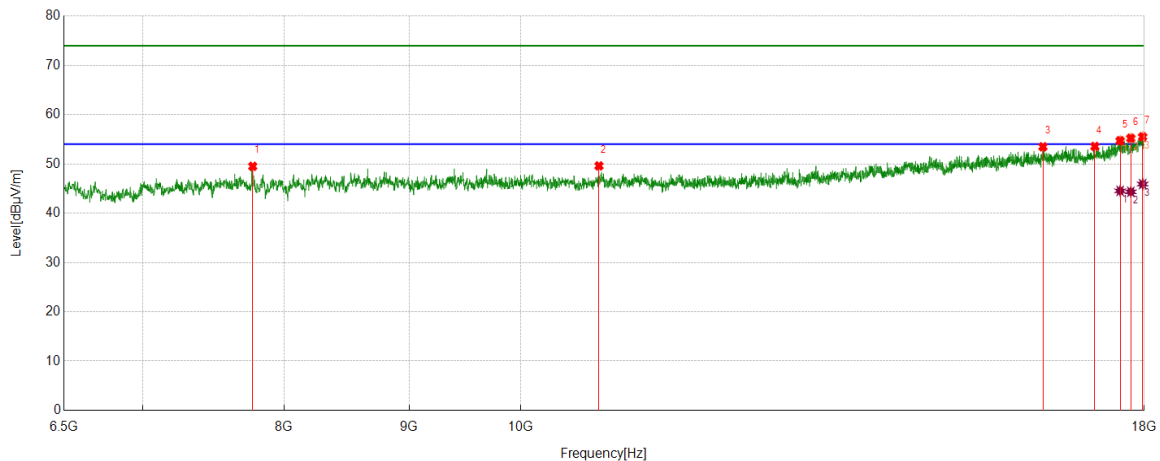

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7767.1279	44.50	5.01	49.51	74.00	-24.49	Horizontal
2	10765.2942	42.58	7.02	49.60	74.00	-24.40	Horizontal
3	16360.9768	38.46	15.02	53.48	74.00	-20.52	Horizontal
4	17181.4469	36.97	16.58	53.55	74.00	-20.45	Horizontal
5	17595.5159	36.68	18.04	54.72	74.00	-19.28	Horizontal
6	17773.7956	36.51	18.71	55.22	74.00	-18.78	Horizontal
7	17973.1622	35.82	19.69	55.51	74.00	-18.49	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17595.5159	26.50	18.04	44.54	54.00	-9.46	Horizontal
2	17773.7956	25.63	18.71	44.34	54.00	-9.66	Horizontal
3	17973.1622	26.22	19.69	45.91	54.00	-8.09	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5825	Vertical	PASS

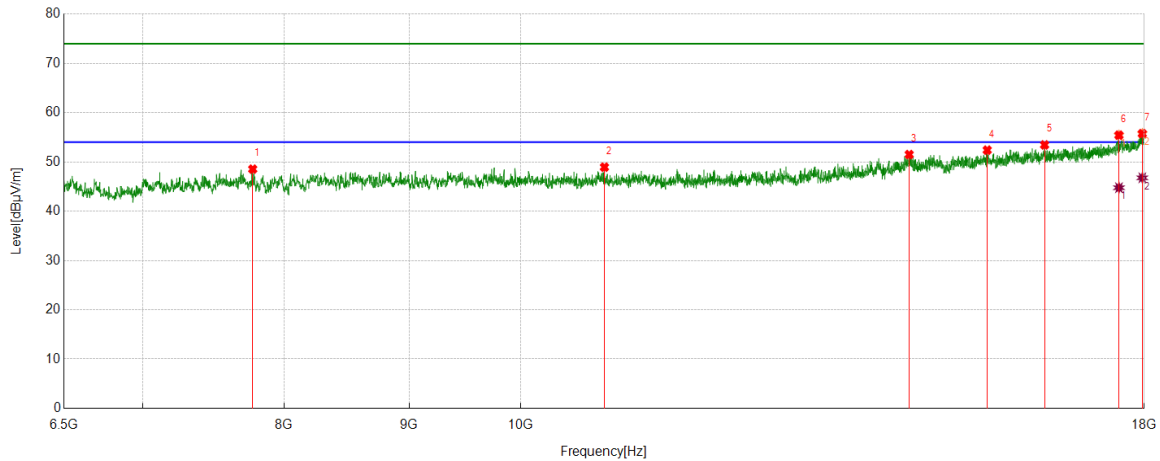

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7767.1279	43.53	5.01	48.54	74.00	-25.46	Vertical
2	10820.8868	42.02	6.92	48.94	74.00	-25.06	Vertical
3	14422.9038	38.60	12.90	51.50	74.00	-22.50	Vertical
4	15523.2539	38.58	13.82	52.40	74.00	-21.60	Vertical
5	16385.8976	38.44	15.02	53.46	74.00	-20.54	Vertical
6	17576.3461	37.50	17.93	55.43	74.00	-18.57	Vertical
7	17967.4112	36.12	19.63	55.75	74.00	-18.25	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17576.3461	26.84	17.93	44.77	54.00	-9.23	Vertical
2	17967.4112	27.15	19.63	46.78	54.00	-7.22	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5190	Horizontal	PASS

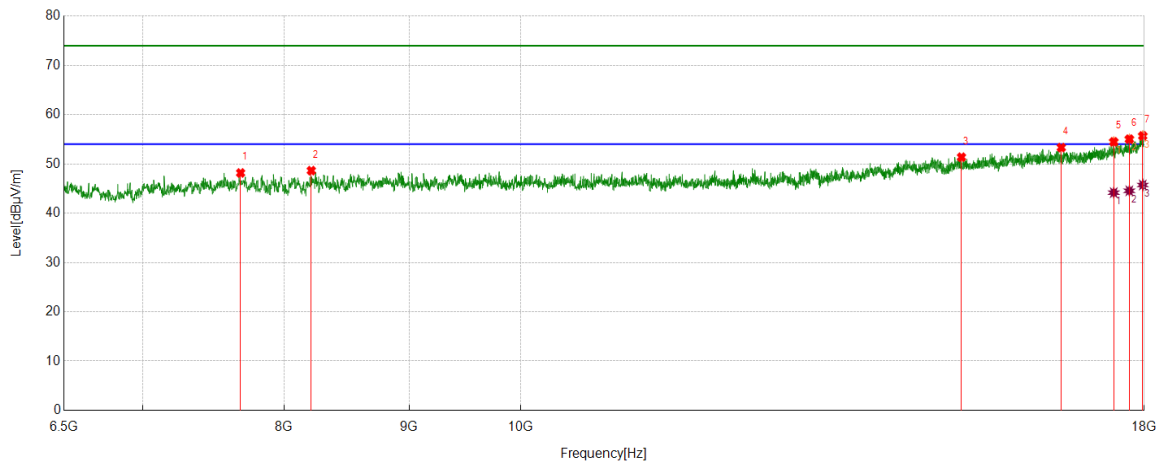

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7678.9465	42.84	5.33	48.17	74.00	-25.83	Horizontal
2	8208.0347	42.71	5.93	48.64	74.00	-25.36	Horizontal
3	15151.3586	38.12	13.25	51.37	74.00	-22.63	Horizontal
4	16646.6078	37.56	15.76	53.32	74.00	-20.68	Horizontal
5	17490.0817	36.84	17.65	54.49	74.00	-19.51	Horizontal
6	17748.8748	36.43	18.60	55.03	74.00	-18.97	Horizontal
7	17975.0792	35.97	19.73	55.70	74.00	-18.30	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17490.0817	26.52	17.65	44.17	54.00	-9.83	Horizontal
2	17748.8748	25.95	18.60	44.55	54.00	-9.45	Horizontal
3	17975.0792	26.00	19.73	45.73	54.00	-8.27	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5190	Vertical	PASS

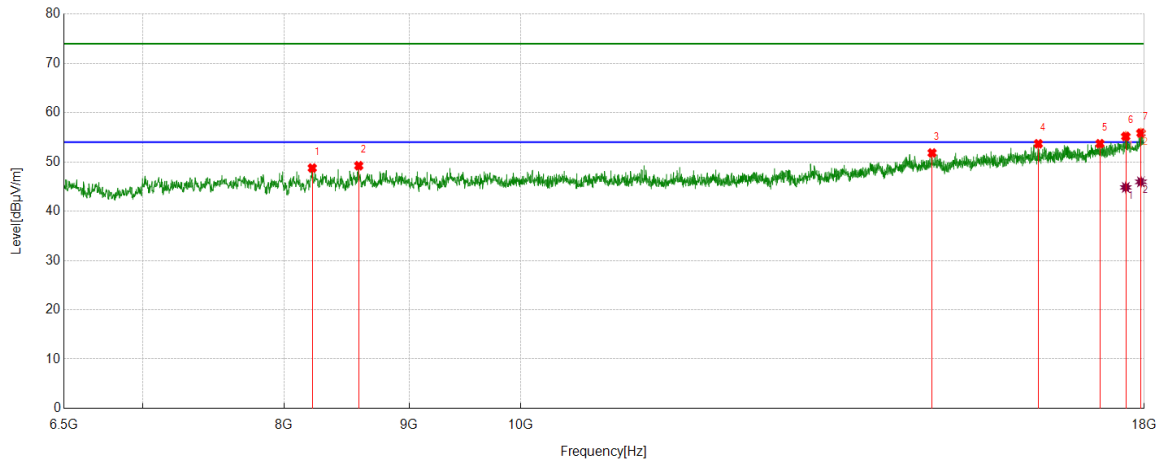

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8215.7026	42.74	6.02	48.76	74.00	-25.24	Vertical
2	8583.7640	42.99	6.24	49.23	74.00	-24.77	Vertical
3	14737.2895	38.95	12.87	51.82	74.00	-22.18	Vertical
4	16290.0483	38.76	14.92	53.68	74.00	-20.32	Vertical
5	17263.8773	36.84	16.86	53.70	74.00	-20.30	Vertical
6	17689.4482	37.00	18.18	55.18	74.00	-18.82	Vertical
7	17944.4074	36.40	19.46	55.86	74.00	-18.14	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17689.4482	26.65	18.18	44.83	54.00	-9.17	Vertical
2	17944.4074	26.50	19.46	45.96	54.00	-8.04	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5230	Horizontal	PASS

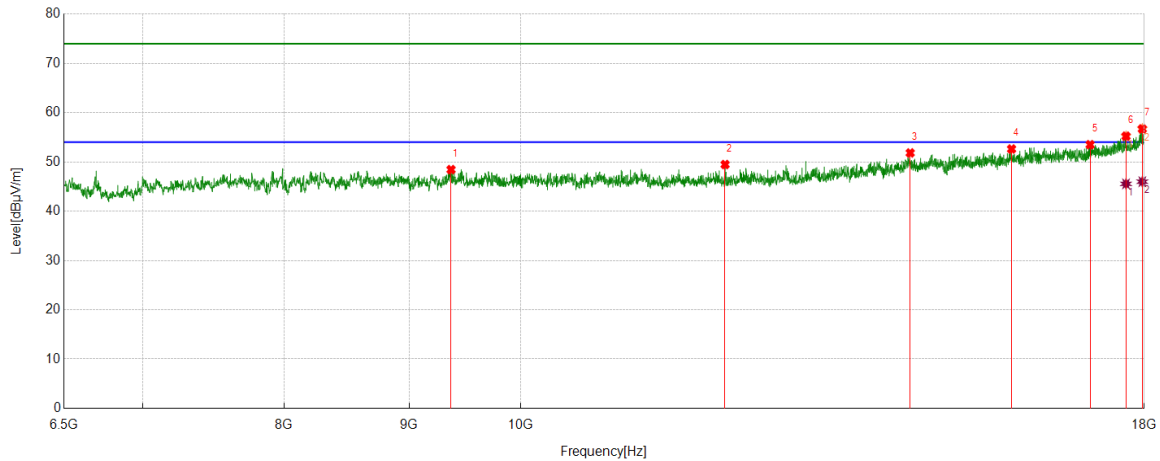

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9363.9773	41.97	6.47	48.44	74.00	-25.56	Horizontal
2	12124.4374	41.14	8.33	49.47	74.00	-24.53	Horizontal
3	14436.3227	38.96	12.87	51.83	74.00	-22.17	Horizontal
4	15883.6473	37.95	14.67	52.62	74.00	-21.38	Horizontal
5	17104.7675	37.07	16.43	53.50	74.00	-20.50	Horizontal
6	17693.2822	37.01	18.21	55.22	74.00	-18.78	Horizontal
7	17967.4112	37.07	19.63	56.70	74.00	-17.30	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17693.2822	27.34	18.21	45.55	54.00	-8.45	Horizontal
2	17967.4112	26.36	19.63	45.99	54.00	-8.01	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11ax HE40	5230	Vertical	PASS

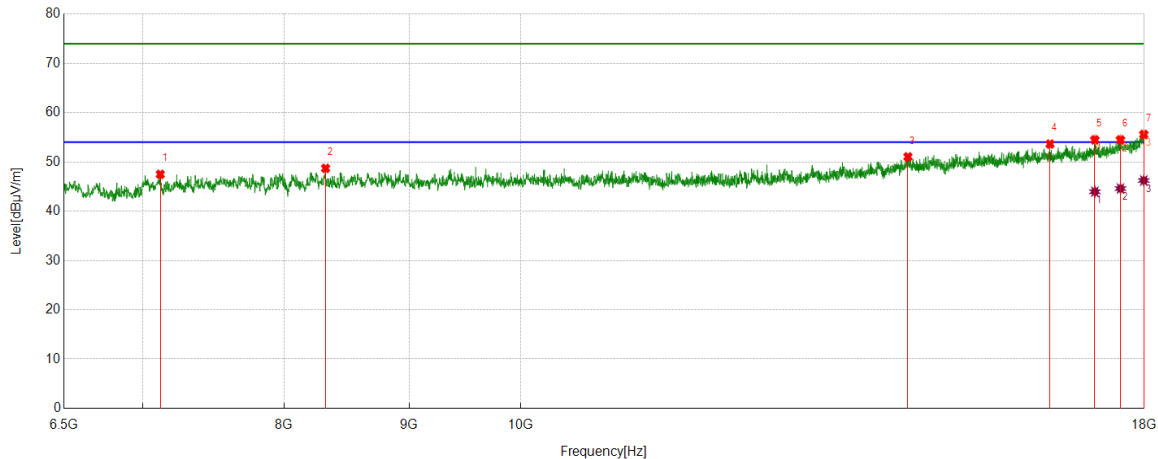

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7119.1865	43.51	3.97	47.48	74.00	-26.52	Vertical
2	8319.2199	42.78	5.92	48.70	74.00	-25.30	Vertical
3	14405.6509	38.22	12.82	51.04	74.00	-22.96	Vertical
4	16470.2450	37.93	15.70	53.63	74.00	-20.37	Vertical
5	17181.4469	37.90	16.58	54.48	74.00	-19.52	Vertical
6	17601.2669	36.45	18.03	54.48	74.00	-19.52	Vertical
7	17992.3321	35.80	19.79	55.59	74.00	-18.41	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17181.4469	27.38	16.58	43.96	54.00	-10.04	Vertical
2	17601.2669	26.57	18.03	44.60	54.00	-9.40	Vertical
3	17992.3321	26.44	19.79	46.23	54.00	-7.77	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5270	Horizontal	PASS

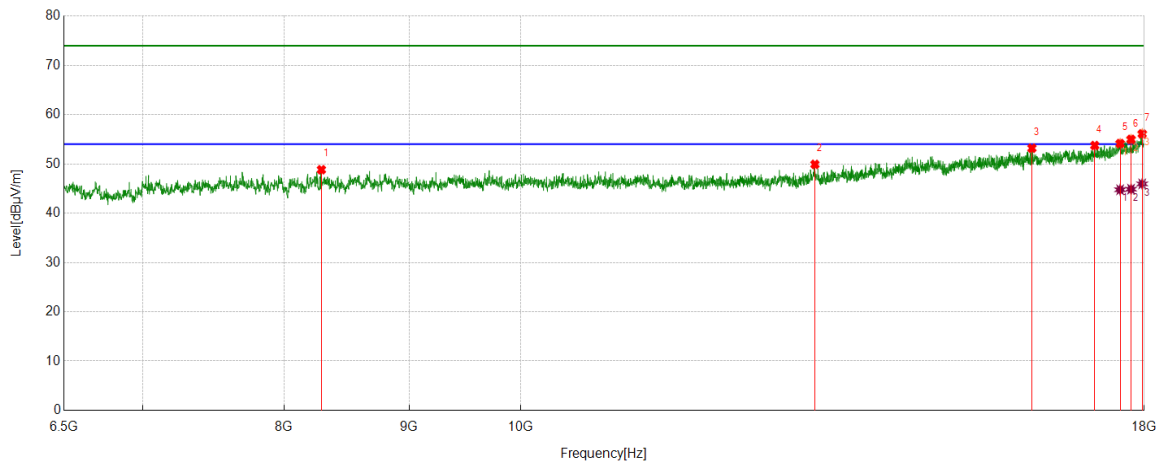

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8286.6311	42.64	6.19	48.83	74.00	-25.17	Horizontal
2	13196.0327	39.93	9.98	49.91	74.00	-24.09	Horizontal
3	16192.2820	37.89	15.30	53.19	74.00	-20.81	Horizontal
4	17179.5299	37.16	16.58	53.74	74.00	-20.26	Horizontal
5	17595.5159	36.10	18.04	54.14	74.00	-19.86	Horizontal
6	17777.6296	36.22	18.76	54.98	74.00	-19.02	Horizontal
7	17965.4942	36.48	19.63	56.11	74.00	-17.89	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17595.5159	26.72	18.04	44.76	54.00	-9.24	Horizontal
2	17777.6296	26.12	18.76	44.88	54.00	-9.12	Horizontal
3	17965.4942	26.32	19.63	45.95	54.00	-8.05	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5270	Vertical	PASS

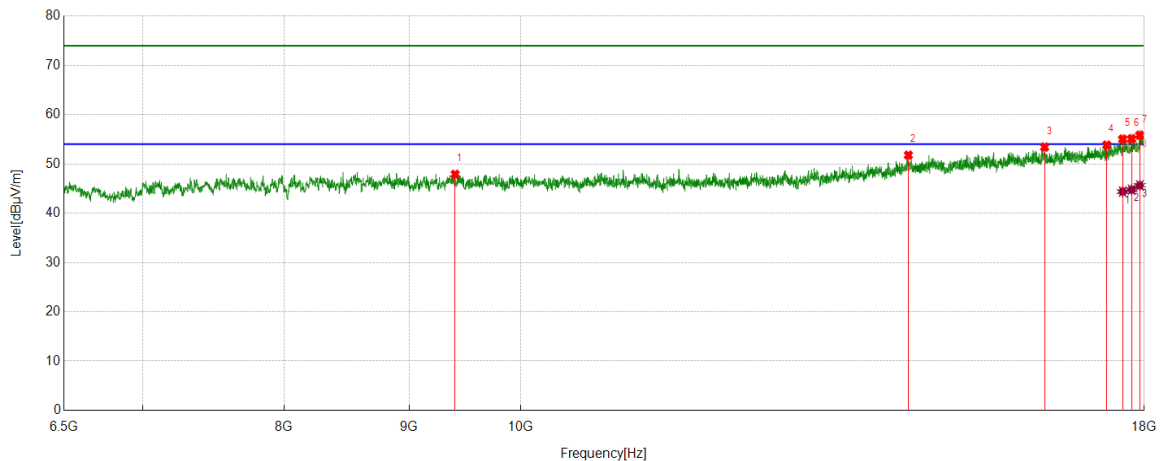

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9400.4001	41.29	6.61	47.90	74.00	-26.10	Vertical
2	14411.4019	38.89	12.89	51.78	74.00	-22.22	Vertical
3	16385.8976	38.40	15.02	53.42	74.00	-20.58	Vertical
4	17375.0625	36.48	17.34	53.82	74.00	-20.18	Vertical
5	17637.6896	37.02	18.01	55.03	74.00	-18.97	Vertical
6	17787.2145	36.39	18.72	55.11	74.00	-18.89	Vertical
7	17925.2375	36.46	19.37	55.83	74.00	-18.17	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17637.6896	26.37	18.01	44.38	54.00	-9.62	Vertical
2	17787.2145	26.05	18.72	44.77	54.00	-9.23	Vertical
3	17925.2375	26.28	19.37	45.65	54.00	-8.35	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5310	Horizontal	PASS

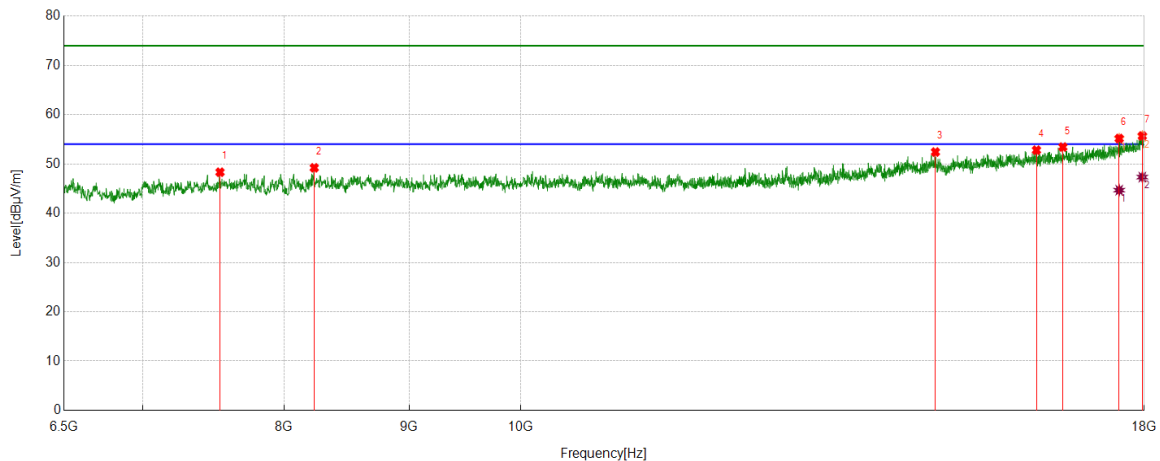

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7531.3386	43.94	4.38	48.32	74.00	-25.68	Horizontal
2	8231.0385	43.15	6.06	49.21	74.00	-24.79	Horizontal
3	14783.2972	39.57	12.85	52.42	74.00	-21.58	Horizontal
4	16261.2935	37.72	15.07	52.79	74.00	-21.21	Horizontal
5	16671.5286	37.65	15.78	53.43	74.00	-20.57	Horizontal
6	17580.1800	37.21	17.95	55.16	74.00	-18.84	Horizontal
7	17967.4112	36.05	19.63	55.68	74.00	-18.32	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17580.1800	26.72	17.95	44.67	54.00	-9.33	Horizontal
2	17967.4112	27.70	19.63	47.33	54.00	-6.67	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5310	Vertical	PASS

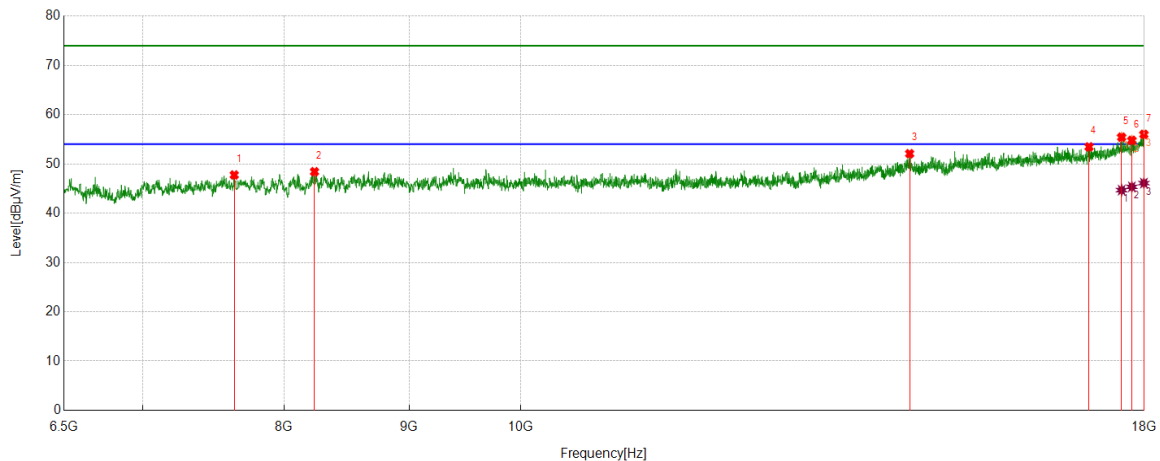

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7632.9388	42.59	5.17	47.76	74.00	-26.24	Vertical
2	8232.9555	42.40	6.02	48.42	74.00	-25.58	Vertical
3	14428.6548	39.20	12.88	52.08	74.00	-21.92	Vertical
4	17087.5146	37.07	16.39	53.46	74.00	-20.54	Vertical
5	17620.4367	37.36	18.07	55.43	74.00	-18.57	Vertical
6	17791.0485	36.08	18.71	54.79	74.00	-19.21	Vertical
7	17994.2490	36.23	19.77	56.00	74.00	-18.00	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17620.4367	26.61	18.07	44.68	54.00	-9.32	Vertical
2	17791.0485	26.64	18.71	45.35	54.00	-8.65	Vertical
3	17994.2490	26.34	19.77	46.11	54.00	-7.89	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5510	Horizontal	PASS

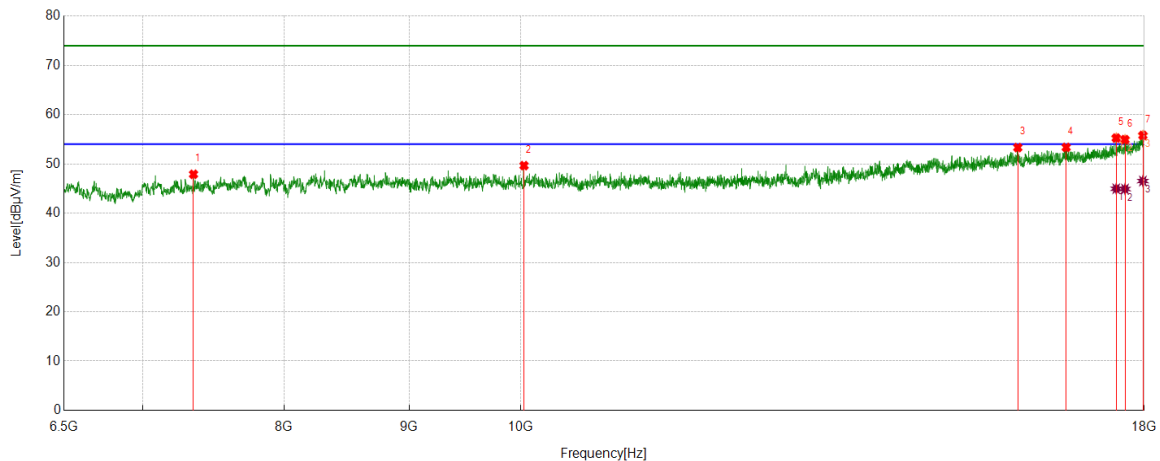

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7345.3909	43.87	4.03	47.90	74.00	-26.10	Horizontal
2	10031.0885	43.05	6.61	49.66	74.00	-24.34	Horizontal
3	15977.5796	38.78	14.54	53.32	74.00	-20.68	Horizontal
4	16723.2872	37.09	16.27	53.36	74.00	-20.64	Horizontal
5	17530.3384	37.69	17.57	55.26	74.00	-18.74	Horizontal
6	17676.0293	36.84	18.10	54.94	74.00	-19.06	Horizontal
7	17976.9962	36.04	19.75	55.79	74.00	-18.21	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17530.3384	27.39	17.57	44.96	54.00	-9.04	Horizontal
2	17676.0293	26.81	18.10	44.91	54.00	-9.09	Horizontal
3	17976.9962	26.78	19.75	46.53	54.00	-7.47	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5510	Vertical	PASS

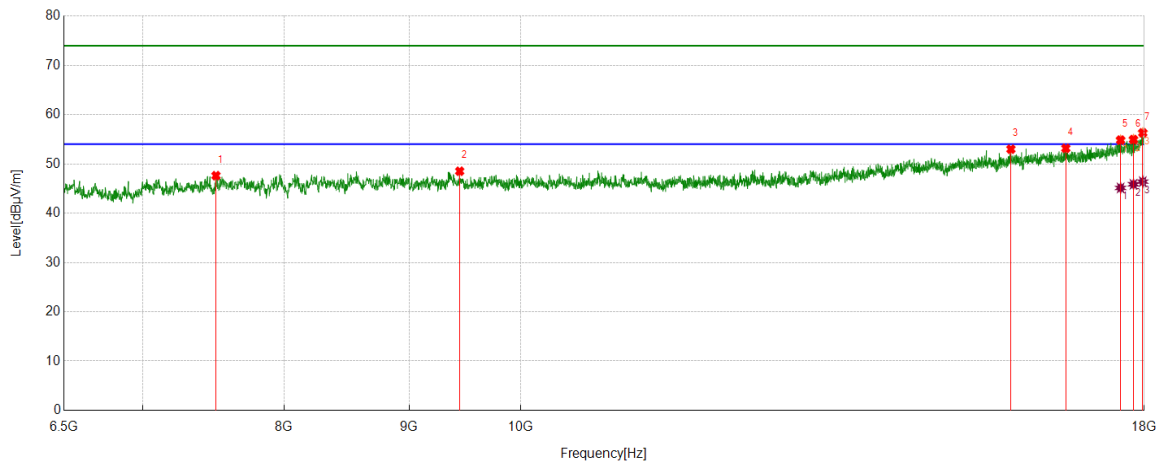

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7502.5838	43.31	4.31	47.62	74.00	-26.38	Vertical
2	9440.6568	41.91	6.61	48.52	74.00	-25.48	Vertical
3	15874.0623	38.29	14.70	52.99	74.00	-21.01	Vertical
4	16717.5363	36.98	16.18	53.16	74.00	-20.84	Vertical
5	17603.1839	36.80	18.04	54.84	74.00	-19.16	Vertical
6	17817.8863	36.03	18.92	54.95	74.00	-19.05	Vertical
7	17975.0792	36.58	19.73	56.31	74.00	-17.69	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17603.1839	27.09	18.04	45.13	54.00	-8.87	Vertical
2	17817.8863	26.95	18.92	45.87	54.00	-8.13	Vertical
3	17975.0792	26.68	19.73	46.41	54.00	-7.59	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5550	Horizontal	PASS

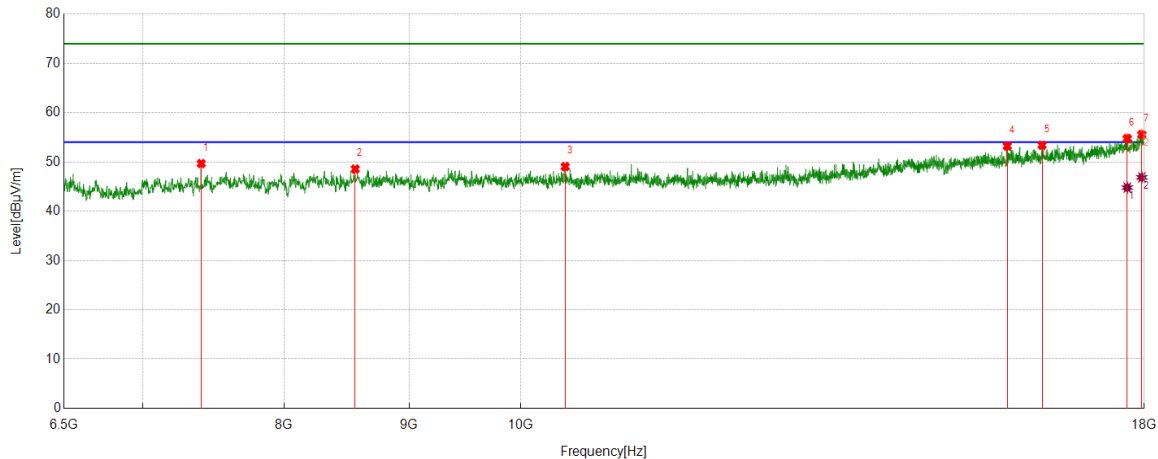

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7399.0665	45.42	4.25	49.67	74.00	-24.33	Horizontal
2	8555.0092	42.34	6.21	48.55	74.00	-25.45	Horizontal
3	10427.9047	42.34	6.71	49.05	74.00	-24.95	Horizontal
4	15818.4697	38.69	14.53	53.22	74.00	-20.78	Horizontal
5	16347.5579	38.37	15.02	53.39	74.00	-20.61	Horizontal
6	17714.3691	36.36	18.41	54.77	74.00	-19.23	Horizontal
7	17959.7433	35.94	19.63	55.57	74.00	-18.43	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17714.3691	26.38	18.41	44.79	54.00	-9.21	Horizontal
2	17959.7433	27.24	19.63	46.87	54.00	-7.13	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11ax HE40	5550	Vertical	PASS

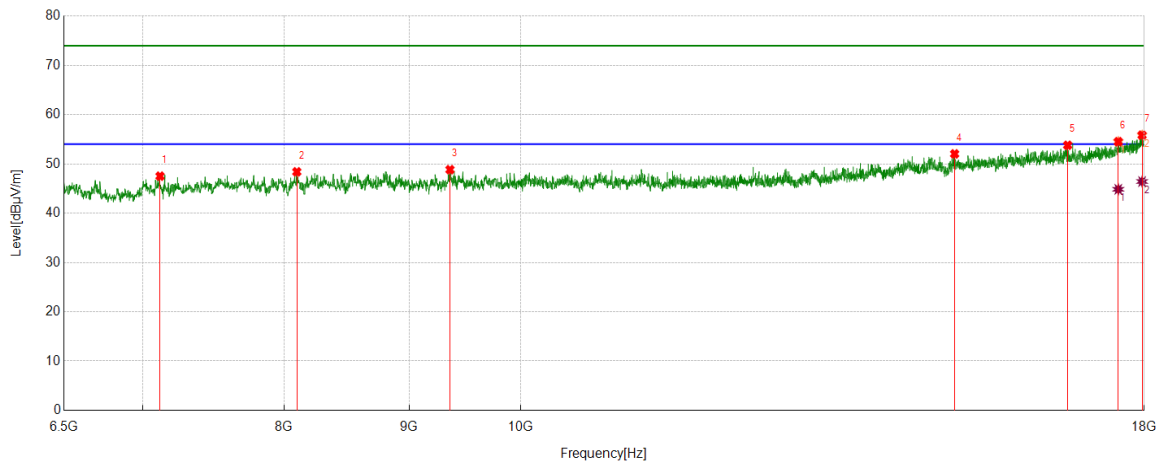

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7117.2695	43.56	3.96	47.52	74.00	-26.48	Vertical
2	8096.8495	42.89	5.51	48.40	74.00	-25.60	Vertical
3	9354.3924	42.39	6.45	48.84	74.00	-25.16	Vertical
4	15053.5923	39.02	13.02	52.04	74.00	-21.96	Vertical
5	16746.2910	37.58	16.21	53.79	74.00	-20.21	Vertical
6	17564.8441	36.69	17.83	54.52	74.00	-19.48	Vertical
7	17963.5773	36.21	19.63	55.84	74.00	-18.16	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17564.8441	27.02	17.83	44.85	54.00	-9.15	Vertical
2	17963.5773	26.80	19.63	46.43	54.00	-7.57	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5670	Horizontal	PASS

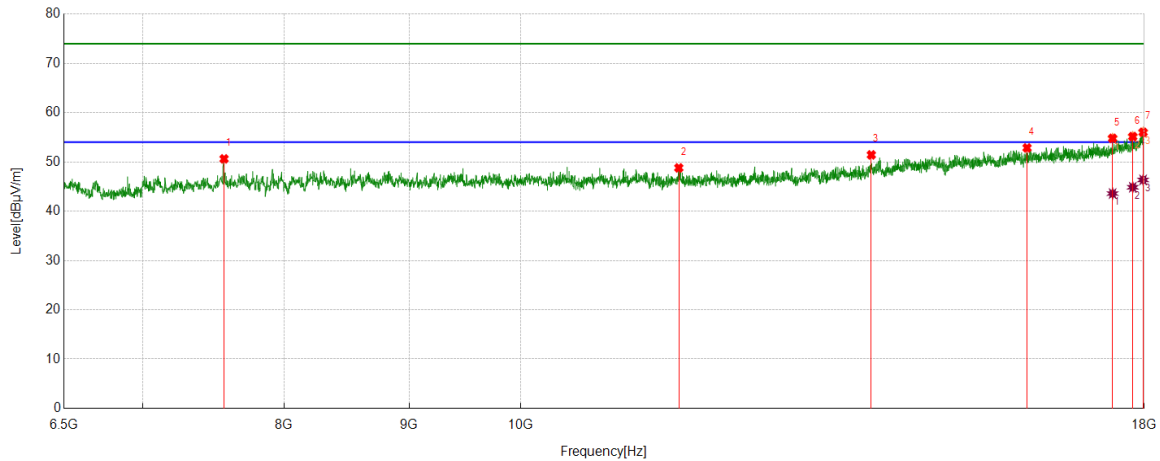

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7560.0933	46.11	4.51	50.62	74.00	-23.38	Horizontal
2	11606.8511	41.25	7.54	48.79	74.00	-25.21	Horizontal
3	13916.8195	40.04	11.39	51.43	74.00	-22.57	Horizontal
4	16117.5196	37.97	14.88	52.85	74.00	-21.15	Horizontal
5	17470.9118	37.16	17.63	54.79	74.00	-19.21	Horizontal
6	17806.3844	36.25	18.90	55.15	74.00	-18.85	Horizontal
7	17980.8301	36.21	19.81	56.02	74.00	-17.98	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17470.9118	25.95	17.63	43.58	54.00	-10.42	Horizontal
2	17806.3844	25.96	18.90	44.86	54.00	-9.14	Horizontal
3	17980.8301	26.54	19.81	46.35	54.00	-7.65	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5670	Vertical	PASS

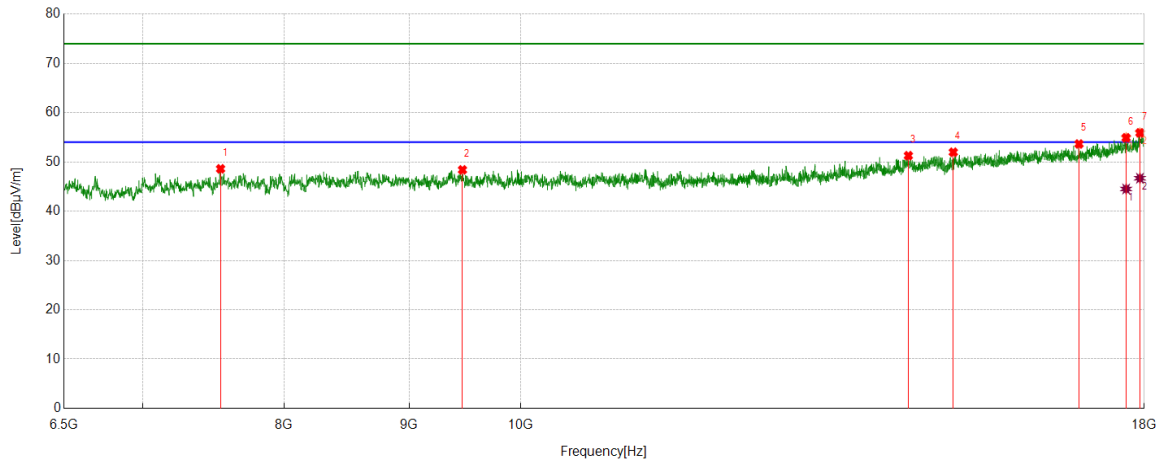

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7535.1725	44.13	4.47	48.60	74.00	-25.40	Vertical
2	9465.5776	41.89	6.50	48.39	74.00	-25.61	Vertical
3	14411.4019	38.38	12.89	51.27	74.00	-22.73	Vertical
4	15034.4224	38.97	13.00	51.97	74.00	-22.03	Vertical
5	16926.4877	37.57	16.07	53.64	74.00	-20.36	Vertical
6	17695.1992	36.67	18.23	54.90	74.00	-19.10	Vertical
7	17927.1545	36.53	19.37	55.90	74.00	-18.10	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17695.1992	26.28	18.23	44.51	54.00	-9.49	Vertical
2	17927.1545	27.32	19.37	46.69	54.00	-7.31	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5710	Horizontal	PASS

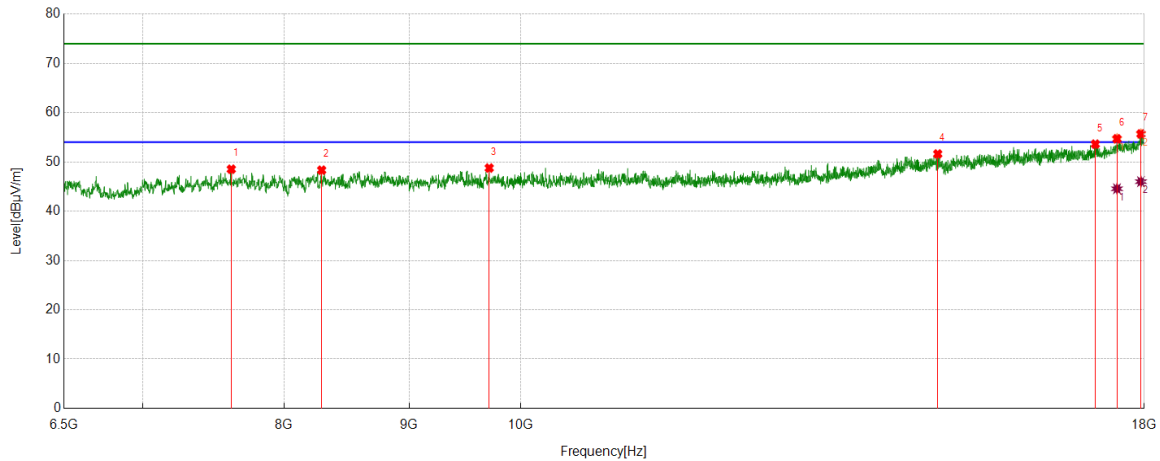

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7611.8520	43.57	4.95	48.52	74.00	-25.48	Horizontal
2	8288.5481	42.21	6.12	48.33	74.00	-25.67	Horizontal
3	9707.1179	42.18	6.58	48.76	74.00	-25.24	Horizontal
4	14815.8860	38.73	12.89	51.62	74.00	-22.38	Horizontal
5	17189.1149	37.01	16.60	53.61	74.00	-20.39	Horizontal
6	17543.7573	36.98	17.71	54.69	74.00	-19.31	Horizontal
7	17944.4074	36.23	19.46	55.69	74.00	-18.31	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17543.7573	26.85	17.71	44.56	54.00	-9.44	Horizontal
2	17944.4074	26.54	19.46	46.00	54.00	-8.00	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5710	Vertical	PASS

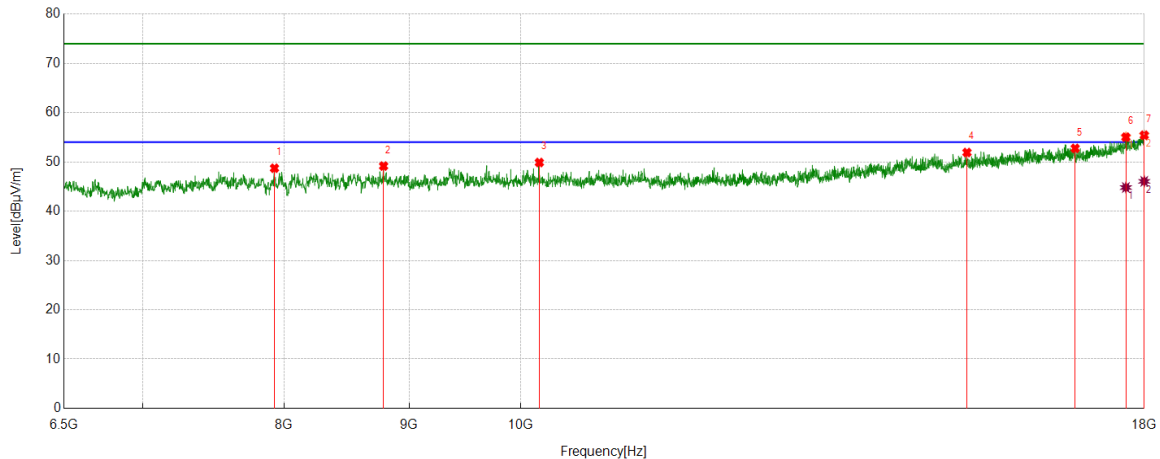

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7928.1547	43.05	5.67	48.72	74.00	-25.28	Vertical
2	8786.9645	42.95	6.21	49.16	74.00	-24.84	Vertical
3	10176.7795	43.26	6.62	49.88	74.00	-24.12	Vertical
4	15229.9550	38.50	13.41	51.91	74.00	-22.09	Vertical
5	16865.1442	36.53	16.22	52.75	74.00	-21.25	Vertical
6	17691.3652	36.84	18.19	55.03	74.00	-18.97	Vertical
7	18000.0000	35.68	19.74	55.42	74.00	-18.58	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17691.3652	26.62	18.19	44.81	54.00	-9.19	Vertical
2	18000.0000	26.32	19.74	46.06	54.00	-7.94	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5755	Horizontal	PASS

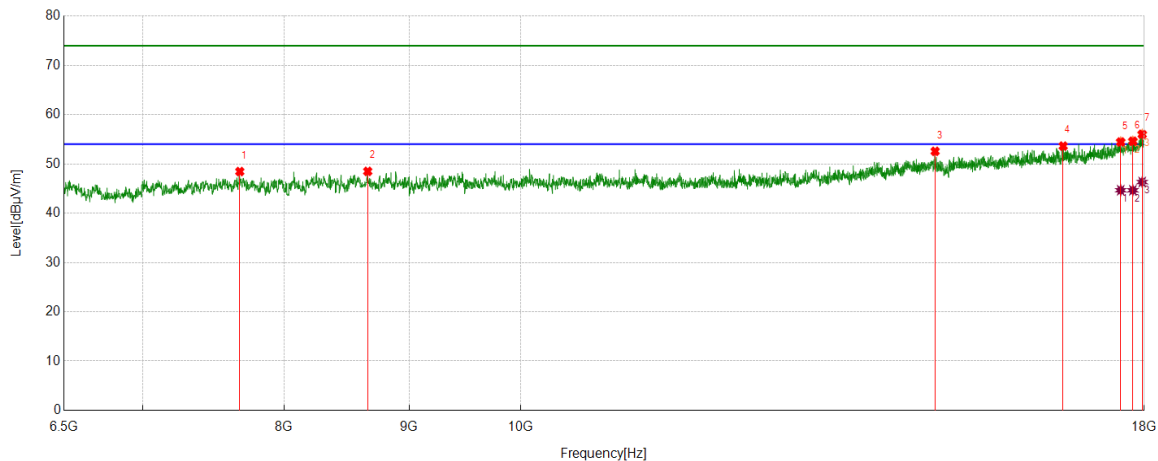

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7673.1955	43.20	5.25	48.45	74.00	-25.55	Horizontal
2	8656.6094	42.15	6.34	48.49	74.00	-25.51	Horizontal
3	14779.4632	39.72	12.84	52.56	74.00	-21.44	Horizontal
4	16675.3626	37.90	15.72	53.62	74.00	-20.38	Horizontal
5	17605.1008	36.41	18.05	54.46	74.00	-19.54	Horizontal
6	17808.3014	35.69	18.92	54.61	74.00	-19.39	Horizontal
7	17965.4942	36.39	19.63	56.02	74.00	-17.98	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17605.1008	26.61	18.05	44.66	54.00	-9.34	Horizontal
2	17808.3014	25.73	18.92	44.65	54.00	-9.35	Horizontal
3	17965.4942	26.69	19.63	46.32	54.00	-7.68	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5755	Vertical	PASS

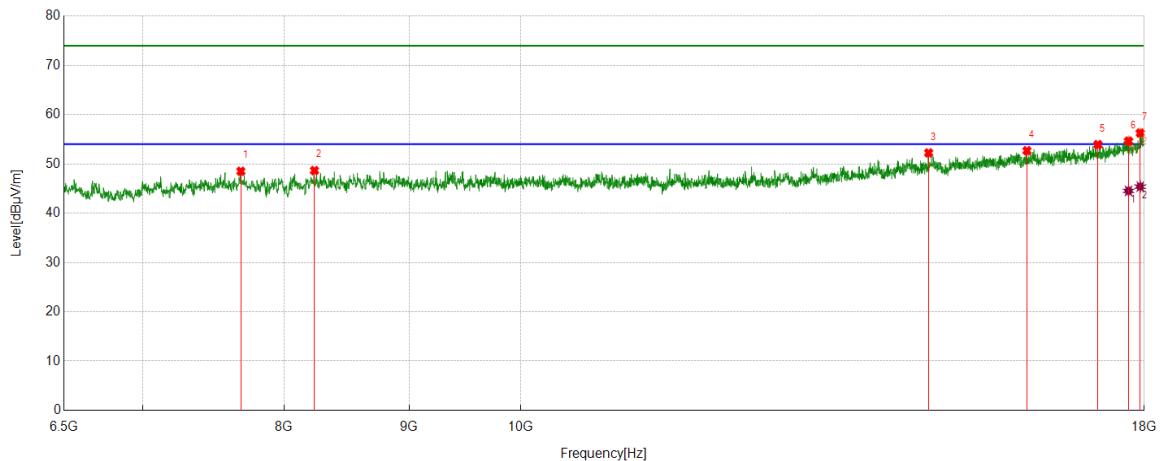

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7680.8635	43.19	5.32	48.51	74.00	-25.49	Vertical
2	8232.9555	42.64	6.02	48.66	74.00	-25.34	Vertical
3	14689.3649	39.39	12.85	52.24	74.00	-21.76	Vertical
4	16115.6026	37.80	14.88	52.68	74.00	-21.32	Vertical
5	17231.2885	37.20	16.72	53.92	74.00	-20.08	Vertical
6	17735.4559	36.10	18.53	54.63	74.00	-19.37	Vertical
7	17932.9055	36.88	19.39	56.27	74.00	-17.73	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17735.4559	26.00	18.53	44.53	54.00	-9.47	Vertical
2	17932.9055	26.00	19.39	45.39	54.00	-8.61	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5795	Horizontal	PASS

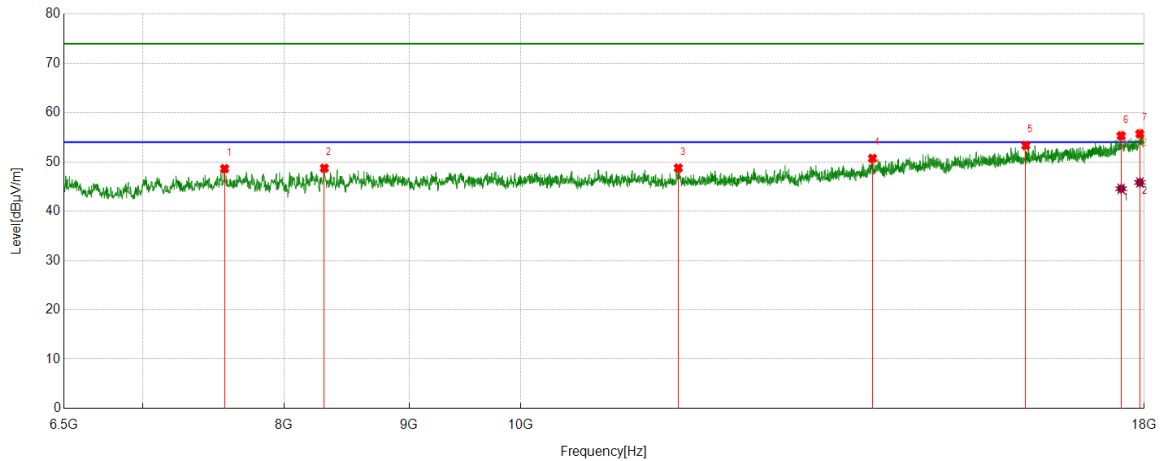

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7563.9273	43.98	4.65	48.63	74.00	-25.37	Horizontal
2	8309.6349	42.39	6.34	48.73	74.00	-25.27	Horizontal
3	11601.1002	41.11	7.65	48.76	74.00	-25.24	Horizontal
4	13932.1554	39.34	11.38	50.72	74.00	-23.28	Horizontal
5	16098.3497	38.69	14.65	53.34	74.00	-20.66	Horizontal
6	17612.7688	37.25	18.06	55.31	74.00	-18.69	Horizontal
7	17927.1545	36.33	19.37	55.70	74.00	-18.30	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17612.7688	26.50	18.06	44.56	54.00	-9.44	Horizontal
2	17927.1545	26.46	19.37	45.83	54.00	-8.17	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11ax HE40	5795	Vertical	PASS

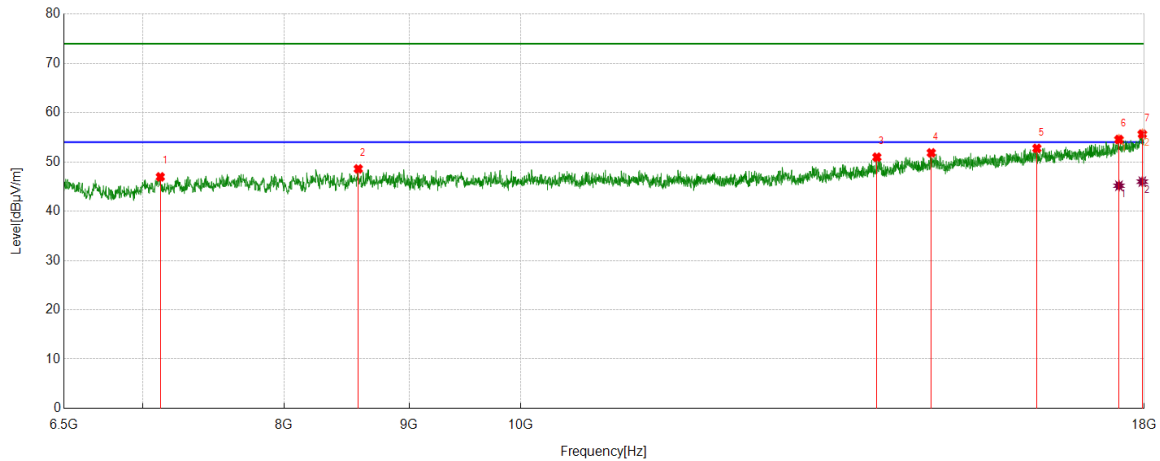

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7119.1865	43.00	3.97	46.97	74.00	-27.03	Vertical
2	8579.9300	42.14	6.45	48.59	74.00	-25.41	Vertical
3	13989.6649	39.34	11.62	50.96	74.00	-23.04	Vertical
4	14725.7876	39.04	12.80	51.84	74.00	-22.16	Vertical
5	16267.0445	37.65	15.10	52.75	74.00	-21.25	Vertical
6	17576.3461	36.62	17.93	54.55	74.00	-19.45	Vertical
7	17967.4112	36.02	19.63	55.65	74.00	-18.35	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17576.3461	27.24	17.93	45.17	54.00	-8.83	Vertical
2	17967.4112	26.37	19.63	46.00	54.00	-8.00	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.


6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

### Part 3: 18GHz~26.5GHz

#### SPURIOUS EMISSIONS 18GHz TO 26.5GHz (WORST-CASE CONFIGURATION)

Test Mode	Channel	Polarization	Verdict
11a	5745	Horizontal	PASS

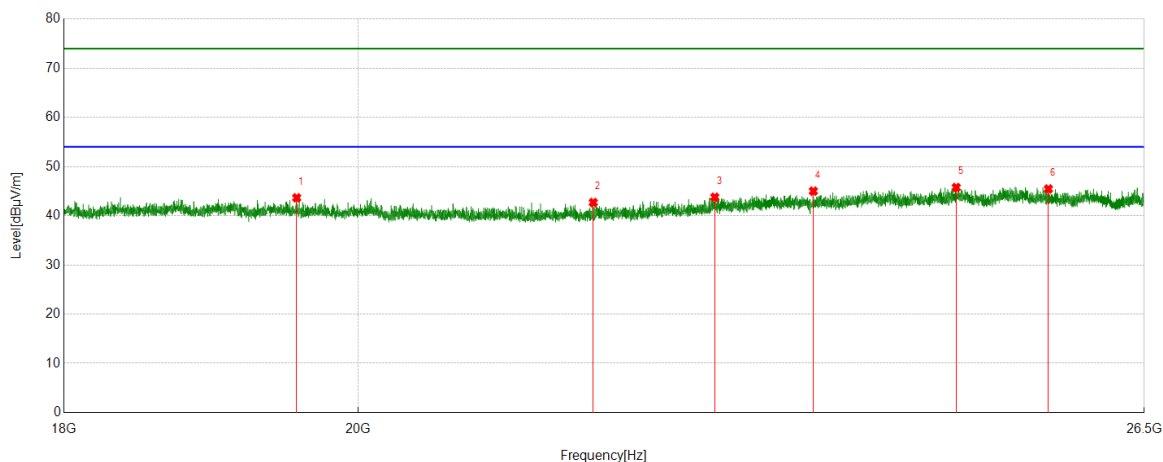


#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	19565.0065	49.09	-5.44	43.65	74.00	-30.35	Horizontal
2	21756.5257	48.44	-5.74	42.70	74.00	-31.30	Horizontal
3	22723.9224	47.89	-4.11	43.78	74.00	-30.22	Horizontal
4	23540.0040	48.14	-3.13	45.01	74.00	-28.99	Horizontal
5	24775.1775	49.04	-3.29	45.75	74.00	-28.25	Horizontal
6	25606.5607	48.52	-3.07	45.45	74.00	-28.55	Horizontal

Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
3. Measurement = Reading Level + Correct Factor.

Test Mode	Channel	Polarization	Verdict
11a	5745	Vertical	PASS

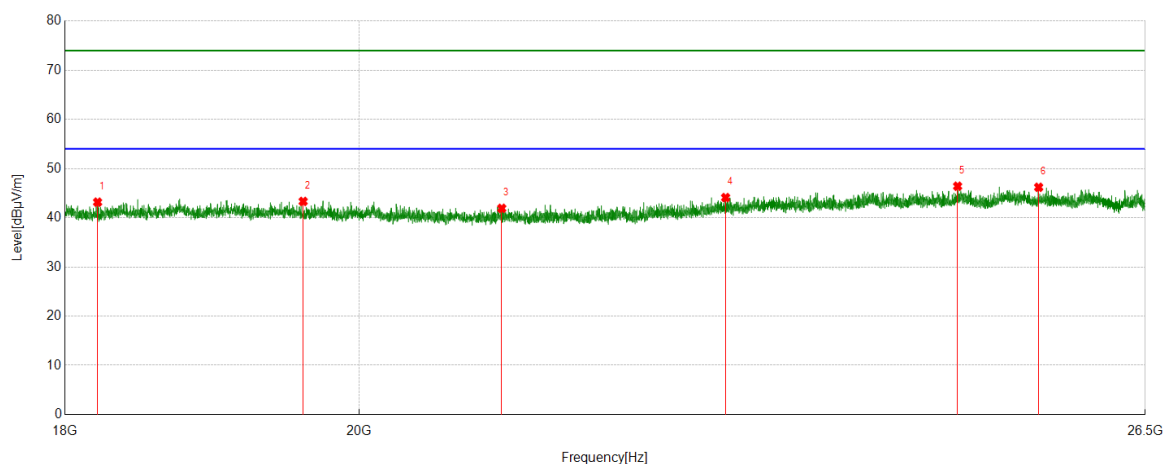

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	18212.5213	50.01	-6.84	43.17	74.00	-30.83	Vertical
2	19603.2603	48.75	-5.43	43.32	74.00	-30.68	Vertical
3	21047.5548	47.91	-6.00	41.91	74.00	-32.09	Vertical
4	22803.8304	48.03	-3.93	44.10	74.00	-29.90	Vertical
5	24778.5779	49.71	-3.30	46.41	74.00	-27.59	Vertical
6	25507.9508	49.38	-3.18	46.20	74.00	-27.80	Vertical

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
3. Measurement = Reading Level + Correct Factor.

#### Part 4: 26.5GHz~40GHz

#### SPURIOUS EMISSIONS 26.5GHz TO 40GHz (WORST-CASE CONFIGURATION)

Test Mode	Channel	Polarization	Verdict
11a	5745	Horizontal	PASS

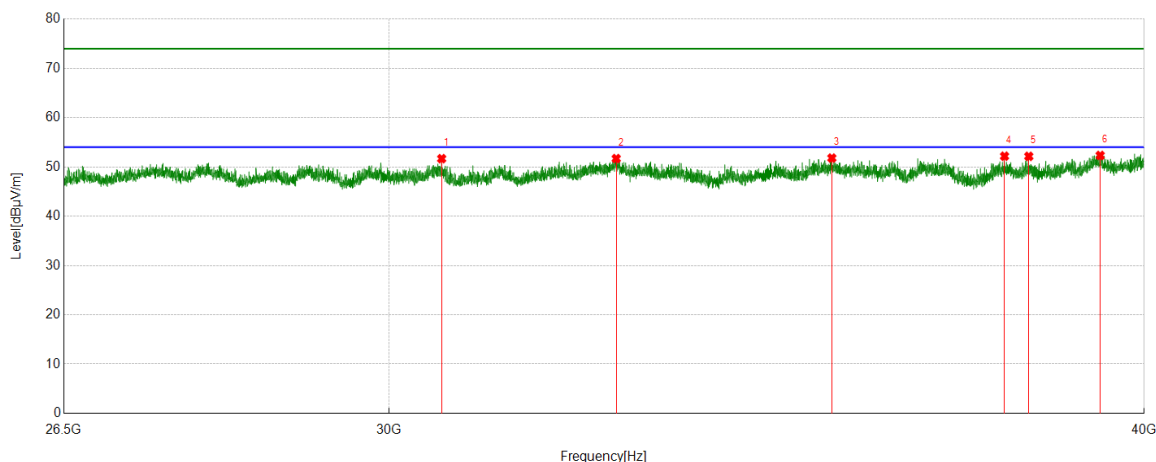


#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	30604.4104	58.85	-7.17	51.68	74.00	-22.32	Vertical
2	32709.2709	57.49	-5.80	51.69	74.00	-22.31	Vertical
3	35510.8011	54.60	-2.80	51.80	74.00	-22.20	Vertical
4	37926.1926	51.40	0.78	52.18	74.00	-21.82	Vertical
5	38278.5779	50.98	1.17	52.15	74.00	-21.85	Vertical
6	39334.3834	49.30	3.03	52.33	74.00	-21.67	Vertical

Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
3. Measurement = Reading Level + Correct Factor.

Test Mode	Channel	Polarization	Verdict
11a	5745	Vertical	PASS

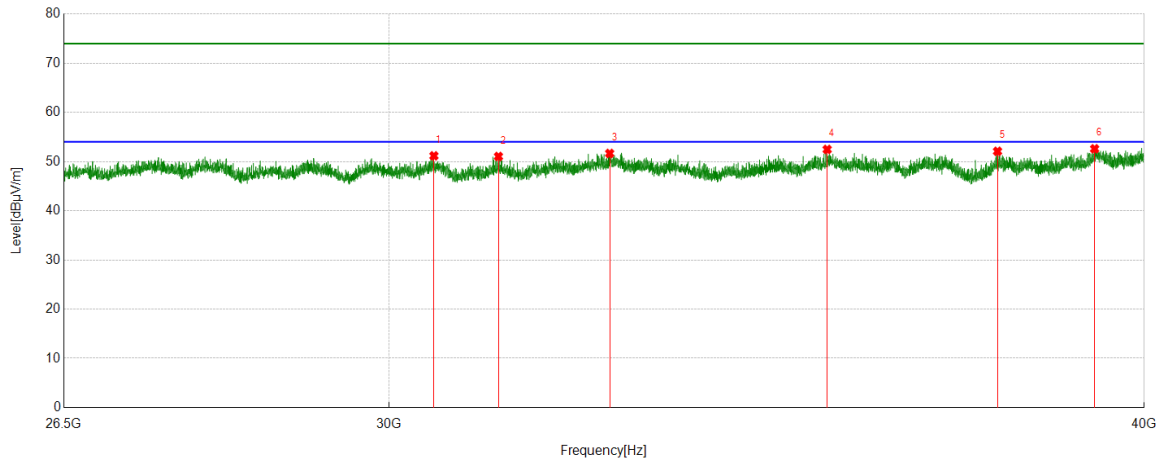


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	30513.9514	58.14	-6.97	51.17	74.00	-22.83	Horizontal
2	31274.0774	58.86	-7.82	51.04	74.00	-22.96	Horizontal
3	32628.2628	57.48	-5.82	51.66	74.00	-22.34	Horizontal
4	35447.3447	55.46	-2.99	52.47	74.00	-21.53	Horizontal
5	37824.9325	52.14	-0.05	52.09	74.00	-21.91	Horizontal
6	39250.6751	49.72	2.88	52.60	74.00	-21.40	Horizontal

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
3. Measurement = Reading Level + Correct Factor.

**Part 5: 30MHz~1GHz**
**SPURIOUS EMISSIONS 30M TO 1GHz (WORST-CASE CONFIGURATION)**


Test Mode	Channel	Polarization	Verdict
11a	5745	Horizontal	PASS

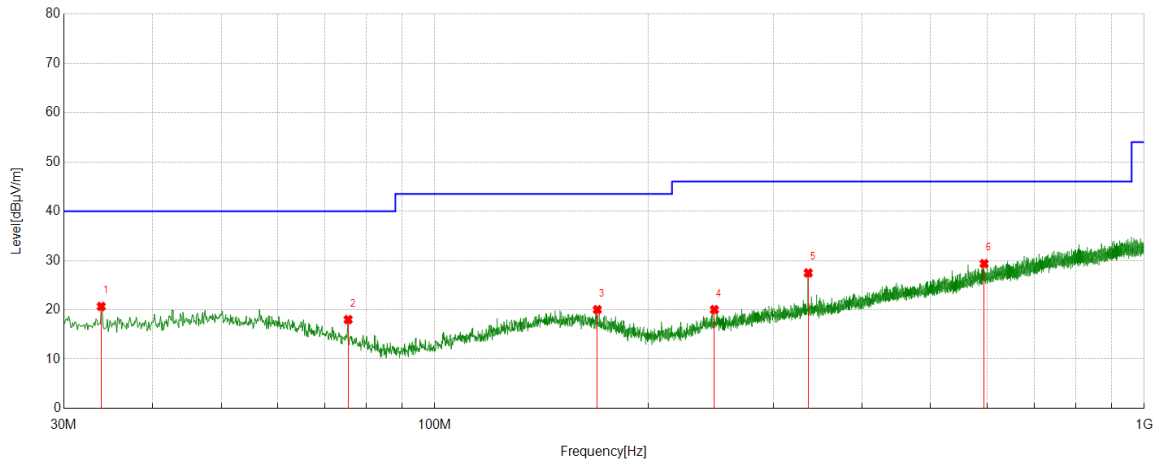

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	[dBuV]	[dB/m]	(dBuV/m)	(dBuV/m)	(dB)	
1	33.8804	1.80	18.87	20.67	40.00	-19.33	peak
2	75.4976	1.32	16.68	18.00	40.00	-22.00	peak
3	169.5000	0.15	19.86	20.01	43.50	-23.49	peak
4	247.7868	0.85	19.16	20.01	46.00	-25.99	peak
5	336.0656	5.35	22.12	27.47	46.00	-18.53	peak
6	594.6935	1.35	28.02	29.37	46.00	-16.63	peak

Remark: 1. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.  
3. Measurement = Reading Level + Correct Factor.

Test Mode	Channel	Polarization	Verdict
11a	5745	Vertical	PASS

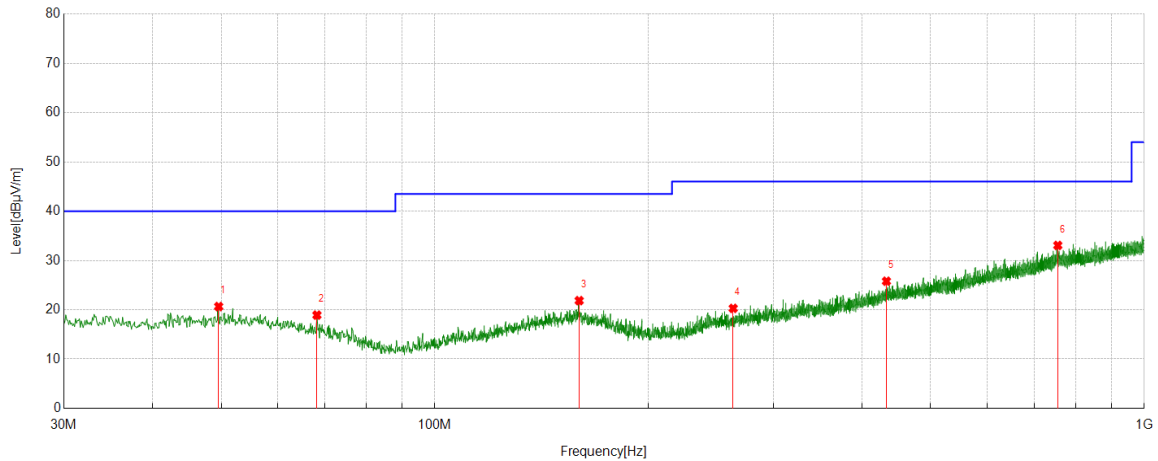


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	[dBuV]	[dB/m]	(dBuV/m)	(dBuV/m)	(dB)	
1	49.5960	0.10	20.55	20.65	40.00	-19.35	peak
2	68.2218	0.61	18.30	18.91	40.00	-21.09	peak
3	159.7990	1.38	20.47	21.85	43.50	-21.65	peak
4	263.4053	0.59	19.69	20.28	46.00	-25.72	peak
5	433.1723	1.07	24.72	25.79	46.00	-20.21	peak
6	755.3415	1.98	31.08	33.06	46.00	-12.94	peak

Remark: 1. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.  
3. Measurement = Reading Level + Correct Factor.

# Part 6: 9kHz~30MHz

## SPURIOUS EMISSIONS Below 30MHz (WORST CASE CONFIGURATION-FACE ON)

Test Mode	Channel	Frequency Range	Verdict
11a	5745	9kHz~150kHz	PASS

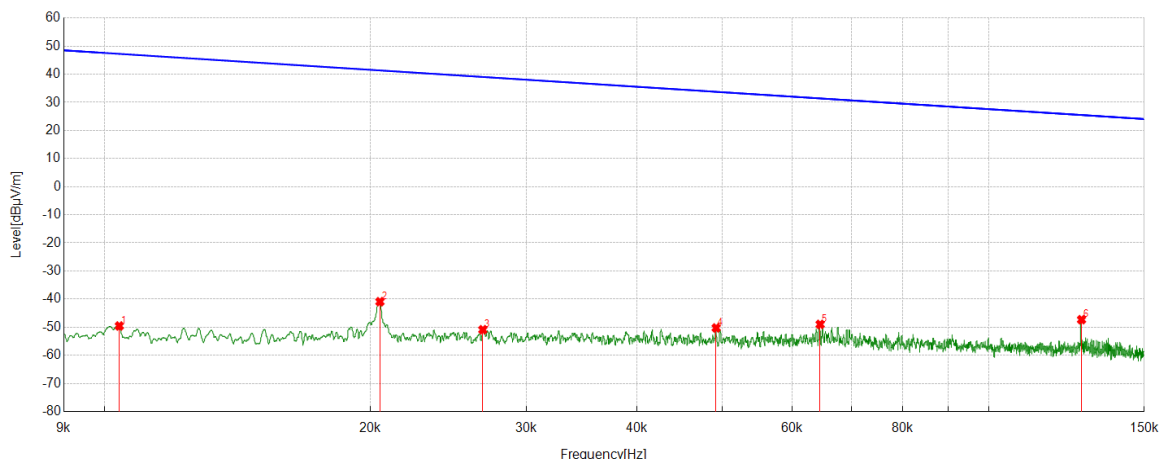


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	FCC Result [dBuV/m]	FCC Limit [dBuV/m]	ISED Result [dBuA/m]	ISED Limit [dBuA/m]	Margin [dB]	Remark
1	0.0104	12.32	-61.89	-49.57	47.30	-101.07	-4.20	-96.87	Peak
2	0.0205	20.81	-61.74	-40.93	41.37	-92.43	-10.13	-82.30	Peak
3	0.0268	10.74	-61.65	-50.91	39.03	-102.41	-12.47	-89.94	Peak
4	0.0492	11.34	-61.60	-50.26	33.77	-101.76	-17.73	-84.03	Peak
5	0.0645	12.61	-61.61	-49.00	31.42	-100.50	-20.08	-80.42	Peak
6	0.1274	14.39	-61.72	-47.33	25.51	-98.83	-25.99	-72.84	Peak

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. Result 300m= Result 3m-80 dBuV/m  
3. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.  
4. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report




Test Mode	Channel	Frequency Range	Verdict
11a	5745	150kHz~490kHz	PASS

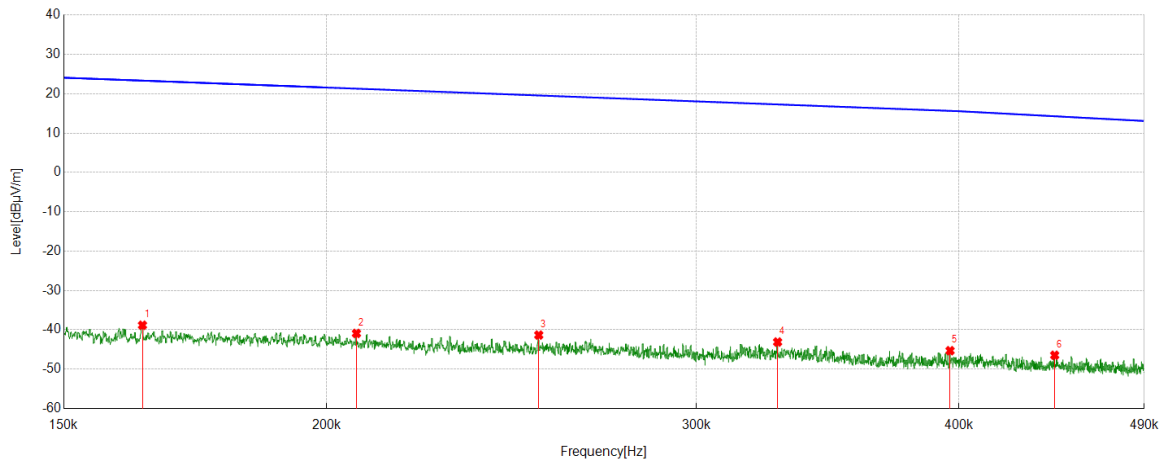

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	FCC Result [dBuV/m]	FCC Limit [dBuV/m]	ISED Result [dBuA/m]	ISED Limit [dBuA/m]	Margin [dB]	Remark
1	0.1635	22.91	-61.75	-38.84	23.33	-90.34	-28.17	-62.17	Peak
2	0.2067	20.85	-61.77	-40.92	21.29	-92.42	-30.21	-62.21	Peak
3	0.2524	20.46	-61.80	-41.34	19.56	-92.84	-31.94	-60.90	Peak
4	0.3279	18.71	-61.82	-43.11	17.29	-94.61	-34.21	-60.40	Peak
5	0.3961	16.53	-61.84	-45.31	15.65	-96.81	-35.85	-60.96	Peak
6	0.4442	15.39	-61.86	-46.47	14.28	-97.97	-37.22	-60.75	Peak

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. Result 300m= Result 3m-80 dBuV/m  
3. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.  
4. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report

Test Mode	Channel	Frequency Range	Verdict
11a	5745	490kHz~30MHz	PASS

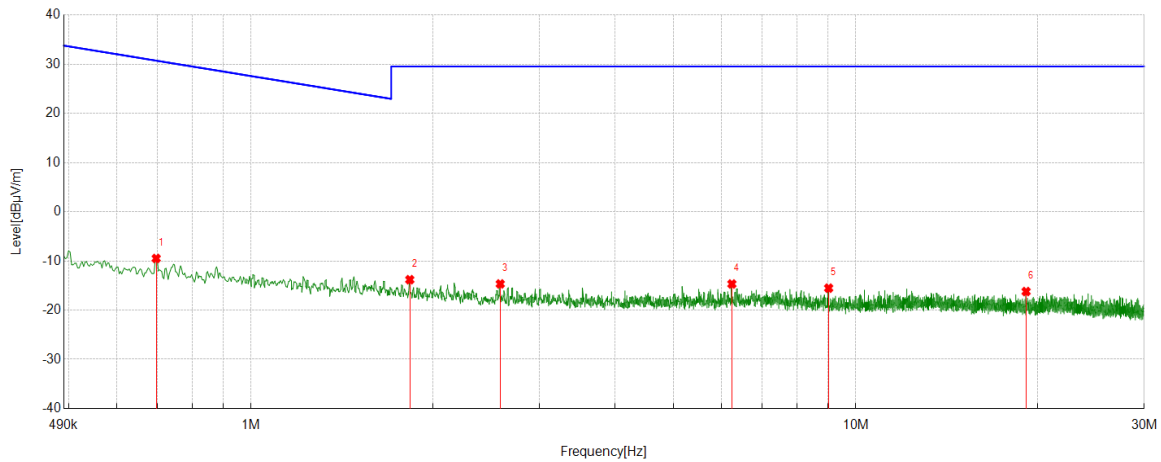

No.	Frequency	Reading Level	Correct Factor	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dBuA/m]	[dBuA/m]	[dB]	
1	0.6966	12.38	-21.87	-9.49	30.74	-60.99	-20.76	-40.23	Peak
2	1.8299	8.02	-21.83	-13.81	29.54	-65.31	-21.96	-43.35	Peak
3	2.5825	7.14	-21.81	-14.67	29.54	-66.17	-21.96	-44.21	Peak
4	6.2391	7.15	-21.83	-14.68	29.54	-66.18	-21.96	-44.22	Peak
5	9.0192	6.14	-21.67	-15.53	29.54	-67.03	-21.96	-45.07	Peak
6	19.1333	5.28	-21.50	-16.22	29.54	-67.72	-21.96	-45.76	Peak

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. Result 30m= Result 3m-40 dBuV/m  
3. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.  
4. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report

### 7.3. SPURIOUS EMISSIONS FOR SIMULTANEOUS TRANSMISSION

There are two modules installed in the host, one module can transmit 2.4G WiFi and the other module can transmit 5GHz WiFi simultaneously, so the spurious emission for simultaneous transmission was investigated in the report.

#### **TEST RESULT TABLE**

1. For 1GHz to 6.5GHz part:

Environment Parameter	Selected Values During Tests
Relative Humidity	56%
Atmospheric Pressure:	101kPa
Temperature	22°C

Module	Test Mode	Channel	Puw(dBm)	Verdict
Module 1	11B	2437	<Limit	PASS
Module 2	11A	5180		

Note: Pre-testing all the combinations, the sate shown in the table is the worst case and recorded in this report.

2. For 6.5GHz to 18GHz part:


Environment Parameter	Selected Values During Tests
Relative Humidity	56%
Atmospheric Pressure:	101kPa
Temperature	22°C

Module	Test Mode	Channel	Puw(dBm)	Verdict
Module 1	11B	2437	<Limit	PASS
Module 2	11A	5180		

Note: Pre-testing all the combinations, the sate shown in the table is the worst case and recorded in this report.

### PART 1: 1GHz~6.5GHz

Module	Test Mode	Channel	Polarization	Verdict
Module 1	11B	2437	Horizontal	PASS
Module 2	11A	5180		

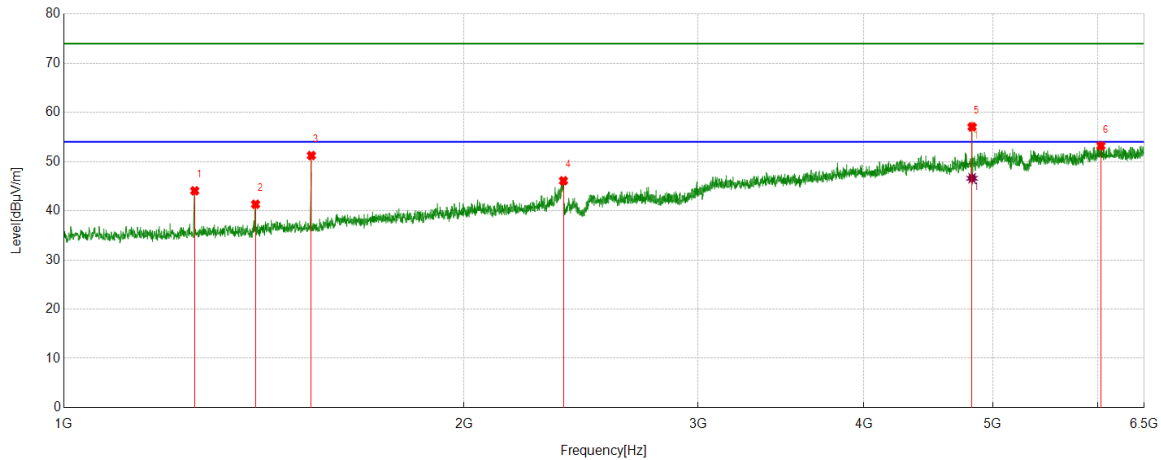

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1254.5636	45.62	-1.56	44.06	74.00	-29.94	Horizontal
2	1394.0985	42.66	-1.34	41.32	74.00	-32.68	Horizontal
3	1535.6339	51.85	-0.62	51.23	74.00	-22.77	Horizontal
4	2376.3441	41.27	4.83	46.10	74.00	-27.90	Horizontal
5	4823.9560	41.89	15.18	57.07	74.00	-16.93	Horizontal
6	6030.0075	35.48	17.74	53.22	74.00	-20.78	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4823.9560	31.43	15.18	46.61	54.00	-7.39	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.


6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.

The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Module	Test Mode	Channel	Polarization	Verdict
Module 1	11B	2437	Vertical	PASS
Module 2	11A	5180		

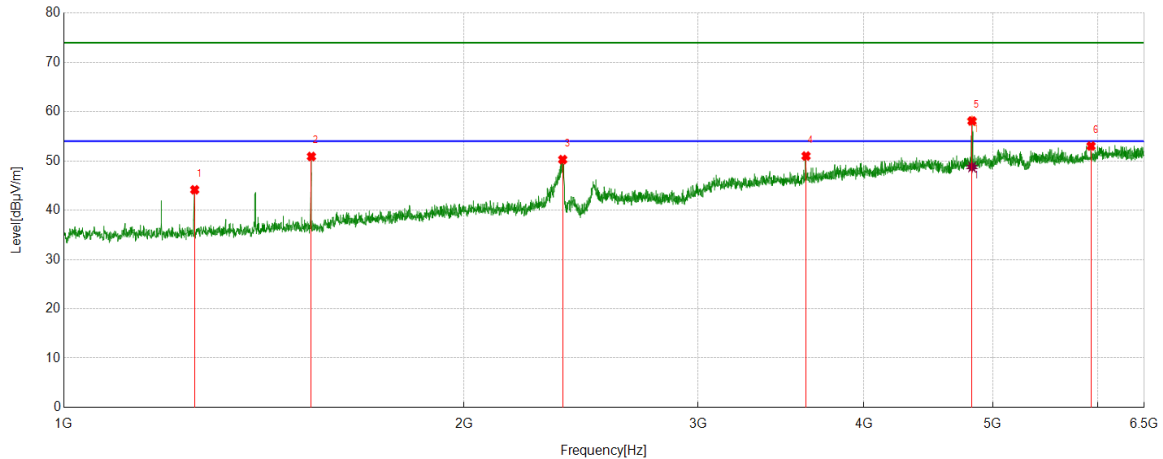

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1254.5636	45.70	-1.56	44.14	74.00	-29.86	Vertical
2	1535.6339	51.52	-0.62	50.90	74.00	-23.10	Vertical
3	2373.3433	45.45	4.82	50.27	74.00	-23.73	Vertical
4	3617.9045	39.82	11.18	51.00	74.00	-23.00	Vertical
5	4823.0808	42.93	15.18	58.11	74.00	-15.89	Vertical
6	5927.6069	35.62	17.40	53.02	74.00	-20.98	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4823.0808	33.59	15.18	48.77	54.00	-5.23	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.

The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.