


R-8528 Detection Systems DS835i Occupied Bandwidth PL 5/8/
 REF 97.0 dBμV ATTN 0 dB

hp

10 dB/

DL
 47.0
 dBμV

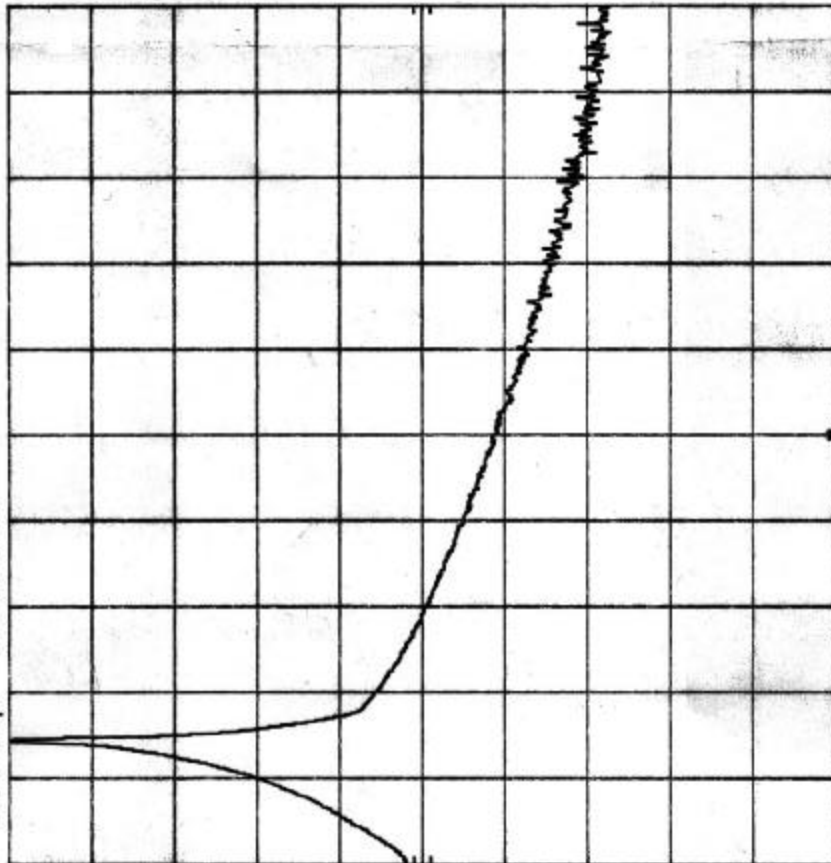

START 10.500 0 GHz
 RES BW 100 kHz
 STOP 10.550 0 GHz
 SWP 20.0 meec
 VBW 300 kHz

Customer: Detection Systems
 Test Sample: Field Disturbance Sensor
 Model No.: DS835IT FCC ID: ESVD54351
 Test Method: FCC15.245(p3) Occupied Bandwidth
 Notes: Emissions are greater than 50dB down from Mod. carrier at upper Band edge. See attached table for lower Band edge measurement.
 Date: May 10, 2000 Tech: Peter Lananna Sheet: 1 of 1



Retlif Testing Laboratories

Report No. R-8528