


Appendix B: Test Results of FCC Part 15C

APPENDIX B: TEST RESULTS OF FCC PART 15C	1
APPENDIX B.1: TEST RESULTS OF FIELD STRENGTH OF FUNDAMENTAL	2
APPENDIX B.2: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	4
9KHz - 30MHz.....	4
30MHz - 1GHz.....	8
1GHz - 18GHz.....	10
18GHz - 40GHz.....	12
40GHz - 50GHz.....	16
50GHz - 75GHz.....	18
75GHz - 100GHz.....	20
APPENDIX B.3: TEST RESULTS OF 20DB AND 99% BANDWIDTH	22
APPENDIX B.4: TEST RESULTS OF BAND EDGE	23
APPENDIX B.5: TEST RESULTS OF CONDUCTED EMISSION	27

Appendix B.1: Test Results of Field strength of fundamental

Site: SIP-AC3	Time: 2022/06/10 - 17:38
Limit: FCC_Part15.249_Power	Engineer: Arvin
Probe: BBHA 9170_00935_18-40GHz	Polarity: Horizontal
EUT: Intelligent Toilet-V7232-3	Power: AC 120V/60Hz
Note: Transmit at 24GHz	

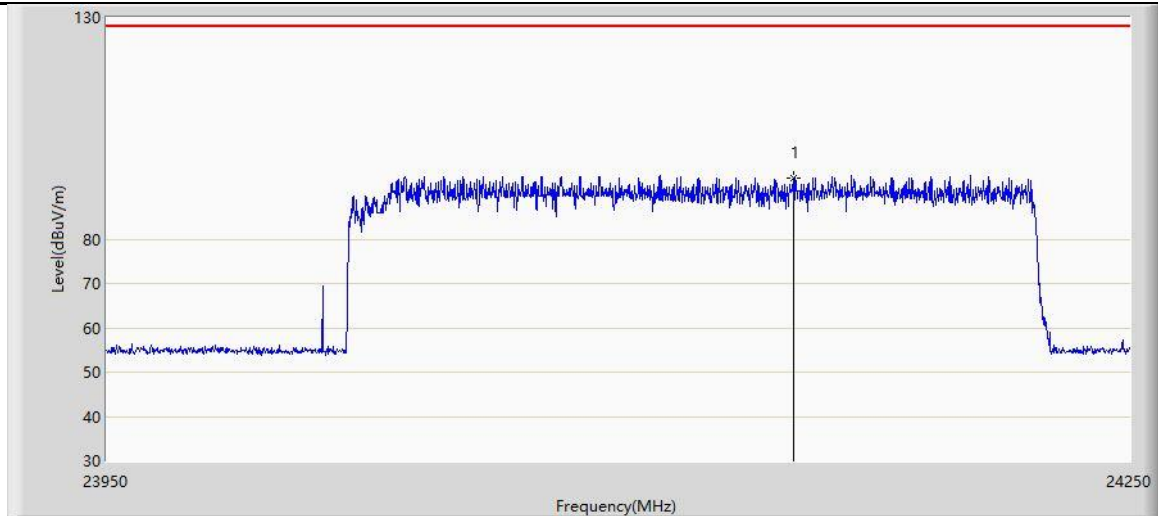

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	24151.000	93.850	102.517	-34.109	127.959	-8.668	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Note 4: Average measurement was not performed when the peak level lower than average limit.

Site: SIP-AC3	Time: 2022/06/10 - 17:38
Limit: FCC Part15.249 Power	Engineer: Arvin
Probe: BBHA 9170 00935 18-40GHz	Polarity: Vertical
EUT: Intelligent Toilet-V7232-3	Power: AC 120V/60Hz
Note: Transmit at 24GHz	

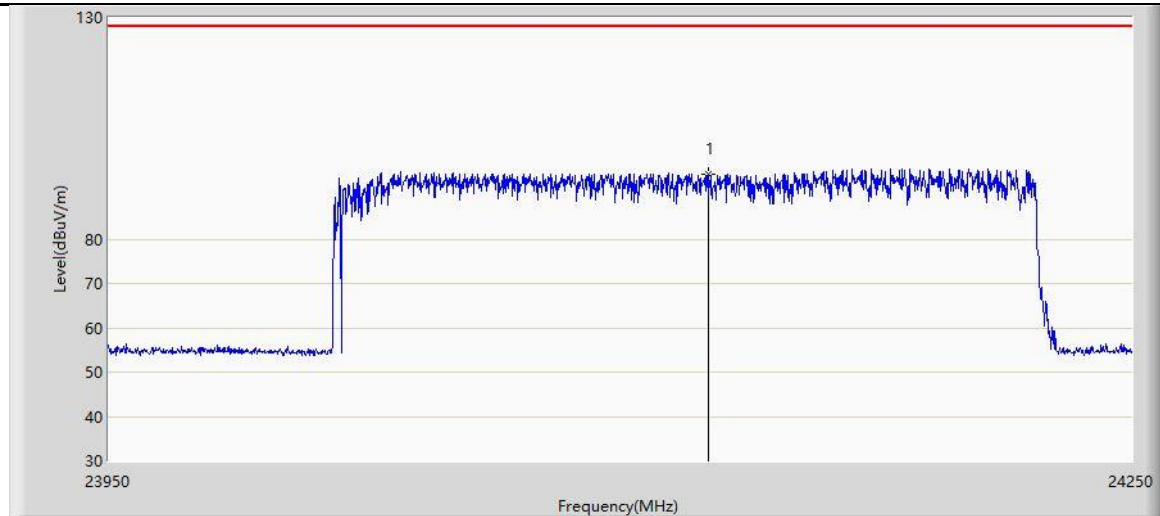

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	24125.400	94.637	103.412	-33.322	127.959	-8.776	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Note 4: Average measurement was not performed when the peak level lower than average limit.

Appendix B.2: Test Results of Radiated spurious emissions

9KHz - 30MHz

Site: SIP-AC3	Time: 2022/06/14 - 09:58
Limit: FCC_Part15.249_RSE(3m)	Engineer: Arvin
Probe: FMZB1519B_0.009-30MHz	Polarity: Horizontal
EUT: Intelligent Toilet-V7232-3	Power: AC 120V/60Hz
Note: Transmit at 24GHz Face on	

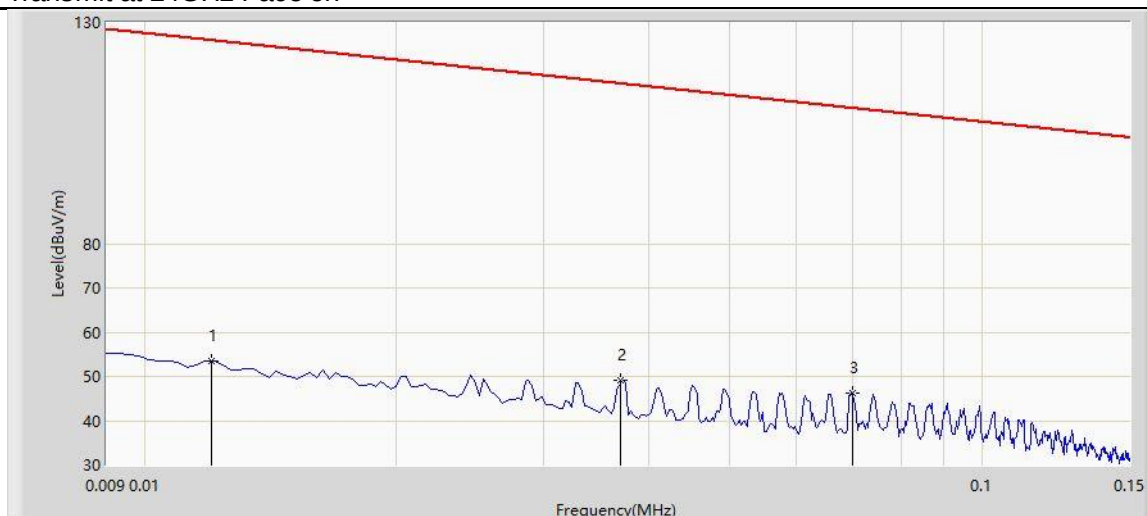

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		0.012	53.435	33.540	-72.568	126.003	19.895	PK
2		0.037	49.128	30.226	-67.099	116.228	18.902	PK
3	*	0.070	46.297	27.594	-64.396	110.693	18.703	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: SIP-AC3	Time: 2022/06/14 - 10:10
Limit: FCC Part15.249 RSE(3m)	Engineer: Arvin
Probe: FMZB1519B 0.009-30MHz	Polarity: Horizontal
EUT: Intelligent Toilet-V7232-3	Power: AC 120V/60Hz
Note: Transmit at 24GHz Face off	

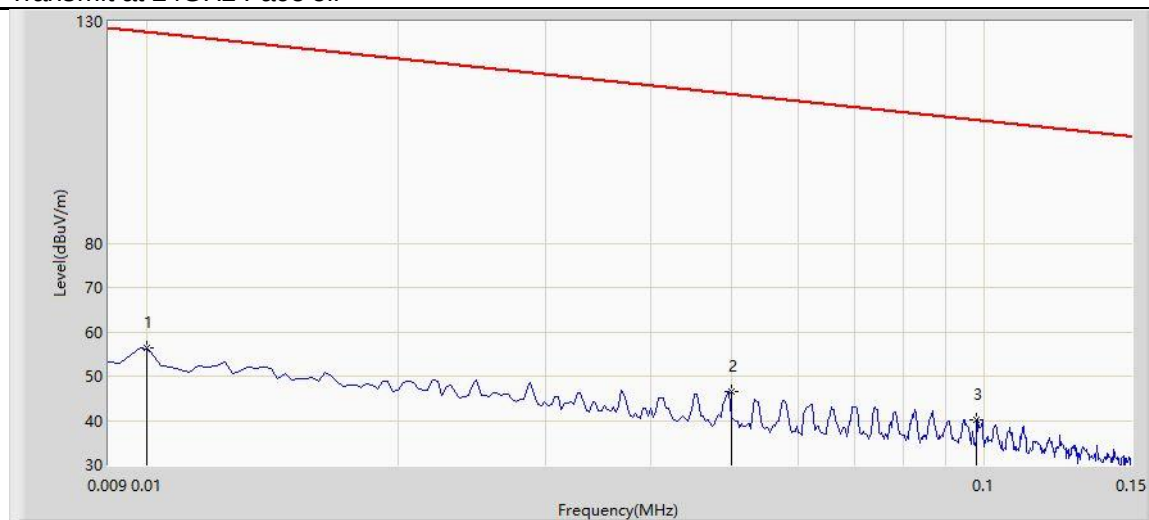

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		0.010	56.295	36.321	-71.290	127.585	19.975	PK
2	*	0.050	46.415	27.636	-67.199	113.614	18.778	PK
3		0.098	40.128	21.404	-67.643	107.772	18.724	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: SIP-AC3	Time: 2022/06/14 - 10:03
Limit: FCC Part15.249 RSE(3m)	Engineer: Arvin
Probe: FMZB1519B 0.009-30MHz	Polarity: Horizontal
EUT: Intelligent Toilet-V7232-3	Power: AC 120V/60Hz
Note: Transmit at 24GHz Face on	

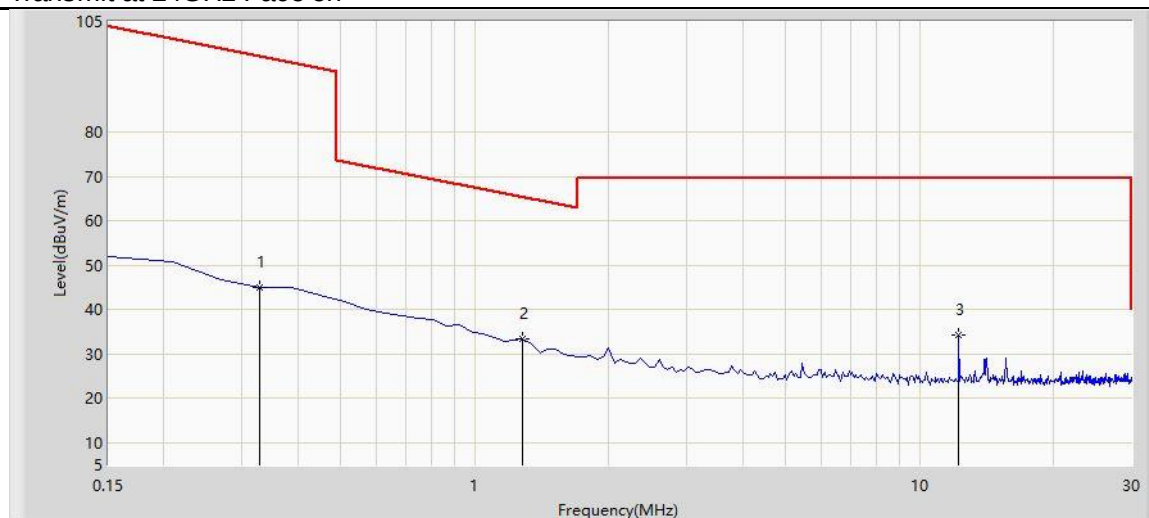

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		0.329	45.056	26.486	-52.202	97.258	18.570	PK
2	*	1.284	33.500	13.963	-31.956	65.456	19.538	PK
3		12.269	34.345	15.573	-35.155	69.500	18.772	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: SIP-AC3	Time: 2022/06/14 - 10:13
Limit: FCC Part15.249 RSE(3m)	Engineer: Arvin
Probe: FMZB1519B 0.009-30MHz	Polarity: Horizontal
EUT: Intelligent Toilet-V7232-3	Power: AC 120V/60Hz
Note: Transmit at 24GHz Face off	

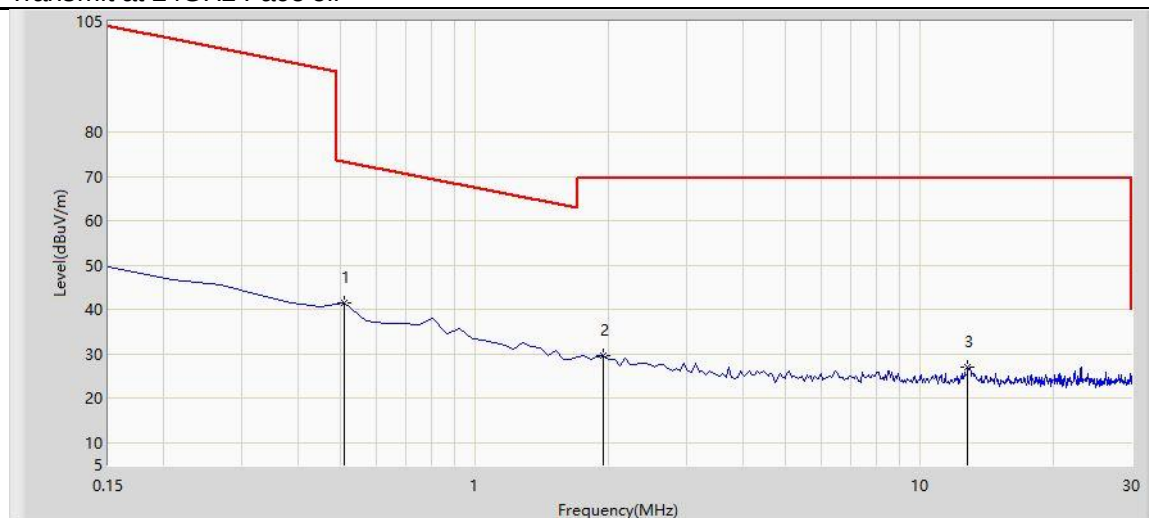

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	0.508	41.421	22.383	-32.066	73.488	19.038	PK
2		1.941	29.710	10.706	-39.790	69.500	19.005	PK
3		12.866	26.899	8.140	-42.601	69.500	18.760	PK

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

30MHz - 1GHz

Site: SIP-AC3	Time: 2022/06/10 - 13:28
Limit: FCC Part15.249 RSE(3m)	Engineer: Arvin
Probe: VULB 9168 00997 25-2000MHz	Polarity: Horizontal
EUT: Intelligent Toilet-V7232-3	Power: AC 120V/60Hz
Note: Transmit at 24GHz	

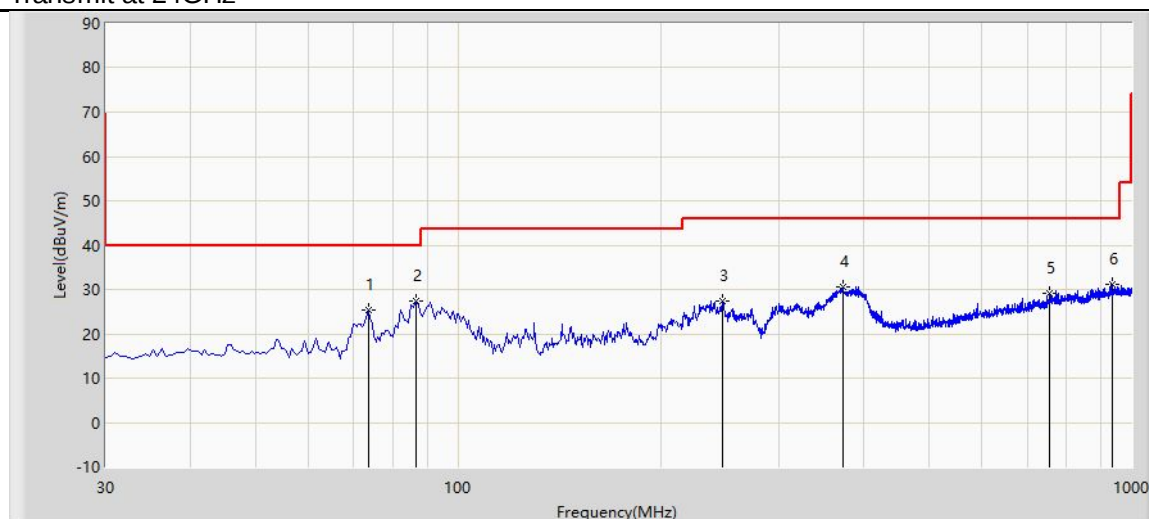

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		73.650	25.357	10.509	-14.643	40.000	14.848	PK
2	*	86.745	27.402	14.958	-12.598	40.000	12.444	PK
3		247.280	27.531	10.722	-18.469	46.000	16.809	PK
4		372.895	30.699	10.283	-15.301	46.000	20.416	PK
5		754.590	29.037	0.862	-16.963	46.000	28.175	PK
6		935.495	31.236	1.204	-14.764	46.000	30.032	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: SIP-AC3	Time: 2022/06/10 - 13:45
Limit: FCC Part15.249 RSE(3m)	Engineer: Arvin
Probe: VULB 9168 00997 25-2000MHz	Polarity: Vertical
EUT: Intelligent Toilet-V7232-3	Power: AC 120V/60Hz
Note: Transmit at 24GHz	

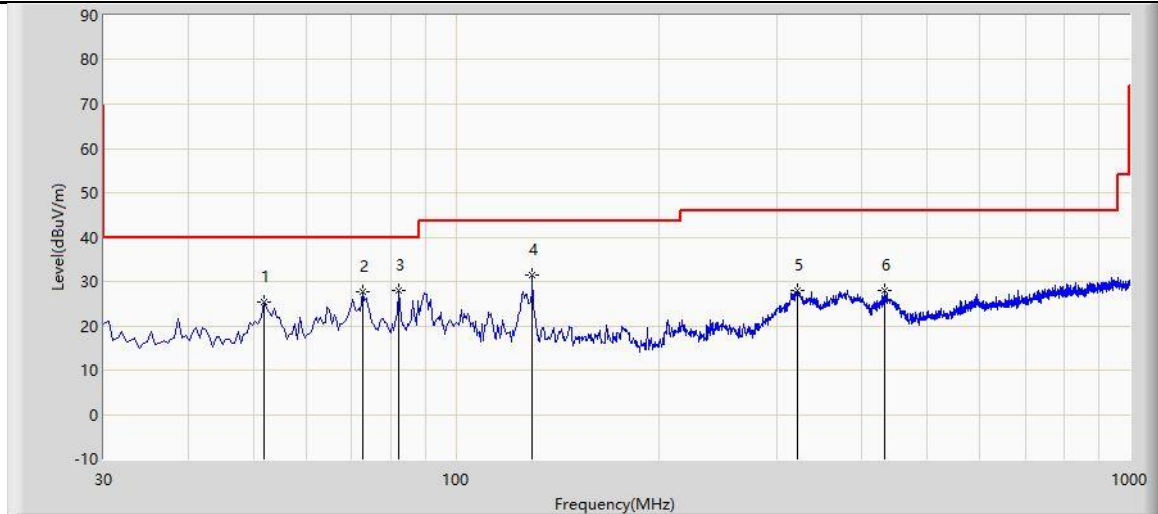

No	Mark	Frequency (MHz)	Measure Level (dBµV/m)	Reading Level (dBµV)	Margin (dB)	Limit (dBµV/m)	Factor (dB/m)	Type
1		51.825	25.398	7.389	-14.602	40.000	18.009	PK
2		72.680	27.710	12.683	-12.290	40.000	15.027	PK
3		82.380	27.845	14.768	-12.155	40.000	13.077	PK
4	*	129.910	31.414	14.653	-12.086	43.500	16.761	PK
5		321.485	28.092	8.932	-17.908	46.000	19.160	PK
6		432.065	27.920	6.143	-18.080	46.000	21.777	PK

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

1GHz - 18GHz

Site: SIP-AC3	Time: 2022/06/10 - 14:23
Limit: FCC Part15.249 RSE(3m)	Engineer: Arvin
Probe: HF907 102861 1-18GHz	Polarity: Horizontal
EUT: Intelligent Toilet-V7232-3	Power: AC 120V/60Hz
Note: Transmit at 24GHz	

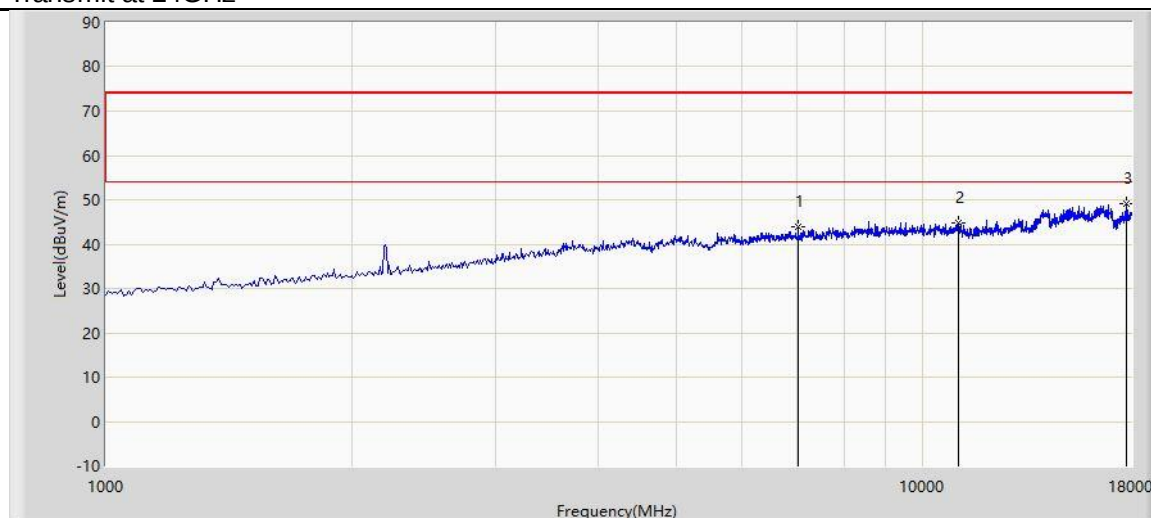

No	Mark	Frequency (MHz)	Measure Level (dBµV/m)	Reading Level (dBµV)	Margin (dB)	Limit (dBµV/m)	Factor (dB/m)	Type
1		7035.000	43.979	50.072	-30.021	74.000	-6.093	PK
2		11047.000	44.770	47.237	-29.230	74.000	-2.467	PK
3	*	17770.500	49.070	42.046	-24.930	74.000	7.025	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

Prüfbericht - Produkte

Test Report - Products

Site: SIP-AC3	Time: 2022/06/10 - 15:24
Limit: FCC Part15.249 RSE(3m)	Engineer: Arvin
Probe: HF907 102861 1-18GHz	Polarity: Vertical
EUT: Intelligent Toilet-V7232-3	Power: AC 120V/60Hz
Note: Transmit at 24GHz	

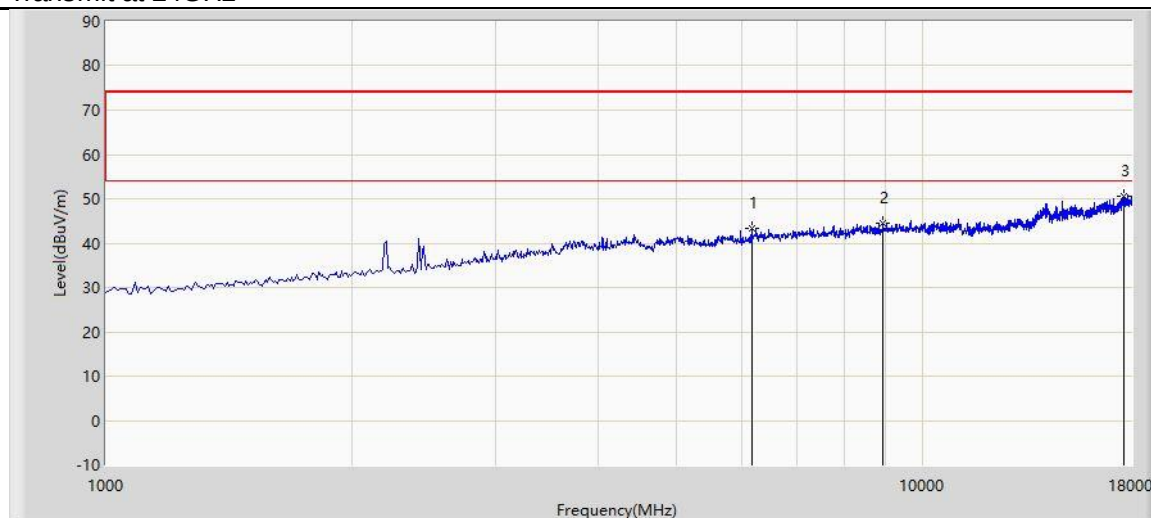

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		6168.000	43.270	50.680	-30.730	74.000	-7.410	PK
2		8930.500	44.358	47.582	-29.642	74.000	-3.224	PK
3	*	17634.500	50.629	44.187	-23.371	74.000	6.442	PK

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

18GHz - 40GHz

Site: SIP-AC3	Time: 2022/06/10 - 15:25
Limit: FCC Part15.249 RSE(3m)	Engineer: Arvin
Probe: BBHA 9170 00935 18-40GHz	Polarity: Horizontal
EUT: Intelligent Toilet-V7232-3	Power: AC 120V/60Hz
Note: Transmit at 24GHz	

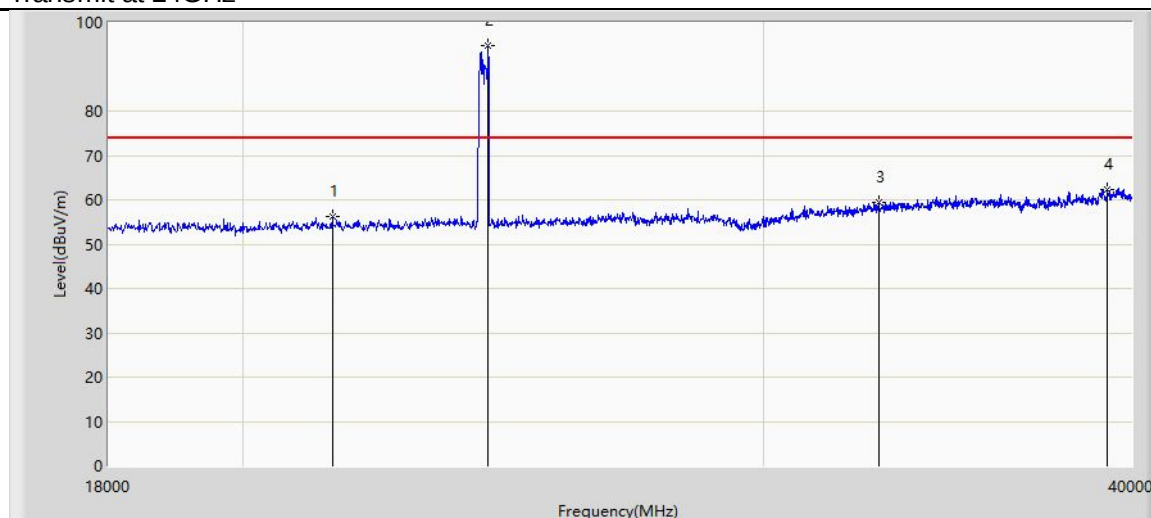

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		21443.000	56.115	65.772	-17.885	74.000	-9.657	PK
2		24215.000	94.877	103.620	N/A	N/A	-8.744	PK
3		32839.000	59.493	68.043	-14.507	74.000	-8.550	PK
4	*	39263.000	62.384	62.666	-11.616	74.000	-0.283	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Note 4: The point (2) is fundamental frequency that is not evaluated in this standard.

Site: SIP-AC3	Time: 2022/06/10 - 15:45
Limit: FCC Part15.249 RSE(3m)	Engineer: Arvin
Probe: BBHA 9170 00935 18-40GHz	Polarity: Horizontal
EUT: Intelligent Toilet-V7232-3	Power: AC 120V/60Hz
Note: Transmit at 24GHz	

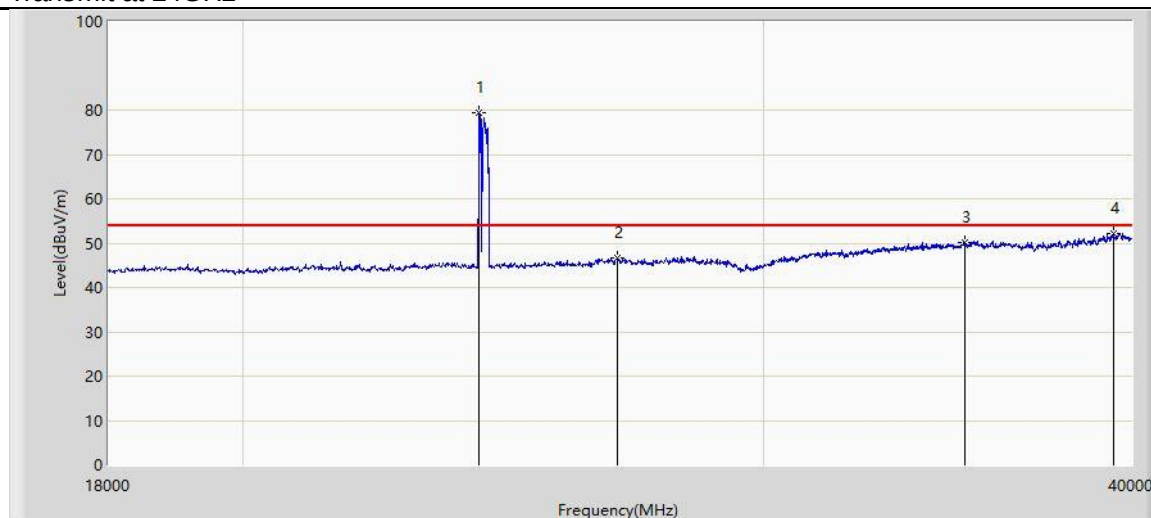

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		24039.000	79.376	88.152	N/A	N/A	-8.776	AV
2		26767.000	46.775	54.394	-7.225	54.000	-7.618	AV
3		35116.000	50.208	56.474	-3.792	54.000	-6.266	AV
4	*	39439.000	52.093	52.143	-1.907	54.000	-0.050	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Note 4: The point (1) is fundamental frequency that is not evaluated in this standard.

Site: SIP-AC3	Time: 2022/06/10 - 16:14
Limit: FCC Part15.249 RSE(3m)	Engineer: Arvin
Probe: BBHA 9170 00935 18-40GHz	Polarity: Vertical
EUT: Intelligent Toilet-V7232-3	Power: AC 120V/60Hz
Note: Transmit at 24GHz	

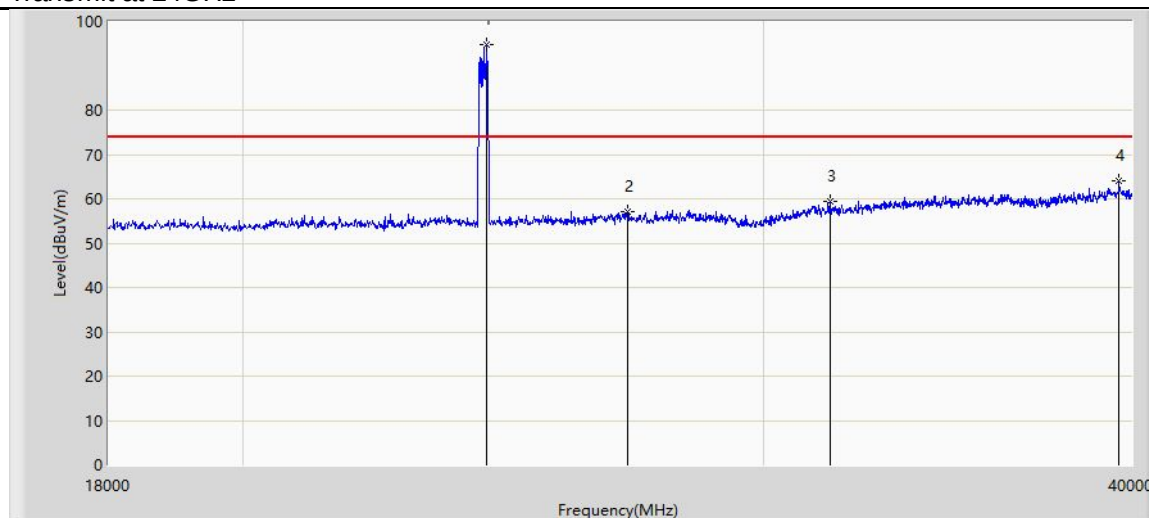

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		24182.000	94.849	103.387	N/A	N/A	-8.538	PK
2		26987.000	56.991	65.084	-17.009	74.000	-8.093	PK
3		31629.000	59.549	68.547	-14.451	74.000	-8.998	PK
4	*	39615.000	63.944	63.555	-10.056	74.000	0.389	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Note 4: The point (1) is fundamental frequency that is not evaluated in this standard.

Site: SIP-AC3	Time: 2022/06/10 - 16:17
Limit: FCC Part15.249 RSE(3m)	Engineer: Arvin
Probe: BBHA 9170 00935 18-40GHz	Polarity: Vertical
EUT: Intelligent Toilet-V7232-3	Power: AC 120V/60Hz
Note: Transmit at 24GHz	

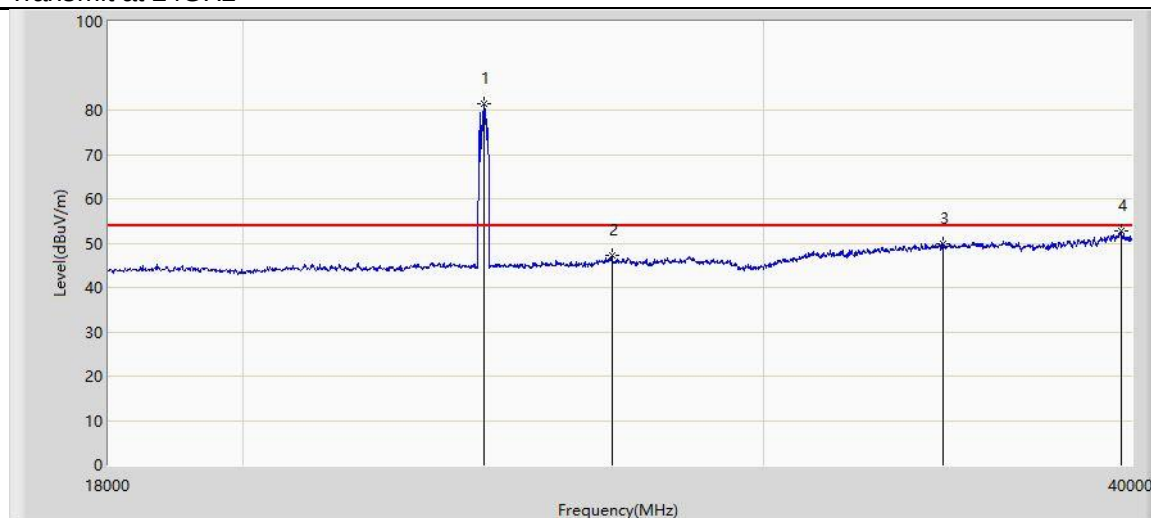

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		24138.000	81.318	90.069	N/A	N/A	-8.751	AV
2		26668.000	47.258	54.758	-6.742	54.000	-7.500	AV
3		34544.000	49.895	56.856	-4.105	54.000	-6.961	AV
4	*	39670.000	52.693	52.444	-1.307	54.000	0.249	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).


Note 4: The point (1) is fundamental frequency that is not evaluated in this standard.

40GHz - 50GHz

PK Limit: 97.45 dB μ V/m at 1m

AV Limit: 77.45 dB μ V/m at 1m


Horizontal-Average

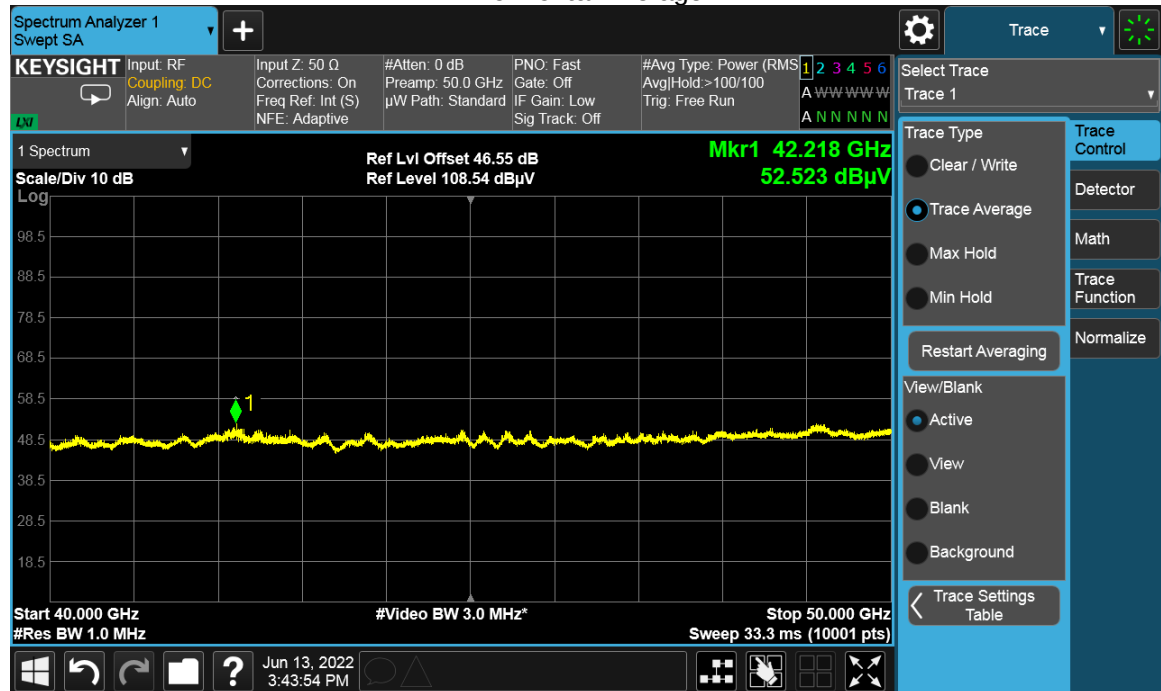


Vertical-Average



Horizontal-Peak

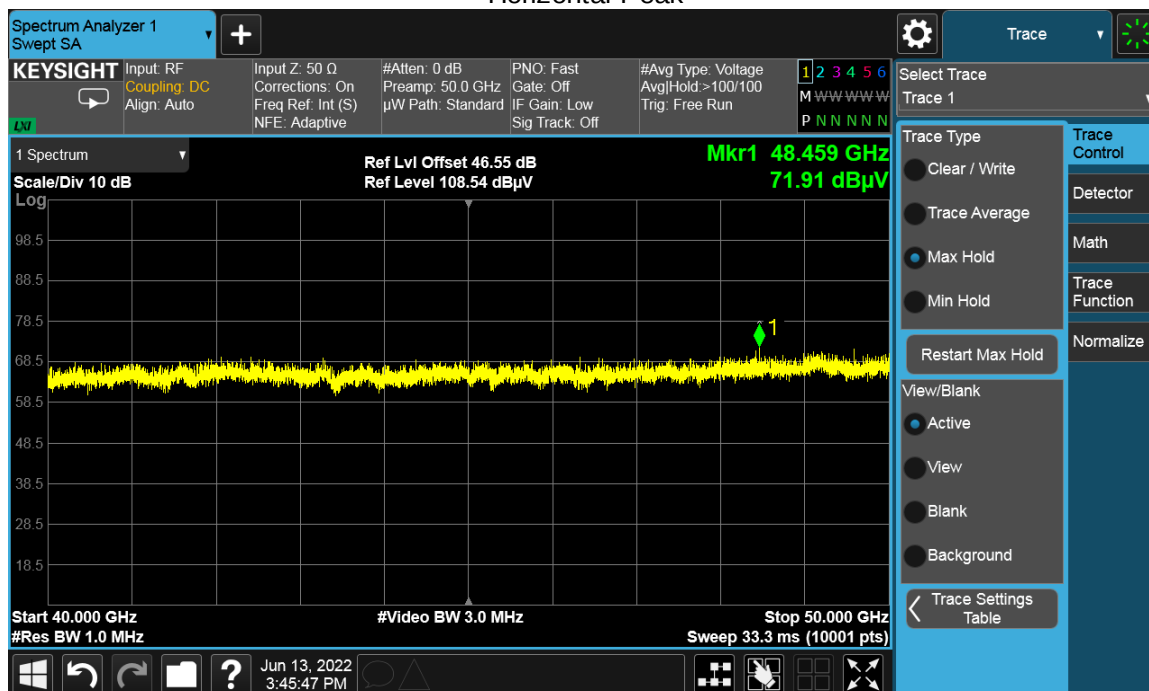

Vertical-Peak

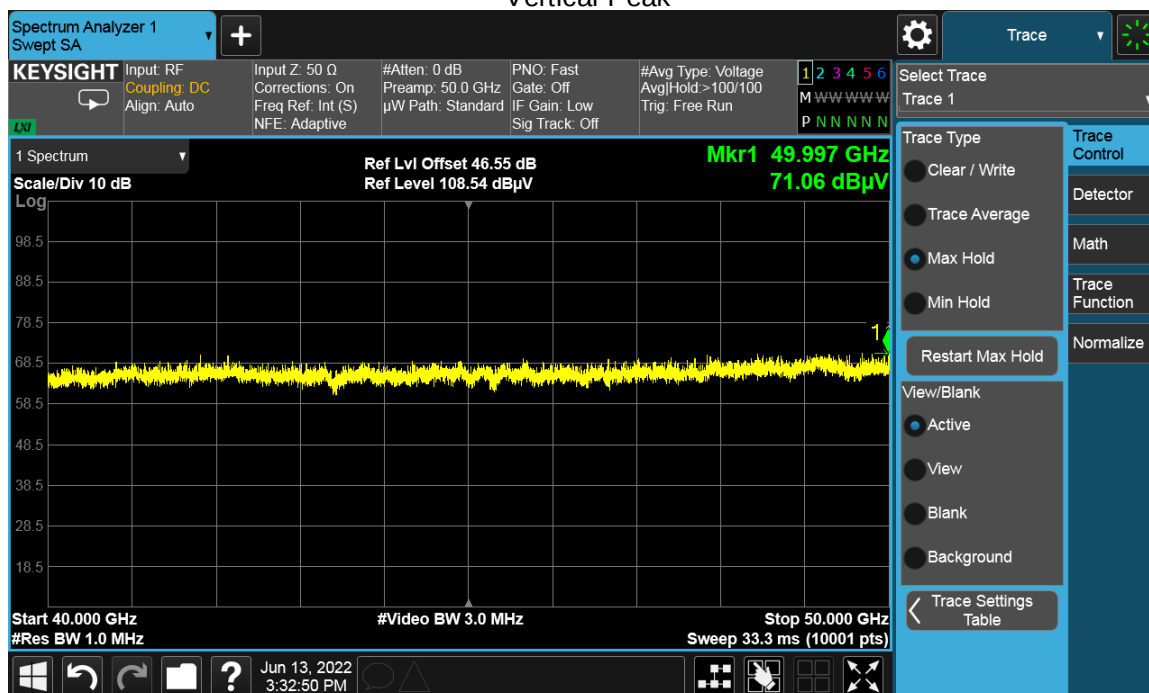


50GHz - 75GHz


PK Limit: 97.45 dB μ V/m at 1m

AV Limit: 77.45 dB μ V/m at 1m


Horizontal-Average

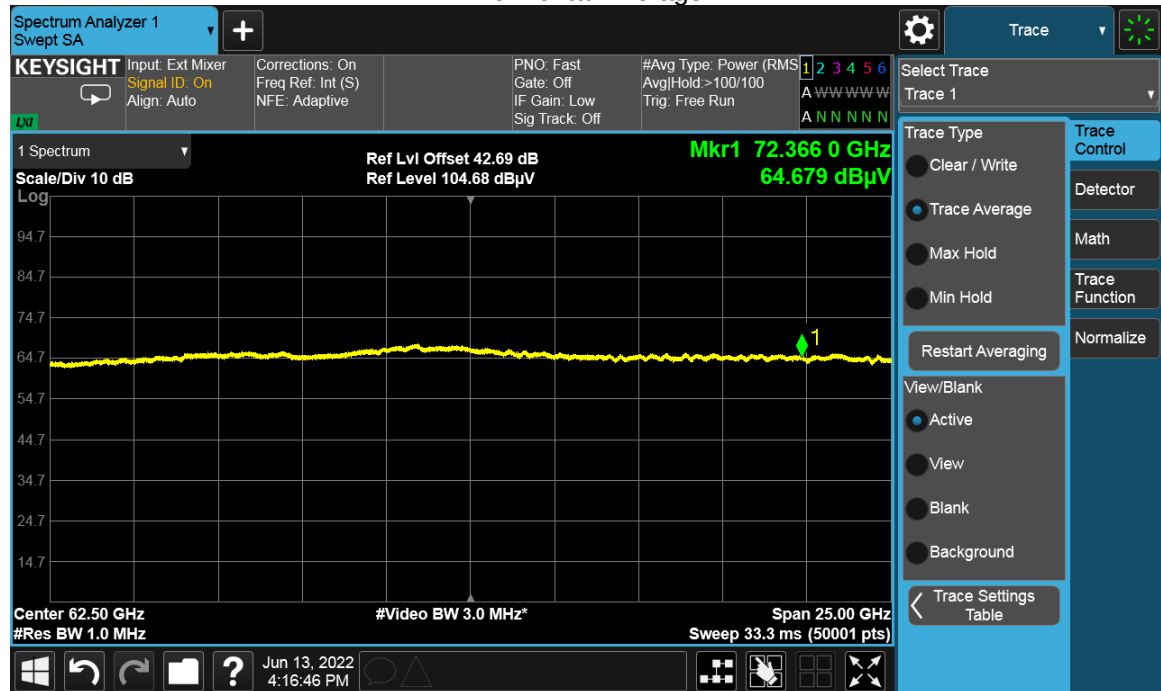


Vertical-Average

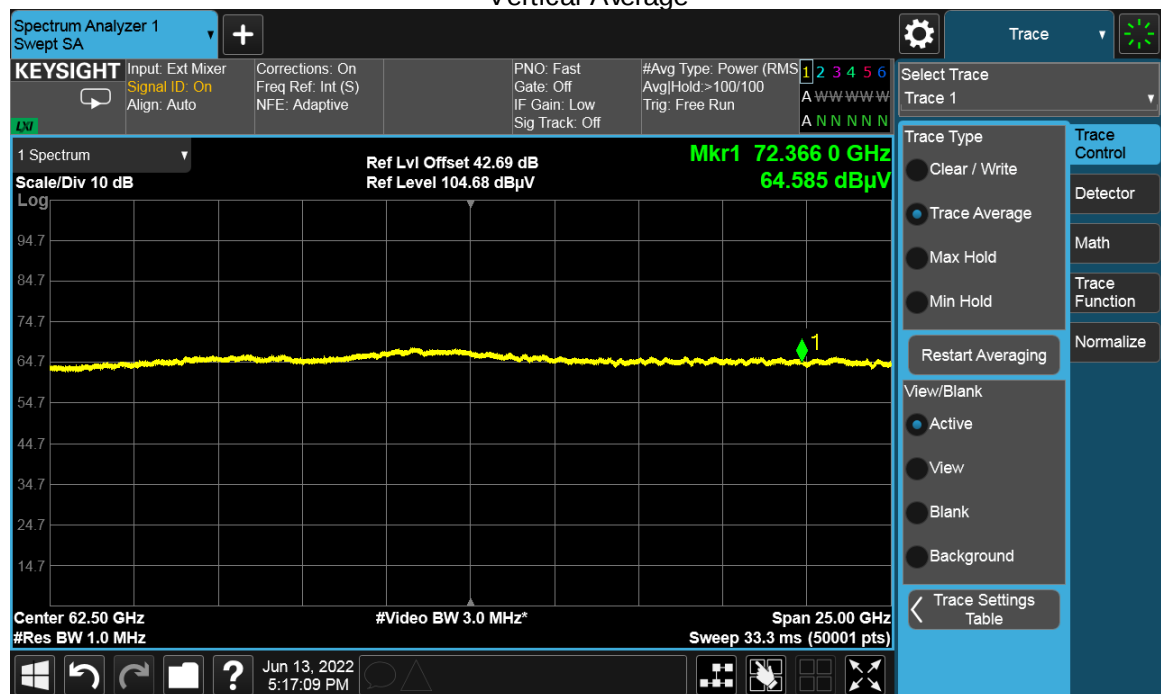

Horizontal-Peak

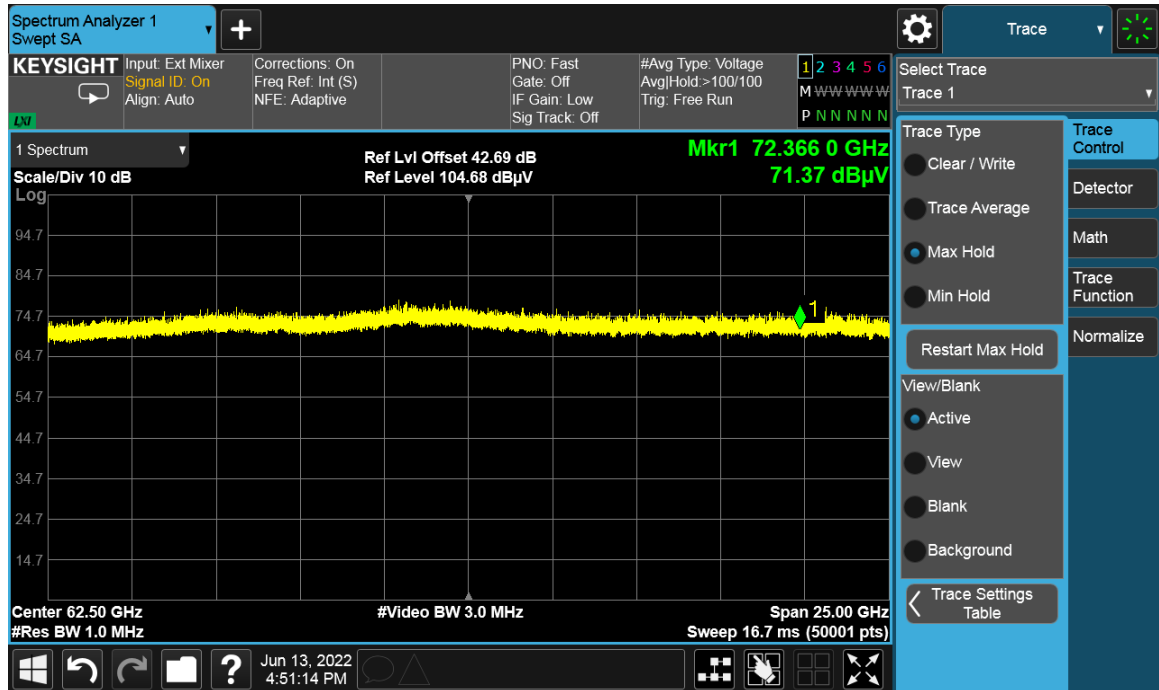

Vertical-Peak

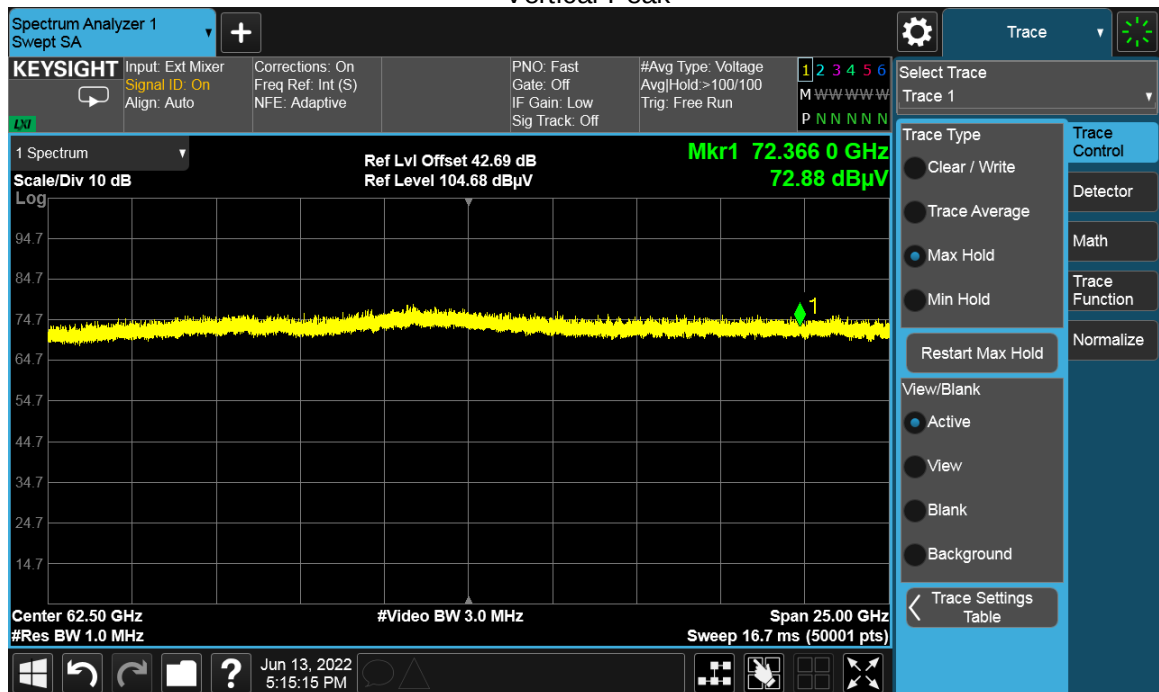


75GHz - 100GHz


PK Limit: 97.45 dB μ V/m at 1m

AV Limit: 77.45 dB μ V/m at 1m


Horizontal-Average

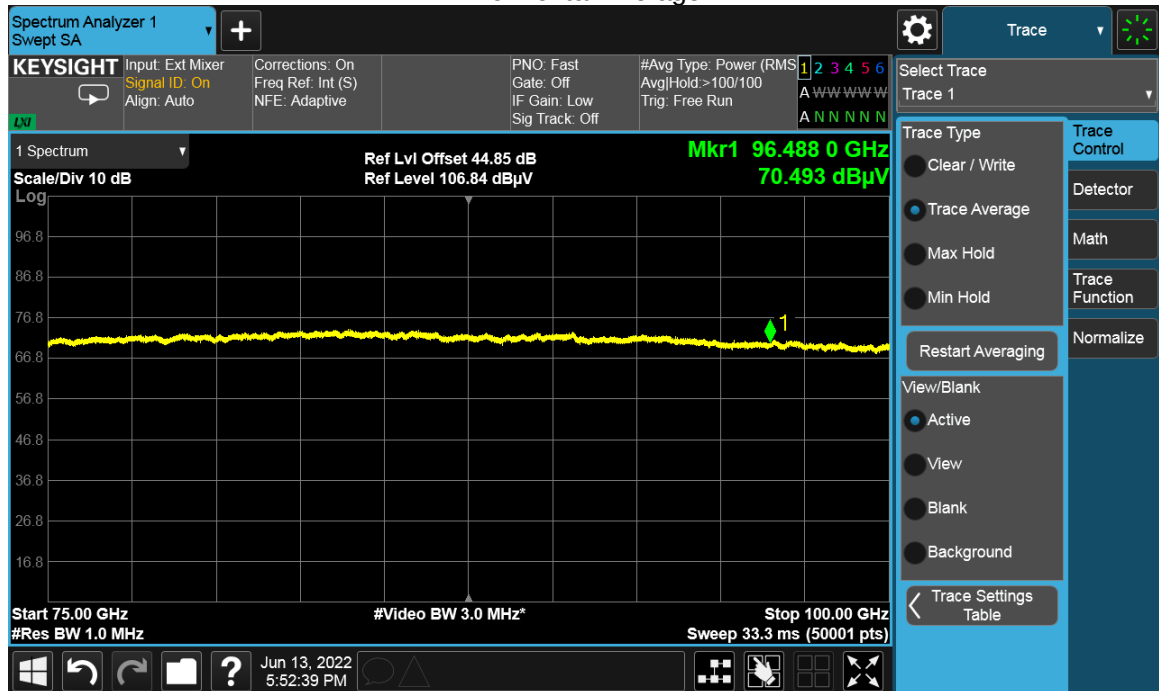


Vertical-Average

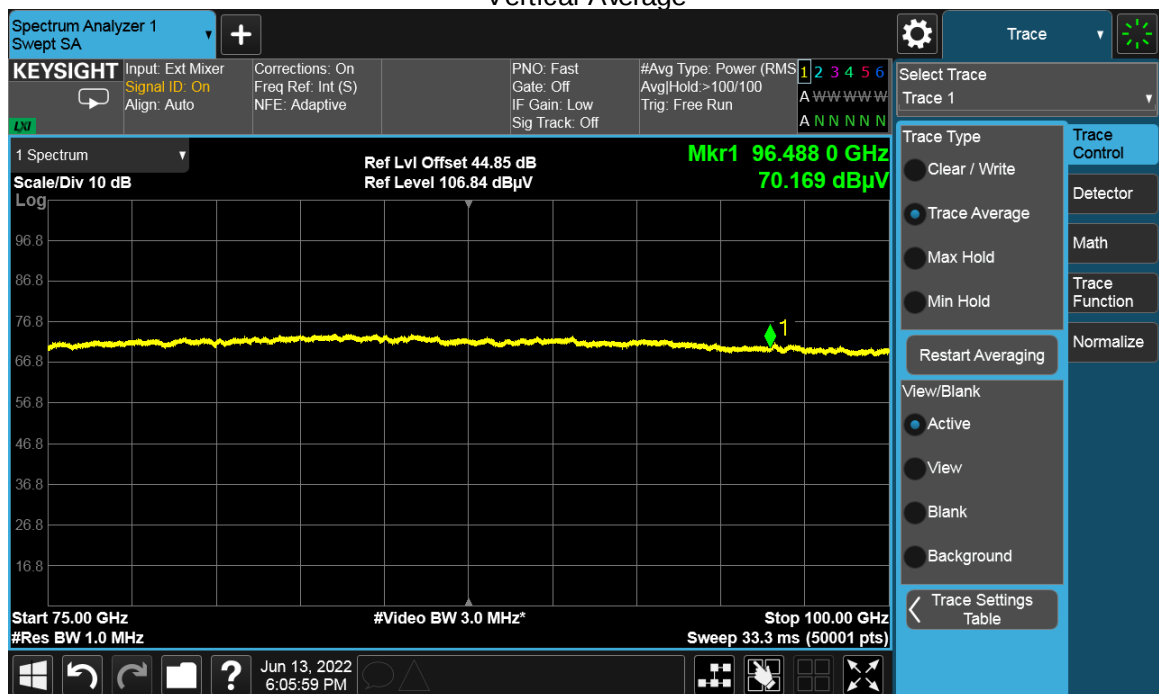


Horizontal-Peak

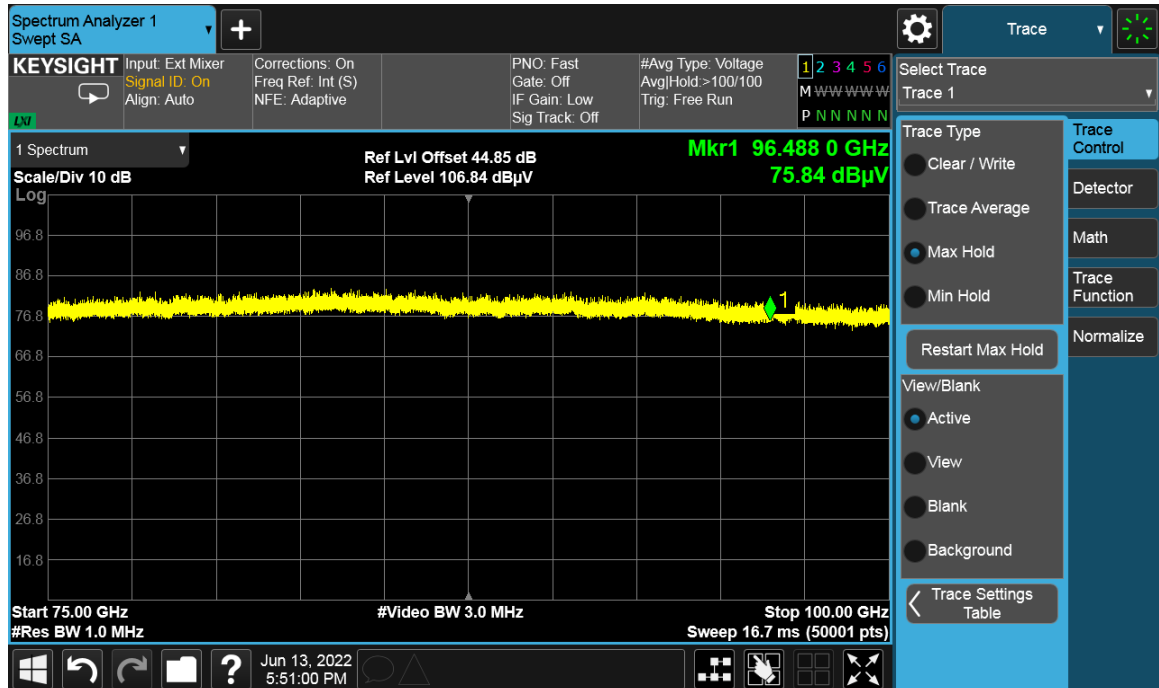

Vertical-Peak

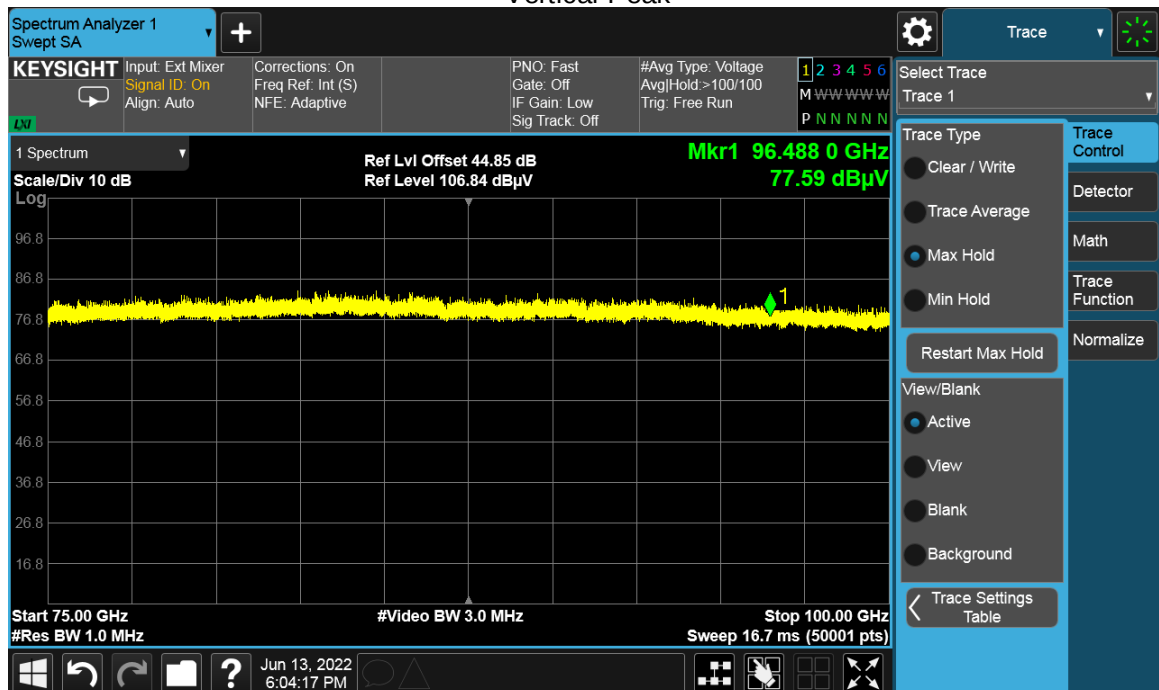


Appendix B.3: Test Results of 20dB and 99% Bandwidth

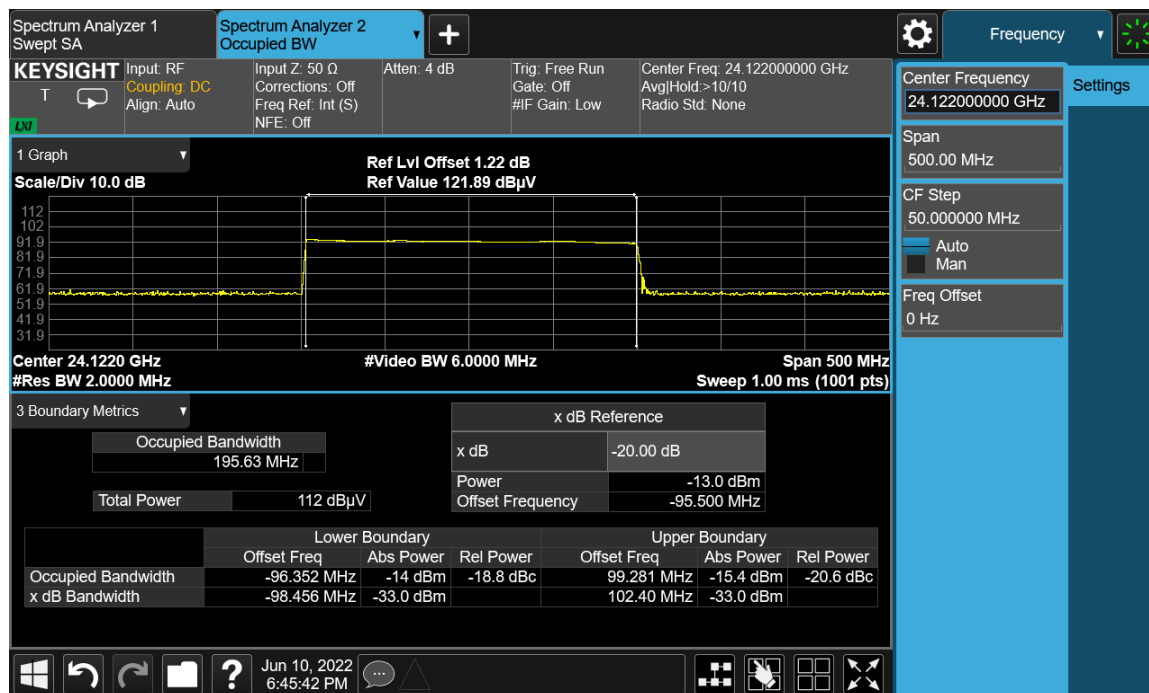

Appendix B.4: Test Results of Band Edge

Site: SIP-AC3	Time: 2022/06/10 - 16:24
Limit: FCC_Part15.249_RSE(3m)	Engineer: Arvin
Probe: BBHA 9170_00935_18-40GHz	Polarity: Horizontal
EUT: Intelligent Toilet-V7232-3	Power: AC 120V/60Hz
Test Mode: Transmit at 24GHz	

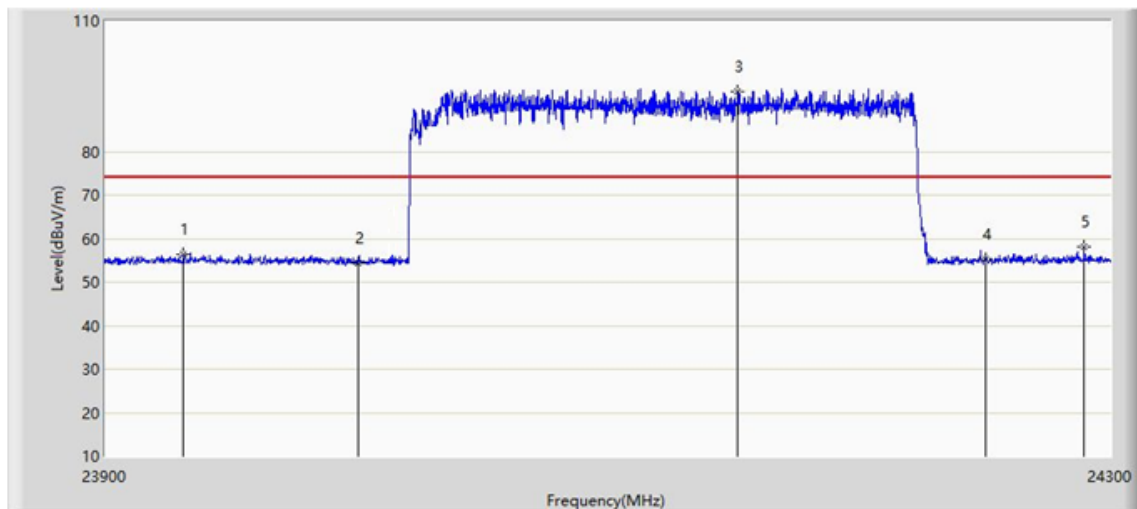


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		23931.000	56.453	65.057	-17.547	74.000	-8.604	PK
2		24000.000	54.375	63.261	-19.625	74.000	-8.886	PK
3		24151.000	93.850	102.517	N/A	N/A	-8.668	PK
4		24250.000	55.096	63.669	-18.904	74.000	-8.572	PK
5	*	24289.600	58.063	66.582	-15.937	74.000	-8.519	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Time: 2022/06/10 - 16:47
Limit: FCC Part15.249 RSE(3m)	Engineer: Arvin
Probe: BBHA 9170 00935 18-40GHz	Polarity: Horizontal
EUT: Intelligent Toilet-V7232-3	Power: AC 120V/60Hz
Test Mode: Transmit at 24GHz	

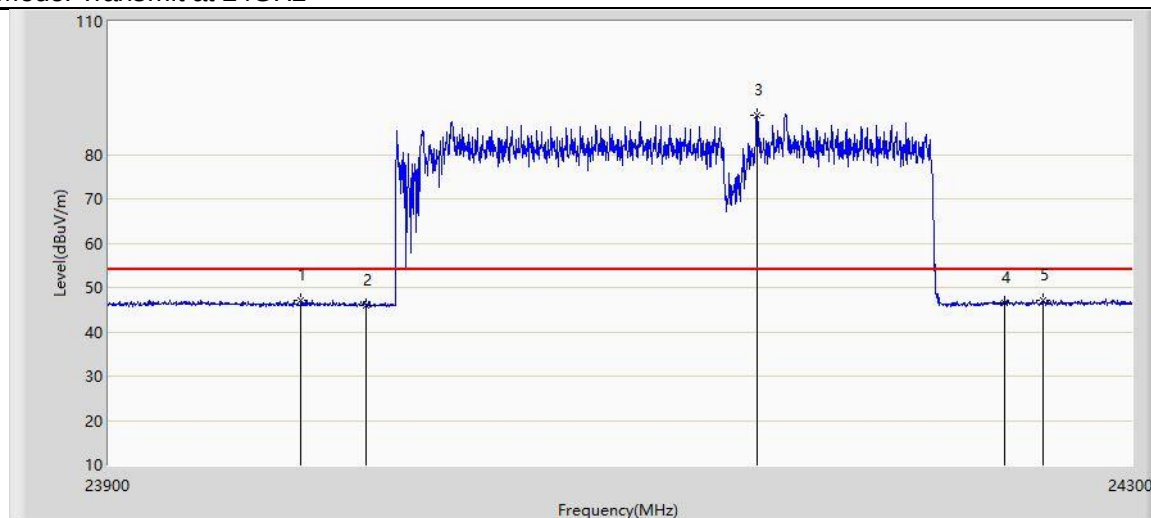

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	23974.801	47.153	55.934	-6.847	54.000	-8.781	AV
2		24000.000	45.807	54.693	-8.193	54.000	-8.886	AV
3		24152.801	88.886	97.541	N/A	N/A	-8.656	AV
4		24250.000	46.629	55.202	-7.371	54.000	-8.572	AV
5		24265.400	47.140	55.671	-6.860	54.000	-8.530	AV

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Prüfbericht - Produkte

Test Report - Products

Site: SIP-AC3	Time: 2022/06/10 - 17:05
Limit: FCC Part15.249 RSE(3m)	Engineer: Arvin
Probe: BBHA 9170 00935 18-40GHz	Polarity: Vertical
EUT: Intelligent Toilet-V7232-3	Power: AC 120V/60Hz
Test Mode: Transmit at 24GHz	

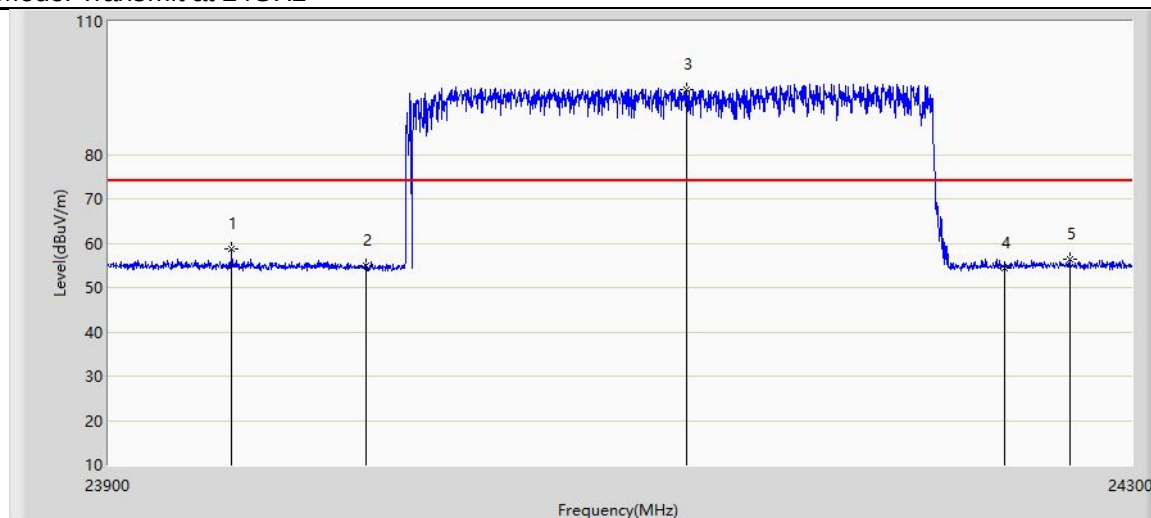

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	23948.000	58.675	67.338	-15.325	74.000	-8.663	PK
2		24000.000	54.863	63.749	-19.137	74.000	-8.886	PK
3		24125.400	94.638	103.413	N/A	N/A	-8.776	PK
4		24250.000	54.242	62.815	-19.758	74.000	-8.572	PK
5		24275.801	56.270	64.788	-17.730	74.000	-8.518	PK

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Prüfbericht - Produkte

Test Report - Products

Site: SIP-AC3	Time: 2022/06/10 - 17:12
Limit: FCC Part15.249 RSE(3m)	Engineer: Arvin
Probe: BBHA 9170 00935 18-40GHz	Polarity: Vertical
EUT: Intelligent Toilet-V7232-3	Power: AC 120V/60Hz
Test Mode: Transmit at 24GHz	

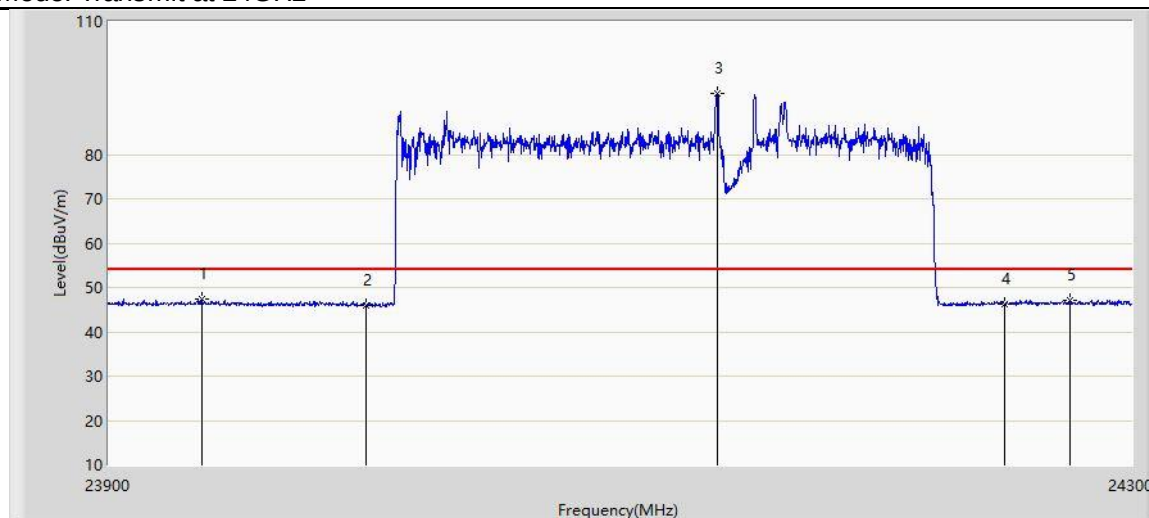

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	23936.199	47.366	55.971	-6.634	54.000	-8.605	AV
2		24000.000	46.017	54.903	-7.983	54.000	-8.886	AV
3		24137.199	93.736	102.489	N/A	N/A	-8.752	AV
4		24250.000	46.323	54.896	-7.677	54.000	-8.572	AV
5		24276.000	47.174	55.692	-6.826	54.000	-8.518	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Appendix B.5: Test Results of Conducted emission

Site: SIP-SR2

Time: 2022/06/14 - 15:25

Temperature: 25.4°C

Humidity: 52.4%

Limit: FCC_Part15.207_CE_AC Power

Engineer: Augleo Wang


Probe: SIP-SR2-ENV216_101684_C

Polarity: Line

EUT: V7232-3

Power: AC 120V/60Hz

Note:

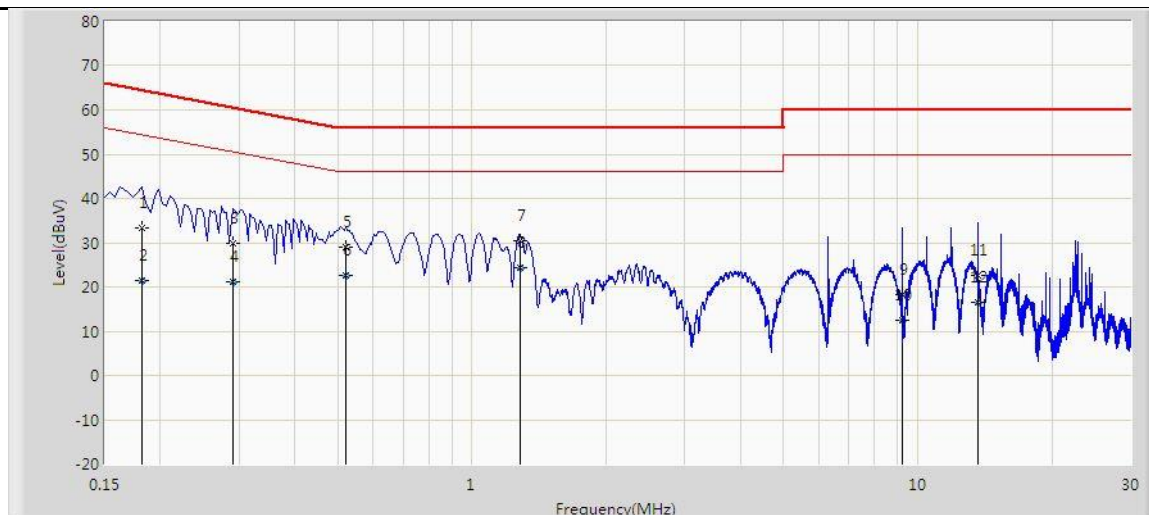

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.182	33.279	23.632	-31.115	64.394	9.646	QP
2		0.182	21.485	11.839	-32.909	54.394	9.646	AV
3		0.290	29.718	20.011	-30.807	60.524	9.707	QP
4		0.290	21.090	11.383	-29.435	50.524	9.707	AV
5		0.522	28.901	19.181	-27.099	56.000	9.720	QP
6		0.522	22.531	12.811	-23.469	46.000	9.720	AV
7		1.286	30.487	20.762	-25.513	56.000	9.726	QP
8	*	1.286	24.215	14.490	-21.785	46.000	9.726	AV
9		9.226	18.380	8.367	-41.620	60.000	10.013	QP
10		9.226	12.486	2.473	-37.514	50.000	10.013	AV
11		13.610	22.536	12.400	-37.464	60.000	10.136	QP
12		13.610	16.445	6.309	-33.555	50.000	10.136	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Prüfbericht - Produkte

Test Report - Products

Site: SIP-SR2

Time: 2022/06/14 - 15:30

Temperature: 25.4°C

Humidity: 52.4%

Limit: FCC Part15.207 CE AC Power

Engineer: Augleo Wang


Probe: SIP-SR2-ENV216_101684_C

Polarity: Neutral

EUT: V7232-3

Power: AC 120V/60Hz

Note:

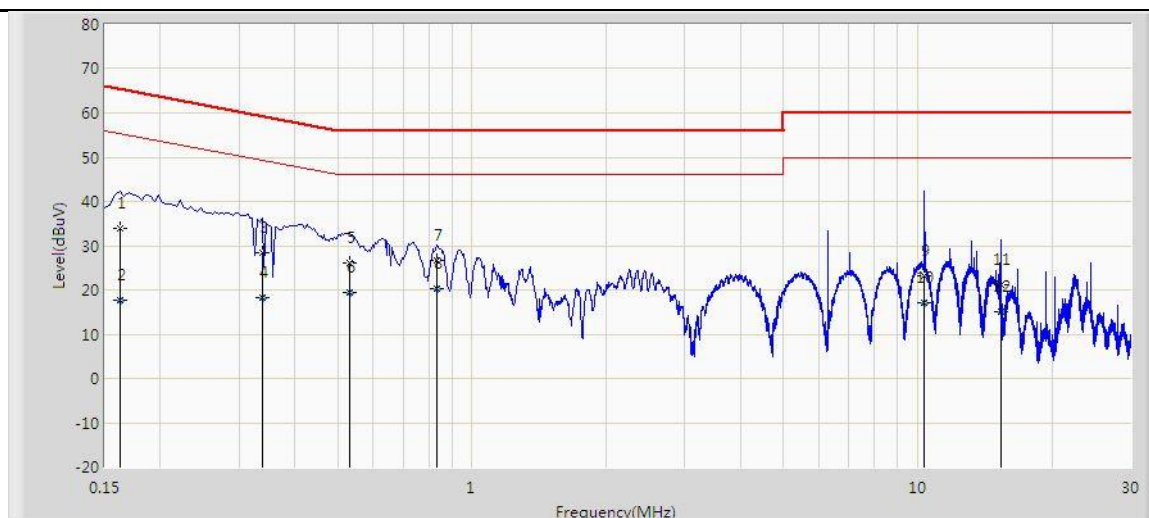

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.162	33.989	24.351	-31.372	65.361	9.637	QP
2		0.162	17.800	8.162	-37.561	55.361	9.637	AV
3		0.338	28.301	18.594	-30.951	59.252	9.707	QP
4		0.338	18.370	8.663	-30.882	49.252	9.707	AV
5		0.530	25.978	16.268	-30.022	56.000	9.710	QP
6		0.530	19.347	9.637	-26.653	46.000	9.710	AV
7		0.834	26.659	16.953	-29.341	56.000	9.706	QP
8	*	0.834	20.397	10.692	-25.603	46.000	9.706	AV
9		10.362	23.220	13.082	-36.780	60.000	10.138	QP
10		10.362	17.064	6.925	-32.936	50.000	10.138	AV
11		15.330	21.215	11.032	-38.785	60.000	10.183	QP
12		15.330	15.178	4.995	-34.822	50.000	10.183	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).