


Antenna test report

◆Project name	
◆Customer	BYM
◆test frequency	BT (2. 4G)
◆Antenna material	PVB
◆Product name	BAND
◆Material Science	Metal
◆Testers	l iuq ingyun
◆Consulting phone	
◆date	2019. 8. 21

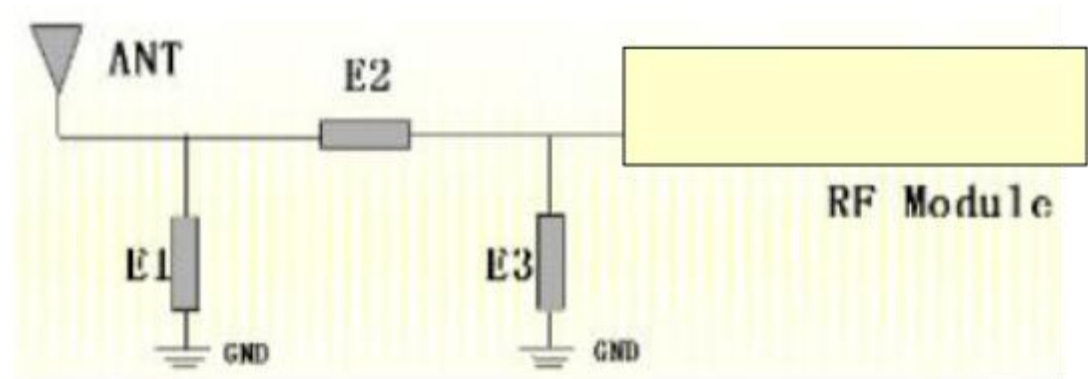

matching	parameter	
E1(0402)	10nH	
E2(0402)	1pF	
E3(0402)	3.9nH	

Passive antenna test



SWR

frequency	SWR
2400	1.74



Return loss

frequency	Return loss
2400	-11.33db

Passive antenna efficiency test

(antenna 2.4G-3D- benefit)

FEITUKEJI											
Frequency ID	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0
Point Values											
Ant. Port Input Pwr. (dBm)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Tot. Rad. Pwr. (dBm)	-5.10	-5.11	-5.30	-5.48	-5.58	-5.57	-5.56	-5.46	-5.49	-5.41	-5.10
Peak EIRP (dBm)	-0.88	-0.84	-1.02	-1.11	-1.23	-1.17	-1.08	-0.94	-0.86	-0.81	-0.48
Directivity (dBi)	4.22	4.27	4.29	4.37	4.35	4.40	4.47	4.52	4.64	4.60	4.62
Efficiency (dB)	-5.10	-5.11	-5.30	-5.48	-5.58	-5.57	-5.56	-5.46	-5.49	-5.41	-5.10
Efficiency (%)	30.90	30.90	29.50	28.30	27.70	27.70	27.80	28.50	28.20	28.80	30.90
Gain (dBi)	-0.88	-0.84	-1.02	-1.11	-1.23	-1.17	-1.08	-0.94	-0.86	-0.81	-0.48
NHPRP $\pm$ Pi/ 4 (dBm)	-6.23	-6.23	-6.48	-6.63	-6.72	-6.65	-6.49	-6.27	-6.26	-6.17	-5.91
NHPRP $\pm$ Pi/ 6 (dBm)	-7.63	-7.63	-7.88	-8.03	-8.13	-8.06	-7.91	-7.68	-7.68	-7.60	-7.34
NHPRP $\pm$ Pi/ 8 (dBm)	-9.72	-9.73	-9.95	-10.13	-10.22	-10.16	-10.02	-9.80	-9.81	-9.74	-9.49
Upper Hem. PRP (dBm)	-8.90	-8.92	-9.12	-9.30	-9.40	-9.41	-9.41	-9.35	-9.41	-9.34	-9.05
Lower Hem. PRP (dBm)	-7.44	-7.44	-7.63	-7.81	-7.91	-7.88	-7.86	-7.74	-7.75	-7.66	-7.35
Upper Hem. PRP (%)	12.88	12.83	12.24	11.75	11.48	11.45	11.44	11.62	11.46	11.64	12.45
Lower Hem. PRP (%)	18.02	18.03	17.25	16.54	16.20	16.29	16.39	16.84	16.78	17.12	18.42

Contrast data diagram of antenna measured (10 meters distance)



