

File reference No: 2022-05-16

Applicant: Hangzhou Roombanker Technology Co., Ltd

Product: Outdoor LoraWAN Gateway

Model No: DSGW-010C

Trademark: N/A

Test Standards: FCC Part 15 Subpart E, Paragraph 15.407

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15 Subpart C, Paragraph 15.247 regulations for the evaluation of

electromagnetic compatibility

Approved By

21

Terry Tang

Manager

Dated: May 16, 2022

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Date: 2022-05-16



Page 2 of 169

Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	6
1.5	Test Duration.	6
1.6	Test Uncertainty	6
1.7	Test By	6
2.0	List of Measurement Equipment	7
3.0	Technical Details	8
3.1	Summary of Test Results.	8
3.2	Test Standards.	8
4.0	EUT Modification.	8
5.0	Power Line Conducted Emission Test.	9
5.1	Schematics of the Test.	9
5.2	Test Method and Test Procedure.	9
5.3	Configuration of the EUT	9
5.4	EUT Operating Condition.	10
5.5	Conducted Emission Limit.	10
5.6	Test Result.	10
6.0	Undesirable Emission and Restrict band.	13
7.0	Bandwidth Measurement.	39
8.0	Peak Transmit Power Measurement.	122
9.0	Peak Power Spectral Density Measurement	128
10.0	Frequency Stability	163
11.0	Antenna Requirement.	166
12.0	FCC ID Label.	167
13.0	Photo of Test Setup and EUT View.	168

Date: 2022-05-16



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number: 744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A

For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Hangzhou Roombanker Technology Co., Ltd Address: A#801 Wantong center, Hangzhou, China

Telephone: +86-18768289112

Fax: --

1.3 Description of EUT

Product: Outdoor LoraWAN Gateway

Manufacturer: Hangzhou Roombanker Technology Co., Ltd Address: A#801 Wantong center, Hangzhou, China

Trademark: N/A
Additional Trademark: N/A

Model Number: DSGW-010C

Additional Model Number: N/A
Hardware Version: V0.1
Software Version: V0.1
Rating: DC48V

Power Supply: Model: RP028-4800320Z

Input: 100-240V~, 50/60Hz, 0.6A Max; Output: 48V, 0.32A, 15.36W

Type of Modulation IEEE 802.11a/n (HT20/HT40): OFDM (64QAM, 16QAM, QPSK, BPSK);

IEEE 802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM

Frequency Band 1: 5180MHz-5240MHz;

Band 4: 5745MHz-5825MHz

Air Data Rate IEEE 802.11a: 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n/HT20: mcs0-mcs15 IEEE 802.11n/HT40: mcs0-mcs15 IEEE 802.11ac: NSS1 mcs0-mcs9

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2022-05-16



Antenna: External Antenna with Reverse polarity N connector used. The gain of the antennas is

0.20dBi (Declared by the manufacturer)

Test Mode: During testing, EUT was set to 100% duty cycle. 6Mbps air data rate was the worst

case for 802.11a mode; mcs0 air data rate was the worst case for 802.11n mode;

NSS1 mcs0 air data rate was the worst case for 802.11ac mode;

Frequency Selection By software

Each Channel Operation Frequency

Each Chainlet Operation Frequency						
	Band 1					
802.11a / 11n HT	20 / 802.11ac VHT20	802.11n HT4	40 / 802.11acVHT40	802.11ac VHT80		
Channel	Frequency	Channel	Frequency	Channel	Frequency	
36	5180MHz	38	5190 MHz	42	5210 MHz	
40	5200 MHz	46	5230 MHz			
44	5220 MHz					
48	5240 MHz					
		В	Sand 4			
802.11a / 11n HT	20 / 802.11ac VHT20	802.11n HT40 / 802.11acVHT40		802.11ac VHT80		
Channel	Frequency	Channel	Frequency	Channel	Frequency	
149	5745 MHz	151	5755 MHz	155	5775 MHz	
153	5765 MHz	159	5795 MHz			
157	5785 MHz					
161	5825 MHz					

The selected test channels as follows:

	The believed test enamed as follows.					
Band 1						
802.11a /	802.11a / 11n HT20 802.11n HT40				ac VHT80	
Channel	Frequency	Channel	Frequency	Channel	Frequency	
36	5180MHz	38	5190 MHz	42	5210 MHz	
40	5200 MHz	46	5230 MHz			
48	5240 MHz					

	Band 4					
802.11a	/ 11n HT20	802.11	n HT40	802.11	ac VHT80	
Channel	Frequency	Channel	Frequency	Channel	Frequency	
149	5745 MHz	151	5755 MHz	155	5775 MHz	
153	5765 MHz	159	5795 MHz			
161	5825 MHz					

Note: 802.11ac VHT20/VHT40 is similar with 802.11n HT20/HT40.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2203419-03E Page 6 of 169

Date: 2022-05-16



1.4 Submitted Sample: 1 Samples

1.5 Test Duration 2022-03-28 to 2022-05-16

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty =5%

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Andy Xing

Date: 2022-05-16



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2021-06-18	2022-06-17
LISN	R&S	EZH3-Z5	100294	2021-06-18	2022-06-17
LISN	R&S	EZH3-Z5	100253	2021-06-18	2022-06-17
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2021-06-18	2022-06-17
Loop Antenna	EMCO	6507	00078608	2021-06-18	2024-06-17
Spectrum	R&S	FSIQ26	100292	2021-06-18	2022-06-17
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2021-06-18	2022-06-17
Horn Antenna	R&S	BBHA 9120D	9120D-631	2021-07-02	2024-07-01
Power meter	Anritsu	ML2487A	6K00003613	2021-06-18	2022-06-17
Power sensor	Anritsu	MA2491A	32263	2021-06-18	2022-06-17
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2021-07-02	2024-07-01
9*6*6 Anechoic			N/A	2021-07-02	2022-07-01
EMI Test Receiver	RS	ESVB	826156/011	2021-06-18	2022-06-17
EMI Test Receiver	RS	ESH3	860904/006	2021-06-18	2022-06-17
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2021-06-18	2022-06-17
Spectrum	HP/Agilent	E4407B	MY50441392	2021-06-18	2022-06-17
Spectrum	RS	FSP	1164.4391.38	2022-01-14	2023-01-13
DE C-1-1-	71 1:	ZT26-NJ-NJ-8		2021 06 10	2022 06 17
RF Cable	Zhengdi	M/FA		2021-06-18	2022-06-17
RF Cable	Zhengdi	7m		2021-06-18	2022-06-17
RF Switch	EM	EMSW18	060391	2021-06-18	2022-06-17
Pre-Amplifier	Schwarebeck	BBV9743	#218	2021-06-18	2022-06-17
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2021-06-18	2022-06-17
LISN	SCHAFFNER	NNB42	00012	2022-01-05	2023-01-04

2.2 Automation Test Software

For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 8 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



3.0 **Technical Details**

3.1 **Summary of test results**

The EUT has been tested according to the following specifications:				
Standard	Test Type	Result	Notes	
FCC Part 15, Paragraph 15.407	Conducted Emission Test	Pass	Complies	
FCC Part 15 Subpart E Paragraph 15.407 (b1/4/5/6/7), Part 15.205 and Part 15.209	Undesirable Emission and Restrict band	Pass	Complies	
FCC Part 15, Paragraph 15.407 (a1/2/3)	Peak Transmit Power	Pass	Complies	
FCC Part 15, Paragraph 15.407 (a)(6)	Peak Power Excursion	Pass	Complies	
FCC Part 15, Paragraph 15.407 (a/1/2/3)	Peak Power Spectral Density	Pass	Complies	
FCC Part 15, Paragraph 15.407(g)	Frequency Stability	Pass	Complies	

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247, ANSI C63.10:2013 and ANSI C63.4:2014 789033 D02 General UNII Test Procedures New Rules v01r04

4.0 **EUT Modification**


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Date: 2022-05-16



5. Power Line Conducted Emission Test

5.1 Schematics of the test

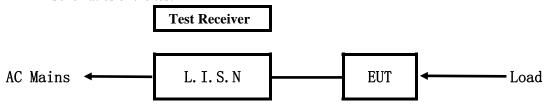


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2009. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

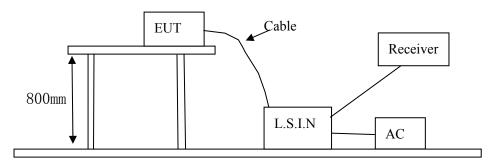

5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
Outdoor			
LoraWAN	Hangzhou Roombanker Technology Co., Ltd	DSGW-010C	2AUXBDSGW-010C
Gateway			

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2203419-03E Page 10 of 169

Date: 2022-05-16



B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	Rating
		-	-

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10 -2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition
- 5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB μ V)		
(MHz)	Quasi-peak Level	Average Level	
0.15 ~ 0.50	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	56.0	46.0	
5.00 ~ 30.00	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Note: Only the worst case was recorded in the test report.

Date: 2022-05-16



A: Conducted Emission on Live Terminal (150kHz to 30MHz)


EUT Operating Environment

Humidity: 65%RH Atmospheric Pressure: 101 kPa Temperature: 26°C

EUT set Condition: Keeping WIFI Transmitting

Results: Pass

Please refer to following diagram for individual

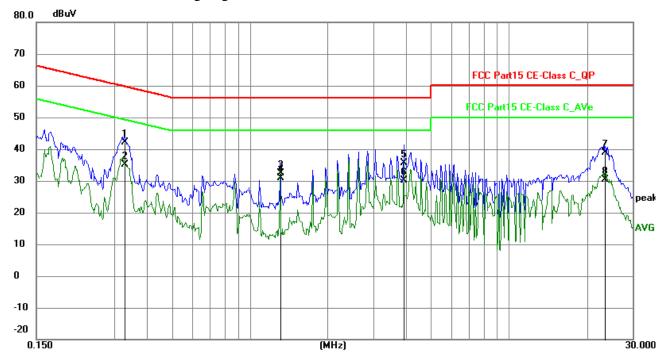

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.3294	32.45	9.76	42.21	59.47	-17.26	QP	Р
2	0.3294	25.31	9.76	35.07	49.47	-14.40	AVG	Р
3	1.3122	22.49	9.79	32.28	56.00	-23.72	QP	Р
4	1.3122	20.97	9.79	30.76	46.00	-15.24	AVG	Р
5	3.9399	25.68	9.88	35.56	56.00	-20.44	QP	Р
6	3.9399	20.37	9.88	30.25	46.00	-15.75	AVG	Р
7	23.3931	27.94	10.89	38.83	60.00	-21.17	QP	Р
8	23.3931	19.53	10.89	30.42	60.00	-29.58	QP	Р

Date: 2022-05-16



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Keeping WIFI Transmitting

Results: Pass

Please refer to following diagram for individual

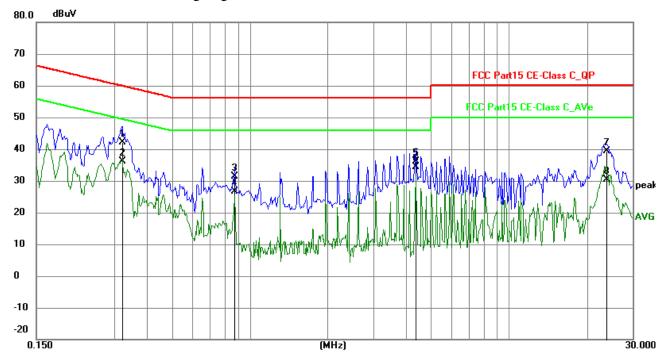

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.3215	32.49	9.76	42.25	59.67	-17.42	QP	Р
2	0.3215	26.43	9.76	36.19	49.67	-13.48	AVG	Р
3	0.8754	21.48	9.79	31.27	56.00	-24.73	QP	Р
4	0.8754	16.81	9.79	26.60	46.00	-19.40	AVG	Р
5	4.3728	26.13	9.90	36.03	56.00	-19.97	QP	Ъ
6	4.3728	24.56	9.90	34.46	46.00	-11.54	AVG	Р
7	23.8338	28.41	10.92	39.33	60.00	-20.67	QP	Р
8	23.8338	19.34	10.92	30.26	50.00	-19.74	AVG	Р

Date: 2022-05-16




6 Undesirable Emission and Restrict band

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 40 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz, VBW=3MHz and PK detector.

 Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "**QP**" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup


For radiated emissions from 9kHz to 30MHz

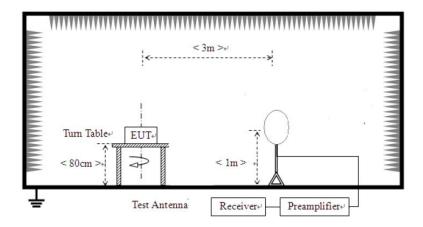


Date: 2022-05-16



For radiated emissions from 30MHz to1GHz

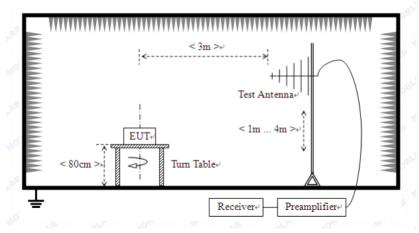

For radiated emissions above 1GHz

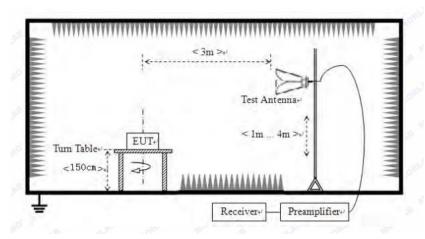

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Page 15 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

- (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz
- (2) For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27dBm/MHz.

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Note: Only the worst case was recorded in the test report. and 802.11a is the worst case.

Report No.: TW2203419-03E Page 16 of 169

Date: 2022-05-16



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keeping WIFI Transmitting

Results: Pass

Page 17 of 169


Report No.: TW2203419-03E

Date: 2022-05-16



Test Figure:

H

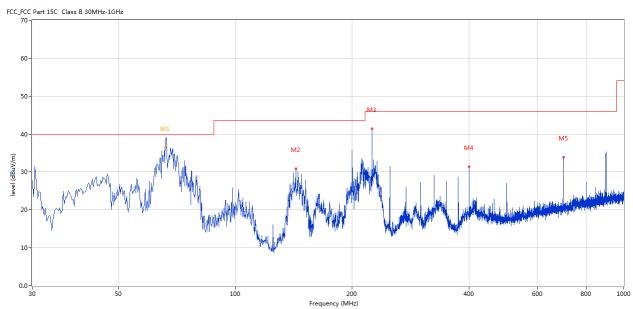

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	66.123	39.49	-13.97	40.0	-0.51	Peak	0.00	100	Horizontal	Pass
1*	66.123	36.37	-13.97	40.0	-3.63	QP	0.00	100	Horizontal	Pass
2	143.219	30.85	-17.22	43.5	-12.65	Peak	122.00	100	Horizontal	Pass
3	224.921	41.43	-12.93	46.0	-4.57	Peak	28.00	100	Horizontal	Pass
4	399.963	31.42	-8.57	46.0	-14.58	Peak	54.00	100	Horizontal	Pass
5	699.860	33.87	-4.20	46.0	-12.13	Peak	75.00	100	Horizontal	Pass

Page 18 of 169


Report No.: TW2203419-03E

Date: 2022-05-16



Test Figure:

V

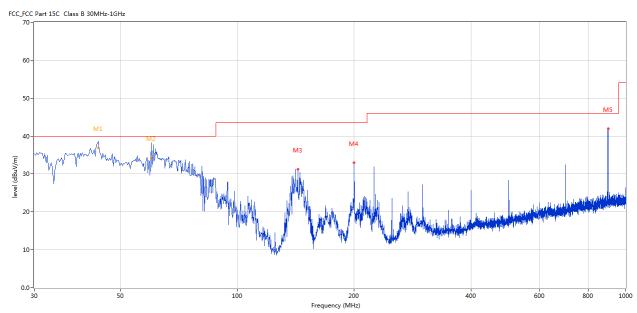

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	43.819	38.68	-11.48	40.0	-1.32	Peak	283.00	100	Vertical	Pass
1*	43.819	36.87	-11.48	40.0	-3.13	QP	283.00	100	Vertical	Pass
2	60.062	38.24	-12.97	40.0	-1.76	Peak	288.00	100	Vertical	Pass
2*	60.062	34.29	-12.97	40.0	-5.71	QP	288.00	100	Vertical	Pass
3	143.219	31.28	-17.22	43.5	-12.22	Peak	256.00	100	Vertical	Pass
4	199.950	32.90	-13.45	43.5	-10.60	Peak	341.00	100	Vertical	Pass
5	900.115	41.97	-1.86	46.0	-4.03	Peak	277.00	100	Vertical	Pass

Page 19 of 169


Report No.: TW2203419-03E

Date: 2022-05-16



Please refer to the following test plots for details:

CH36 for 11a at 6Mbps: Horizontal

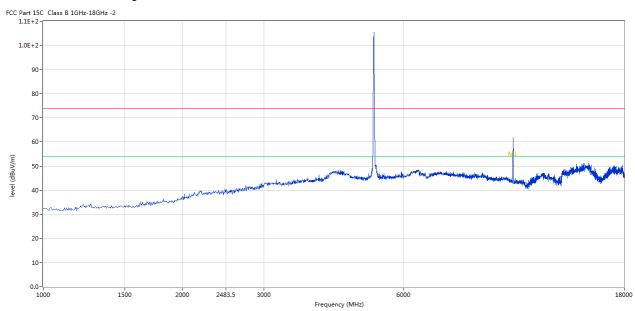

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	10356.161	62.82	6.25	74.0	-11.18	Peak	267.00	100	Horizontal	Pass
1**	10356.161	49.91	6.25	54.0	-4.09	AV	267.00	100	Horizontal	Pass


Page 20 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



CH36 for 11a at 6Mbps: Vertical

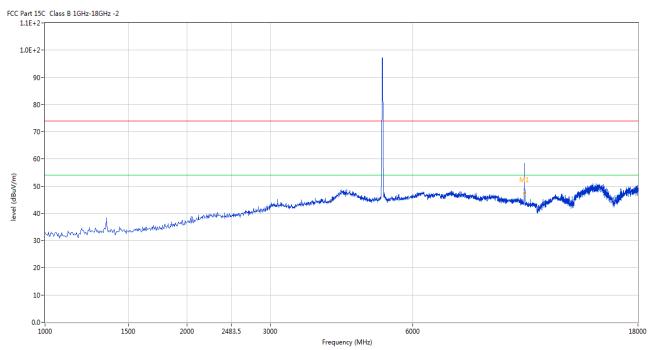

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	10360.410	58.34	6.24	74.0	-15.66	Peak	193.00	100	Vertical	Pass
1**	10360.410	47.43	6.24	54.0	-6.57	AV	193.00	100	Vertical	Pass


Page 21 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



CH40 for 11a at 6Mbps: Horizontal

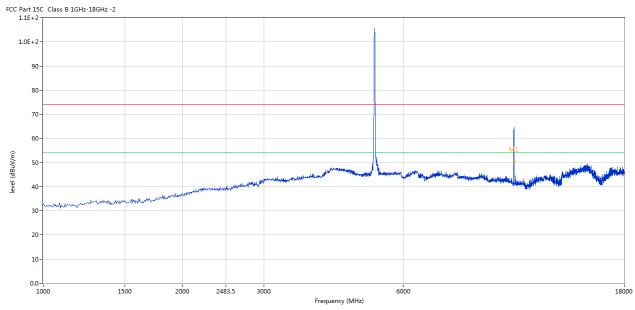

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	10398.650	64.57	6.17	74.0	-9.43	Peak	265.00	100	Horizontal	Pass
1**	10398.650	50.49	6.17	54.0	-3.51	AV	265.00	100	Horizontal	Pass


Page 22 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



CH40 for 11a at 6Mbps: Vertical

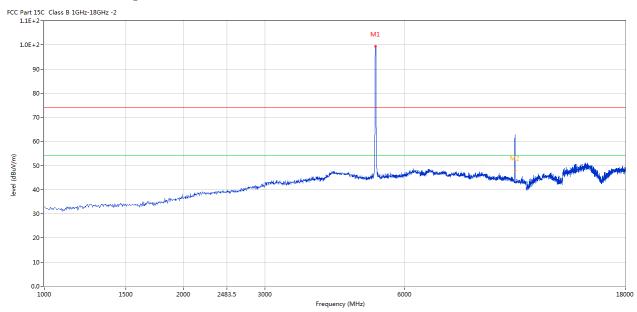

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	5202.199	99.50	3.64	74.0	25.50	Peak	197.00	100	Vertical	N/A
2	10398.650	62.72	6.17	74.0	-11.28	Peak	197.00	100	Vertical	Pass
2**	10398.650	47.83	6.17	54.0	-6.17	AV	197.00	100	Vertical	Pass


Page 23 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



CH48 for 11a at 6Mbps: Horizontal

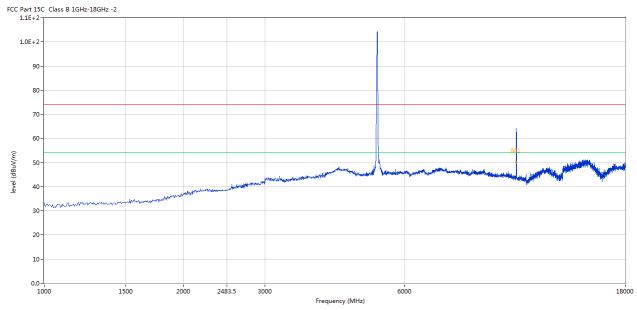

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	10466.633	64.13	6.03	74.0	-9.87	Peak	263.00	100	Horizontal	Pass
1**	10466.633	50.11	6.03	54.0	-3.89	AV	263.00	100	Horizontal	Pass


Page 24 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



CH48 for 11g at 6Mbps: Vertical

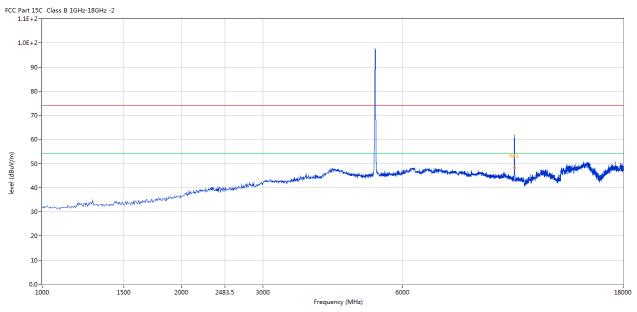

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	10479.380	61.88	6.00	74.0	-12.12	Peak	205.00	100	Vertical	Pass
1**	10479.380	48.37	6.00	54.0	-5.63	AV	205.00	100	Vertical	Pass

Note: 1. For radiated Emissions from 18-40GHz and below 30MHz, it is only the floor noise and less than the limit for more than 20dB. No necessary to take down.

2. 802.11a is the worst case.

Date: 2022-05-16



Restricted band Me	Restricted band Measurement											
EUT	Outdoor Lo	oraWAN Gateway	Test Mode:	Channel 36 (5180MHz)-11a								
Mode	Keeping	g Transmitting	Input Voltage	DC48V								
Temperature	24	l deg. C,	Humidity	56% RH								
Test Result:		Pass	Detector	PK								
5150	PK (dBμV/m)	45.7 (PK)	T in it	27.10 // 41.1								
	EIRP (dBm) -49.5		Limit	-27dBm/MHz								
Polarity	Н	orizontal										

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 45.7 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=45.7-95.2=-49.5dBm$

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	Outdoor Lo	raWAN Gateway	Test Mode:	Channel 36 (5180MHz)-11a	
Mode	Keeping Transmitting		Input Voltage	DC48V	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5150	PK (dBµV/m)	42.6 (PK)	T in it	27 10/MII	
	EIRP (dBm) -52.6		Limit	-27dBm/MHz	
Polarity	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 42.6 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 42.6 - 95.2 = -52.6 dBm$

Date: 2022-05-16



Restricted band Measurement					
EUT	Outdoor Lo	raWAN Gateway	Test Mode:	Channel 48 (5240MHz)-11a	
Mode	Keeping Transmitting		Input Voltage	DC48V	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5250	PK (dBµV/m)	49.1 (PK)	T in it	27 10 / 11	
	EIRP (dBm) -46.1		Limit	-27dBm/MHz	
Polarity	Но	orizontal			

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 49.1 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=49.1-95.2=-46.1dBm$

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	Outdoor Lo	raWAN Gateway	Test Mode:	Channel 48 (5240MHz)-11a	
Mode	Keeping Transmitting		Input Voltage	DC48V	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5250	PK (dBµV/m)	46.8 (PK)	T ' '/	27.15 (2.01)	
	EIRP (dBm) -48.4		Limit	-27dBm/MHz	
Polarity	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 46.8dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 46.8 - 95.2 = -48.4 dBm$

Date: 2022-05-16



Restricted band Measurement					
EUT	Outdoor Lo	oraWAN Gateway	Test Mode:	Channel 149 (5745MHz)-11a	
Mode	Keeping Transmitting		Input Voltage	DC48V	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5725	PK (dBµV/m)	53.9 (PK)	T ''4	17 ID - /A (II	
	EIRP (dBm) -41.3		Limit	-17dBm/MHz	
Polarity	Но	orizontal			

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 53.9 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=53.9-95.2=-41.3dBm$

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	Outdoor LoraWAN Gateway		Test Mode:	Channel 149 (5745MHz)-11a	
Mode	Keeping Transmitting		Input Voltage	DC48V	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5725	PK (dBμV/m)	PK (dBμV/m) 47.6(PK)		17.10/МП	
	EIRP (dBm) -47.6		Limit	-17dBm/MHz	
Polarity	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 47.6 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 47.6 - 95.2 = -47.6 dBm$

Date: 2022-05-16



Restricted band Measurement				
EUT	Outdoor Lo	raWAN Gateway	Test Mode:	Channel 161 (5825MHz)-11a
Mode	Keeping Transmitting		Input Voltage	DC48V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:		Pass		PK
5850	PK (dBµV/m)	55.8 (PK)	T imit	17 JD /MIL
	EIRP (dBm) -39.4		Limit	-17dBm/MHz
Polarity	Но	orizontal		

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 55.8 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=55.8-95.2=-39.4dBm$

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	Outdoor Lo	raWAN Gateway	Test Mode:	Channel 161 (5825MHz)-11a	
Mode	Keeping Transmitting		Input Voltage	DC48V	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5850	PK (dBµV/m)	50.2 (PK)	.	1515 241	
	EIRP (dBm) -45.0		Limit	-17dBm/MHz	
Polarity	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m]=50.2 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 50.2 - 95.2 = -45.0 dBm$

Date: 2022-05-16



Restricted band Measurement					
EUT	Outdoor Lo	raWAN Gateway	Test Mode:	Channel 36	
				(5180MHz)-11n/HT20	
Mode	Keeping Transmitting		Input Voltage	DC48V	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5150	PK (dBµV/m)	46.5(PK)	T : '/	27.15 (2.01)	
	EIRP (dBm) -48.7		Limit	-27dBm/MHz	
Polarity	Horizontal				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 46.5 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=46.5-95.2=-48.7dBm$

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	Outdoor Lo	oraWAN Gateway	Test Mode:	Channel 36	
				(5180MHz)-11n/HT20	
Mode	Keeping Transmitting		Input Voltage	DC48V	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5150	PK (dBµV/m)	43.7 (PK)	T ::	27 10/MII	
	EIRP (dBm) -51.5		Limit	-27dBm/MHz	
Polarity	7	Vertical			

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 43.7dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 43.7 - 95.2 = -51.5 dBm$

Date: 2022-05-16



Restricted band Measurement					
EUT	Outdoor Lo	raWAN Gateway	Test Mode:	Channel 48 (5240MHz)-	
				11n/HT20	
Mode	Keeping Transmitting		Input Voltage	DC48V	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5250	PK (dBμV/m)	47.1 (PK)	T : :/	27.15 /2/11	
	EIRP (dBm) -48.1		Limit	-27dBm/MHz	
Polarity	Horizontal				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 47.1 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=47.1-95.2=-48.1dBm$

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	Outdoor Lo	oraWAN Gateway	Test Mode:	Channel 48 (5240MHz)-	
				11n/HT20	
Mode	Keeping Transmitting		Input Voltage	DC48V	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5250	PK (dBµV/m)	44.9(PK)	T 114	27 10/MII	
	EIRP (dBm) -50.3		Limit	-27dBm/MHz	
Polarity	7	Vertical			

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 44.9dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 44.9 - 95.2 = -50.3 dBm$

Date: 2022-05-16



Restricted band Measurement					
EUT	Outdoor Lo	oraWAN Gateway	Test Mode:	Channel 149 (5745MHz)-	
				11n/HT20	
Mode	Keeping Transmitting		Input Voltage	DC48V	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5725	PK (dBµV/m)	50.7 (PK)	T ::	17.10/МП	
	EIRP (dBm) -44.5		Limit	-17dBm/MHz	
Polarity	Horizontal				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 50.7 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=50.7-95.2=-44.5dBm$

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	Outdoor Lo	oraWAN Gateway	Test Mode:	Channel 149 (5745MHz)-	
				11n/HT20	
Mode	Keeping Transmitting		Input Voltage	DC48V	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5725	PK (dBµV/m)	46.6 (PK)	T :	17.10/МП	
	EIRP (dBm)	-48.6	Limit	-17dBm/MHz	
Polarity	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 46.6dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 46.6 - 95.2 = -48.6 dBm$

Date: 2022-05-16



Restricted band Measurement					
EUT	Outdoor Lo	oraWAN Gateway	Test Mode:	Channel 161 (5825MHz)-	
				11n/HT20	
Mode	Keeping Transmitting		Input Voltage	DC48V	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass		PK	
5850	PK (dBµV/m)	50.9 (PK)	T ''/	17.10/МП	
	EIRP (dBm) -44.3		Limit	-17dBm/MHz	
Polarity	Horizontal				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 50.9dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=50.9-95.2=-44.3dBm$

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	Outdoor Lo	oraWAN Gateway	Test Mode:	Channel 161 (5825MHz)-	
				11n/HT20	
Mode	Keeping Transmitting		Input Voltage	DC48V	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5850	PK (dBµV/m)	46.1 (PK)	T ''4	17 ID /MII	
	EIRP (dBm) -49.1		Limit	-17dBm/MHz	
Polarity	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 46.1dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 46.1 - 95.2 = -49.1 dBm$

Date: 2022-05-16



Restricted band Measurement					
EUT	Outdoor Lo	oraWAN Gateway	Test Mode:	Channel 38	
				(5190MHz)-11n/HT40	
Mode	Keeping Transmitting		Input Voltage	DC48V	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5150	PK (dBµV/m)	44.2 (PK)	T in it	27 10/MII	
	EIRP (dBm) -51.0		Limit	-27dBm/MHz	
Polarity	Horizontal				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 44.2 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=44.2-95.2=-51.0 dBm$

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	Outdoor Lo	oraWAN Gateway	Test Mode:	Channel 38	
				(5190MHz)-11n/HT40	
Mode	Keeping Transmitting		Input Voltage	DC48V	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5150	PK (dBµV/m)	42.7 (PK)	T 114	27 10/MII	
	EIRP (dBm) -52.5		Limit	-27dBm/MHz	
Polarity	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 42.7dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=42.7-95.2=-52.5dBm$

Date: 2022-05-16



Restricted band Measurement					
EUT	Outdoor Lo	oraWAN Gateway	Test Mode:	Channel 46 (5230MHz)-	
				11n/HT40	
Mode	Keeping Transmitting		Input Voltage	DC48V	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5250	PK (dBµV/m)	48.9(PK)	T :	27 10/MII	
	EIRP (dBm) -46.3		Limit	-27dBm/MHz	
Polarity	Horizontal				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 48.9 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=48.9-95.2=-46.3dBm$

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	Outdoor Lo	oraWAN Gateway	Test Mode:	Channel 46 (5230MHz)-	
				11n/HT40	
Mode	Keeping Transmitting		Input Voltage	DC48V	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5250	PK (dBµV/m)	45.4(PK)	T ''	27 ID /MII	
	EIRP (dBm)	-49.8	Limit	-27dBm/MHz	
Polarity	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 45.4dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 45.4 - 95.2 = -49.8 dBm$

Date: 2022-05-16



Restricted band Measurement					
EUT	Outdoor LoraWAN Gateway		Test Mode:	Channel 151 (5755MHz)-	
				11n/HT40	
Mode	Keeping Transmitting		Input Voltage	DC48V	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5725	PK (dBµV/m)	51.8(PK)	T ::4	17 ID/MII	
	EIRP (dBm) -43.4		Limit	-17dBm/MHz	
Polarity	Horizontal			1	

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 51.8 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=51.8 - 95.2=-43.4dBm$

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	Outdoor LoraWAN Gateway		Test Mode:	Channel 151 (5755MHz)-	
				11n/HT40	
Mode	Keeping Transmitting		Input Voltage	DC48V	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass		PK	
5725	PK (dBµV/m)	46.1(PK)	T ::4	17.10/МП	
	EIRP (dBm)	-49.1	Limit	-17dBm/MHz	
Polarity	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 46.1dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 46.1 - 95.2 = -49.1 dBm$

Date: 2022-05-16



Restricted band Measurement					
EUT	Outdoor Lo	raWAN Gateway	Test Mode:	Channel 159 (5795MHz)-	
				11n/HT40	
Mode	Keeping Transmitting		Input Voltage	DC48V	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5850	PK (dBµV/m)	53.5 (PK)	T ' '/	1710 AUI	
	EIRP (dBm)	-41.7	Limit	-17dBm/MHz	
Polarity	Horizontal				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 53.5 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=53.5-95.2=-41.7dBm$

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement						
EUT	Outdoor Lo	raWAN Gateway	Test Mode:	Channel 159 (5795MHz)-		
				11n/HT40		
Mode	Keeping Transmitting		Input Voltage	DC48V		
Temperature	24 deg. C,		Humidity	56% RH		
Test Result:		Pass	Detector	PK		
5850	PK (dBµV/m)	47.9(PK)	T :	1710 (MI)		
	EIRP (dBm)	-47.3	Limit	-17dBm/MHz		
Polarity	Vertical					

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 47.9 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 47.9 - 95.2 = -47.3 dBm$

Date: 2022-05-16



Restricted band Measurement								
EUT	Outdoor Lo	oraWAN Gateway	Test Mode:	Channel 42				
				(5210MHz)-11ac/VHT80				
Mode	Keeping	g Transmitting	Input Voltage	DC48V				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
5150	PK (dBμV/m) 47.3 (PK)		T in it	27.15 (4.11)				
	EIRP (dBm) -47.9		Limit	-27dBm/MHz				
Polarity	Но	orizontal						

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 47.3 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=47.3-95.2=-47.9dBm$

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement								
EUT	Outdoor Lo	oraWAN Gateway	Test Mode:	Channel 42 (5210MHz)-				
				11ac/VHT80				
Mode	Keeping	g Transmitting	Input Voltage	DC48V				
Temperature	24	l deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
5150	PK (dBμV/m) 45.3 (PK)		T	27 ID A 41				
	EIRP (dBm) -49.9		Limit	-27dBm/MHz				
Polarity		Vertical						

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 45.3 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=45.3-95.2=-49.9dBm$

2. RBW=1MHz, VBW=3MHz

Date: 2022-05-16



Restricted band Measurement								
EUT	Outdoor Lo	oraWAN Gateway	Test Mode:	Channel 155 (5775MHz)-				
				11ac/VHT80				
Mode	Keeping	g Transmitting	Input Voltage	DC48V				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
5850	PK (dBµV/m)	PK (dBμV/m) 52.8 (PK)		17.15 A.01				
	EIRP (dBm) -42.4		Limit	-17dBm/MHz				
Polarity	Но	orizontal						

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 52.8 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=52.8-95.2=-42.4 dBm$

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement								
EUT	Outdoor Lo	oraWAN Gateway	Test Mode:	Channel 157 (5775MHz)-				
				11ac/VHT80				
Mode	Keeping	g Transmitting	Input Voltage	DC48V				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
5850	PK (dBμV/m) 47.0 (PK)		T 1	17.15 A.01				
	EIRP (dBm) -48.2		Limit	-17dBm/MHz				
Polarity	7	Vertical						

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 47.0dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=47.0-95.2=-48.2dBm$


2. RBW=1MHz, VBW=3MHz

Date: 2022-05-16



7.0 Emission Bandwidth

7.1 Test Setup



7.3 Test Procedure for Emission Bandwidth

- 1. Set RBW = approximately 1% of the emission bandwidth.
- 2. Set VBW> RBW
- 3 Detector = Peak
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

7.4 Test Procedure for Minimum Bandwidth for the Band 5725-5850MHz

- 1. Set RBW = 100 kHz.
- 2. Set $VBW \ge 3 \times RBW$.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.5 Test Procedure for 99% Bandwidth

- 1. Set center frequency to the nominal EUT channel center frequency
- 2. Set span = 1.5 times to 5.0 times OBW
- 3. Set RBW= 1% TO 5% of the OBW
- 4. Set $VBW \ge 3 \times RBW$
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Other, peak detection and max mode (until trace stabilizes) shall be used.
- 6. Use the 99% power bandwidth function of the instrument

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2203419-03E Page 40 of 169

Date: 2022-05-16



7.6 Test Result

EUT		Outdoor LoraWAN Gateway		Model	DSGW-010C		
Mode		802.11a		Input Voltage	DC48V		
Temperate	ure		24 deg. (Ξ,	Humidity	56% RH	
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail	
26dB Bar	ndwidth						
36		5180	6	22.67		Pass	
40		5200	6	21.76		Pass	
48	5240		6	21.76		Pass	
99% Ban	dwidth						
36		5180	6	17.13		Pass	
40		5200	6	17.01		Pass	
48		5240	6	16.95		Pass	

Page 41 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Figure:

26dB Bandwidth

Channel 36

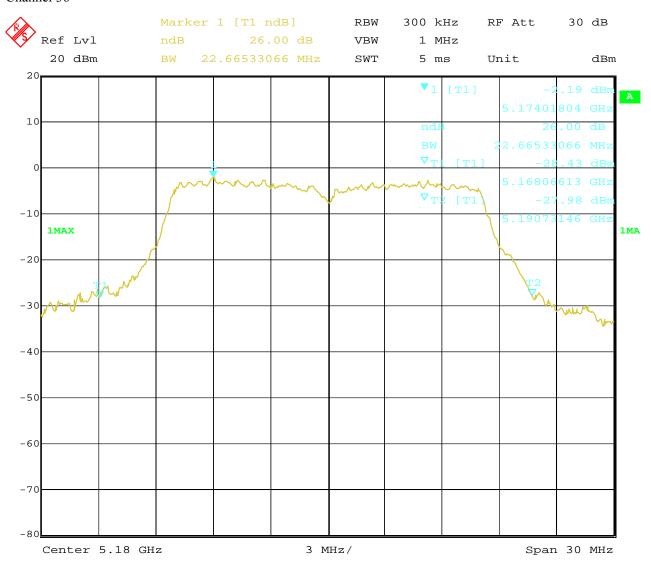

24.APR.2022 14:32:38 Date:


Page 42 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 40

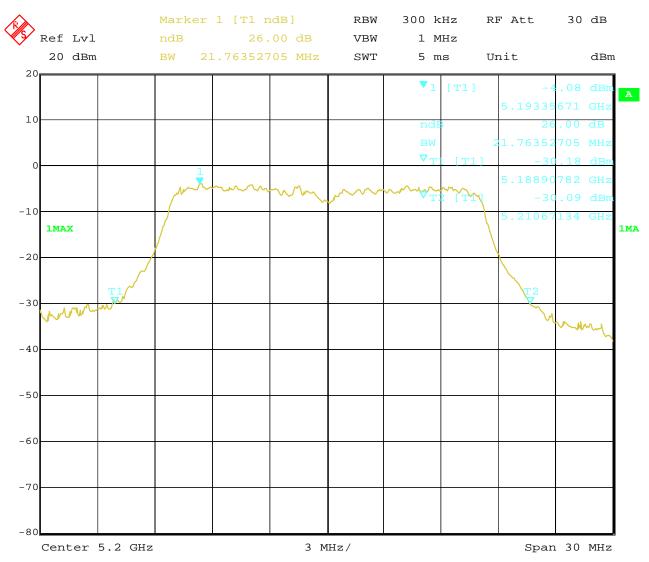

24.APR.2022 14:38:45 Date:


Page 43 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 48

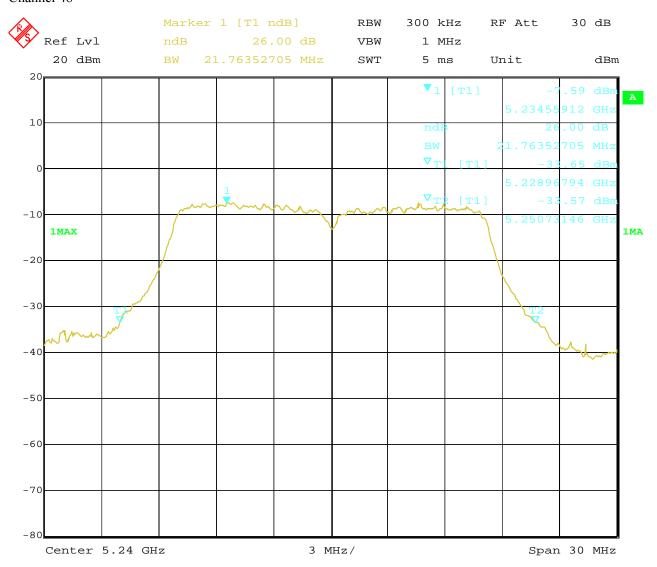

Date: 24.APR.2022 14:43:30

Page 44 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Figure:

99% Bandwidth

Channel 36

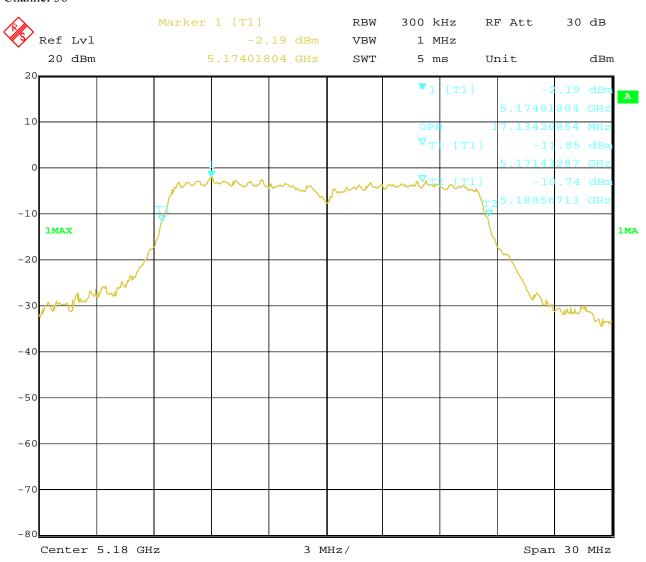

24.APR.2022 14:32:47 Date:


Page 45 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 40

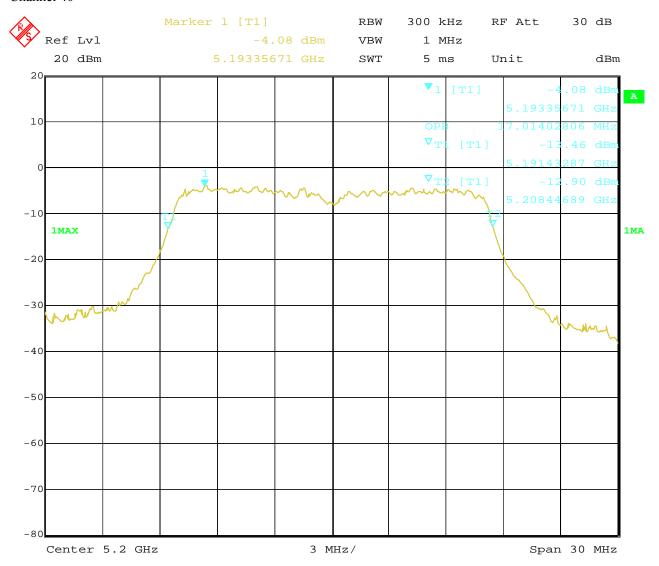

24.APR.2022 14:38:30 Date:


Page 46 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 48

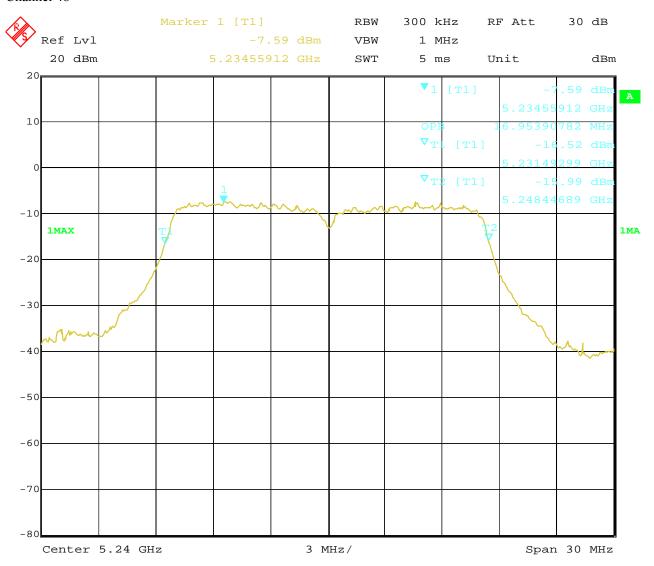

Date: 24.APR.2022 14:43:44

Page 47 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



EUT		Outdoo	or LoraWAi	N Gateway	Model		DSGW-010C
Mode			802.11a		Input Voltage		DC48V
Temperatu	ure		24 deg. (Ξ,	Humidity		56% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	Bandwidth (MHz)	Minimum Limit (MHz)		Pass/ Fail
26dB Bar	ndwidth						
149		5745	6	21.46			Pass
153		5765	6	21.46			Pass
161		5825	6	21.28			Pass
6dB Band	dwidth						
149		5745	6	16.35	().5	Pass
153		5765	6	16.37	().5	Pass
161		5825	6	16.35 0.5).5	Pass
99% Ban	dwidth						
149		5745	6	16.95			Pass
153		5765	6	16.95			Pass
161		5825	6	16.95			Pass

Page 48 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Figure:

26dB Bandwidth

Channel 149

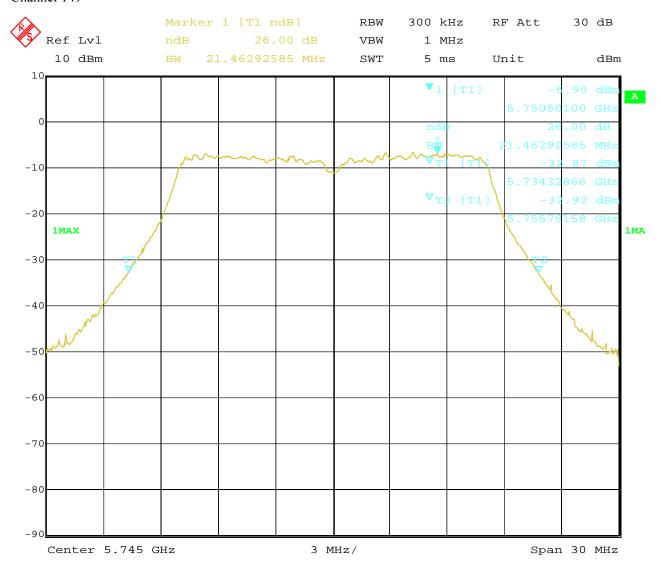

24.APR.2022 20:03:36 Date:


Page 49 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 153

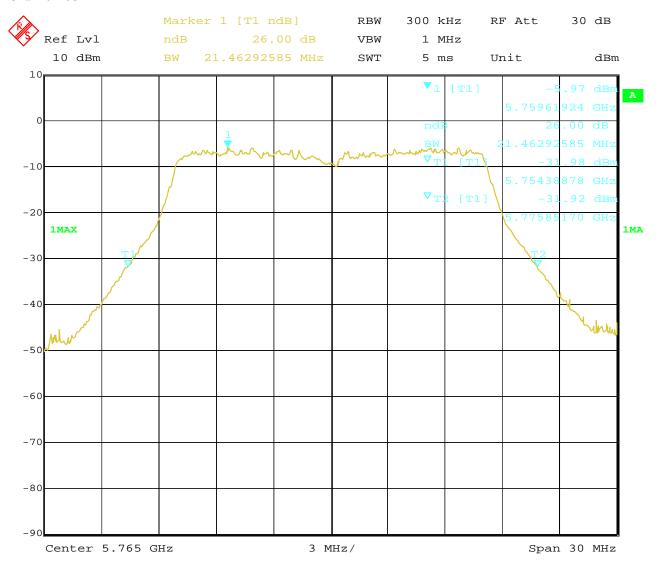

Date: 24.APR.2022 20:00:11


Page 50 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 161

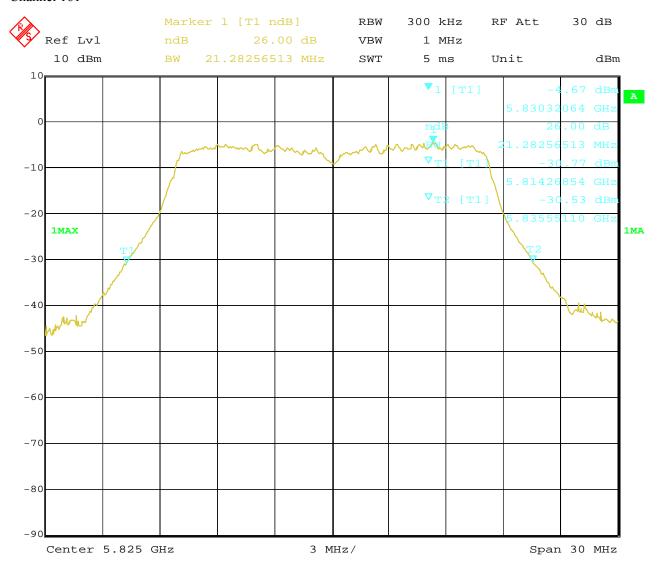

Date: 24.APR.2022 20:06:20

Page 51 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Figure:

6dB Bandwidth

Channel 149

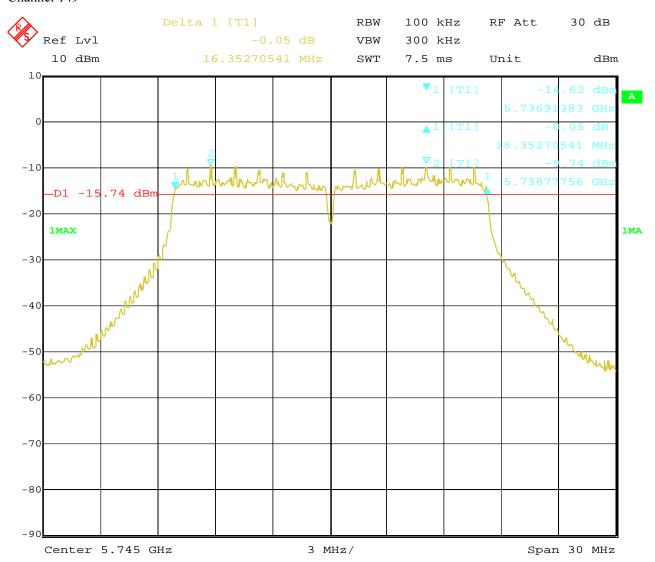

24.APR.2022 18:07:56 Date:


Page 52 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 153

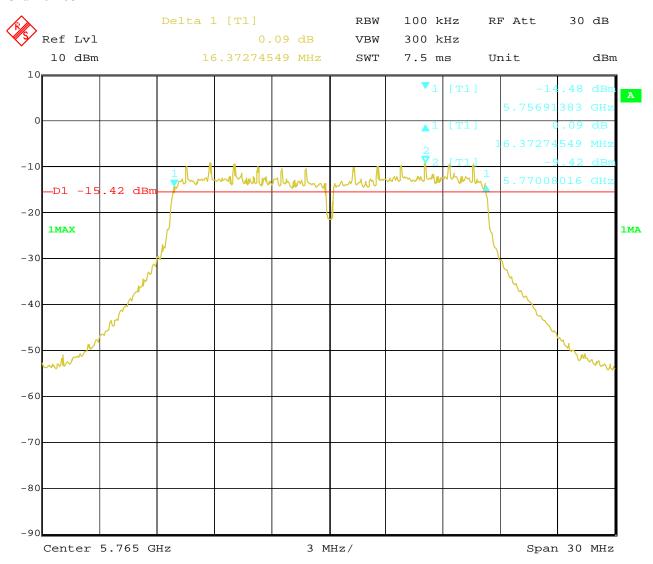

Date: 24.APR.2022 18:11:41


Page 53 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 161

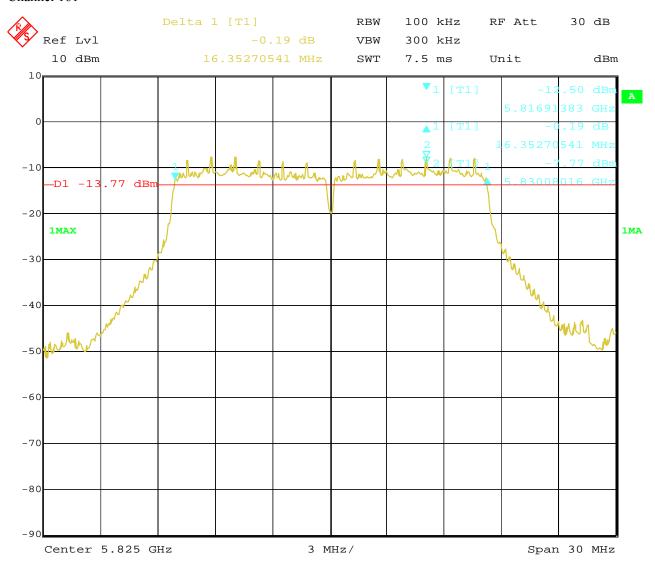

Date: 24.APR.2022 18:15:46

Page 54 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Figure:

99% Bandwidth

Channel 149

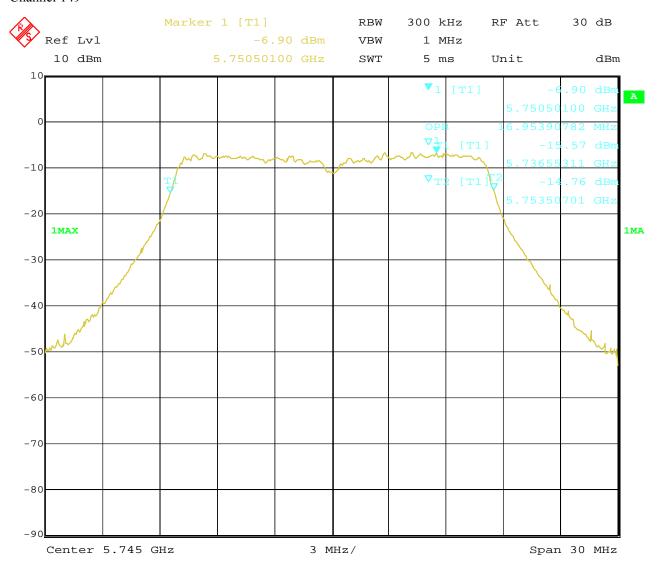

24.APR.2022 20:03:48 Date:


Page 55 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 153

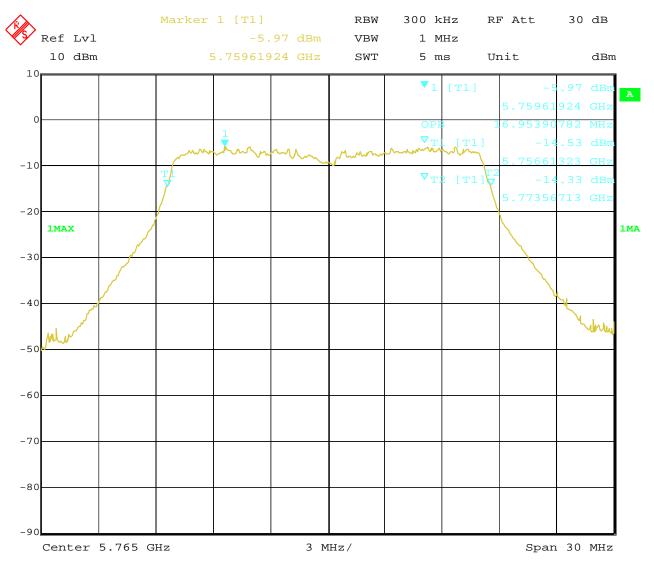

Date: 24.APR.2022 19:59:58


Page 56 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 161

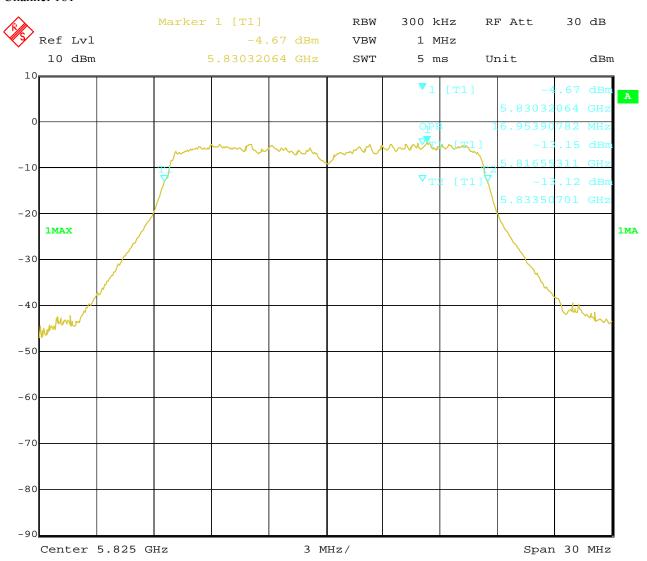

Date: 24.APR.2022 20:06:05 Report No.: TW2203419-03E Page 57 of 169

Date: 2022-05-16



EUT		Outdoor LoraWAN Gateway		N Gateway	Model	DSGW-010C
Mode		802.11n HT20		Input Voltage	DC48V	
Temperati	ure		24 deg.	C,	Humidity	56% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail
26dB Bar	ndwidth					
36		5180	mcs0	22.48		Pass
40		5200	mcs0	22.48		Pass
48		5240	mcs0	22.18		Pass
			,		•	
99% Ban	dwidth					
36		5180	mcs0	18.04		Pass
40		5200	mcs0	18.04		Pass
48		5240	mcs0	18.04		Pass


Date: 2022-05-16



Test Configure

26dB Bandwidth

Channel 36

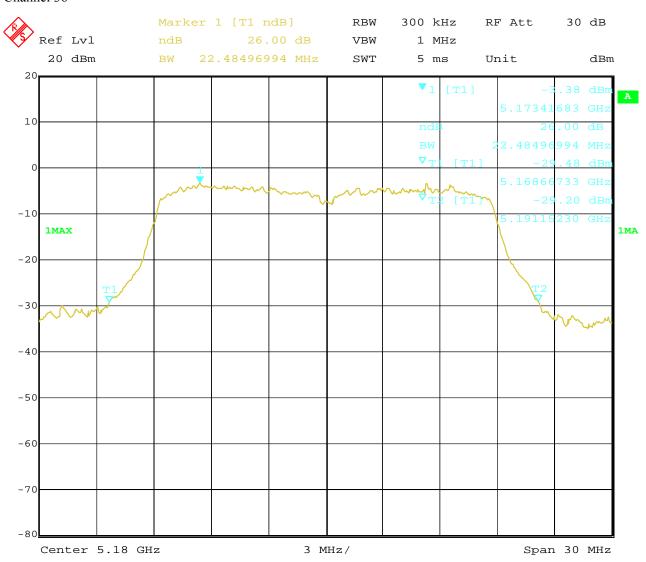

24.APR.2022 14:57:58 Date:


Page 59 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 40

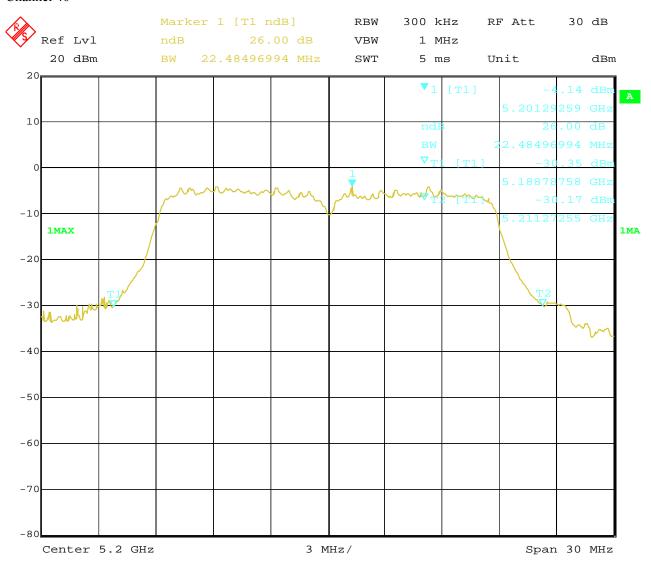

24.APR.2022 14:53:36 Date:


Page 60 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 48

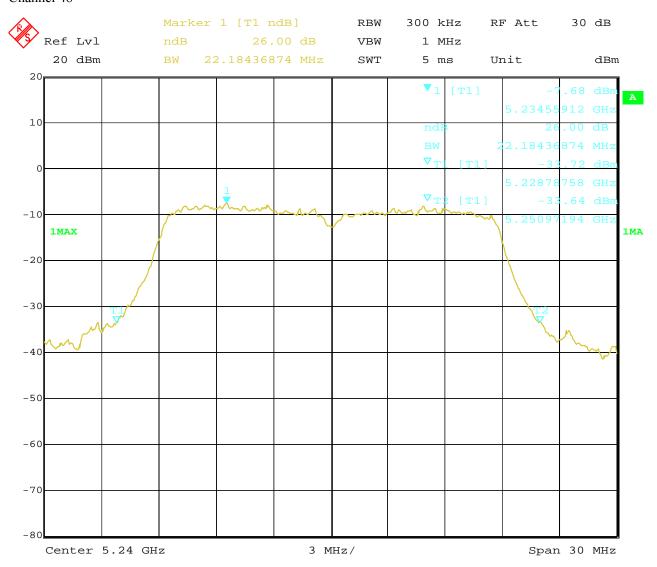

Date: 24.APR.2022 14:46:54

Page 61 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Configure

99% Bandwidth

Channel 36

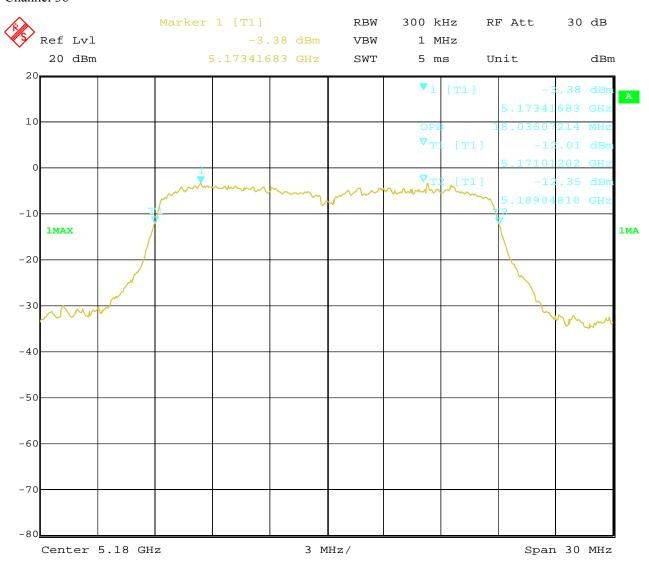

24.APR.2022 14:57:45 Date:


Page 62 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 40

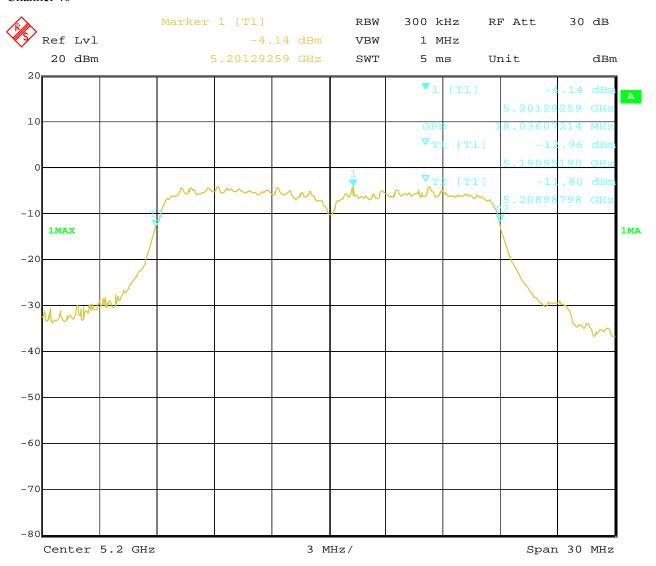

24.APR.2022 14:56:17 Date:


Page 63 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 48

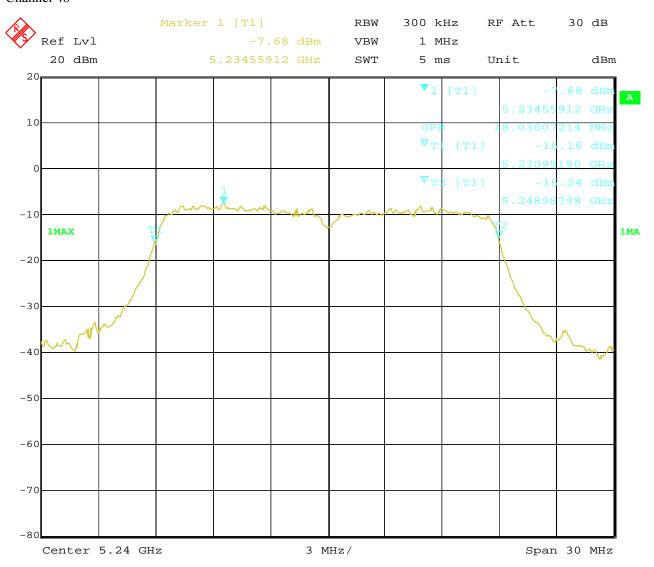

Date: 24.APR.2022 14:46:09

Page 64 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



EUT		Outdoor LoraWAN Gateway		N Gateway	Model	DSGW-010C
Mode	de 802.		802.11n H	IT20	Input Voltage	DC48V
Temperati	ure		24 deg.	C,	Humidity	56% RH
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail
26dB Bar	ndwidth					
149		5745	6	22.18		Pass
153		5765	6	22.18		Pass
161		5825	6	21.76		Pass
6dB Band	dwidth					
149		5745	6	17.45	0.5	Pass
153		5765	6	17.56	0.5	Pass
161		5825	6	17.37	0.5	Pass
99% Ban	dwidth					
149		5745	6	17.98		Pass
153		5765	6	17.98		Pass
161		5825	6	17.92		Pass


Date: 2022-05-16



Test Configure

26dB Bandwidth

Channel 149

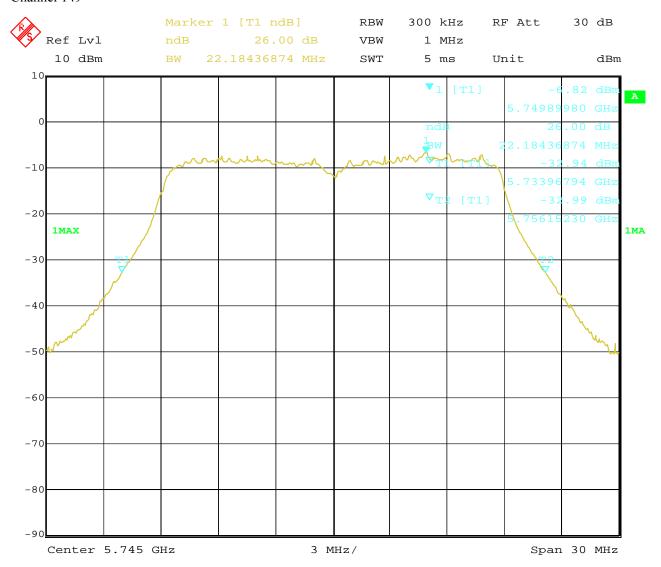

24.APR.2022 19:49:13 Date:


Page 66 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 153

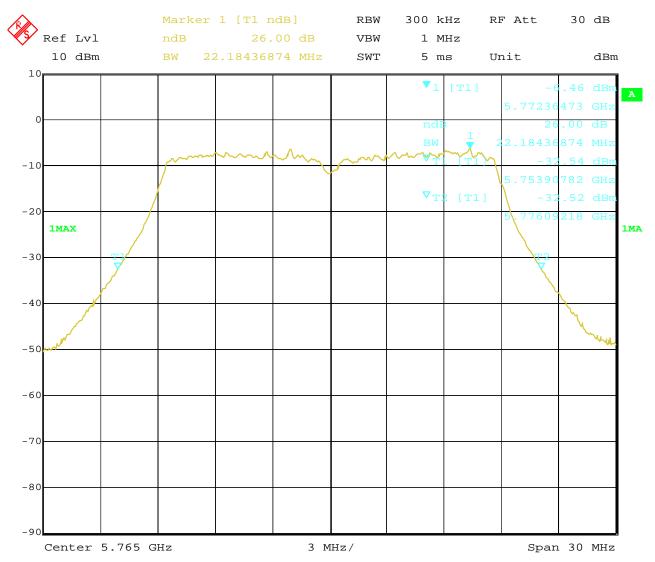

Date: 24.APR.2022 19:52:55


Page 67 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 161

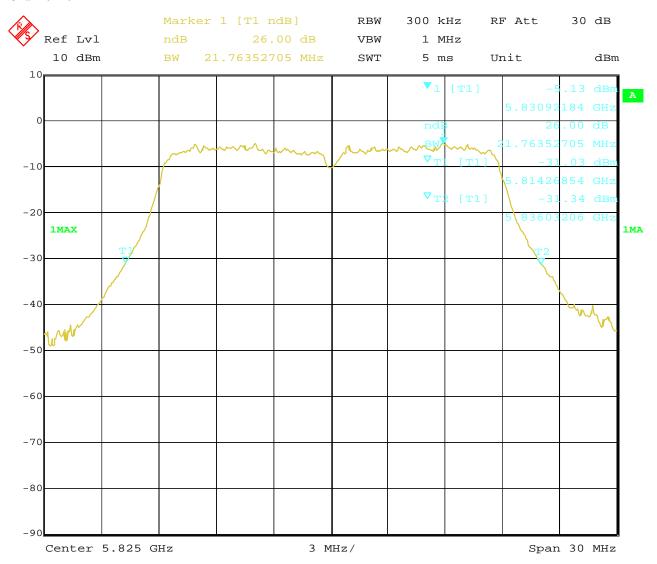

Date: 24.APR.2022 19:54:10

Page 68 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Configure

6dB Bandwidth

Channel 149

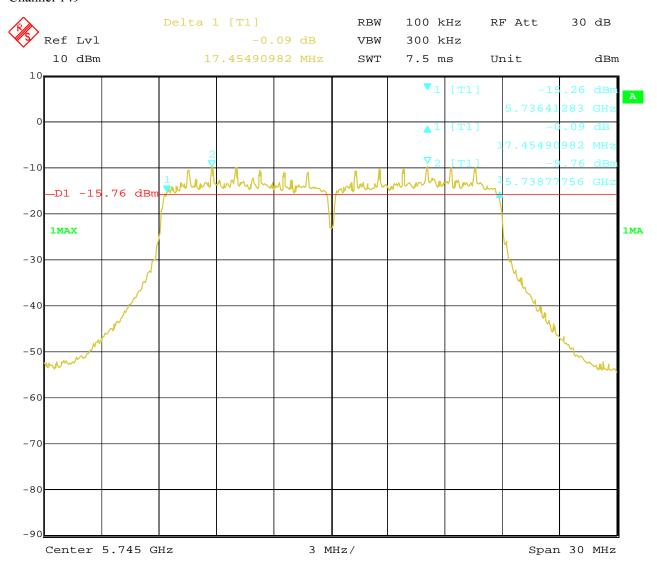

24.APR.2022 18:26:51 Date:


Page 69 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 153

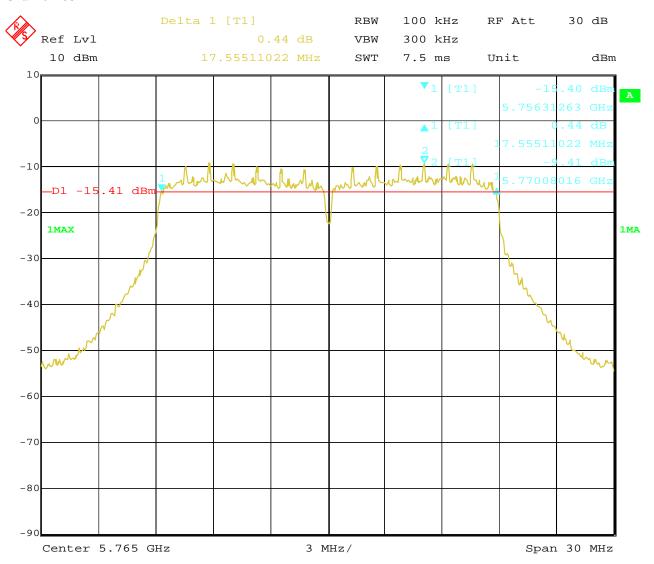

Date: 24.APR.2022 18:23:18


Page 70 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 161

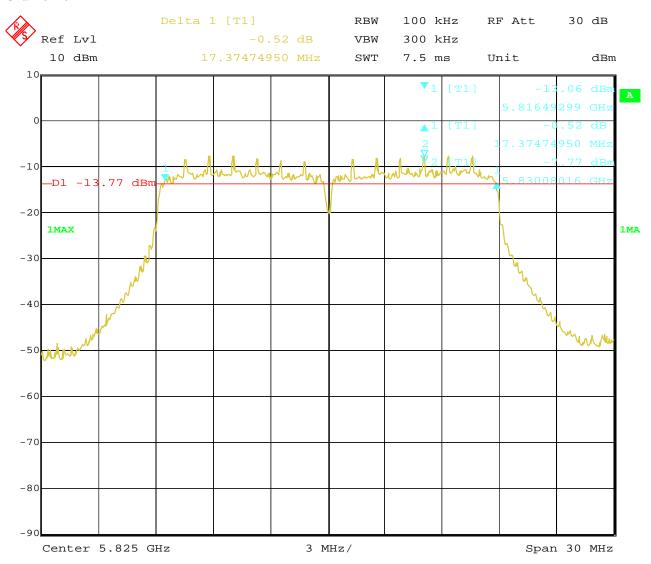

Date: 24.APR.2022 18:18:51

Page 71 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Configure

99% Bandwidth

Channel 149

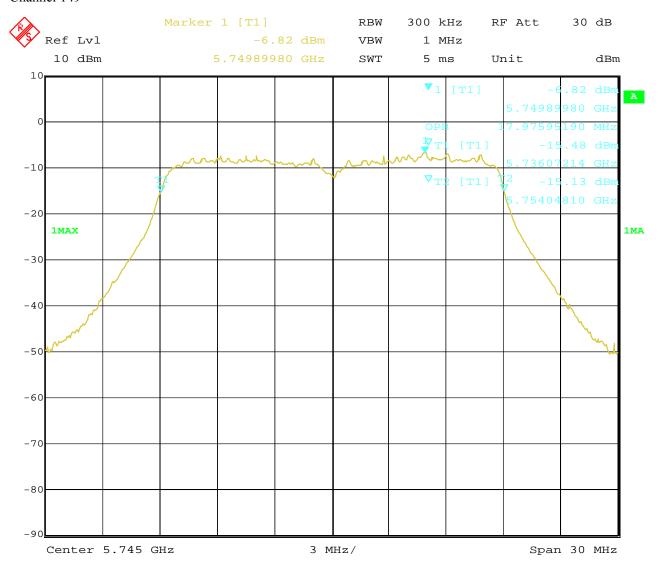

24.APR.2022 19:48:44 Date:


Page 72 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 153

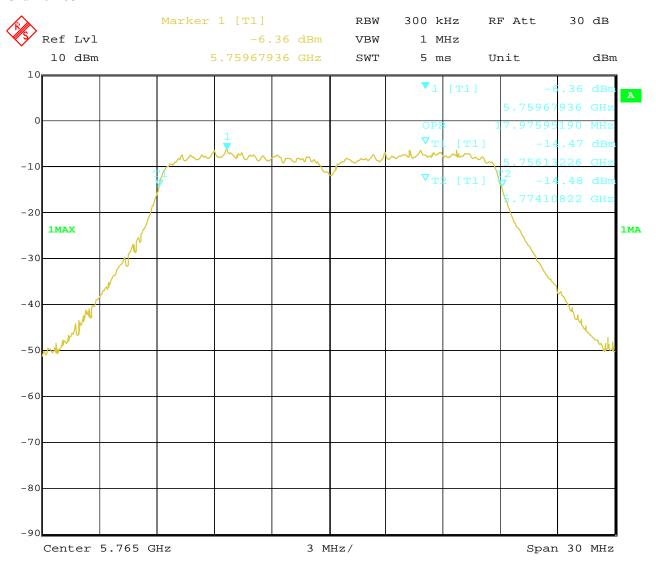

Date: 24.APR.2022 19:56:11


Page 73 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 161

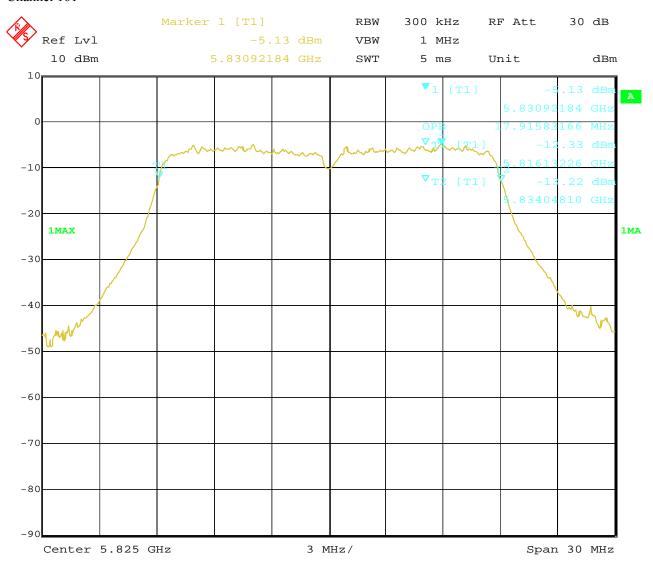

Date: 24.APR.2022 19:54:23 Report No.: TW2203419-03E Page 74 of 169

Date: 2022-05-16



EUT		Outdoor LoraWAN Gateway			Model	DSGW-010C		
Mode		802.11n HT40			Input Voltage	DC48V		
Temperature		24 deg. C,			Humidity	56% RH		
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail		
26dB Bandwidth								
38	5190		mcs0	50.26		Pass		
46	5230		mcs0	44.73		Pass		
99% Bandwidth								
38	5190		mcs0	37.03		Pass		
46		5230	mcs0	37.15		Pass		

Page 75 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Configure

26dB Bandwidth

Channel 38

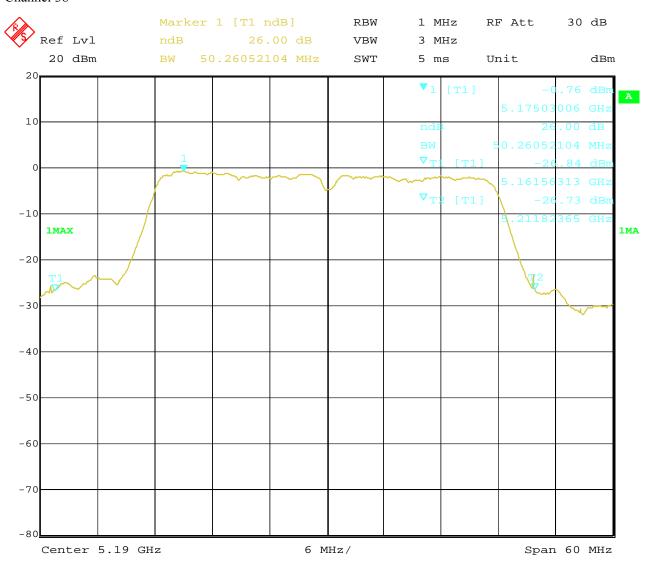

24.APR.2022 15:23:00 Date:


Page 76 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 46

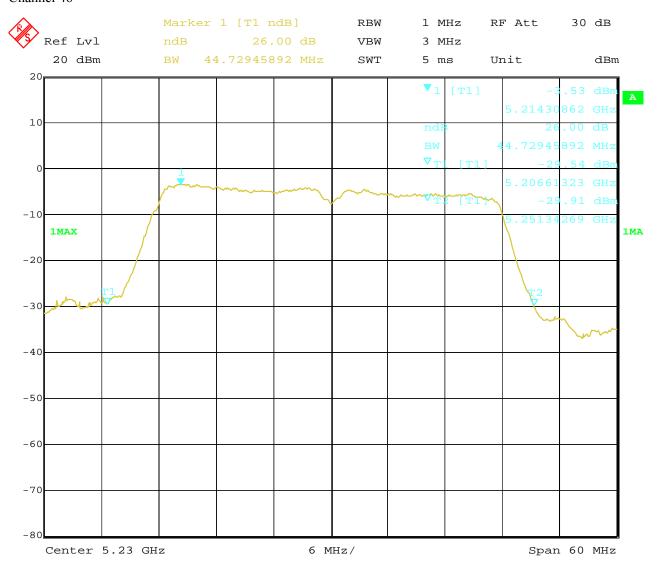

Date: 24.APR.2022 15:28:08

Page 77 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Configure

99% Bandwidth

Channel 38

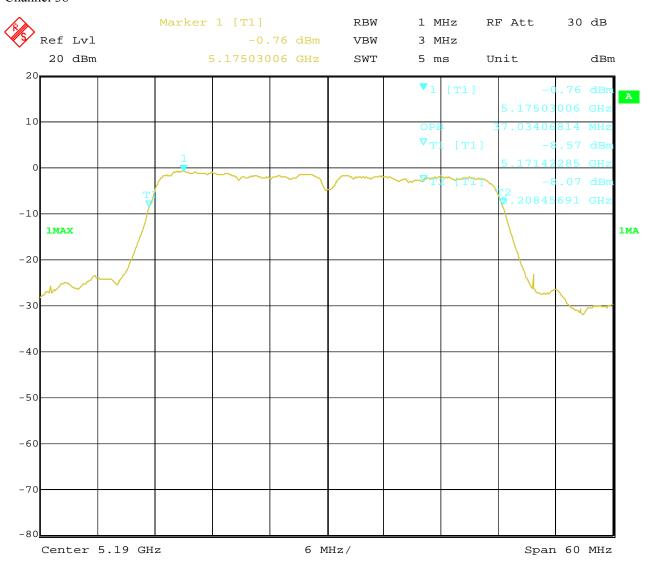

24.APR.2022 15:22:28 Date:


Page 78 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 46

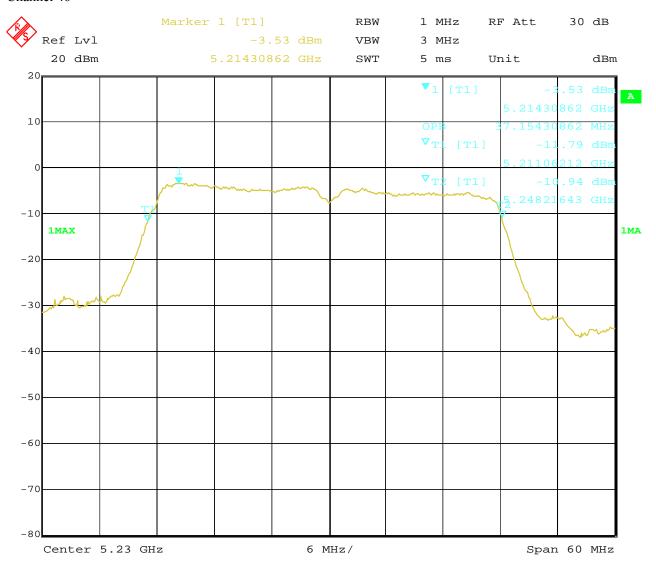

Date: 24.APR.2022 15:28:20 Report No.: TW2203419-03E Page 79 of 169

Date: 2022-05-16



EUT	EUT O		Outdoor LoraWAN Gateway		Model	DSGW-010C		
Mode		802.11n HT40			Input Voltage	DC48V		
Temperature			24 deg. C,			56% RH		
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail		
26dB Bar	ndwidth							
151	5755		mcs0	43.53		Pass		
159	5795		mcs0	43.53		Pass		
6dB Band	dwidth							
151	5755		mcs0	35.75	0.5	Pass		
159	5795		mcs0	35.99	0.5	Pass		
99% Bandwidth								
151	5755		mcs0	36.79		Pass		
159	5795		mcs0	36.79		Pass		

Page 80 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Configure

26dB Bandwidth

Channel 151

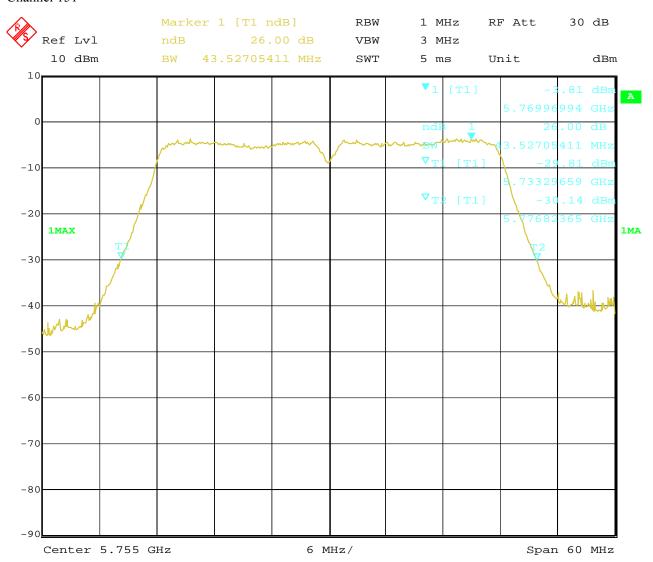

24.APR.2022 19:21:41 Date:


Page 81 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 159

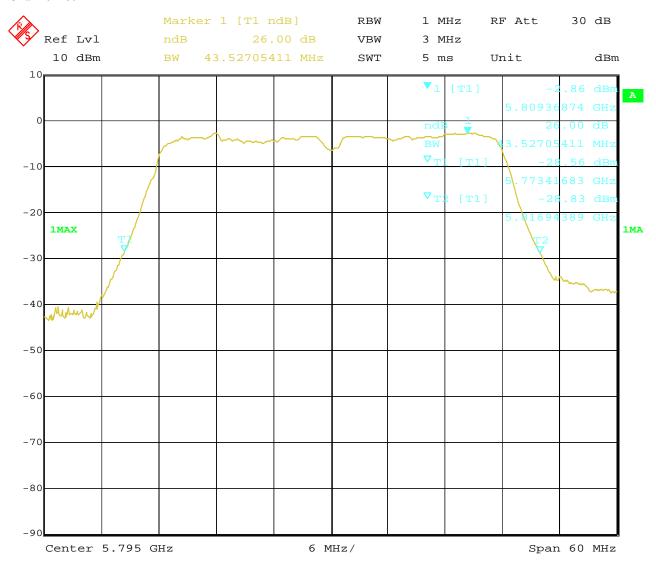

Date: 24.APR.2022 19:25:26

Page 82 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Configure

6dB Bandwidth

Channel 151

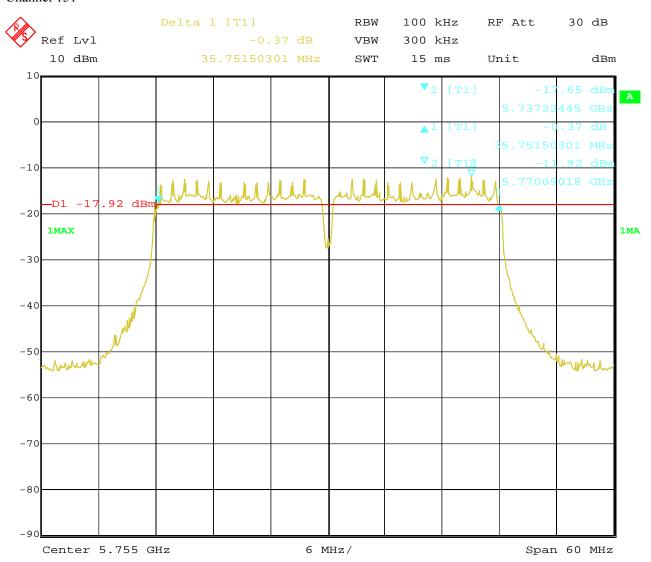

24.APR.2022 18:53:28 Date:


Page 83 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 159

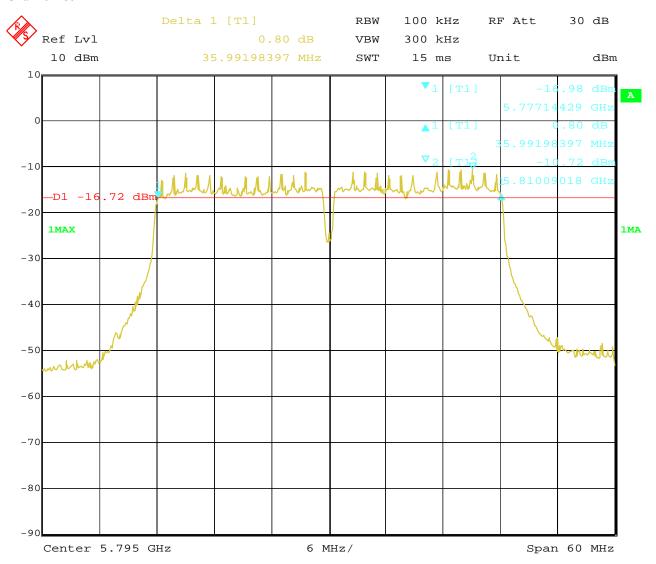

Date: 24.APR.2022 18:49:58

Page 84 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Configure

99% Bandwidth

Channel 151

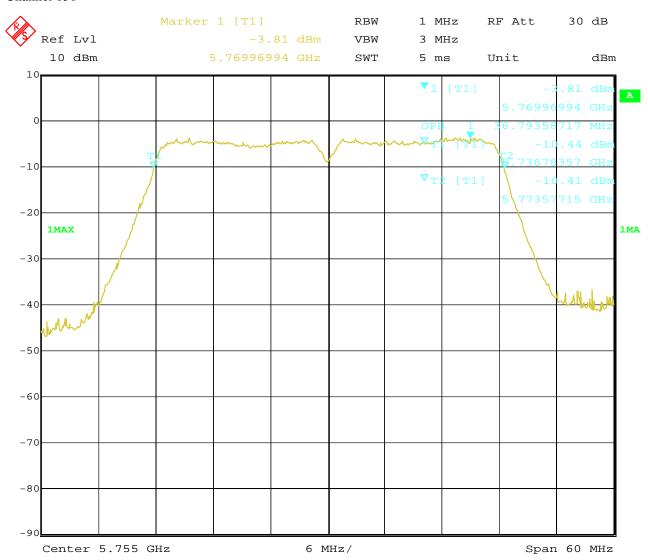

24.APR.2022 19:21:17 Date:


Page 85 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 159

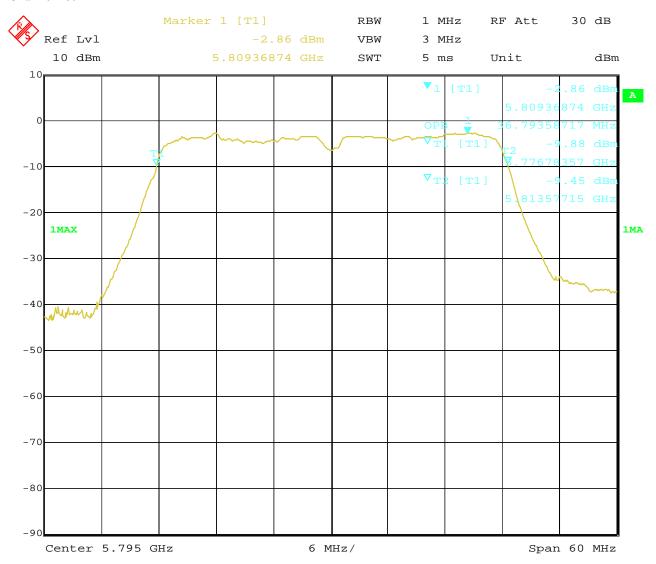

Date: 24.APR.2022 19:25:43 Report No.: TW2203419-03E Page 86 of 169

Date: 2022-05-16



EUT		Outdoor LoraWAN Gateway			Model	DSGW-010C		
Mode		802.11ac VHT20			Input Voltage	DC48V		
Temperature		24 deg. C,			Humidity	56% RH		
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail		
26dB Bar	ndwidth							
36	5180		mcs0	24.77		Pass		
40	5200		mcs0	23.27		Pass		
48	5240		mcs0	22.18		Pass		
99% Ban	dwidth							
36	5180		mcs0	18.10		Pass		
40		5200	mcs0	18.10		Pass		
48		5240	mcs0	18.04		Pass		

Page 87 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Configure

26dB Bandwidth

Channel 36

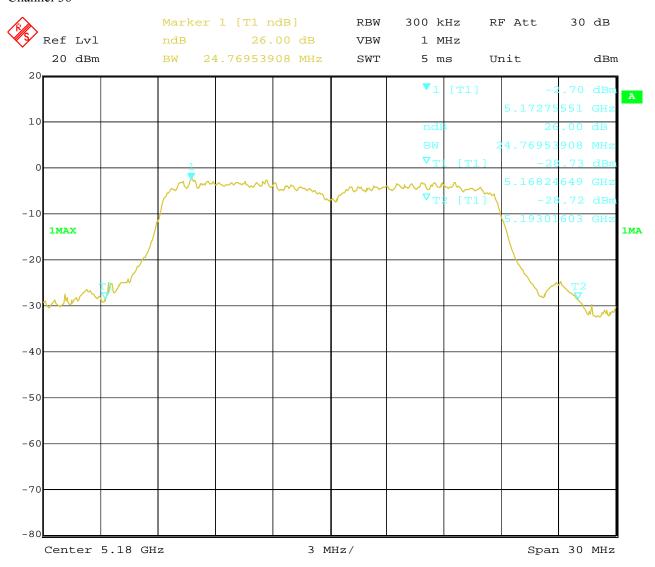

24.APR.2022 15:03:45 Date:


Page 88 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 40

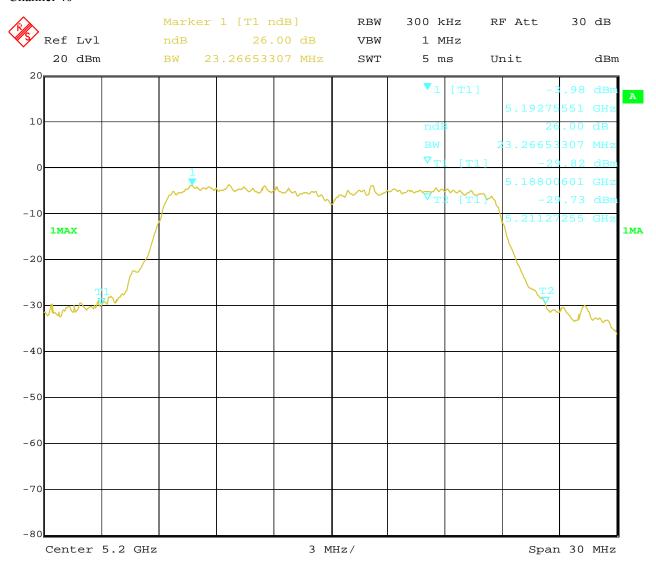

24.APR.2022 15:07:29 Date:


Page 89 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 48

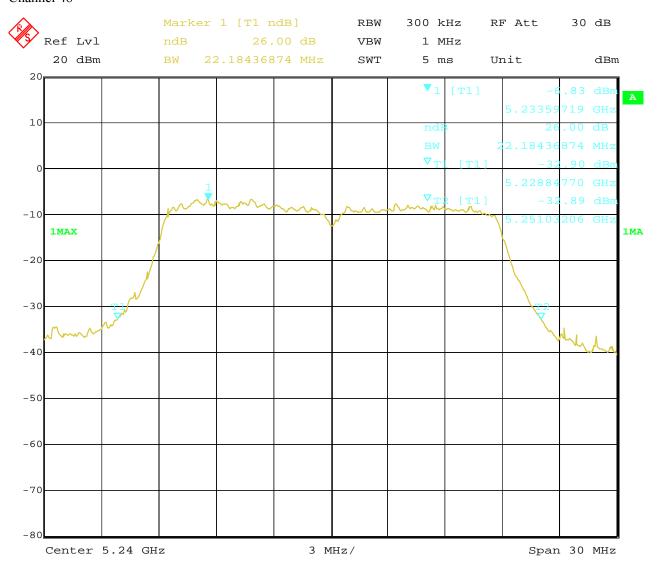

Date: 24.APR.2022 15:11:48

Page 90 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Configure

99% Bandwidth

Channel 36

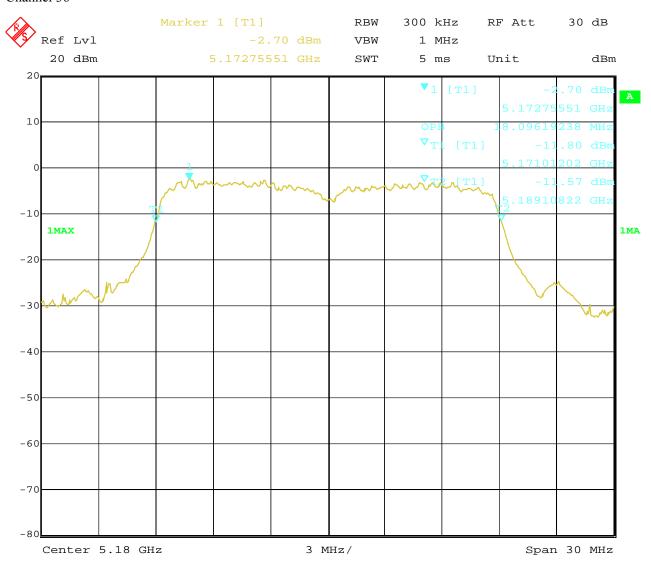

24.APR.2022 15:04:09 Date:


Page 91 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 40

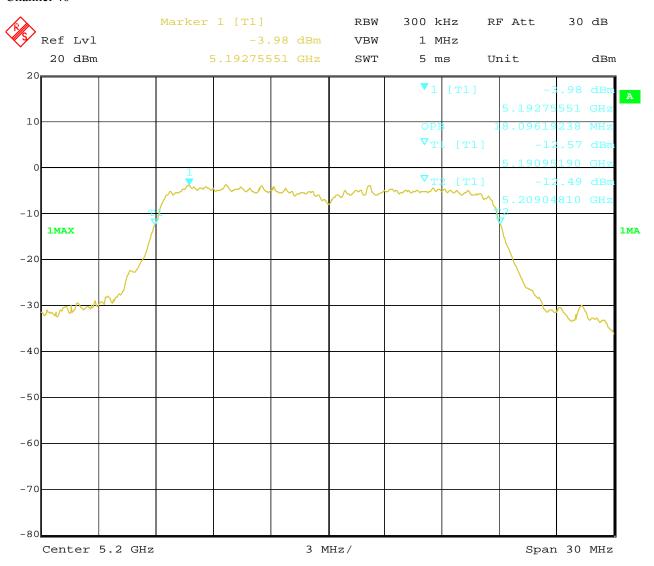

24.APR.2022 15:07:18 Date:


Page 92 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 48

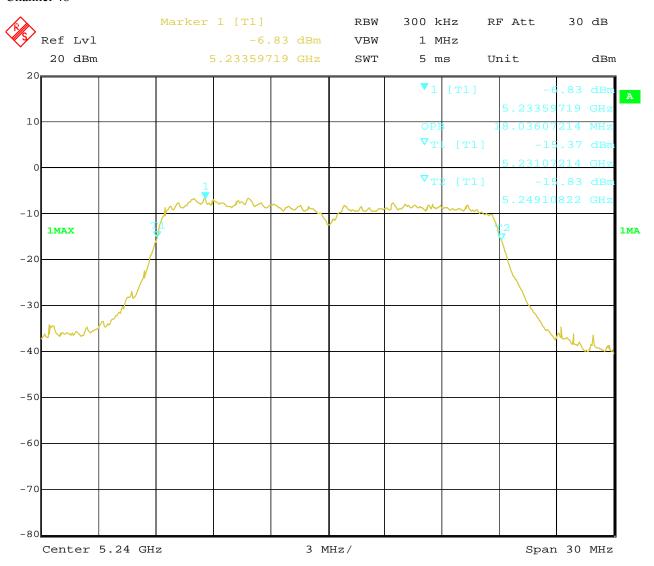

Date: 24.APR.2022 15:12:23

Page 93 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



EUT		Outdo	or LoraWA	N Gateway	Model	DSGW-010C
Mode			802.11ac V	HT20	Input Voltage	DC48V
Temperature			24 deg.	C,	Humidity	56% RH
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail
26dB Bar	ndwidth					
149		5745	6	22.06		Pass
153		5765	6	21.94		Pass
161		5825	6	21.70		Pass
6dB Band	dwidth					
149	5745		6	17.45	0.5	Pass
153	5765		6	17.58	0.5	Pass
161	5825		6	17.43	0.5	Pass
99% Ban	dwidth					
149	5745		6	17.92		Pass
153	5765		6	18.04		Pass
161	5825		6	17.92		Pass

Page 94 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Configure

26dB Bandwidth

Channel 149

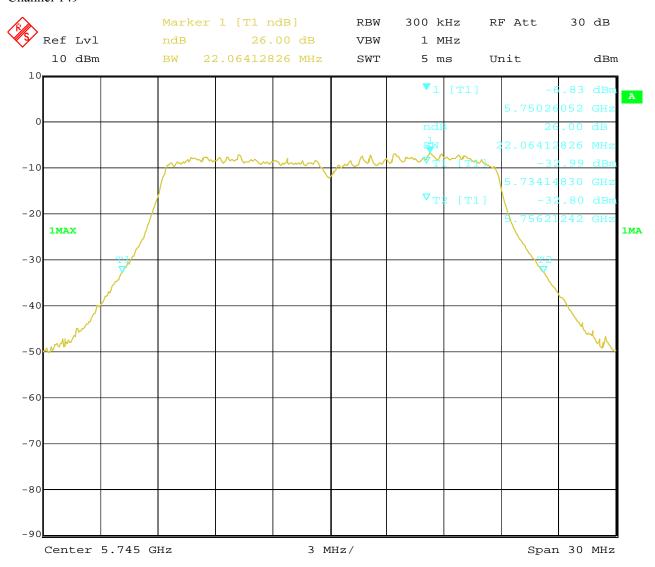

24.APR.2022 20:12:24 Date:


Page 95 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 153

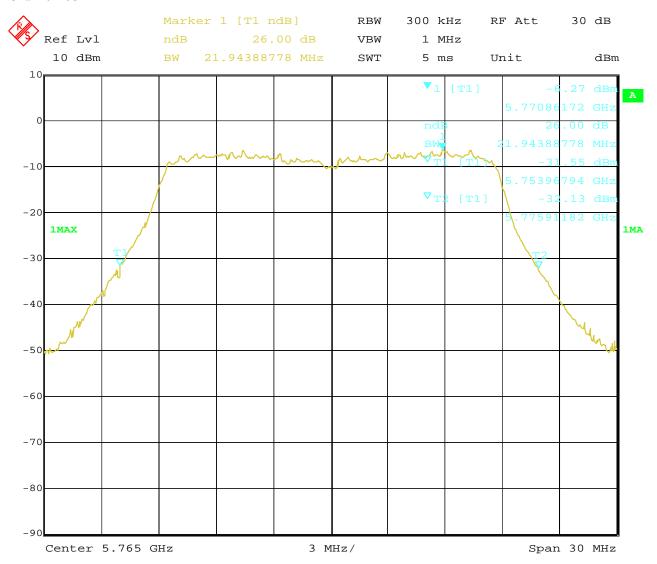

Date: 24.APR.2022 20:10:04


Page 96 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 161

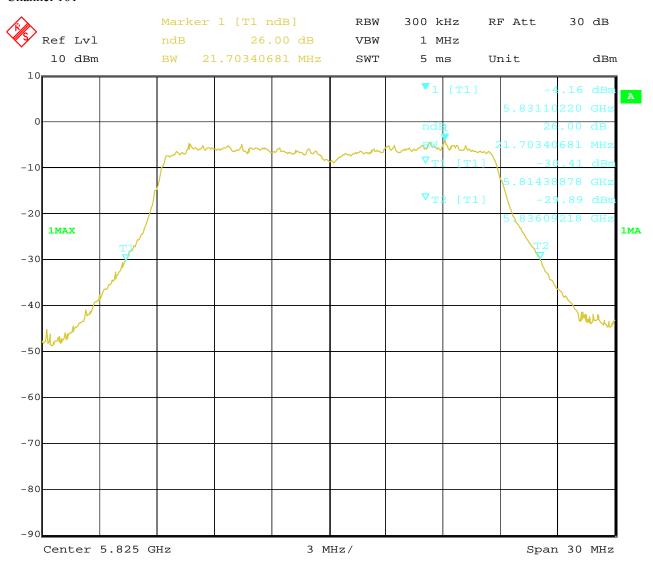

Date: 24.APR.2022 20:07:39

Page 97 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Configure

6dB Bandwidth

Channel 149

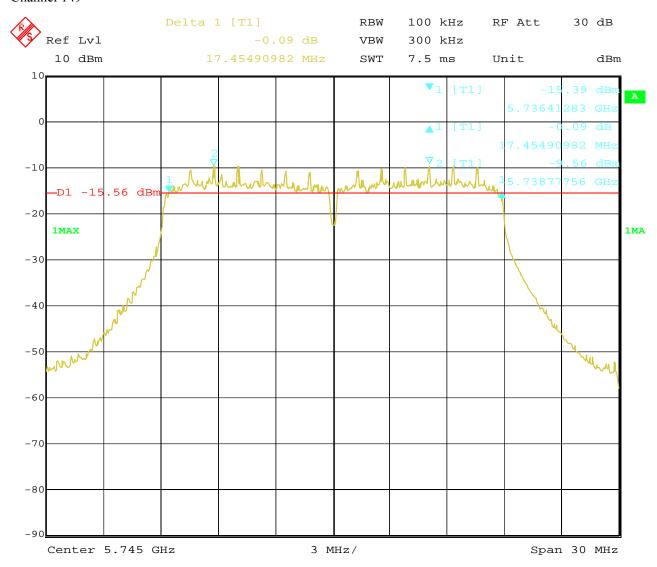

24.APR.2022 18:28:20 Date:


Page 98 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 153

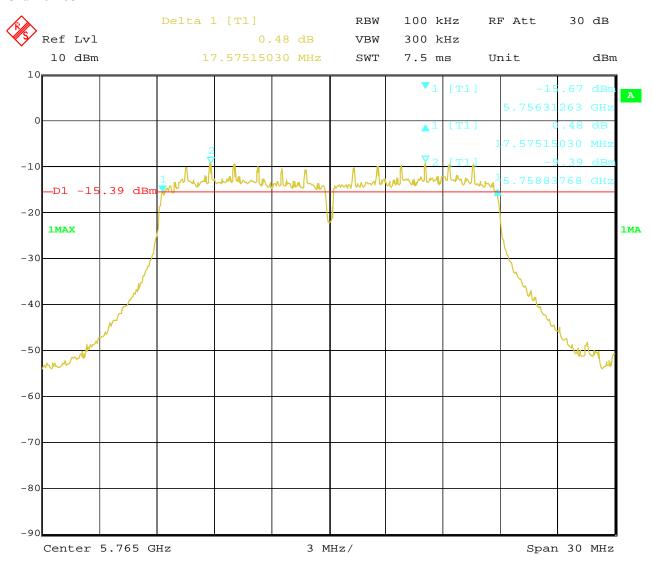

Date: 24.APR.2022 18:30:57


Page 99 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 161

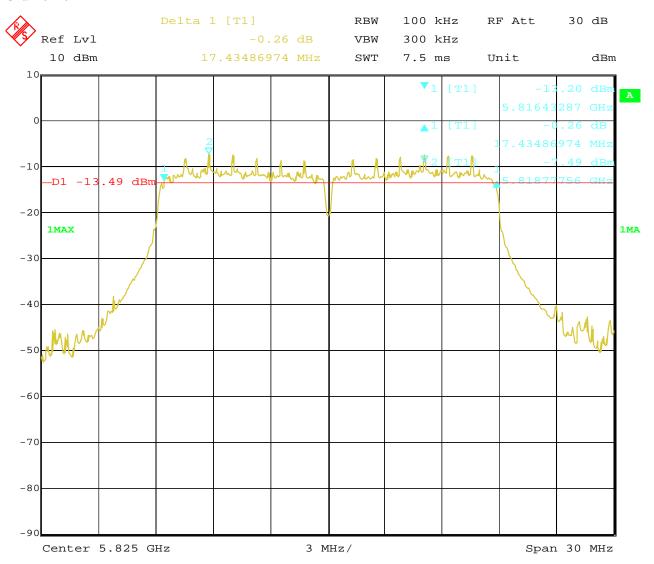

Date: 24.APR.2022 18:34:59

Page 100 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Configure

99% Bandwidth

Channel 149

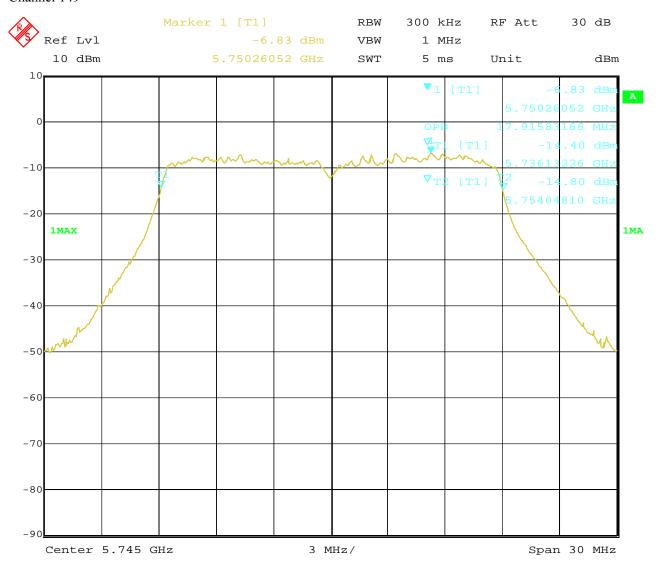

24.APR.2022 20:12:41 Date:


Page 101 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 153

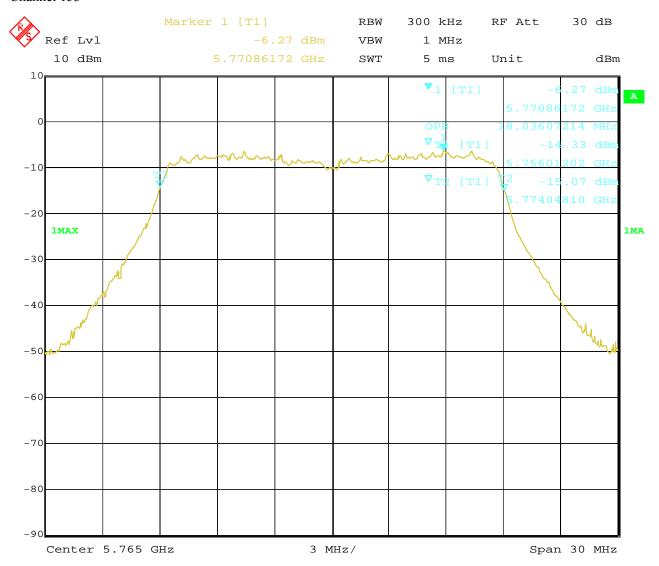

Date: 24.APR.2022 20:09:48


Page 102 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 161

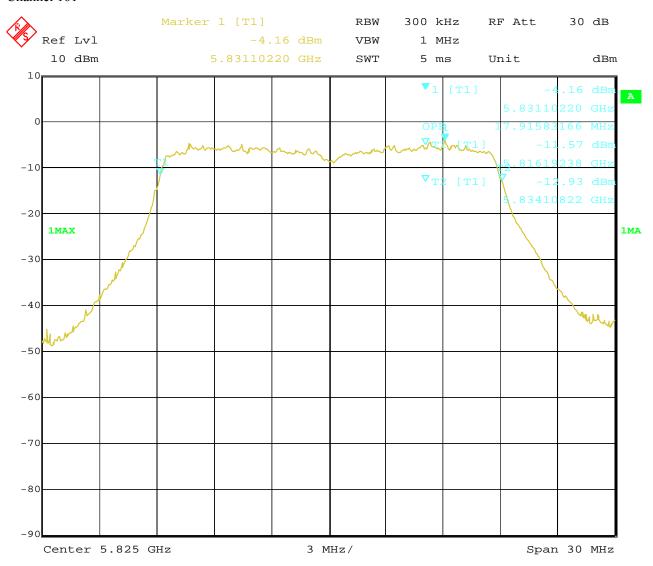

Date: 24.APR.2022 20:08:00

Page 103 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



EUT		Outdoor LoraWAN Gateway			Model	DSGW-010C			
Mode		802.11ac VHT40			Input Voltage	DC48V			
Temperature		24 deg. C,			Humidity	56% RH			
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail			
26dB Bar	26dB Bandwidth								
38	5190		mcs0	48.58		Pass			
46	5230		mcs0	44.01		Pass			
99% Bandwidth									
38	5190		mcs0	36.91		Pass			
46		5230	mcs0	36.91		Pass			

Page 104 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Configure

26dB Bandwidth

Channel 38

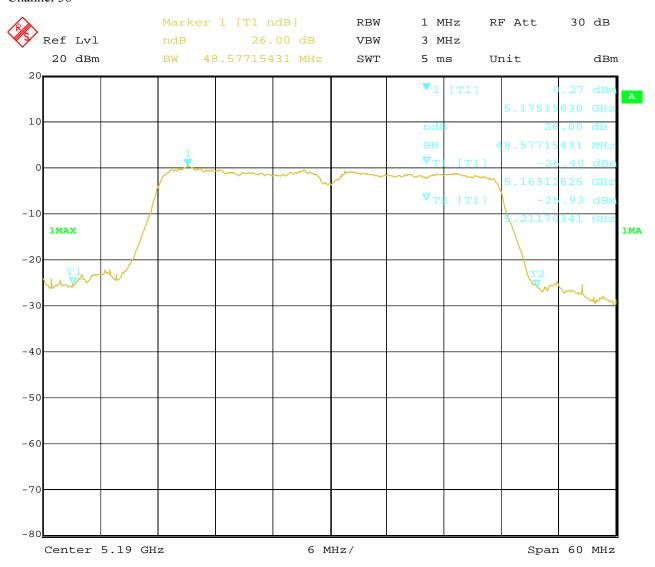

24.APR.2022 15:38:37 Date:


Page 105 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 46

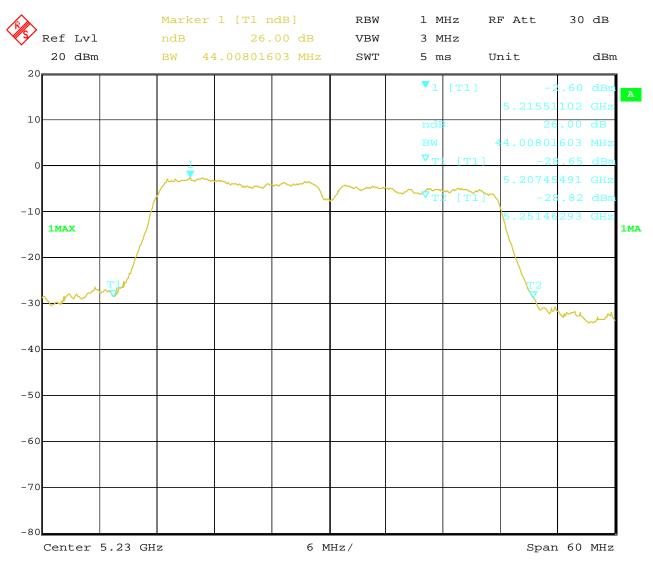

Date: 24.APR.2022 15:34:58

Page 106 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Configure

99% Bandwidth

Channel 38

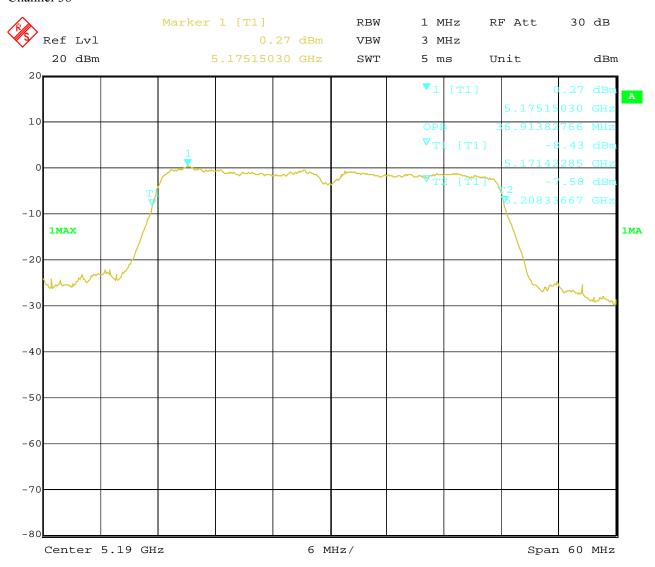

24.APR.2022 15:39:09 Date:


Page 107 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 46

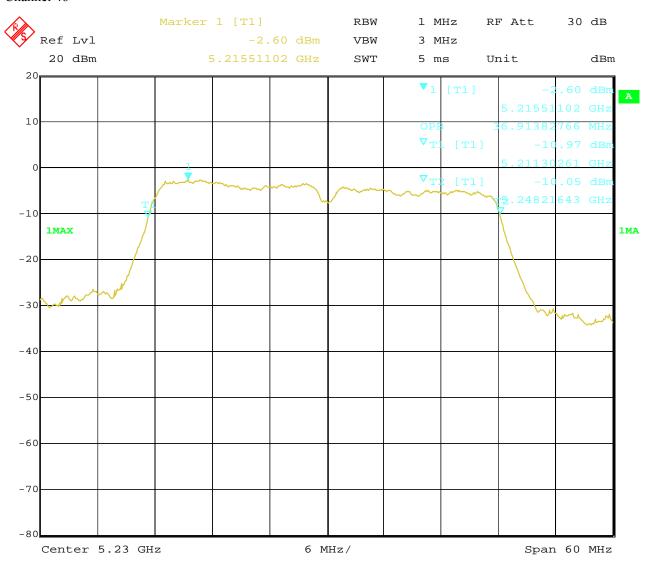

Date: 24.APR.2022 15:34:39

Page 108 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



EUT		Outdoor LoraWAN Gateway			Model	DSGW-010C		
Mode		802.11ac VHT40			Input Voltage	DC48V		
Temperature			24 deg.	С,	Humidity	56% RH		
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail		
26dB Bar	ndwidth							
151	5755		mcs0	43.41		Pass		
159	5795		mcs0	43.77		Pass		
6dB Band	dwidth							
151	5755		mcs0	35.47	0.5	Pass		
159	5795		mcs0	35.78	0.5	Pass		
99% Bandwidth								
151	5755		mcs0	36.91		Pass		
159	5795		mcs0	36.91		Pass		

Page 109 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Configure

26dB Bandwidth

Channel 151

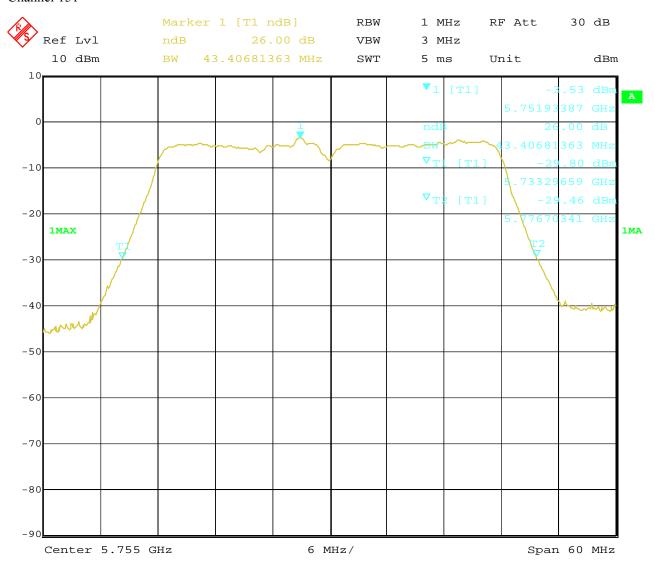

24.APR.2022 19:19:49 Date:


Page 110 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 159

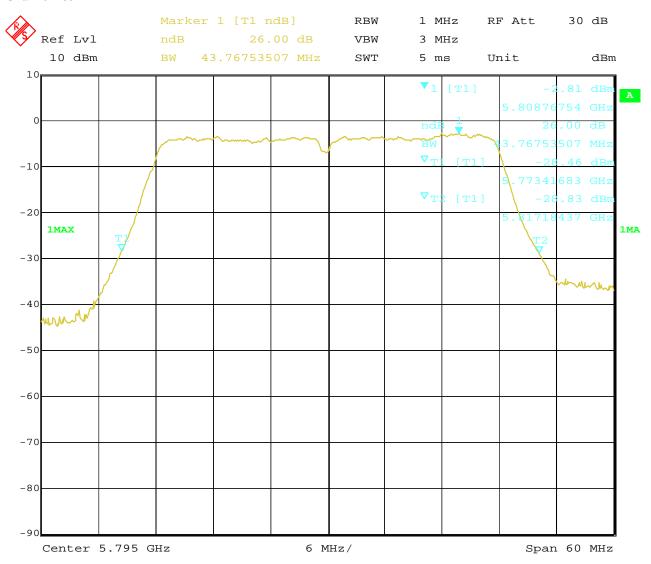

Date: 24.APR.2022 19:17:50

Page 111 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Configure

6dB Bandwidth

Channel 151

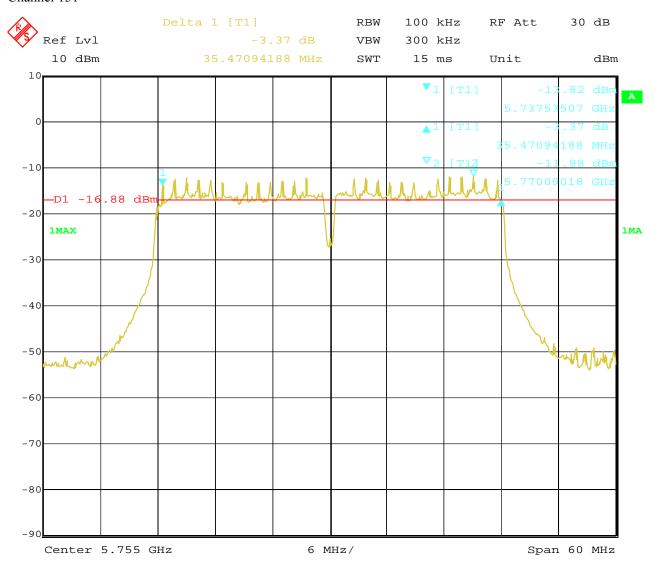

24.APR.2022 18:42:20 Date:


Page 112 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 159

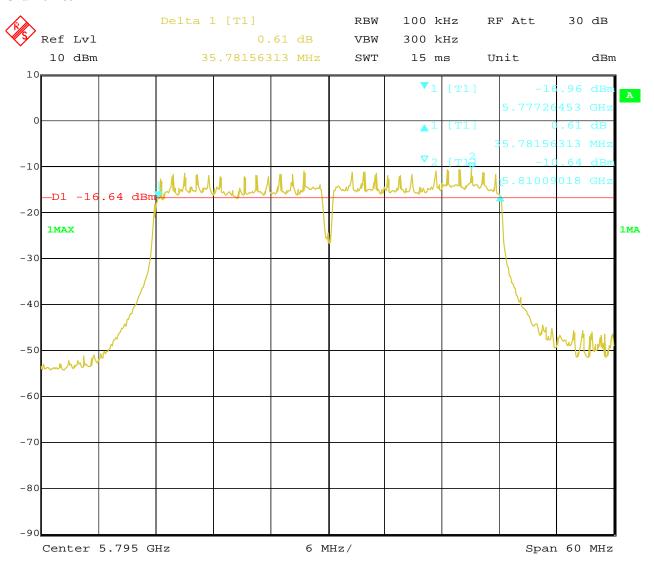

Date: 24.APR.2022 18:45:34

Page 113 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Configure

99% Bandwidth

Channel 151

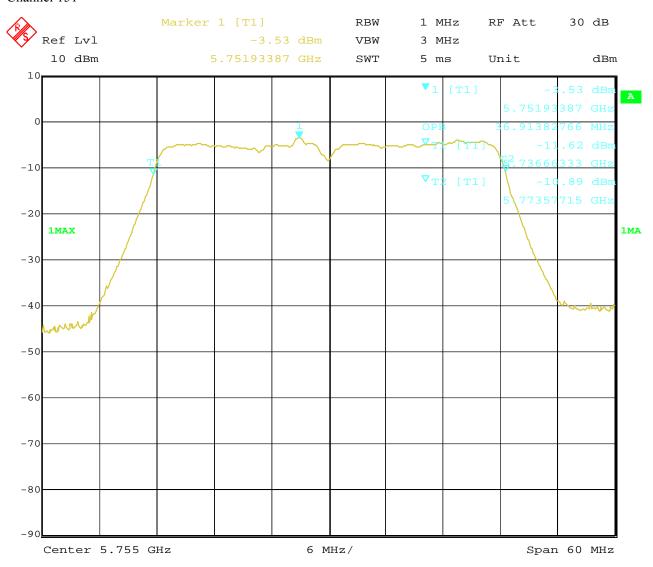

24.APR.2022 19:20:03 Date:


Page 114 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 159

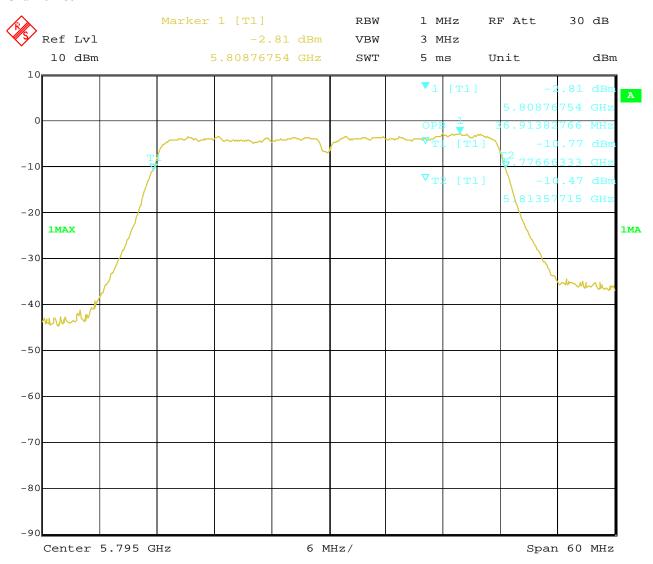

Date: 24.APR.2022 19:17:39

Page 115 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



EUT		Outdo	or LoraWA	N Gateway	Model	DSGW-010C		
Mode		:	802.11ac VHT80		Input Voltage	DC48V		
Temperati	ure		24 deg.	C,	Humidity	56% RH		
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	Bandwidth (MHz)	Minimum Limi (MHz)	Pass/ Fail		
26dB Bar	ndwidth							
42		5210	mcs0	82.00		Pass		
99% Ban	99% Bandwidth							
42	5210		mcs0	75.99		Pass		

Page 116 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Configure

26dB Bandwidth

Channel 42

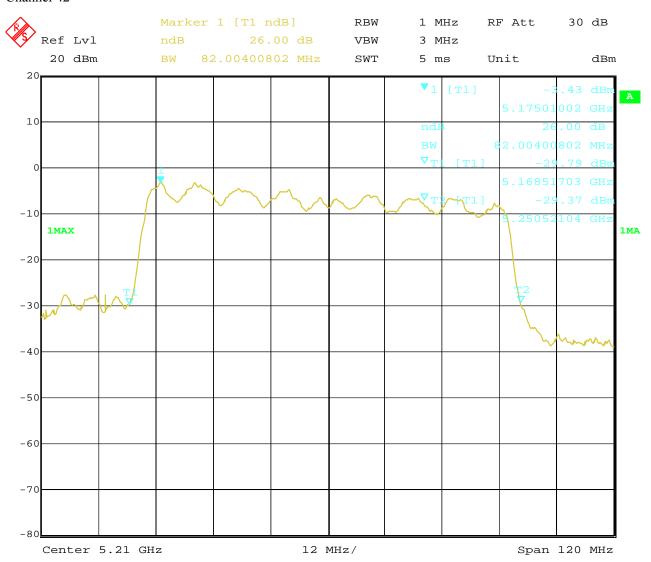

24.APR.2022 15:44:52 Date:

Page 117 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Configure

99% Bandwidth

Channel 42

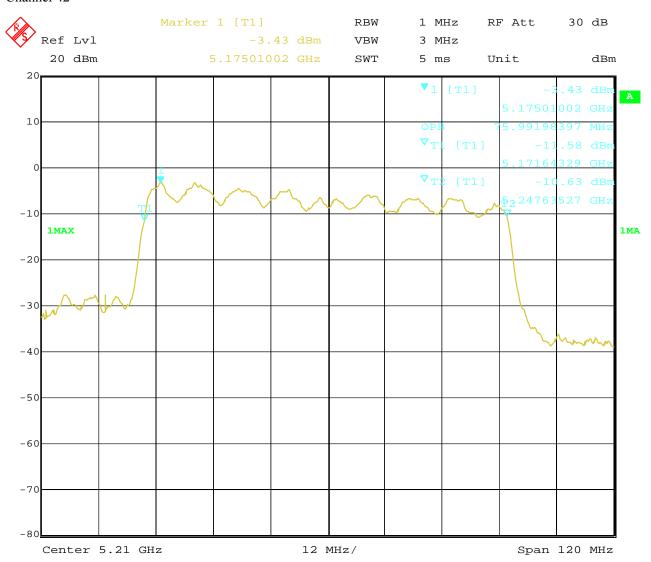

24.APR.2022 15:44:36 Date:

Page 118 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



EUT		Outo	door LoraW	AN Gateway	Model	DSGW-010C										
Mode			802.11ac	VHT80	Input Voltage	DC48V										
Temperat	ure		24 deg	g. C,	Humidity	56% RH										
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail										
26dB Bar	ndwidth															
155	5775		5775		5775		5775		5775		55 5775		mcs0	82.73		Pass
6dB Band	dwidth															
155		5775	mcs0	75.59	0.5	Pass										
99% Ban	99% Bandwidth															
155	155 5775			75.99		Pass										

Page 119 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Configure

26dB Bandwidth

Channel 155

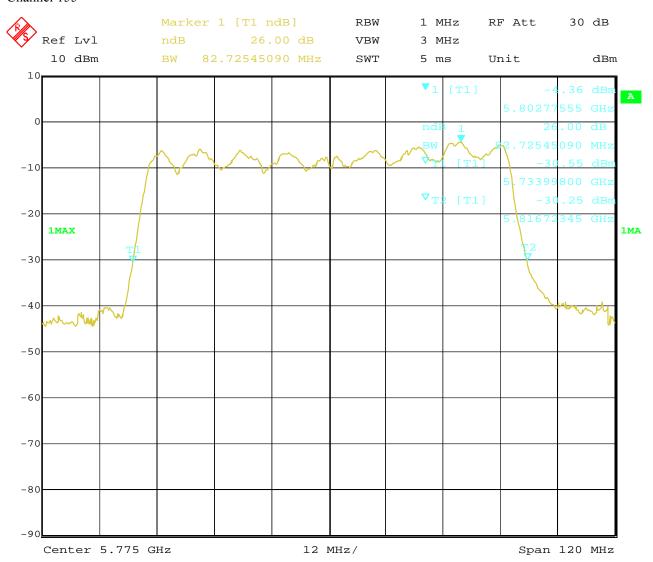

24.APR.2022 19:12:10 Date:

Page 120 of 169


Report No.: TW2203419-03E

Date: 2022-05-16



6dB Bandwidth

Channel 155

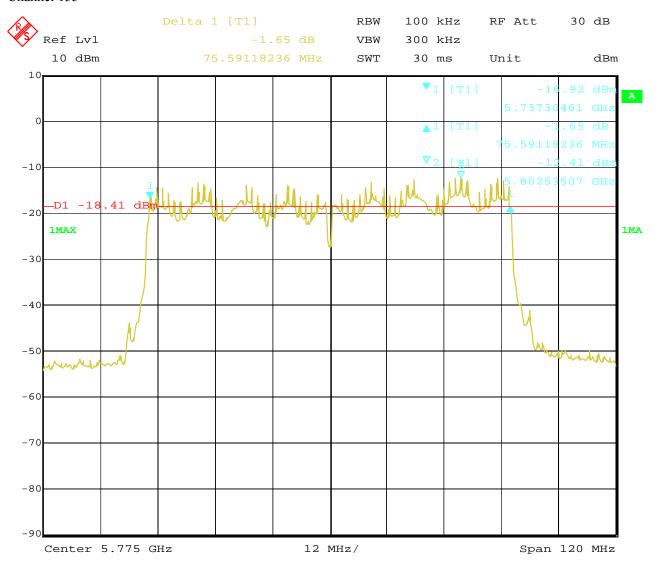

24.APR.2022 18:57:57 Date:

Page 121 of 169

Report No.: TW2203419-03E


Date: 2022-05-16



Test Configure

99% Bandwidth

Channel 155

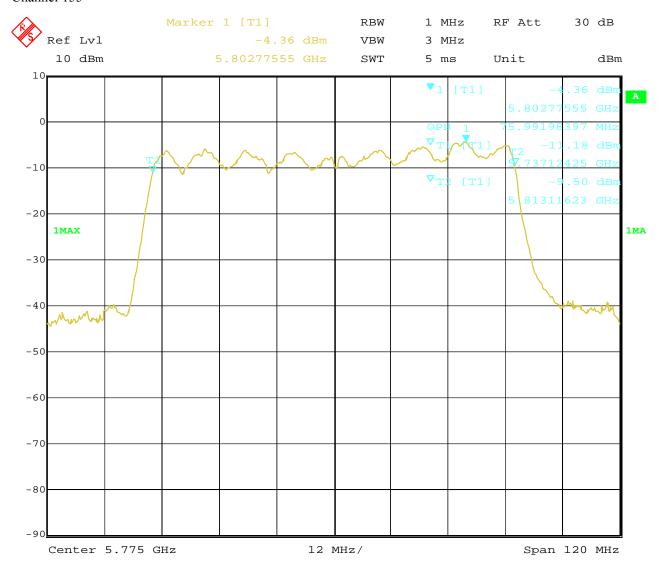

24.APR.2022 19:12:36 Date:


Report No.: TW2203419-03E

Date: 2022-05-16



8.0 Peak Transmit Power Measurement

8.1 Test Setup



8.2 Limits of Peak Transmit Power Measurement

Operation Band		EUT Category	Limit		
		Outdoor Access Point	1 Watt (30 dBm) ≤ (Max. e.i.r.p 125mW		
			(21 dBm) at any elevation angle above 30		
			degrees as measured from the horizon)		
U-NII-1	Fixed point-to-point Access Point		1 Watt (30 dBm)		
		Indoor Access Point	1 Watt (30 dBm)		
	√	Mobile and Portable client device	250mW (24 dBm)		
U-NII-2A			250mW (24 dBm) or 11 dBm+10 log B*		
U-NII-2C			250mW (24 dBm) or 11 dBm+10 log B*		
U-NII-3			1 Watt (30 dBm)		

Note: Where B is the 26dB emission bandwidth in MHz.

8.3 Test Procedure

The RF power output was measured with a Spectrum analyzer connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the average power was measured

Page 123 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



8.4Test Results

EU	T		Outdoor LoraWAN Gateway	Model	DSGW-010C
Mod	de		802.11a	Test Voltage	DC48V
Temper	rature		24 deg. C,	Humidity	56% RH
Channel	Frequer (MHz	-	Power (dBm)	Limit (dBm)	Pass/ Fail
36	5180)	4.11	24	Pass
40	5200)	3.34	24	Pass
48	5240	-0.24		24	Pass
149	5745	5	0.69	30	Pass
153	5765	5	1.19	30	Pass
161	5825	5	2.89	30	Pass

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH36, CH40, CH48, CH149, CH153 and CH161

- 2. The result basic equation calculation as follow: Average Power Output = AV Power Reading + Cable loss + Attenuator
- 3. The worse case was recorded

Page 124 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



EU	Т	Outdoor LoraWAN Gateway		Model		DSGW-010C	
Mod	de		802.11n HT20	Test Voltage			DC48V
Temper	ature		24 deg. C,	Hun	nidity		56% RH
Channel	Frequer (MHz	-	Power (dBm)		Limit (d	Bm)	Pass/ Fail
36	5180)	4.10	4.10			Pass
40	5200)	3.24		24		Pass
48	5240)	-0.29		24		Pass
149	5745		0.65		30		Pass
153	5765		0.99		30		Pass
161	5825		2.79		30		Pass

Note: 1. At finial test to get the worst-case emission at mcs0 for CH36, CH40, CH48, CH149, CH153 and CH161

2. The result basic equation calculation as follow:

Average Power Output = AV Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Page 125 of 169

Date: 2022-05-16

Report No.: TW2203419-03E



EU	T		Outdoor LoraWAN Gateway		Model		DSGW-010C
Mo	de		802.11n HT40	Те	est Voltage		DC48V
Temper	rature		24 deg. C,]	Humidity		56% RH
Channel	Freque (MH	-	Power (dBm)		Limit (dBm)		Pass/ Fail
38	5190)	3.79		24		Pass
46	5230)	0.58		24		Pass
151	575	5	1.10		30		Pass
159	579:	5	2.27		30		Pass

Note: 1. At finial test to get the worst-case emission at mcs0 for CH38, CH46, CH151, CH159 and CH161

2. The result basic equation calculation as follow: Average Power Output = AV Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Page 126 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



EU	T		Outdoor LoraWAN Gateway	Model		DSGW-010C
Mod	de		802.11ac VHT20	Test Voltage	oltage DC48V	
Temper	rature		24 deg. C,	Humidity		56% RH
Channel	Frequer (MHz	-	Power (dBm)	Limit (dB	m)	Pass/ Fail
36	5180)	4.87	24		Pass
40	5200)	4.04	24		Pass
48	5240)	0.45	24		Pass
149	5745		0.53	30		Pass
153	5765	5	1.02	30		Pass
161	5825	5	2.75	30		Pass

Note: 1. At finial test to get the worst-case emission at mcs0 for CH36, CH40, CH48, CH149, CH153 and CH161

2. The result basic equation calculation as follow:

Average Power Output = AV Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Page 127 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



EU	T	Outdoor LoraWAN Gateway		Model			DSGW-010C	
Mod	de		802.11ac VHT40	Te	est Voltage		DC48V	
Temper	ature		24 deg. C,]	Humidity		56% RH	
Channel	Freque (MH	_	Power (dBm)		Limit (dBm)		Pass/ Fail	
38	5190	0	4.43		24		Pass	
46	5230)	1.28		24		Pass	
151	575	5	1.11		30	Pass		
159	579:	5	2.24		30		Pass	

Note: 1. At finial test to get the worst-case emission at mcs0 for CH38, CH46, CH151, CH159 and CH161

2. The result basic equation calculation as follow: Average Power Output = AV Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EU	Т		Outdoor LoraWAN Gateway		Model		DSGW-010C
Mod	de		802.11ac VHT80	Test Voltage			DC48V
Temper	ature		24 deg. C,]	Humidity		56% RH
Channel	Freque (MH		Power (dBm)		Limit (dB	m)	Pass/ Fail
42	5210	0	2.09		24		Pass
155	577:	5	1.50		30		Pass

Note: 1. At finial test to get the worst-case emission at mcs0 s for CH42 and CH155

- 2. The result basic equation calculation as follow: Average Power Output = AV Power Reading + Cable loss + Attenuator
- 3. The worse case was recorded

Page 128 of 169


Report No.: TW2203419-03E

Date: 2022-05-16



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

Operation Band		EUT Category	Limit
		Outdoor Access Point	
II NIII 1		Fixed point-to-point Access Point	17dBm/MHz
U-NII-1		Indoor Access Point	
	√	Mobile and Portable client device	11dBm/MHz
U-NII-2A			11dBm/MHz
U-NII-2C			11dBm/MHz
U-NII-3			30dBm/500kHz

9.3 Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer
- 2. Set the RBW = 1MHz or 500kHz
- 3. Set the VBW =3MHz or 2MHz
- 4. Set the span to encompass the entire emissions bandwidth (EBW) of the signal
- 5. Detector = RMS
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.

Page 129 of 169 Report No.: TW2203419-03E

Date: 2022-05-16



9.4Test Result

EUT			Outdoor LoraWAN Gateway	Model	DSGW-010C
Mode			802.11a 6Mbps	Test Voltage	DC48V
Temperat	ture		24 deg. C,	Humidity	56% RH
Channel	Freq	luency	Power Spectral	Limit	Pass/ Fai
	(M	IHz)	Density(dBm/MHz)	(dBm/MHz)	
36	5	180	-4.49	11	Pass
40	52	200	-5.78	11	Pass
48	52	240	-8.61	11	Pass
Channel	Freq	luency	Power Spectral	Limit	Pass/ Fai
	(M	fHz)	Density(dBm/500kHz)	(dBm/500kHz)
149	5'	745	-9.68	30	Pass
153	5'	765	-9.37	30	Pass
161	5	825	-7.43	30	Pass


Report No.: TW2203419-03E

Date: 2022-05-16



9.5 Plots of Power Spectral Density Measurement

1.802.11a at 6Mbps of CH36

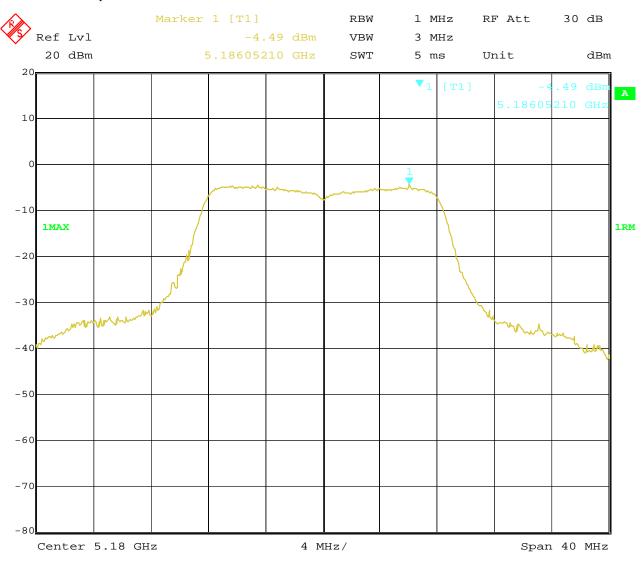


Page 131 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



2.802.11a at 6Mbps of CH40

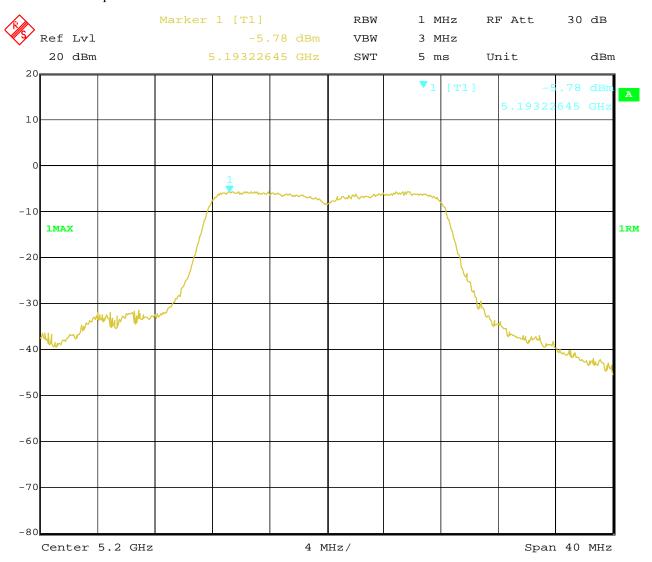

24.APR.2022 17:18:30 Date:


Page 132 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



3.802.11a at 6Mbps of CH48

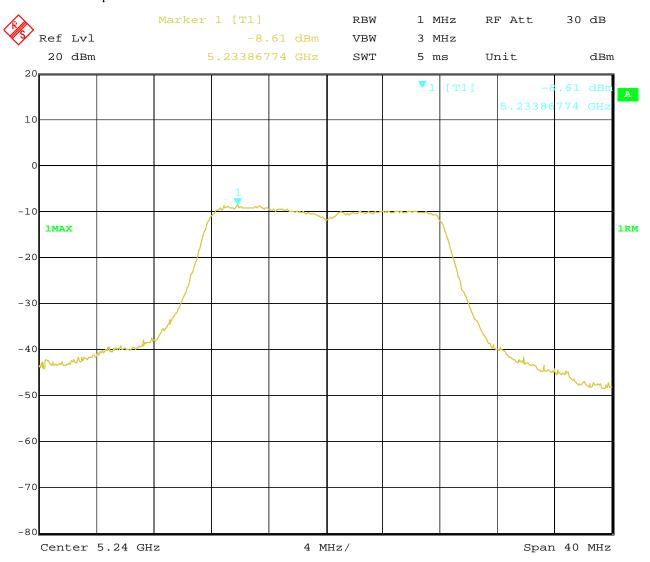

Date: 24.APR.2022 17:17:38


Page 133 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



4.802.11a at 6Mbps of CH149

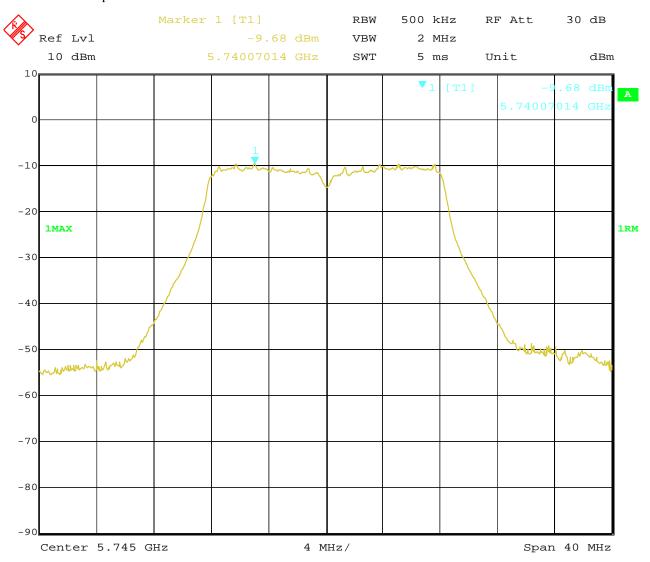

Date: 24.APR.2022 22:10:09


Page 134 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



5.802.11a at 6Mbps of CH153

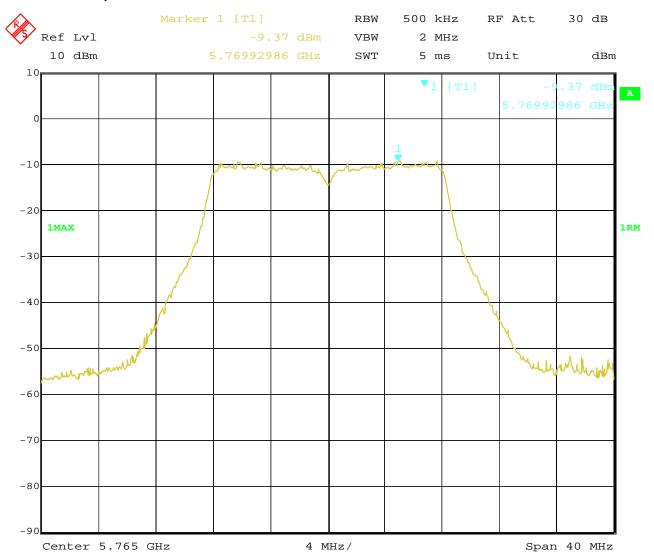

Date: 24.APR.2022 22:11:38


Page 135 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



6.802.11a at 6Mbps of CH161

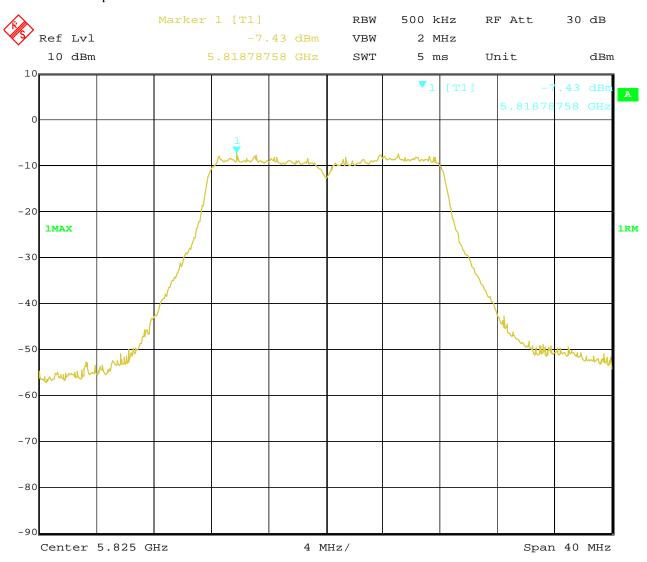

Date: 24.APR.2022 22:12:35

Page 136 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



EUT			Outdoor LoraWAN Gateway	Model	DSGW-0	010C
Mode	;		802.11n HT20 mcs0	Test Voltage	DC48	BV
Temperat	ture		24 deg. C,	Humidity	56% I	RH
Channel	Freq	luency	Power Spectral	Limit		Pass/ Fail
	(N	(Hz	Density(dBm/MHz)	(dBm/MHz	2)	
36	5	180	-4.62	11	11 Pa	
40	5	200	-5.72	11		Pass
48	5:	240	-8.97	11		Pass
Channel	Freq	luency	Power Spectral	Limit		Pass/ Fail
	(M	Mz)	Density(dBm/500kHz)	(dBm/500kH	łz)	
149	5'	745	-9.68	30	30	
153	5'	765	-9.20	30		Pass
161	5	825	-7.57	30	30	

Page 137 of 169


Report No.: TW2203419-03E

Date: 2022-05-16



Test Plots

1.802.11n at mcs0 of CH36

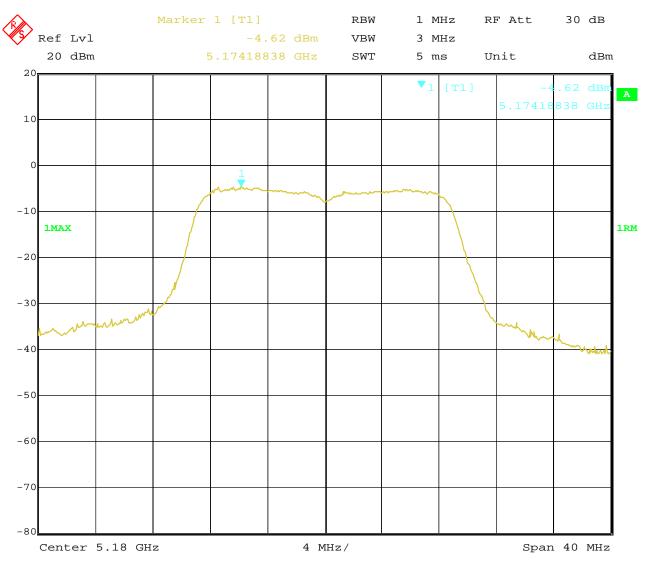

Date: 24.APR.2022 17:03:24


Page 138 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



2.802.11n at mcs0 of CH40

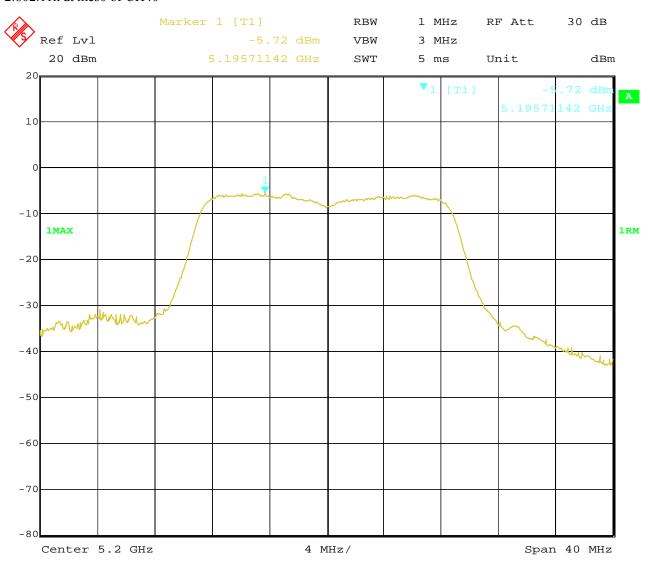

24.APR.2022 17:08:11 Date:


Page 139 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



3.802.11n at mcs0 of CH48

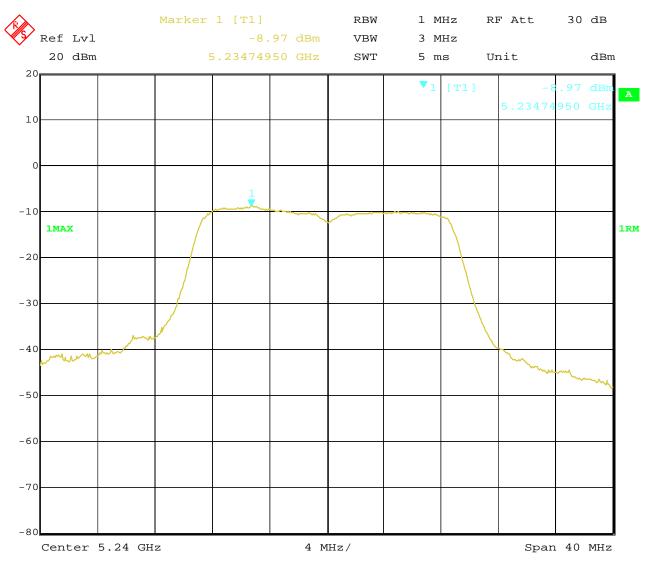

Date: 24.APR.2022 17:15:35


Page 140 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



4.802.11n at mcs0 of CH149

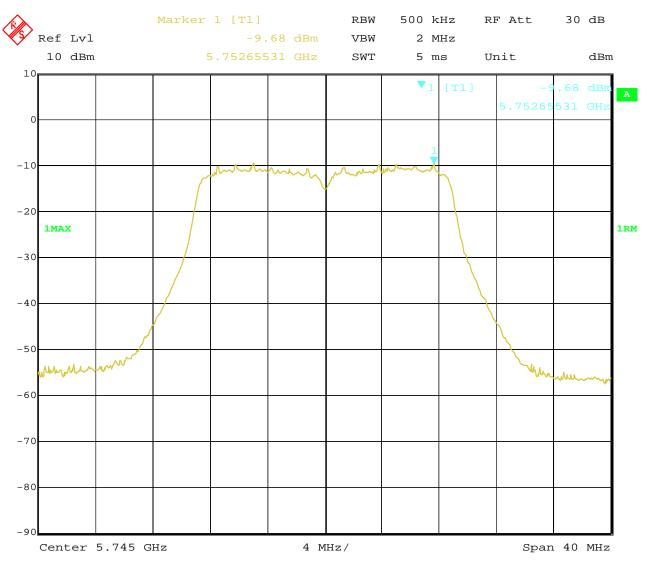

Date: 24.APR.2022 22:17:08


Page 141 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



5.802.11n at mcs0 of CH153

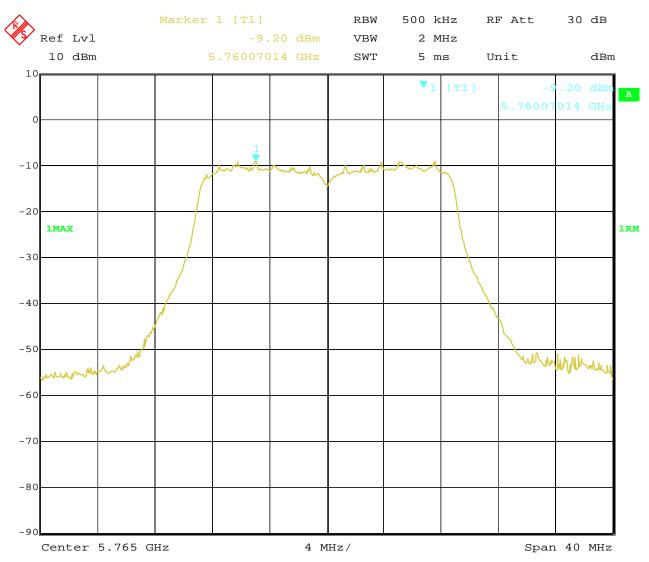

Date: 24.APR.2022 22:15:28


Page 142 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



6.802.11n at mcs0 of CH161

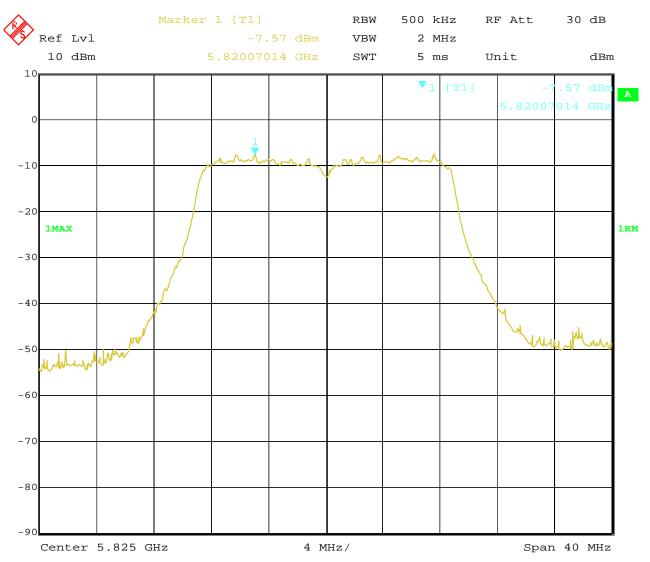

Date: 24.APR.2022 22:14:07

Page 143 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



EUT		Outdoor LoraWAN Gateway	Model	DSGW-010C	
Mode		802.11n HT40 mcs0	Test Voltage	DC48V	
Temperat	ture	24 deg. C,	Humidity	56% RH	
Channel	Frequency	Power Spectral	Limit	Pass/ Fail	
	(MHz)	Density(dBm/MHz)	(dBm/MHz)		
38	5190	-7.47	11	11	
46	5230	-10.40	11	11	
Channel	Frequency	Power Spectral	Limit	Limit	
	(MHz)	Density(dBm/500kHz)	(dBm/500kH	(dBm/500kHz)	
151	5755	-11.99	30	30	
159	5795	-10.62	30	30	

Page 144 of 169


Report No.: TW2203419-03E

Date: 2022-05-16



Test Plots

1.802.11n HT40 at mcs0 of CH38

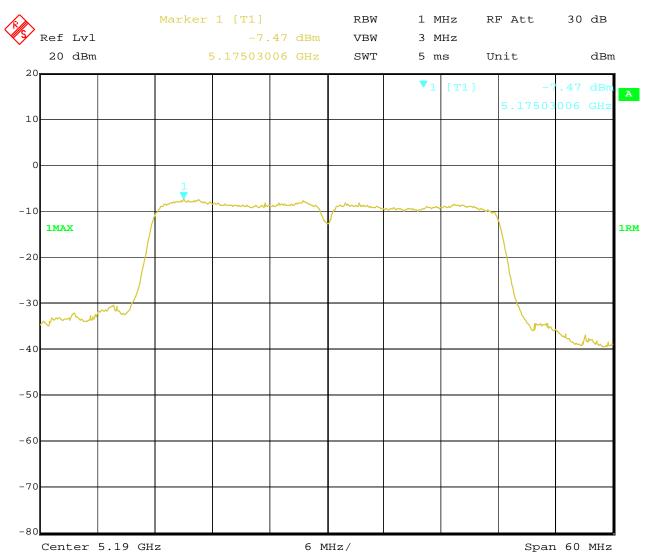

Date: 24.APR.2022 17:21:14


Page 145 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



2.802.11n HT40 at mcs0 of CH46

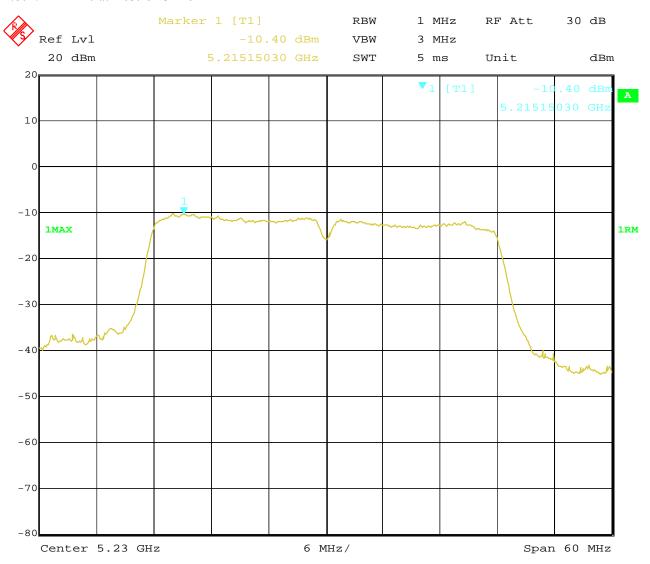

Date: 24.APR.2022 17:24:24


Page 146 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



3.802.11n HT40 at mcs0 of CH151

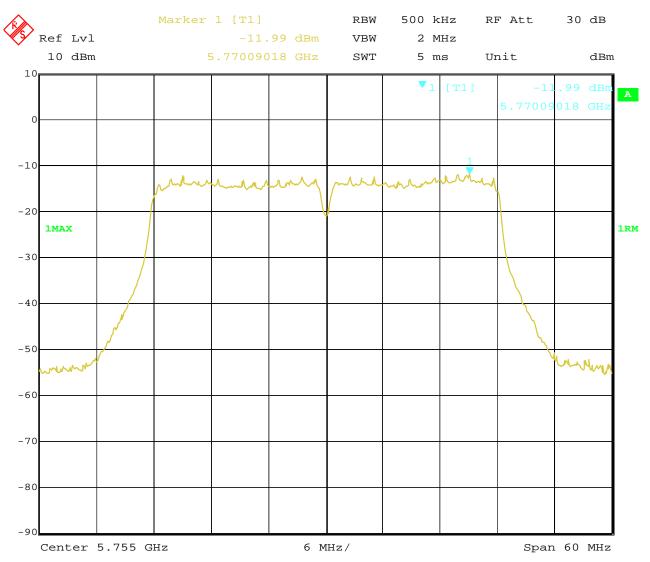

Date: 24.APR.2022 22:06:51


Page 147 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



4.802.11n HT40 at mcs0 of CH159

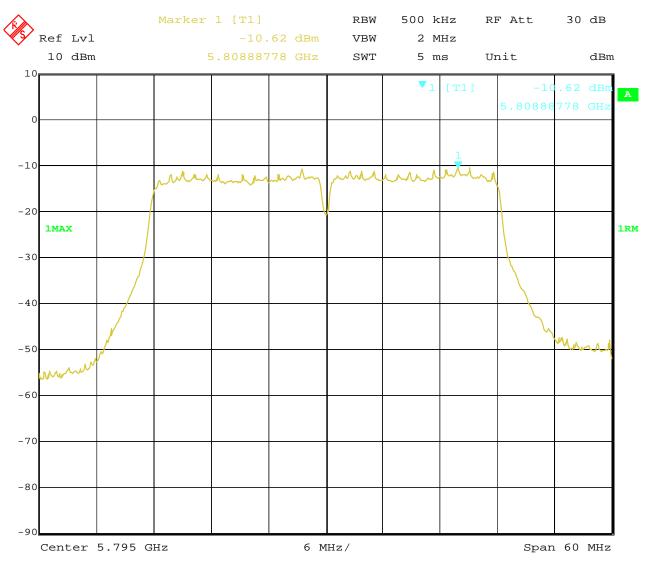

Date: 24.APR.2022 22:04:50

Page 148 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



EUT		Outdoor LoraWAN Gateway		Model	DSGW-010C	DSGW-010C		
Mode			802.11ac VHT20	Test Voltage	DC48V			
Temperature			24 deg. C,	Humidity	56% RH			
Channel	Free	quency	Power Spectral	Limit	Pas	s/ Fail		
	(MHz)		Density(dBm/MHz)	(dBm/MHz)				
36	5	180	-4.26	11	F	ass		
40	5	200	-4.76	11	F	ass		
48	5240		-8.74	11	F	ass		
Channel	Frequency		Frequency		Power Spectral	Limit	Pas	s/ Fail
	(MHz)		Density(dBm/500kHz)	(dBm/500kHz)				
149	5745		5745 -9.67		30	F	ass	
153	5	765	-9.22	30	F	ass		
161	5825		-7.79	30	F	ass		

Page 149 of 169


Report No.: TW2203419-03E

Date: 2022-05-16



Test Plots

1.802.11ac at mcs0 of CH36

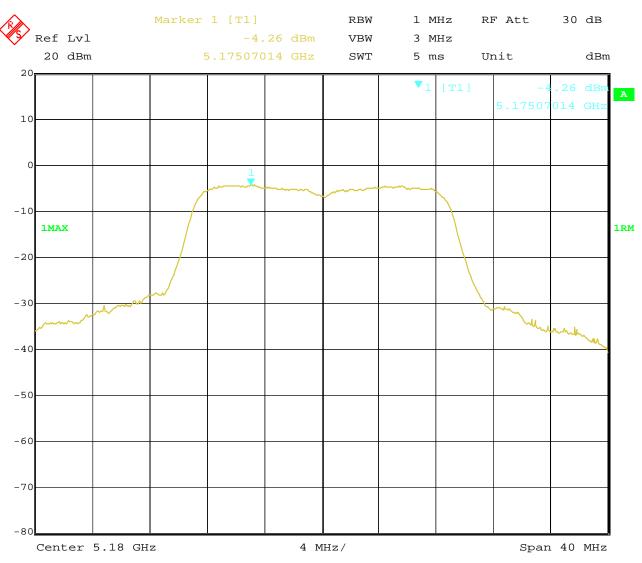

Date: 24.APR.2022 17:00:43


Page 150 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



2.802.11ac at mcs0 of CH40

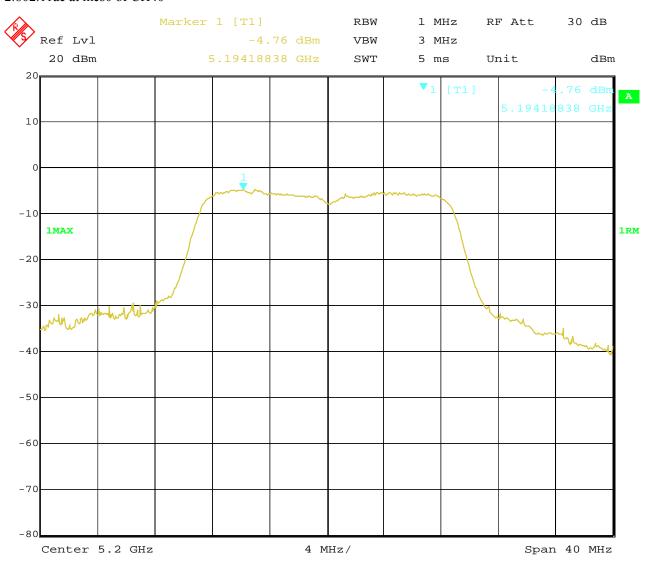

24.APR.2022 16:52:45 Date:


Page 151 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



3.802.11ac at mcs0 of CH48

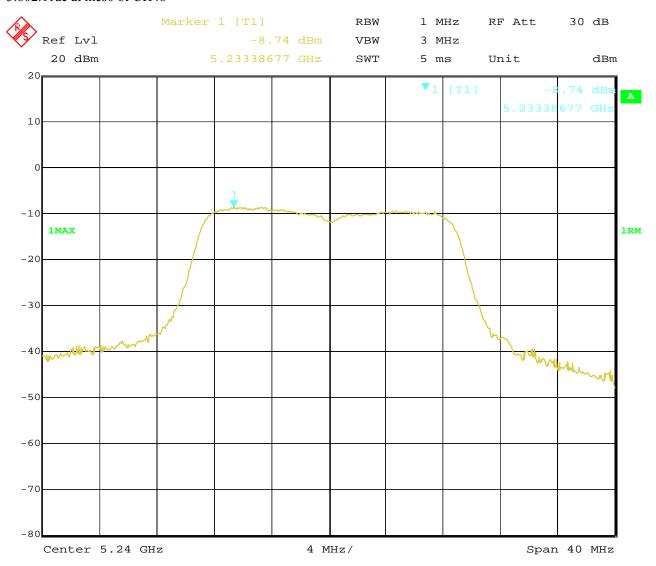

Date: 24.APR.2022 16:49:52


Page 152 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



4.802.11ac at mcs0 of CH149

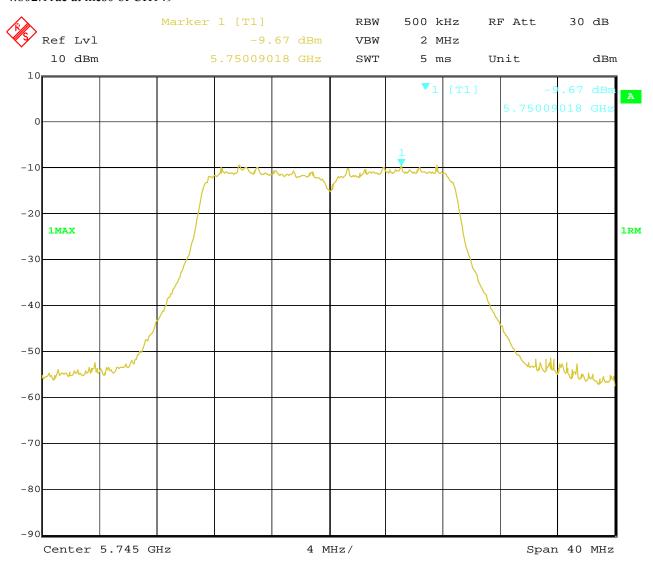

Date: 24.APR.2022 22:18:48


Page 153 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



5.802.11ac at mcs0 of CH153

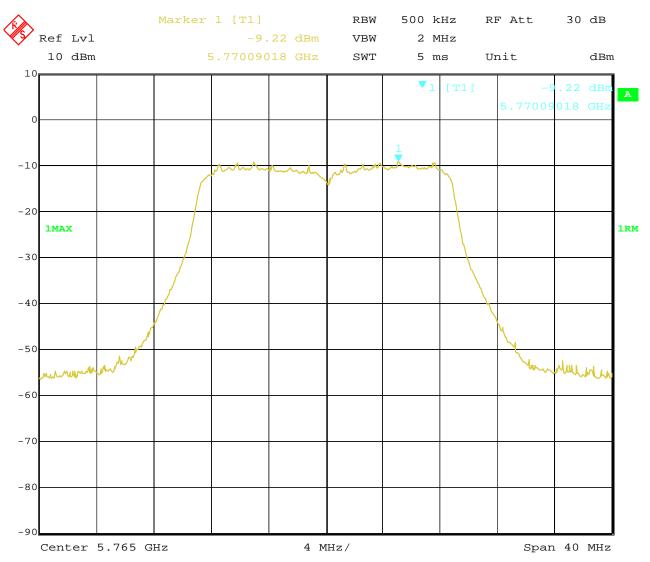

Date: 24.APR.2022 22:20:55


Page 154 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



6.802.11ac at mcs0 of CH161

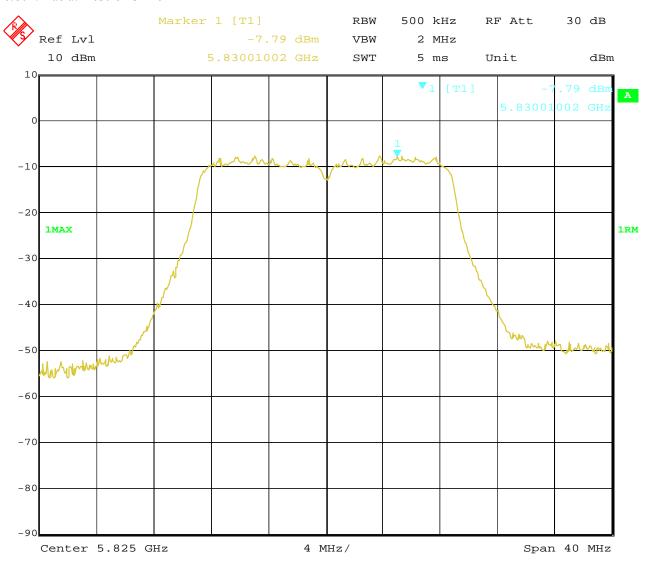

Date: 24.APR.2022 22:22:19

Page 155 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



EUT		Outdoor LoraWAN Gateway	Model	DSGW-010C	
Mode		802.11ac VHT40	Test Voltage	DC48V	
Temperat	ture	24 deg. C,	Humidity	56% RH	
Channel	Frequency	Power Spectral	Limit		Pass/ Fail
	(MHz)	Density(dBm/MHz)	(dBm/MHz	z)	
38	5190	-6.61	11		Pass
46	5230	-9.38	11		Pass
Channel	Frequency	Power Spectral	Limit		Pass/ Fail
	(MHz) Density(dBm/500kHz) (dBm/500kHz)		(dBm/500kH	Hz)	
151	5755	-12.01	30		Pass
159	5795	-10.67	30		Pass

Page 156 of 169


Report No.: TW2203419-03E

Date: 2022-05-16



Test Plots

1.802.11ac at mcs0 of CH38

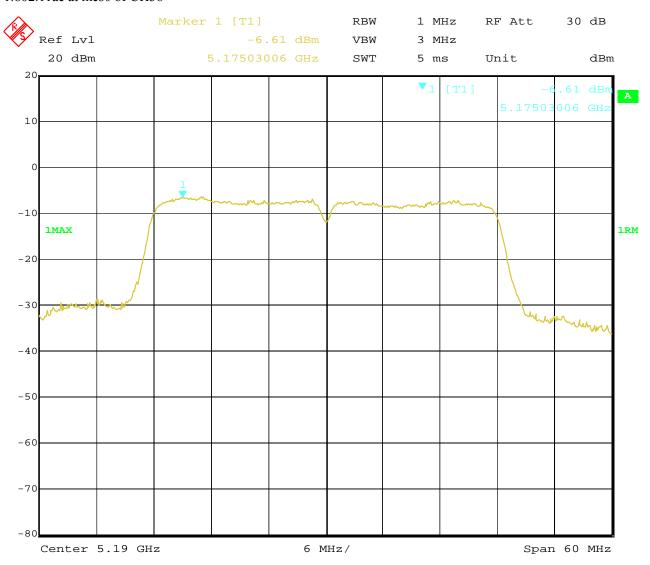

Date: 24.APR.2022 17:28:56


Page 157 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



2.802.11ac at mcs0 of CH46

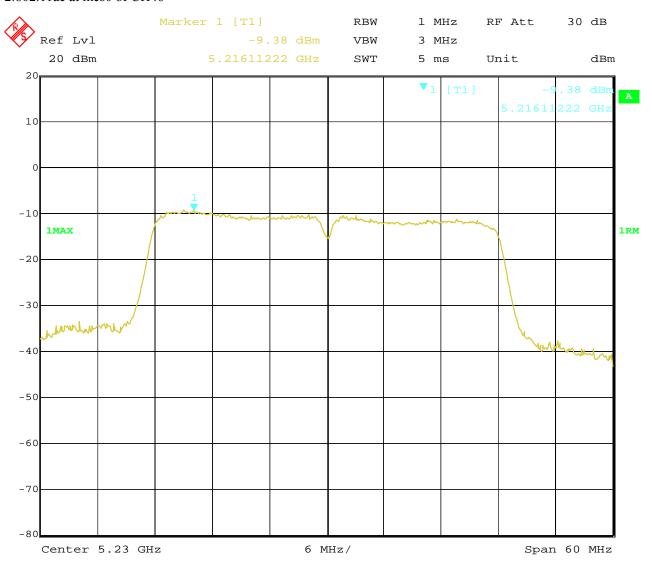

Date: 24.APR.2022 17:25:33


Page 158 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



3.802.11ac at mcs0 of CH151

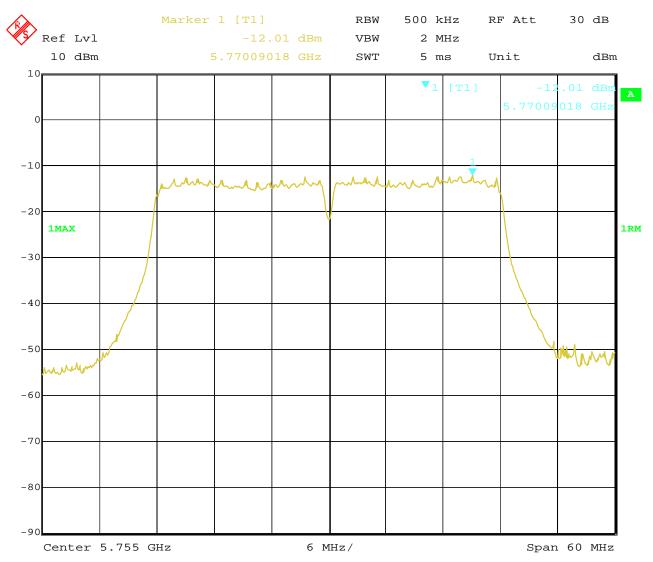

Date: 24.APR.2022 21:58:41


Page 159 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



4.802.11ac at mcs0 of CH159

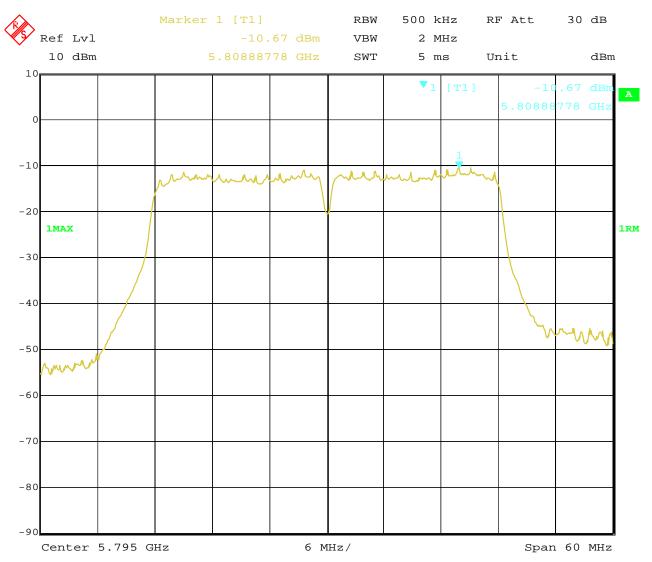

Date: 24.APR.2022 22:02:23

Page 160 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



EUT		Outdoor LoraWAN Gateway	Model	DSGW-010C	
Mode		802.11ac VHT80	Test Voltage	DC48V	
Temperat	ture	24 deg. C,	Humidity	56% RH	
Channel	Frequency	Power Spectral	L	imit	Pass/ Fail
	(MHz)	Density(dBm/MHz)	(dBm	n/MHz)	
42	5210	-9.71	11		Pass
Channel	Frequency	Power Spectral	Limit		Pass/ Fail
	(MHz)	Density(dBm/500kHz)	(dBm/500kHz)		
155	5775	-12.67		30	Pass

Page 161 of 169


Report No.: TW2203419-03E

Date: 2022-05-16



Test Plots

1.802.11ac at mcs0Mbps of CH42

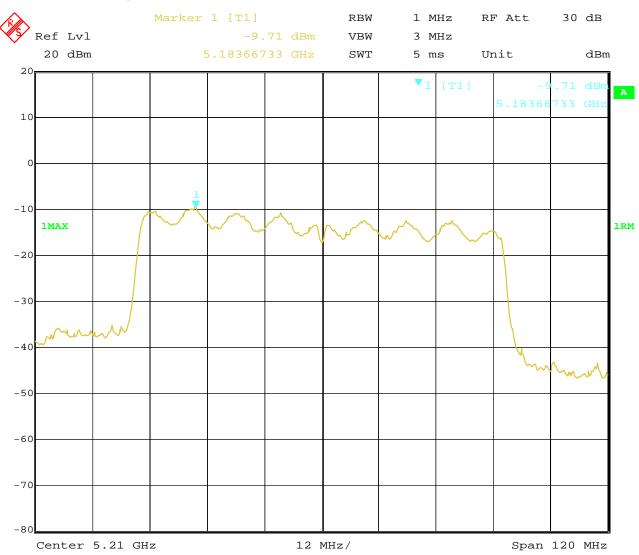

Date: 24.APR.2022 17:32:19


Page 162 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



2.802.11ac at mcs0Mbps of CH155

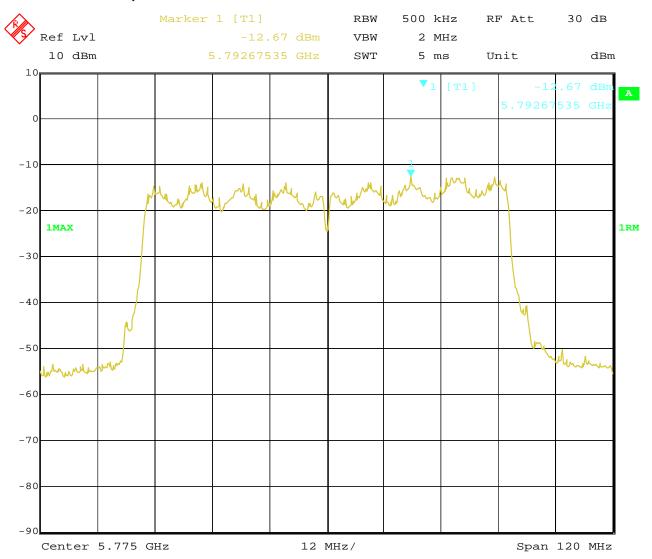

Date: 24.APR.2022 21:39:54 Report No.: TW2203419-03E

Date: 2022-05-16



Page 163 of 169

10.0 Frequency Stability

10.1 Limits of Frequency Stability Measurement

The frequency tolerance of the carrier signal shall be maintained within \pm 0.02% of the operating frequency over a temperature variation of \pm 30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees

10.2 Test Procedure

- 1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- 2. Turn the EUT on and couple its output to a spectrum analyzer.
- 3. Turn the EUT off and set the chamber to the highest temperature specified.
- 4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- 5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- 6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

Report No.: TW2203419-03E

Date: 2022-05-16



11.3 Test Result

Channel 36 (5180MHz)

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
48V	5180.0385
43.2V	5180.0369
52.8V	5180.0377
Max. Deviation (MHz)	0.0385
Max. Deviation (ppm)	7.43

Rated working voltage: DC48V

Temperature vs. Frequency Stability

Temperature ($^{\circ}$ C)	Measurement Frequency (MHz)
-30	5180.0378
-20	5180.0359
-10	5180.0362
0	5180.0360
10	5180.0372
20	5180.0356
30	5180.0357
40	5180.0372
50	5180.0364
Max. Deviation (MHz)	0.0378
Max. Deviation (ppm)	7.34

Page 165 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



Channel 149 (5745MHz)

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
48V	5745.0459
43.2V	5745.0426
52.8V	5745.0435
Max. Deviation (MHz)	0.0459
Max. Deviation (ppm)	7.99

Rated working voltage: DC48V

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
-30	5745.0431
-20	5745.0419
-10	5745.0450
0	5745.0428
10	5745.0443
20	5745.0428
30	5745.0415
40	5745.0437
50	5745.0441
Max. Deviation (MHz)	0.0450
Max. Deviation (ppm)	7.83

Report No.: TW2203419-03E

Date: 2022-05-16



Page 166 of 169

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

External Antenna with Reverse polarity N connector used. The gain of the antennas is 0.20dBi (Declared by the manufacturer)

Report No.: TW2203419-03E Page 167 of 169

Date: 2022-05-16



12.0 FCC ID Label

FCC ID: 2AUXBDSGW-010C

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:



Page 168 of 169

Report No.: TW2203419-03E

Date: 2022-05-16



13.0 Photo of testing

Conducted Emission Test Setup:



Report No.: TW2203419-03E

Date: 2022-05-16



Radiated Emission Test Setup



Photos of EUT

Please see test report TW2203419-01E

-- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the propert. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.