

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

WOW Technologies (Singapore) Pte Ltd

Shockwafe Sound Bar with Wireless Subwoofer

Model Number: ULTRA 9.2 eARC

FCC ID: 2AGB6-SWEARC

Prepared for:	WOW Technologies (Singapore) Pte Ltd
	19 Ubi Crescent Singapore 408577
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808

Report Number:	ESTE-R2107184
Date of Test:	Jun. 24~Jul. 29, 2021
Date of Report:	Jul. 30, 2021

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT)	5
1.2. Antenna Information	5
2. SUMMARY OF TEST	6
2.1. Summary of test result.....	6
2.2. Test Facilities	7
2.3. Measurement uncertainty	8
2.4. Assistant equipment used for test.....	8
2.5. Block Diagram	8
2.6. Test mode	9
2.7. Channel List	10
2.8. Power Setting of Test Software.....	10
2.9. Test Equipmen.....	11
3. MAXIMUM PEAK OUTPUT POWER	12
3.1. Limit.....	12
3.2. Test Setup.....	12
3.3. Spectrum Analyzer Setting.....	12
3.4. Test Procedure.....	12
3.5. Test Result.....	13
4. 20 DB BANDWIDTH.....	17
4.1. Limit.....	17
4.2. Test Setup.....	17
4.3. Spectrum Analyzer Setting.....	17
4.4. Test Procedure.....	17
4.5. Test Result.....	18
5. CARRIER FREQUENCY SEPARATION	22
5.1. Limit.....	22
5.2. Test Setup.....	22
5.3. Spectrum Analyzer Setting.....	22
5.4. Test Procedure.....	22
5.5. Test Result.....	23
6. NUMBER OF HOPPING CHANNEL	27
6.1. Limit.....	27
6.2. Test Setup.....	27
6.3. Spectrum Analyzer Setting.....	27
6.4. Test Procedure.....	27
6.5. Test Result.....	28
7. DWELL TIME.....	30
7.1. Limit.....	30
7.2. Test Setup.....	30
7.3. Spectrum Analyzer Setting.....	30
7.4. Test Procedure.....	30
7.5. Test Result.....	31

8.	CONDUCTED BAND EDGE	35
8.1.	Limit	35
8.2.	Test Setup	35
8.3.	Spectrum Analyzer Setting	35
8.4.	Test Procedure	35
8.5.	Test Result	36
9.	CONDUCTED SPURIOUS EMISSIONS	38
9.1.	Limit	38
9.2.	Test Setup	38
9.3.	Spectrum Analyzer Setting	38
9.4.	Test Procedure	38
9.5.	Test Result	39
10.	RADIATED SPURIOUS EMISSIONS AND BAND EDGE	41
10.1.	Limit	41
10.2.	Test Setup	42
10.3.	Spectrum Analyzer Setting	43
10.4.	Test Procedure	44
10.5.	Test Result	45
11.	AC POWER LINE CONDUCTED EMISSIONS	57
11.1.	Limit	57
11.2.	Test Setup	57
11.3.	Spectrum Analyzer Setting	57
11.4.	Test Procedure	57
11.5.	Test Result	58
12.	ANTENNA REQUIREMENTS	62
12.1.	Limit	62
12.2.	Test Result	62
13.	TEST SETUP PHOTO	63
14.	EUT PHOTO	65

EST Technology Co., Ltd.

Applicant:	WOW Technologies (Singapore) Pte Ltd		
Address:	19 Ubi Crescent Singapore 408577		
Manufacturer:	WOW Technologies (Singapore) Pte Ltd		
Address:	19 Ubi Crescent Singapore 408577		
Factory:	Eastech (Huizhou) Co., Ltd.		
Address:	Dong Fong District, Xin Xu, Hui Yang, Hui Zhou City, Guang Dong 516226, China		
E.U.T:	Shockwafe Sound Bar with Wireless Subwoofer		
Model Number:	ULTRA 9.2 eARC		
Power Supply:	DC 19V From Adapter Input AC 100-240V, 50/60Hz		
Trade Name:	Nakamichi	Serial No.:	-----
Date of Receipt:	Jun. 24, 2021	Date of Test:	Jun. 24~Jul. 29, 2021
Test Specification:	FCC Part 15 Subpart C (15.247) ANSI C63.10:2013 FCC KDB 558074 D01 15.247 Meas Guidance v05r02		
Test Result:	The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.		
Prepared by:		Reviewed by:	
 _____ Ring Yang / Assistant		 _____ Seven Wang / Engineer	
		Date: Jul. 30, 2021 Approved by:  _____ Iceman Hu / Manager	
Other Aspects:			
None.			
<i>Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested</i>			
<i>This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.</i>			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	:	Shockwafe Sound Bar with Wireless Subwoofer
Model Number	:	ULTRA 9.2 eARC
Software Version	:	ADK QCC512X QCC302X WIN 6.4.2.26(6.4.2)
Hardware Version	:	APESB92SS
Operation frequency	:	2402MHz~2480MHz
Number of channel	:	79
Max Output Power (PEAK)	:	GFSK:8.05dBm 8-DPSK:11.09dBm
Modulation Type	:	BT BDR(1Mbps): GFSK BT EDR(2Mbps): $\pi/4$ -DQPSK BT EDR(3Mbps): 8-DPSK
Sample Type	:	Prototype production

Note:

For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

1.2. Antenna Information

Ant No.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	-	-	Internal	-	4

2. SUMMARY OF TEST

2.1. Summary of test result

Report Section	Description of Test Item	FCC Standard Section	Results
3	Maximum Peak Output Power	15.247(a)(1)	PASS
4	20dB Bandwidth	15.247(a)(1)	PASS
5	Carrier Frequency Separation	15.247(a)(1)	PASS
6	Number Of Hopping Channel	15.247(a)(1)(iii)	PASS
7	Dwell Time	15.247(a)(1)(iii)	PASS
8	Conducted Band Edge	15.247(d)	PASS
9	Conducted Spurious Emissions	15.247(d)	PASS
10	Radiated Spurious Emissions and Band Edge	15.205 15.209 15.247(d)	PASS
11	AC Power Line Conducted Emissions	15.207	PASS
12	Antenna Requirement	15.203	PASS

Note:

(1) "N/A" denotes test is not applicable in this test report

2.2. Test Facilities

EMC Lab : Certificated by CNAS, CHINA
Registration No.: L5288
This Certificate is valid until: November 12, 2023

Certificated by FCC, USA
Designation Number: CN1215
This Certificate is valid until: January 31, 2022

Certificated by A2LA, USA
Registration No.: 4366.01
This Certificate is valid until: January 31, 2022

Certificated by Industry Canada
CAB identifier No.: CN0035
This Certificate is valid until: January 31, 2022

Certificated by VCCI, Japan
Registration No.: C-14103; T-20073; R-13663;
R-20103; G-20097
Date of registration: Apr. 20, 2020
This Certificate is valid until: Apr. 19, 2023

Certificated by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018

Certificated by Intertek
Registration No.: 2011-RTL-L2-64
Date of registration: November 08, 2018

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China

2.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	$\pm 3.48\text{dB}$
Uncertainty for spurious emissions test (30MHz-1GHz)	$\pm 4.60\text{ dB(Polarize: H)}$
	$\pm 4.68\text{ dB(Polarize: V)}$
Uncertainty for spurious emissions test (1GHz to 25GHz)	$\pm 4.96\text{dB}$
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	1.08dB
Uncertainty for Power density test	0.26dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.


2.4. Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
A	Adapter	Nakamichi	DYS602-190342W	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.4m	AC Cable
1	NO	NO	1.5m	DC Cable

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 (or 1.5) meter high above ground. EUT was beset into Bluetooth test mode by software before test.



(EUT: Shockwafe Sound Bar with Wireless Subwoofer)

2.6. Test mode

Combining all the rates, modulations, and packet types, the Pre-scans had been carried out. The worst case test mode was selected for the final test as listed below.

Test Item	Modulation Type	Operating Mode	Packet Type	Test Channel
Maximum Peak Output Power	GFSK&8-DPSK	Non Hopping	DH5	Low/Middle/High
20dB Bandwidth	GFSK&8-DPSK	Non Hopping	DH5	Low/Middle/High
Carrier Frequency Separation	GFSK&8-DPSK	Hopping	DH5	Low/Middle/High
Number Of Hopping Channel	GFSK&8-DPSK	Hopping	DH5	All Channel Hopping
Dwell Time	GFSK&8-DPSK	Hopping	DH1/DH3/DH5	Middle(All Channel Hopping)
Conducted Band Edge	GFSK&8-DPSK	Non Hopping&Hopping	DH5	Low/ High& All Channel Hopping
Conducted Spurious Emissions	GFSK&8-DPSK	Non Hopping	DH5	Low/Middle/High
Radiated Spurious Emissions(Below 1GHz)	GFSK&8-DPSK	Non Hopping	DH5	Low/Middle/High
Radiated Spurious Emissions(Above 1GHz)	GFSK&8-DPSK	Non Hopping	DH5	Low/Middle/High
Radiated Band Edge	GFSK&8-DPSK	Non Hopping	DH5	Low/High
AC Power Line Conducted Emissions	GFSK&8-DPSK	Non Hopping	DH5	Low/Middle/High

Note:

1. In radiated measurement,the EUT had been pre-scan on the positioned of each 3 axis(X,Y,Z), the worst case was found when positioned on **X-plane**.

2.7. Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-

2.8. Power Setting of Test Software

Software Name	Bluetest V3.2.1		
Frequency(MHz)	2402	2441	2480
GFSK(1Mbps) Setting	DEFAULT	DEFAULT	DEFAULT
8-DPSK(3Mbps) Setting	DEFAULT	DEFAULT	DEFAULT

2.9. Test Equipmen

For conducted emission test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	EST-E001	LISAI	June 13,21	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	EST-E002	LISAI	June 13,21	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	EST-E078	LISAI	June 13,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

For radiated emission test(9 kHz-30MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,21	1 Year
Active Loop Antenna	SCHWARZB ECK	FMZB 1519B	EST-E054	LISAI	June 13,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
9kHz-30MHz Cable	N/A	EST-001	N/A	N/A	N/A	N/A

For radiated emissions test (30-1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,21	1 Year
Bilog Antenna	Teseq	CBL 6111D	EST-E034	LISAI	June 13,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
30-1000MHz Cable	N/A	EST-002	N/A	N/A	N/A	N/A

For radiated emission test(Above 1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA9120D	EST-E031	LISAI	June 13,21	1 Year
Signal Amplifier	SCHWARZB ECK	BBV9718	EST-E032	LISAI	June 13,21	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	EST-E069	LISAI	July 19,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
Above 1GHz Cable	N/A	EST-003	N/A	N/A	N/A	N/A

For connect EUT antenna terminal test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Spectrum Analyzer	Rohde & Schwarz	FSV40	EST-E069	LISAI	July 19,21	1 Year

3. MAXIMUM PEAK OUTPUT POWER

3.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

3.2. Test Setup



3.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	3MHz
VBW	3MHz
Span	7.5MHz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


3.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 3.3.
- Set the EUT transmit continuously with maximum output power over fixed single hopping channel.
- Allow trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission.
- Repeat above procedures until all channels and test modes were measured.
- Record the results in the test report.


3.5. Test Result

Temperature	23.9℃	Relative Humidity	43%	Test Voltage		AC 120V/60Hz
Mode	Freq (MHz)	Peak Output Power		Limit		Result
		dBm	W	dBm	W	
GFSK	2402	8.05	0.0064	20.97	0.1250	PASS
	2441	7.82	0.0061	20.97	0.1250	PASS
	2480	7.81	0.0060	20.97	0.1250	PASS
8-DPSK	2402	11.09	0.0129	20.97	0.1250	PASS
	2441	10.67	0.0117	20.97	0.1250	PASS
	2480	10.50	0.0112	20.97	0.1250	PASS


GFSK 2402 MHz

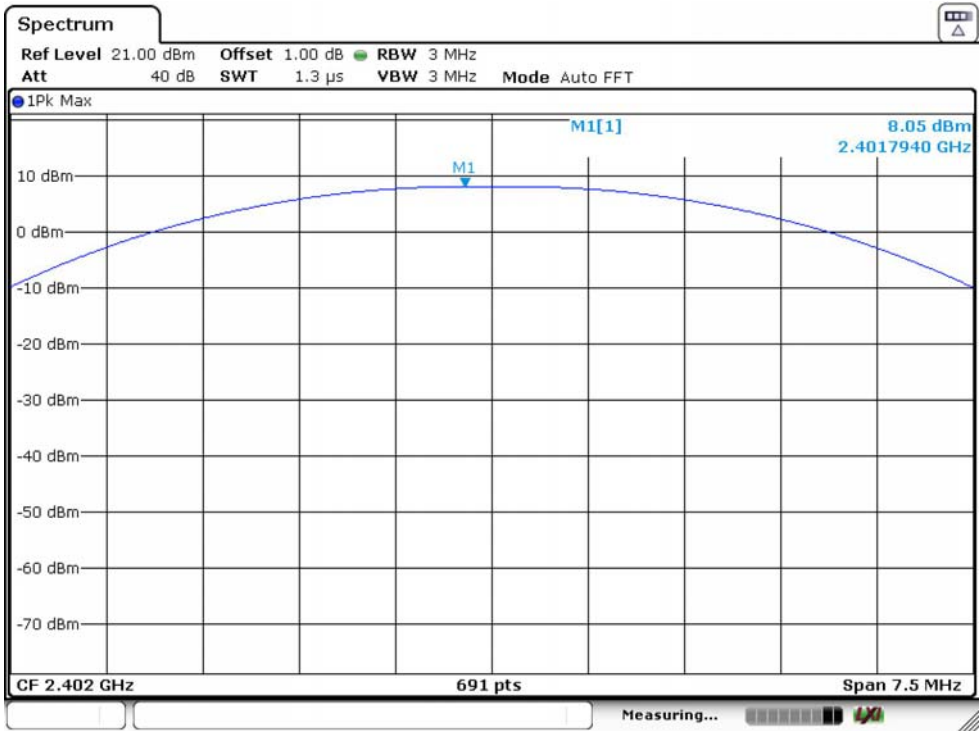

GFSK 2441 MHz

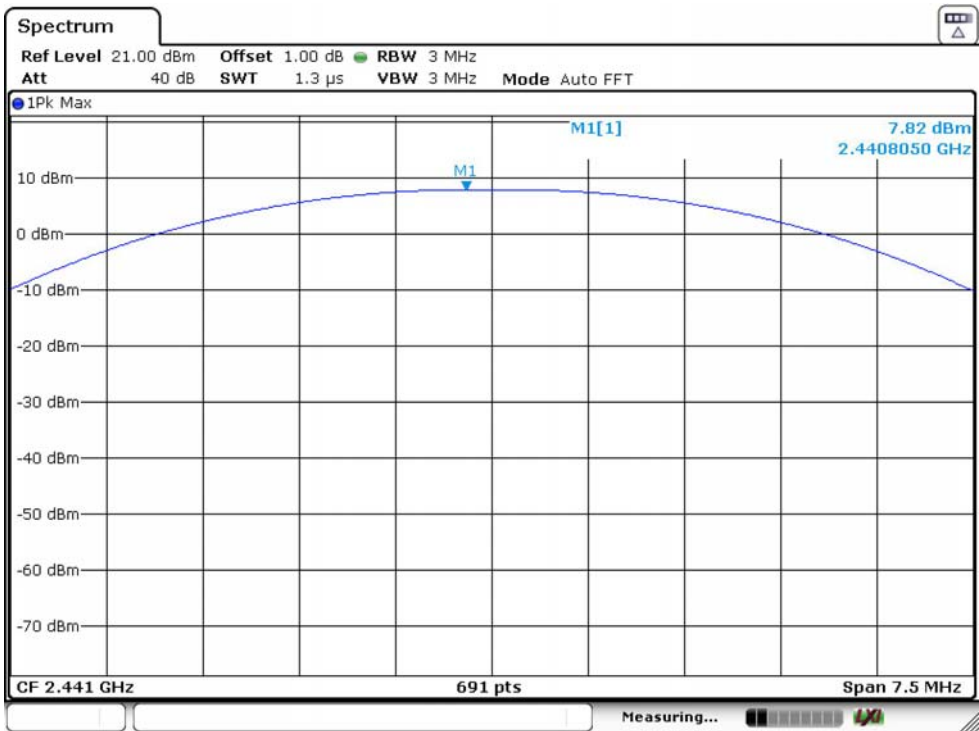

GFSK 2480 MHz

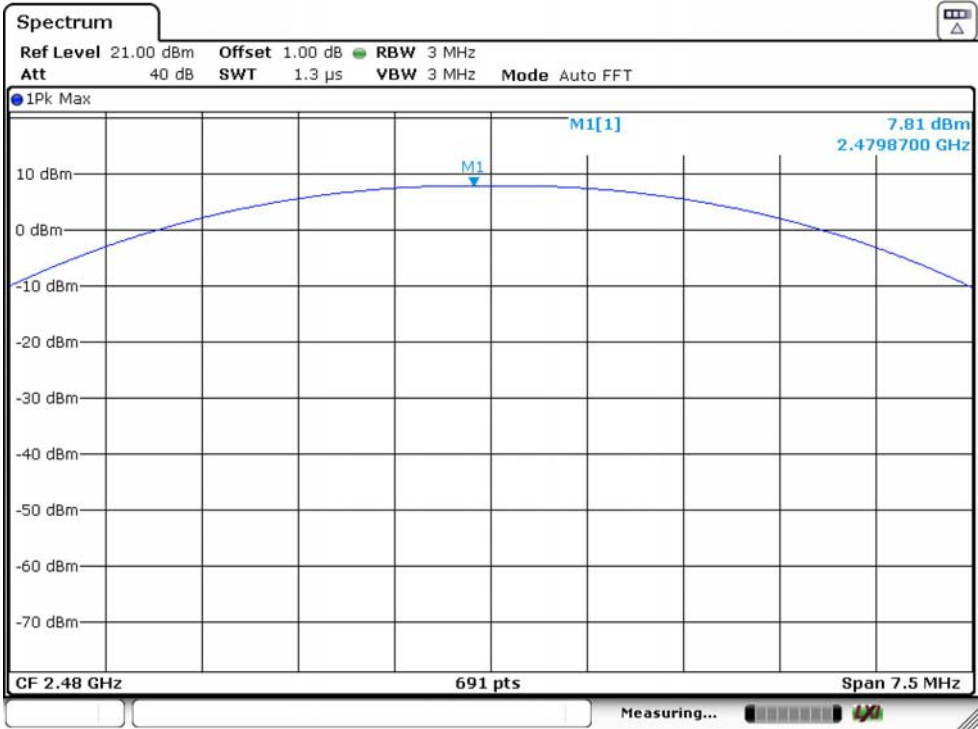

8-DPSK 2402 MHz



8-DPSK 2441 MHz



8-DPSK 2480 MHz




4. 20 DB BANDWIDTH

4.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

4.2. Test Setup

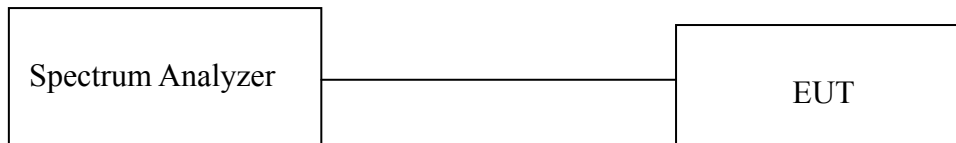

4.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	30KHz
VBW	100KHz
Span	3MHz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


4.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 4.3.
- Set the EUT transmit continuously with maximum output power over fixed single hopping channel.
- Allow trace to stabilize, use the ndB down function to measure 20dB Bandwidth.
- Repeat above procedures until all channels and test modes were measured.
- Record the results in the test report.


4.5. Test Result

Temperature		23.9℃	Relative Humidity		43%	
Test Voltage		AC 120V/60Hz				
Mode	Freq (MHz)	20dB Bandwidth (MHz)		Limit (MHz)	Result	
GFSK	2402	0.9551		/	PASS	
	2441	0.9551		/	PASS	
	2480	0.9551		/	PASS	
8-DPSK	2402	1.2981		/	PASS	
	2441	1.2634		/	PASS	
	2480	1.2981		/	PASS	


GFSK 2402MHz

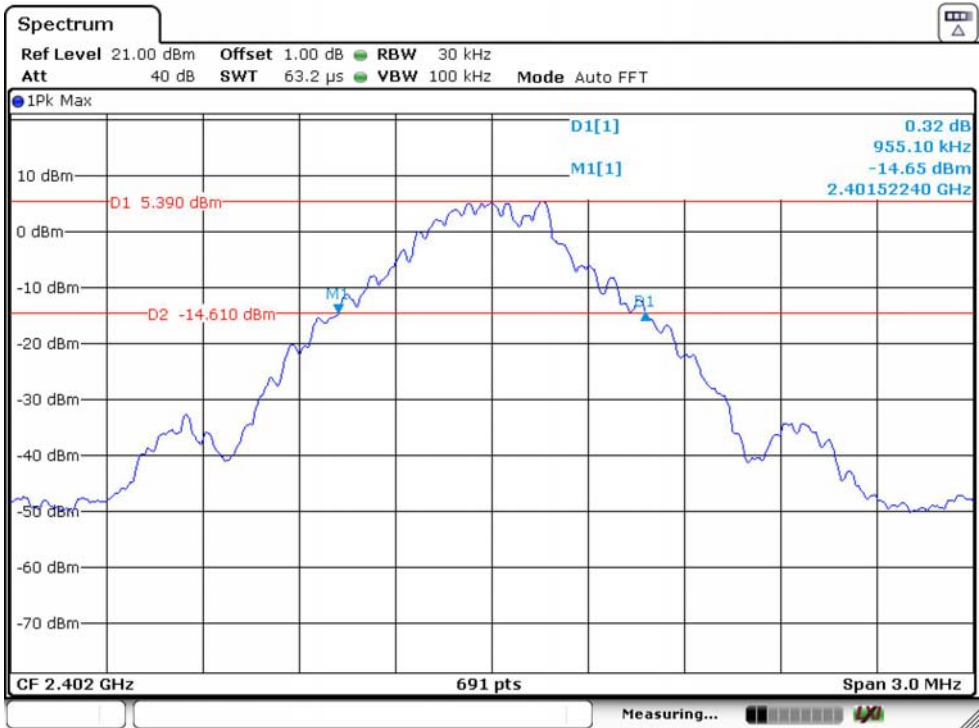


GFSK 2441MHz

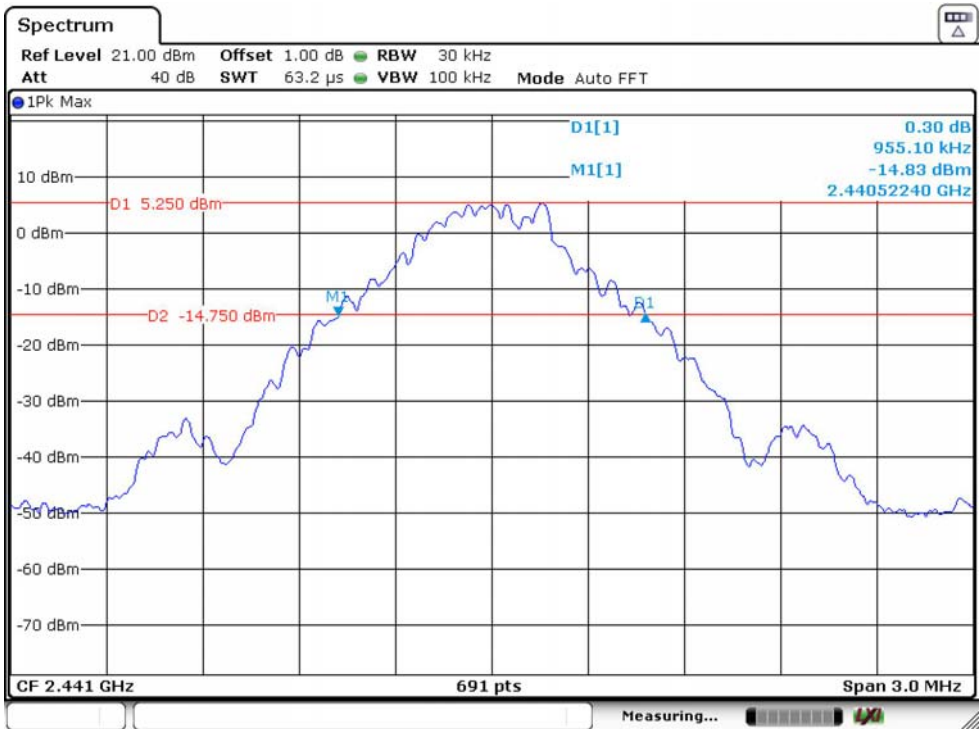


GFSK 2480MHz

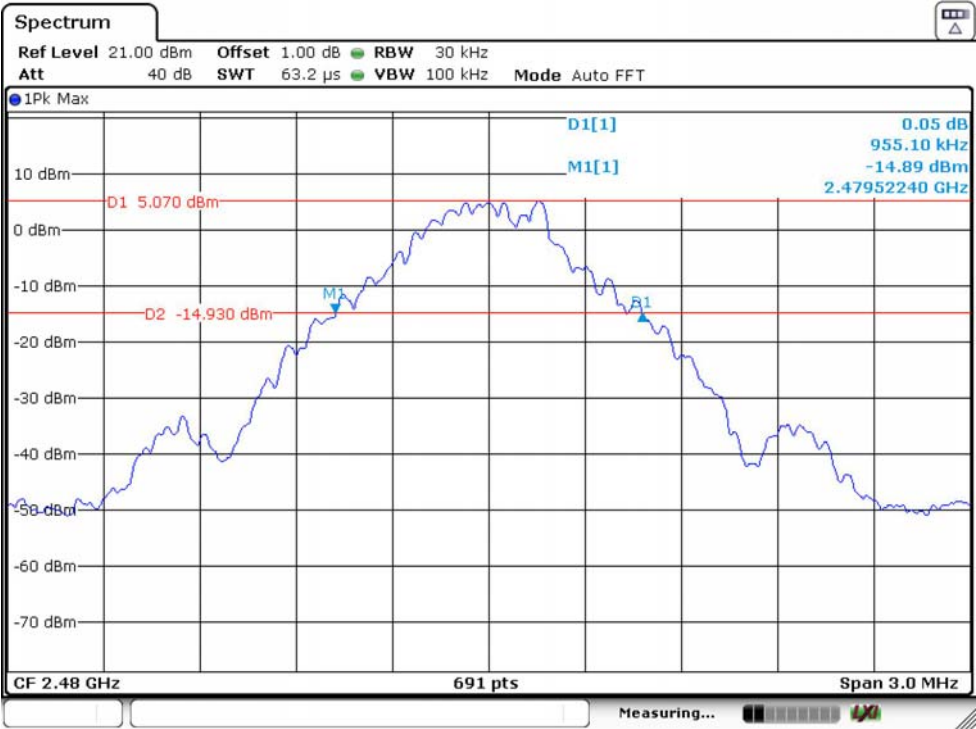


8-DPSK 2402MHz

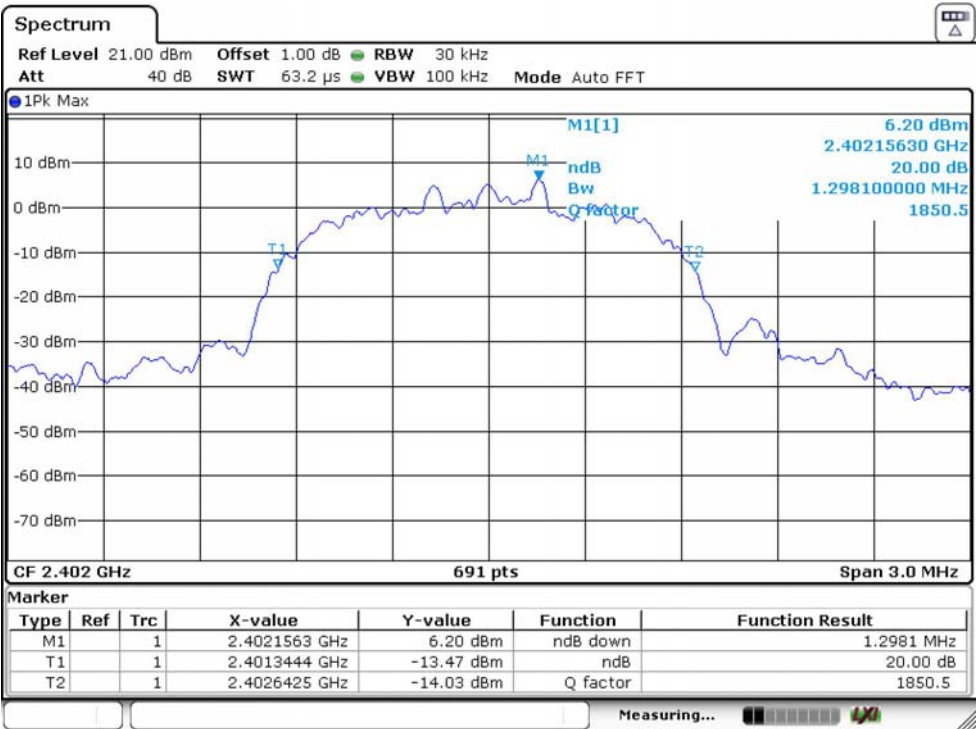

8-DPSK 2441MHz

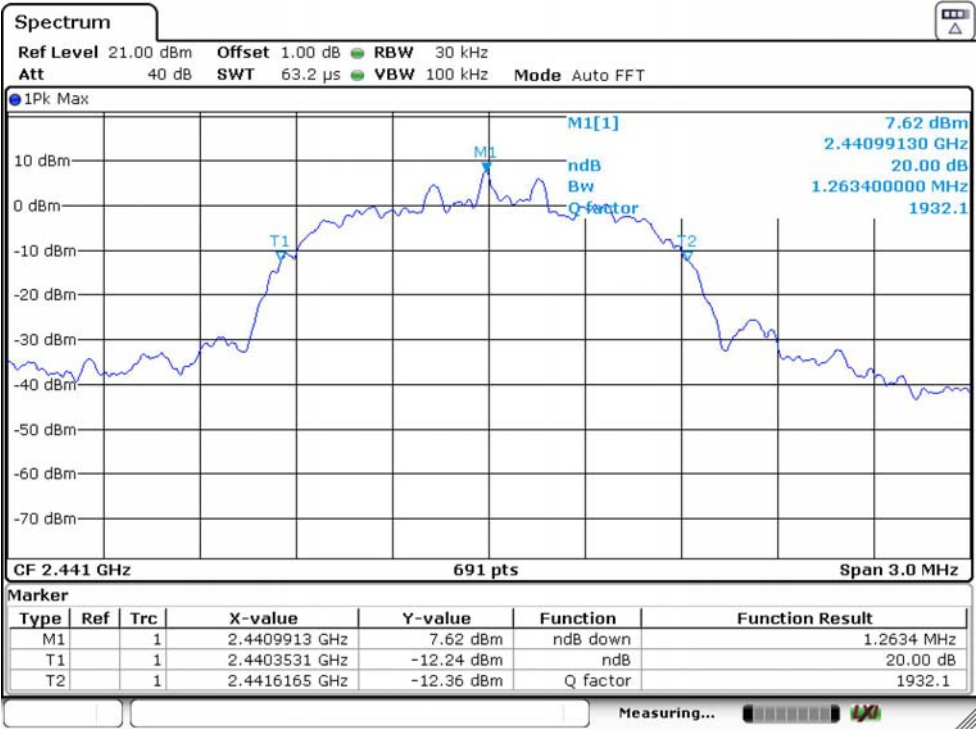

8-DPSK 2480MHz

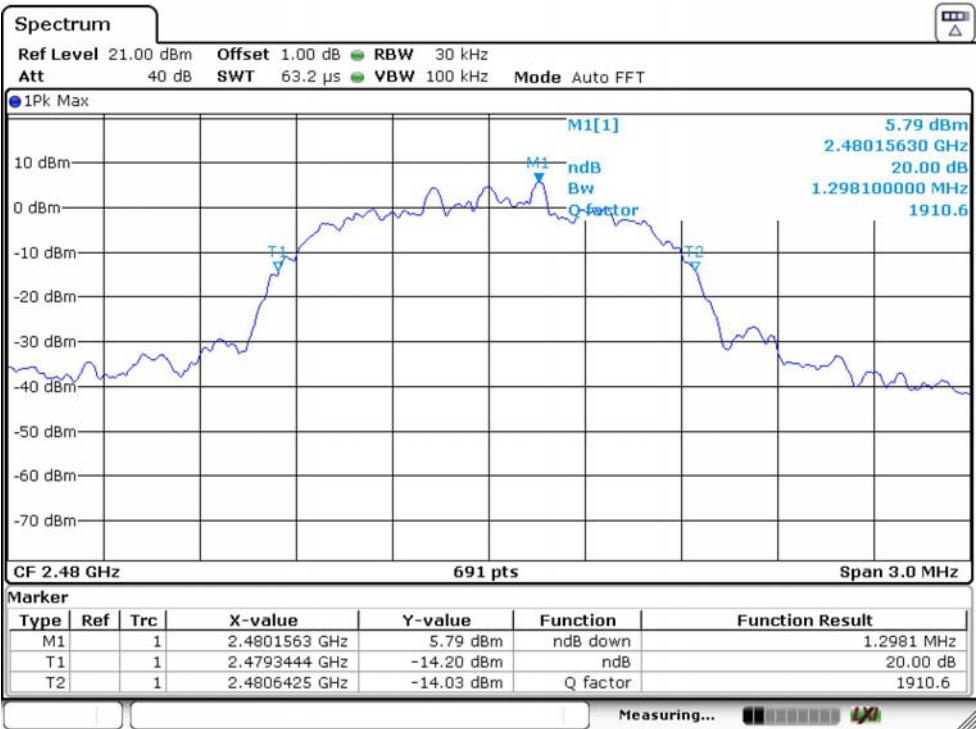


5. CARRIER FREQUENCY SEPARATION

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.2. Test Setup

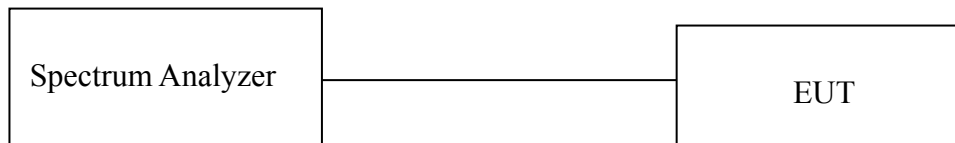

5.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	30KHz
VBW	100KHz
Span	3MHz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


5.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 5.3.
- Set the EUT transmit continuously with maximum output power in all channel hopping mode.
- Allow trace to stabilize, use the marker-delta function to measure channel separation between two adjacent channels.
- Repeat above procedures until all channels and test modes were measured.
- Record the results in the test report.


5.5. Test Result

Temperature	23.9℃	Relative Humidity	43%	Test Voltage	AC 120V/60Hz
Mode	Channel	Channel Separation (MHz)	2/3 of 20dB Bandwidth Limit (MHz)		Result
GFSK	Low CH	0.9986	0.6367		PASS
	Mid CH	0.9986	0.6367		PASS
	High CH	0.9986	0.6367		PASS
8-DPSK	Low CH	1.0029	0.8654		PASS
	Mid CH	1.0029	0.8423		PASS
	High CH	1.0029	0.8654		PASS


GFSK Low Channel

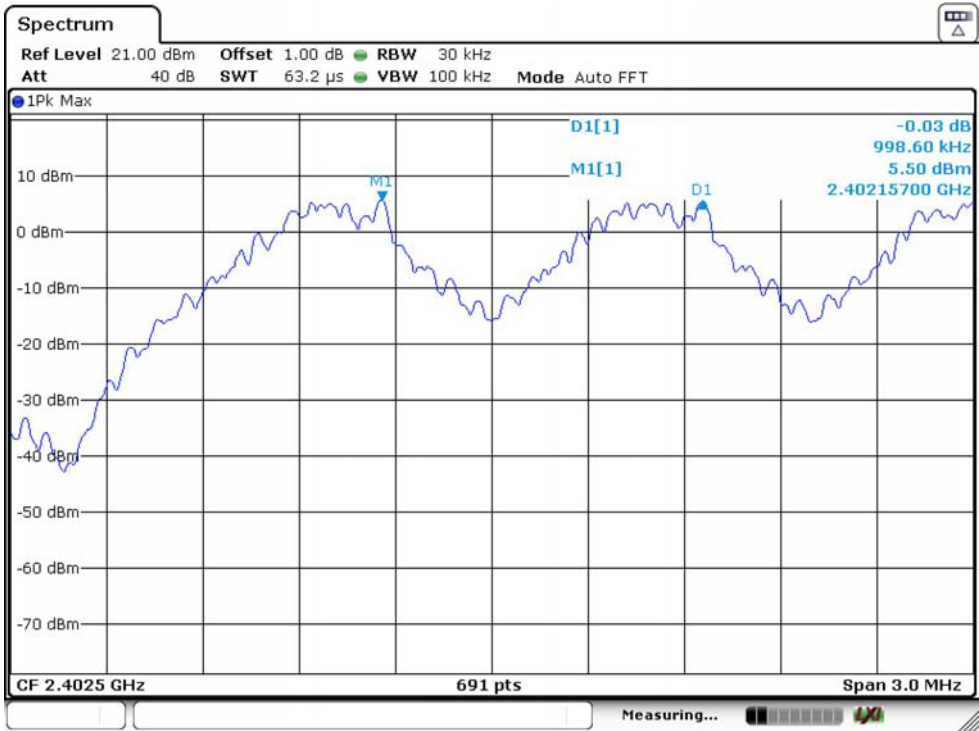


GFSK Mid Channel

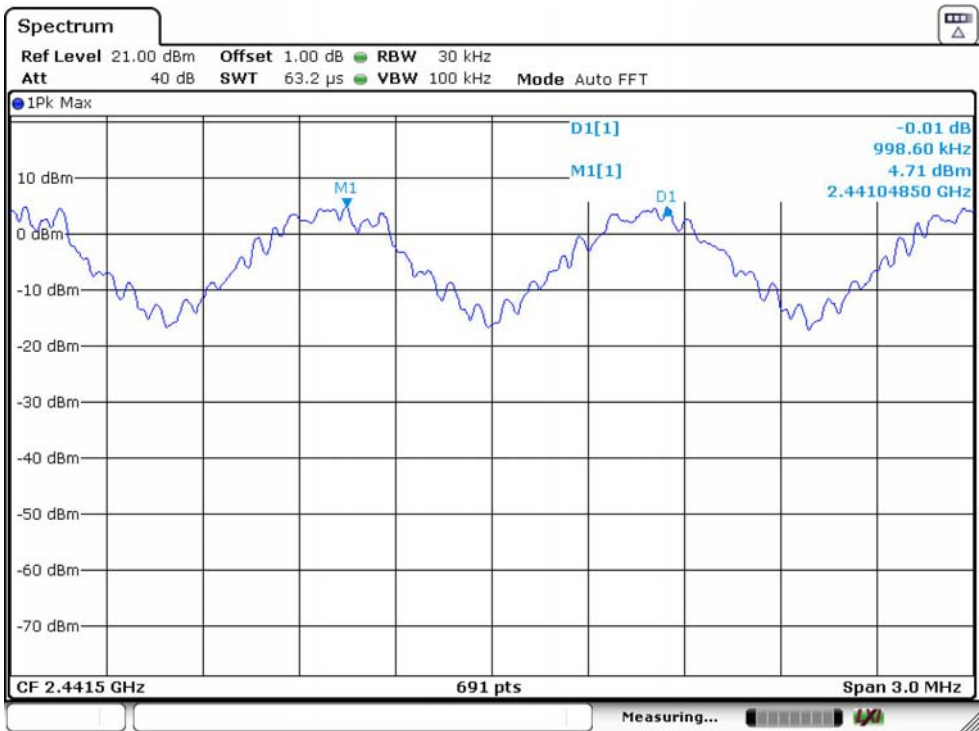


GFSK High Channel

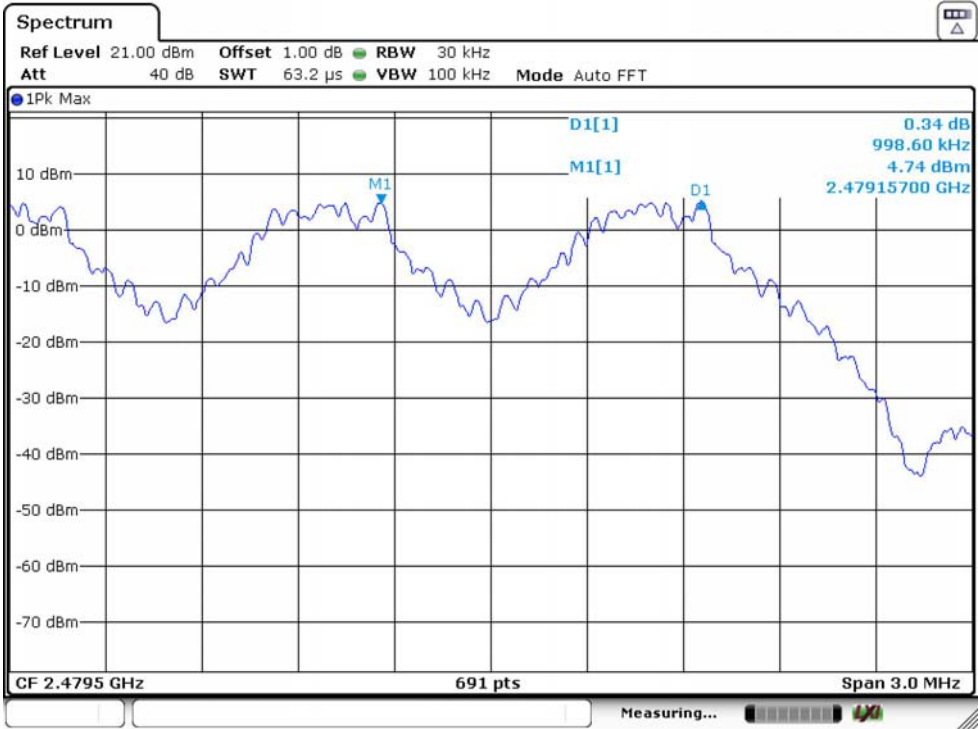


8-DPSK Low Channel

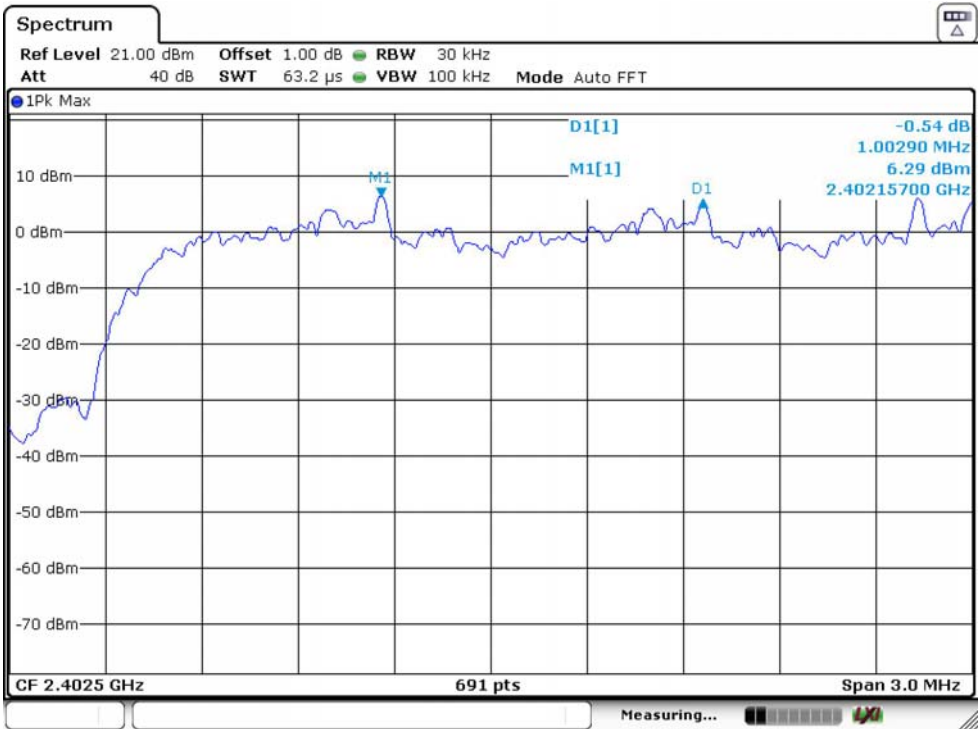

8-DPSK Mid Channel

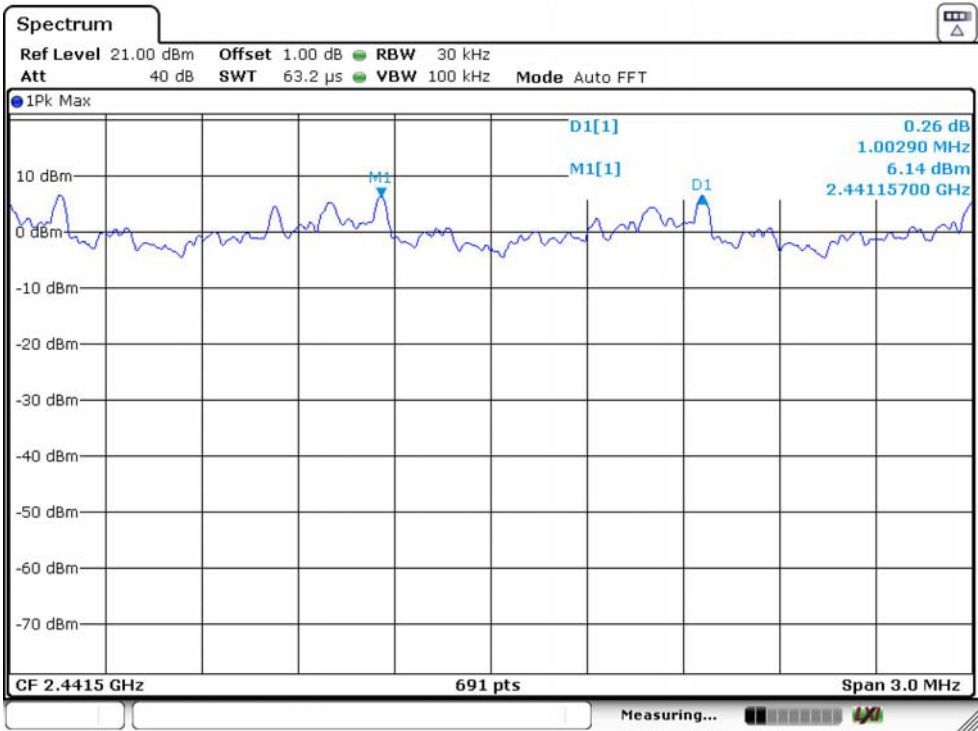

8-DPSK High Channel

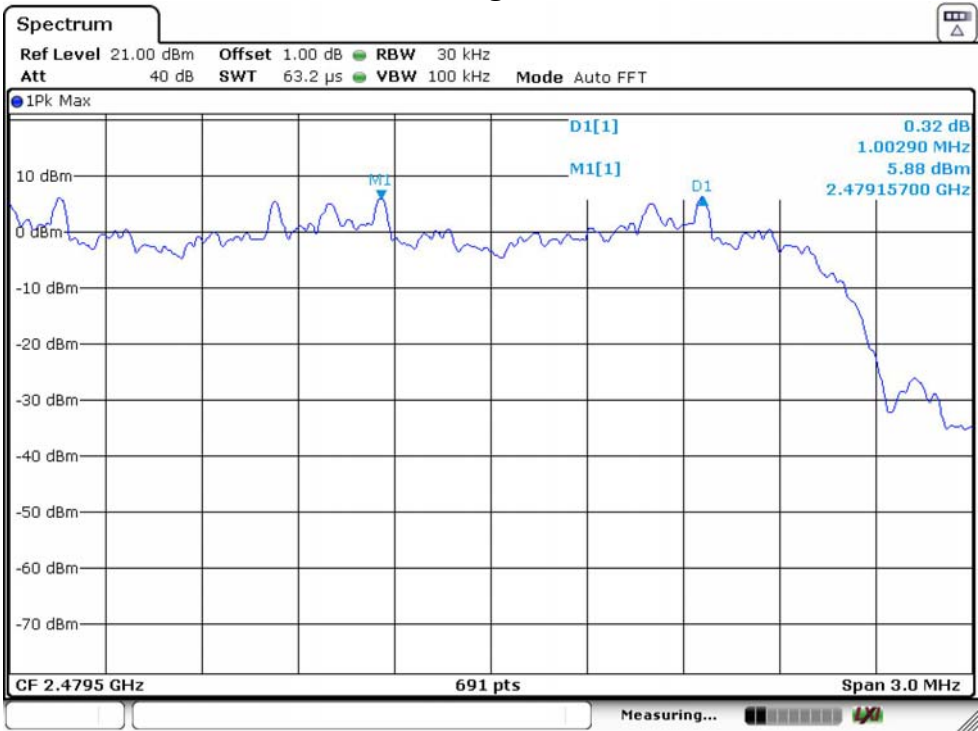


6. NUMBER OF HOPPING CHANNEL

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

6.2. Test Setup

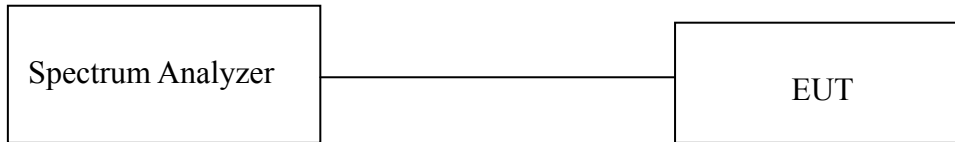

6.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	300KHz
VBW	300KHz
Start frequency	2400MHz
Stop frequency	2483.5MHz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


6.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 6.3.
- Set the EUT transmit continuously with maximum output power in all channel hopping mode.
- Allow trace to stabilize, use the marker-peak function to mark the first and last frequency hopping channel.
- Repeat above procedures until all test modes were measured.
- Record the results in the test report.


6.5. Test Result

Temperature	23.9℃	Relative Humidity	43%	Test Voltage	AC 120V/60Hz
Mode	Number of Hopping Channel			Limit	Result
GFSK	79			≥ 15	PASS
8-DPSK	79			≥ 15	PASS

GFSK Hopping On

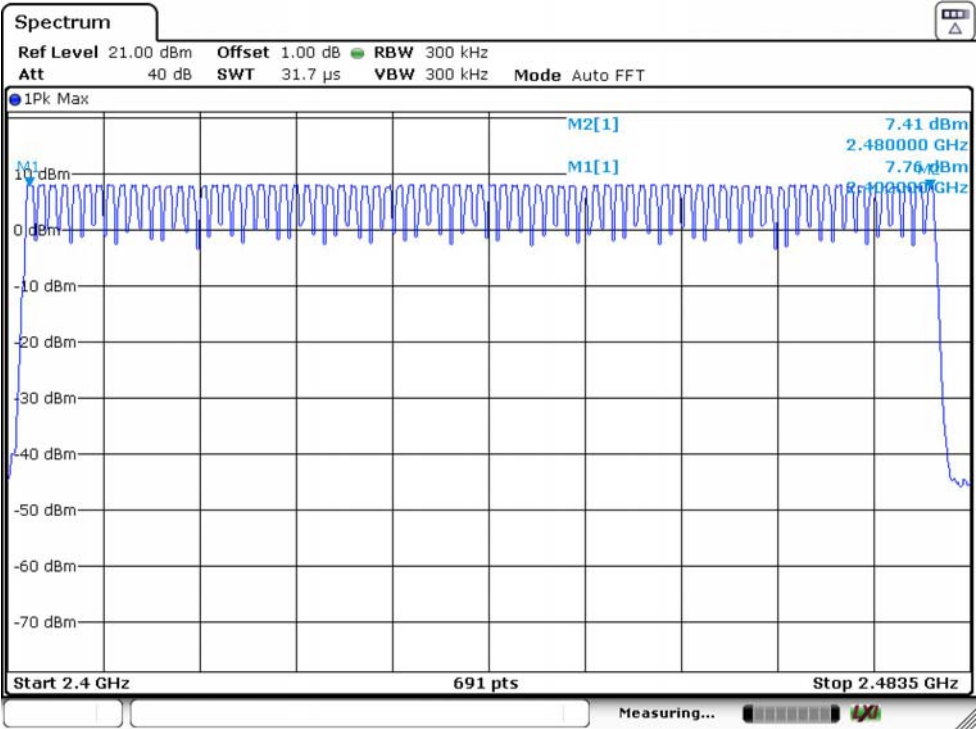

8-DPSK Hopping On

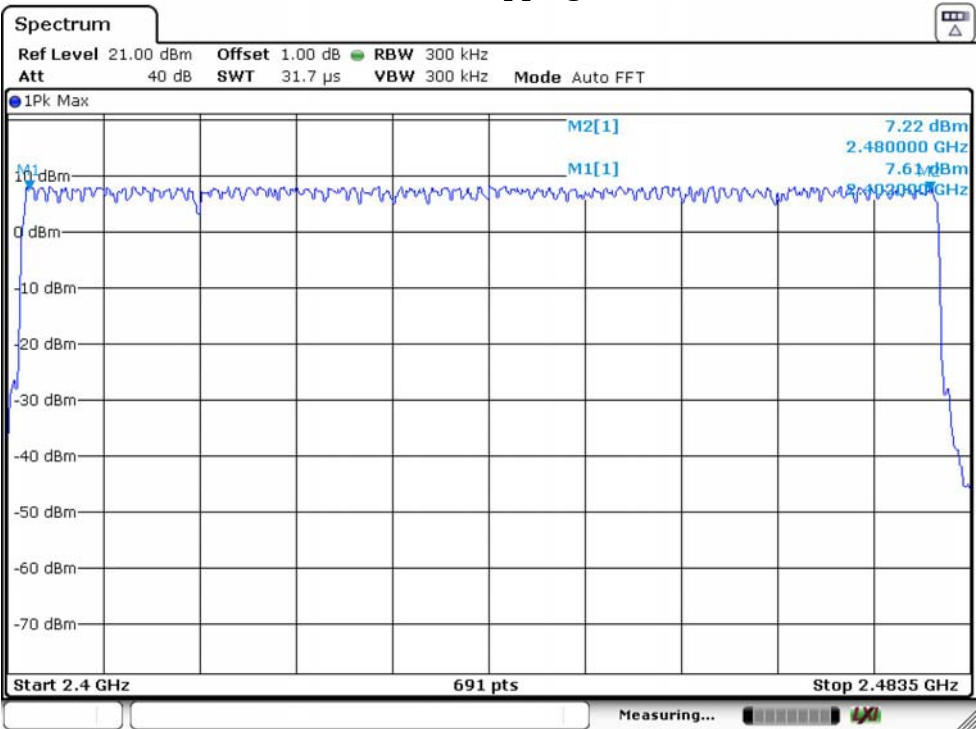

7. DWELL TIME

7.1. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

7.2. Test Setup



7.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	1MHz
VBW	1MHz
Span	Zero
Detector	Peak
Sweep Time	2.5ms(DH1)/10ms(DH3)/20ms(DH5)
Sweep Mode	Single Sweep


7.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 7.3.
- Set the EUT transmit continuously with maximum output power in all channel hopping mode.
- Allow trace to stabilize, use the marker-delta function to measure single pulse duration.
- Repeat above procedures until all test modes were measured.
- Record the results in the test report.


7.5. Test Result

Temperature	23.9℃	Relative Humidity		43%	Test Voltage	AC 120V/60Hz
Mode	Freq (MHz)	Hops in Observation Period(hops)	Pulse Duration (ms)	Dwell time (ms)	Limit	Result
GFSK DH1	2441	320	0.3949	126.38	<400ms	PASS
GFSK DH3	2441	160	1.6812	268.99	<400ms	PASS
GFSK DH5	2441	106.67	2.9565	315.36	<400ms	PASS
8-DPSK 3DH1	2441	320	0.4058	129.86	<400ms	PASS
8-DPSK 3DH3	2441	160	1.6812	268.99	<400ms	PASS
8-DPSK 3DH5	2441	106.67	2.9565	315.36	<400ms	PASS
1. DH1 Packet permit maximum 1600 hops/s with 2 timeslot in 79 channels (1 timeslot TX, 1 timeslot RX), So the hops in Observation Period($0.4s \times 79 \text{ channel}$)=$(1600/79/2)\text{hops/s} \times 0.4s \times 79=320 \text{ hops}$. 2. DH3 Packet permit maximum 1600 hops/s with 4 timeslot in 79 channels (3 timeslot TX, 1 timeslot RX), So the hops in Observation Period($0.4s \times 79 \text{ channel}$)=$(1600/79/4)\text{hops/s} \times 0.4s \times 79=160 \text{ hops}$. 3. DH5 Packet permit maximum 1600 hops/s with 6 timeslot in 79 channels (5 timeslot TX, 1 timeslot RX), So the hops in Observation Period($0.4s \times 79 \text{ channel}$)=$(1600/79/6)\text{hops/s} \times 0.4s \times 79=106.67 \text{ hops}$. 4. Dwell Time= Hops in Observation Period $\times$ Pulse Duration.						


GFSK DH1

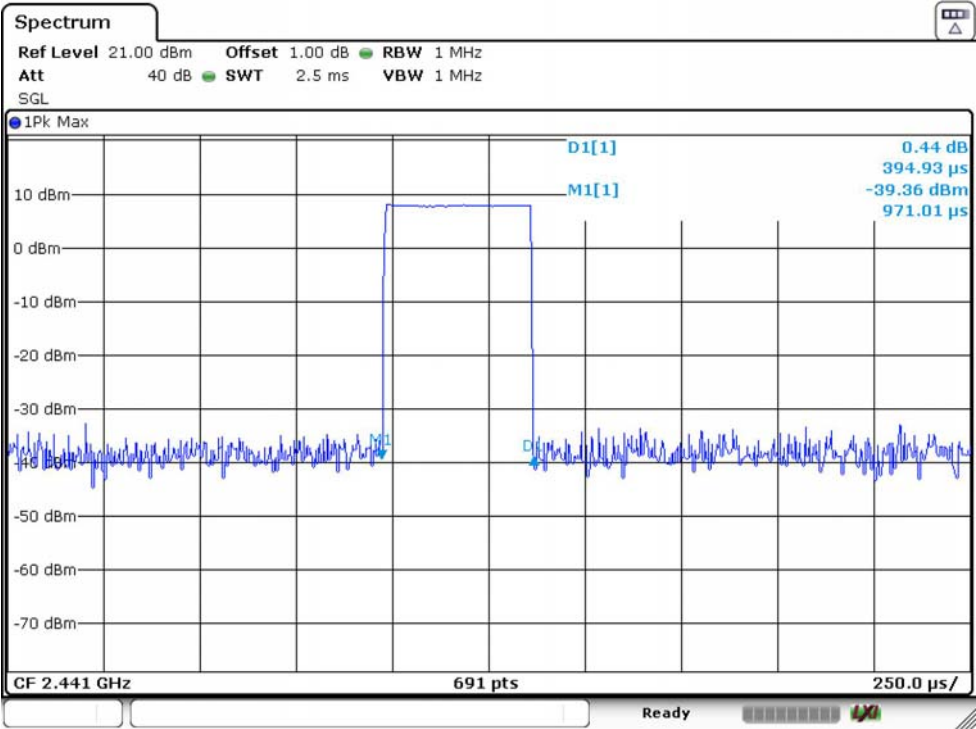


GFSK DH3

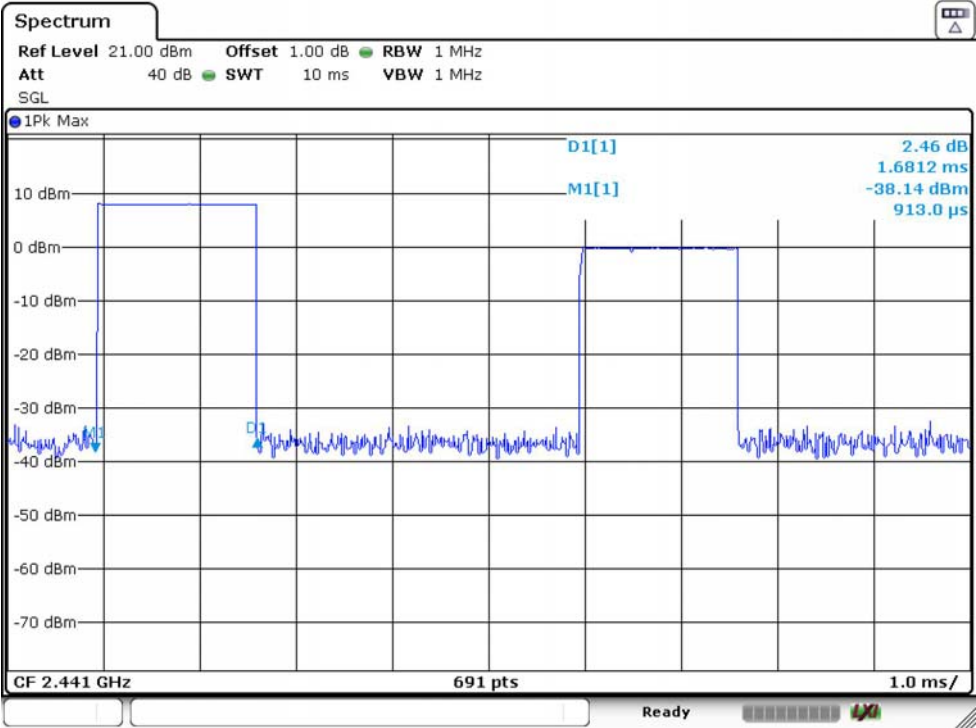


GFSK DH5

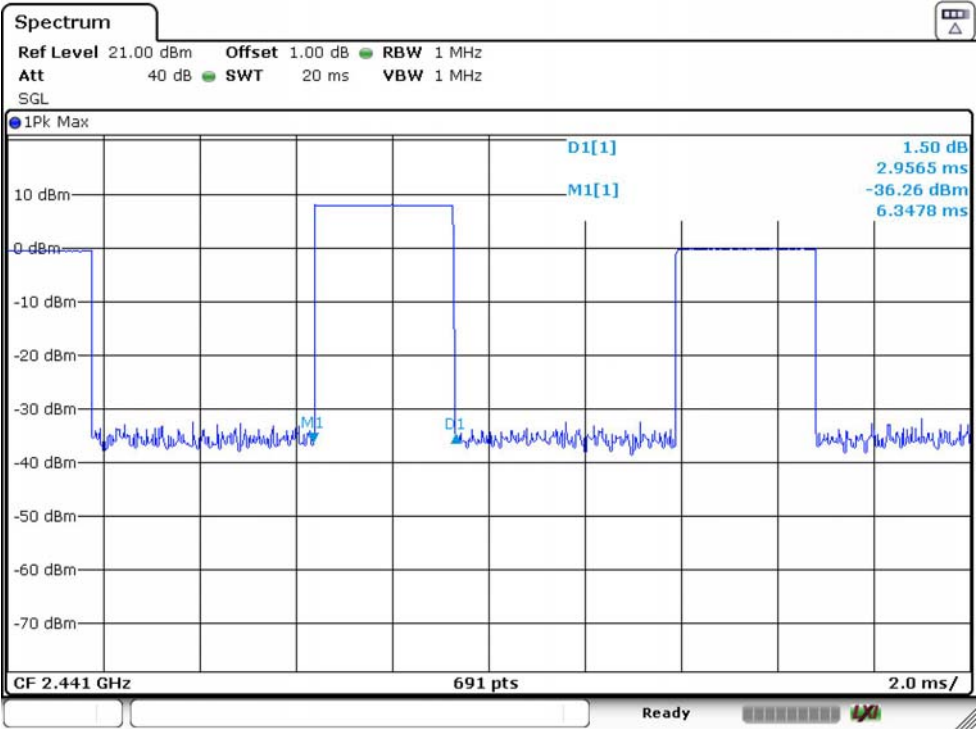


8-DPSK 3DH1

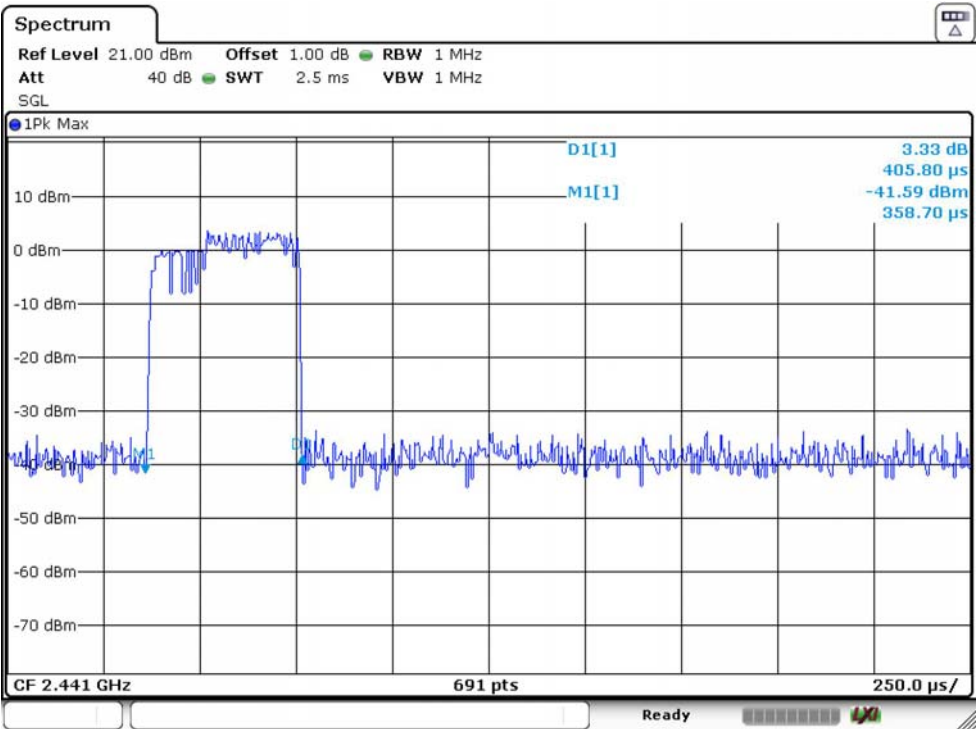

8-DPSK 3DH3

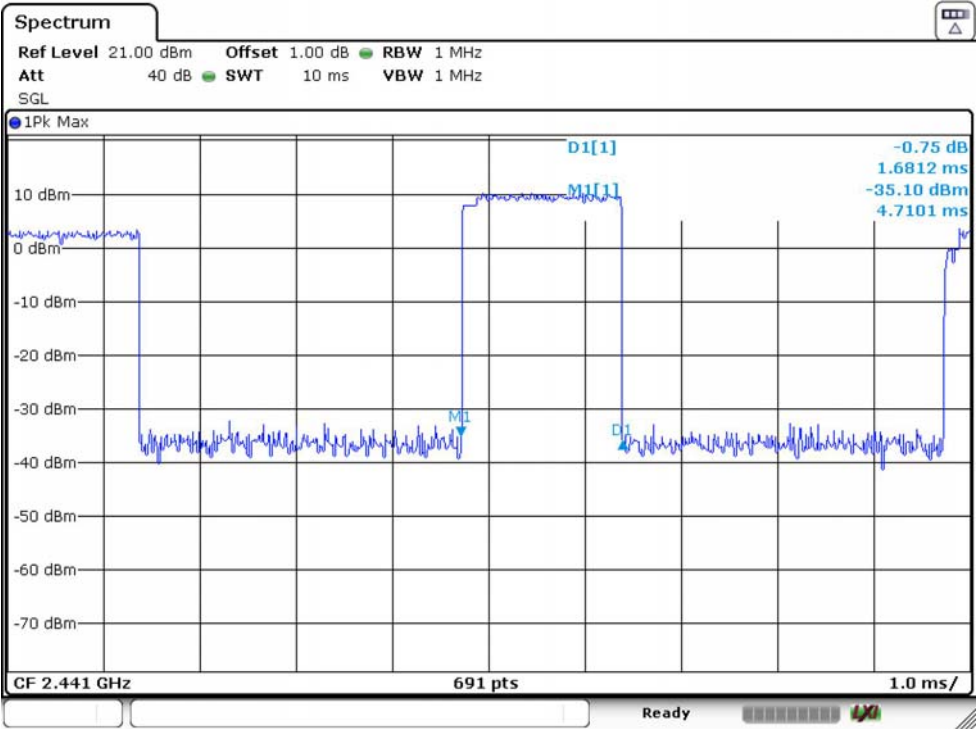

8-DPSK 3DH5

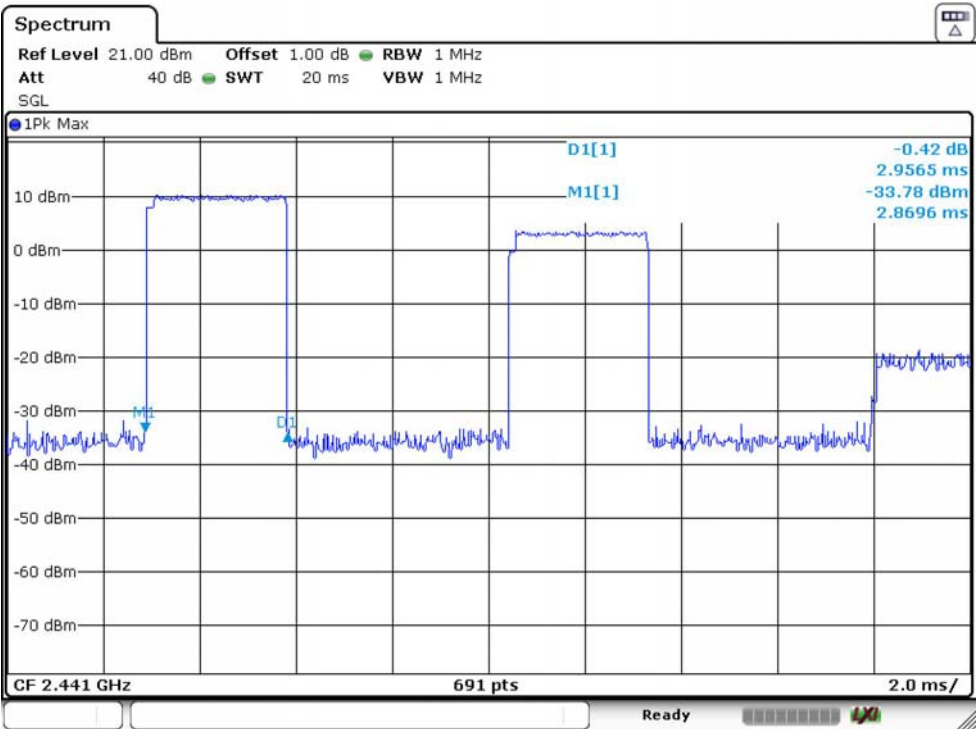


8. CONDUCTED BAND EDGE

8.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.2. Test Setup

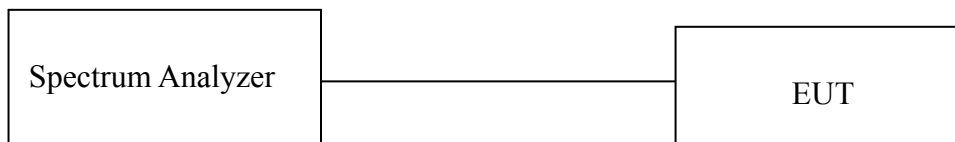

8.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	100MHz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


8.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 8.3.
- Set the EUT transmit continuously with maximum output power over fixed single hopping channel.
- Allow trace to stabilize, use the marker function to mark the highest emission level outside the authorized band.
- Repeat above procedures until all channels and test modes were measured(including frequency hopping off and frequency hopping on).
- Record the results in the test report.


8.5. Test Result

Temperature	23.9°C	Relative Humidity	43%	Test Voltage	AC 120V/60Hz
Result	PASS				


8-DPSK Low Channel Hopping OFF

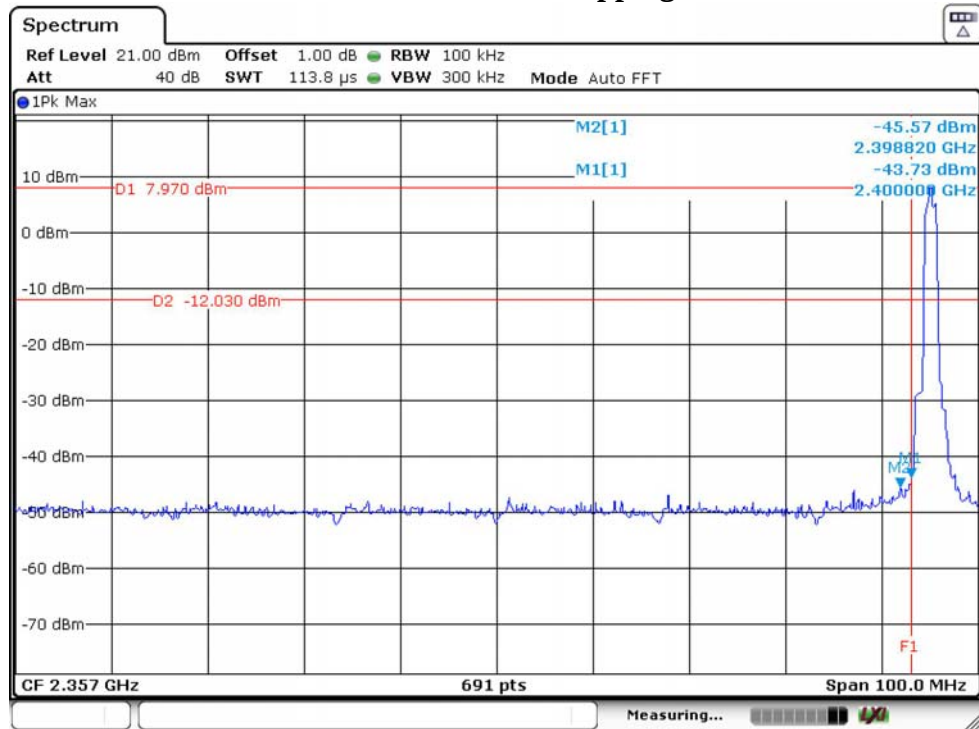


8-DPSK High Channel Hopping OFF

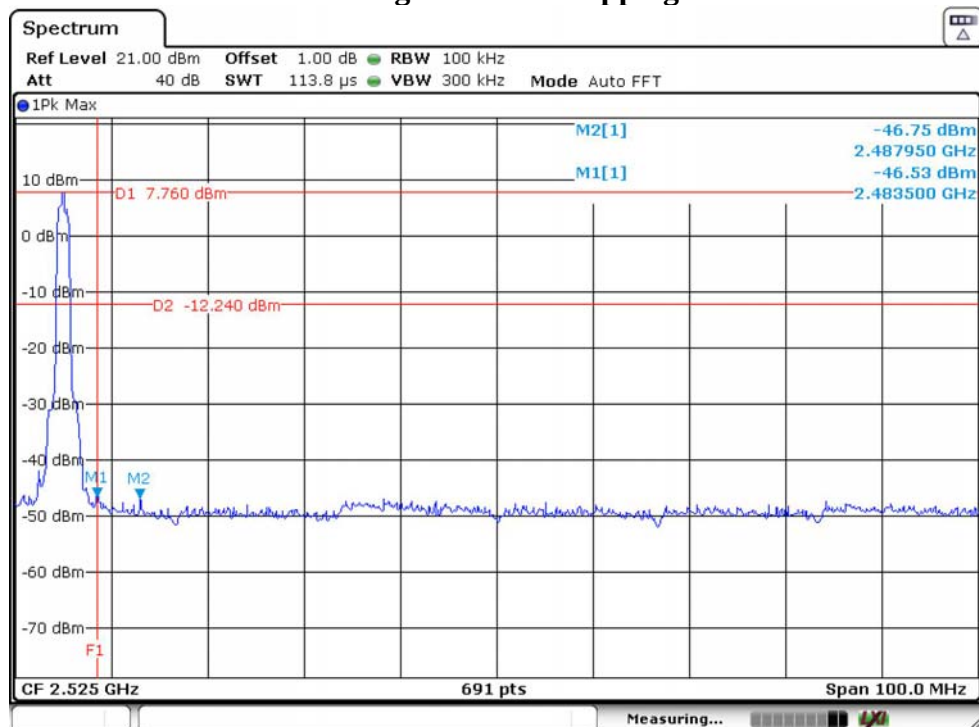

8-DPSK Low Channel Hopping ON

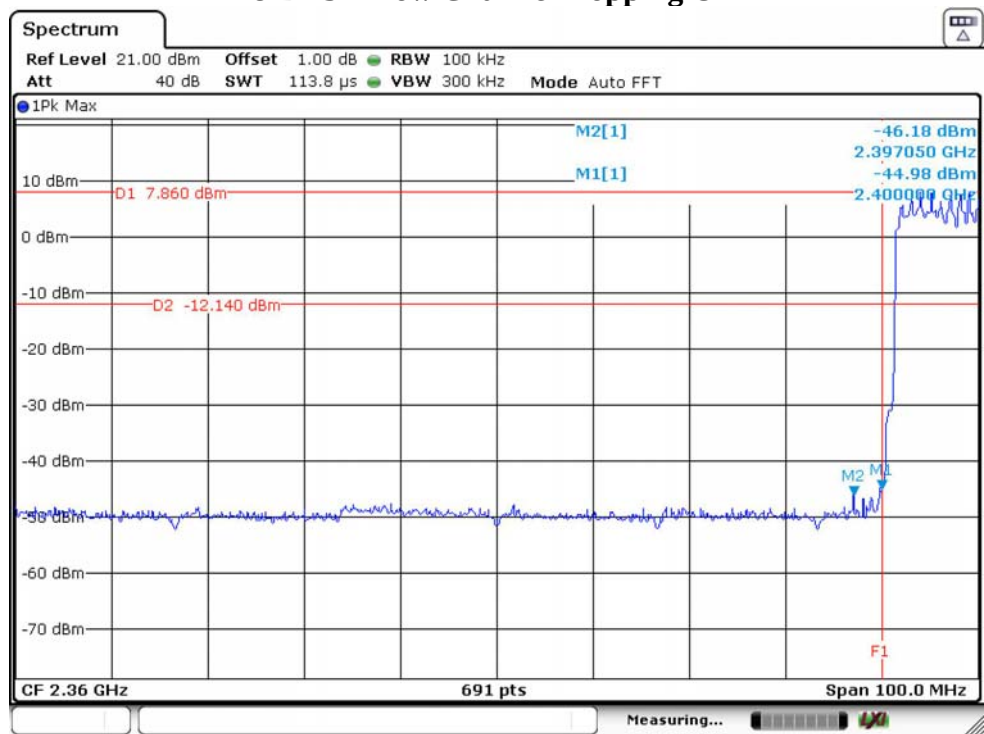

8-DPSK High Channel Hopping ON

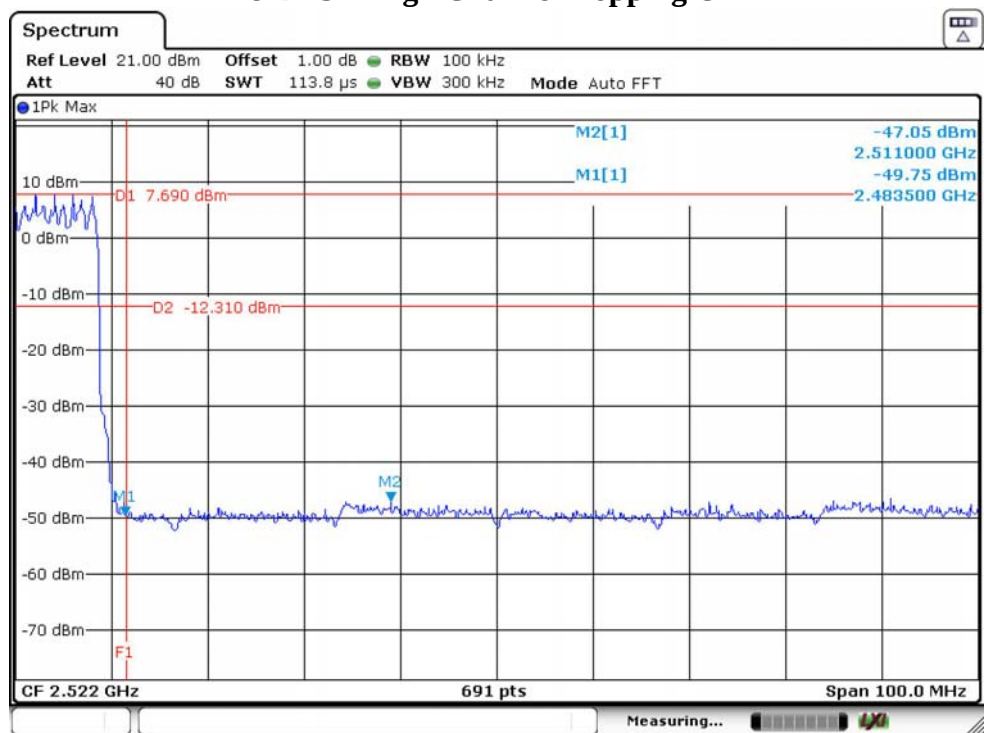

All modulations are all tested ,only worse case is reported

9. CONDUCTED SPURIOUS EMISSIONS

9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

9.2. Test Setup



9.3. Spectrum Analyzer Setting



Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	25GHz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

9.4. Test Procedure


- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 9.3.
- Set the EUT transmit continuously with maximum output power over fixed single hopping channel.
- Allow trace to stabilize, use the marker function to mark the highest emission level outside the authorized band.
- Repeat above procedures until all channels and test modes were measured.
- Record the results in the test report.

9.5. Test Result

Temperature	23.9℃	Relative Humidity	43%	Test Voltage	AC 120V/60Hz
Result	PASS				

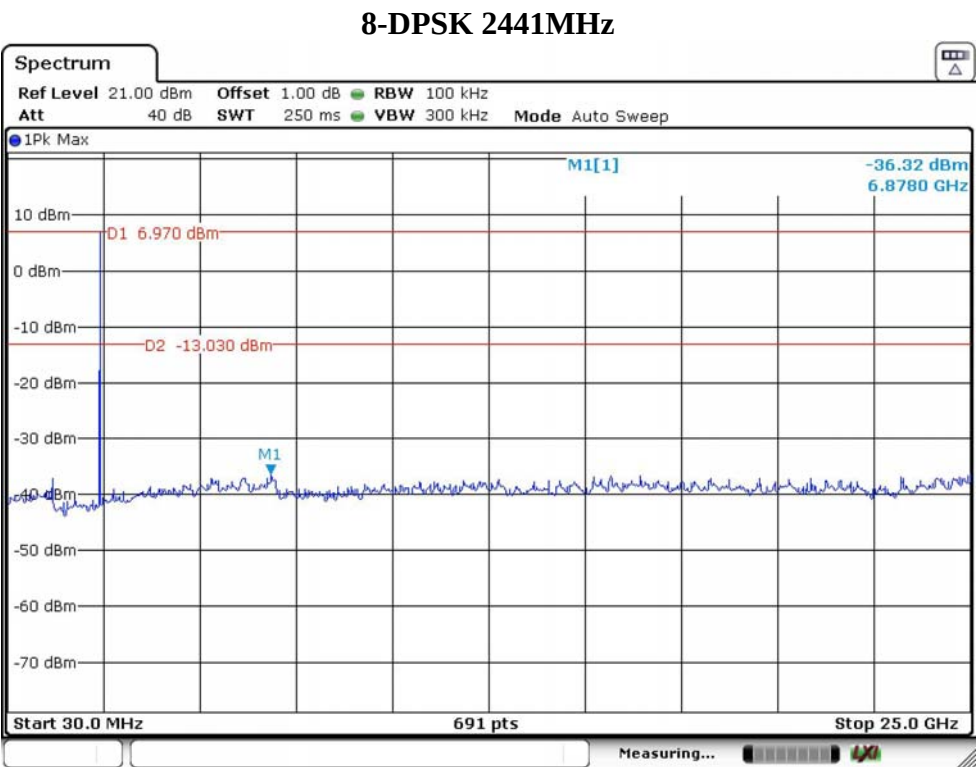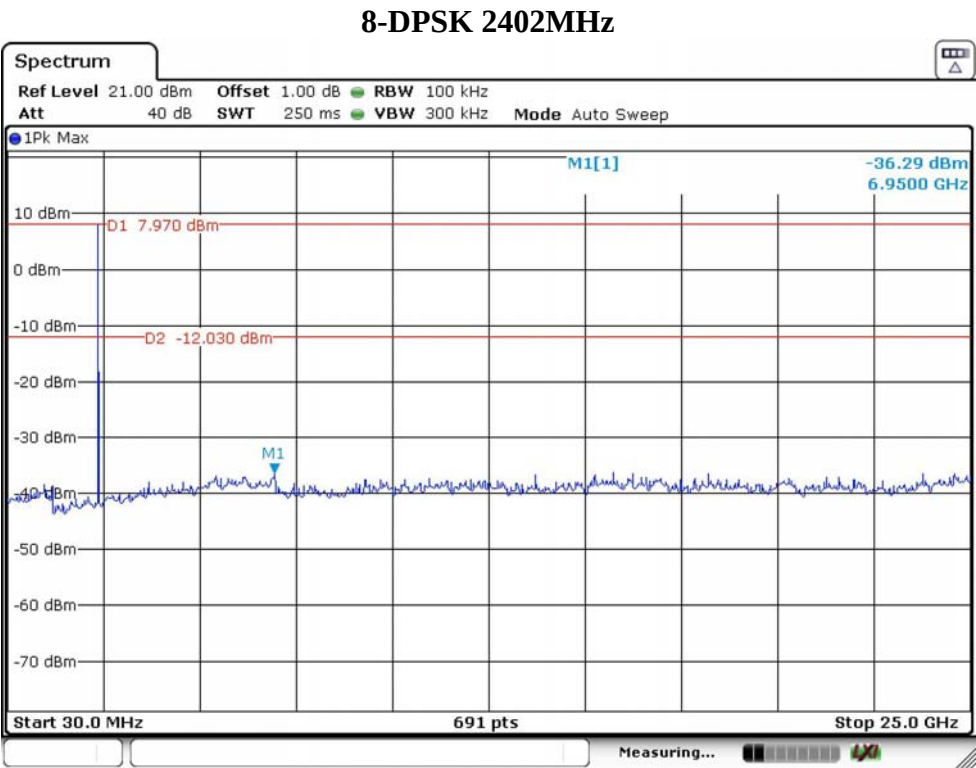

8-DPSK 2480MHz

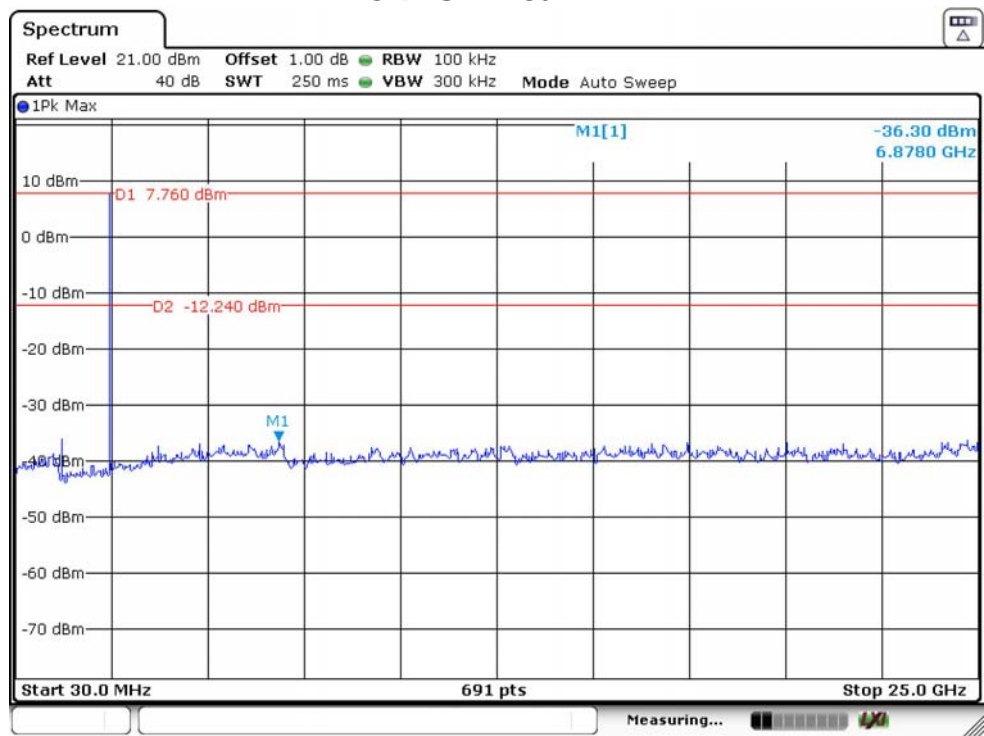

All modulations are all tested ,only worse case is reported