




RADIO TEST REPORT

FCC ID : ZQ6-AP6611S
Equipment : Wi-Fi/Bluetooth Module
Brand Name : AMPAK Technology Inc
Model Name : AP6611S, AP12611_M2, WNFS-163AXI(BT)
Applicant : AMPAK Technology Inc.
3F, No. 1, Jen Ai Road, Hsinchu Industrial
Park, Hsinchu City 30352, Taiwan (R.O.C.)
Manufacturer : BILLIONTON SYSTEMS INC.
No. 21, Sui-Lih Rd., Hsin-Chu City 300, Taiwan (R.O.C.)
Standard : 47 CFR FCC Part 15.247

The product was received on Feb. 27, 2024, and testing was started from Mar. 01, 2024 and completed on Apr. 15, 2024. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

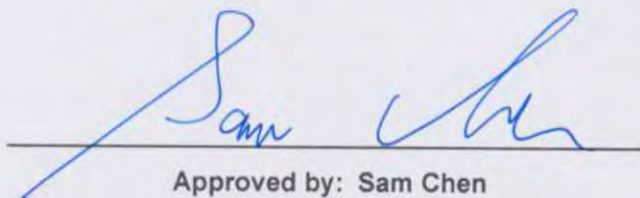
Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	8
1.3 Testing Location Information	8
1.4 Measurement Uncertainty	8
2 Test Configuration of EUT.....	9
2.1 Test Channel Mode	9
2.2 The Worst Case Measurement Configuration.....	9
2.3 EUT Operation during Test	10
2.4 Accessories	10
2.5 Support Equipment.....	11
2.6 Test Setup Diagram	12
3 Transmitter Test Result	15
3.1 AC Power-line Conducted Emissions	15
3.2 DTS Bandwidth.....	17
3.3 Maximum Conducted Output Power	18
3.4 Power Spectral Density	20
3.5 Emissions in Non-restricted Frequency Bands	22
3.6 Emissions in Restricted Frequency Bands.....	23
4 Test Equipment and Calibration Data	27
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of DTS Bandwidth	
Appendix C. Test Results of Maximum Conducted Output Power	
Appendix D. Test Results of Power Spectral Density	
Appendix E. Test Results of Emissions in Non-restricted Frequency Bands	
Appendix F. Test Results of Emissions in Restricted Frequency Bands	
Appendix G. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A10_6 Ver1.3



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen**Report Producer: Sophia Shiung**



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number
2400-2483.5	LE	2402-2480	0-39 [40]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	BT-LE(1Mbps)	1.0	1TX
2.4-2.4835GHz	BT-LE(2Mbps)	2.0	1TX

Note:

- ♦ Bluetooth LE uses a GFSK modulation.
- ♦ BWch is the nominal channel bandwidth.

**1.1.2 Antenna Information**

Ant.	Port	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	1	PULSE ELECTRONICS PTE LTD	TZ2412W	Dipole	Reversed-SMA	Note 1

Note 1:

Ant.	Gain (dBi)			
	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz	Bluetooth
1	3.68	4.65	4.62	3.68

Note 2: The above antenna gain doesn't include cable loss.

Cable Loss of Antenna:

Ant.	Cable Loss (dB)			
	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz	Bluetooth
1	0.4	0.7	0.8	0.4

Note 3: For conducted measurement, the measurement port is from the reversed-SMA connector.

Note 4: The above information was declared by manufacturer.

Note 5: **For 2.4GHz function:****For IEEE 802.11 b/g/n/VHT/ax (1TX/1RX):**

Only Port 1 can be used as transmitting/receiving antenna.

For 5GHz function:**For IEEE 802.11a/n/ac/ax (1TX/1RX):**

Only Port 1 can be used as transmitting/receiving antenna.

For 6GHz function:**For IEEE 802.11ax (1TX/1RX):**

Only Port 1 can be used as transmitting/receiving antenna.

For Bluetooth function (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

**1.1.3 Mode Test Duty Cycle**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
BT-LE(1Mbps)	0.607	2.17	379.063u	3k
BT-LE(2Mbps)	0.312	5.06	195.313u	10k

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From host system			
Function	<input checked="" type="checkbox"/>	Point-to-multipoint	<input type="checkbox"/>	Point-to-point
Test Software Version	For Emissions in Restricted Frequency Bands < 1GHz: DOS [ver 6.1.7601] For other test items: BlueTool (ver 1.9.7.4)			
Support Mode	<input checked="" type="checkbox"/>	LE 1M PHY: 1 Mb/s		
	<input type="checkbox"/>	LE Coded PHY (S=2): 500 Kb/s		
	<input type="checkbox"/>	LE Coded PHY (S=8): 125 Kb/s		
	<input checked="" type="checkbox"/>	LE 2M PHY: 2 Mb/s		

Note: The above information was declared by manufacturer.

1.1.5 Table for Multiple Listing

Model Name	Description
AP6611S	All the models are identical, the different model names serve as marketing strategy.
AP12611_M2	
WNFS-163AXI(BT)	

Note 1: From the above models, model: AP6611S was selected as representative model for the test and its data was recorded in this report.

Note 2: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.247
- ♦ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 558074 D01 v05r02
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH01-CB	Mason Chan	21.9~23.5 / 64~67	Mar. 01, 2024~ Mar. 15, 2024
Radiated < 1GHz	03CH05-CB	Roy Mai	21.9~22.4 / 55~58	Mar. 02, 2024~ Apr. 12, 2024
Radiated > 1GHz	03CH04-CB	Roy Mai	22.7~23.8 / 56~59	Mar. 02, 2024~ Apr. 12, 2024
AC Conduction	CO01-CB	Allen Chung	22~23 / 52~53	Apr. 15, 2024

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.4 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.1 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.1 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	3.1 dB	Confidence levels of 95%
Output Power Measurement	0.8 dB	Confidence levels of 95%
Power Density Measurement	3.1 dB	Confidence levels of 95%
Bandwidth Measurement	2.2%	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode
BT-LE(1Mbps)
2402MHz
2440MHz
2480MHz
BT-LE(2Mbps)
2402MHz
2440MHz
2480MHz

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	EUT_Bluetooth
2	EUT_WLAN 2.4GHz
3	EUT_WLAN 5GHz
4	EUT_WLAN 6GHz
For operating, mode 1 is the worst case and it was recorded in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX
	The EUT was performed at X axis, Y axis and Z axis positions with each function at Radiated measurement > 1GH, and the worst cases were found at Z axis for WLAN 2.4GHz, 6GHz and Bluetooth, and X axis for WLAN 5GHz. Thus, the measurement will follow these same test configurations.
1	EUT in Z axis_Bluetooth
2	EUT in Z axis_WLAN 2.4GHz
3	EUT in X axis_WLAN 5GHz
4	EUT in Z axis_WLAN 6GHz
For operating, mode 2 is the worst case and it was recorded in this test report.	
Operating Mode > 1GHz	CTX
	The EUT was performed at X axis, Y axis and Z axis positions, and the worst case was found at Z axis. Thus, the measurement will follow this same test configuration.
1	EUT in Z axis

2.3 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

2.4 Accessories

N/A



2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	EUT Fixture 1	AMPAK Technology Inc	AP12281_M2_V01	N/A
B	BT Fixture	AMPAK Technology Inc	UART_V07	N/A
C	NB	ASUS	PU401L	N/A
D	Power Supply	MOTECH	LPS-305	N/A
E	Earphone	e-Power	GT-02	N/A
F	Mouse	Logitech	M-UAE96	N/A
G	EUT Fixture 2	AMPAK Technology Inc	AP12611_M2	N/A

For Radiated < 1GHz:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	EUT Fixture 1	AMPAK Technology Inc	AP12281_M2_V01	N/A
B	WIFI Fixture	AMPAK Technology Inc	A113D_EVB_V01	N/A
C	Power Supply	MOTECH	LPS-305	N/A
D	EUT Fixture 2	AMPAK Technology Inc	AP12611_M2	N/A

For Radiated > 1GHz:


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	EUT Fixture 1	AMPAK Technology Inc	AP12281_M2_V01	N/A
B	BT Fixture	AMPAK Technology Inc	UART_V07	N/A
C	Power Supply	MOTECH	LPS-305	N/A
D	EUT Fixture 2	AMPAK Technology Inc	AP12611_M2	N/A
E	PC	DELL	T3400	N/A

For RF Conducted:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PC	AMPAK Technology Inc	H81-PLUS	N/A
B	EUT Fixture 1	AMPAK Technology Inc	AP12281_M2_V01	N/A
C	BT Fixture	AMPAK Technology Inc	UART_V07	N/A
D	EUT Fixture 2	AMPAK Technology Inc	AP12611_M2	N/A


2.6 Test Setup Diagram

Test Setup Diagram – AC Line Conducted Emission Test

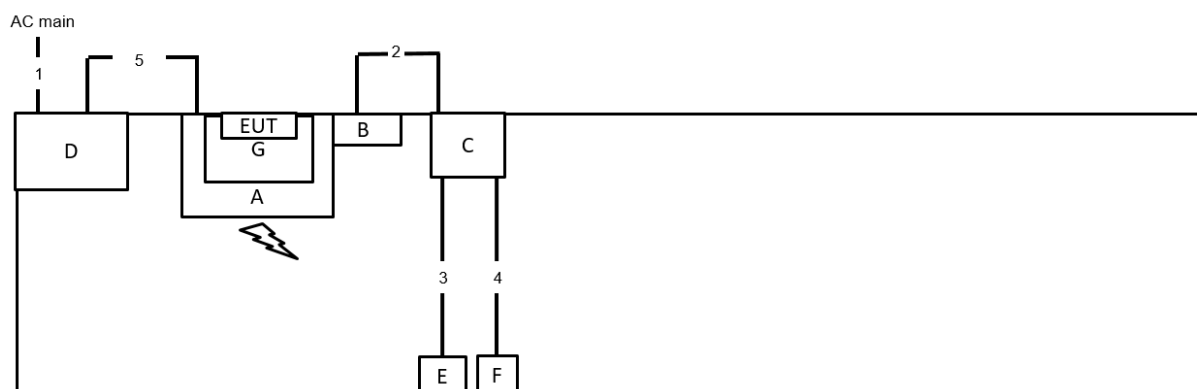


Item	Connection	Shielded	Length
1	Power cable	No	0.8m
2	Mini USB cable	Yes	1.7m
3	Audio cable	No	1m
4	USB cable	Yes	1m
5	DC cable*2	No	0.5m

Test Setup Diagram - Radiated Test < 1GHz

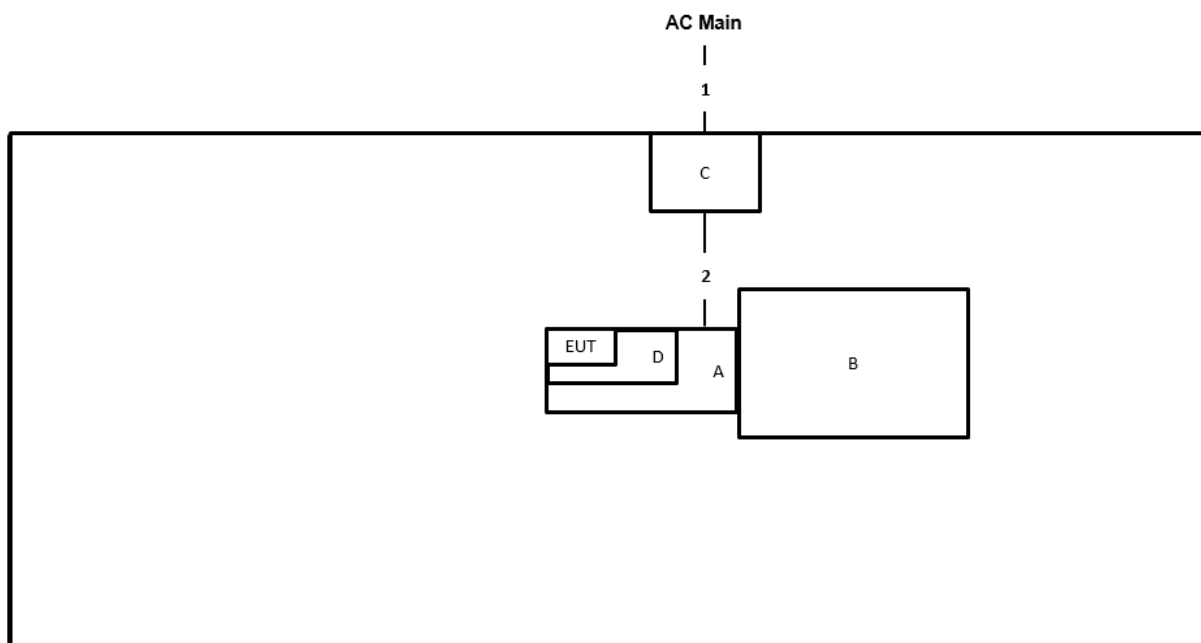

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	Crocodile clip cable*2	No	0.3m

Test Setup Diagram - Radiated Test > 1GHz

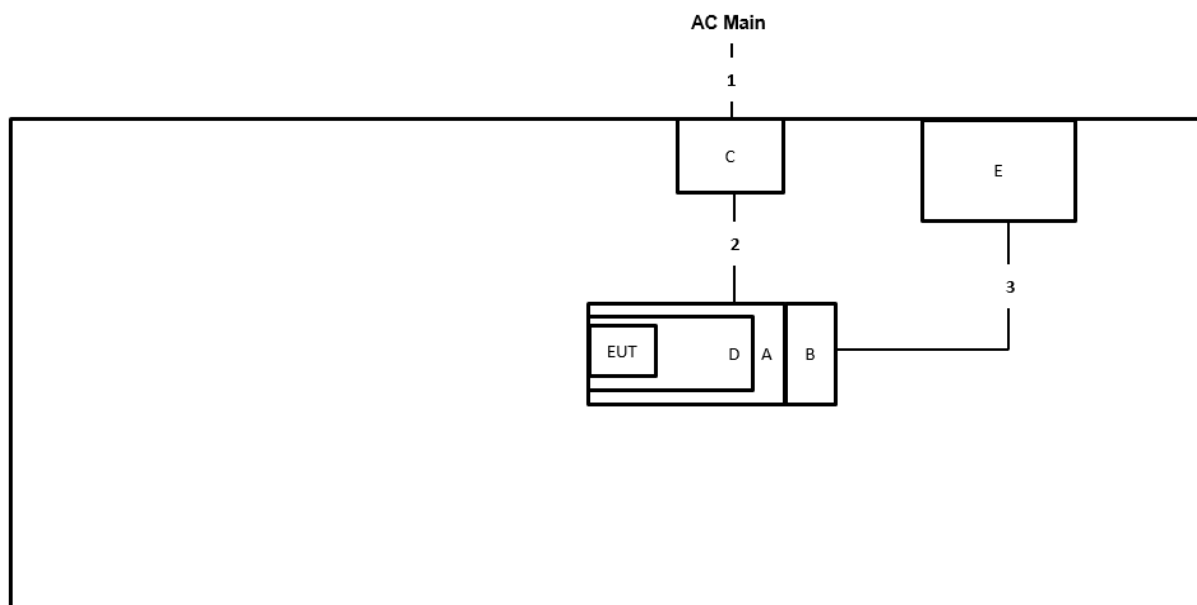

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	Crocodile clip cable*2	No	0.3m
3	Mini USB Cable	Yes	1.8m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
▪ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

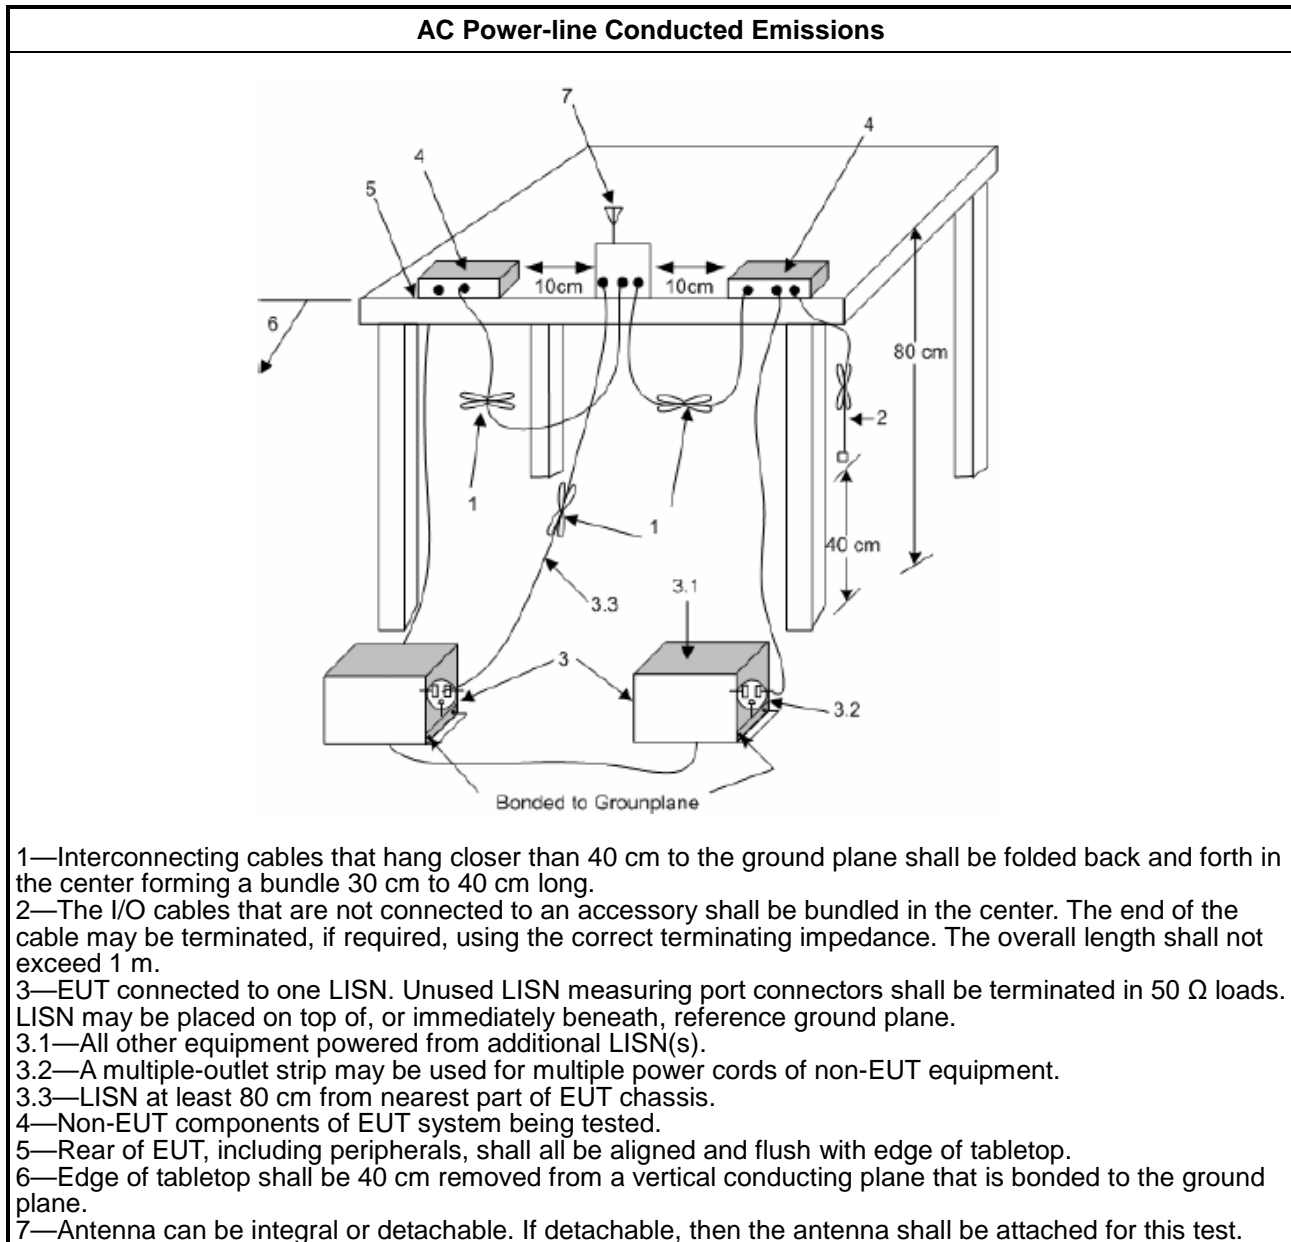

1.1.1. Measurement Results Calculation

The measured Level is calculated using:

- a. Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- b. Margin = -Limit + Level

3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
<ul style="list-style-type: none"> 6 dB bandwidth \geq 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
<ul style="list-style-type: none"> For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

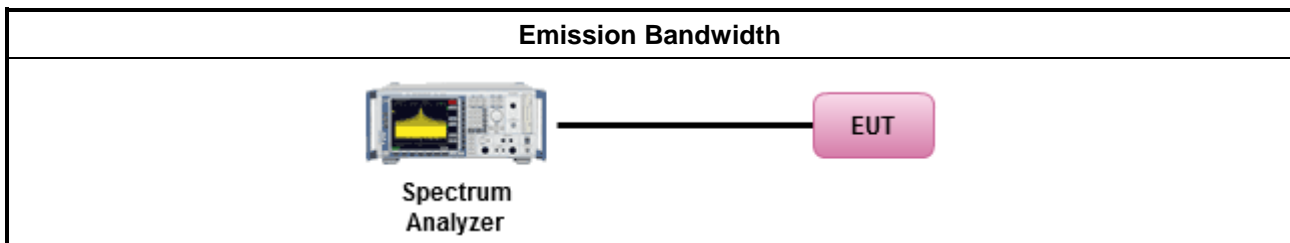

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪ Smart antenna system (SAS):
	<ul style="list-style-type: none"> - Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm - Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm - Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	

3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
▪ Maximum Peak Conducted Output Power	
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW \geq EBW method).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
▪ Maximum Conducted Output Power	
	[duty cycle \geq 98% or external video / power trigger]
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
	duty cycle < 98% and average over on/off periods with duty factor
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
	Measurement using a power meter (PM)
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).

▪ For conducted measurement.

- If the EUT supports multiple transmit chains using options given below:
Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
- If multiple transmit chains, EIRP calculation could be following as methods:

$$P_{\text{total}} = P_1 + P_2 + \dots + P_n$$
 (calculated in linear unit [mW] and transfer to log unit [dBm])

$$\text{EIRP}_{\text{total}} = P_{\text{total}} + \text{DG}$$

3.3.4 Test Setup

Maximum Conducted Output Power (Power Meter)



3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
▪ Power Spectral Density (PSD) ≤ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).	
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10 Method Max. PSD. [duty cycle $\geq 98\%$ or external video / power trigger]
▪ For conducted measurement.	
▪ If The EUT supports multiple transmit chains using options given below:	
<input type="checkbox"/>	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
<input type="checkbox"/>	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
<input type="checkbox"/>	Option 3: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$. Or each transmit chains shall be add $10 \log(N)$ to compared with the limit.

3.4.4 Test Setup

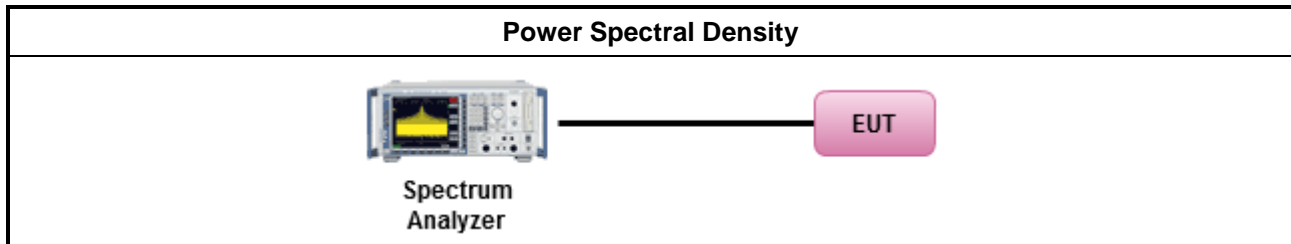

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30
<p>Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.</p> <p>Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.</p>	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
<ul style="list-style-type: none"> Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

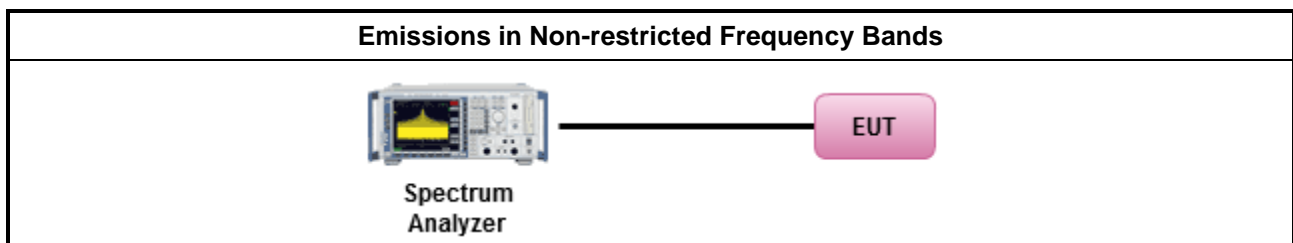

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.


3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

**3.6.3 Test Procedures**

Test Method	
▪ The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].	
▪ Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
▪ For the transmitter unwanted emissions shall be measured using following options below:	
	▪ Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle $\geq 98\%$).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW $\geq 1/T$).
	<input type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
▪ For the transmitter band-edge emissions shall be measured using following options below:	
	▪ Refer as FCC KDB 558074 clause 8.7 & c63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	▪ Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	▪ Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

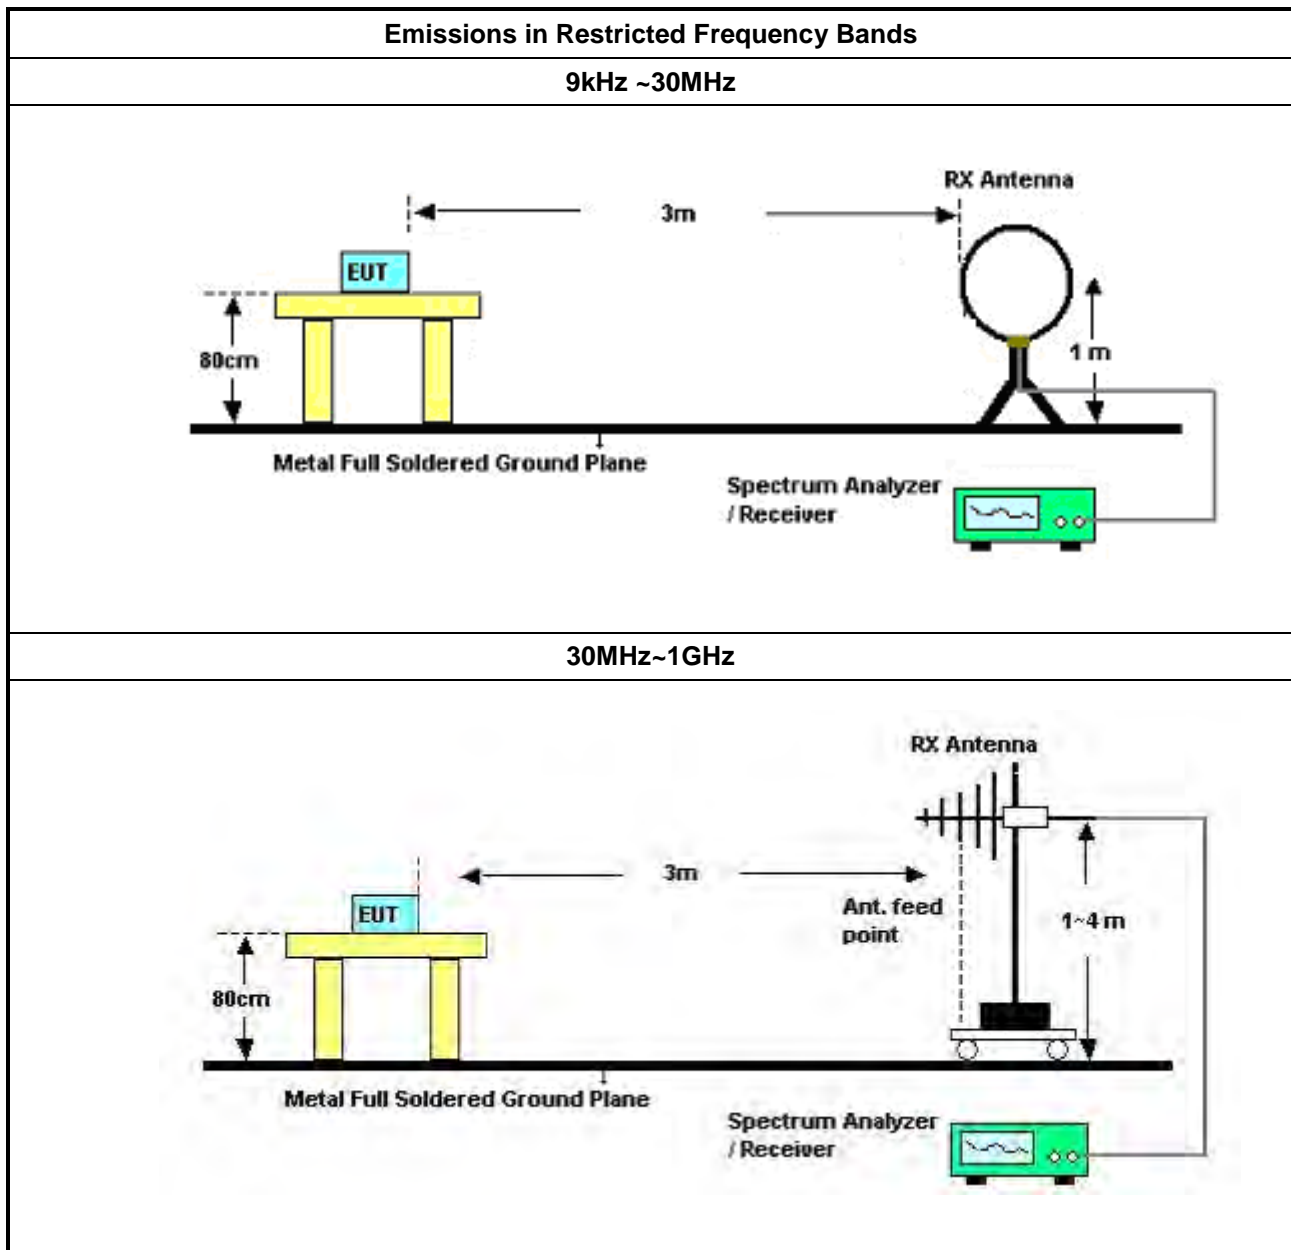

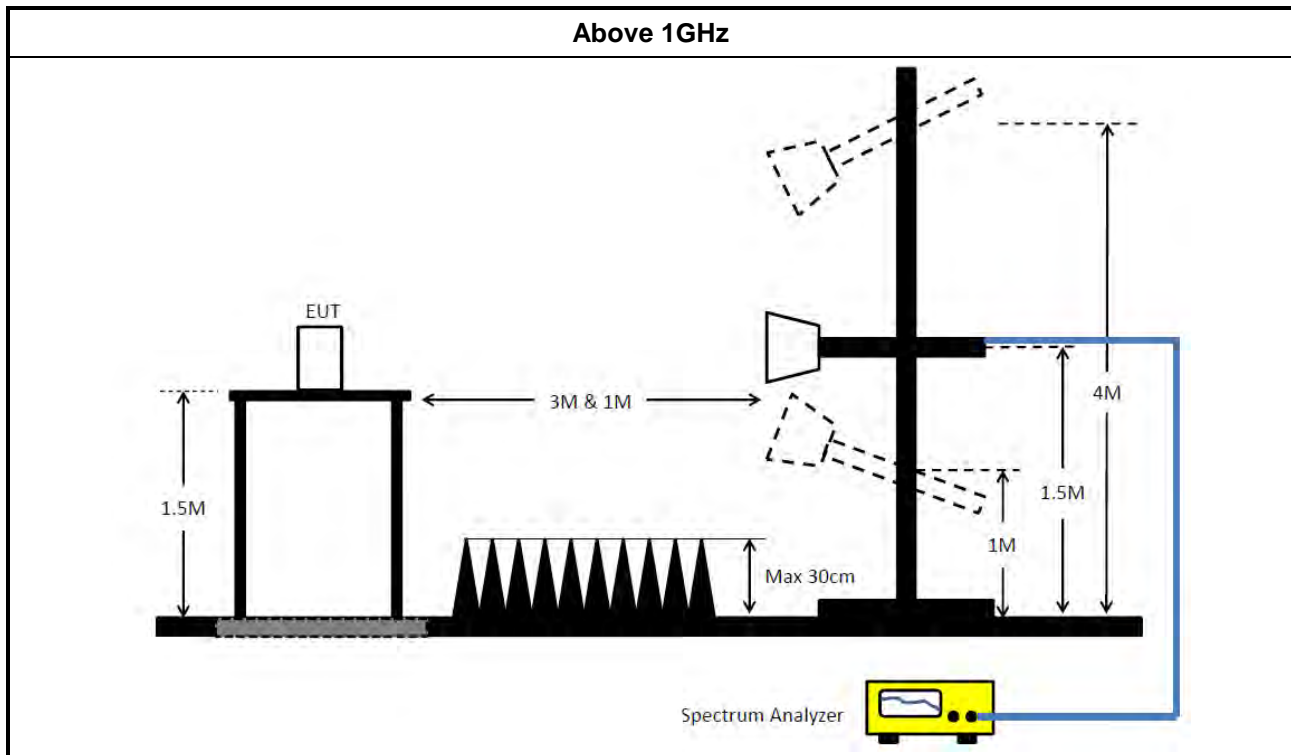

3.6.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.6.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Mar. 01, 2024	Feb. 28, 2025	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Feb. 19, 2024	Feb. 18, 2025	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Apr. 27, 2023	Apr. 26, 2024	Conduction (CO01-CB)
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Feb. 08, 2024	Feb. 07, 2025	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	9kHz ~ 30MHz	Oct. 17, 2023	Oct. 16, 2024	Conduction (CO01-CB)
Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz ~ 30MHz	Oct. 13, 2023	Oct. 12, 2024	Radiation (03CH05-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH05-CB	30MHz ~ 1GHz	Aug. 02, 2023	Aug. 01, 2024	Radiation (03CH05-CB)
Bilog Antenna with 6dB Attenuator	TESEQ & EMCi	CBL 6112D & N-6-06	35236 & AT-N0610	30MHz ~ 2GHz	Mar. 24, 2023	Mar. 23, 2024	Radiation (03CH05-CB)
Bilog Antenna with 6dB Attenuator	TESEQ & EMCi	CBL 6112D & N-6-06	35236 & AT-N0610	30MHz ~ 2GHz	Mar. 23, 2024	Mar. 22, 2025	Radiation (03CH05-CB)
Amplifier	EMCi	EMC330N	980331	20MHz ~ 3GHz	May 03, 2023	May 02, 2024	Radiation (03CH05-CB)
Spectrum Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	Apr. 18, 2023	Apr. 17, 2024	Radiation (03CH05-CB)
RF Cable-low	Woken	RG402	Low Cable-04+23	30MHz~1GHz	Dec. 06, 2023	Dec. 05, 2024	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH05-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH04-CB	1GHz ~18GHz 3m	Feb. 22, 2024	Feb. 21, 2025	Radiation (03CH04-CB)
Horn Antenna	ETS-Lindgren	3115	00143147	750MHz~18GHz	Oct. 04, 2023	Oct. 03, 2024	Radiation (03CH04-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Sep. 04, 2023	Sep. 03, 2024	Radiation (03CH04-CB)
Pre-Amplifier	Agilent	83017A	MY53270063	0.5GHz ~ 26.5GHz	Jun. 30, 2023	Jun. 29, 2024	Radiation (03CH04-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 24, 2023	Nov. 23, 2024	Radiation (03CH04-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100142	9kHz~40GHz	Mar. 21, 2023	Mar. 20, 2024	Radiation (03CH04-CB)
Spectrum Analyzer	R&S	FSP40	100142	9kHz~40GHz	Mar. 19, 2024	Mar. 18, 2025	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21	1GHz - 18GHz	Oct. 02, 2023	Oct. 01, 2024	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21+67	1GHz - 18GHz	Oct. 02, 2023	Oct. 01, 2024	Radiation (03CH04-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40GHz	Jan. 11, 2024	Jan. 10, 2025	Radiation (03CH04-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH04-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	May 29, 2023	May 28, 2024	Conducted (TH01-CB)
Switch	SPTCB	SP-SWI	SWI-01	1~26.5GHz	Oct. 03, 2023	Oct. 02, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1GHz – 18GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1GHz – 18GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1GHz – 18GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1GHz – 18GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1GHz – 18GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-30	1GHz – 18GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	1339408	300MHz~40GHz	Sep. 12, 2023	Sep. 11, 2024	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1517009	300MHz~40GHz	Sep. 12, 2023	Sep. 11, 2024	Conducted (TH01-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




Conducted Emissions at Powerline

Appendix A

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	AV	20.922M	46.89	50.00	-3.11	Neutral

Mode 1

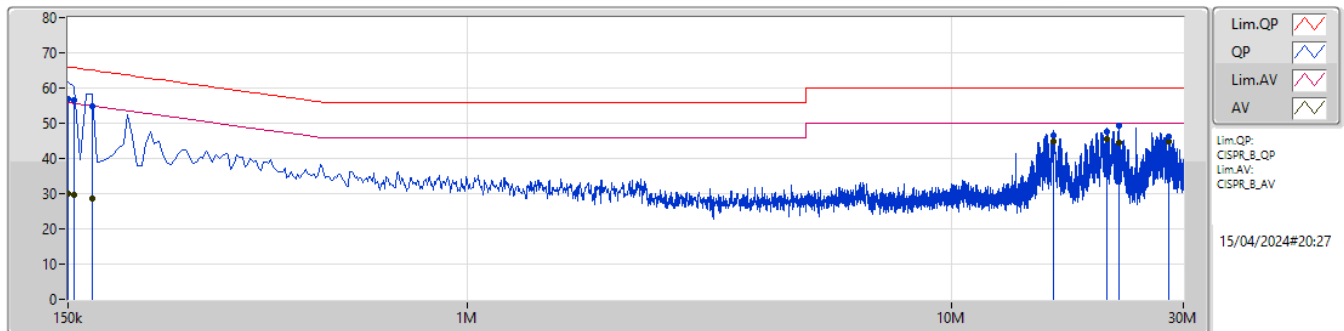

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	150k	57.06	66.00	-8.94	9.98	Line	-	47.08	0.09	0.02	9.87						
AV	150k	29.92	56.00	-26.08	9.98	Line	-	19.94	0.09	0.02	9.87						
QP	154.5k	56.55	65.75	-9.20	9.97	Line	-	46.58	0.09	0.02	9.86						
AV	154.5k	29.56	55.75	-26.19	9.97	Line	-	19.59	0.09	0.02	9.86						
QP	168k	54.89	65.06	-10.17	9.97	Line	-	44.92	0.09	0.02	9.86						
AV	168k	28.67	55.06	-26.39	9.97	Line	-	18.70	0.09	0.02	9.86						
QP	16.161M	46.65	60.00	-13.35	10.44	Line	-	36.21	0.28	0.19	9.97						
AV	16.161M	44.72	50.00	-5.28	10.44	Line	-	34.28	0.28	0.19	9.97						
QP	20.882M	47.54	60.00	-12.46	10.56	Line	-	36.98	0.30	0.23	10.03						
AV	20.882M	45.68	50.00	-4.32	10.56	Line	"Worst"	35.12	0.30	0.23	10.03						
QP	22.119M	49.45	60.00	-10.55	10.57	Line	-	38.88	0.31	0.23	10.03						
AV	22.119M	44.62	50.00	-5.38	10.57	Line	-	34.05	0.31	0.23	10.03						
QP	28.041M	46.22	60.00	-13.78	10.71	Line	-	35.51	0.33	0.32	10.06						
AV	28.041M	44.85	50.00	-5.15	10.71	Line	-	34.14	0.33	0.32	10.06						

Mode 1

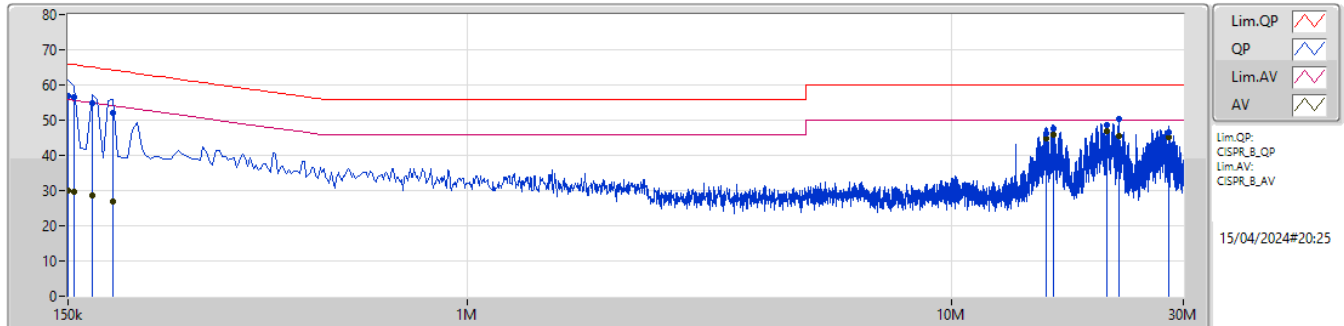

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	150k	57.05	66.00	-8.95	9.96	Neutral	-	47.09	0.07	0.02	9.87						
AV	150k	29.96	56.00	-26.04	9.96	Neutral	-	20.00	0.07	0.02	9.87						
QP	154.5k	56.49	65.75	-9.26	9.95	Neutral	-	46.54	0.07	0.02	9.86						
AV	154.5k	29.53	55.75	-26.22	9.95	Neutral	-	19.58	0.07	0.02	9.86						
QP	168k	54.87	65.06	-10.19	9.95	Neutral	-	44.92	0.07	0.02	9.86						
AV	168k	28.65	55.06	-26.41	9.95	Neutral	-	18.70	0.07	0.02	9.86						
QP	186k	51.92	64.20	-12.28	9.94	Neutral	-	41.98	0.07	0.02	9.85						
AV	186k	26.98	54.20	-27.22	9.94	Neutral	-	17.04	0.07	0.02	9.85						
QP	15.603M	46.18	60.00	-13.82	10.41	Neutral	-	35.77	0.26	0.19	9.96						
AV	15.603M	44.69	50.00	-5.31	10.41	Neutral	-	34.28	0.26	0.19	9.96						
QP	16.161M	47.66	60.00	-12.34	10.42	Neutral	-	37.24	0.26	0.19	9.97						
AV	16.161M	45.86	50.00	-4.14	10.42	Neutral	-	35.44	0.26	0.19	9.97						
QP	20.922M	48.56	60.00	-11.44	10.55	Neutral	-	38.01	0.29	0.23	10.03						
AV	20.922M	46.89	50.00	-3.11	10.55	Neutral	"Worst"	36.34	0.29	0.23	10.03						
QP	22.119M	50.34	60.00	-9.66	10.57	Neutral	-	39.77	0.31	0.23	10.03						
AV	22.119M	45.43	50.00	-4.57	10.57	Neutral	-	34.86	0.31	0.23	10.03						
QP	28.041M	46.67	60.00	-13.33	10.77	Neutral	-	35.90	0.39	0.32	10.06						
AV	28.041M	45.28	50.00	-4.72	10.77	Neutral	-	34.51	0.39	0.32	10.06						

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	721.25k	1.039M	1M04F1D	640k	1.032M
BT-LE(2Mbps)	1.105M	2.079M	2M08F1D	832.5k	2.051M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	721.25k	1.036M
2440MHz	Pass	500k	660k	1.039M
2480MHz	Pass	500k	640k	1.032M
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	500k	1.105M	2.079M
2440MHz	Pass	500k	832.5k	2.051M
2480MHz	Pass	500k	1.01M	2.066M



Port X-N dB = Port X 6dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

2.4-2.4835GHz_BT-LE(1Mbps)
EBW-DTS
2402MHz

07/03/2024

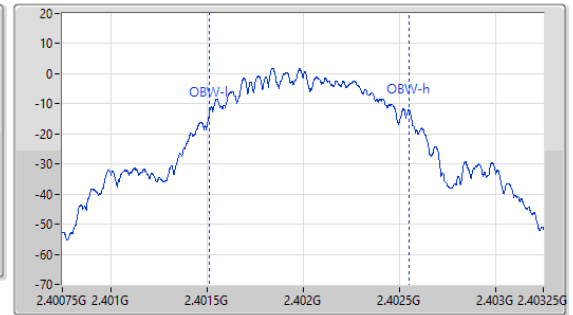
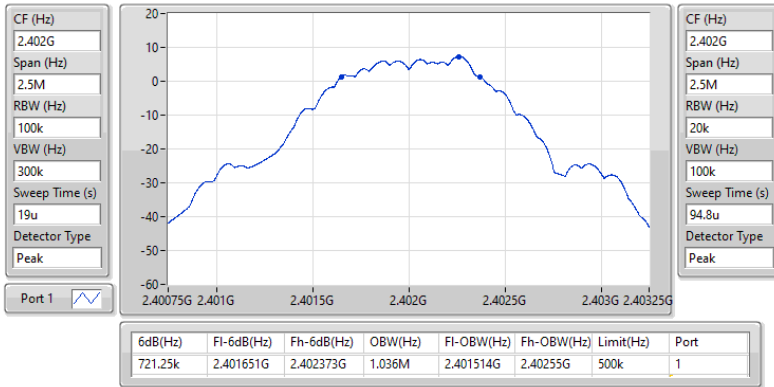

2.4-2.4835GHz_BT-LE(1Mbps)
EBW-DTS
2440MHz

07/03/2024

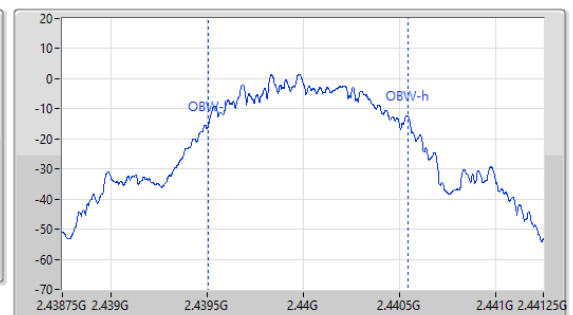
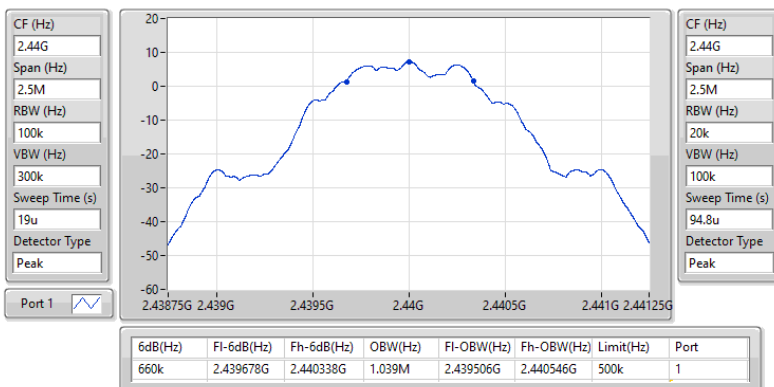


2.4-2.4835GHz_BT-LE(1Mbps)
EBW-DTS
2480MHz

07/03/2024

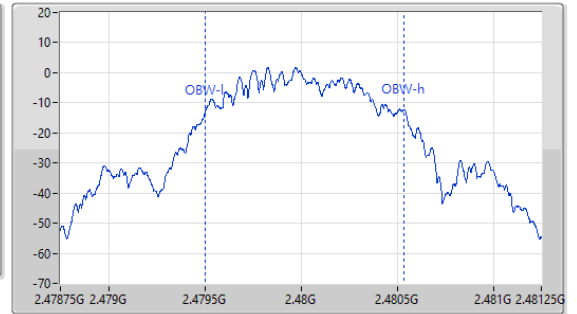
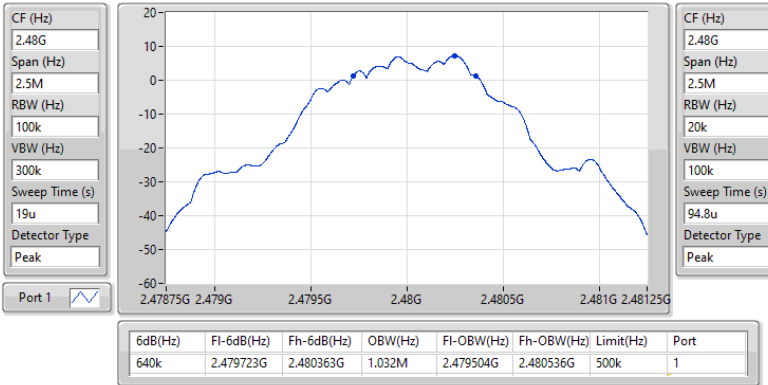

2.4-2.4835GHz_BT-LE(2Mbps)
EBW-DTS
2402MHz

07/03/2024

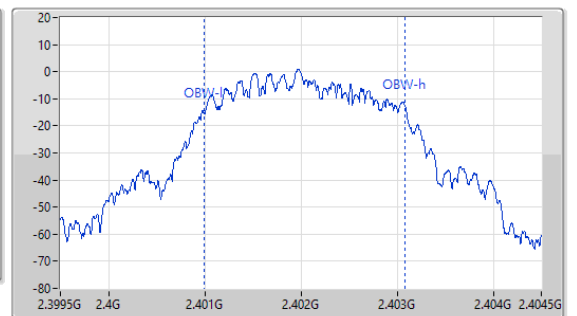
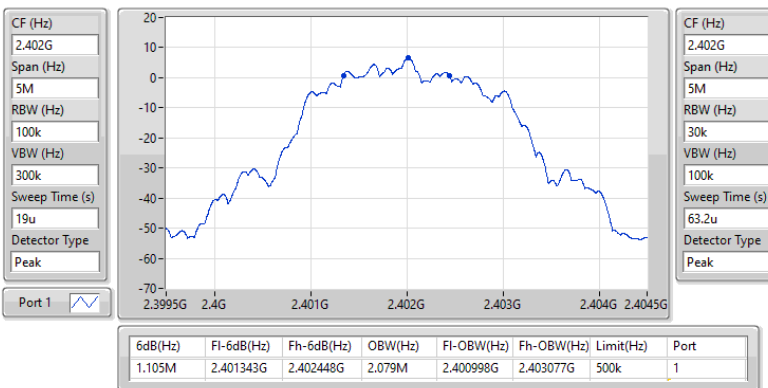


2.4-2.4835GHz_BT-LE(2Mbps)
EBW-DTS
2440MHz

07/03/2024

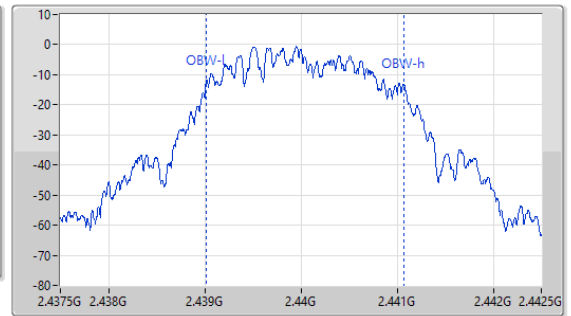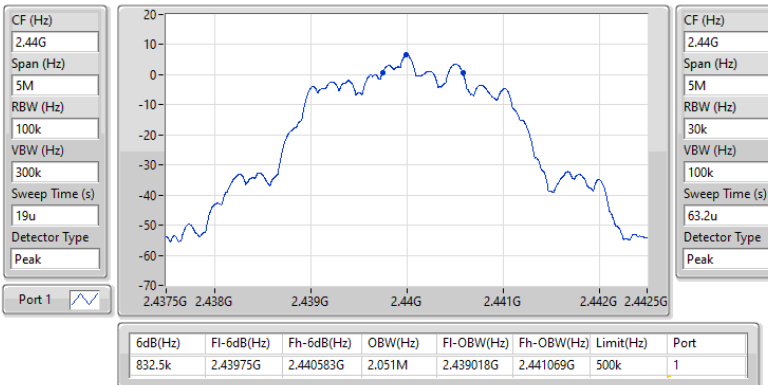
2.4-2.4835GHz_BT-LE(2Mbps)
EBW-DTS
2480MHz

07/03/2024

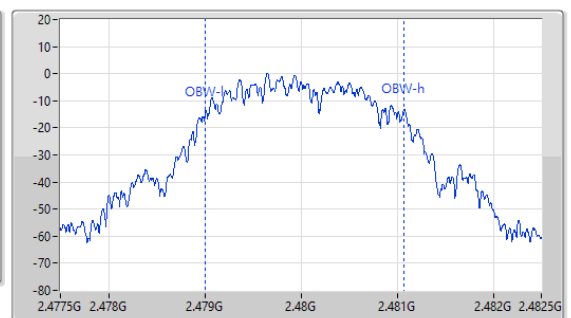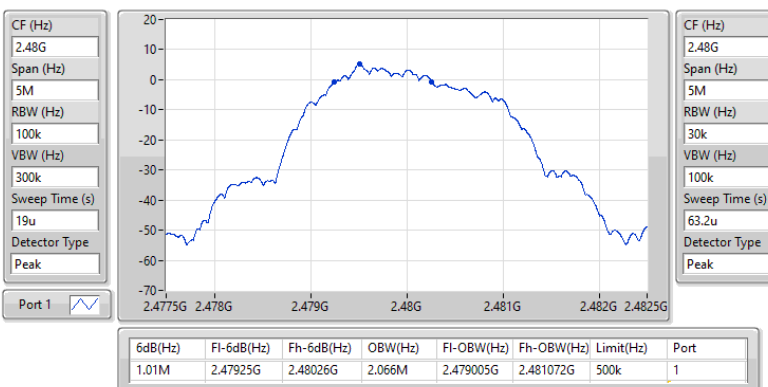



Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	8.45	0.00700
BT-LE(2Mbps)	8.45	0.00700



Result

Mode	Result	DG (dBi)	Total Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	3.68	8.45	30.00
2440MHz	Pass	3.68	7.99	30.00
2480MHz	Pass	3.68	8.09	30.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	3.68	8.45	30.00
2440MHz	Pass	3.68	7.78	30.00
2480MHz	Pass	3.68	8.04	30.00

DG = Directional Gain; Port X = Port X output power



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-7.23
BT-LE(2Mbps)	-9.85

RBW = 3kHz;

Result

Mode	Result	DG (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	3.68	-7.23	8.00
2440MHz	Pass	3.68	-7.61	8.00
2480MHz	Pass	3.68	-7.51	8.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	3.68	-9.85	8.00
2440MHz	Pass	3.68	-10.47	8.00
2480MHz	Pass	3.68	-10.06	8.00


DG = Directional Gain; RBW = 3kHz;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

2.4-2.4835GHz_BT-LE(1Mbps)

PSD

2402MHz

07/03/2024

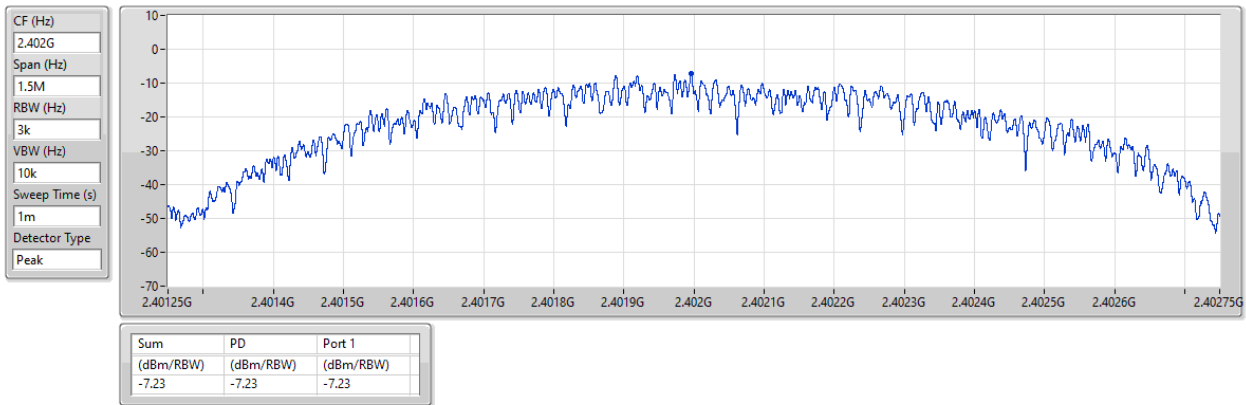


2.4-2.4835GHz_BT-LE(1Mbps)

PSD

2440MHz

07/03/2024

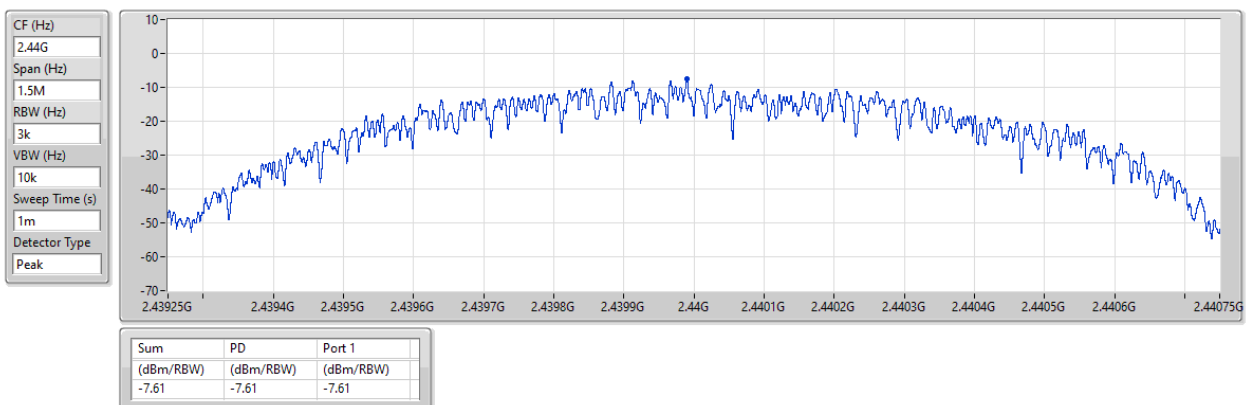


2.4-2.4835GHz_BT-LE(1Mbps)

PSD

2480MHz

07/03/2024

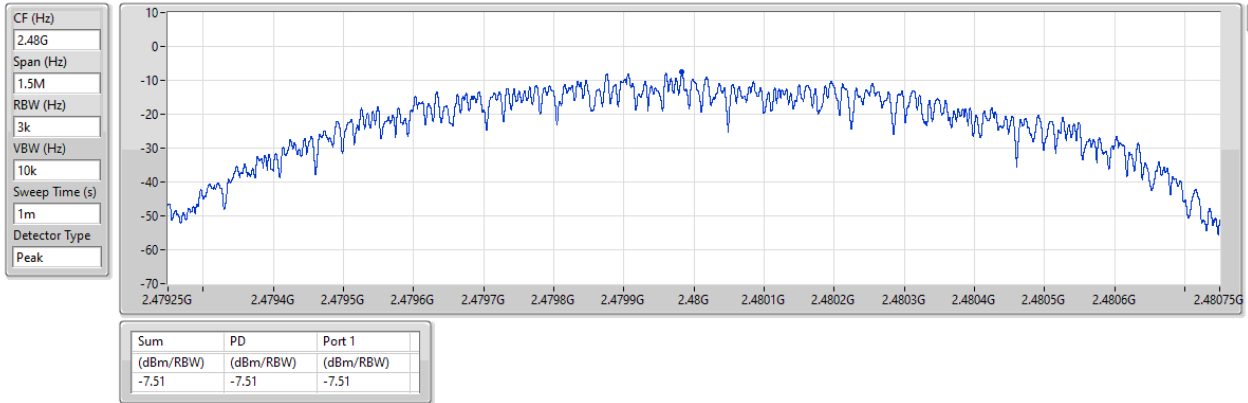


2.4-2.4835GHz_BT-LE(2Mbps)

PSD

2402MHz

07/03/2024

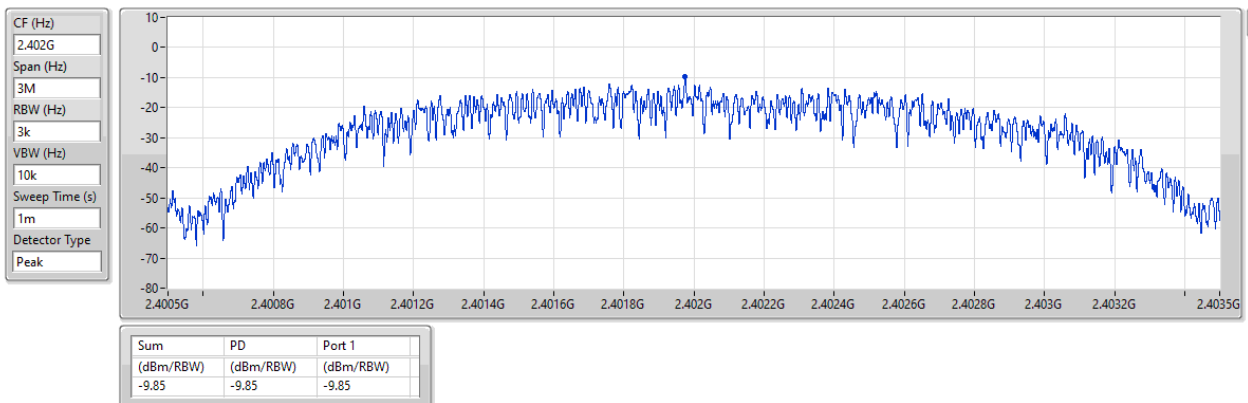


2.4-2.4835GHz_BT-LE(2Mbps)

PSD

2440MHz

07/03/2024

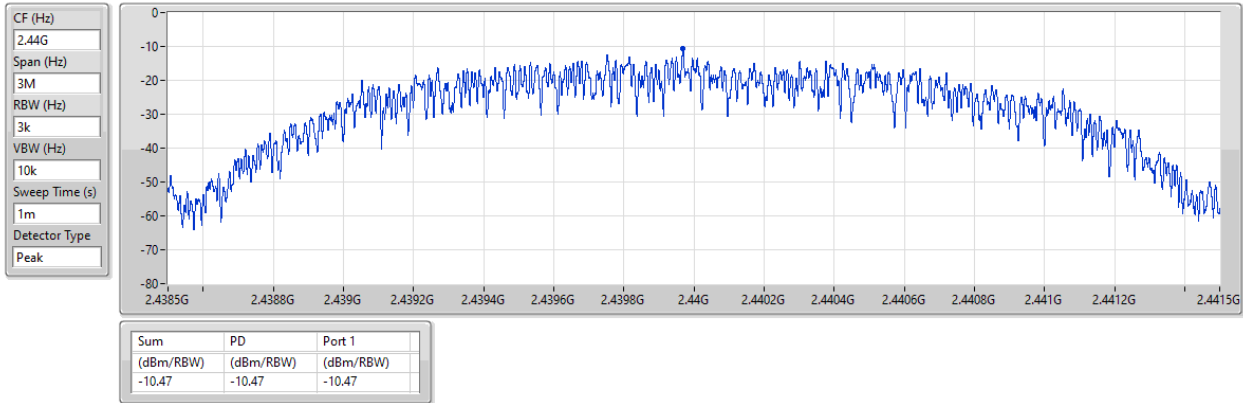


2.4-2.4835GHz_BT-LE(2Mbps)

PSD

2480MHz

07/03/2024

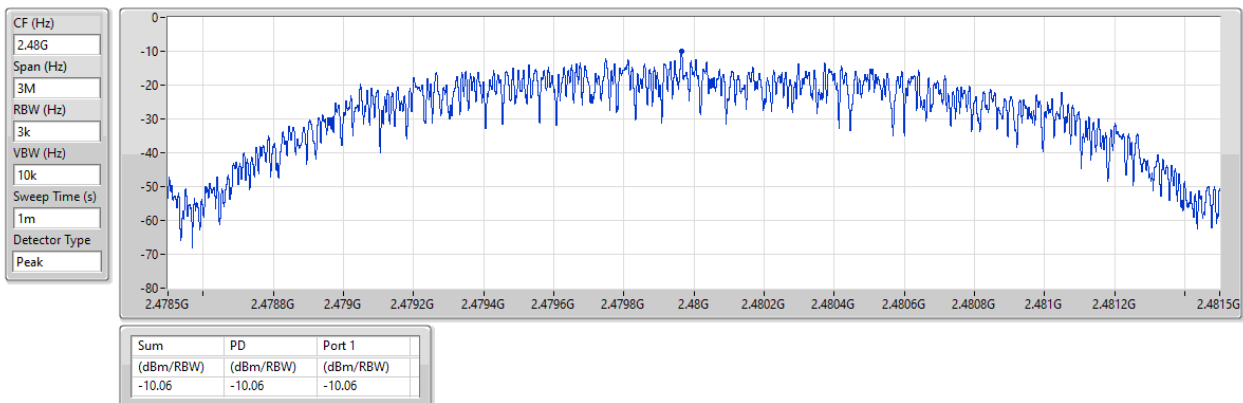

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	2.402G	7.89	-22.11	622.2M	-51.88	2.3974G	-50.01	2.4G	-54.17	2.50006G	-51.60	3.30494G	-44.69	1
BT-LE(2Mbps)	Pass	2.402G	7.21	-22.79	856.03M	-51.80	2.4G	-40.29	2.4G	-34.68	2.5009G	-52.05	6.77784G	-47.39	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.402G	7.89	-22.11	955.9M	-51.18	2.39308G	-51.26	2.4G	-50.72	2.50086G	-51.94	3.20089G	-41.48	1
2440MHz	Pass	2.402G	7.89	-22.11	2.10035G	-52.49	2.39808G	-51.36	2.4G	-53.91	2.50322G	-51.81	3.25151G	-42.85	1
2480MHz	Pass	2.402G	7.89	-22.11	622.2M	-51.88	2.3974G	-50.01	2.4G	-54.17	2.50006G	-51.60	3.30494G	-44.69	1
BT-LE(2Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.402G	7.21	-22.79	856.03M	-51.80	2.4G	-40.29	2.4G	-34.68	2.5009G	-52.05	6.77784G	-47.39	1
2440MHz	Pass	2.402G	7.21	-22.79	1.96053G	-51.93	2.39964G	-51.28	2.4G	-55.65	2.50018G	-51.54	6.80314G	-48.15	1
2480MHz	Pass	2.402G	7.21	-22.79	844.28M	-51.96	2.39852G	-51.59	2.4G	-54.83	2.5029G	-51.76	3.30494G	-43.55	1


2.4-2.4835GHz_BT-LE(1Mbps)

CSEndB-DTS

2402MHz

07/03/2024

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

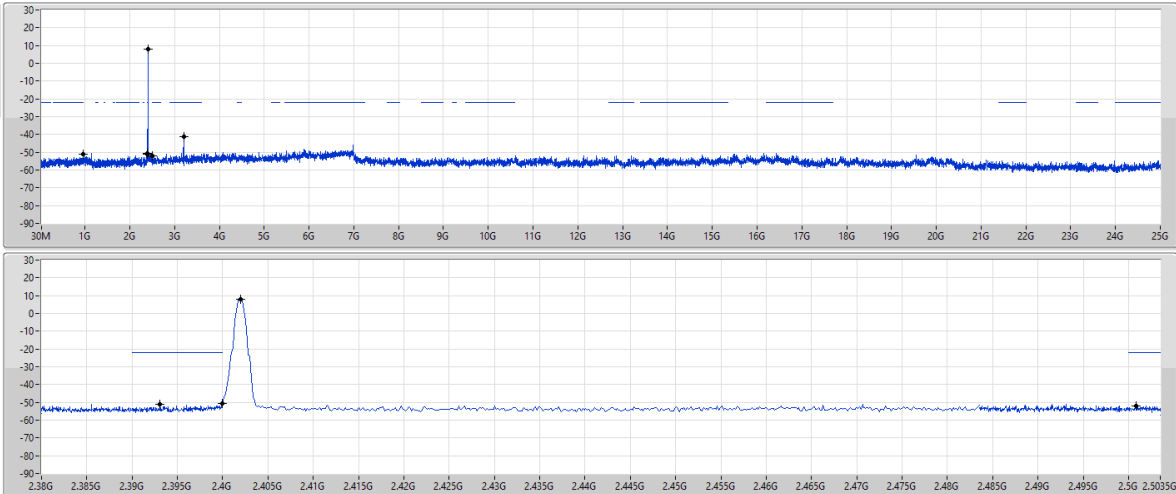

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.402G	7.89	-22.11	955.9M	-51.18	2.39308G	-51.26	2.4G	-50.72	2.50086G	-51.94	3.20089G	-41.48	1


2.4-2.4835GHz_BT-LE(1Mbps)

CSEndB-DTS

2440MHz

07/03/2024

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

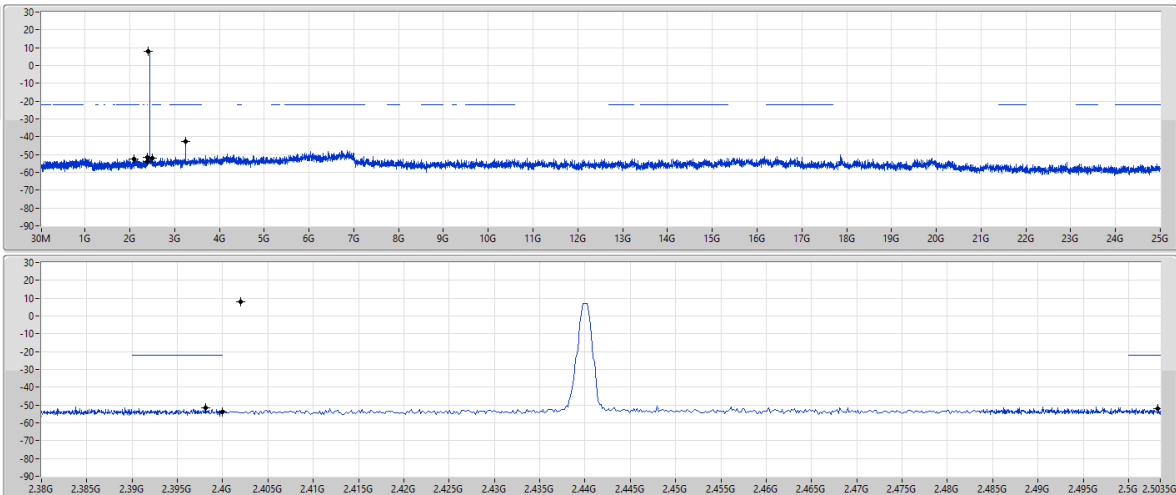

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.402G	7.89	-22.11	2.10035G	-52.49	2.39808G	-51.36	2.4G	-53.91	2.50322G	-51.81	3.25151G	-42.85	1

2.4-2.4835GHz_BT-LE(1Mbps)


CSEndB-DTS

2480MHz

07/03/2024

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Port 1

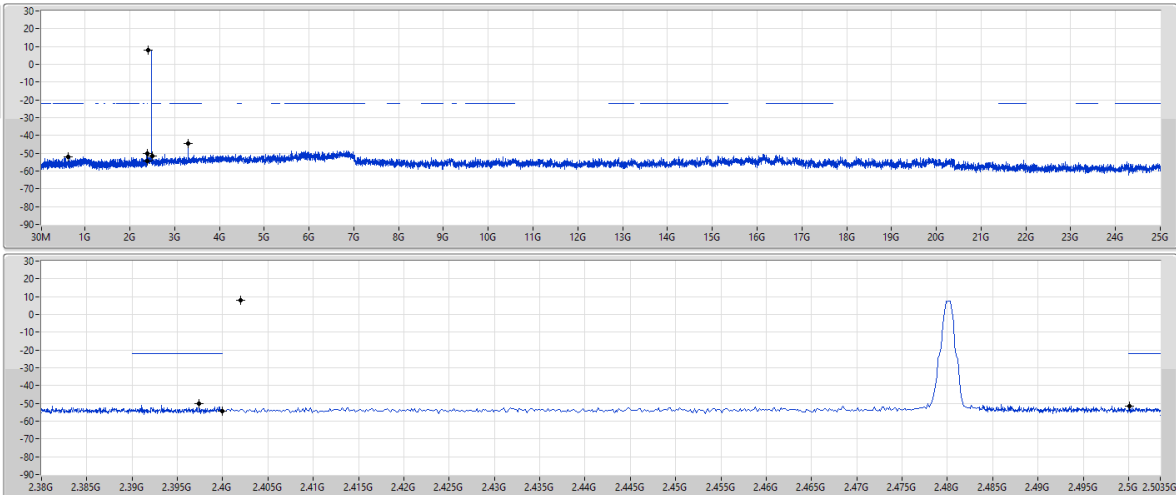

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.402G	7.89	-22.11	622.2M	-51.88	2.3974G	-50.01	2.4G	-54.17	2.5000G	-51.60	3.30494G	-44.69	1

2.4-2.4835GHz_BT-LE(2Mbps)


CSEndB-DTS

2402MHz

07/03/2024

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Port 1

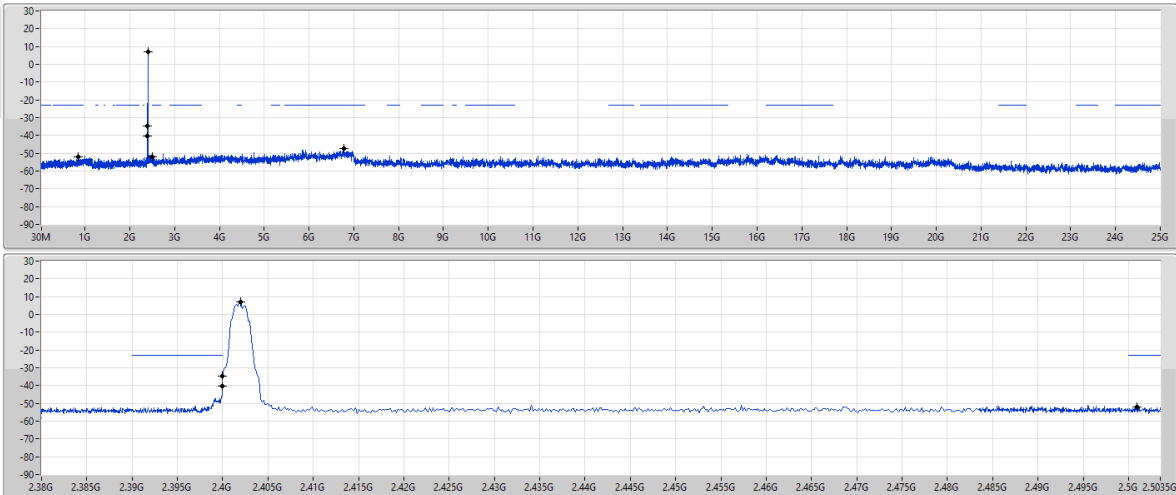


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.402G	7.21	-22.79	856.03M	-51.80	2.4G	-40.29	2.4G	-34.68	2.5009G	-52.05	6.77784G	-47.39	1

2.4-2.4835GHz_BT-LE(2Mbps)

CSEndB-DTS


2440MHz

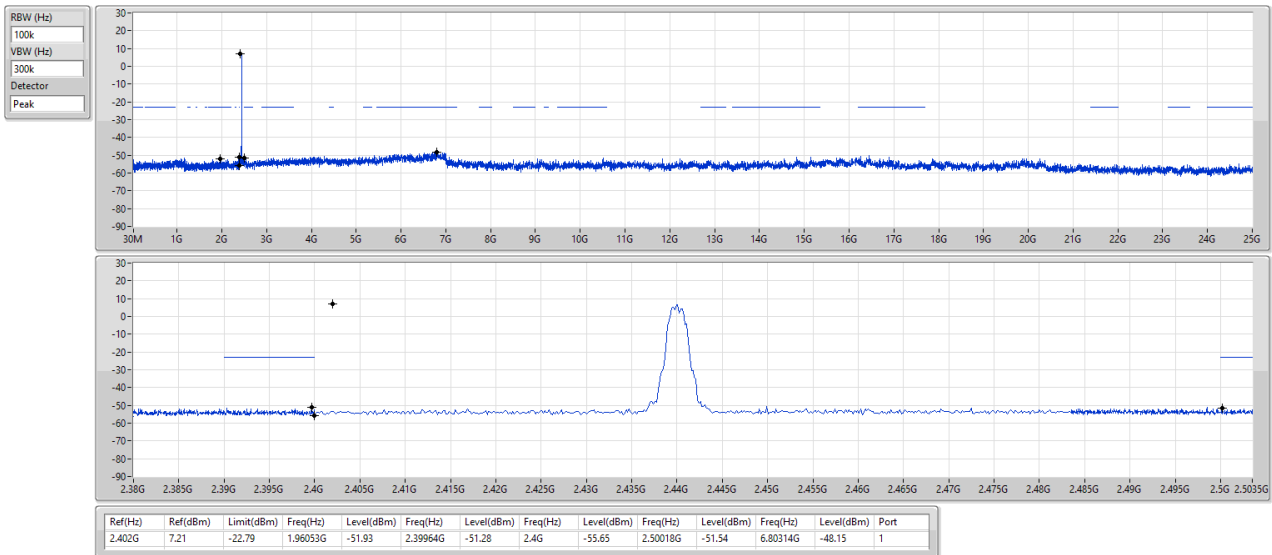

2.4-2.4835GHz_BT-LE(2Mbps)

CSEndB-DTS

2480MHz

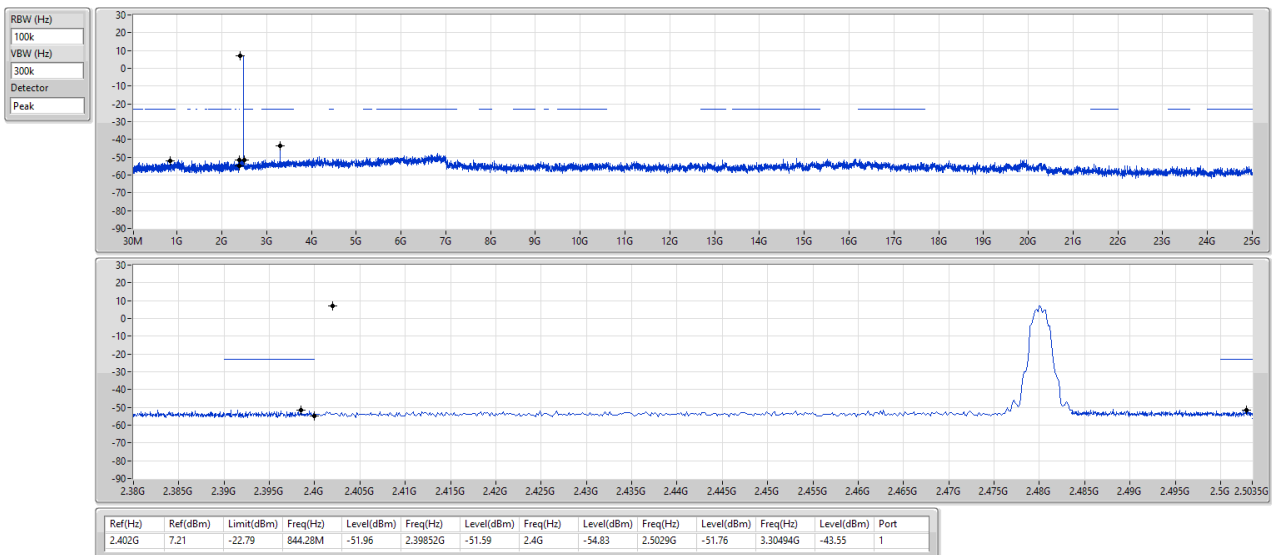




Radiated Emissions below 1GHz

Appendix F.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 2	Pass	QP	98.87M	41.07	43.50	-2.43	Horizontal

Mode 2

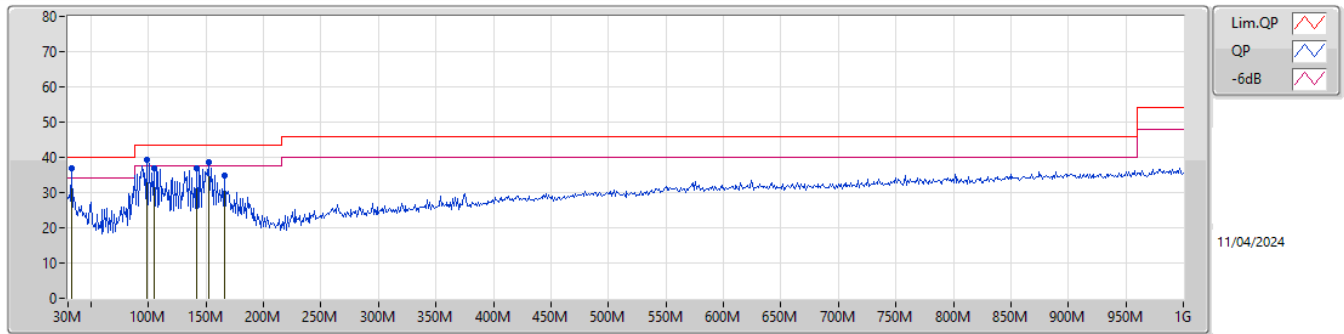

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)		
PK	32.91M	36.89	40.00	-3.11	-7.75	3	Vertical	255	1.25	"Worst"	44.64	22.92	0.95	31.62		
PK	98.87M	39.17	43.50	-4.33	-13.58	3	Vertical	294	1.00	-	52.75	16.63	1.74	31.95		
PK	104.69M	37.01	43.50	-6.49	-12.90	3	Vertical	294	1.00	-	49.91	17.26	1.79	31.95		
PK	141.55M	36.99	43.50	-6.51	-12.84	3	Vertical	131	1.25	-	49.83	17.06	2.08	31.98		
PK	152.22M	38.63	43.50	-4.87	-13.58	3	Vertical	262	2.00	-	52.21	16.28	2.16	32.02		
PK	165.8M	34.80	43.50	-8.70	-13.93	3	Vertical	236	2.00	-	48.73	15.85	2.26	32.04		

Mode 2

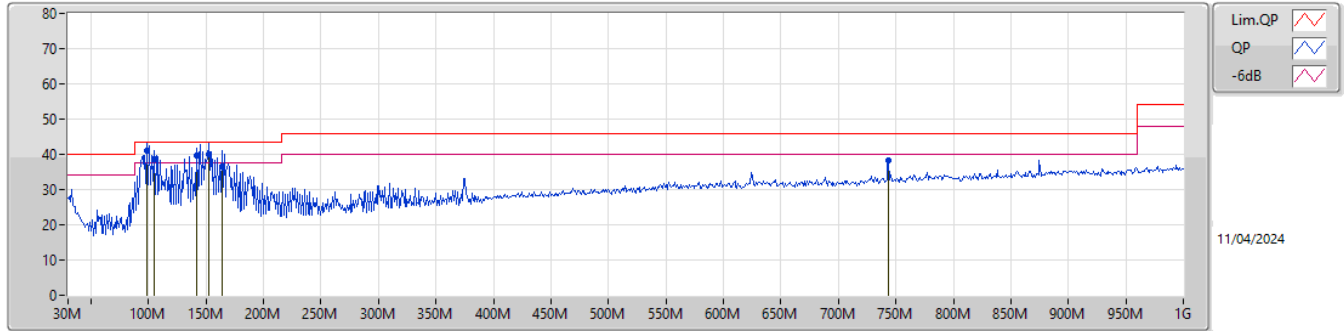


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)		
QP	98.87M	41.07	43.50	-2.43	-13.58	3	Horizontal	324	3.00	"Worst"	54.65	16.63	1.74	31.95		
QP	104.69M	38.70	43.50	-4.80	-12.90	3	Horizontal	342	3.00	-	51.60	17.26	1.79	31.95		
QP	141.55M	39.82	43.50	-3.68	-12.84	3	Horizontal	267	2.00	-	52.66	17.06	2.08	31.98		
QP	152.22M	40.09	43.50	-3.41	-13.58	3	Horizontal	340	2.00	-	53.67	16.28	2.16	32.02		
QP	163.86M	36.63	43.50	-6.87	-13.96	3	Horizontal	340	2.00	-	50.59	15.83	2.25	32.04		
PK	743.92M	38.32	46.00	-7.68	-1.95	3	Horizontal	0	1.00	-	40.27	25.49	5.20	32.64		

Summary

Mode	Result	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
2.4-2.4835GHz	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	2.48824G	48.61	54.00	-5.39	Horizontal
BT-LE(2Mbps)	Pass	2.4835G	50.18	54.00	-3.82	Vertical

2.4-2.4835GHz_BT-LE(1Mbps)

2480MHz_TX

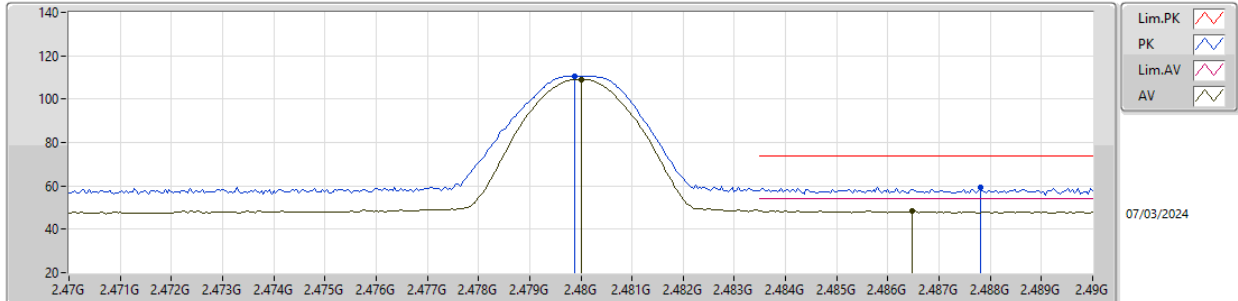


EUT_Z_1TX
Setting default
04-P-M-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.47988G	110.48	Inf	-Inf	79.49	3	Vertical	268	1.12	-	27.60	3.39	-			
AV	2.48G	109.18	Inf	-Inf	78.19	3	Vertical	268	1.12	-	27.60	3.39	-			
PK	2.4878G	59.15	74.00	-14.85	28.07	3	Vertical	268	1.12	-	27.68	3.40	-			
AV	2.48648G	48.58	54.00	-5.42	17.52	3	Vertical	268	1.12	-	27.66	3.40	-			

2.4-2.4835GHz_BT-LE(1Mbps)

2480MHz_TX

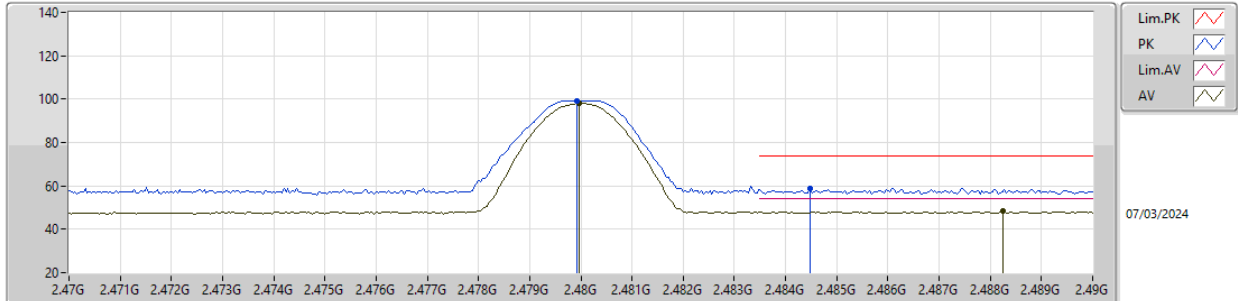


EUT_Z_1TX
Setting default
04-P-M-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.47992G	99.28	Inf	-Inf	68.29	3	Horizontal	221	1.44	-	27.60	3.39	-			
AV	2.47996G	97.96	Inf	-Inf	66.97	3	Horizontal	221	1.44	-	27.60	3.39	-			
PK	2.48448G	59.03	74.00	-14.97	27.99	3	Horizontal	221	1.44	-	27.64	3.40	-			
AV	2.48824G	48.61	54.00	-5.39	17.53	3	Horizontal	221	1.44	-	27.68	3.40	-			

2.4-2.4835GHz_BT-LE(1Mbps)

2480MHz_TX

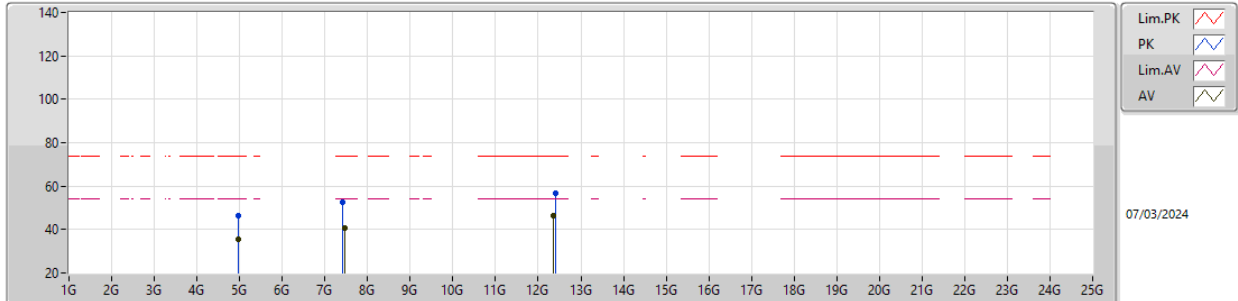


EUT_Z_1TX
Setting default
04-P-M-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.968G	46.57	74.00	-27.43	41.29	3	Vertical	48	1.74	-	32.70	5.80	33.22			
AV	4.9606G	35.67	54.00	-18.33	30.40	3	Vertical	48	1.74	-	32.70	5.79	33.22			
PK	7.4186G	52.36	74.00	-21.64	42.11	3	Vertical	104	2.96	-	37.20	7.19	34.14			
AV	7.478G	40.85	54.00	-13.15	30.56	3	Vertical	104	2.96	-	37.20	7.25	34.16			
PK	12.3966G	56.93	74.00	-17.07	43.09	3	Vertical	61	2.34	-	38.49	9.88	34.53			
AV	12.3572G	46.24	54.00	-7.76	32.49	3	Vertical	61	2.34	-	38.41	9.87	34.53			

2.4-2.4835GHz_BT-LE(1Mbps)

2480MHz_TX

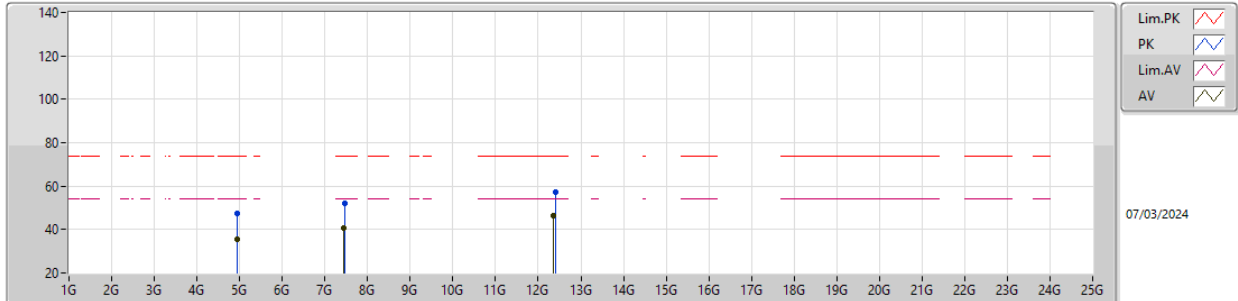


EUT_Z_1TX
Setting default
04-P-M-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.933G	47.16	74.00	-26.84	41.95	3	Horizontal	97	1.08	-	32.67	5.77	33.23			
AV	4.939G	35.62	54.00	-18.38	30.39	3	Horizontal	97	1.08	-	32.68	5.78	33.23			
PK	7.4744G	51.89	74.00	-22.11	41.60	3	Horizontal	328	1.03	-	37.20	7.25	34.16			
AV	7.428G	40.77	54.00	-13.23	30.51	3	Horizontal	328	1.03	-	37.20	7.20	34.14			
PK	12.4156G	57.09	74.00	-16.91	43.23	3	Horizontal	78	2.80	-	38.50	9.89	34.53			
AV	12.369G	46.26	54.00	-7.74	32.48	3	Horizontal	78	2.80	-	38.44	9.87	34.53			

2.4-2.4835GHz_BT-LE(2Mbps)

2480MHz_TX

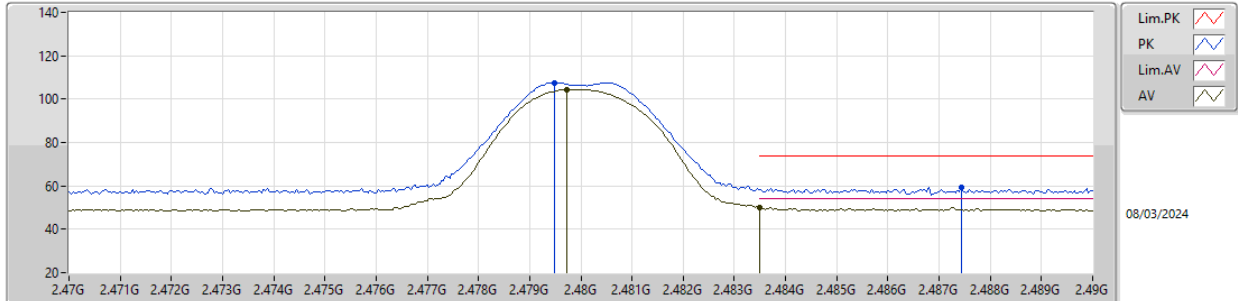


EUT_Z_1TX
Setting default
04-P-M-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.47948G	107.61	Inf	-Inf	76.62	3	Vertical	16	1.00	-	27.60	3.39	-			
AV	2.47972G	104.43	Inf	-Inf	73.44	3	Vertical	16	1.00	-	27.60	3.39	-			
PK	2.48744G	59.22	74.00	-14.78	28.15	3	Vertical	16	1.00	-	27.67	3.40	-			
AV	2.4835G	50.18	54.00	-3.82	19.14	3	Vertical	16	1.00	-	27.64	3.40	-			

2.4-2.4835GHz_BT-LE(2Mbps)

2480MHz_TX

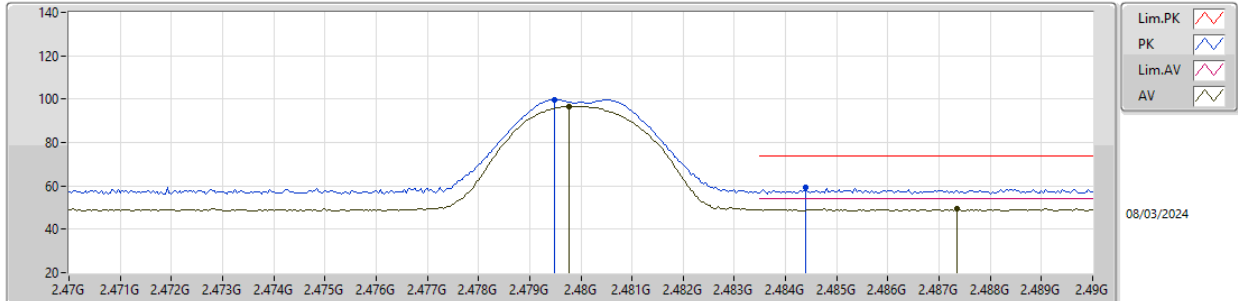


EUT_Z_1TX
Setting default
04-P-M-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.47948G	99.69	Inf	-Inf	68.70	3	Horizontal	23	1.76	-	27.60	3.39	-			
AV	2.47976G	96.52	Inf	-Inf	65.53	3	Horizontal	23	1.76	-	27.60	3.39	-			
PK	2.4844G	59.47	74.00	-14.53	28.43	3	Horizontal	23	1.76	-	27.64	3.40	-			
AV	2.48736G	49.56	54.00	-4.44	18.49	3	Horizontal	23	1.76	-	27.67	3.40	-			

2.4-2.4835GHz_BT-LE(2Mbps)

2480MHz_TX

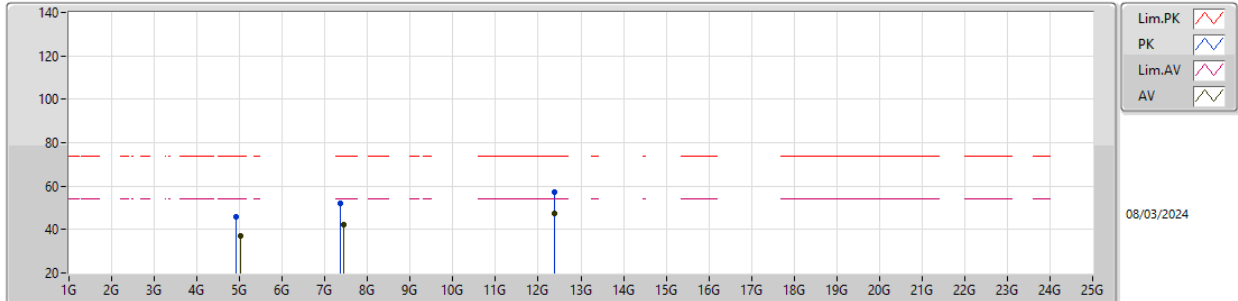


EUT_Z_1TX
Setting default
04-P-M-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.9144G	46.11	74.00	-27.89	40.97	3	Vertical	29	1.80	-	32.63	5.75	33.24			
AV	5.032G	36.96	54.00	-17.04	31.70	3	Vertical	29	1.80	-	32.64	5.84	33.22			
PK	7.3612G	51.89	74.00	-22.11	41.65	3	Vertical	113	1.22	-	37.20	7.15	34.11			
AV	7.4296G	42.35	54.00	-11.65	32.09	3	Vertical	113	1.22	-	37.20	7.20	34.14			
PK	12.3832G	57.01	74.00	-16.99	43.19	3	Vertical	167	2.32	-	38.47	9.88	34.53			
AV	12.3812G	47.46	54.00	-6.54	33.65	3	Vertical	167	2.32	-	38.46	9.88	34.53			

2.4-2.4835GHz_BT-LE(2Mbps)

2480MHz_TX

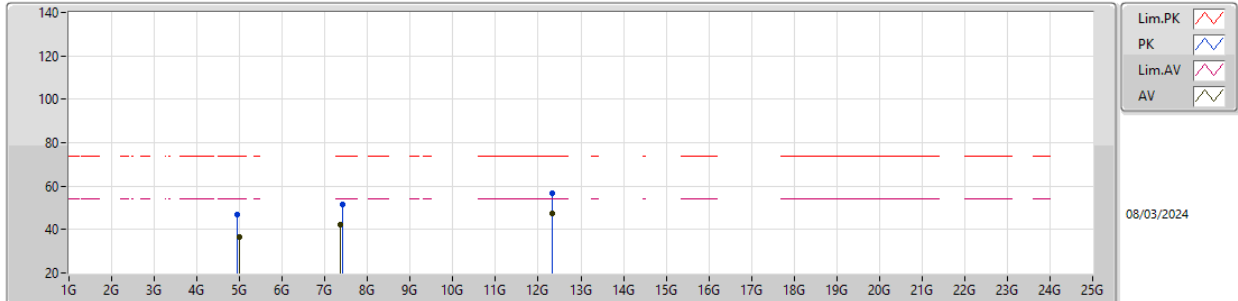

EUT_Z_1TX
Setting default
04-P-M-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.9408G	46.93	74.00	-27.07	41.70	3	Horizontal	360	1.39	-	32.68	5.78	33.23			
AV	5.006G	36.76	54.00	-17.24	31.45	3	Horizontal	360	1.39	-	32.69	5.83	33.21			
PK	7.4156G	51.57	74.00	-22.43	41.32	3	Horizontal	159	1.12	-	37.20	7.19	34.14			
AV	7.3712G	42.37	54.00	-11.63	32.14	3	Horizontal	159	1.12	-	37.20	7.15	34.12			
PK	12.3304G	56.89	74.00	-17.11	43.20	3	Horizontal	282	1.29	-	38.36	9.86	34.53			
AV	12.3236G	47.23	54.00	-6.77	33.56	3	Horizontal	282	1.29	-	38.35	9.85	34.53			