

## Appendix A. Test Setup Photos


The equipment under test was placed on a desk inside of shield room. The isotropic field probe was used to measure the field strength for 5 EUT surfaces, RF exposure evaluation at 10 cm surrounding the device and 10cm away from the surface, the separation distance is maintained between EUT and the center of the field probe. (The Probe to shell is 8 mm)



Left Side at 10 cm separation distance



Right Side at 10 cm separation distance

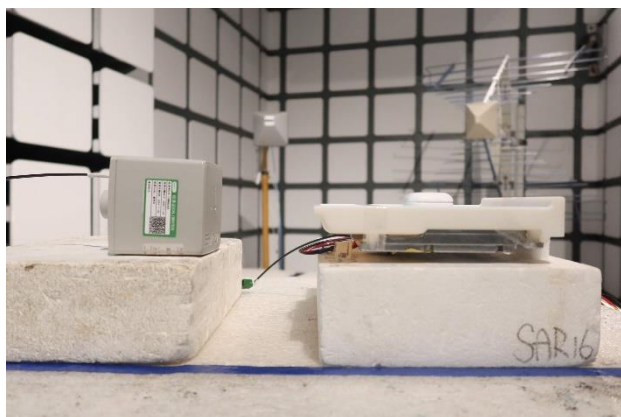

Top Side at 10 cm separation distance



Bottom Side at 10 cm separation distance



Top Surface at 10 cm separation distance