

FCC PART 15E TEST REPORT FOR CERTIFICATION
On Behalf of

SHARP Corporation

Electronic paper display

EP-C251

FCC ID: APYBSC0005

Prepared for : SHARP Corporation
1 Takumi-cho, Sakai-ku Sakai City Osaka 590-8522 Japan

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F23211
Date of Test : Oct.27~Nov.13, 2023
Date of Report : Nov.28, 2023

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	5
1.1. Description of Standards and Results	5
2. GENERAL INFORMATION.....	6
2.1. Description of Equipment Under Test	6
2.2. Feature of Equipment Under Test	7
2.3. Test Information.....	8
2.4. Tested Supporting System Details	10
2.5. Block diagram of connection between the EUT and simulators.....	10
2.6. Test Facility.....	11
2.7. Measurement Uncertainty (95% confidence levels, k=2).....	11
3. POWER LINE CONDUCTED EMISSION TEST	12
3.1. Test Equipments.....	12
3.2. Block Diagram of Test Setup	12
3.3. Power Line Conducted Emission Test Limits.....	12
3.4. Configuration of EUT on Test	13
3.5. Operating Condition of EUT.....	13
3.6. Test Procedure.....	13
3.7. Power Line Conducted Emission Test Results	13
4. RADIATED EMISSION TEST	15
4.1. Test Equipments.....	15
4.2. Block Diagram of Test Setup	16
4.3. Radiated Emission Limits	17
4.4. EUT Configuration on Test.....	18
4.5. Operating Condition of EUT.....	18
4.6. Test Procedure.....	18
4.7. Radiated Emission Test Results.....	20
5. Band Edge Compliance Test.....	90
5.1. Test Equipments	90
5.2. Limit	90
5.3. Test Procedure.....	90
5.4. Test Results	90
6. 6dB & 26dB & 99% Occupied Bandwidth Test	139
6.1. Test Equipments.....	139
6.2. Limit	139
6.3. Test Procedure.....	139
6.4. Test Results	140
7. OUTPUT POWER TEST	152
7.1. Test Equipments.....	152
7.2. Limit	152
7.3. Test Procedure.....	152
7.4. Test Results	153
8. SPECTRAL DENSITY TEST.....	162
8.1. Test Equipments.....	162
8.2. Limit	162
8.3. Test Procedure.....	162
8.4. Test Results	163
9. FREQUENCY STABILITY MEASUREMENT	172
9.1. Test Equipments.....	172
9.2. Limit	172

9.3. Test Procedure..... 172

9.4. Test Result..... 173

10. ANTENNA REQUIREMENT..... 183

10.1. Standard Applicable 183

10.2. Antenna Connected Construction 183

11. DEVIATION TO TEST SPECIFICATIONS..... 184

Appendix A. Setup Photographs

Appendix B. General Appearance of the EUT

Appendix C. Inside Configuration of the EUT

TEST REPORT

Applicant : SHARP Corporation
Manufacturer : SHARP Corporation
Product : Electronic paper display
FCC ID : APYBSC0005
(A) Model No. : EP-C251
(B) Test Voltage : AC 120V/50Hz

Tested for comply with:
FCC CFR47 Part 15 Subpart E

Test procedure used:
ANSI C63.10: 2020
KDB 789033 D02 General UNII Test Procedures New Rules v01r04

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to confirm comply with all the FCC Part 15 Subpart E requirements. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC and IC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1074. No modifications were required during testing to bring this product into compliance.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. government.

This report applies to single evaluation of one sample of above mentioned product and shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd.

Date of Test : Oct.27~Nov.13, 2023 Report of date: Nov.28, 2023

Prepared by : Jasmine Ning Reviewed by : Thomas Chen
Jasmine Ning / Assistant Thomas Chen / Assistant Manager



Approved & Authorized Signer : Signature: Sunny Lu
Sunny Lu / Manager

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207 FCC Part 15: 15.407(b)(6)	PASS
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.205 FCC Part 15.407(b)	PASS
Band Edge Compliance	FCC Part 15: 15.407(b) FCC Part 15.205	PASS
6dB&26dB&99% Bandwidth Test	FCC Part 15: 15.407(e)	PASS
Output Power Test	FCC Part 15: 15.407(a)(5)	PASS
Equivalent Isotropic Radiated Power Test	FCC Part 15: 15.407(h)(1)	N/A
Power Spectral Density Test	FCC Part 15: 15.407(a)	PASS
Frequency Stability	FCC Part 15: 15.407(a)	PASS
Antenna requirement	FCC Part 15: 15.407(g)	PASS
N/A is an abbreviation for Not Applicable		
Note 1: Measurement uncertainty affection to the result is not considered, the EUT is technically compliant with standard requirements.		

2. GENERAL INFORMATION

2.1. Description of Equipment Under Test

Applicant	SHARP Corporation
Applicant Address	1 Takumi-cho, Sakai-ku Sakai City Osaka 590-8522 Japan
Manufacturer	SHARP Corporation
Manufacturer Address	1 Takumi-cho, Sakai-ku Sakai City Osaka 590-8522 Japan
Factory	TPV Electronics (FuJian) Co., Ltd.
Factory Address	Rongqiao Economic and Technological Development Zone, Fuqing City, Fujian Province, P.R. China
Product	Electronic paper display
Model No.	EP-C251
FCC ID	APYBSC0005
Power Adapter	Manufacturer: DELTA ELECTRONICS, INC. M/N:ADP-100XB B Input: AC 100-240V 2.0A 50-60Hz Output: 5.0V $\overline{\text{---}}$ 3A, 15.0W / 9.0V $\overline{\text{---}}$ 3A 12.0V $\overline{\text{---}}$ 3A / 15.0V $\overline{\text{---}}$ 3A 20.0V $\overline{\text{---}}$ 5.0A, 100.0W DC Cable: Unshielded, Undetachable, 1.5m
Sample Type	Prototype production
Date of Receipt	Jun.21, 2023
Date of Test	Oct.27~Nov.13, 2023
Remark: This report only for WIFI 5GHz.	

2.2.Feature of Equipment Under Test

Product Feature & Specification	
Product	Electronic paper display
Model No.	EP-C251
Power Source	DC 12/15V
Bluetooth	
Radio	BDR +EDR; BLE
Frequency Range	2402-2480MHz
Type of Modulation	GFSK, $\pi/4$ DQPSK, 8DPSK
Data Rate	1Mbps, 2Mbps, 3Mbps
Quantity of Channels	79/40
Channel Separation	1MHz/2MHz
2.4GHz Wi-Fi	
Support Modes	802.11b/g/n20
Frequency Range	2412-2462MHz
Type of Modulation	802.11b(DSSS): CCK, QPSK, BPSK; 802.11g/n(OFDM): 64QAM,16QAM, QPSK, BPSK
Data Rate	802.11b: 1/2/5.5/11 Mbps; 802.11g: 6/9/12/18/24/36/48/54 Mbps; 802.11n: up to 75Mbps
Channel Separation	5MHz
5GHz Wi-Fi	
Support Modes	802.11a/n20/n40/ac20/ac40/ac80
Frequency Range	5180-5240MHz, 5260-5320MHz, 5500-5700MHz, 5745-5825MHz
Type of Modulation	802.11a/n (OFDM): QPSK, BPSK, 16QAM, 64QAM 802.11ac (OFDM): QPSK, BPSK, 16QAM, 64QAM,256QAM
Data Rate	802.11a: 6/9/12/18/24/36/48/54 Mbps; 802.11n: up to 150Mbps; 802.11ac: up to 433Mbps
Channel Separation	5MHz
Antenna System	
Type of Antenna	shrapnel Antenna
Antenna Number	1
Antenna Peak Gain	Bluetooth Peak Gain: 2.69dBi. DTS/DSS Band Peak Gain: 2.69dBi. U-NII-1 Band Peak Gain: 1.87dBi. U-NII-2A Band Peak Gain: 2.28dBi. U-NII-2C Band Peak Gain: 2.28dBi. U-NII-3 Band Peak Gain: 2.22dBi.

2.3.Test Information

A special test software(Ampak RFTTestTool,VER:7.0) was used to control EUT work in TX mode, and select test channel, wireless mode and data rate.


Tested mode, channel, and data rate information			
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)
IEEE 802.11a	6	CH36	5180
	6	CH40	5200
	6	CH48	5240
	6	CH52	5260
	6	CH60	5300
	6	CH64	5320
	6	CH100	5500
	6	CH116	5580
	6	CH140	5700
	6	CH149	5745
	6	CH157	5785
	6	CH165	5825
IEEE 802.11nHT20	MCS0	CH36	5180
	MCS0	CH40	5200
	MCS0	CH48	5240
	MCS0	CH52	5260
	MCS0	CH60	5300
	MCS0	CH64	5320
	MCS0	CH100	5500
	MCS0	CH116	5580
	MCS0	CH140	5700
	MCS0	CH149	5745
	MCS0	CH157	5785
	MCS0	CH165	5825
IEEE 802.11nHT40	MCS0	CH38	5190
	MCS0	CH46	5230
	MCS0	CH54	5270
	MCS0	CH62	5310
	MCS0	CH102	5510
	MCS0	CH110	5550
	MCS0	CH134	5670
	MCS0	CH151	5755
	MCS0	CH159	5795

IEEE 802.11acVHT20	MCS0	CH36	5180
	MCS0	CH40	5200
	MCS0	CH48	5240
	MCS0	CH52	5260
	MCS0	CH60	5300
	MCS0	CH64	5320
	MCS0	CH100	5500
	MCS0	CH116	5580
	MCS0	CH140	5700
	MCS0	CH149	5745
	MCS0	CH157	5785
	MCS0	CH165	5825
IEEE 802.11acVHT40	MCS0	CH38	5190
	MCS0	CH46	5230
	MCS0	CH54	5270
	MCS0	CH62	5310
	MCS0	CH102	5510
	MCS0	CH110	5550
	MCS0	CH134	5670
	MCS0	CH151	5755
	MCS0	CH159	5795
IEEE 802.11acVHT80	MCS0	CH42	5210
	MCS0	CH58	5290
	MCS0	CH106	5530
	MCS0	CH155	5775
Note 1: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.			

2.4.Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number
1.	Notebook	N/A	acer	ZOW	N/A
Power Cord(3C): Unshielded, Detachabled, 1.8m Power Adapter: Manufacturer: Lite-On, M/N: PA-1900-32 Data Cable: Shielded, Undetectable, 4.0m(Bond one ferrite core)					

2.5.Block diagram of connection between the EUT and simulators



(EUT: Electronic paper display)

2.6. Test Facility

Site Description

Name of Firm

Audix Technology (Shenzhen) Co., Ltd.
: No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

EMC Lab.

Certificated by ISED, Canada
: Company Number: 5183A
CAB identifier: CN0034
Valid Date: Mar.31, 2024

Certificated by FCC, USA
Designation No.: CN5022
Valid Date: Mar.31, 2024

Accredited by NVLAP, USA
NVLAP Code: 200372-0
Valid Date: Mar.31, 2024

2.7. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	$\pm 2.6\text{dB}$ (150kHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	$\pm 3.8\text{dB}$ (30~200MHz, Polarization: H)
	$\pm 3.8\text{dB}$ (30~200MHz, Polarization: V)
	$\pm 4.0\text{dB}$ (200M~1GHz, Polarization: H)
	$\pm 4.0\text{dB}$ (200M~1GHz, Polarization: V)
Uncertainty for Radiation Emission test in 3m chamber	$\pm 4.0\text{dB}$ (1~6GHz, Distance: 3m)
	$\pm 4.0\text{dB}$ (6~40GHz, Distance: 3m)
Uncertainty for Radiated Spurious Emission test in RF chamber	$\pm 3.7\text{dB}$ (30MHz~1000MHz)
	$\pm 3.3\text{dB}$ (1GHz~26.5MHz)
Uncertainty for Power density test	$\pm 2.0\text{dB}$
Uncertainty for Output power test	$\pm 0.8\text{dB}$
Uncertainty for Bandwidth test	$\pm 4.6\%$
Uncertainty for DC power test	$\pm 0.1\%$
Uncertainty for test site temperature and humidity	$\pm 0.6^{\circ}\text{C}$
	$\pm 3\%$


3. POWER LINE CONDUCTED EMISSION TEST

3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	1# Shielding Room	AUDIX	N/A	N/A	Nov.09,22	5 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100842	Apr.01,23	1 Year
3.	L.I.S.N.#1	Rohde & Schwarz	ENV216	102160	Jun.25,23	1 Year
4.	L.I.S.N.#2	Kyoritsu	KNW-407	8-1628-5	Apr.01,23	1 Year
5.	RF Cable	Eastsheep	RG223	190424	Sep.15,23	1 Year
6.	Terminator	Hubersuhner	50Ω	No.1	Apr.02,23	1 Year
7.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.

3.2. Block Diagram of Test Setup

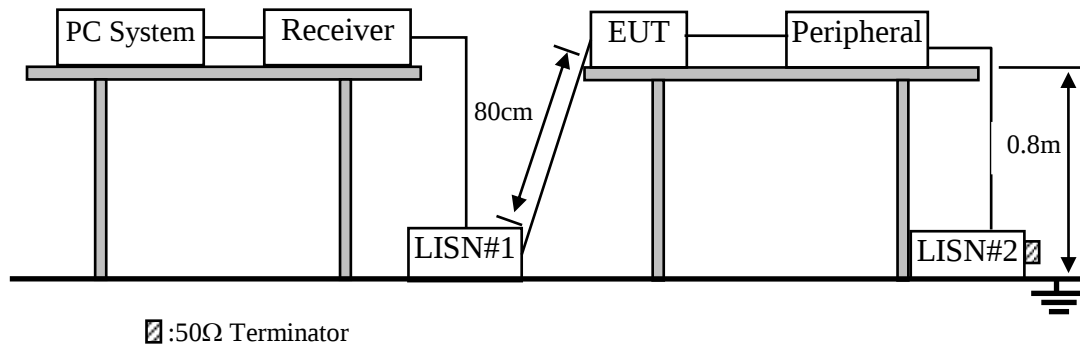

3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

- Notes:
- * Decreasing linearly with logarithm of frequency.
 - The lower limits shall apply at the transition frequencies.
 - Emission Level (dBμV) = Factor (L.I.S.N.) (dB) + Cable Loss (dB) + Reading (Receiver) (dBμV)

3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4.1. Electronic paper display (EUT)

Model No. : EP-C251

Serial No. : N/A

3.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.4.

3.5. Operating Condition of EUT

3.5.1. Setup the EUT and simulator as shown as Section 3.2.

3.5.2. Turn on the power of all equipments.

3.5.3. PC run test software to control EUT work in Tx mode.

3.6. Test Procedure


The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via PC connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.7. Power Line Conducted Emission Test Results


PASS. (All emissions not reported below are too low against the prescribed limits.)

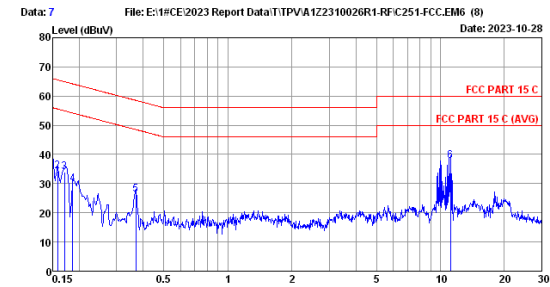

Trace: (Discrete)
 Site no :1# CE
 Dis./Lism :2023 ENV216-L
 Limit :FCC PART 15 C
 Env./Ins. :21.6°C/52%
 Power Rating :AC 120V/60Hz
 Test Mode :Wifi5G TX Mode
 Data No :7
 Engineer :Sucy

No	Freq (MHz)	LISM Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.150	9.62	0.01	27.76	37.39	66.00	28.61	QP
2	0.158	9.62	0.01	24.57	34.20	65.56	31.36	QP
3	0.170	9.62	0.01	24.40	34.03	64.94	30.91	QP
4	0.186	9.62	0.01	20.05	29.68	64.20	34.52	QP
5	0.369	9.60	0.01	16.53	26.14	58.52	32.38	QP
6	11.139	9.91	0.06	27.70	37.67	60.00	22.33	QP

Remarks: 1.Emission Level=LISM Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

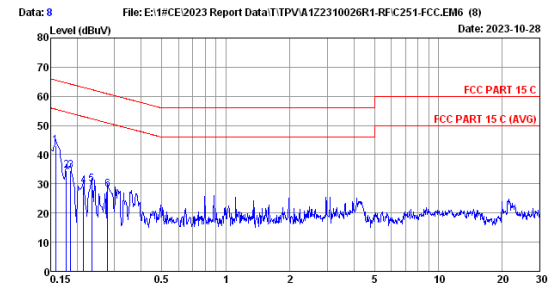

Trace: (Discrete)
 Site no :1# CE
 Dis./Lism :2023 ENV216-N
 Limit :FCC PART 15 C
 Env./Ins. :21.6°C/52%
 Power Rating :AC 120V/60Hz
 Test Mode :Wifi5G TX Mode
 Data No :8
 Engineer :Sucy

No	Freq (MHz)	LISM Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.158	9.69	0.01	33.45	43.15	65.56	22.41	QP
2	0.178	9.70	0.01	24.96	34.67	64.59	29.92	QP
3	0.186	9.70	0.01	24.84	34.55	64.20	29.65	QP
4	0.214	9.70	0.01	19.50	29.21	63.05	33.84	QP
5	0.234	9.70	0.01	20.24	29.95	62.30	32.35	QP
6	0.277	9.71	0.01	18.38	28.10	60.90	32.80	QP

Remarks: 1.Emission Level=LISM Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

4. RADIATED EMISSION TEST

4.1. Test Equipments

4.1.1. For frequency range 30 MHz ~1000MHz (In 3m Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3m Chamber(NSA)	AUDIX	N/A	N/A	Aug.11,22	5 Year
2.	3m Chamber(SE)	AUDIX	N/A	N/A	Sep.16,22	5 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV30	103670	Jun.25,23	1 Year
4.	Tri-log-Broadband Antenna	SCHWARZBECK	VULB 9168	429	Oct.10,23	1 Year
5.	NSA Cable	HUBER+SUHNER	CFD400NL-LW	No.3+190411	Sep.20,23	1 Year
6.	Coaxial Switch	Anritsu	MP59B	6201397223	Apr.02,23	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESR3	101931	Apr.01,23	1 Year
8.	Amplifier	HP	8447D	2944A11159	Apr.02,23	1 Year
9.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.


4.1.2. For frequency range 1GHz~40GHz (In 3m Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3mChamber(Svswr)	AUDIX	N/A	N/A	Aug.09,22	5 Year
2.	3mChamber(SE)	AUDIX	N/A	N/A	Sep.16,22	5 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Apr.01,23	1 Year
4.	Amplifier	Agilent	83017A	MY53270084	Sep.20,23	1 Year
5.	RF Cable	EMCI	EMC104-SM-SM-15000	190407	Jun.25,23	1 Year
6.	Test Software	AUDIX	e3	6.100913a	N/A	N/A
7.	Horn Antenna	ETC	MCTD 1209	DRH15F03006	Aug.23,23	1 Year


Note: N/A means Not applicable.

4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

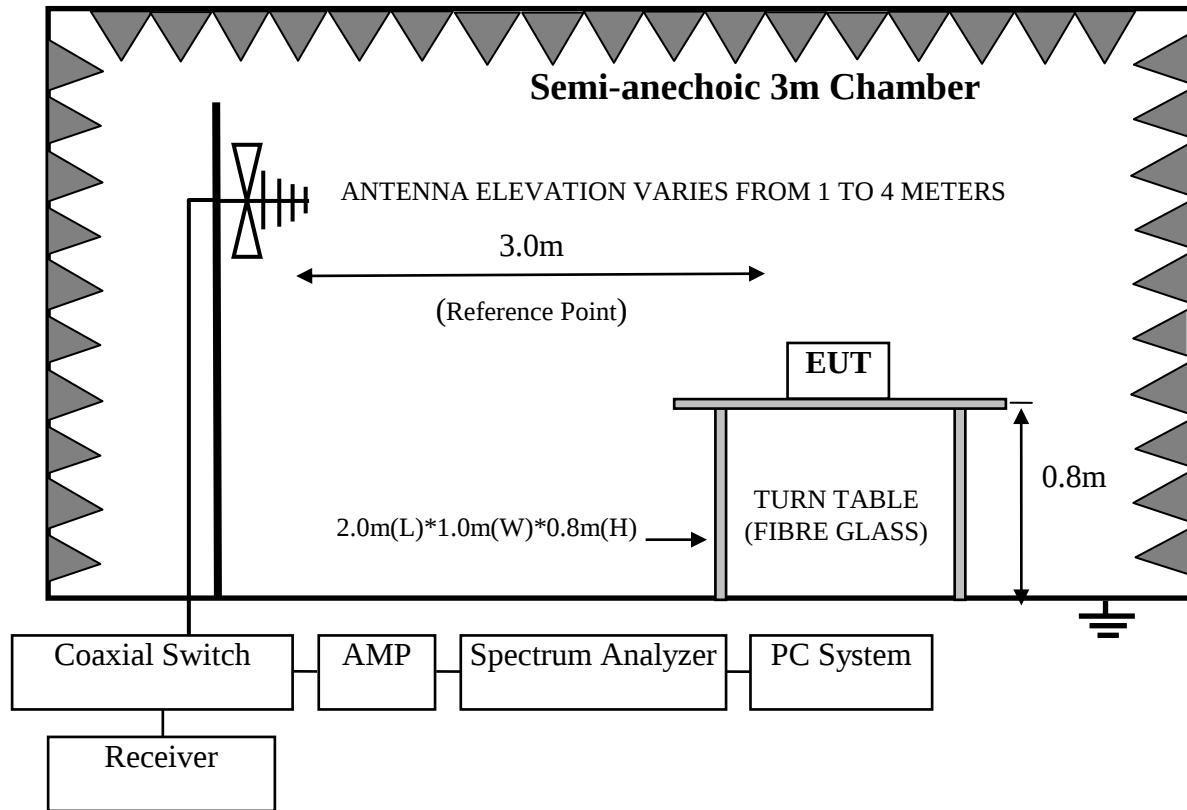

For frequency range 1GHz-40GHz

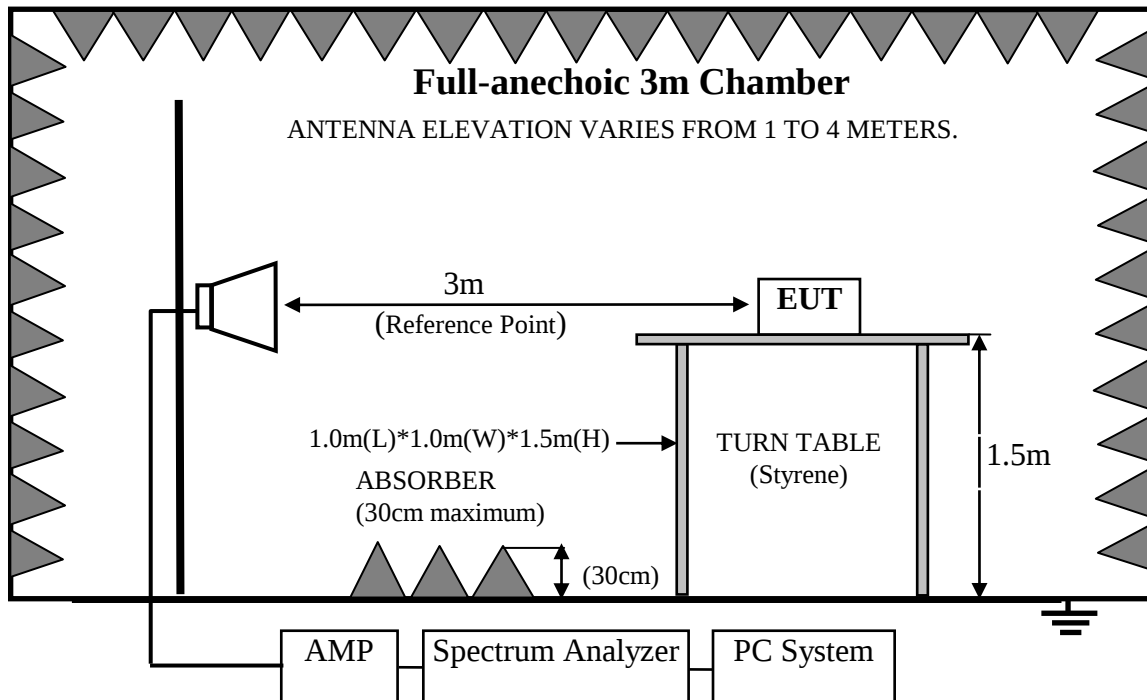

4.3.Radiated Emission Limits

For transmitters operating in the 5.15-5.25 GHz; 5.25-5.35GHz; 5.47-5.725GHz, 5.725-5.850GHz band: all emissions outside of those band shall not exceed an EIRP of -27 dBm/MHz. Unwanted emissions below 1 GHz and those emissions appearing within 15.205 restricted frequency bands must comply with the general field strength limits set forth in Section 15.209

4.3.1.15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Remarks : (1) Emission level $\text{dB}\mu\text{V} = 20 \log$ Emission level $\mu\text{V/m}$

(2)Emission Level ($\text{dB}\mu\text{V/m}$) = Reading (Receiver) ($\text{dB}\mu\text{V}$) + Antenna Factor (dB/m) + Cable Loss (dB)(Below 1000MHz)

Emission Level ($\text{dB}\mu\text{V/m}$) = Reading (Spectrum) ($\text{dB}\mu\text{V}$) + Antenna Factor (dB/m) – Amp Factor (dB) + Cable Loss (dB)(Above 1000MHz)

(3) The smaller limit shall apply at the cross point between two frequency bands.

(4) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.3.2.15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

4.4.EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

4.4.1.Electronic paper display (EUT)

Model No. : EP-C251

Serial No. : N/A

4.4.2.Support Equipment: As Tested Supporting System Details, in Section 2.4.

4.5.Operating Condition of EUT

4.5.1.Setup the EUT and simulator as shown as Section 4.2.

4.5.2.Turn on the power of all equipments.

4.5.3.Let EUT work in Tx mode.

4.6.Test Procedure

Frequency below 30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 regulation.

Frequency above 30MHz:

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)*2.4m(W)*0.3m(H) on the ground . The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it.EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horn antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10 on radiated emission Test.

For emissions below 1GHz and those emissions appearing within 15.205 restricted frequency bands use below procedure:

The bandwidth of the EMI test receiver (R&S ESR3) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

Maximum Peak emission levels are measured by setting the analyzer as follows:

- (a) RBW = 1 MHz.
- (b) VBW $\geq$ 3 MHz.
- (c) Detector = Peak.
- (d) Sweep time = auto.
- (e) Trace mode = max hold.
- (f) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle. For example, at 50% duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

Maximum Average emission levels are measured by setting the analyzer as follows:

- (a) RBW = 1 MHz.
- (b) VBW $\geq$ 3 MHz.
- (c) Detector = power averaging (rms), if $\text{span}/(\# \text{ of points in sweep}) \leq \text{RBW}/2$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, the detector mode shall be set to peak.
- (d) Averaging type = power averaging (rms)
As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
- (e) Sweep time = auto.
- (f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, the number of traces shall be increased by a factor of $1/x$, where x is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—rather than turning on and off with the transmit cycle, at least 100 traces shall be averaged.)
- (g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, a correction factor shall be added to the measurement results prior to comparing to the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
 - If power averaging (rms) mode was used in step (iv) above, the correction factor is $10 \log (1/x)$, where x is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB must be added to the measured emission levels.
 - If linear voltage averaging mode was used in step (iv) above, the correction factor is $20 \log (1/x)$, where x is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB must be added to the measured emission levels.
 - If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning on and off with the transmit cycle, no duty cycle correction is required for that emission.

For the emissions above 1GHz and not appearing within 15.205 restricted frequency bands use below procedure:

- (1).The maximum emission at 3m distance was measured and recorded with receive antenna in both vertical and horizontal by rotating the turntable and by lowering the receive antenna.
- (2).The EUT was then removed and replaced with a substitution antenna in the same position and the substitution antenna must have the same polarization with the receive antenna.
- (3). A signal which have the same frequency obtained in step 2 was fed to the substitution, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver, the level of the signal generator was adjusted until the measured field strength level in step 2 was obtained, recorded the level of the signal generator.
- (4).Repeated step 4 with both antenna polarizations
- (5).The spurious emissions is equal to the power supplied by the signal generator and corrections due to the gain of the substitution antenna and the cable loss between the signal generator and the substitution antenna. or use procedure (6).
- (6). Per KDB789033 clause H 2)d).if the test distance is 3m,the $EIRP(dBm) = E(dB\mu V/m) - 95.2$
Get the result of all unwanted emission outside the restricted band is less than the -27dBm/MHz.

We had checked frequency range that is 30MHz to 10th harmonic (40GHz) and no any emissions were found from 18GHz to 40GHz, so the radiated emission from 18GHz to 40GHz were not record.

4.7.Radiated Emission Test Results

PASS.


All the emissions from 30MHz to 1 GHz were comply with 15.209 limits.

All other emission comply with 15.407 (b)(1) requirements.

Note: The emissions (9kHz~30MHz) not reported for there is no emission be found.


Duty cycle

11 a

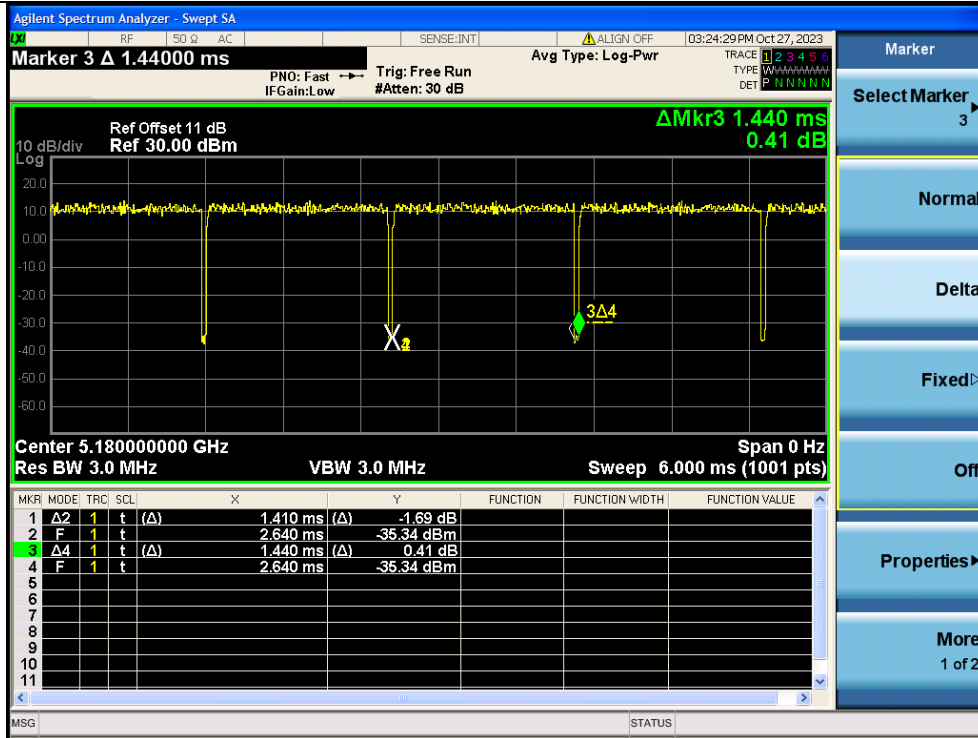


Note: The duty cycle factor is 0.

11n HT20

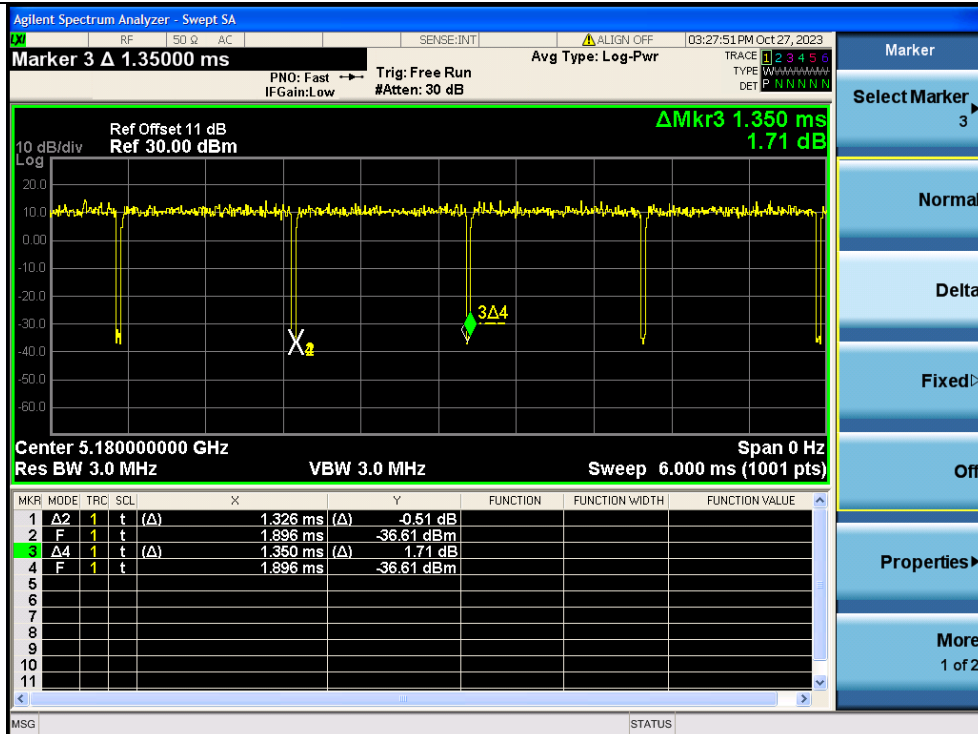


Note: The duty cycle factor is 0.

11n HT40

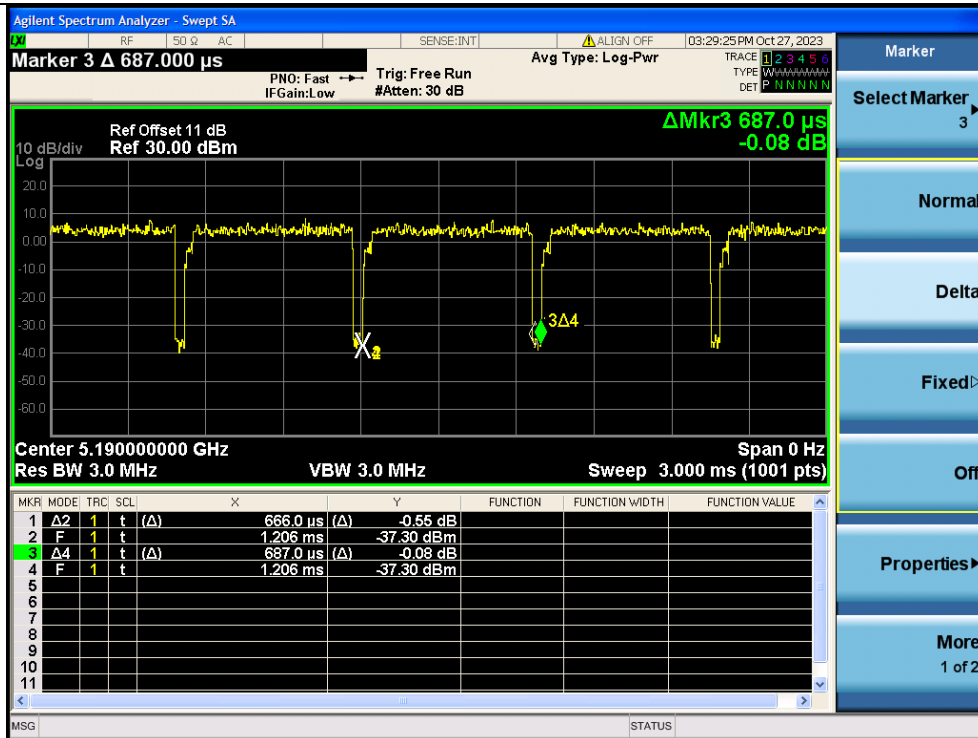


Note: The duty cycle factor is 0.18.

11ac VHT20

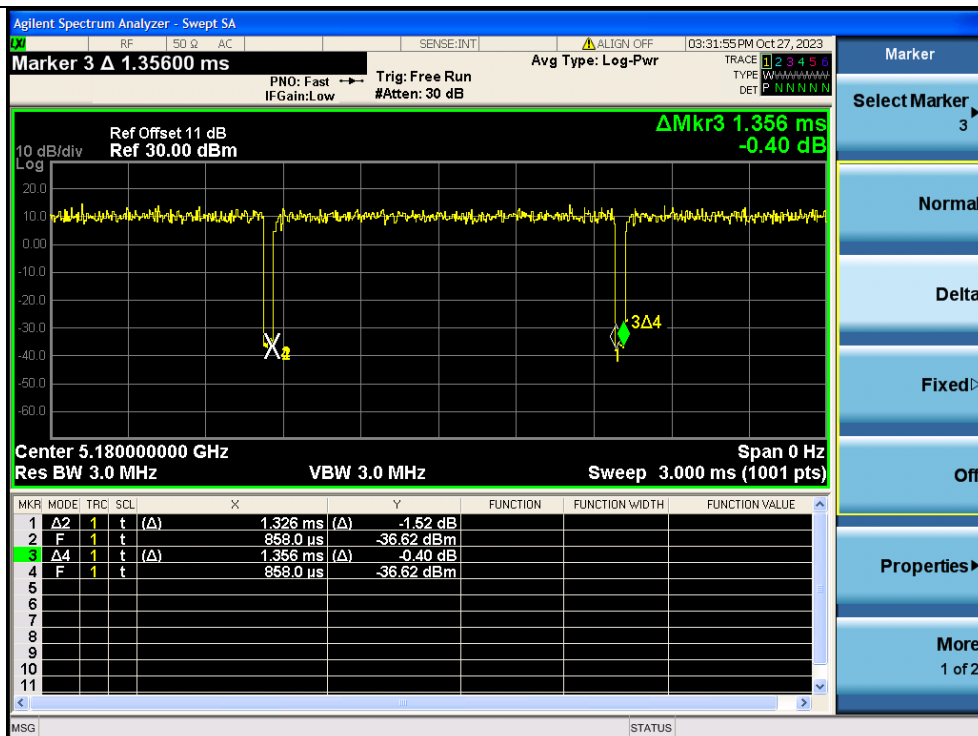


Note: The duty cycle factor is 0.

11ac VHT40

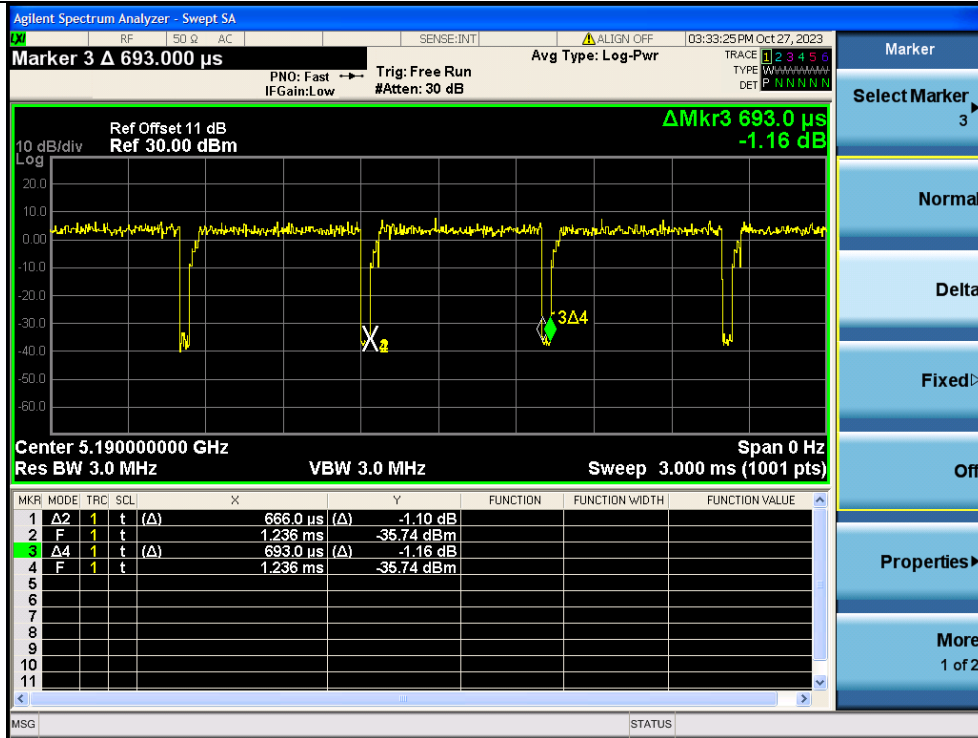


Note: The duty cycle factor is 0.18.

11ac VHT80

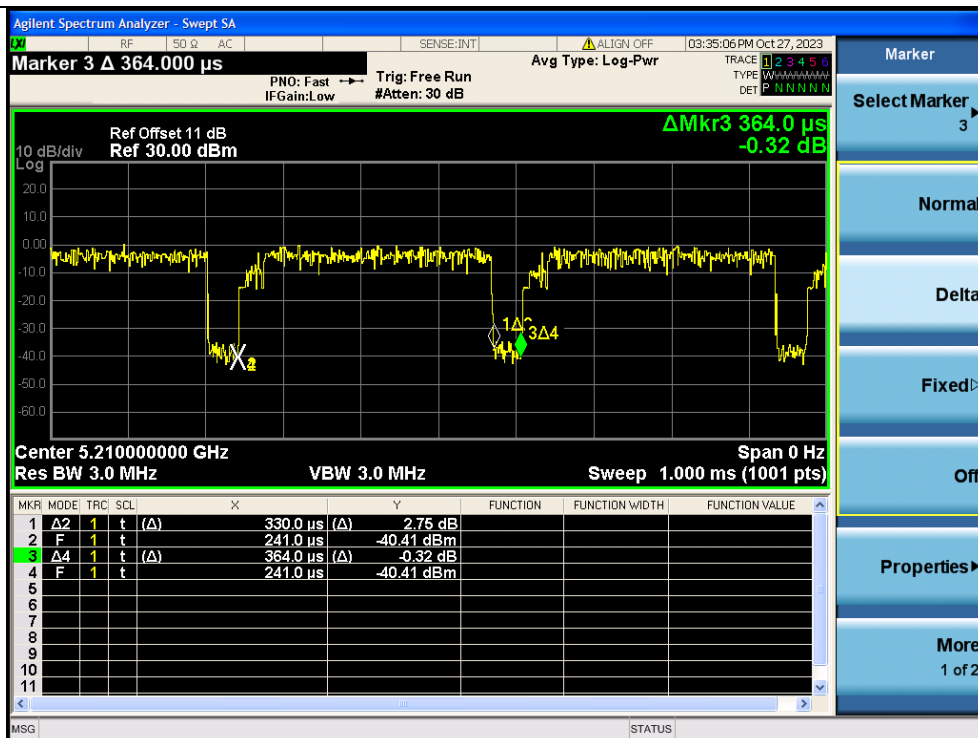


Note: The duty cycle factor is 0.41.

Frequency: 30MHz~1GHz

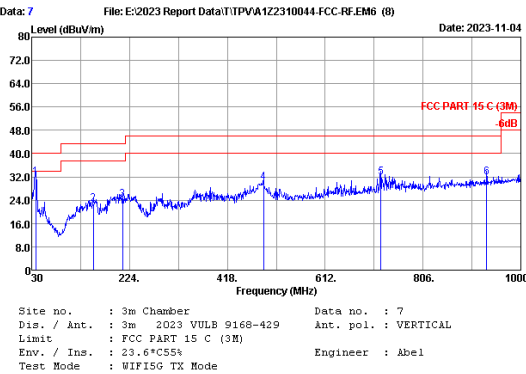

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	37.760	19.18	0.55	42.37	31.82	40.00	8.18	QP
2	152.220	19.40	1.02	31.99	22.72	43.50	20.78	QP
3	210.420	15.60	1.21	36.85	24.33	43.50	19.17	QP
4	489.780	23.50	1.81	34.71	30.16	46.00	15.84	QP
5	722.580	27.05	2.25	31.92	31.81	46.00	14.19	QP
6	932.100	29.94	2.70	27.74	31.91	46.00	14.09	QP



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

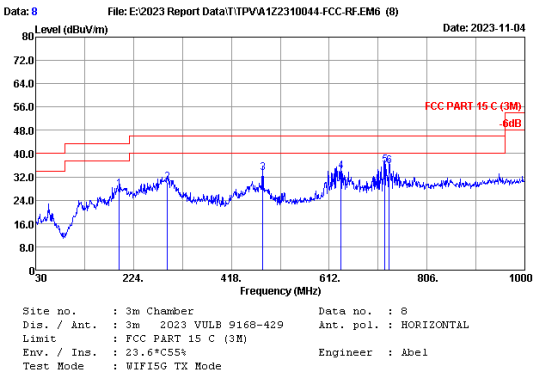

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	195.870	16.41	1.15	39.61	27.75	43.50	15.75	QP
2	290.930	19.22	1.40	38.60	30.19	46.00	15.81	QP
3	480.080	23.40	1.79	38.11	33.48	46.00	12.52	QP
4	635.280	26.40	2.13	35.02	33.92	46.00	12.08	QP
5	722.580	27.05	2.25	36.03	35.92	46.00	10.08	QP
6	731.310	27.45	2.27	35.32	35.67	46.00	10.33	QP



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~18GHz U-NII-1 Band:

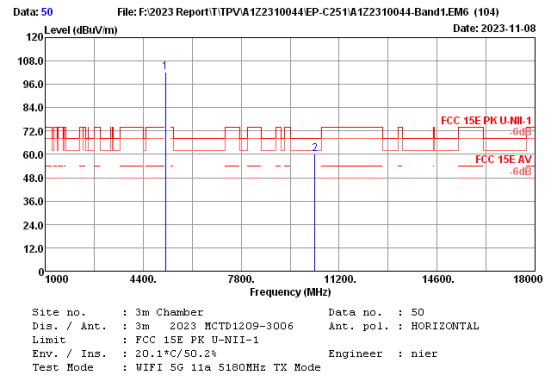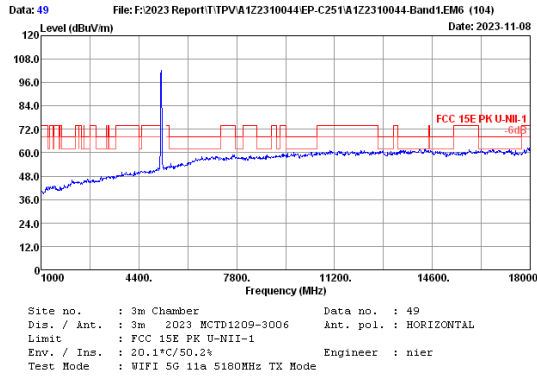

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.00	32.50	6.67	96.76	33.66	102.27	68.20	8.02	Peak
2	10360.00	38.36	8.17	47.60	33.95	60.18	68.20	8.02	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

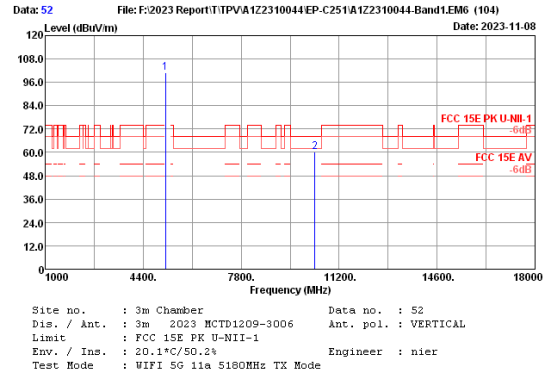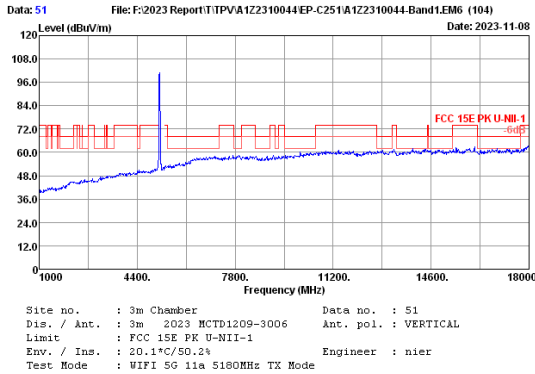

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.00	32.50	6.67	95.23	33.66	100.74	68.20	7.89	Peak
2	10360.00	38.36	8.17	47.73	33.95	60.31	68.20	7.89	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

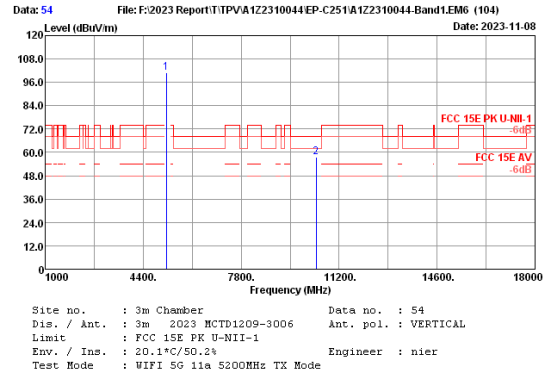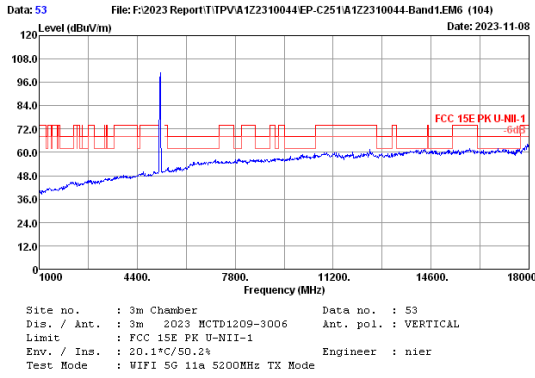

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	32.50	6.68	95.24	33.66	100.76	68.20	10.41	Peak
2	10400.00	38.40	8.18	45.12	33.91	57.79	68.20	10.41	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

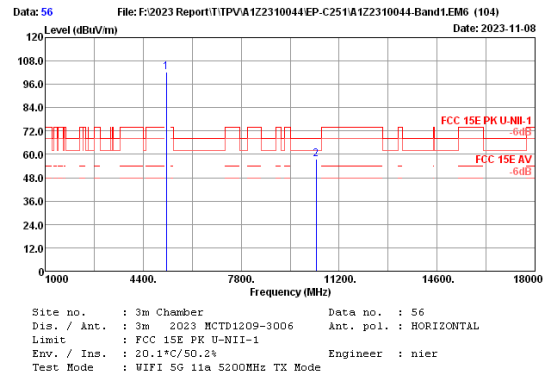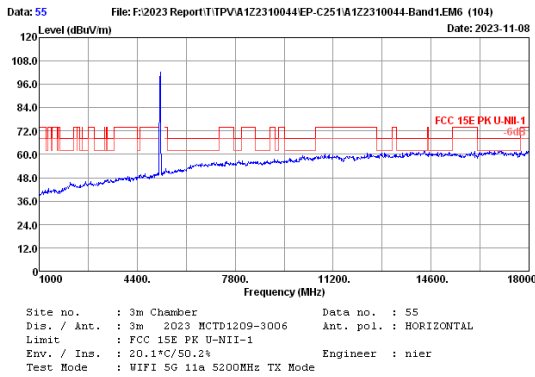

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	32.50	6.68	96.58	33.66	102.10	68.20	10.78	Peak
2	10400.00	38.40	8.18	44.75	33.91	57.42	68.20	10.78	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

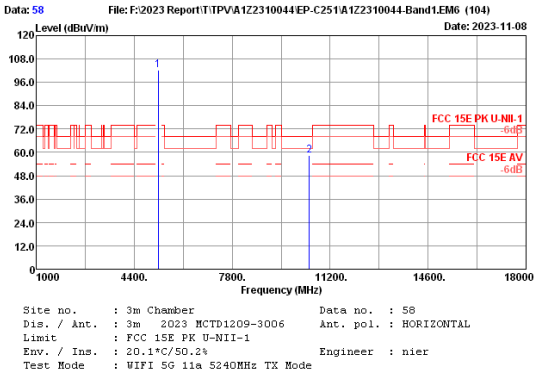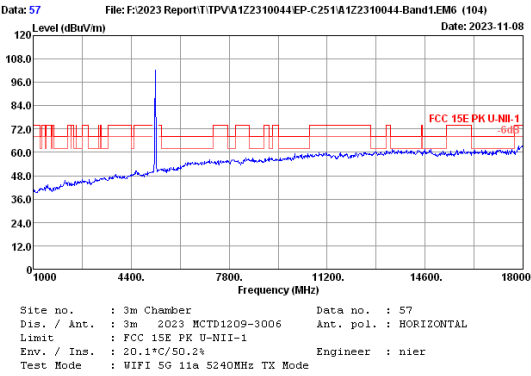

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.00	32.66	6.70	96.62	33.65	102.33	68.20	9.84	Peak
2	10480.00	38.40	8.20	45.62	33.86	58.36	68.20	9.84	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

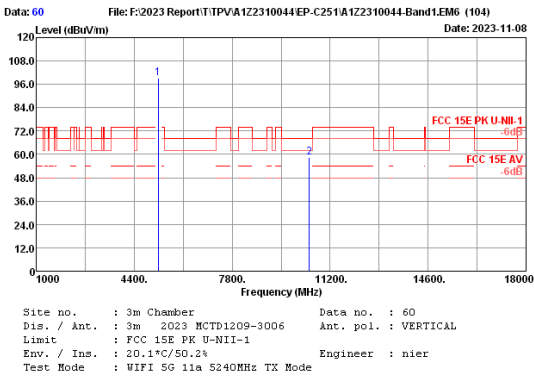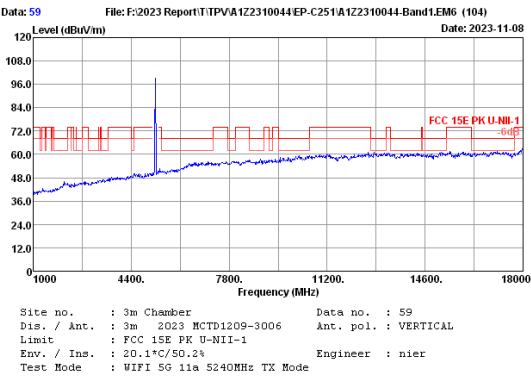

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.00	32.66	6.70	93.59	33.65	99.30	68.20	9.90	Peak
2	10480.00	38.40	8.20	45.56	33.86	58.30	68.20	9.90	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

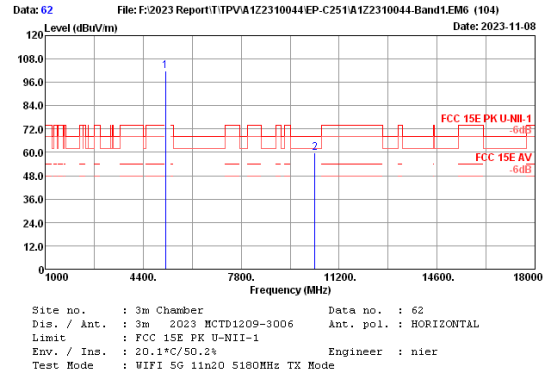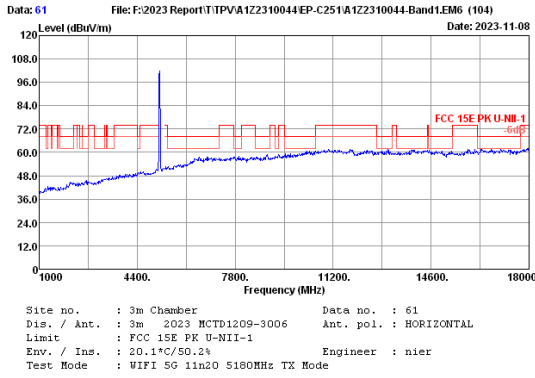

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.00	32.50	6.67	96.20	33.66	101.71	68.20	8.43	Peak
2	10360.00	38.36	8.17	47.19	33.95	59.77	68.20	8.43	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

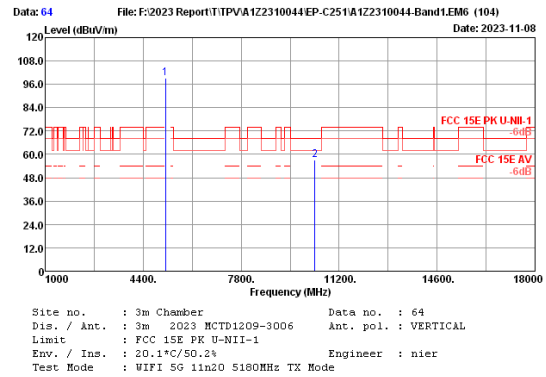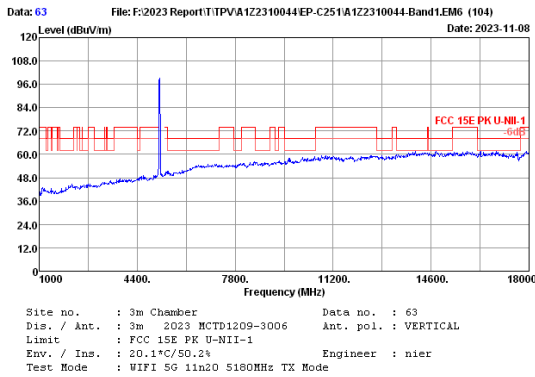

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.00	32.50	6.67	93.66	33.66	99.17	68.20	11.24	Peak
2	10360.00	38.36	8.17	44.38	33.95	56.96	68.20	11.24	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

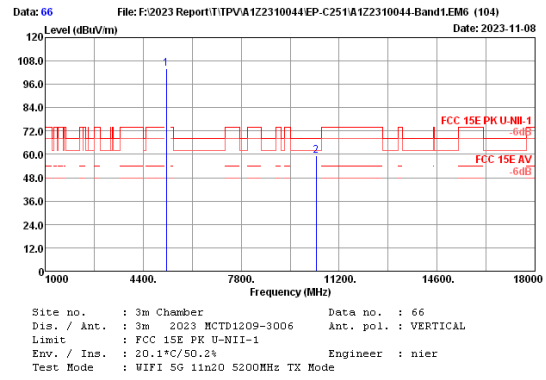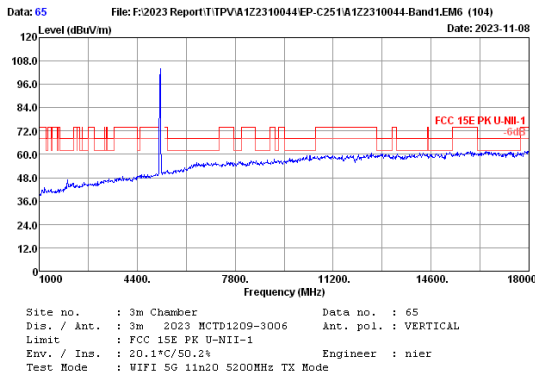

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	32.50	6.68	98.64	33.66	104.16	68.20	8.90	Peak
2	10400.00	38.40	8.18	46.63	33.91	59.30	68.20	8.90	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

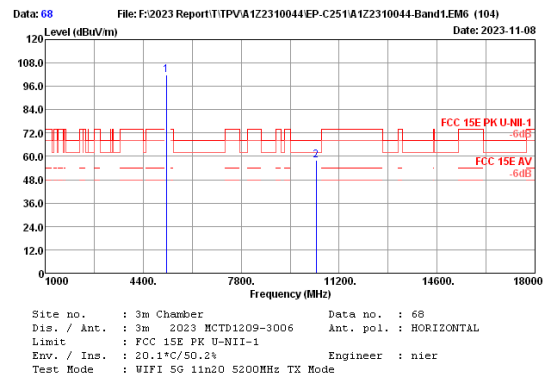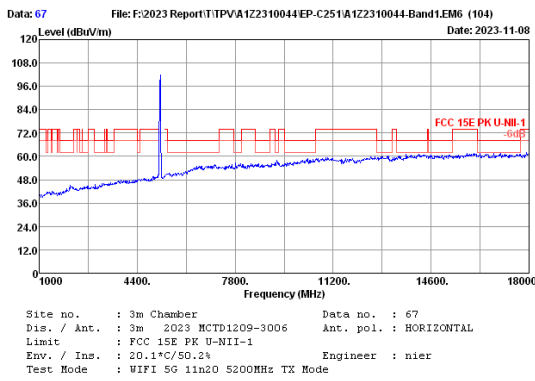

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	32.50	6.68	96.37	33.66	101.89	68.20	10.23	Peak
2	10400.00	38.40	8.18	45.30	33.91	57.97	68.20	10.23	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

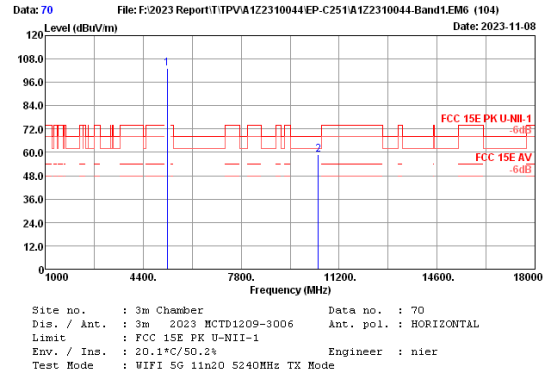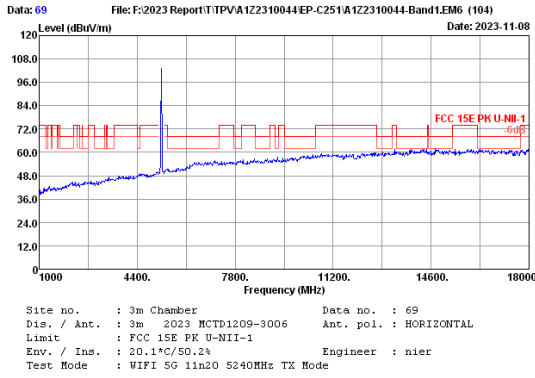

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.00	32.66	6.70	97.41	33.65	103.12	68.20	9.15	Peak
2	10480.00	38.40	8.20	46.31	33.86	59.05	68.20	9.15	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

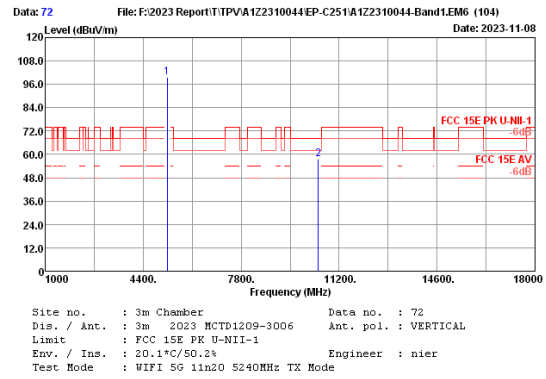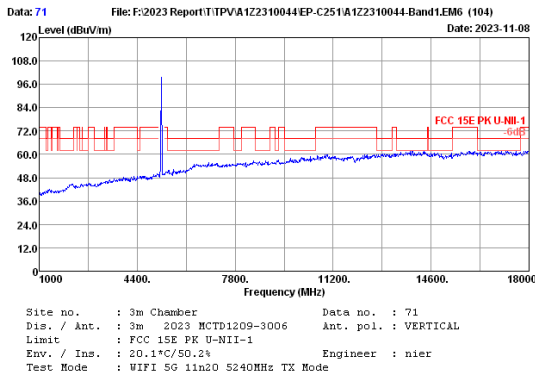

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.00	32.66	6.70	93.82	33.65	99.53	68.20	10.67	Peak
2	10480.00	38.40	8.20	44.79	33.86	57.53	68.20	10.67	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

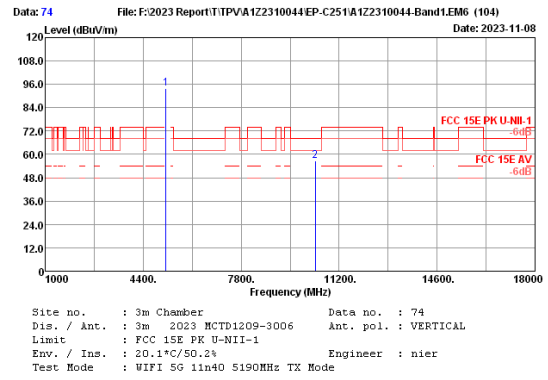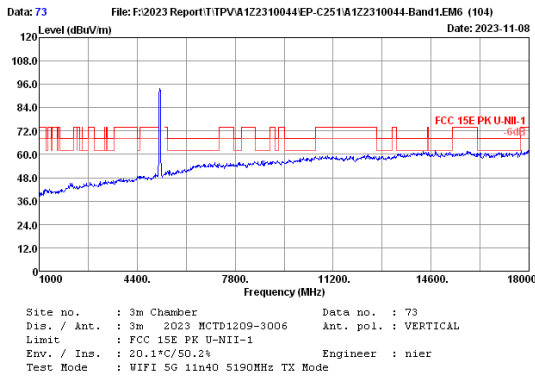

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5190.00	32.50	6.68	88.15	33.66	93.67	68.20	11.33	Peak
2	10380.00	38.38	8.18	44.24	33.93	56.87	68.20	11.33	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

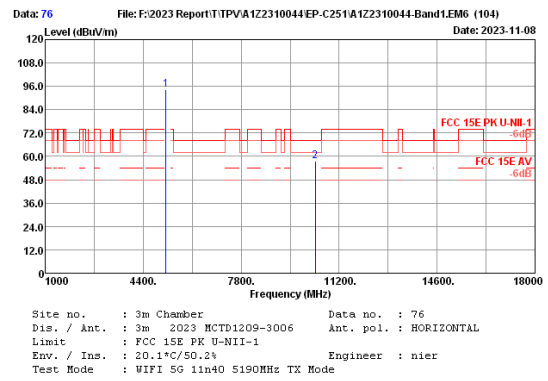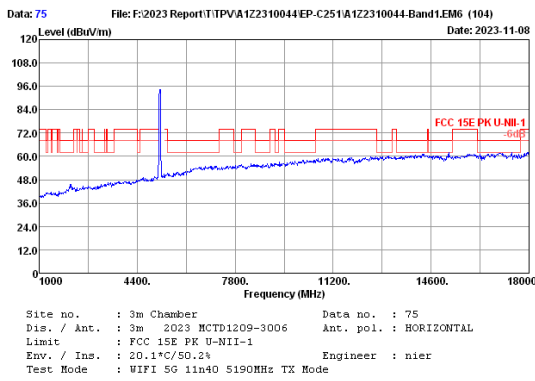

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5190.00	32.50	6.68	88.79	33.66	94.30	68.20	10.64	Peak
2	10380.00	38.38	8.18	44.93	33.93	57.56	68.20	10.64	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

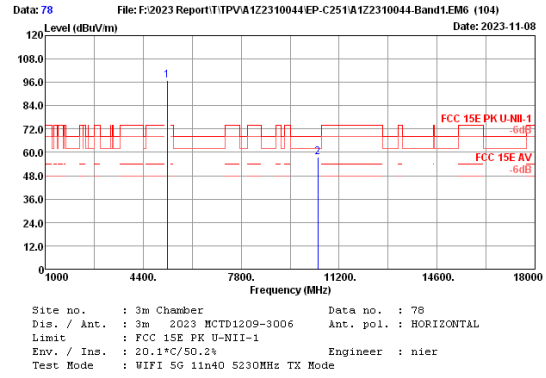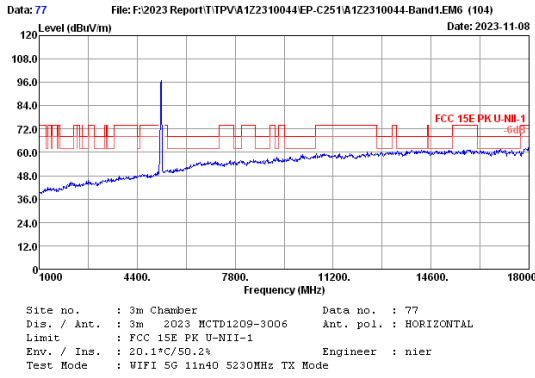

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5230.00	32.62	6.69	91.12	33.65	96.78	68.20	10.59	Peak
2	10460.00	38.40	8.19	44.90	33.88	57.61	68.20	10.59	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

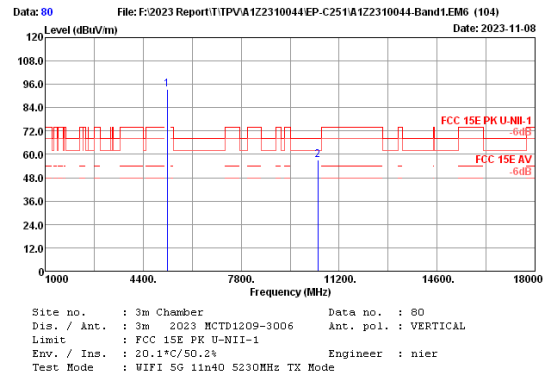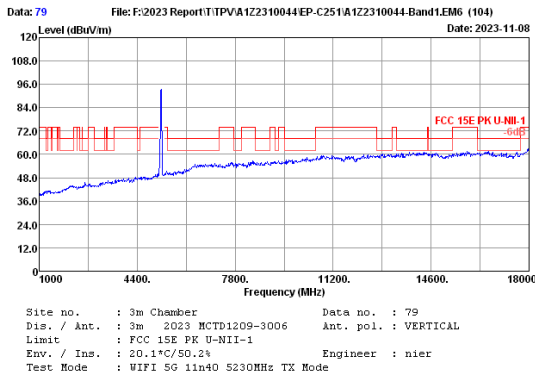

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5230.00	32.62	6.69	87.79	33.65	93.45	68.20	11.20	Peak
2	10460.00	38.40	8.19	44.29	33.88	57.00	68.20	11.20	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

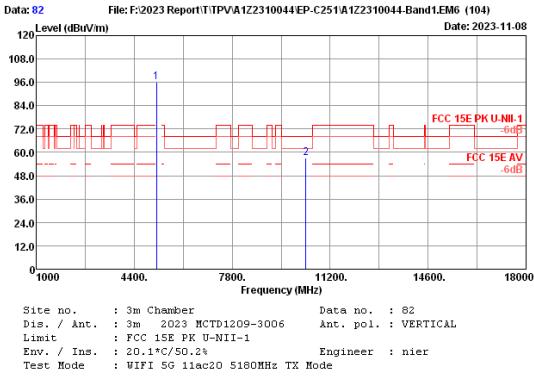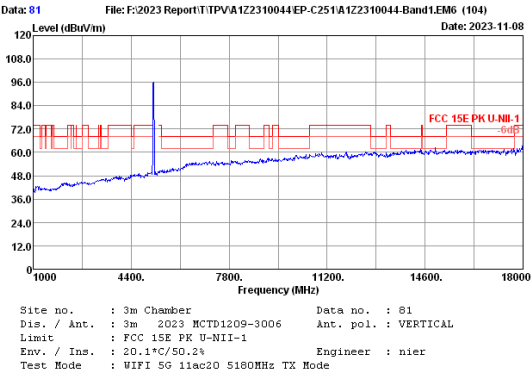

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.00	32.50	6.67	90.41	33.66	95.92	68.20	11.04	Peak
2	10360.00	38.36	8.17	44.58	33.95	57.16	68.20	11.04	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

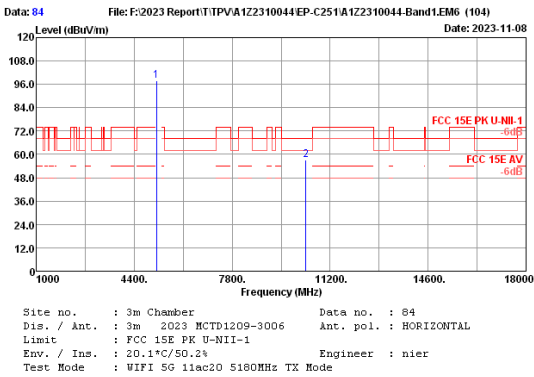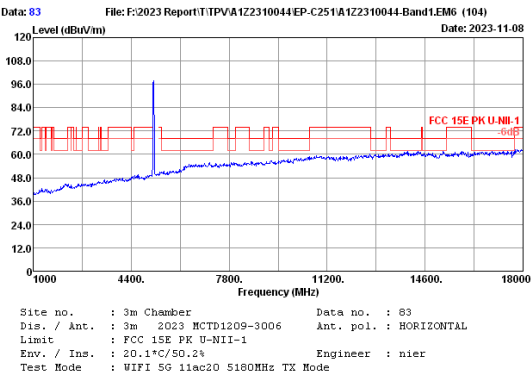

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.00	32.50	6.67	92.15	33.66	97.66	68.20	11.05	Peak
2	10360.00	38.36	8.17	44.57	33.95	57.15	68.20	11.05	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

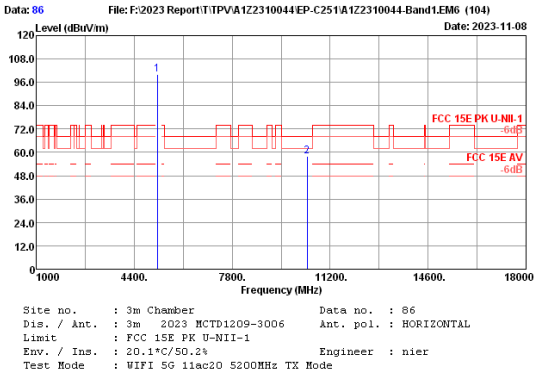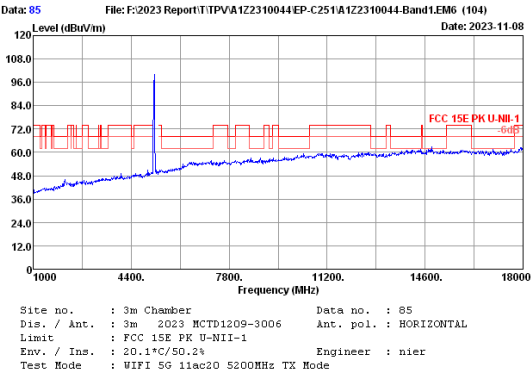

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	32.50	6.68	94.41	33.66	99.93	68.20	10.00	Peak
2	10400.00	38.40	8.18	45.53	33.91	58.20	68.20	10.00	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

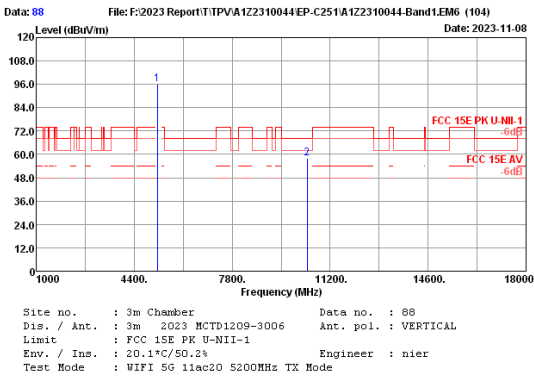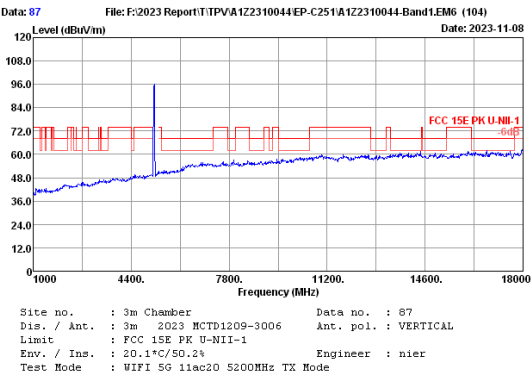

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	32.50	6.68	90.44	33.66	95.96	68.20	10.15	Peak
2	10400.00	38.40	8.18	45.38	33.91	58.05	68.20	10.15	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

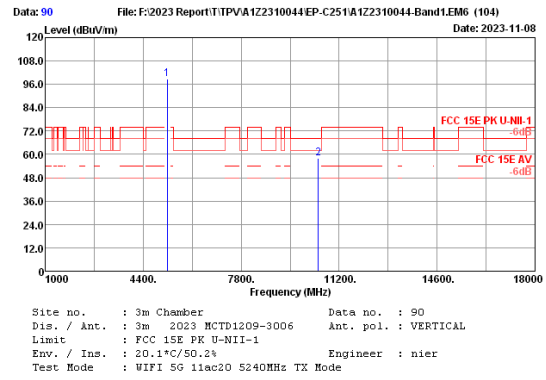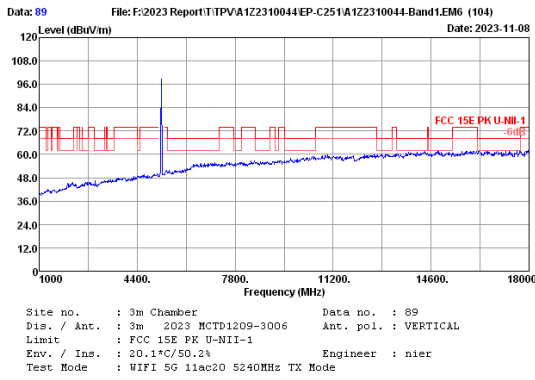

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.00	32.66	6.70	93.24	33.65	98.95	-----	-----	Peak
2	10480.00	38.40	8.20	45.40	33.86	58.14	68.20	10.06	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

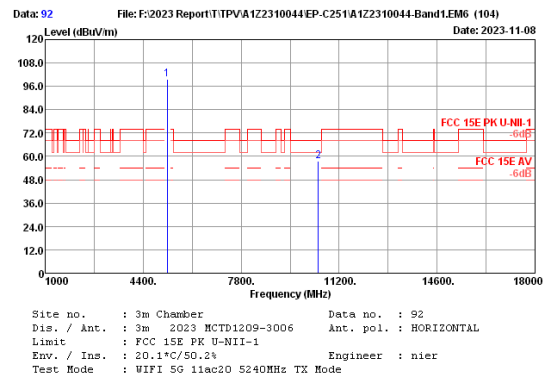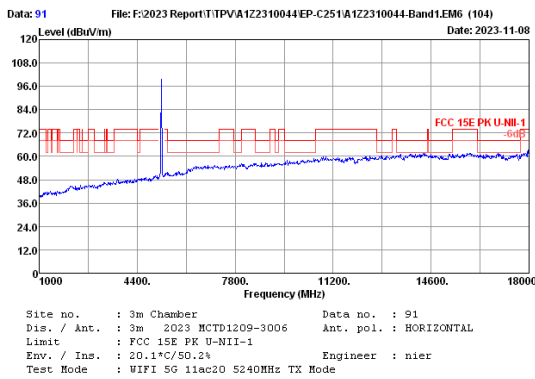

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.00	32.66	6.70	93.71	33.65	99.42	-----	-----	Peak
2	10480.00	38.40	8.20	44.65	33.86	57.39	68.20	10.81	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

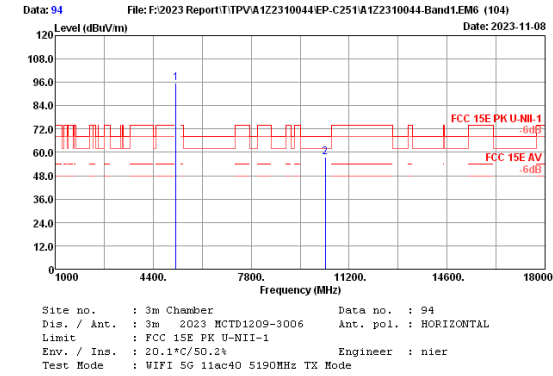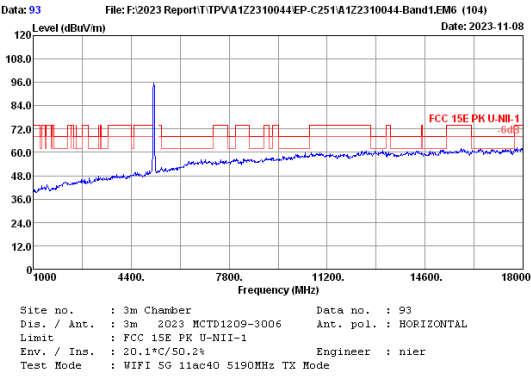

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5190.00	32.50	6.68	90.24	33.66	95.76	68.20	10.68	Peak
2	10380.00	38.38	8.18	44.89	33.93	57.52	68.20	10.68	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

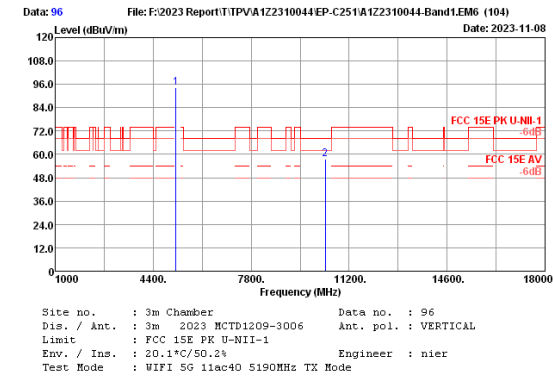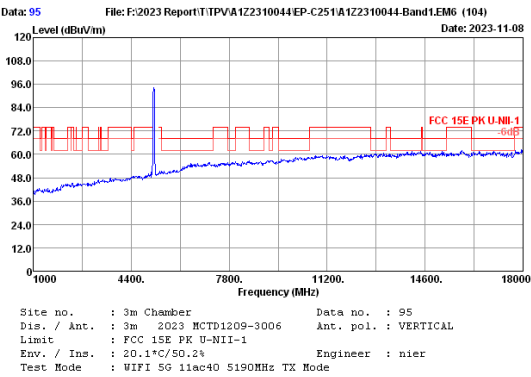

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5190.00	32.50	6.68	88.66	33.66	94.19	68.20	10.66	Peak
2	10380.00	38.38	8.18	44.91	33.93	57.54	68.20	10.66	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

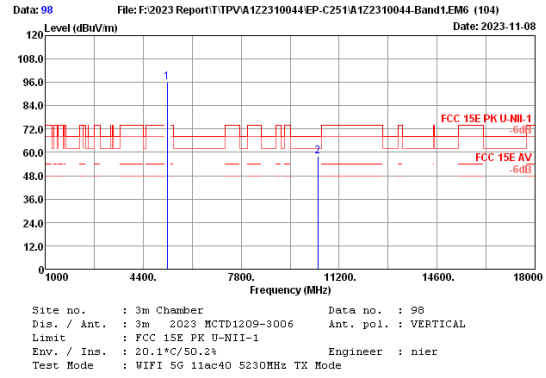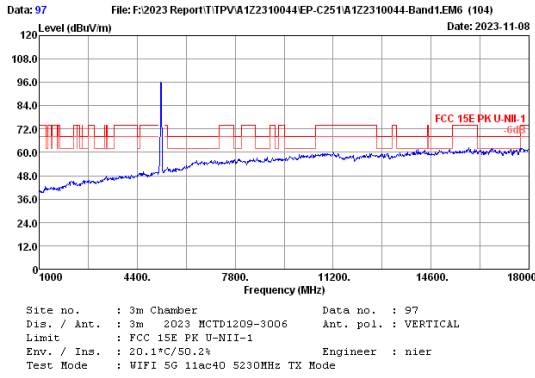

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5230.00	32.62	6.69	90.45	33.65	96.11	68.20	10.18	Peak
2	10460.00	38.40	8.19	45.31	33.88	58.02	68.20	10.18	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

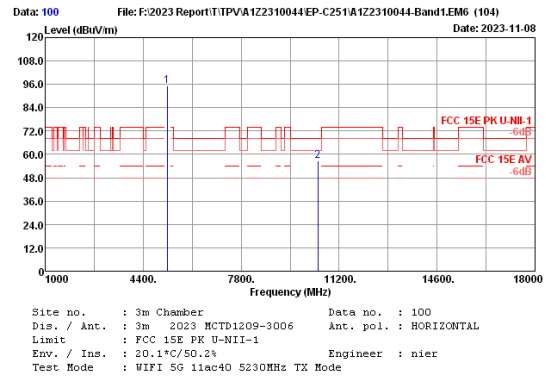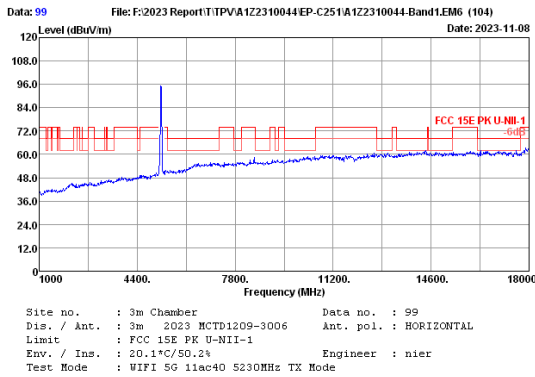

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5230.00	32.62	6.69	89.68	33.65	95.34	68.20	11.43	Peak
2	10460.00	38.40	8.19	44.06	33.88	56.77	68.20	11.43	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

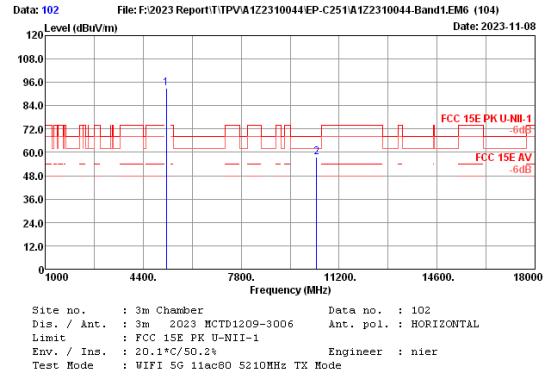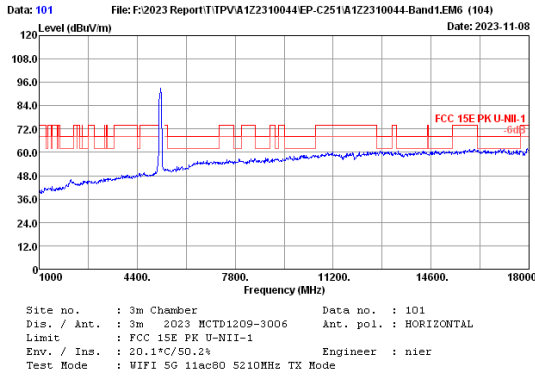

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5210.00	32.54	6.68	87.46	33.66	93.02	68.20	10.58	Peak
2	10420.00	38.40	8.18	44.95	33.91	57.62	68.20	10.58	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

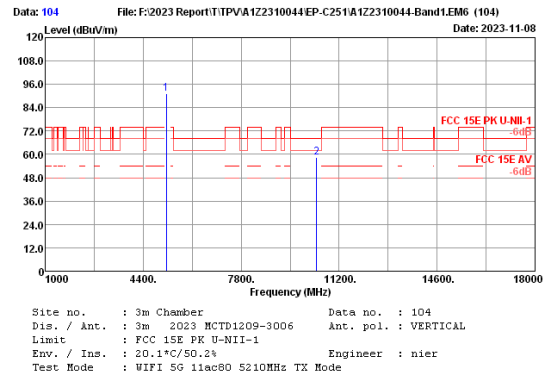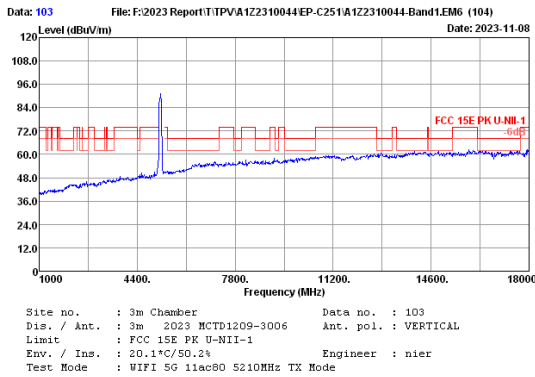

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5210.00	32.54	6.68	85.54	33.66	91.10	68.20	9.70	Peak
2	10420.00	38.40	8.18	45.83	33.91	58.50	68.20	9.70	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.


U-NI2A Band

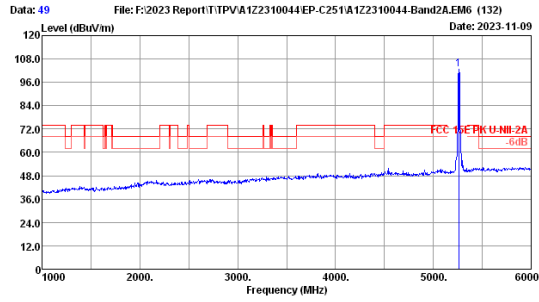

Site no. : 3m Chamber Data no. : 49
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-2A
 Env. / Ins. : 20.1°C/51.2% Engineer : nier
 Test Mode : WIFI 5G 11a 5260MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5260.00	32.74	6.70	96.98	33.65	102.77	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

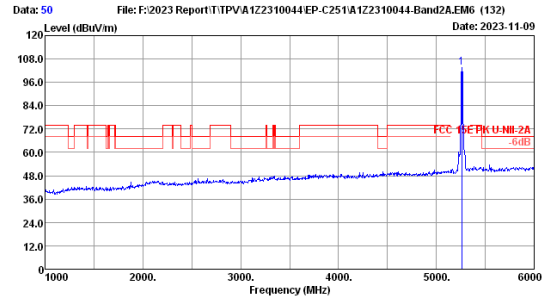


Site no. : 3m Chamber Data no. : 50
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-2A
 Env. / Ins. : 20.1°C/51.2% Engineer : nier
 Test Mode : WIFI 5G 11a 5260MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5260.00	32.74	6.70	97.80	33.65	103.59	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

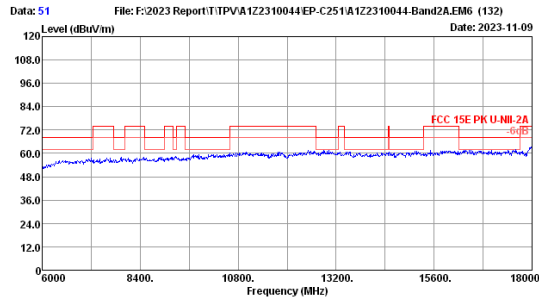

Site no. : 3m Chamber Data no. : 51
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-2A
 Env. / Ins. : 20.1°C/51.2% Engineer : nier
 Test Mode : WIFI 5G 11a 5260MHz TX Mode


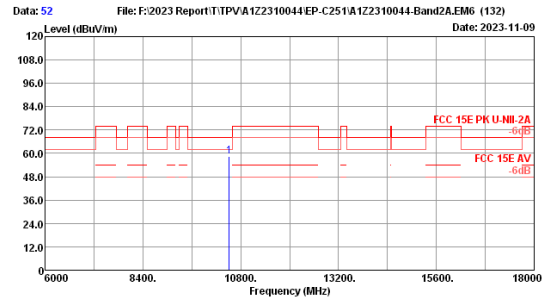


Site no. : 3m Chamber Data no. : 52
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-2A
 Env. / Ins. : 20.1°C/51.2% Engineer : nier
 Test Mode : WIFI 5G 11a 5260MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10520.00	38.38	8.20	45.59	33.84	58.33	68.20	9.87	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

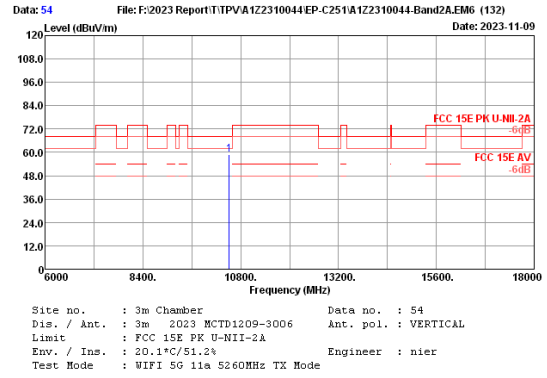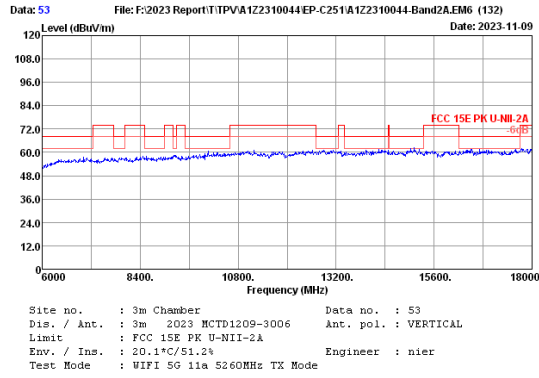


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10520.00	38.38	8.20	45.96	33.84	58.70	68.20	9.50	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

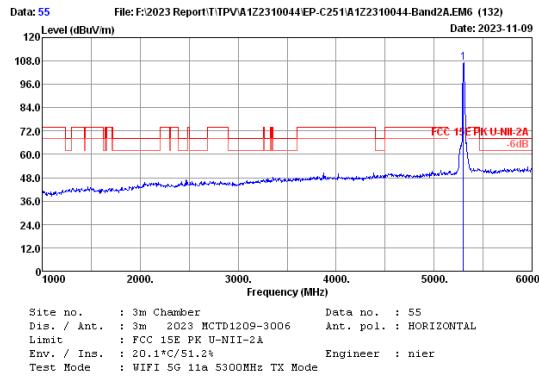

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5300.00	32.90	6.72	101.11	33.64	107.09	-----	-----	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

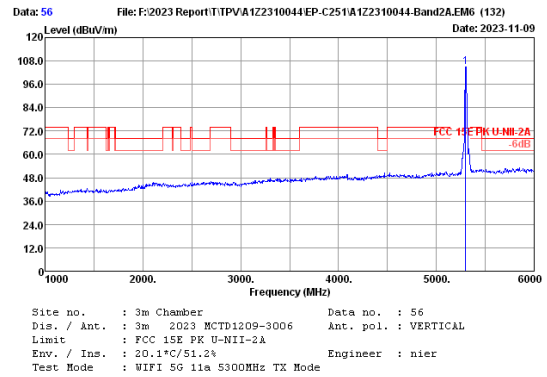

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5300.00	32.90	6.72	99.17	33.64	105.15	-----	-----	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

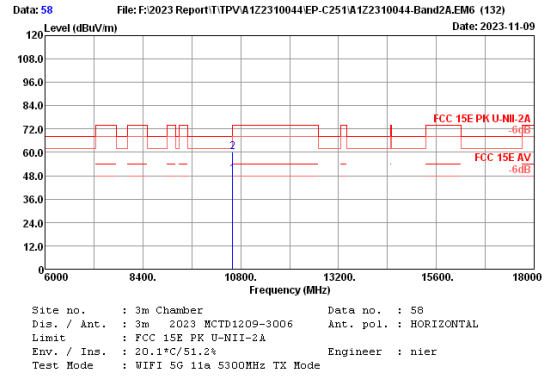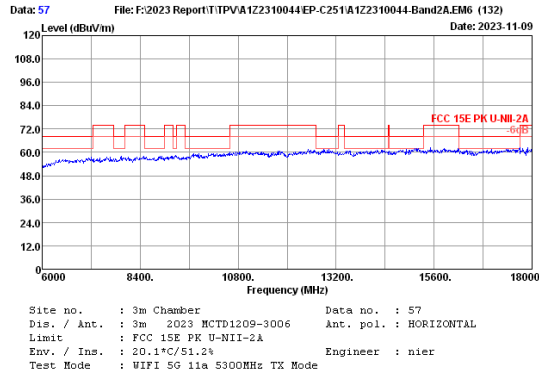

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10600.00	38.30	8.22	36.13	33.79	48.86	54.00	5.14	Average
2	10600.00	38.30	8.22	47.31	33.79	60.04	68.20	8.16	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

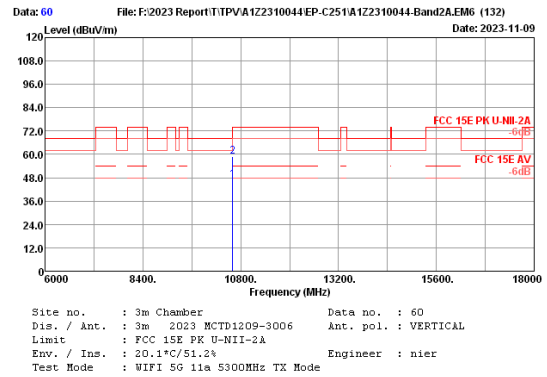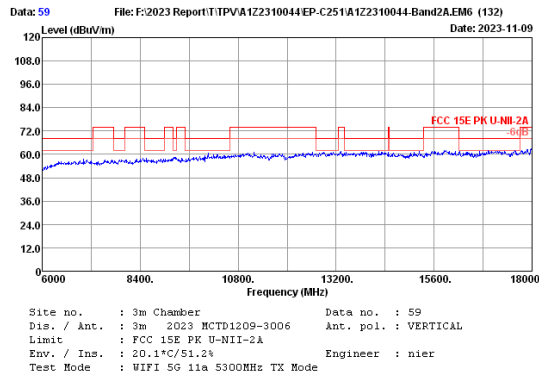

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10600.00	38.30	8.22	34.18	33.79	46.91	54.00	7.09	Average
2	10600.00	38.30	8.22	46.25	33.79	58.98	68.20	9.22	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

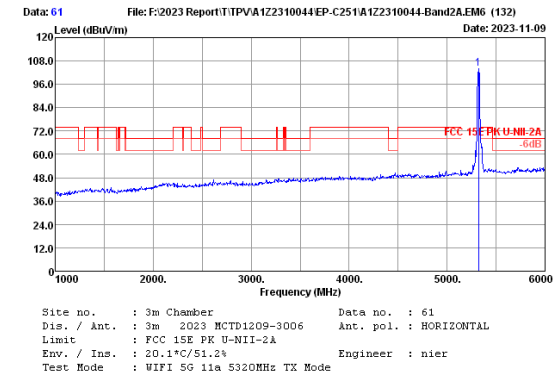


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5320.00	33.06	6.73	97.79	33.64	103.94	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

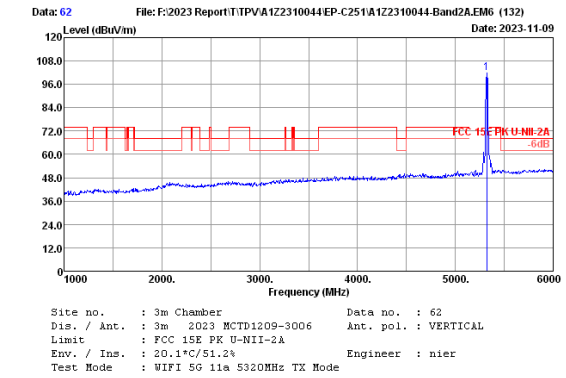


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5320.00	33.06	6.73	95.59	33.64	101.74	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

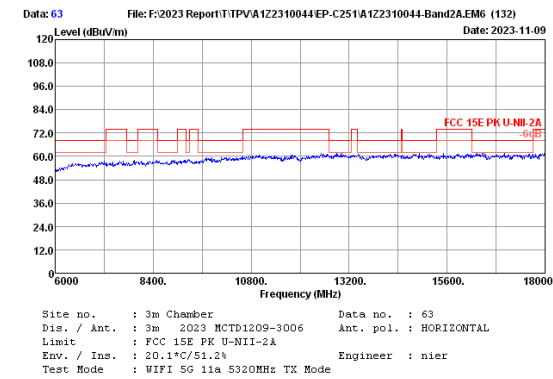

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10640.00	38.34	8.23	35.09	33.75	47.91	54.00	6.09	Average
2	10640.00	38.34	8.23	46.26	33.75	59.08	74.00	14.92	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

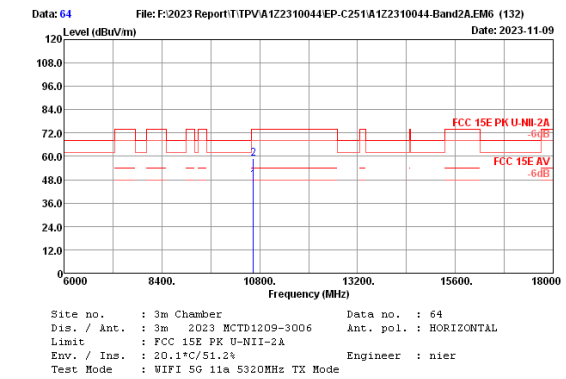

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10640.00	38.34	8.23	35.09	33.75	47.91	54.00	6.09	Average
2	10640.00	38.34	8.23	46.26	33.75	59.08	74.00	14.92	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

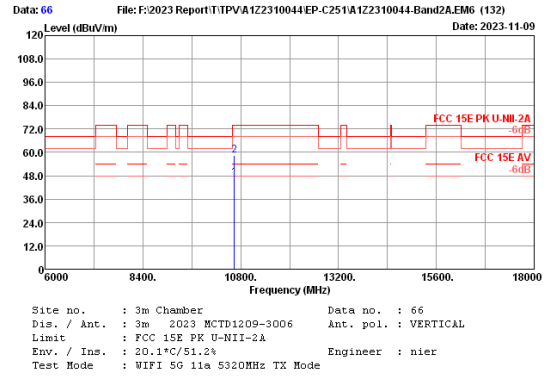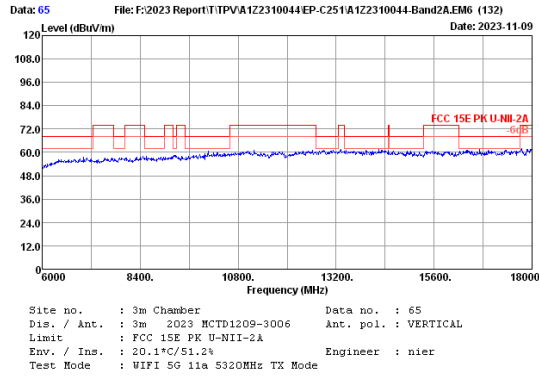


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10640.00	38.34	8.23	34.19	33.75	47.01	54.00	6.99	Average
2	10640.00	38.34	8.23	45.84	33.75	58.66	74.00	15.34	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

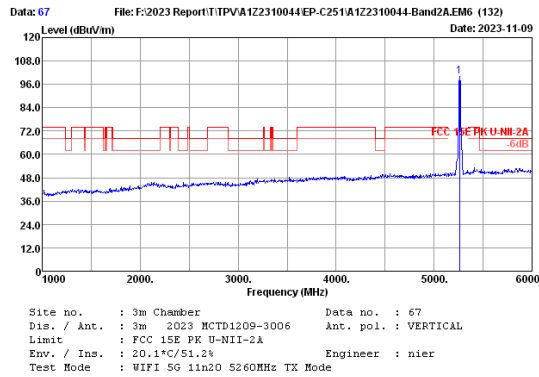

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5260.00	32.74	6.70	94.25	33.65	100.04	-----	-----	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

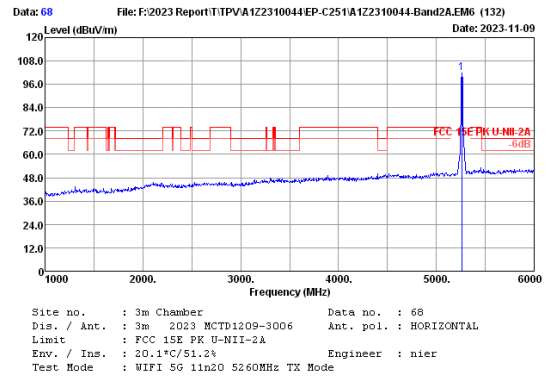

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5260.00	32.74	6.70	96.13	33.65	101.92	-----	-----	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

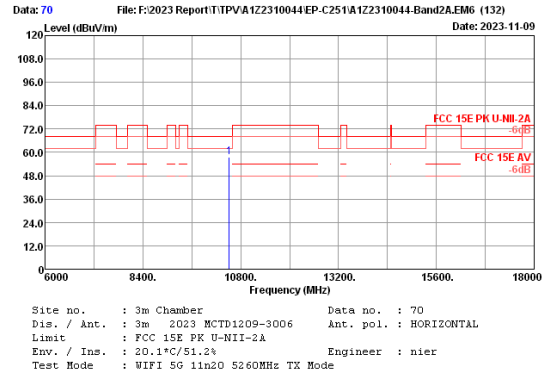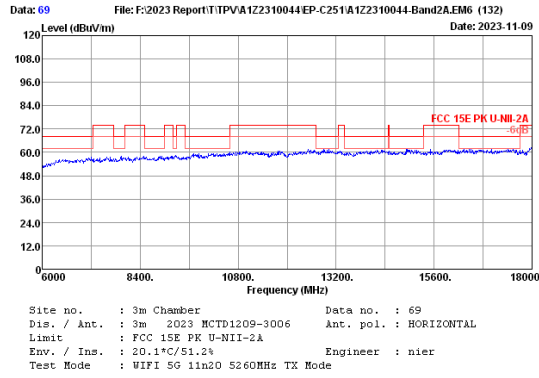

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10520.00	38.38	8.20	44.98	33.84	57.72	68.20	10.48	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

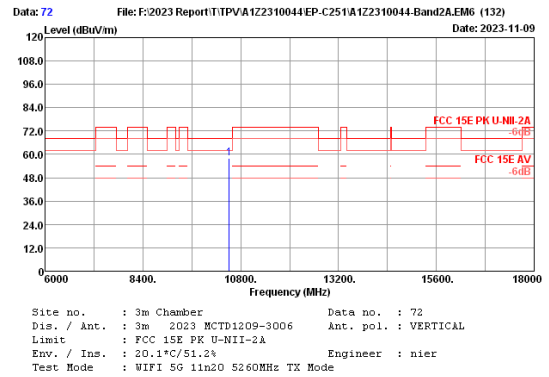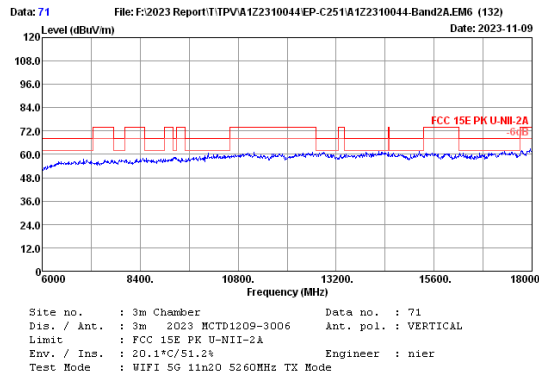

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10520.00	38.38	8.20	45.11	33.84	57.85	68.20	10.35	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

FCC ID: APYBSC0005

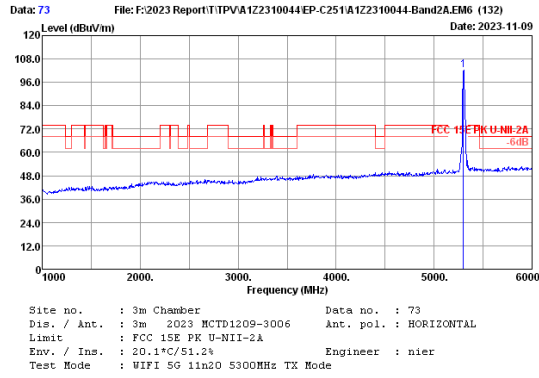



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5300.00	32.90	6.72	96.18	33.64	102.16	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

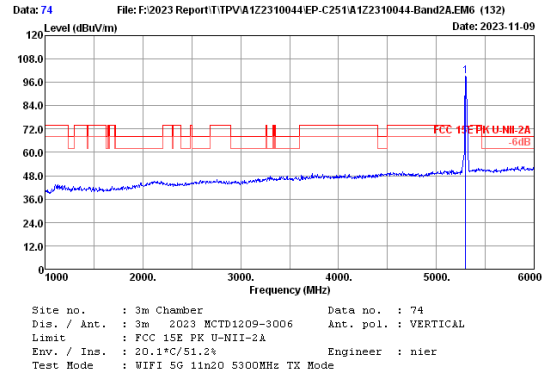

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5300.00	32.90	6.72	93.12	33.64	99.10	-----	-----	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

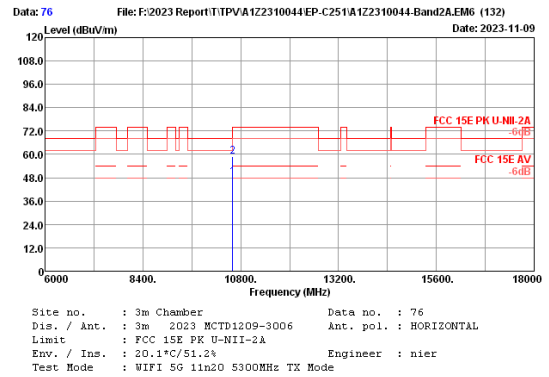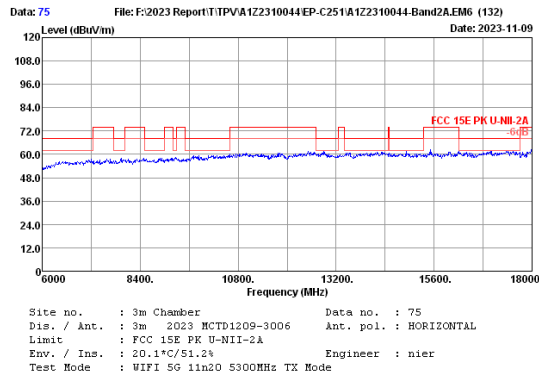

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10600.00	38.30	8.22	35.72	33.79	48.45	54.00	5.55	Average
2	10600.00	38.30	8.22	46.14	33.79	58.87	68.20	9.33	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

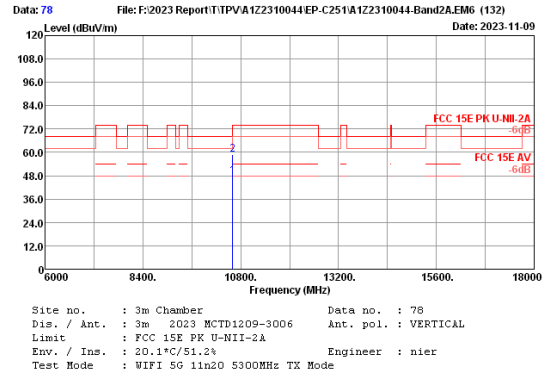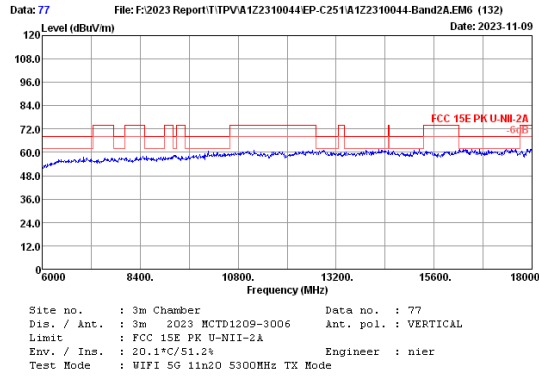


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10600.00	38.30	8.22	35.07	33.79	47.80	54.00	6.20	Average
2	10600.00	38.30	8.22	46.29	33.79	59.02	68.20	9.18	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

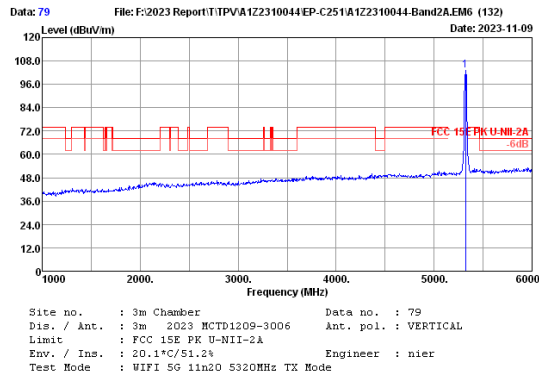

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5320.00	33.06	6.73	97.07	33.64	103.22	-----	-----	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

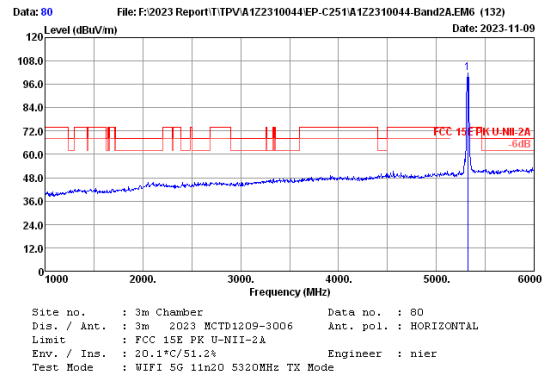

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5320.00	33.06	6.73	95.81	33.64	101.96	-----	-----	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

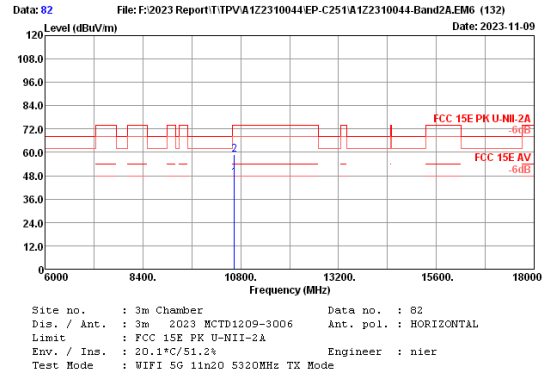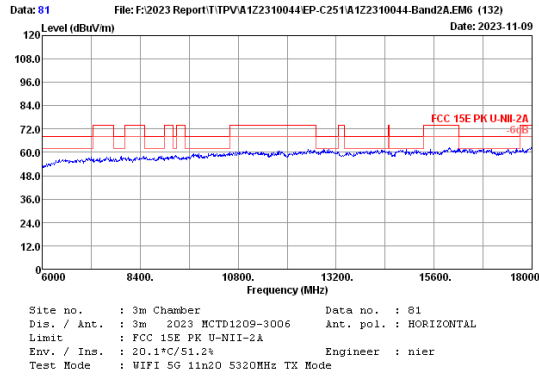

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10640.00	38.34	8.23	34.17	33.75	46.99	54.00	7.01	Average
2	10640.00	38.34	8.23	45.96	33.75	58.78	74.00	15.22	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

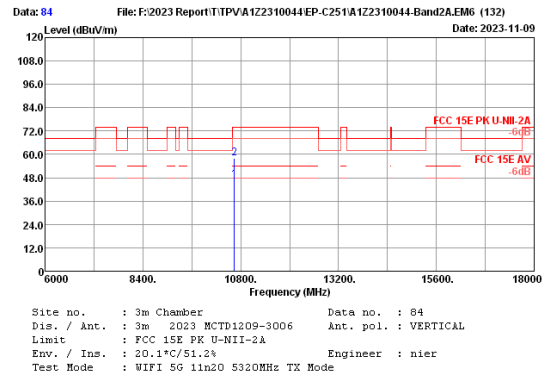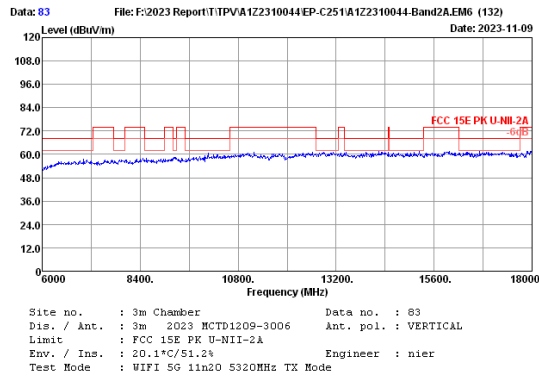

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10640.00	38.34	8.23	34.05	33.75	46.87	54.00	7.13	Average
2	10640.00	38.34	8.23	45.37	33.75	58.19	74.00	15.81	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

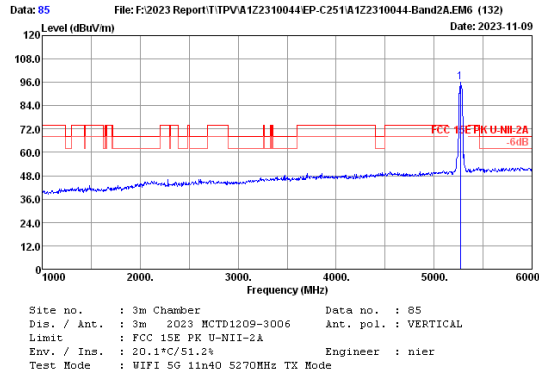



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5270.00	32.78	6.71	90.36	33.65	96.20	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

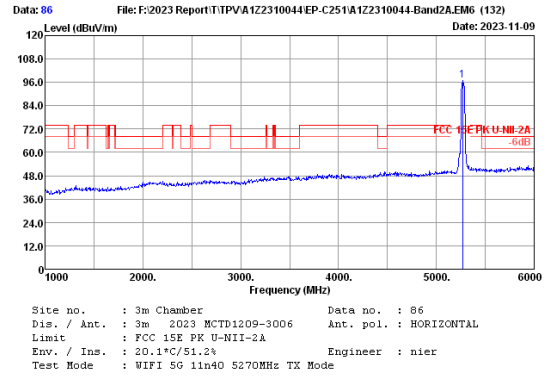

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5270.00	32.78	6.71	91.04	33.65	96.88	-----	-----	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

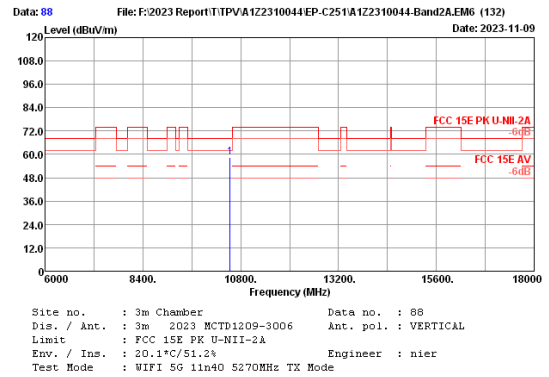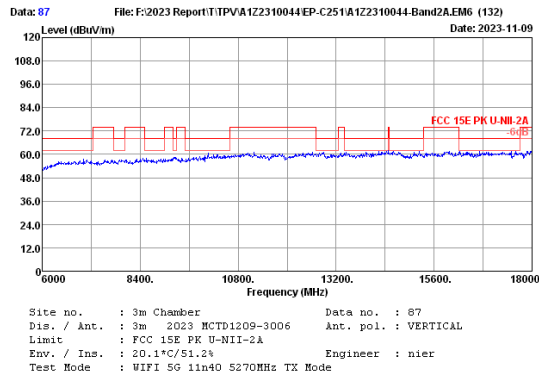

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10540.00	38.36	8.21	45.78	33.82	58.53	68.20	9.67	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

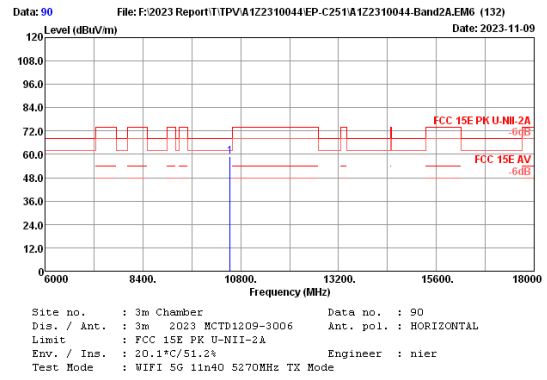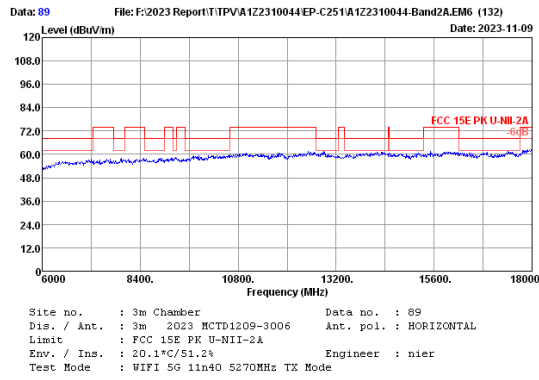


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10540.00	38.36	8.21	46.26	33.82	59.01	68.20	9.19	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

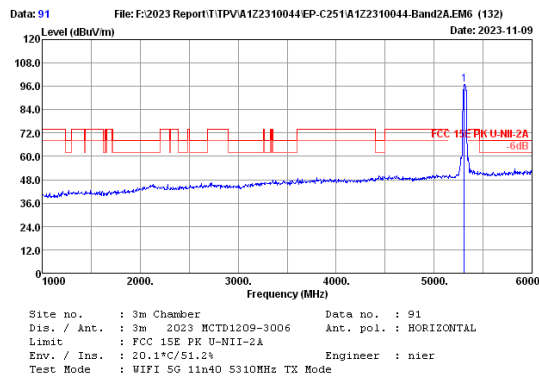

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5310.00	32.98	6.72	91.03	33.64	97.09	-----	-----	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

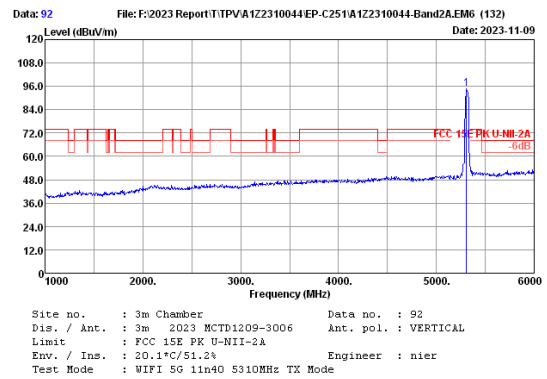

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5310.00	32.98	6.72	88.81	33.64	94.87	-----	-----	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

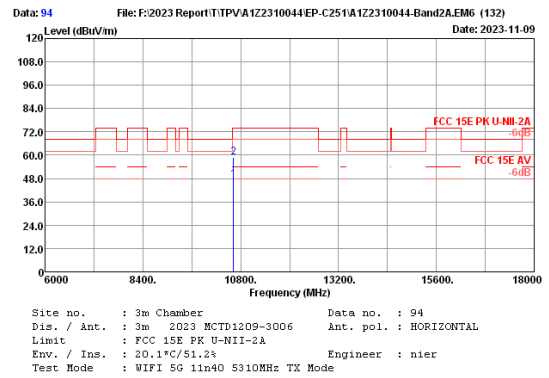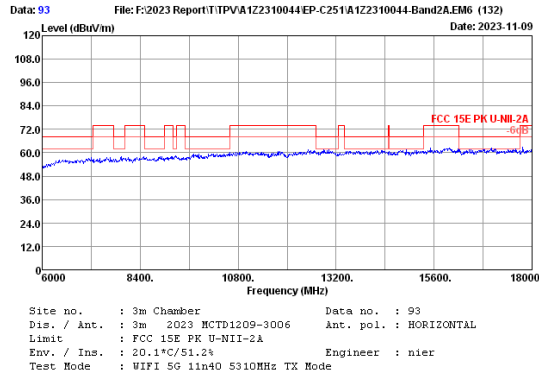

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10620.00	38.32	8.22	34.73	33.77	47.50	54.00	6.50	Average
2	10620.00	38.32	8.22	46.33	33.77	59.10	74.00	14.90	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor.
 2. The emission levels that are 20dB below the official limit are not reported.

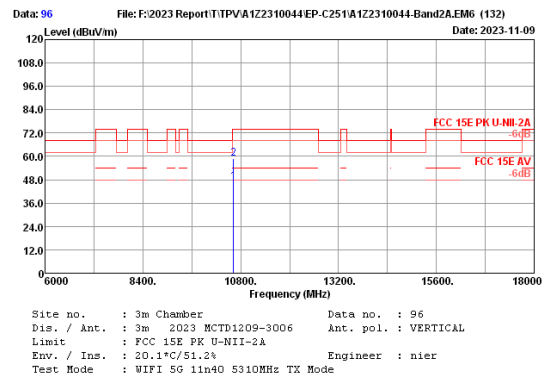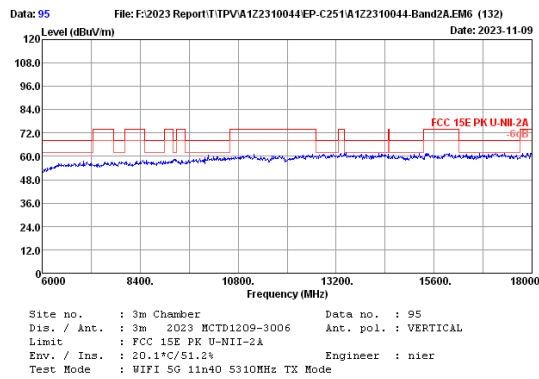

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10620.00	38.32	8.22	34.26	33.77	47.03	54.00	6.97	Average
2	10620.00	38.32	8.22	46.16	33.77	58.93	74.00	15.07	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

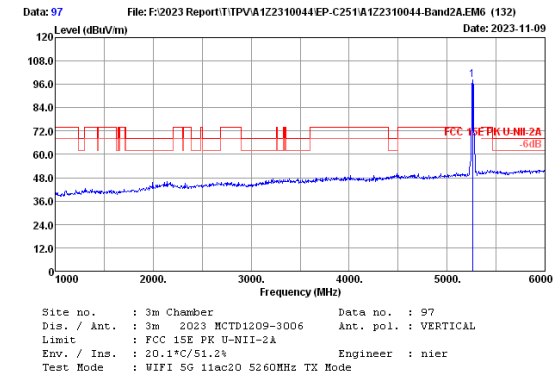


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5260.00	32.74	6.70	92.41	33.65	98.20	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

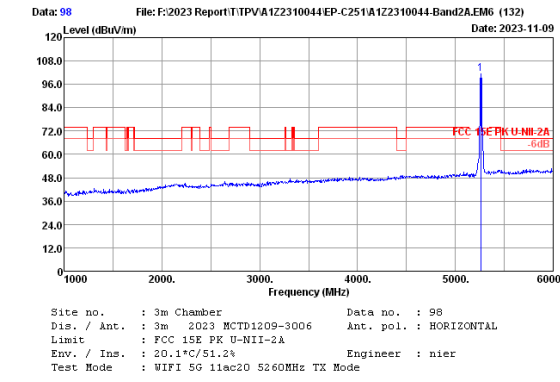


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5260.00	32.74	6.70	95.45	33.65	101.24	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

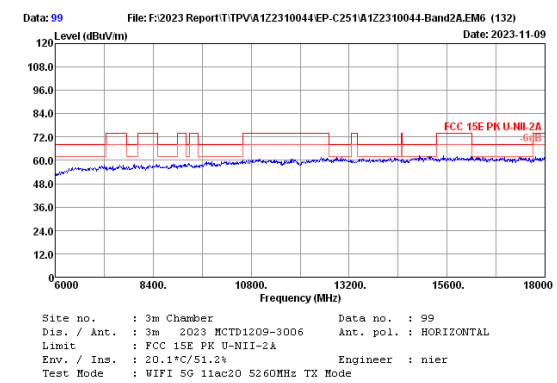

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10520.00	38.38	8.20	45.27	33.84	58.01	68.20	10.19	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

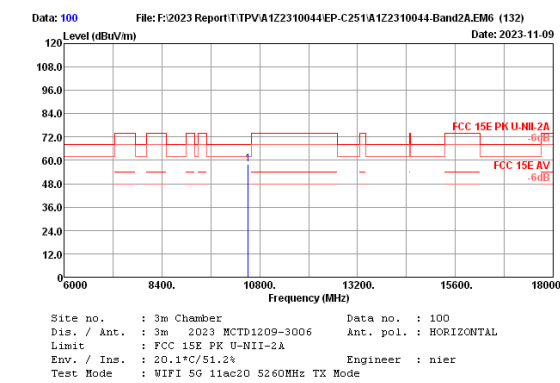

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10520.00	38.38	8.20	45.27	33.84	58.01	68.20	10.19	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

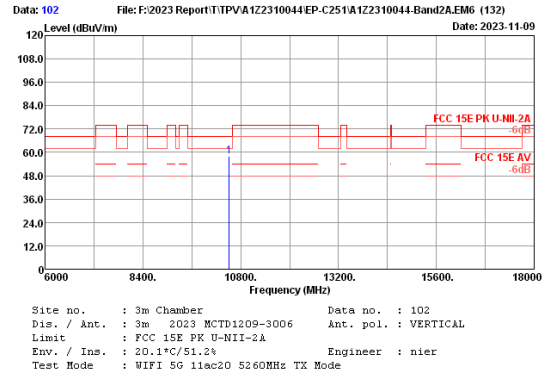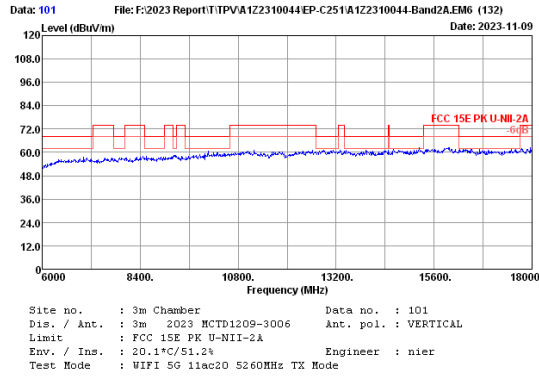


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10520.00	38.38	8.20	45.19	33.84	57.93	68.20	10.27	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

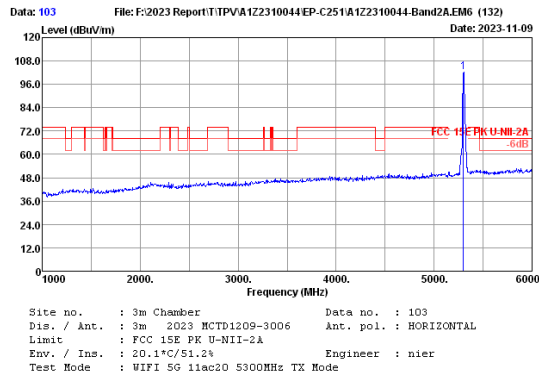

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5300.00	32.90	6.72	96.09	33.64	102.07	-----	-----	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

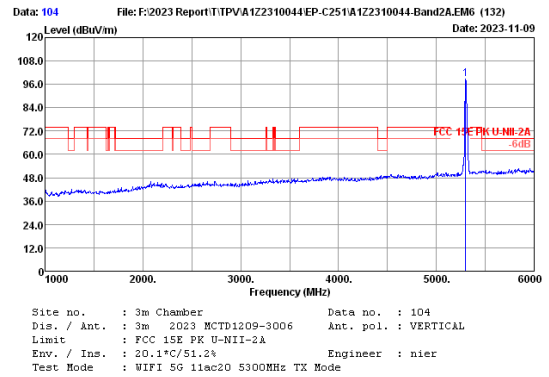

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5300.00	32.90	6.72	92.82	33.64	98.80	-----	-----	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

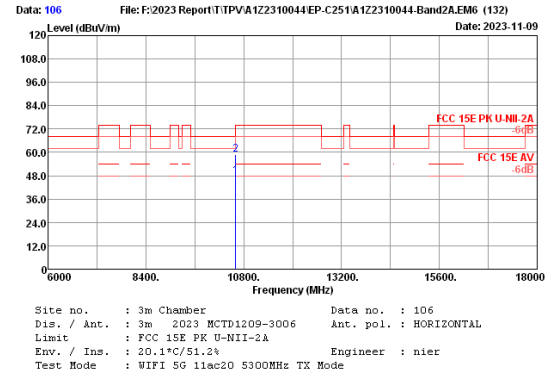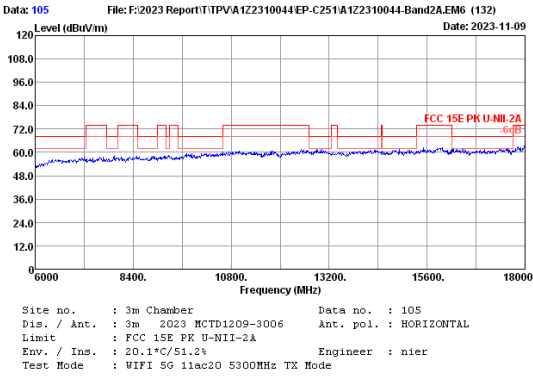

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10600.00	38.30	8.22	35.27	33.79	48.00	54.00	6.00	Average
2	10600.00	38.30	8.22	46.38	33.79	59.11	68.20	9.09	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

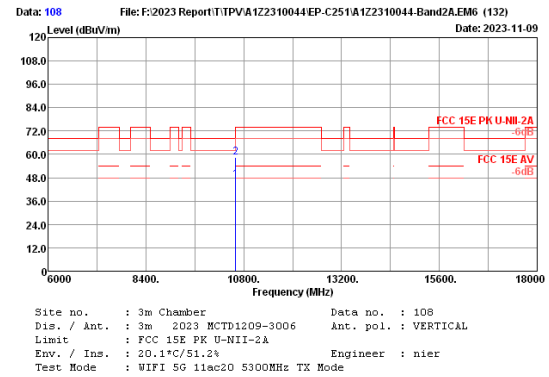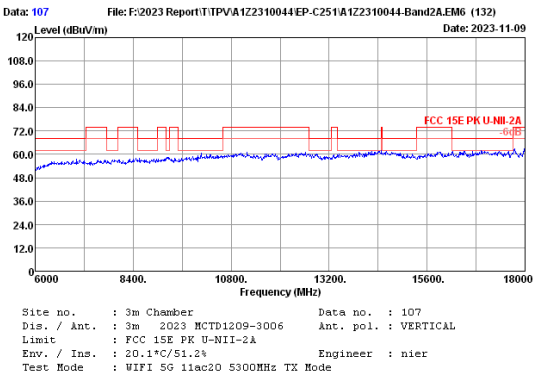

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10600.00	38.30	8.22	34.27	33.79	47.00	54.00	7.00	Average
2	10600.00	38.30	8.22	45.93	33.79	58.66	68.20	9.54	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

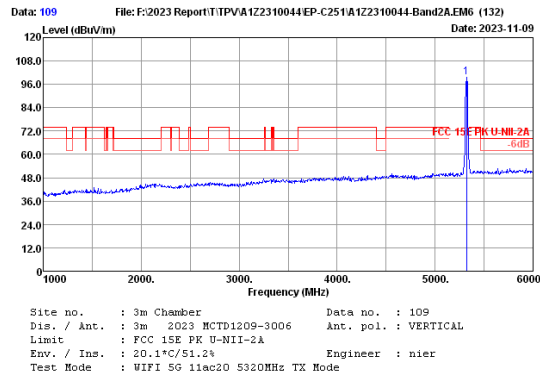



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5320.00	33.06	6.73	93.47	33.64	99.62	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

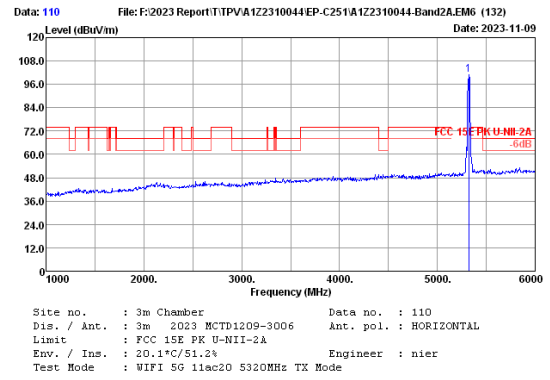

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5320.00	33.06	6.73	95.02	33.64	101.17	-----	-----	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

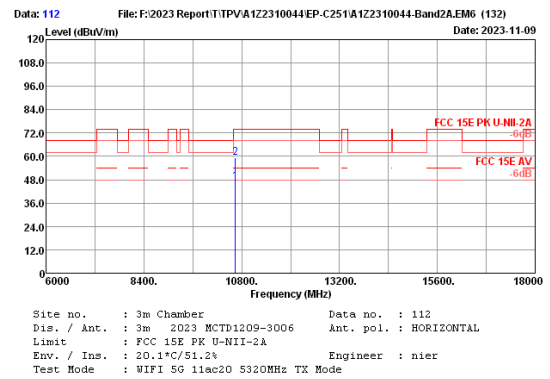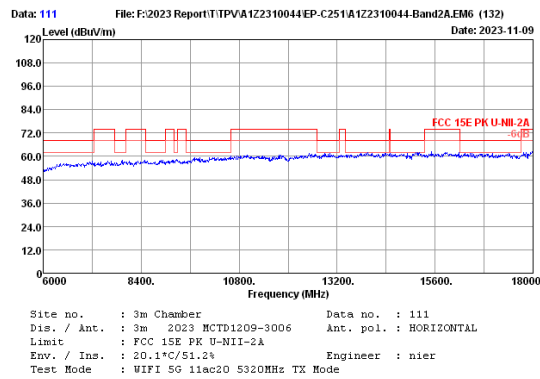

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10640.00	38.34	8.23	34.13	33.75	46.95	54.00	7.05	Average
2	10640.00	38.34	8.23	46.52	33.75	59.34	74.00	14.66	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

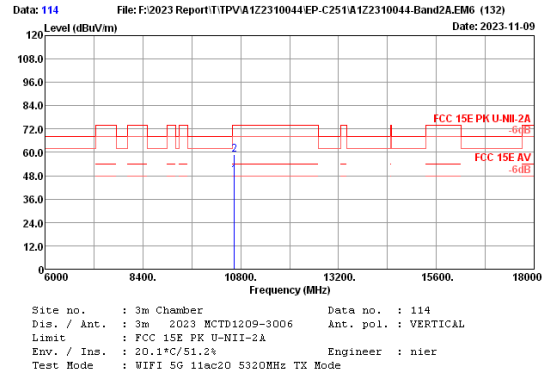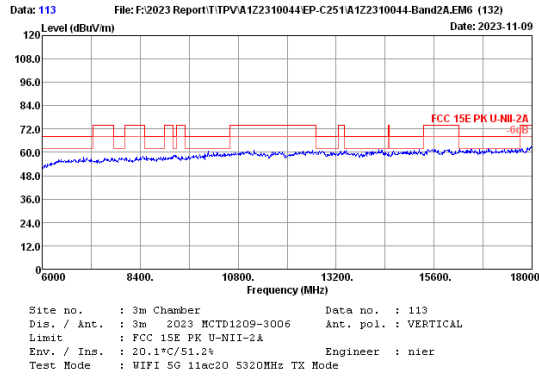


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10640.00	38.34	8.23	35.24	33.75	48.06	54.00	5.94	Average
2	10640.00	38.34	8.23	46.04	33.75	58.86	74.00	15.14	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

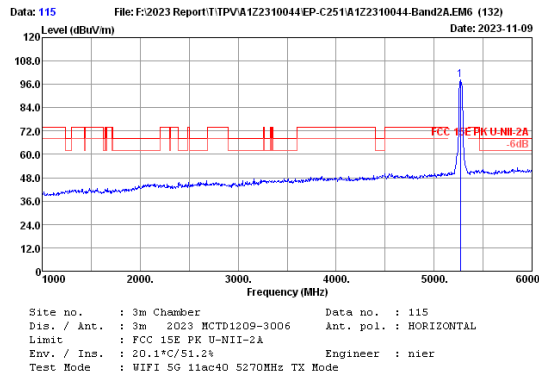

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5270.00	32.78	6.71	92.61	33.65	98.45	-----	-----	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

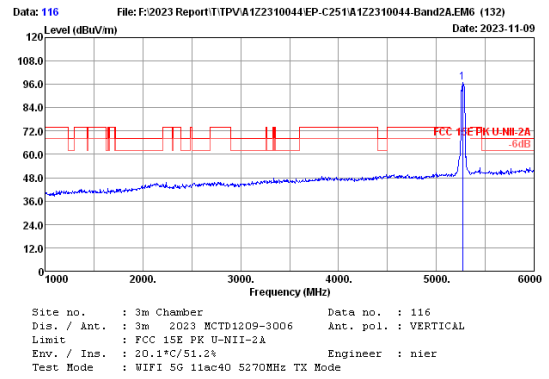

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5270.00	32.78	6.71	91.22	33.65	97.06	-----	-----	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

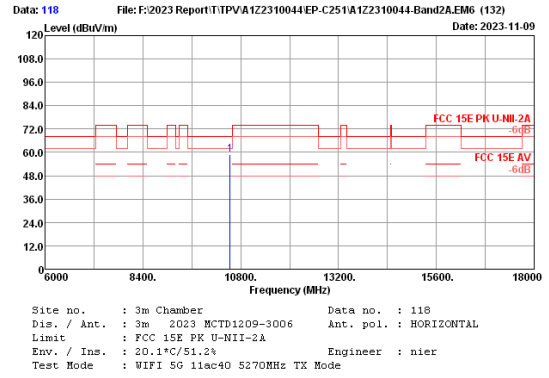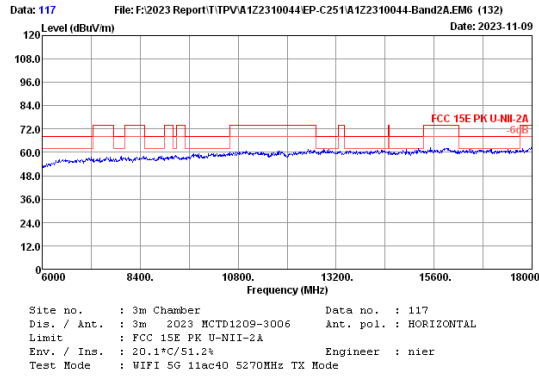

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10540.00	38.36	8.21	46.27	33.82	59.02	68.20	9.18	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

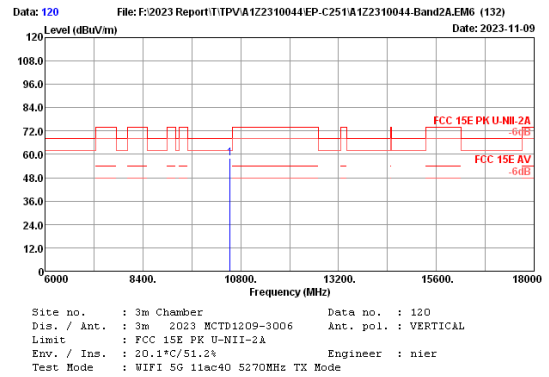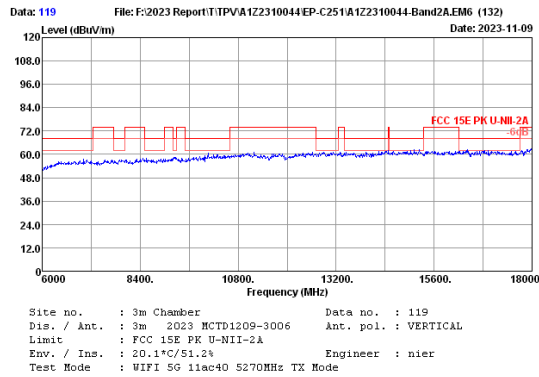

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10540.00	38.36	8.21	45.35	33.82	58.10	68.20	10.10	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

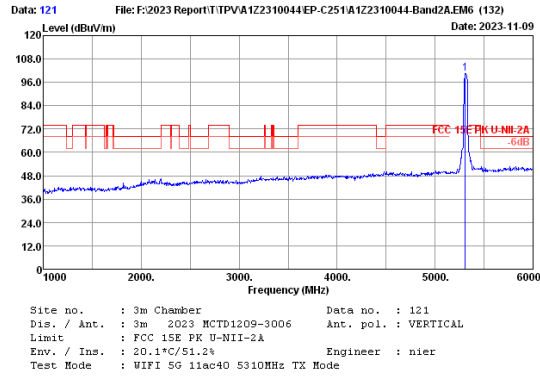



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5310.00	32.98	6.72	94.37	33.64	100.43	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

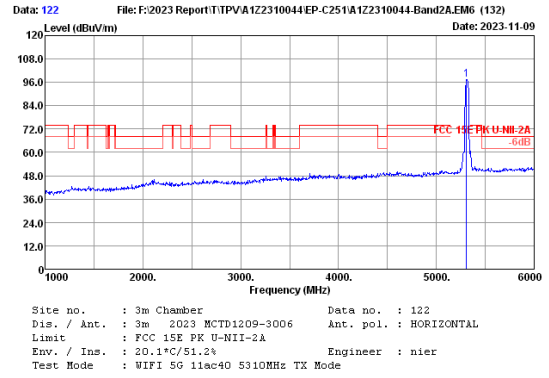

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5310.00	32.98	6.72	91.45	33.64	97.51	-----	-----	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

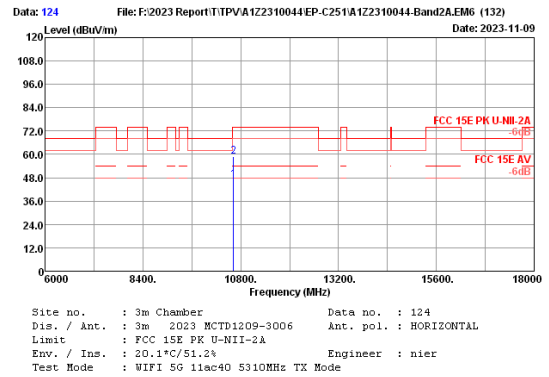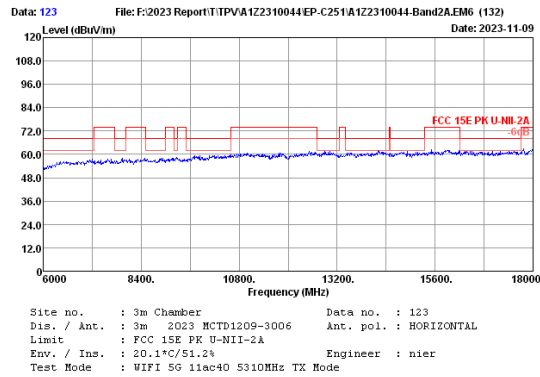

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10620.00	38.32	8.22	34.19	33.77	46.96	54.00	7.04	Average
2	10620.00	38.32	8.22	45.97	33.77	58.74	74.00	15.26	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

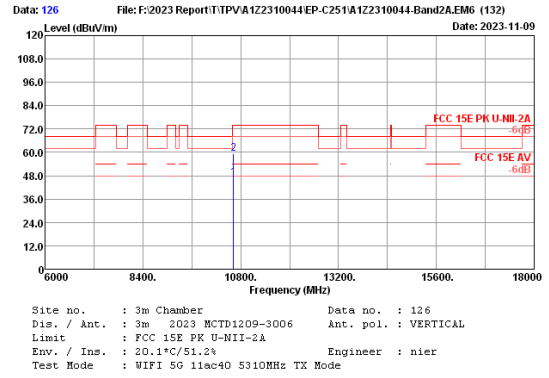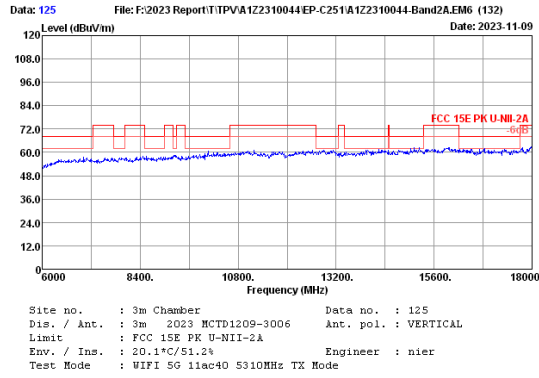


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10620.00	38.32	8.22	34.19	33.77	46.96	54.00	7.04	Average
2	10620.00	38.32	8.22	46.49	33.77	59.26	74.00	14.74	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

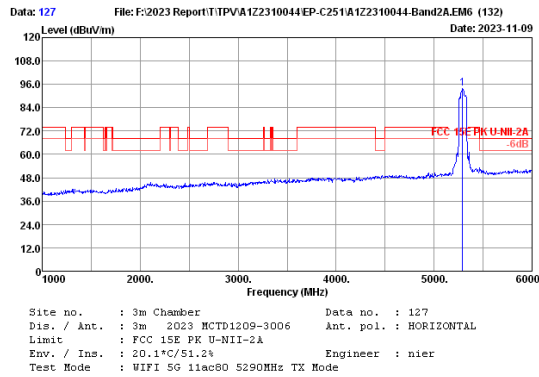

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5290.00	32.86	6.72	87.92	33.64	93.86	-----	-----	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

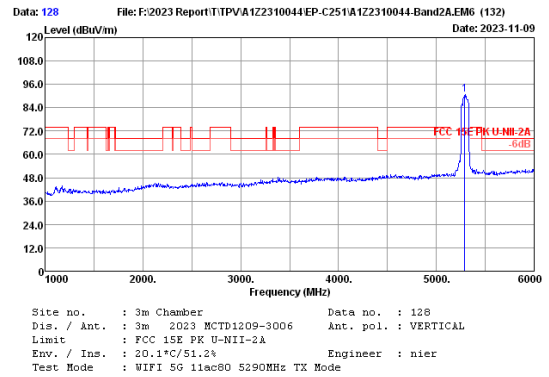

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5290.00	32.86	6.72	64.67	33.64	90.61	-----	-----	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

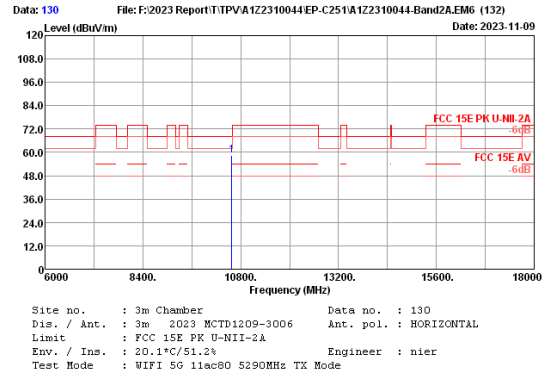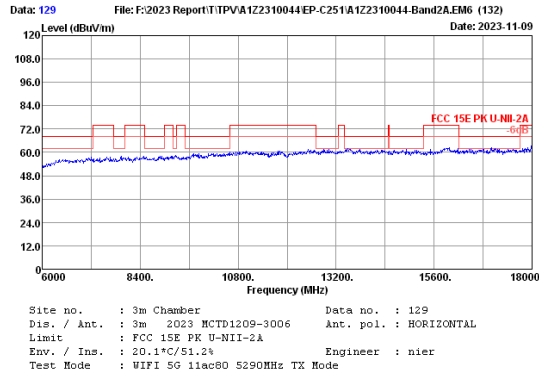

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10580.00	38.32	8.22	45.88	33.79	58.63	68.20	9.57	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

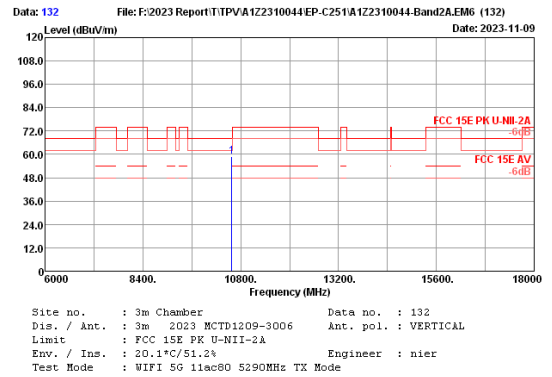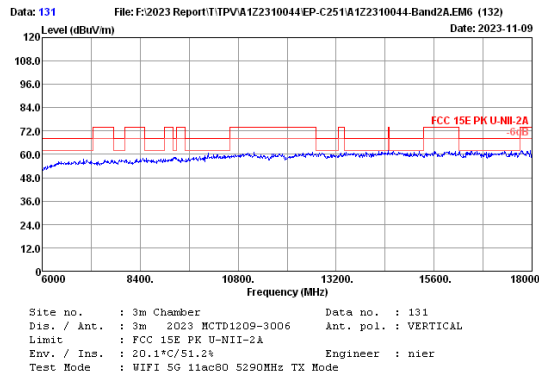


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10580.00	38.32	8.22	46.09	33.79	58.84	68.20	9.36	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

U-NII-2C Band:

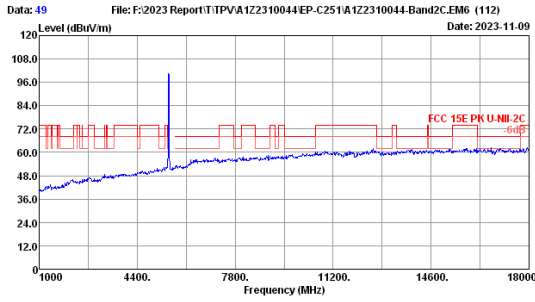


Site no. : 3m Chamber Data no. : 49
 Dis. / Ant. : 3m 2023 NCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-2C
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11a 5500MHz TX Mode

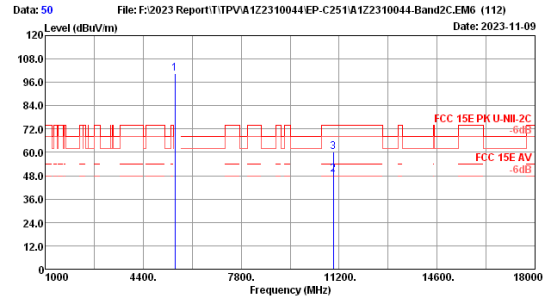


Site no. : 3m Chamber Data no. : 50
 Dis. / Ant. : 3m 2023 NCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-2C
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11a 5500MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5500.00	33.70	6.80	93.63	33.60	100.53	74.00	26.53	Peak
2	11000.00	38.70	8.30	35.06	33.50	48.56	54.00	5.44	Average
3	11000.00	38.70	8.30	46.55	33.50	60.05	74.00	13.95	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

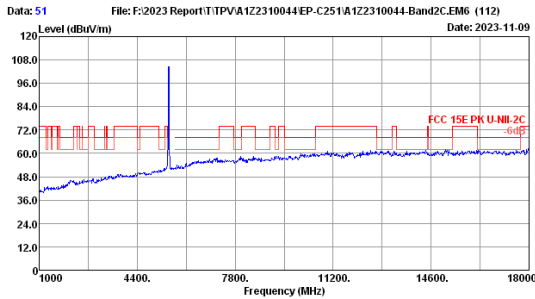

Site no. : 3m Chamber Data no. : 51
 Dis. / Ant. : 3m 2023 NCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-2C
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11a 5500MHz TX Mode


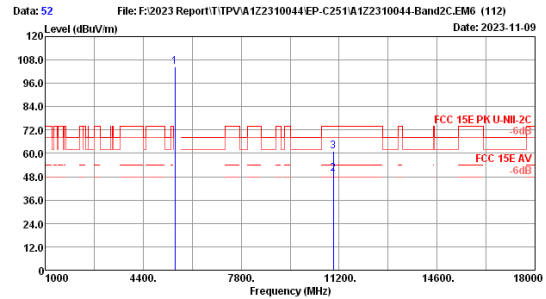


Site no. : 3m Chamber Data no. : 52
 Dis. / Ant. : 3m 2023 NCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-2C
 Env. / Ins. : 21.2°C/51.5% Engineer : nier
 Test Mode : WIFI 5G 11a 5500MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5500.00	33.70	6.80	97.75	33.60	104.65	74.00	30.65	Peak
2	11000.00	38.70	8.30	36.13	33.50	49.63	54.00	4.37	Average
3	11000.00	38.70	8.30	47.61	33.50	61.11	74.00	12.89	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

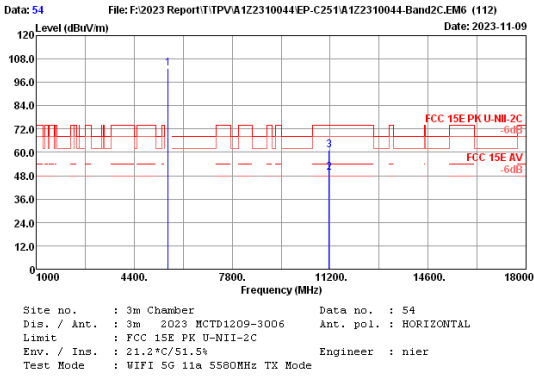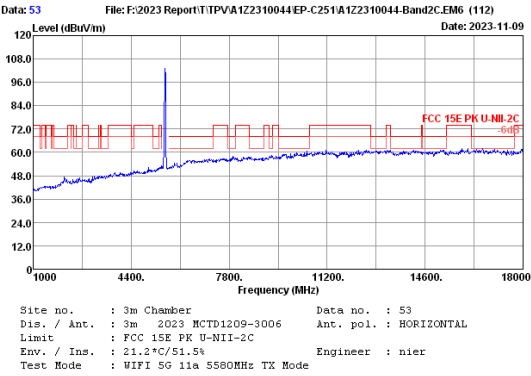

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5580.00	33.28	6.83	96.51	33.58	103.04	74.00	29.04	Peak
2	11160.00	38.64	8.33	36.08	33.53	49.52	54.00	4.48	Average
3	11160.00	38.64	8.33	47.54	33.53	60.98	74.00	13.02	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

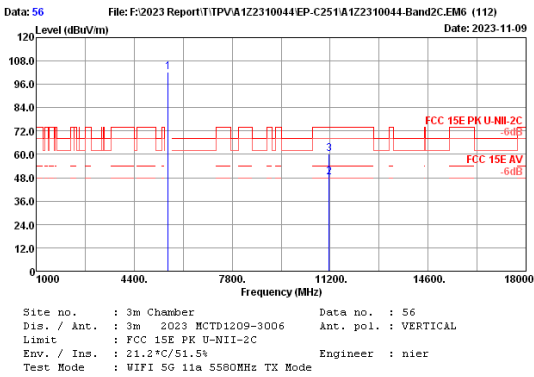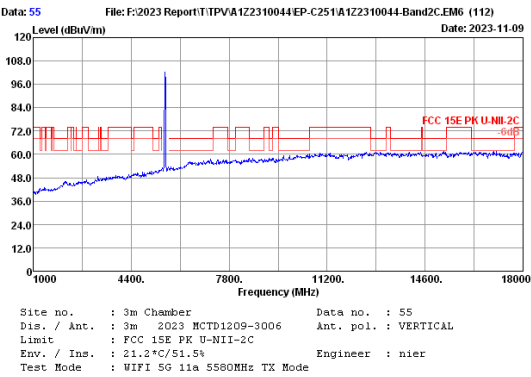

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5580.00	33.28	6.83	95.86	33.58	102.39	74.00	28.39	Peak
2	11160.00	38.64	8.33	35.03	33.53	48.47	54.00	5.53	Average
3	11160.00	38.64	8.33	46.85	33.53	60.29	74.00	13.71	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

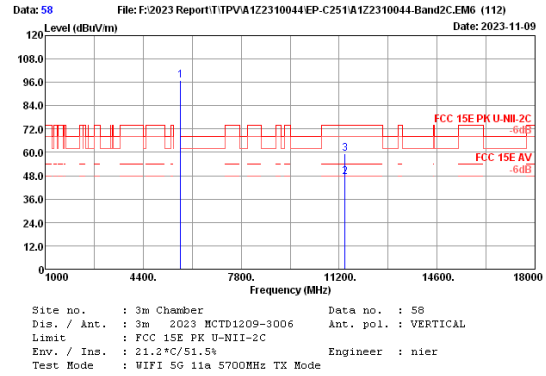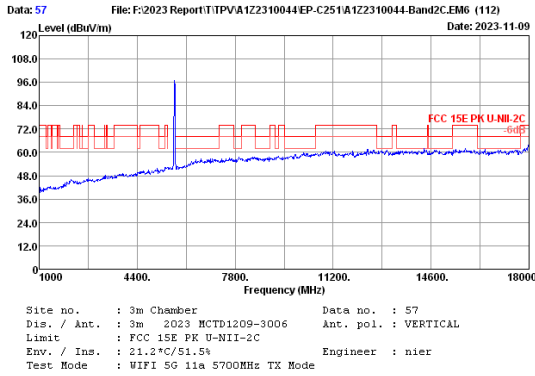

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5700.00	33.40	6.88	90.24	33.56	96.96	-----	-----	Peak
2	11400.00	38.50	8.38	34.17	33.58	47.47	54.00	6.53	Average
3	11400.00	38.50	8.38	45.89	33.58	59.19	74.00	14.81	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

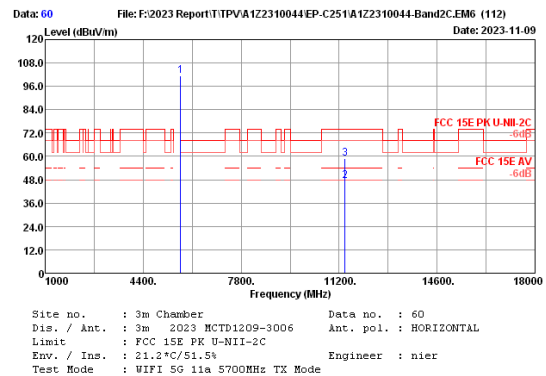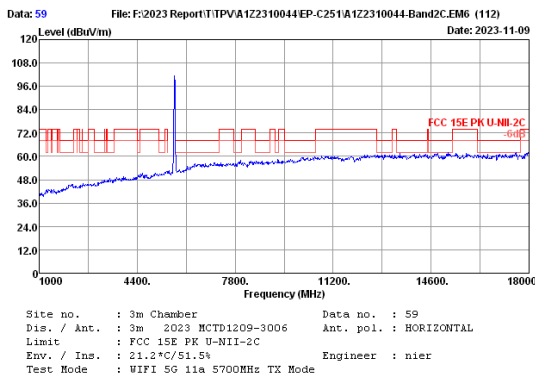

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5700.00	33.40	6.88	94.66	33.56	101.39	-----	-----	Peak
2	11400.00	38.50	8.38	34.09	33.58	47.39	54.00	6.61	Average
3	11400.00	38.50	8.38	45.66	33.58	58.96	74.00	15.04	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

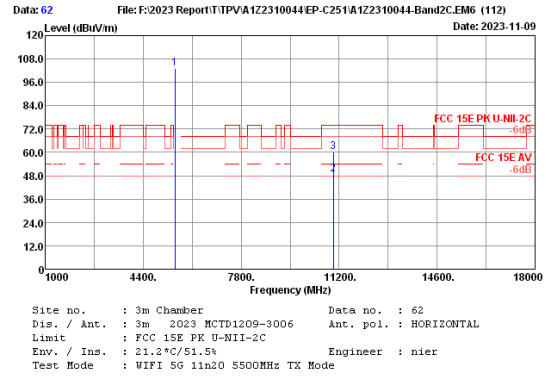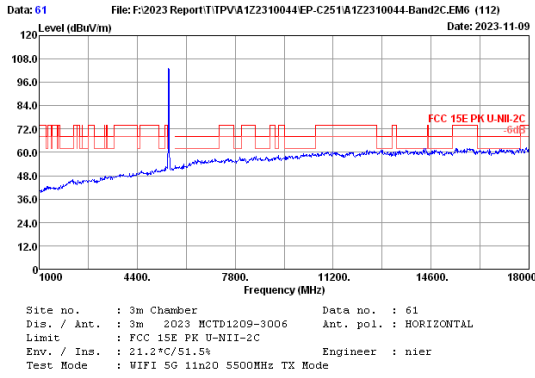

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5500.00	33.70	6.80	96.07	33.60	102.97	-----	-----	Peak
2	11000.00	38.70	8.30	35.14	33.50	48.64	54.00	5.36	Average
3	11000.00	38.70	8.30	46.75	33.50	60.25	74.00	13.75	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

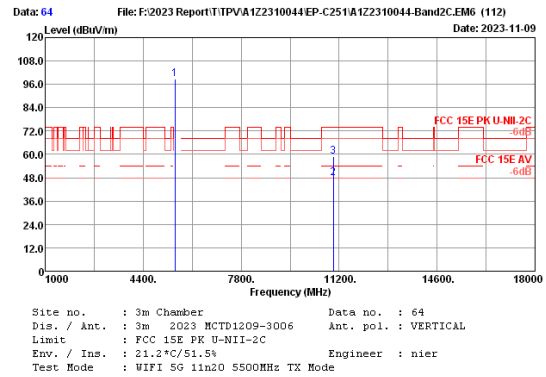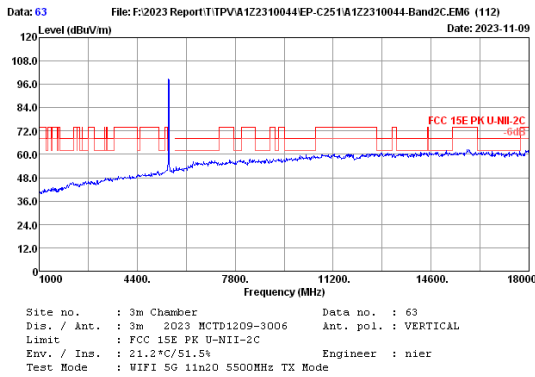

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5500.00	33.70	6.80	91.66	33.60	98.96	-----	-----	Peak
2	11000.00	38.70	8.30	34.22	33.50	47.72	54.00	6.28	Average
3	11000.00	38.70	8.30	45.60	33.50	59.10	74.00	14.90	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

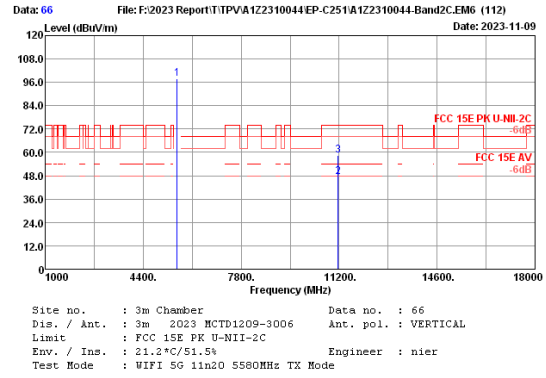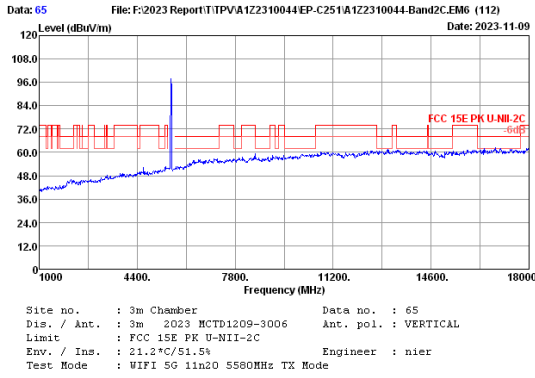

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5580.00	33.28	6.83	91.53	33.58	98.06	-----	-----	Peak
2	11160.00	38.64	8.33	34.11	33.53	47.55	54.00	6.45	Average
3	11160.00	38.64	8.33	45.21	33.53	58.65	74.00	15.35	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

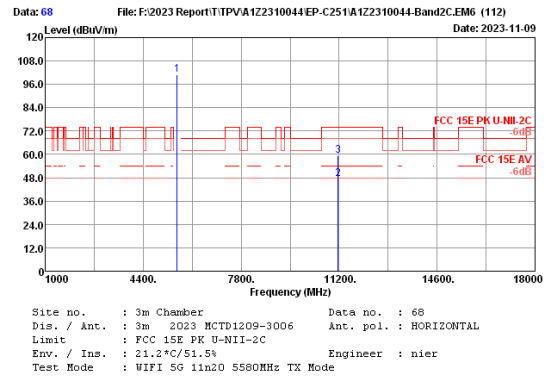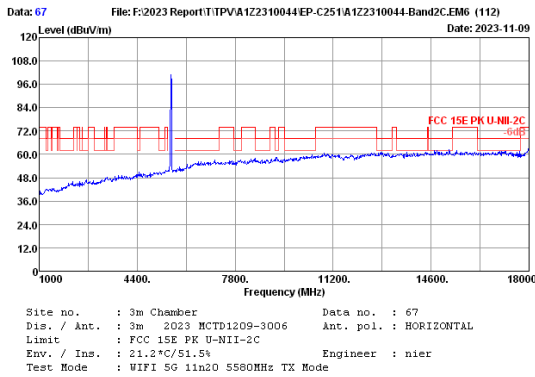

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5580.00	33.28	6.83	94.36	33.58	100.89	-----	-----	Peak
2	11160.00	38.64	8.33	34.07	33.53	47.51	54.00	6.49	Average
3	11160.00	38.64	8.33	45.87	33.53	59.31	74.00	14.69	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

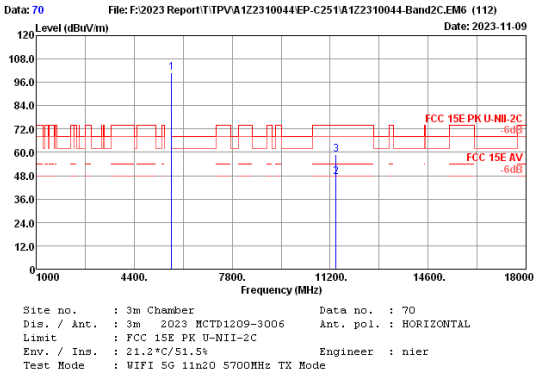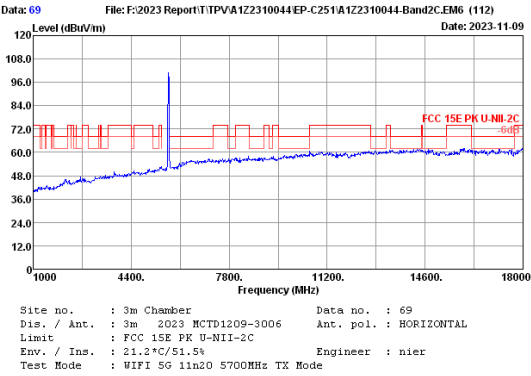

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5700.00	33.40	6.88	94.03	33.56	100.75	74.00	26.75	Peak
2	11400.00	38.50	8.38	34.12	33.58	47.42	54.00	6.58	Average
3	11400.00	38.50	8.38	45.39	33.58	58.69	74.00	15.31	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

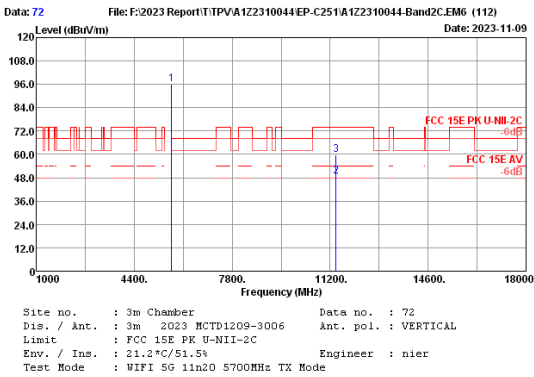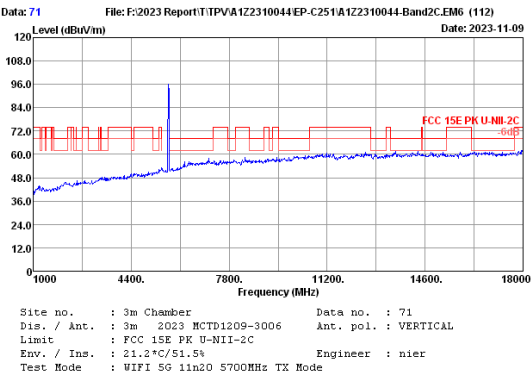

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5700.00	33.40	6.88	89.36	33.56	96.00	74.00	22.00	Peak
2	11400.00	38.50	8.38	35.23	33.58	48.53	54.00	5.47	Average
3	11400.00	38.50	8.38	46.42	33.58	59.72	74.00	14.28	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

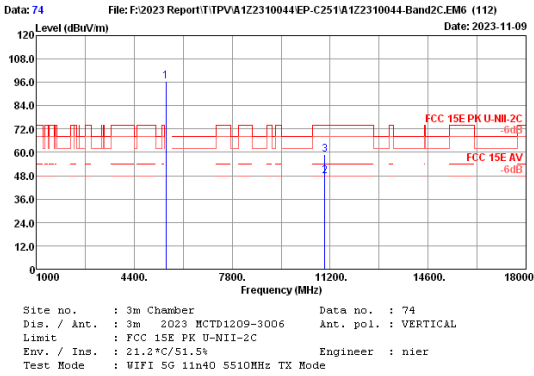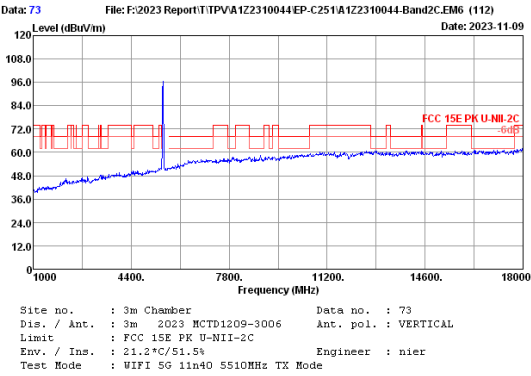

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5510.00	33.64	6.80	89.51	33.60	96.35	-----	-----	Peak
2	11020.00	38.70	8.30	34.18	33.51	47.67	54.00	6.33	Average
3	11020.00	38.70	8.30	45.30	33.51	58.79	74.00	15.21	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

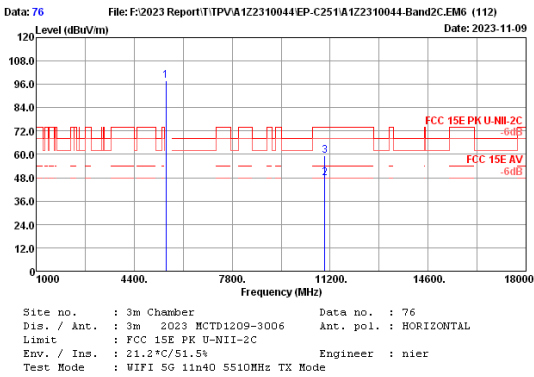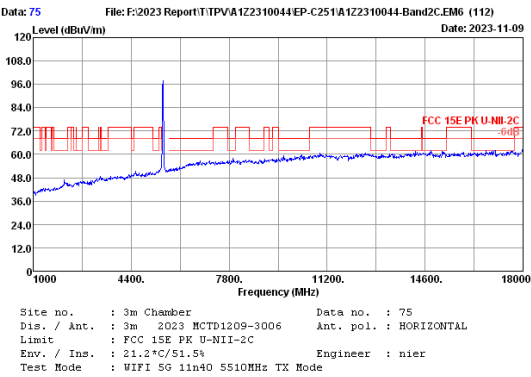

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5510.00	33.64	6.80	91.20	33.60	98.04	-----	-----	Peak
2	11020.00	38.70	8.30	34.18	33.51	47.67	54.00	6.33	Average
3	11020.00	38.70	8.30	45.77	33.51	59.26	74.00	14.74	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

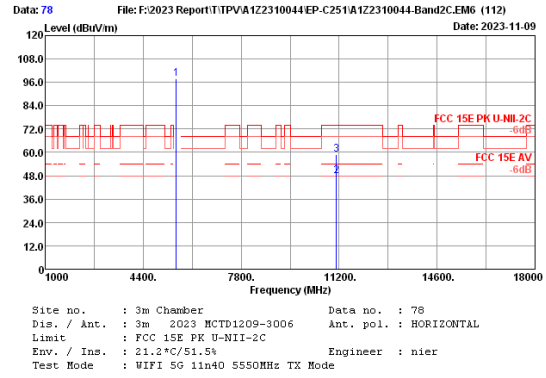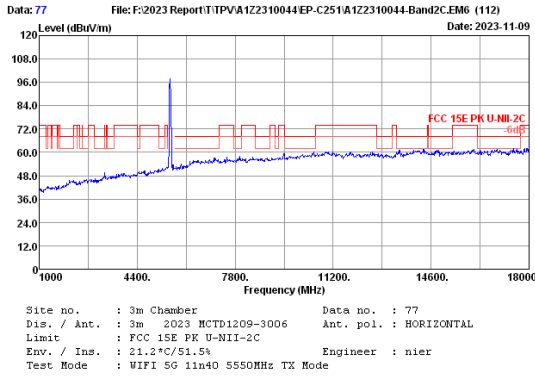

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5550.00	33.40	6.82	91.43	33.59	98.06	74.00	24.06	Peak
2	11100.00	38.70	8.32	34.21	33.52	47.71	54.00	-6.29	Average
3	11100.00	38.70	8.32	45.37	33.52	58.87	74.00	-15.13	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

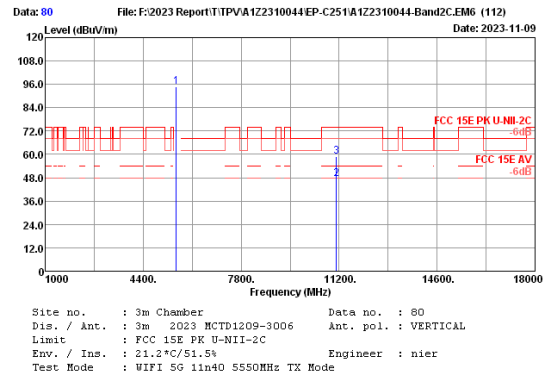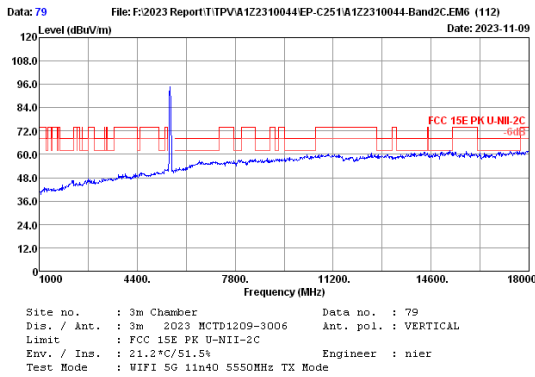

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5550.00	33.40	6.82	68.20	33.59	94.91	74.00	20.91	Peak
2	11100.00	38.70	8.32	34.08	33.52	47.58	54.00	-6.42	Average
3	11100.00	38.70	8.32	45.57	33.52	59.07	74.00	-14.93	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

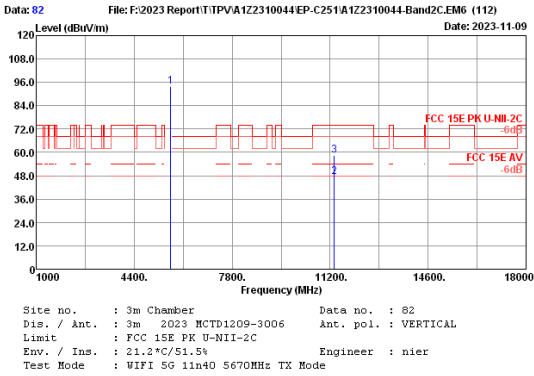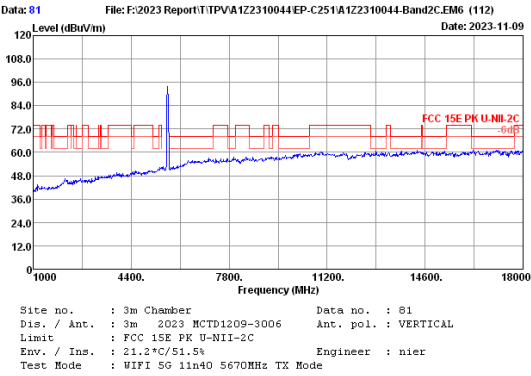

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5670.00	33.28	6.87	87.22	33.57	93.80	-----	-----	Peak
2	11340.00	38.50	8.37	34.11	33.57	47.41	54.00	6.59	Average
3	11340.00	38.50	8.37	45.10	33.57	58.40	74.00	15.60	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

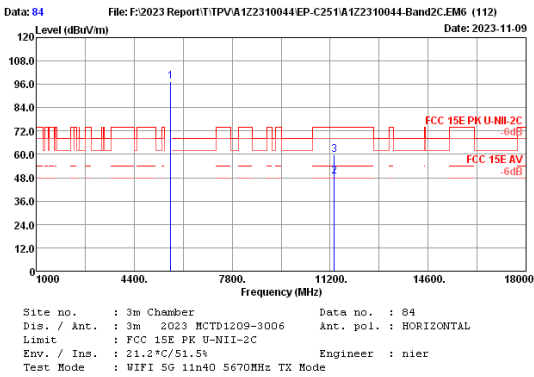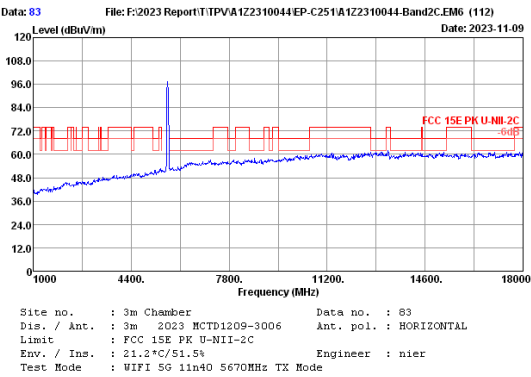

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5670.00	33.28	6.87	90.66	33.57	97.24	-----	-----	Peak
2	11340.00	38.50	8.37	35.27	33.57	48.57	54.00	5.43	Average
3	11340.00	38.50	8.37	46.27	33.57	59.57	74.00	14.43	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

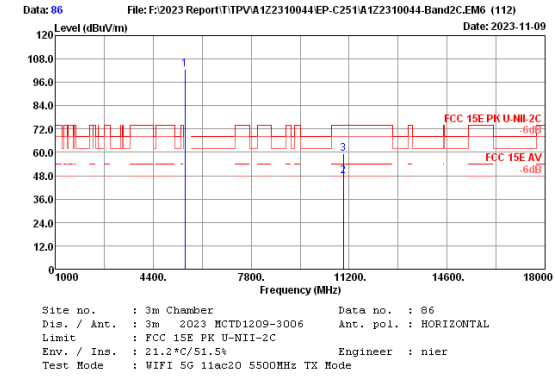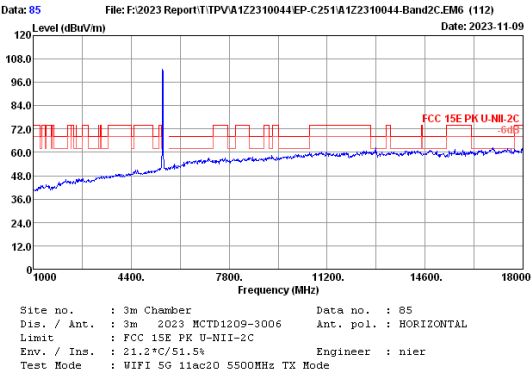

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5500.00	33.70	6.80	95.67	33.60	102.57	74.00	28.57	Peak
2	11000.00	38.70	8.30	34.13	33.50	47.63	54.00	6.37	Average
3	11000.00	38.70	8.30	45.94	33.50	59.44	74.00	14.56	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

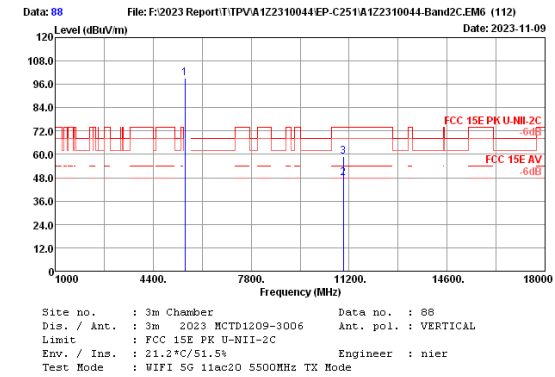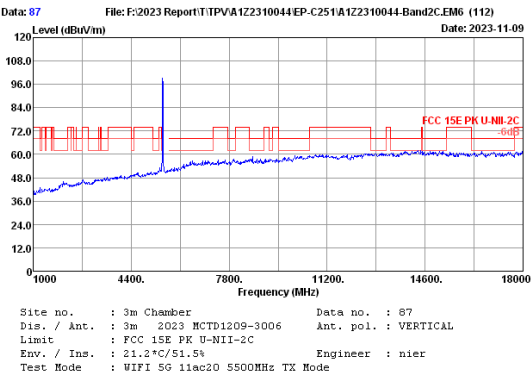

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5500.00	33.70	6.80	92.10	33.60	99.00	74.00	25.00	Peak
2	11000.00	38.70	8.30	34.15	33.50	47.65	54.00	6.35	Average
3	11000.00	38.70	8.30	45.58	33.50	59.08	74.00	14.92	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

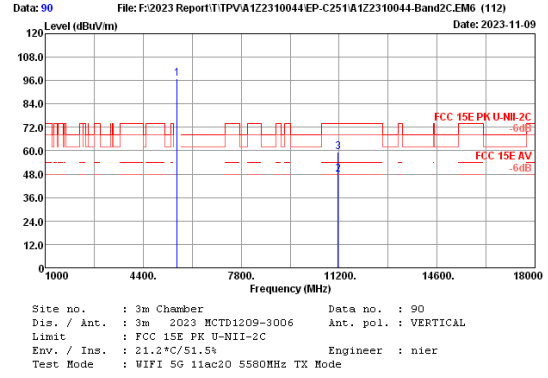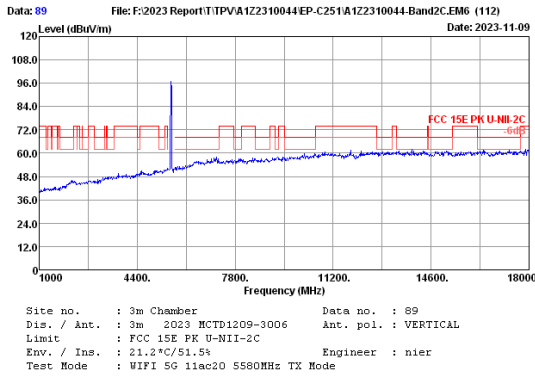

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5580.00	33.28	6.83	90.38	33.58	96.91	74.00	6.39	Peak
2	11160.00	38.64	8.33	34.17	33.53	47.61	54.00	6.39	Average
3	11160.00	38.64	8.33	45.70	33.53	59.14	74.00	14.86	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

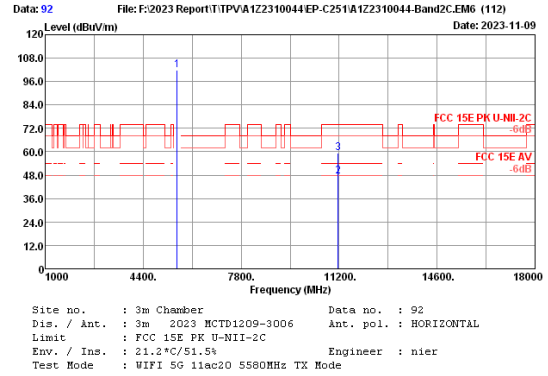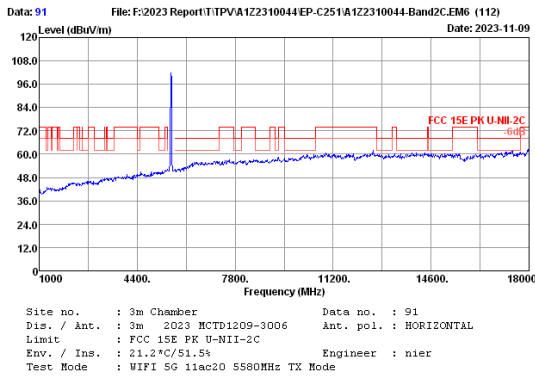

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5580.00	33.28	6.83	95.49	33.58	102.02	74.00	6.47	Peak
2	11160.00	38.64	8.33	34.09	33.53	47.53	54.00	6.47	Average
3	11160.00	38.64	8.33	45.81	33.53	59.25	74.00	14.75	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

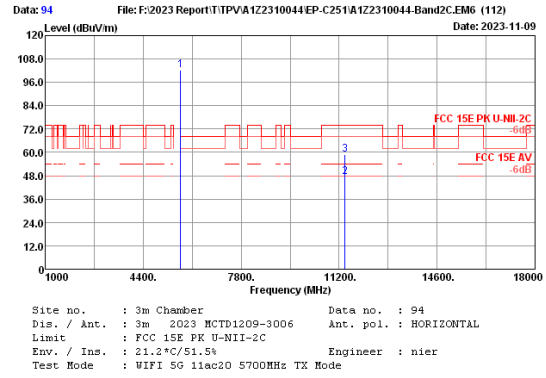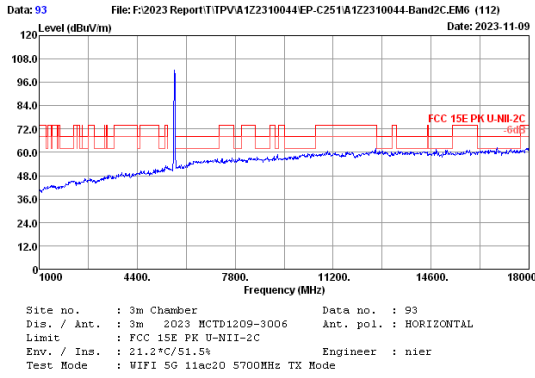

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5700.00	33.40	6.88	95.53	33.56	102.25	74.00	6.63	Peak
2	11400.00	38.50	8.38	34.07	33.58	47.37	74.00	15.18	Average
3	11400.00	38.50	8.38	45.52	33.58	58.82	74.00	15.18	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

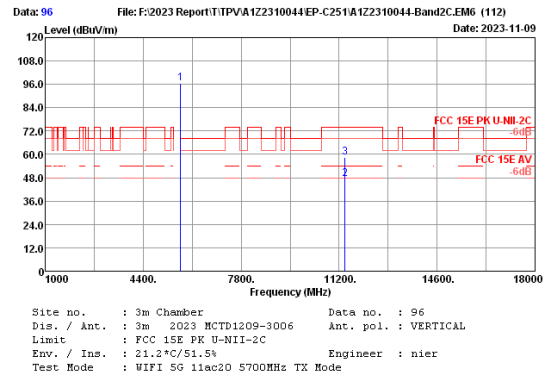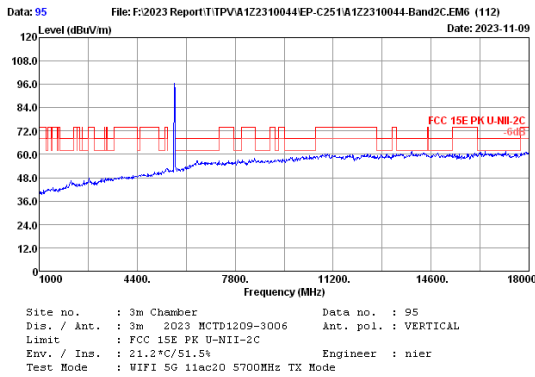

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5700.00	33.40	6.88	89.68	33.56	96.40	74.00	6.57	Peak
2	11400.00	38.50	8.38	34.13	33.58	47.43	74.00	15.63	Average
3	11400.00	38.50	8.38	45.07	33.58	58.37	74.00	15.63	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

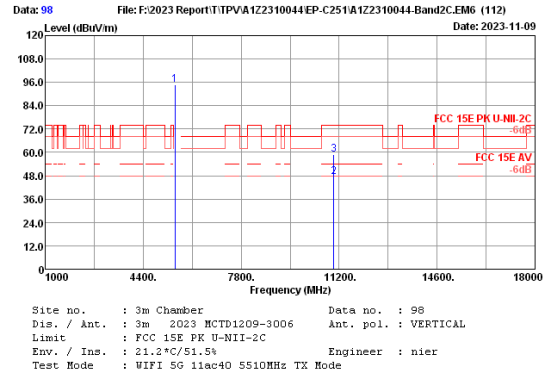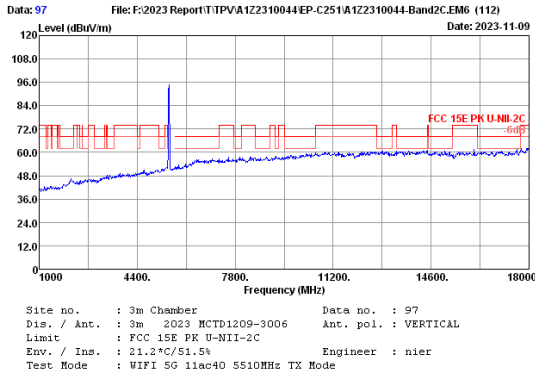

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5510.00	33.64	6.80	87.93	33.60	94.77	-----	-----	Peak
2	11020.00	38.70	8.30	34.07	33.51	47.56	54.00	6.44	Average
3	11020.00	38.70	8.30	45.61	33.51	59.10	74.00	14.90	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

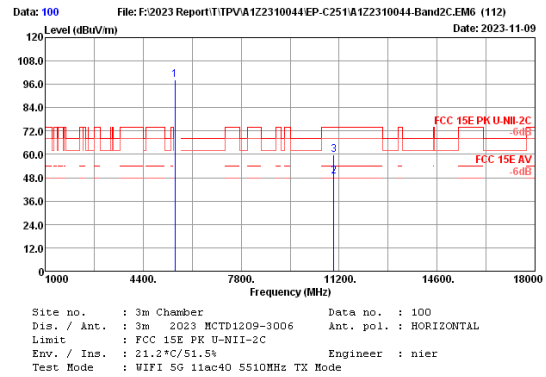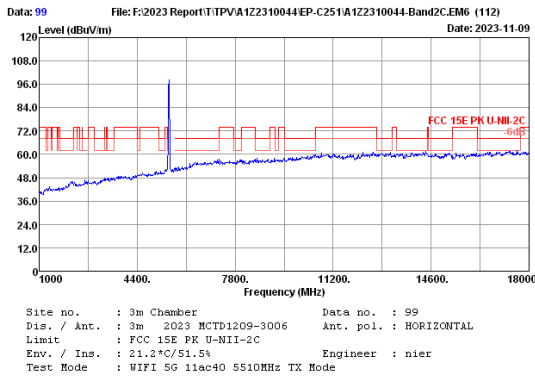

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5510.00	33.64	6.80	91.59	33.60	98.43	-----	-----	Peak
2	11020.00	38.70	8.30	35.02	33.51	48.51	54.00	5.49	Average
3	11020.00	38.70	8.30	46.33	33.51	59.82	74.00	14.18	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

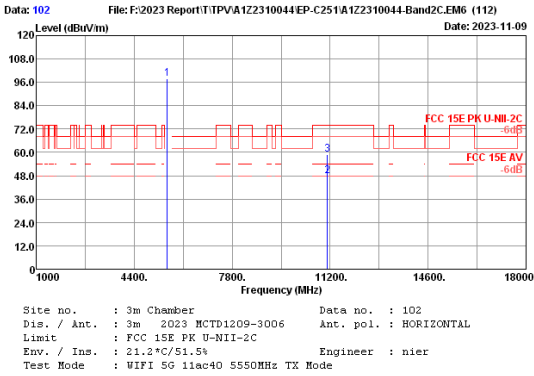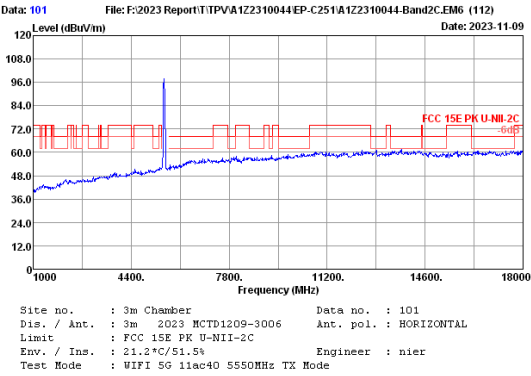

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5550.00	33.40	6.82	91.12	33.59	97.75	74.00	23.75	Peak
2	11100.00	38.70	8.32	34.17	33.52	47.67	54.00	-6.33	Average
3	11100.00	38.70	8.32	45.35	33.52	58.85	74.00	-15.15	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

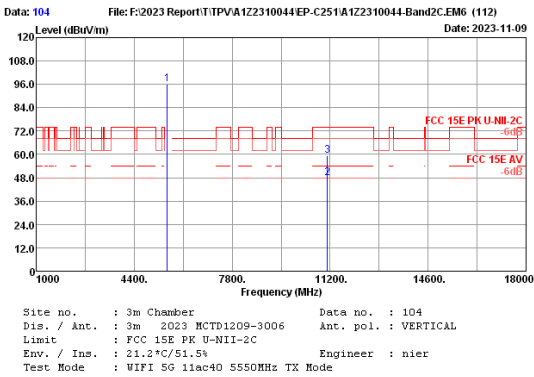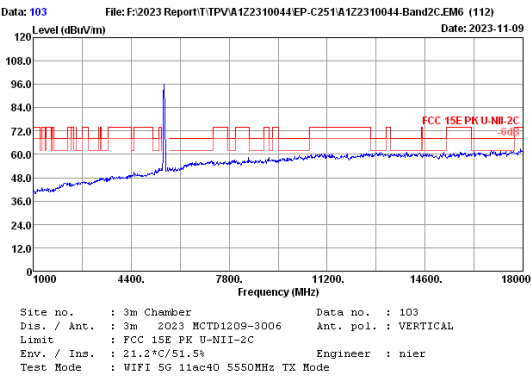

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5550.00	33.40	6.82	69.30	33.59	95.99	74.00	21.99	Peak
2	11100.00	38.70	8.32	34.13	33.52	47.63	54.00	-6.37	Average
3	11100.00	38.70	8.32	45.84	33.52	59.34	74.00	-14.66	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

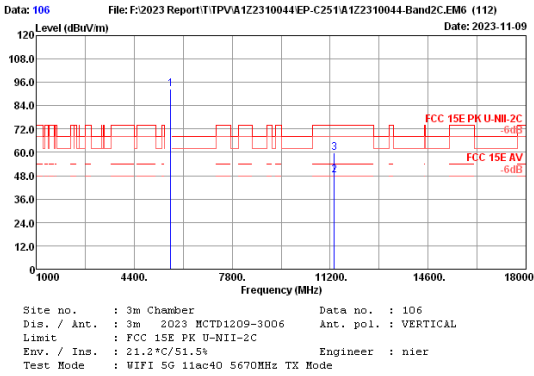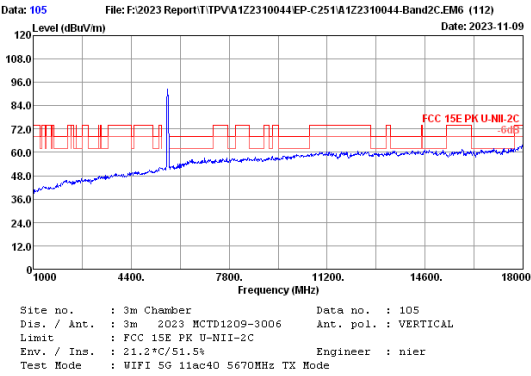

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5670.00	33.28	6.87	85.82	33.57	92.40	-----	-----	Peak
2	11340.00	38.50	8.37	35.18	33.57	48.48	54.00	5.52	Average
3	11340.00	38.50	8.37	46.35	33.57	59.65	74.00	14.35	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

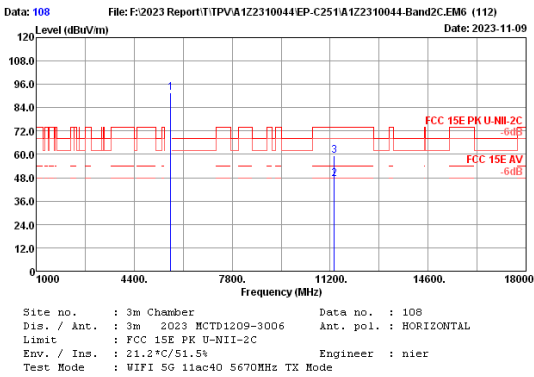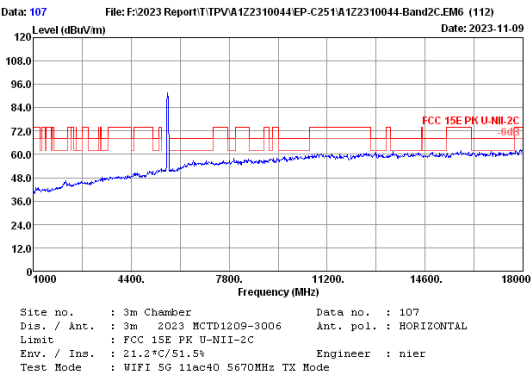

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	Emission factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5670.00	33.28	6.87	85.24	33.57	91.62	-----	-----	Peak
2	11340.00	38.50	8.37	34.11	33.57	47.41	54.00	6.59	Average
3	11340.00	38.50	8.37	45.94	33.57	59.24	74.00	14.76	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

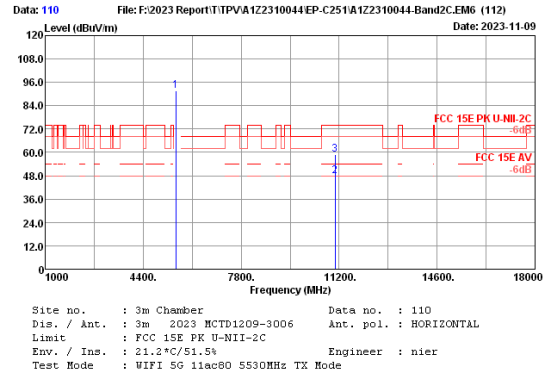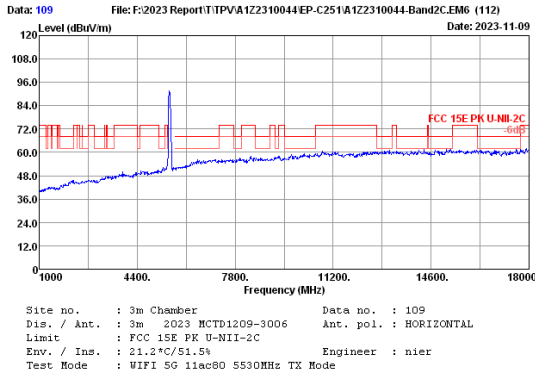

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5530.00	33.52	6.81	84.90	33.59	91.64	-----	-----	Peak
2	11060.00	38.70	8.31	34.42	33.52	47.91	54.00	6.09	Average
3	11060.00	38.70	8.31	45.51	33.52	59.00	74.00	15.00	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

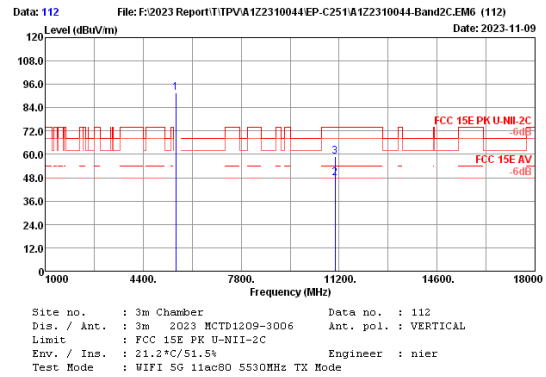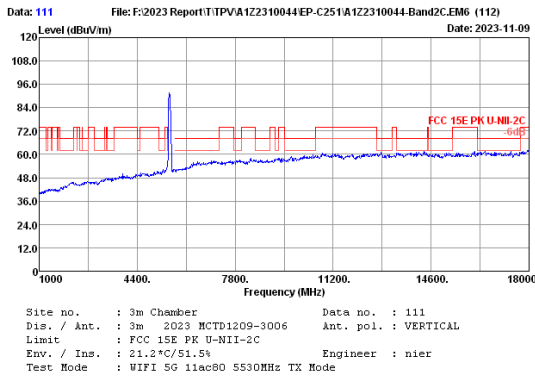

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5530.00	33.52	6.81	84.90	33.59	91.64	-----	-----	Peak
2	11060.00	38.70	8.31	34.19	33.52	47.68	54.00	6.32	Average
3	11060.00	38.70	8.31	45.59	33.52	59.08	74.00	14.92	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

U-NII-3 Band:

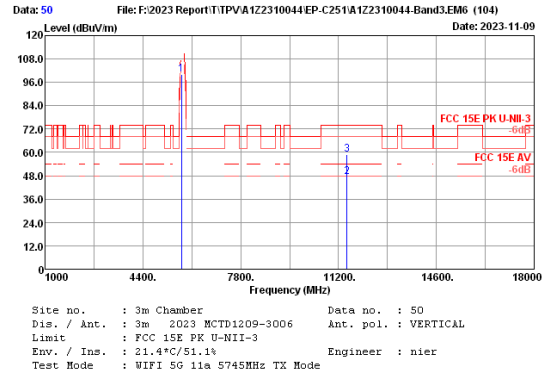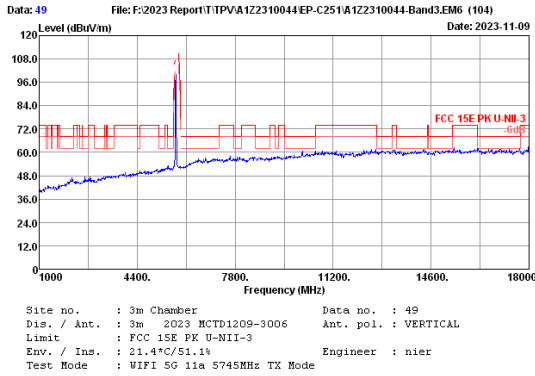

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	33.58	6.90	93.32	33.55	100.25	74.00	26.25	Peak
2	11490.00	38.59	8.40	34.15	33.60	47.54	54.00	6.46	Average
3	11490.00	38.59	8.40	45.65	33.60	59.04	74.00	14.96	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

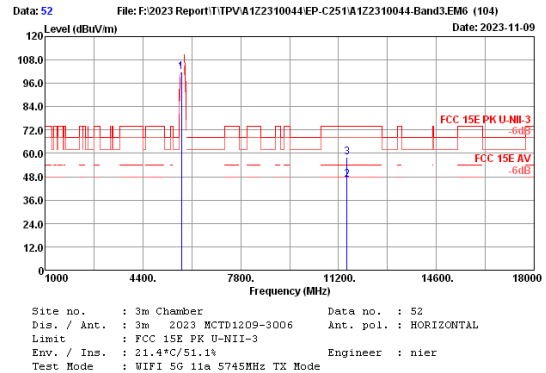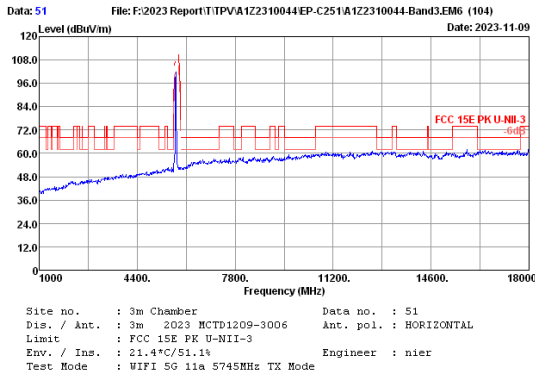

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	33.58	6.90	94.83	33.55	101.76	74.00	27.76	Peak
2	11490.00	38.59	8.40	33.26	33.60	46.65	54.00	7.35	Average
3	11490.00	38.59	8.40	44.40	33.60	57.79	74.00	16.21	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

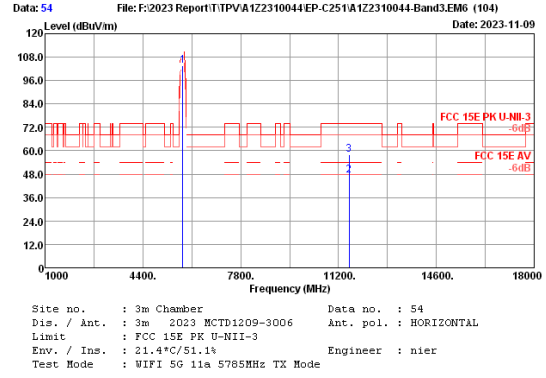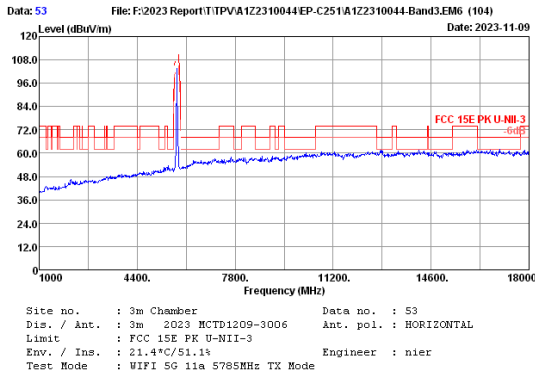

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.60	6.91	96.60	33.54	103.57	---	---	Peak
2	11570.00	38.60	8.41	34.13	33.62	47.52	54.00	6.48	Average
3	11570.00	38.60	8.41	44.70	33.62	58.09	74.00	15.91	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

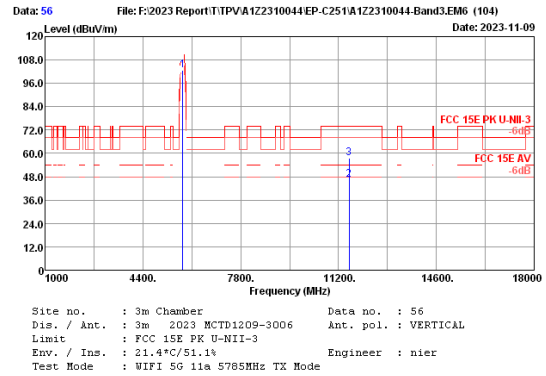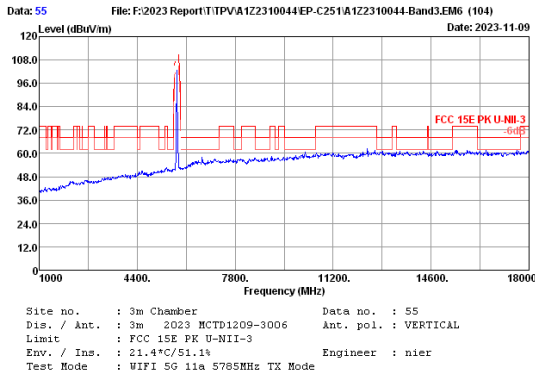

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.60	6.91	95.89	33.54	102.86	---	---	Peak
2	11570.00	38.60	8.41	33.29	33.62	46.68	54.00	7.32	Average
3	11570.00	38.60	8.41	44.34	33.62	57.73	74.00	16.27	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

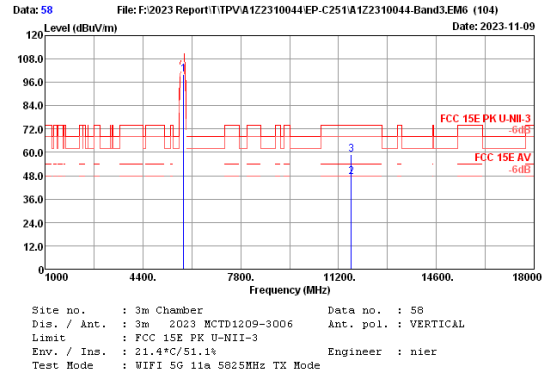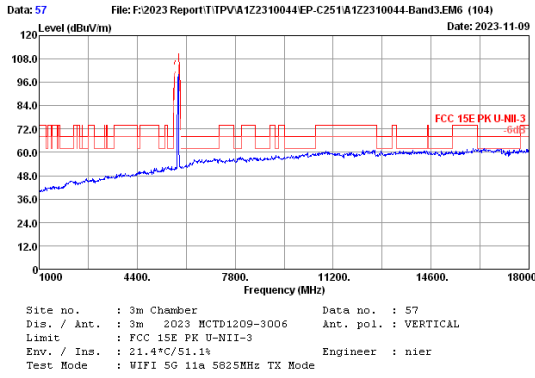

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	33.60	6.93	93.20	33.54	100.19	-----	-----	Peak
2	11650.00	38.55	8.43	34.17	33.63	47.52	54.00	6.48	Average
3	11650.00	38.55	8.43	45.62	33.63	58.97	74.00	15.03	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

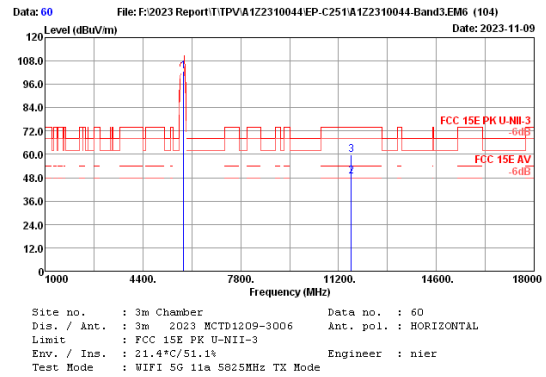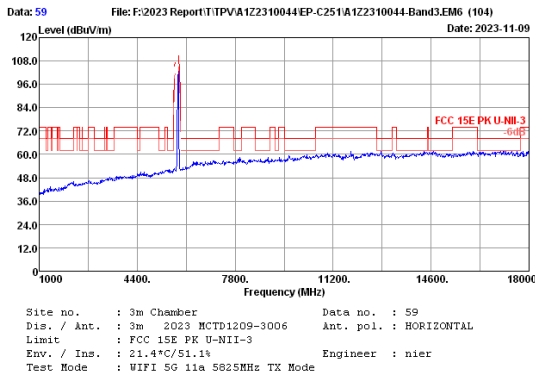

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	33.60	6.93	95.56	33.54	102.55	-----	-----	Peak
2	11650.00	38.55	8.43	35.27	33.63	48.62	54.00	5.38	Average
3	11650.00	38.55	8.43	46.61	33.63	59.96	74.00	14.04	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

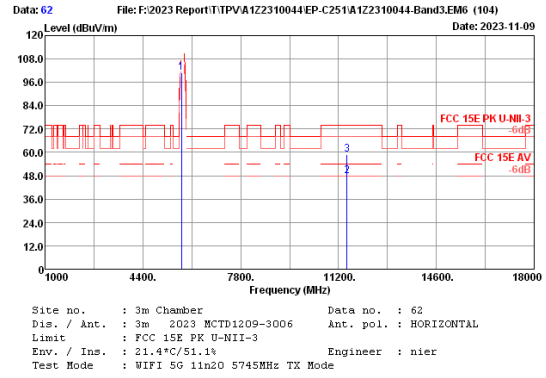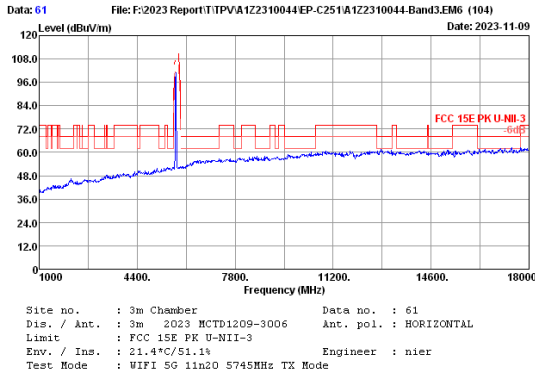

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	33.58	6.90	93.86	33.55	100.79	72.00	28.79	Peak
2	11490.00	38.59	8.40	34.51	33.60	47.90	54.00	6.10	Average
3	11490.00	38.59	8.40	45.71	33.60	59.10	74.00	14.90	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

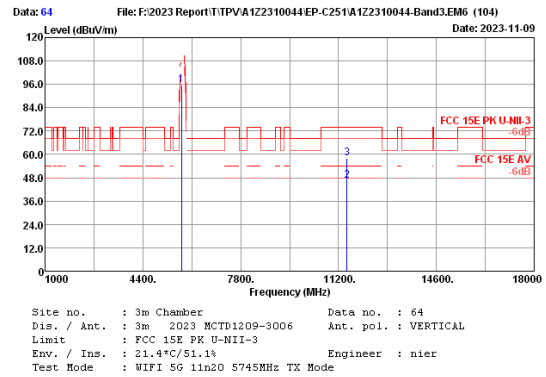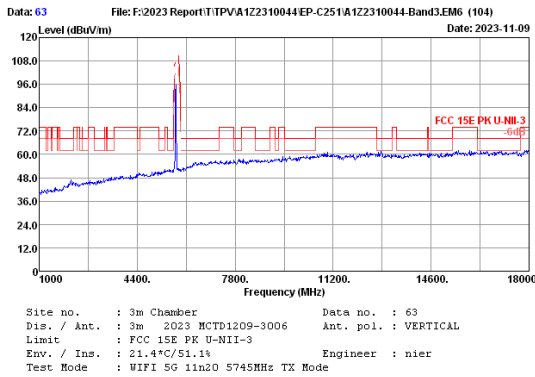

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	33.58	6.90	98.58	33.55	95.51	72.00	23.51	Peak
2	11490.00	38.59	8.40	33.29	33.60	46.68	54.00	7.32	Average
3	11490.00	38.59	8.40	44.76	33.60	58.15	74.00	15.85	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

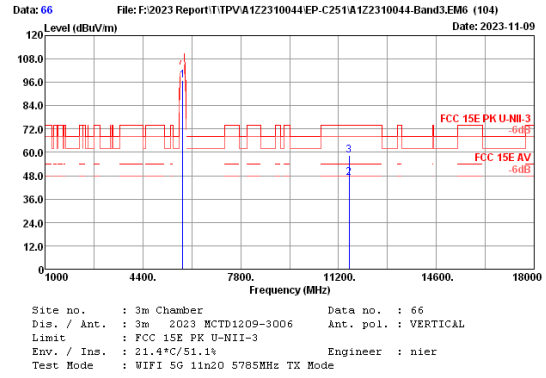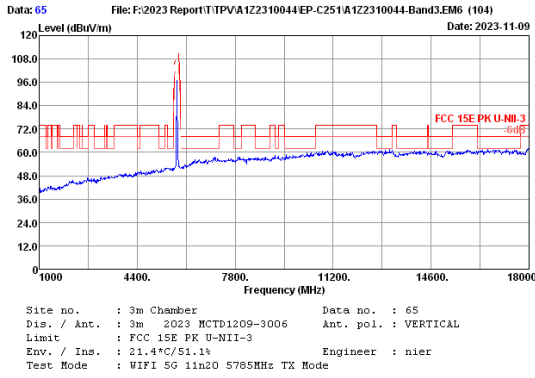

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.60	6.91	90.14	33.54	97.11	-----	-----	Peak
2	11570.00	38.60	8.41	33.57	33.62	46.96	54.00	7.04	Average
3	11570.00	38.60	8.41	44.92	33.62	58.31	74.00	15.69	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

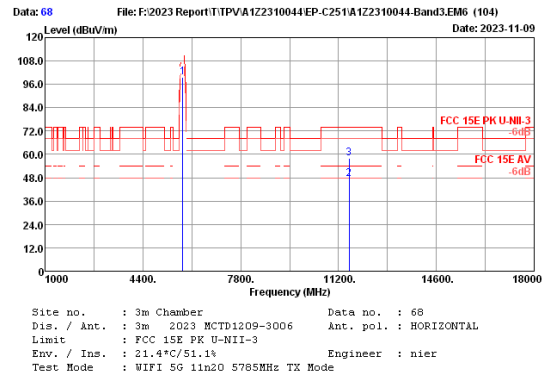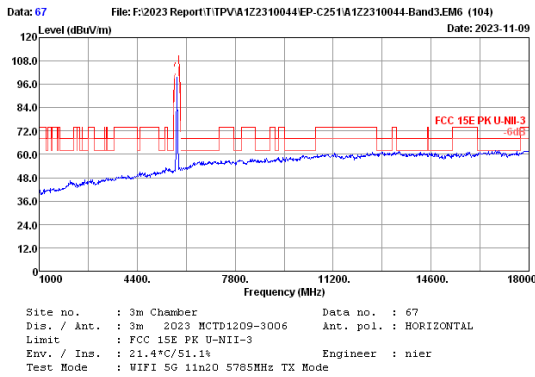

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.60	6.91	92.46	33.54	99.43	-----	-----	Peak
2	11570.00	38.60	8.41	33.95	33.62	47.34	54.00	6.66	Average
3	11570.00	38.60	8.41	44.47	33.62	57.86	74.00	16.14	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

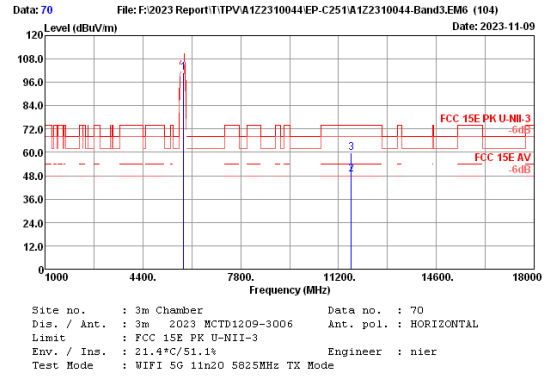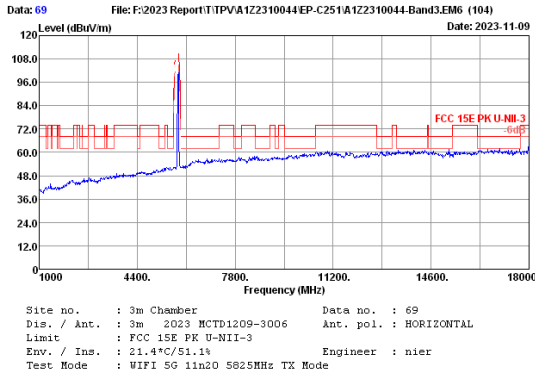

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	33.60	6.93	93.84	33.54	100.83	-----	-----	Peak
2	11650.00	38.55	8.43	35.21	33.63	48.56	54.00	5.44	Average
3	11650.00	38.55	8.43	46.34	33.63	59.69	74.00	14.31	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

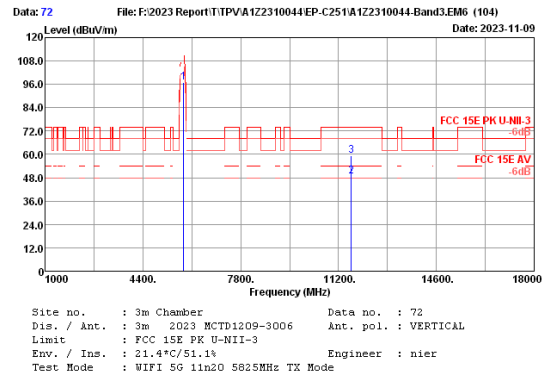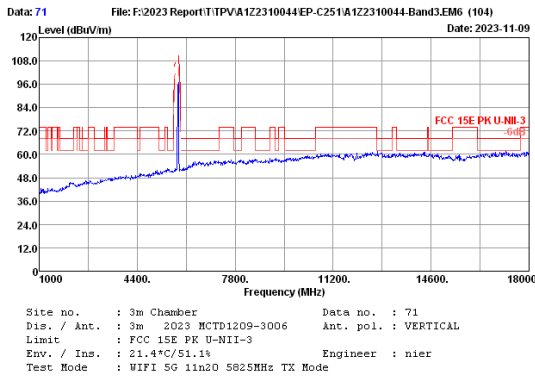

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	33.60	6.93	69.89	33.54	96.86	-----	-----	Peak
2	11650.00	38.55	8.43	35.27	33.63	48.62	54.00	5.38	Average
3	11650.00	38.55	8.43	46.01	33.63	59.36	74.00	14.64	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

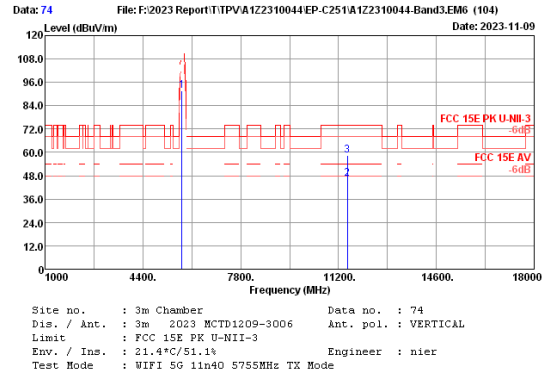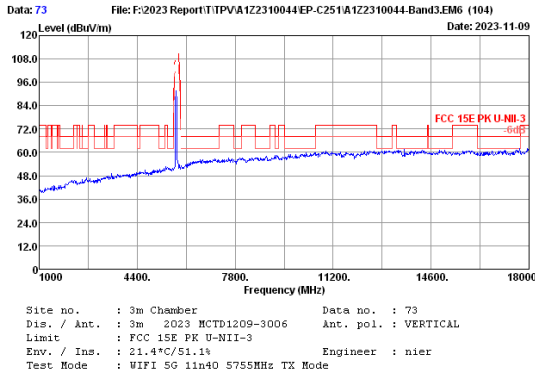

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.00	33.60	6.90	84.73	33.55	91.68	-----	-----	Peak
2	11510.00	38.60	8.40	33.27	33.60	46.67	54.00	7.33	Average
3	11510.00	38.60	8.40	44.85	33.60	58.25	74.00	15.75	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

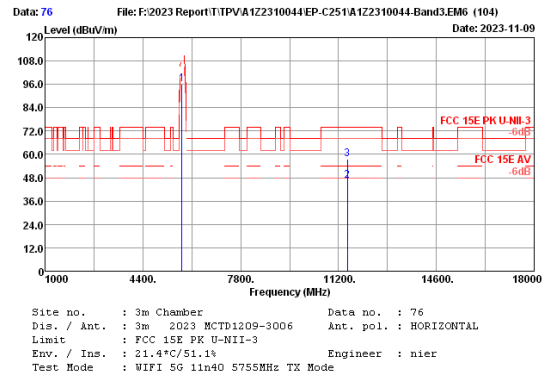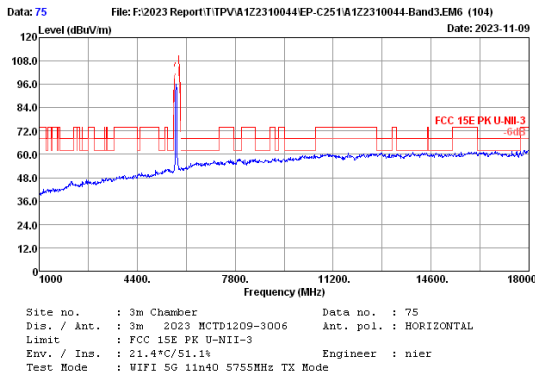

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.00	33.60	6.90	89.33	33.55	96.28	-----	-----	Peak
2	11510.00	38.60	8.40	33.29	33.60	46.69	54.00	7.31	Average
3	11510.00	38.60	8.40	44.33	33.60	57.73	74.00	16.27	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: APYBSC0005

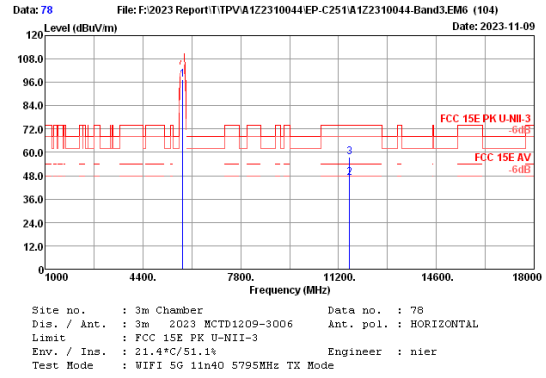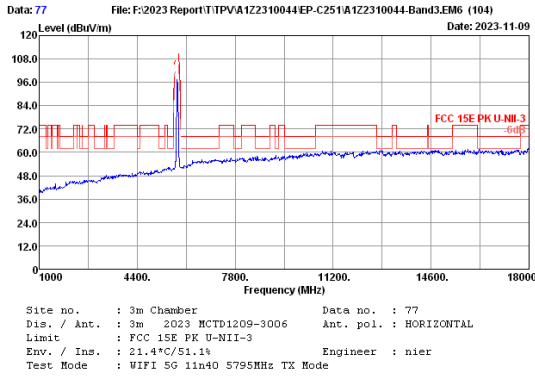

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.00	33.60	6.92	90.43	33.54	97.41	-----	-----	Peak
2	11590.00	38.60	8.42	33.54	33.62	46.94	54.00	7.06	Average
3	11590.00	38.60	8.42	44.16	33.62	57.56	74.00	16.44	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

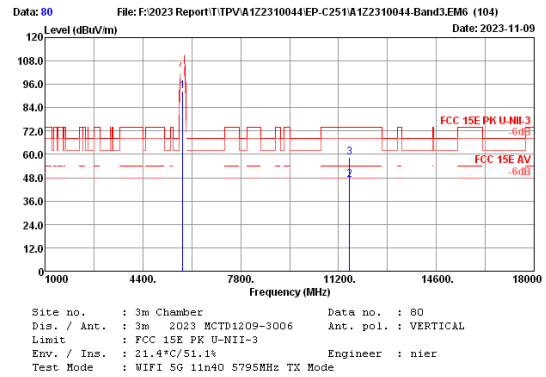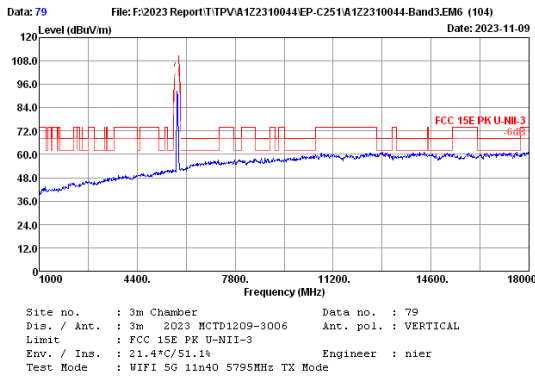

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.00	33.60	6.92	65.43	33.54	92.41	-----	-----	Peak
2	11590.00	38.60	8.42	33.69	33.62	47.09	54.00	6.91	Average
3	11590.00	38.60	8.42	44.98	33.62	58.38	74.00	15.62	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.