




M/N:TAILGATER iPA77

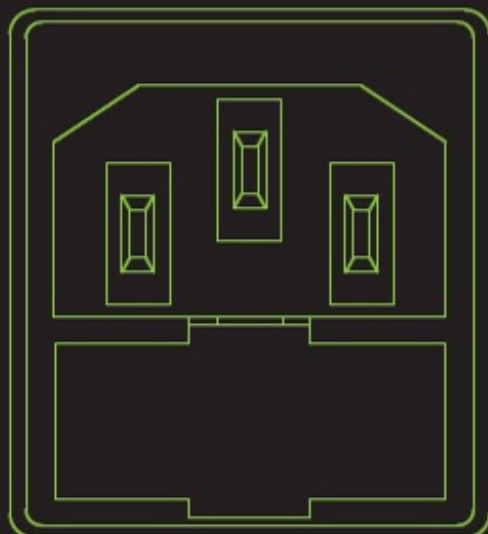

POWER

ON

OFF



AC FUSE INPUT RANGE
120V ~ 800mA 250V 100-240V~ 60Hz 50W

FOR MAXIMUM BATTERY LIFE:

- FULLY CHARGE BEFORE USING
- FULLY CHARGE BEFORE STORAGE
- FOR HELP VISIT IONAUDIO.COM



Intertek
XXXXXXX

CONFORMS TO ANSI/UL
STD. 60065
CERTIFIED TO CAN/CSA
STD. C22.2 NO.60065

IC: 10541A-IPA77

FCC ID: 2AB3E-IPA77

CAN ICES-3 (B)/NMB-3(B)



CAUTION

**RISK OF ELECTRIC SHOCK
DO NOT OPEN**



WARNING: SHOCK HAZARD - DO NOT OPEN
AVIS: RISQUE DE CHOC ELECTRIQUE - NE PAS OUVRIR
**WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK
DO NOT EXPOSE THIS EQUIPMENT TO RAIN OR MOISTURE**
**AVIS: NE PAS EXPOSER CE MATERIEL A LA PLUIE OU L'HUMIDITE
AFIN DE REDUIRE LE RISQUE D'INFLAMMATION OU DE CHOC ELECTRIQUE**

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRABLE OPERATION.

MADE IN CHINA