

Submittal Application Report

For Grant Of Certification


Model: Microvu HD
13.56 MHz


RFID Device Transmitter
FCC ID: WPZ-MICROVU
IC: 7945A-MICROVU

FOR

Digital Ally
9705 Loiret Blvd
Lenexa, KS 66219

Test Report Number: 141117
IC Test Site Registration: 3041A-1

Authorized Signatory: 
Scot D. Rogers



ROGERS LABS, INC.

4405 West 259th Terrace
Louisburg, KS 66053
Phone / Fax (913) 837-3214

Engineering Test Report for Grant of Certification Application

FOR
CFR 47, PART 15C - Intentional Radiators
CFR 47 Paragraph 15.225 and Industry Canada RSS-210
License Exempt Intentional Radiator

For
Digital Ally
9705 Loiret Blvd
Lenexa, KS 66219

Model: Microvu HD
Low Power Transmitter
Frequency Range 13.56 MHz
FCC ID#: WPZ-MICROVU
IC: 7945A-MICROVU

Test Date: November 17, 2014

Certifying Engineer: *Scot D. Rogers*
Scot D. Rogers
Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Telephone/Facsimile: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory.
This report must not be used by the client to claim product certification, approval, or
endorsement by NVLAP, NIST, or any agency of the Federal Government.



Table Of Contents

| | |
|---|-----------|
| TABLE OF CONTENTS..... | 3 |
| REVISIONS..... | 4 |
| FORWARD | 5 |
| OPINION / INTERPRETATION OF RESULTS | 5 |
| EQUIPMENT TESTED..... | 5 |
| EQUIPMENT FUNCTION AND CONFIGURATION..... | 6 |
| Equipment Configuration..... | 6 |
| APPLICATION FOR CERTIFICATION..... | 7 |
| APPLICABLE STANDARDS & TEST PROCEDURES | 8 |
| EQUIPMENT TESTING PROCEDURES | 8 |
| AC Line Conducted Emission Test Procedure | 8 |
| Radiated Emission Test Procedure..... | 8 |
| Diagram 1 Test arrangement for radiated emissions of tabletop equipment..... | 9 |
| Diagram 2 Test arrangement for radiated emissions tested on Open Area Test Site (OATS)..... | 10 |
| LIST OF TEST EQUIPMENT | 11 |
| UNITS OF MEASUREMENTS | 12 |
| ENVIRONMENTAL CONDITIONS..... | 12 |
| TEST SITE LOCATIONS | 12 |
| STATEMENT OF MODIFICATIONS AND DEVIATIONS | 12 |
| INTENTIONAL RADIATORS..... | 13 |
| Antenna Requirements | 13 |
| Restricted Bands of Operation..... | 13 |
| Table 1 Radiated Emissions in Restricted Bands Data | 13 |
| Summary of Results for Radiated Emissions in Restricted Bands | 14 |
| General Radiated Emissions Procedure..... | 14 |



| | |
|--|-----------|
| Table 2 General Radiated Emissions from EUT Data (Highest Emissions)..... | 15 |
| Summary of Results for General Radiated Emissions | 15 |
| Operation in the Band 13.110 - 14.010 MHz Band..... | 16 |
| Table 3 NFC Transmitter Emissions in Frequency Band 13.110-14.010 MHz..... | 17 |
| Table 4 Transmitter Harmonic Radiated Emissions Data..... | 17 |
| Figure 1 Plot of 99 percent Occupied Bandwidth..... | 18 |
| Frequency Stability | 18 |
| Measurements Required | 18 |
| Test Arrangement | 19 |
| Table 5 Frequency Stability vs. Temperature Results | 20 |
| Table 6 Frequency Stability vs. Input Power Supply Voltage Results | 20 |
| Summary of Results for NFC Transmitter Emissions | 20 |
| ANNEX..... | 21 |
| Annex A Measurement Uncertainty Calculations | 22 |
| Annex B Rogers Labs Test Equipment List..... | 23 |
| Annex C Rogers Qualifications | 24 |
| Annex D FCC Site Registration Letter..... | 25 |
| Annex E Industry Canada Site Registration Letter | 26 |

Revisions

Revision 1 Issued April 15, 2015



Forward

The following information is submitted for consideration in obtaining Grant of Certification for low power intentional radiator per CFR 47 Paragraph 15.225, and Industry Canada RSS-210 issue 8, operation at 13.56 MHz as Near Field Communications Device.

Name of Applicant: Digital Ally FRN: 0018 03 1203
9705 Loiret Blvd
Lenexa, KS 66219
Model: Microvu HD
FCC ID: WPZ-MICROVU Industry Canada ID IC: 7945A-MICROVU

Frequency Range: 13.56 MHz

Operating power: maximum average power 33.3 dB μ V/m @ 30 meters (73.3 dB μ V/m @ 3m),
99 percent occupied bandwidth 730 kHz

Opinion / Interpretation of Results

| Tests Performed | Margin (dB) | Results |
|--|-------------|----------|
| Emissions as per CFR 47 paragraphs 2 and 15.205 | -12.6 | Complies |
| Emissions as per CFR 47 paragraphs 2 and 15.207 | N/A | Complies |
| Emissions as per CFR 47 paragraphs 2 and 15.209 | -4.6 | Complies |
| Harmonic Emissions per CFR 47 15.225 | -4.7 | Complies |
| Emissions per RSS-210 Issue 8 Annex 2 Sec A2.6 and RSS-GEN | -4.7 | Complies |

Equipment Tested


| <u>Equipment</u> | <u>Model</u> | <u>Serial Number</u> | <u>FCC I.D.</u> |
|-----------------------|--------------|----------------------|-----------------|
| EUT | Microvu HD | ENG1 | WPZ-MICROVU |
| Remote Mic Station | BTR800 | 14060301 | PE3WPM-2400R |
| Remote Microphone | RMT800 | 14060301 | PE3WPM-2400T |
| Bench DC Power Supply | 1670A | N961313540 | N/A |

Test results in this report relate only to the items tested.

Equipment Function and Configuration

The EUT is a mobile video recording device incorporating transceiver circuitry operating at 13.56 MHz frequency. The transmitter system provides user ability to read compatible RFID tag. The design utilizes permanently attached PCB antenna. During testing, the Microvu HD was interfaced with the Remote microphone charging station and powered from DC power supply. This configuration provided operational control of the EUT. The Microvu HD offers provision for micro SD memory card, USB port, and vehicle interface lines for power and communications. The system is fix mounted in vehicle installations only. For testing purposes, the Microvu HD received powered from the support computer system and was configured to transmit in available mode. The antenna system complies with requirements for unique antenna connection port.

Equipment Configuration

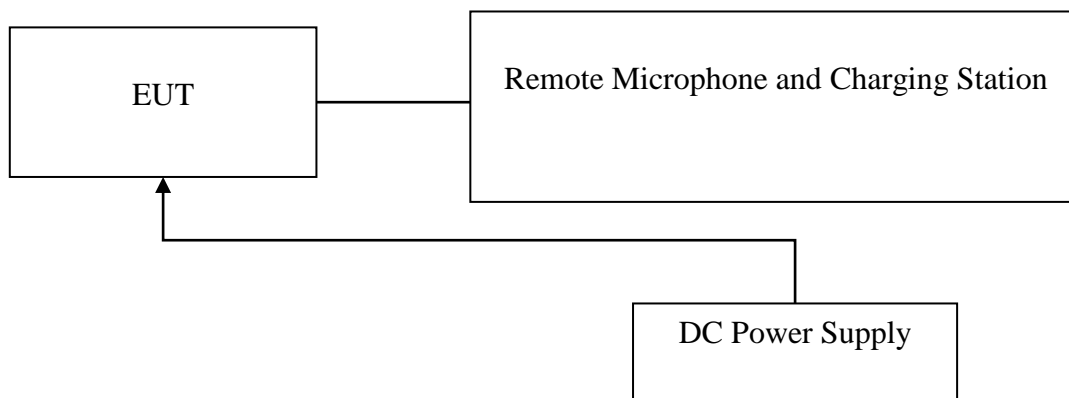



Application for Certification

- (1) Manufacturer: Digital Ally
9705 Loiret Blvd
Lenexa, KS 66219
- (2) Identification: Model: Microvu HD
FCC I.D.: WPZ-MICROVU IC: 7945A-MICROVU
- (3) Instruction Book:
Refer to Exhibit for Instruction Manual.
- (4) Description of Circuit Functions:
Refer to Exhibit of Operational Description.
- (5) Block Diagram with Frequencies:
Refer to Exhibit of Operational Description.
- (6) Report of Measurements:
Report of measurements follows in this Report.
- (7) Photographs: Construction, Component Placement, etc.:
Refer to Exhibit for photographs of equipment.
- (8) List of Peripheral Equipment Necessary for operation. The equipment operates from direct current power received from vehicle installation. The EUT provides interface port for connection with vehicle mounted compliant USB equipment and memory card. During testing, the EUT was connected to manufacturer provided associated accessories as documented in this filing and powered from external DC bench power supply.
- (9) Transition Provisions of CFR47 15.37 are not requested
- (10) Not Applicable. The unit is not a scanning receiver.
- (11) Not Applicable. The EUT does not operate in the 59 – 64 GHz frequency band.
- (12) The equipment is not software defined and this section is not applicable.



Applicable Standards & Test Procedures

In accordance with the Federal Communications Commission and Code of Federal Regulations CFR 47, dated October 1, 2014, Part 2, Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057, applicable parts of paragraph 15, Part 15C paragraph 15.225 and Industry Canada RSS-210 A2.6, the following information is submitted. Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in the ANSI C63.10-2009 Document.


Equipment Testing Procedures

AC Line Conducted Emission Test Procedure

The equipment operates from direct current power only and offers no provision for connection to utility AC power systems. Therefore, no AC line conducted emissions testing was required or performed.


Radiated Emission Test Procedure

The EUT was placed on a rotating 1 x 1.5-meter wooden platform, 0.8 meters above the ground plane at a distance of 3 meters from the FSM antenna. Radiated emissions testing were performed as required in CFR47 paragraph 15C, RSS-210 and as specified in ANSI C63.10-2009. EMI energy was maximized by equipment placement, raising and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken using a spectrum analyzer. The frequency spectrum from 9 kHz to 25,000 MHz was searched for during preliminary investigation. Refer to diagrams one and two showing typical test arrangement and photographs in the test setup exhibits for specific EUT placement during testing.

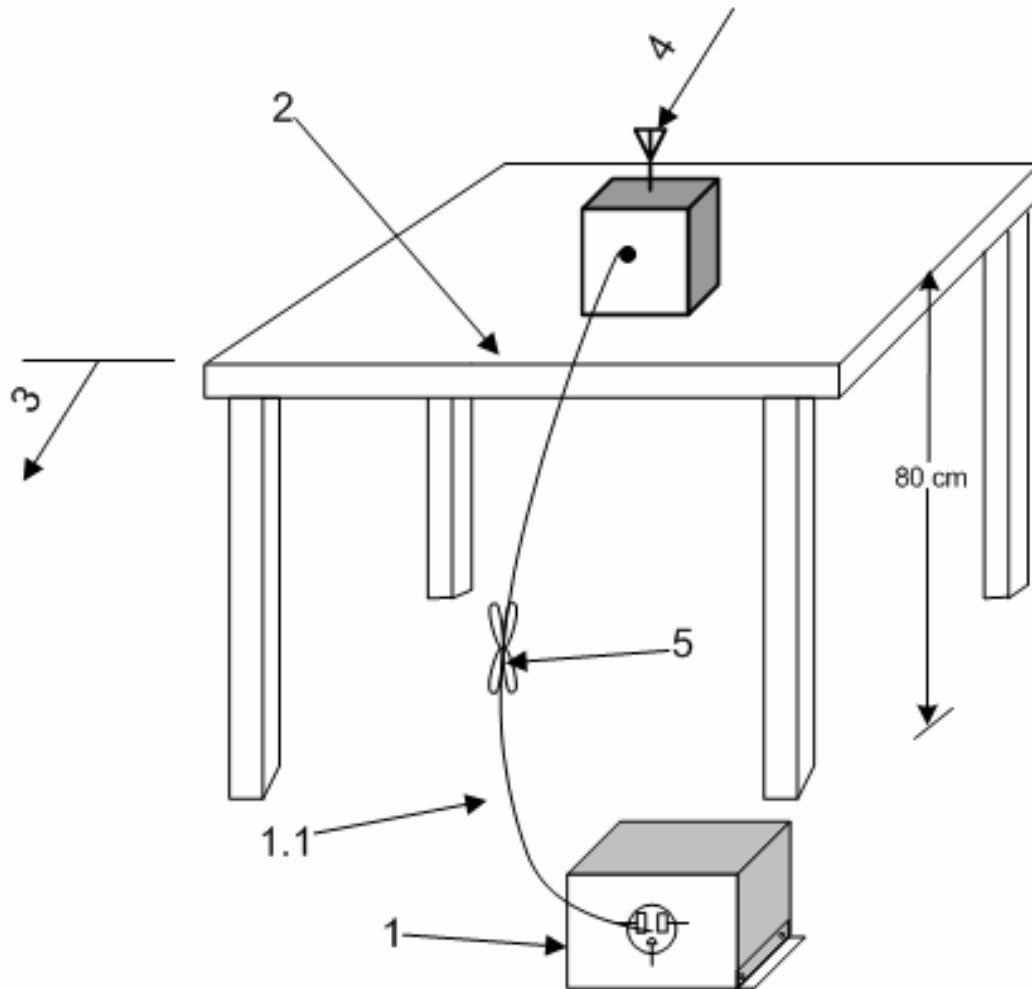

1. A LISN is optional for radiated measurements between 30 MHz to 1000 MHz, but not allowed for measurements below 30 MHz and above 1000 MHz (See 6.4.3, 6.5.1, and 6.6.3). If used, connect EUT to one LISN. Unused LISN measuring port connectors shall be terminated in 50Ω. LISN can be placed on top of, or immediately beneath, reference ground plane (see 6.2.2 and 6.2.3.1).
 - 1.1 LISN spaced at least 80 cm from nearest part of EUT chassis.
2. The EUT shall be placed in the center of the table to the extent possible (See 6.2.3.1 and 6.3.4).
3. A vertical conducting plane, if used for conducted tests per 6.2.2, shall be removed for radiated emission tests.
4. Antenna may be integral or detachable, depending on the EUT.
5. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long.

Diagram 1 Test arrangement for radiated emissions of tabletop equipment

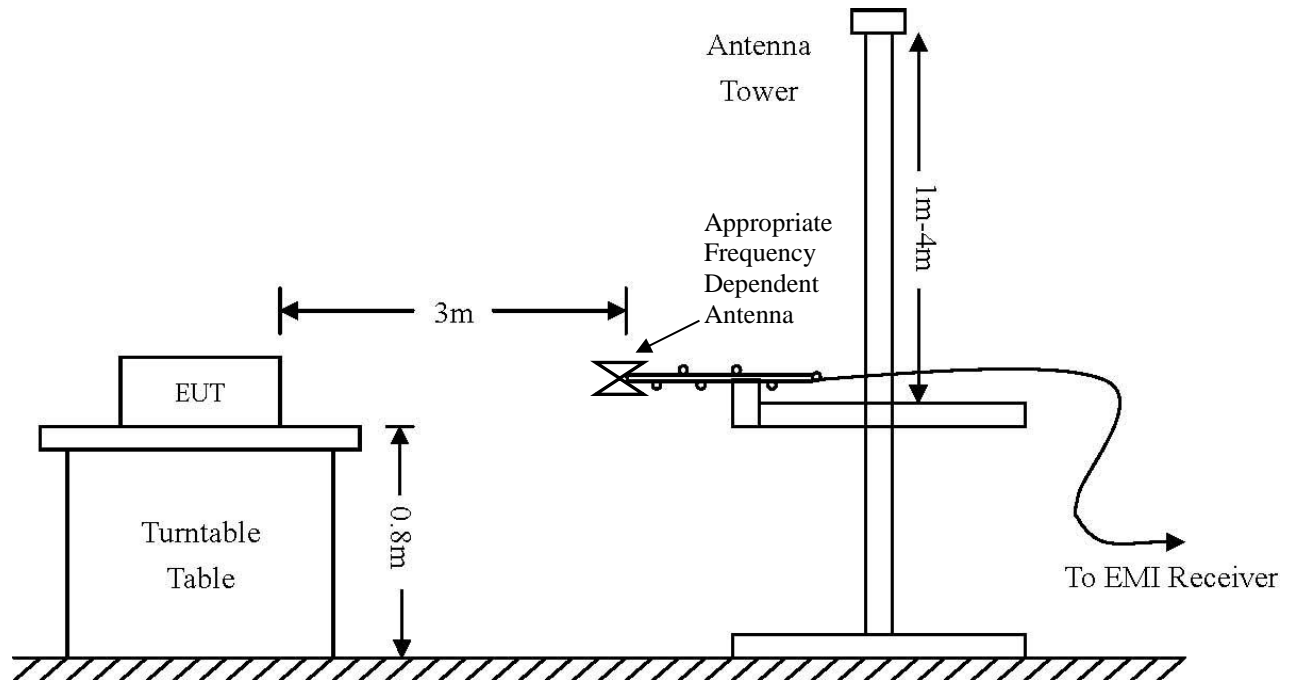

| Frequency: 9 kHz-30 MHz | Frequency: 30 MHz- 1 GHz | Frequency: Above 1 GHz |
|-------------------------|--------------------------|------------------------|
| Loop Antenna | Broadband Biconilog | Horn |
| RBW = 9 kHz | RBW = 120 kHz | RBW = 1 MHz |
| VBW = 30 kHz | VBW = 120 kHz | VBW = 1 MHz |
| Sweep time = Auto | Sweep time = Auto | Sweep time = Auto |
| Detector = PK, QP | Detector = PK, QP | Detector = PK, AV |
| Antenna Height 1m | Antenna Height 1-4m | Antenna Height 1-4m |

Diagram 2 Test arrangement for radiated emissions tested on Open Area Test Site (OATS)

List of Test Equipment

A Rohde and Schwarz ESU40 and/or Hewlett Packard 8591EM was used as the measuring device for the emissions testing of frequencies below 1 GHz. A Rohde and Schwarz ESU40 and/or Hewlett Packard 8562A Spectrum Analyzer was used as the measuring device for testing the emissions at frequencies above 1 GHz. The analyzer settings used are described in the following table. Refer to the appendix for a complete list of test equipment.

| AC Line Conducted Emissions (0.150 -30 MHz) | | |
|---|----------|-------------------|
| RBW | AVG. BW | Detector Function |
| 9 kHz | 30 kHz | Peak / Quasi Peak |
| Emissions (30-1000 MHz) | | |
| RBW | AVG. BW | Detector Function |
| 120 kHz | 300 kHz | Peak / Quasi Peak |
| Emissions (Above 1000 MHz) | | |
| RBW | Video BW | Detector Function |
| 100 kHz | 100 kHz | Peak |
| 1 MHz | 1 MHz | Peak / Average |

| <u>Equipment</u> | <u>Manufacturer</u> | <u>Model (SN)</u> | <u>Band</u> | <u>Cal Date</u> | <u>Due</u> |
|---|---------------------|-------------------------|-------------|-----------------|------------|
| <input type="checkbox"/> LISN | Comp. Design | FCC-LISN-2-MOD.CD (126) | .15-30MHz | 10/14 | 10/15 |
| <input checked="" type="checkbox"/> Cable | Time Microwave | 750HF290-750 (L10M) | 9kHz-40 GHz | 10/14 | 10/15 |
| <input type="checkbox"/> Cable | Belden | RG-58 (L1-CAT3-11509) | 9kHz-30 MHz | 10/14 | 10/15 |
| <input type="checkbox"/> Cable | Belden | RG-58 (L2-CAT3-11509) | 9kHz-30 MHz | 10/14 | 10/15 |
| <input type="checkbox"/> Antenna | ARA | BCD-235-B (169) | 20-350MHz | 10/14 | 10/15 |
| <input type="checkbox"/> Antenna | EMCO | 3147 (40582) | 200-1000MHz | 10/14 | 10/15 |
| <input checked="" type="checkbox"/> Antenna | Com Power | AH-118 (10110) | 1-18 GHz | 10/14 | 10/15 |
| <input checked="" type="checkbox"/> Antenna | Com Power | AH-840 (101046) | 18-40 GHz | 5/14 | 5/15 |
| <input checked="" type="checkbox"/> Antenna | EMCO | 6509 (9502-1374) | .001-30 MHz | 10/14 | 10/15 |
| <input checked="" type="checkbox"/> Antenna | Sunol | JB-6 (A100709) | 30-1000 MHz | 10/14 | 10/15 |
| <input checked="" type="checkbox"/> Antenna | Standard | FXRY638A (621786) | 10-18 GHz | 5/14 | 5/15 |
| <input type="checkbox"/> Antenna | EMCO | 3143 (9607-1277) | 20-1200 MHz | 5/14 | 5/15 |
| <input type="checkbox"/> Analyzer | HP | 8591EM (3628A00871) | 9kHz-1.8GHz | 5/14 | 5/15 |
| <input type="checkbox"/> Analyzer | HP | 8562A (3051A05950) | 9kHz-110GHz | 5/14 | 5/15 |
| <input checked="" type="checkbox"/> Analyzer | Rohde & Schwarz | ESU40 (100108) | 20Hz-40GHz | 5/14 | 5/15 |
| <input checked="" type="checkbox"/> Amplifier | Com-Power | PA-010 (171003) | 100Hz-30MHz | 10/14 | 10/15 |
| <input checked="" type="checkbox"/> Amplifier | Com-Power | CPPA-102 (01254) | 1-1000 MHz | 10/14 | 10/15 |
| <input checked="" type="checkbox"/> Amplifier | Com-Power | PAM-118A (551014) | 0.5-18 GHz | 10/14 | 10/15 |



Units of Measurements

Conducted EMI Data is in dB μ V; dB referenced to one microvolt

Radiated EMI Data is in dB μ V/m; dB/m referenced to one microvolt per meter

Sample Calculation:

RFS = Radiated Field Strength, FSM = Field Strength Measured

A.F. = Receive antenna factor, Gain = amplification gains and/or cable losses

$RFS (dB\mu V/m @ 3m) = FSM (dB\mu V) + A.F. (dB) - Gain (dB)$

Environmental Conditions

Ambient Temperature 19.9° C

Relative Humidity 23%

Atmospheric Pressure 1029.2 mb

Test Site Locations

Conducted EMI The AC power line conducted emissions testing performed in a shielded screen room located at Rogers Labs, Inc., 4405 W. 259th Terrace, Louisburg, KS

Radiated EMI The radiated emissions tests were performed at the 3 meters, Open Area Test Site (OATS) located at Rogers Labs, Inc., 4405 W. 259th Terrace, Louisburg, KS

Site Registration Refer to Annex for Site Registration Letters

NVLAP Accreditation Lab code 200087-0

Statement of Modifications and Deviations

No modifications to the EUT were required for the unit to demonstrate compliance with the CFR47 Part 15C and RSS-210 requirements. There were no deviations or modifications to the specifications.

Intentional Radiators

As per CFR47, Subpart C, paragraph 15.225 and RSS-210 Annex 2, section A2.6 the following information is submitted.

Antenna Requirements

The EUT utilizes permanently attached antenna on the printed circuit board inside the enclosure and offers no provision for antenna replacement. The antenna connection point complies with the unique antenna connection requirements. The requirements of 15.203 are fulfilled; there are no deviations or exceptions to the specification.

Restricted Bands of Operation

Spurious emissions falling in the restricted frequency bands of operation were measured at the OATS. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were investigated at the OATS, using appropriate antennas or pyramidal horns, amplification stages, and spectrum analyzer. Peak and average amplitudes of frequencies above 1000 MHz were compared to the required limits with worst-case data presented below. Test procedures of ANSI C63.10-2009 paragraph 6 were used during testing. No other significant emission was observed which fell into the restricted bands of operation. Computed emission values take into account the received and measured radiated field strength, receive antenna correction factor, amplifier gain stage, and test system cable losses.

Table 1 Radiated Emissions in Restricted Bands Data

| Frequency in MHz | Horizontal Peak (dBμV/m) | Horizontal Quasi-Peak (dBμV/m) | Horizontal Average (dBμV/m) | Vertical Peak (dBμV/m) | Vertical Quasi-Peak (dBμV/m) | Vertical Average (dBμV/m) | Limit @ 3m (dBμV/m) |
|------------------|--------------------------|--------------------------------|-----------------------------|------------------------|------------------------------|---------------------------|---------------------|
| 108.5 | 34.9 | 29.3 | N/A | 26.9 | 21.2 | N/A | 43.5 |
| 122.0 | 28.2 | 22.3 | N/A | 32.3 | 26.5 | N/A | 43.5 |
| 135.6 | 35.6 | 30.9 | N/A | 32.2 | 24.4 | N/A | 43.5 |

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.



Summary of Results for Radiated Emissions in Restricted Bands

The EUT demonstrated compliance with the radiated emissions requirements of CFR 47 Part 15C Intentional Radiators. The EUT demonstrated a worst-case minimum margin of -12.6 dB below the radiated emissions requirements in restricted frequency bands. Peak, Quasi-peak, and average amplitudes were checked for compliance with the regulations. Worst-case emissions are reported with other emissions found in the restricted frequency bands at least 20 dB below the requirements.

General Radiated Emissions Procedure

The EUT was arranged in a typical equipment configuration and operated through all modes during testing. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Each radiated emission was then maximized at the OATS location before final radiated emissions measurements were performed. Final data was taken with the EUT located at the OATS at a distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 9 kHz to 25,000 MHz was searched for general radiated emissions. Measured emission levels were maximized by EUT placement on the table, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Loop from 9 kHz to 30 MHz, Broadband Biconical from 30 to 200 MHz, Biconilog from 30 to 1000 MHz, Log Periodic from 200 MHz to 1 GHz and or Double Ridge or pyramidal horns and mixers above 1 GHz, notch filters, and appropriate amplifiers and external mixers were utilized.

Table 2 General Radiated Emissions from EUT Data (Highest Emissions)

| Frequency in MHz | Horizontal Peak (dB μ V/m) | Horizontal Quasi-Peak (dB μ V/m) | Horizontal Average (dB μ V/m) | Vertical Peak (dB μ V/m) | Vertical Quasi-Peak (dB μ V/m) | Vertical Average (dB μ V/m) | Limit @ 3m (dB μ V/m) |
|------------------|--------------------------------|--------------------------------------|-----------------------------------|------------------------------|------------------------------------|---------------------------------|---------------------------|
| 40.7 | 38.6 | 35.3 | N/A | 39.5 | 34.6 | N/A | 40.0 |
| 81.4 | 37.6 | 34.3 | N/A | 37.0 | 34.6 | N/A | 40.0 |
| 94.9 | 42.6 | 38.6 | N/A | 40.8 | 37.1 | N/A | 43.5 |
| 125.3 | 39.9 | 37.7 | N/A | 41.8 | 37.0 | N/A | 43.5 |
| 132.8 | 34.7 | 28.7 | N/A | 25.8 | 20.9 | N/A | 43.5 |
| 147.0 | 32.6 | 26.2 | N/A | 26.2 | 21.6 | N/A | 43.5 |
| 149.2 | 40.3 | 38.5 | N/A | 37.6 | 36.0 | N/A | 43.5 |
| 167.1 | 41.2 | 38.9 | N/A | 36.2 | 34.2 | N/A | 43.5 |
| 208.8 | 32.3 | 28.8 | N/A | 29.0 | 24.6 | N/A | 43.5 |
| 226.7 | 31.5 | 27.3 | N/A | 26.0 | 20.5 | N/A | 46.0 |
| 255.2 | 31.0 | 26.9 | N/A | 28.9 | 24.3 | N/A | 46.0 |
| 340.0 | 46.6 | 34.0 | N/A | 40.9 | 29.6 | N/A | 46.0 |
| 1228.9 | 45.5 | N/A | 20.3 | 57.4 | N/A | 22.4 | 54.0 |
| 1232.0 | 46.4 | N/A | 20.7 | 60.5 | N/A | 22.3 | 54.0 |

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Summary of Results for General Radiated Emissions

The EUT demonstrated compliance with the radiated emissions requirements of 47CFR Part 15C paragraph 15.209 and RSS-210 Intentional Radiators. The EUT demonstrated a minimum margin of -4.6 dB below the requirements. Other emissions were present with amplitudes at least 20 dB below the Limits.

Operation in the Band 13.110 - 14.010 MHz Band

The transmitter output power; harmonic and general emissions were measured on an open area test site at 3 and 10 meters. Test procedures of ANSI C63.10-2009 were used during testing. The EUT was placed on a wooden turntable 0.8 meters above the ground plane and at a distance of 3 and 10 meters from the FSM antenna. The peak and quasi-peak amplitude of frequencies below 1000 MHz were measured using a spectrum analyzer. Plots were taken of transmitter performance for reference in this and other documentation. Refer to figure one showing the operation in the frequency band. The amplitude of each radiated emission was measured on the OATS at a distance of 3 and/or 10 meters from the FSM antenna (OATS testing was performed on sample representative of production equipment with integral antenna). The measured amplitude was then corrected for comparison with the limits. Measurements taken at 3 meters of the fundamental and emissions below 30 MHz were corrected using the square of an inverse linear distance extrapolation factor (40 dB/decade) as provided in the standards and requirements. The amplitude of each radiated emission was maximized by varying the FSM antenna height, polarization, and by rotating the turntable. A Loop antenna was used for measuring emissions from 0.009 to 30 MHz, Biconilog Antenna for 30 to 1000 MHz, Double-Ridge, and/or Pyramidal Horn Antennas from 1 GHz to 25 GHz. Emissions were measured in dBμV/m @ 3 meters. Testing performed demonstrated compliance with the following requirements (per CFR47 15.225).

- (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters (84 dBμV/M @ 30m).
- (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters (50.5 dBμV/M @ 30m).
- (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters (40.5 dBμV/M @ 30m).
- (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.
- (e) The frequency tolerance of the carrier signal shall be maintained within ±0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery-operated equipment, the equipment tests shall be performed using a new battery.
- (f) In the case of radio frequency powered tags designed to operate with a device authorized under this section, the tag may be approved with the device or be considered as a separate device subject to its own authorization. Powered tags approved with a device under a single application shall be labeled with the same identification number as the device.

Table 3 NFC Transmitter Emissions in Frequency Band 13.110-14.010 MHz

| Frequency in MHz | Level (dBμV/m) | ACFL (dB/m) | Amplifier Gain (dB) | 30m Field Strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|------------------|----------------|-------------|---------------------|-----------------------------|----------------|-------------|
| 13.560 | 31.9 | 41.4 | 40 | 33.3 | 84.0 | -51.0 |

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequencies below 1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

NOTES:

1. Fundamental radiated emission measurements were performed using a loop antenna. The antenna was positioned in three orthogonal positions (X front, Y side, Z top) and the position with the highest emission level was recorded.
2. The EUT was positioned in three orthogonal planes to determine the orientation resulting in the worst-case emissions.
3. Measurements were performed at 3m and the data was extrapolated to the specified measurement distance of 30m using the square of an inverse linear distance extrapolation factor (40 dB/decade) as specified in §15.31(f)(2).
Extrapolation Factor = $20 \log_{10} (30/3)^2 = 40\text{dB}$
4. All measurements were recorded using a spectrum analyzer employing a quasi-peak detector.
5. Field Strength Level [dBμV/m] = Level read from Analyzer [dBμV] + AFCL [dB/m] – Amplifier Gain (dB)
6. AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
7. Margin [dB] = Field Strength Level [dBμV/m] – Limit [dBμV/m]

Table 4 Transmitter Harmonic Radiated Emissions Data

| Frequency in MHz | Horizontal Peak (dBμV/m) | Horizontal Quasi-Peak (dBμV/m) | Horizontal Average (dBμV/m) | Vertical Peak (dBμV/m) | Vertical Quasi-Peak (dBμV/m) | Vertical Average (dBμV/m) | Limit @ 3m (dBμV/m) |
|------------------|--------------------------|--------------------------------|-----------------------------|------------------------|------------------------------|---------------------------|---------------------|
| 40.7 | 38.6 | 35.3 | N/A | 39.5 | 34.6 | N/A | 40.0 |
| 54.2 | 30.7 | 25.3 | N/A | 34.2 | 23.6 | N/A | 40.0 |
| 67.8 | 21.6 | 17.7 | N/A | 30.4 | 25.1 | N/A | 40.0 |
| 81.3 | 37.6 | 34.3 | N/A | 37.0 | 34.6 | N/A | 40.0 |
| 94.9 | 33.7 | 30.5 | N/A | 43.6 | 32.5 | N/A | 43.5 |
| 108.4 | 34.9 | 29.3 | N/A | 26.9 | 21.2 | N/A | 43.5 |
| 122.0 | 28.2 | 22.3 | N/A | 32.3 | 26.5 | N/A | 43.5 |
| 135.5 | 35.6 | 30.9 | N/A | 32.2 | 24.4 | N/A | 43.5 |

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequencies below 1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

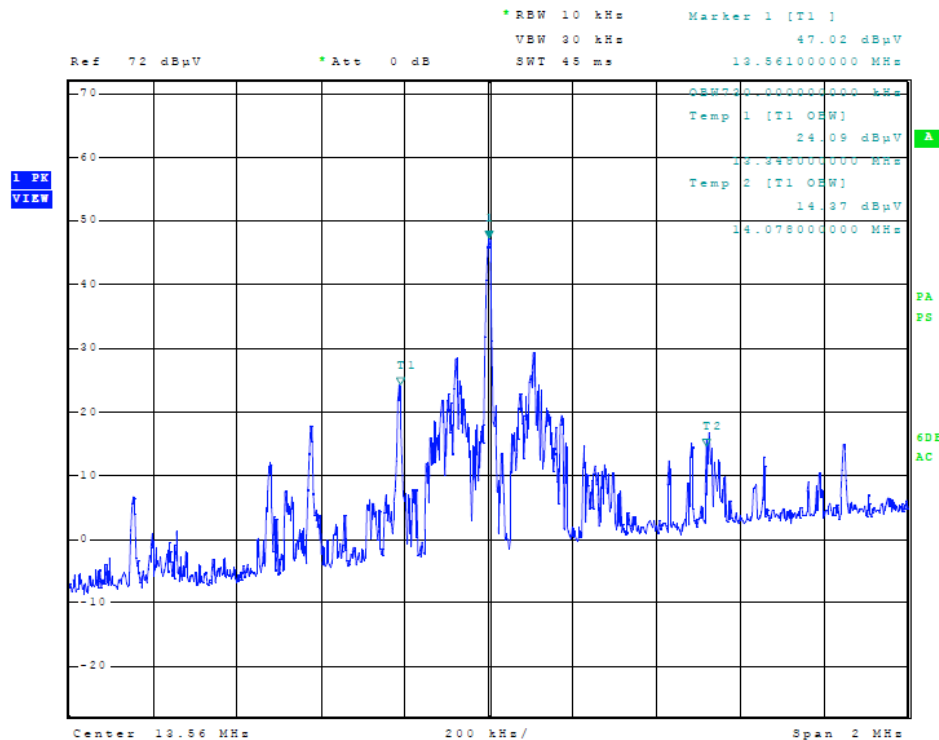


Figure 1 Plot of 99 percent Occupied Bandwidth


Frequency Stability

Measurements Required

The frequency stability shall be measured with variations of ambient temperature from -30° to +50° centigrade. Measurements shall be made at the extremes of the temperature range and at intervals of not more than 10° centigrade through the range. A period sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. In addition to temperature stability, the frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value.
- (2) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

Test Arrangement

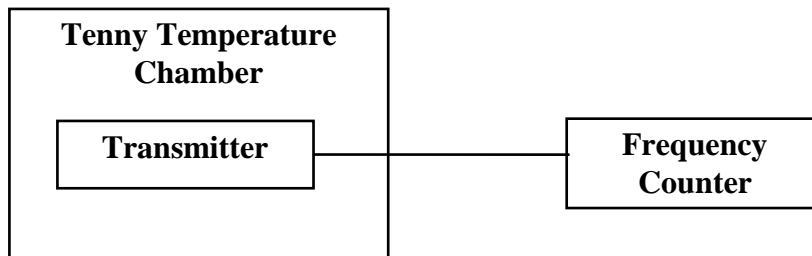

The measurement procedure outlined below shall be followed during measurement of frequency variation over temperature.

Step 1: The transmitter shall be installed in an environmental test chamber whose temperature is controllable. Provision shall be made to measure the frequency of the transmitter.

Step 2: With the transmitter inoperative (power switched “OFF”), the temperature of the test chamber shall be adjusted to +25°C. After a temperature stabilization period of one hour at +25°C, the transmitter shall be switched “ON” with standard test voltage applied.

Step 3: The carrier shall be keyed “ON”, and the transmitter shall be operated at full radio frequency power output at the duty cycle, for which it is rated, for duration of at least 5 minutes. The radio frequency carrier frequency shall be monitored and measurements shall be recorded.

Step 4: The test procedures outlined in Steps 2 and 3, shall be repeated after stabilizing the transmitter at the environmental temperatures specified, -30°C to +50°C in 10-degree increments.

The frequency stability was measured with variations in the power supply voltage from 85 to 115 percent of the nominal value. A BK Precision DC Power Supply was used during measurement of frequency variation over input power. The frequency was measured and the variation in parts per million calculated. Data was taken per CFR47 Paragraphs 2.1055 and applicable paragraphs of part 15.225 and RSS-210.

Table 5 Frequency Stability vs. Temperature Results

| Channel Frequency 13.56000 MHz | Frequency Stability Vs. Temperature Ambient Frequency (13.56000) | | | | | | | | |
|--------------------------------------|---|-------|-------|-------|-------|-------|--------|--------|--------|
| Temperature °C | -30 | -20 | -10 | 0 | +10 | +20 | +30 | +40 | +50 |
| Change (Hz) | 130 | 0 | -30 | -50 | -60 | -20 | -80 | -100 | -100 |
| PPM | 9.6 | 0.0 | -2.2 | -3.7 | -4.4 | -1.5 | -5.9 | -7.4 | -7.4 |
| % | 0.001 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | -0.001 | -0.001 | -0.001 |
| Limit (%) | ±0.01 | ±0.01 | ±0.01 | ±0.01 | ±0.01 | ±0.01 | ±0.01 | ±0.01 | ±0.01 |

Table 6 Frequency Stability vs. Input Power Supply Voltage Results

| Channel Frequency 13.56000 MHz | Frequency Stability Vs. Voltage Variation 12.0 volts nominal; Results In Hz change | | |
|--------------------------------------|---|-------|-------|
| Voltage V _{ac} | 10.2 | 12.0 | 13.8 |
| Change (Hz) | 0 | 0 | -60 |
| % | 0 | 0 | 0 |
| Limit (%) | ±0.01 | ±0.01 | ±0.01 |

The EUT demonstrated compliance with specifications of CFR47 Paragraph 2.1046(a) and applicable Parts of 15.225 and RSS-210. There are no deviations or exceptions to the specifications.

Summary of Results for NFC Transmitter Emissions

The EUT demonstrated compliance with the radiated emissions requirements of FCC CFR 47 Part 15.225, RSS-210 and other applicable standards for Intentional Radiators. The EUT worst-case configuration demonstrated minimum margin of -51.0 dB below the fundamental emission limit. The EUT worst-case configuration demonstrated minimum radiated harmonic emission margin of -4.7 dB below the limits. Other emissions were present with amplitudes at least 20 dB below the limits.



NVLAP Lab Code 200087-0

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Rogers Labs Test Equipment List
- Annex C Rogers Qualifications
- Annex D FCC Site Registration Letter
- Annex E Industry Canada Site Registration Letter

**Annex A Measurement Uncertainty Calculations**

Measurement uncertainty calculations were made for the laboratory. Result of measurement uncertainty calculations are recorded below for AC line conducted and radiated emission measurements.

| Measurement Uncertainty | $U_{(E)}$ | $U_{(lab)}$ |
|---|-----------|-------------|
| 3 Meter Horizontal 30-200 MHz Measurements | 2.08 | 4.16 |
| 3 Meter Vertical 30-200 MHz Measurements | 2.16 | 4.33 |
| 3 Meter Vertical Measurements 200-1000 MHz | 2.99 | 5.97 |
| 10 Meter Horizontal Measurements 30-200 MHz | 2.07 | 4.15 |
| 10 Meter Vertical Measurements 30-200 MHz | 2.06 | 4.13 |
| 10 Meter Horizontal Measurements 200-1000 MHz | 2.32 | 4.64 |
| 10 Meter Vertical Measurements 200-1000 MHz | 2.33 | 4.66 |
| 3 Meter Measurements 1-6 GHz | 2.57 | 5.14 |
| 3 Meter Measurements 6-18 GHz | 2.58 | 5.16 |
| AC Line Conducted | 1.72 | 3.43 |

**Annex B Rogers Labs Test Equipment List**

| <u>Equipment (Serial Number)</u> | <u>Calibration Due</u> |
|---|------------------------|
| Spectrum Analyzer: Rohde & Schwarz ESU40 (100108) | 5/14 |
| Spectrum Analyzer: HP 8562A, 11518, 11519, and 11520 (3051A05950) | 5/14 |
| Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W | |
| Spectrum Analyzer: HP 8591EM (3628A00871) | 5/14 |
| Antenna: EMCO Biconilog Model: 3143 (9607-1277) | 5/14 |
| Antenna: Sunol Biconilog Model: JB6 (A100709) | 10/14 |
| Antenna: EMCO Log Periodic Model: 3147 (40582) | 10/14 |
| Antenna: Com Power Model: AH-118 (10110) | 10/14 |
| Antenna: Com Power Model: AH-840 (101046) | 10/14 |
| Antenna: Antenna Research Biconical Model: BCD 235 (169) | 10/14 |
| Antenna: EMCO 6509 (9502-1374) | 10/14 |
| LISN: Compliance Design Model: FCC-LISN-2.Mod.cd (126) | 10/14 |
| R.F. Preamp Com-Power Model: CPPA-102 (01254) | 10/14 |
| Cable: Belden RG-58 (L1-CAT3-11590) | 10/14 |
| Cable: Belden RG-58 (L2-CAT3-11590) | 10/14 |
| Cable: Belden 8268 (L3) | 10/14 |
| Cable: Time Microwave: 4M-750HF290-750 (L4M) | 10/14 |
| Cable: Time Microwave: 10M-750HF290-750 (L10M) | 10/14 |
| Frequency Counter: Leader LDC825 | 2/14 |
| Oscilloscope Scope: Tektronix 2230 | 2/14 |
| Wattmeter: Bird 43 with Load Bird 8085 | 2/14 |
| Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140 | 2/14 |
| R.F. Generators: HP 606A, HP 8614A, HP 8640B | 2/14 |
| R.F. Power Amp 65W Model: 470-A-1010 | 2/14 |
| R.F. Power Amp 50W M185- 10-501 | 2/14 |
| R.F. Power Amp A.R. Model: 10W 1010M7 | 2/14 |
| R.F. Power Amp EIN Model: A301 | 2/14 |
| LISN: Compliance Eng. Model 240/20 | 2/14 |
| LISN: Fischer Custom Communications Model: FCC-LISN-50-16-2-08 | 2/14 |
| Antenna: EMCO Dipole Set 3121C | 2/14 |
| Antenna: C.D. B-101 | 2/14 |
| Antenna: Solar 9229-1 & 9230-1 | 2/14 |
| Audio Oscillator: H.P. 201CD | 2/14 |
| ELGAR Model: 1751 | 2/14 |
| ELGAR Model: TG 704A-3D | 2/14 |
| ESD Test Set 2010i | 2/14 |
| Fast Transient Burst Generator Model: EFT/B-101 | 2/14 |
| Field Intensity Meter: EFM-018 | 2/14 |
| KEYTEK Ecat Surge Generator | 2/14 |



NVLAP Lab Code 200087-0

Annex C Rogers Qualifications

Scot D. Rogers, Engineer

Rogers Labs, Inc.

Mr. Rogers has approximately 17 years' experience in the field of electronics. Engineering experience includes six years in the automated controls industry and remaining years working with the design, development and testing of radio communications and electronic equipment.

Positions Held

Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

Educational Background

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University.
- 2) Bachelor of Science Degree in Business Administration Kansas State University.
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.

Scot D. Rogers



NVLAP Lab Code 200087-0

Annex D FCC Site Registration Letter

FEDERAL COMMUNICATIONS COMMISSION

**Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046**

June 28, 2013

Registration Number: 90910

Rogers Labs, Inc.
4405 West 259th Terrace,
Louisburg, KS 66053

Attention: Scot Rogers,


Re: Measurement facility located at Louisburg
3 & 10 meter site
Date of Renewal: June 28, 2013

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website www.fcc.gov under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

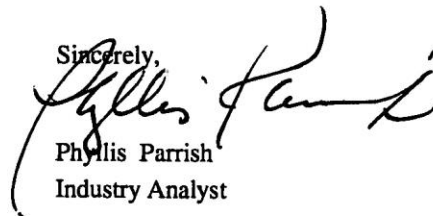

Phyllis Parrish
Industry Analyst

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1


Digital Ally
Model: Microvu HD
Test #: 141117
Test to: CFR47 (15.225), RSS-210
File: Digital Ally Microvu HD DXX TstRpt 141117

SN: ENG1
FCC ID: WPZ-MICROVU
IC ID: 7945A-MICROVU
Date: April 15, 2015
Page 25 of 26



NVLAP Lab Code 200087-0

Annex E Industry Canada Site Registration Letter



June 19, 2013

OUR FILE: 46405-3041

Submission No: 168037

Rogers Labs Inc.
4405 West 259th Terrace
Louisburg
KS, USA
66053

Attention: Mr. Scot D. Rogers

Dear Sir:

The Bureau has received your application for the renewal of 3/10m OATS. Be advised that the information received was satisfactory to Industry Canada. The following number(s) is now associated to the site(s) for which registration / renewal was sought (**Site# 3041A-1**). Please reference the appropriate site number in the body of test reports containing measurements performed on the site. In addition, please keep for your records the following information;

- The company address code associated to the site(s) located at the above address is: **3041A**

Furthermore, to obtain or renew a unique site number, the applicant shall demonstrate that the site has been accredited to ANSI C63.4-2003 or later. A scope of accreditation indicating the accreditation by a recognized accreditation body to ANSI C63.4-2003 or later shall be accepted. Please indicate in a letter the previous assigned site number if applicable and the type of site (example: 3 metre OATS or 3 metre chamber). If the test facility is not accredited to ANSI C63.4-2003 or later, the test facility shall submit test data demonstrating full compliance with the ANSI standard. The Bureau will evaluate the filing to determine if recognition shall be granted.

The frequency for re-validation of the test site and the information that is required to be filed or retained by the testing party shall comply with the requirements established by the accrediting organization. However, in all cases, test site re-validation shall occur on an interval not to **exceed three years**. There is no fee or form associated with an OATS filing. OATS submissions are encouraged to be submitted electronically to the Bureau using the following URL;

http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/h_tt00052e.html.

If you have any questions, you may contact the Bureau by e-mail at certification.bureau@ic.gc.ca Please reference our file and submission number above for all correspondence.

Yours sincerely,

Bill Payn
For: Wireless Laboratory Manager
Certification and Engineering Bureau
3701 Carling Ave., Building 94
P.O. Box 11490, Station "H"
Ottawa, Ontario K2H 8S2
Email: Bill.Payn@ic.gc.ca
Tel. No. (613) 990-3639
Fax. No. (613) 990-4752

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Digital Ally
Model: Microvu HD
Test #: 141117
Test to: CFR47 (15.225), RSS-210
File: Digital Ally Microvu HD DXX TstRpt 141117

SN: ENG1
FCC ID: WPZ-MICROVU
IC ID: 7945A-MICROVU
Date: April 15, 2015
Page 26 of 26