



Coverage.
Performance.
Smart.

**Profile Series
N01FVAAE**

**Airgain
Embedded
Antenna
Engineering
Data Sheet**

3611 Valley Centre Drive, Suite 150
San Diego, CA 92130 USA
Tel: +1 760 579 0200
Fax: +1 760 579 0892
Information: info@airgain.com
Sales: sales@airgain.com
Support: support@airgain.com

Revision History (Required)

Revision	Date	Note
4178C-02-00-002-1 Rev 1.0	June 30, 2023	Preliminary Datasheet 1.0

Contents

1. Airgain N01FVA AE Embedded Antenna	4
2. Features.....	4
3. Specifications and Interface.....	5
4. Radiation Patterns.....	5
5. Dimensions	7
6. ROHS.....	7
7. Feature and Options Information.....	7
7.1 Part Number Conventions	8
7.2 Part Number Example	8
8. Cable Data Sheet	9

Figures

Figure 1: Model N01FVA AE Embedded Antenna.....	4
Figure 2: Model N01FVA AE Measurement axes.....	5
Figure 3: Model N01FVA AE Radiation Patterns at 2.4 GHz & 2.44 GHz & 2.48 GHz	6
Figure 4: Model N01FVA AE Pre-applied Tape Dimensions.....	7
Figure 5: N01FVA AE with connector or stripped cable.....	8

1. Airgain N01FVA AE Embedded Antenna

The Model N01FVA AE Embedded Antenna provides a high efficiency, 2.4GHz band embedded antenna solution for Wi-Fi and ISM band applications, such as WLAN products. As embedded antenna solutions become the focus of next generation wireless product design, the Model N01FVA AE provides the flexibility of an embedded antenna with top performance. The Model N01FVA AE Embedded Antenna is a center fed version of its predecessor, the N01FVA AE, allowing it to fit in spaces where center feeding is better suited. It is designed to accommodate most WLAN access point applications, such as routers and gateways and can be easily integrated into an ID package design.

2. Features

The Airgain N01FVA AE embedded antenna includes the following features:

- IEEE 802.11 /b/g/n/ standards
- Single 2.4GHz Band operation
- Case mount
- High efficiency
- Quick integration

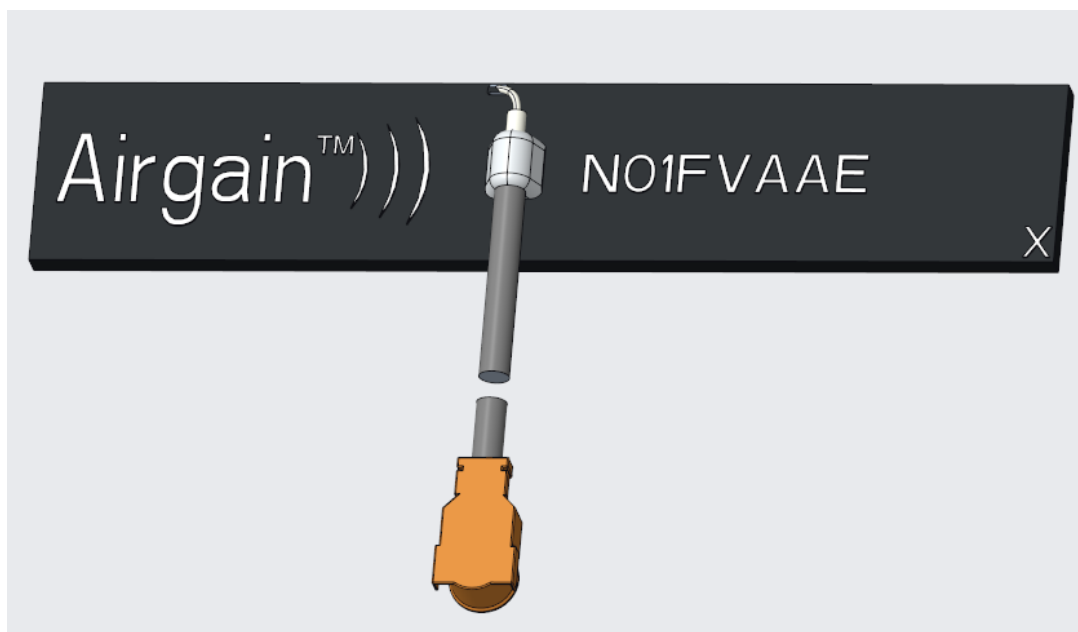


Figure 1: Model N01FVA AE Embedded Antenna

3. Specifications and Interface

Standard	IEEE 802.11 b/g/n
Frequency range	2.4 to 2.49 GHz
Peak gain	2.8 dBi @2.44 GHz,
VSWR	< 2:1
Feed impedance	50 ohms
Power handling	30 dBm
Interface	50 ohms, 1.13 mm diameter, micro coax cable (available with optional U.FL-compatible cable connector and/or cable-mounted EMI ferrites)
Antenna dimensions	38 x 7.0 x 1.0 mm
Weight	TBD g
Temperature range	Operating: -40° C to +75° C (-40° F to +167° F) Storage: -40° C to +85° C (-40° F to +185° F)
Humidity range	0% to 95% non-condensing

4. Radiation Patterns

Radiation patterns for the Airgain N01FVAEE were measured with the antenna mounted in testing AP.

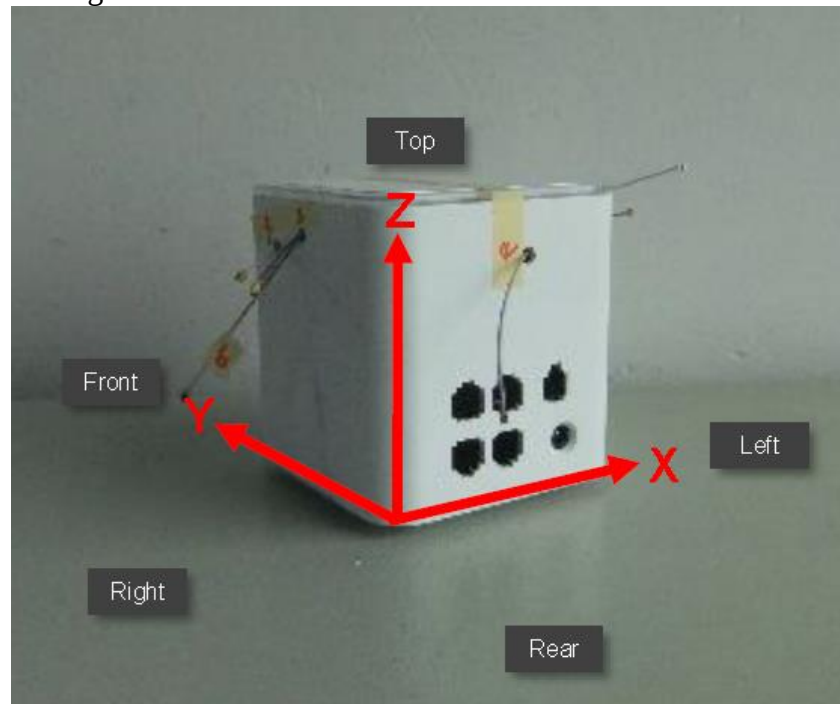


Figure 2: Model N01FVAEE Measurement axes

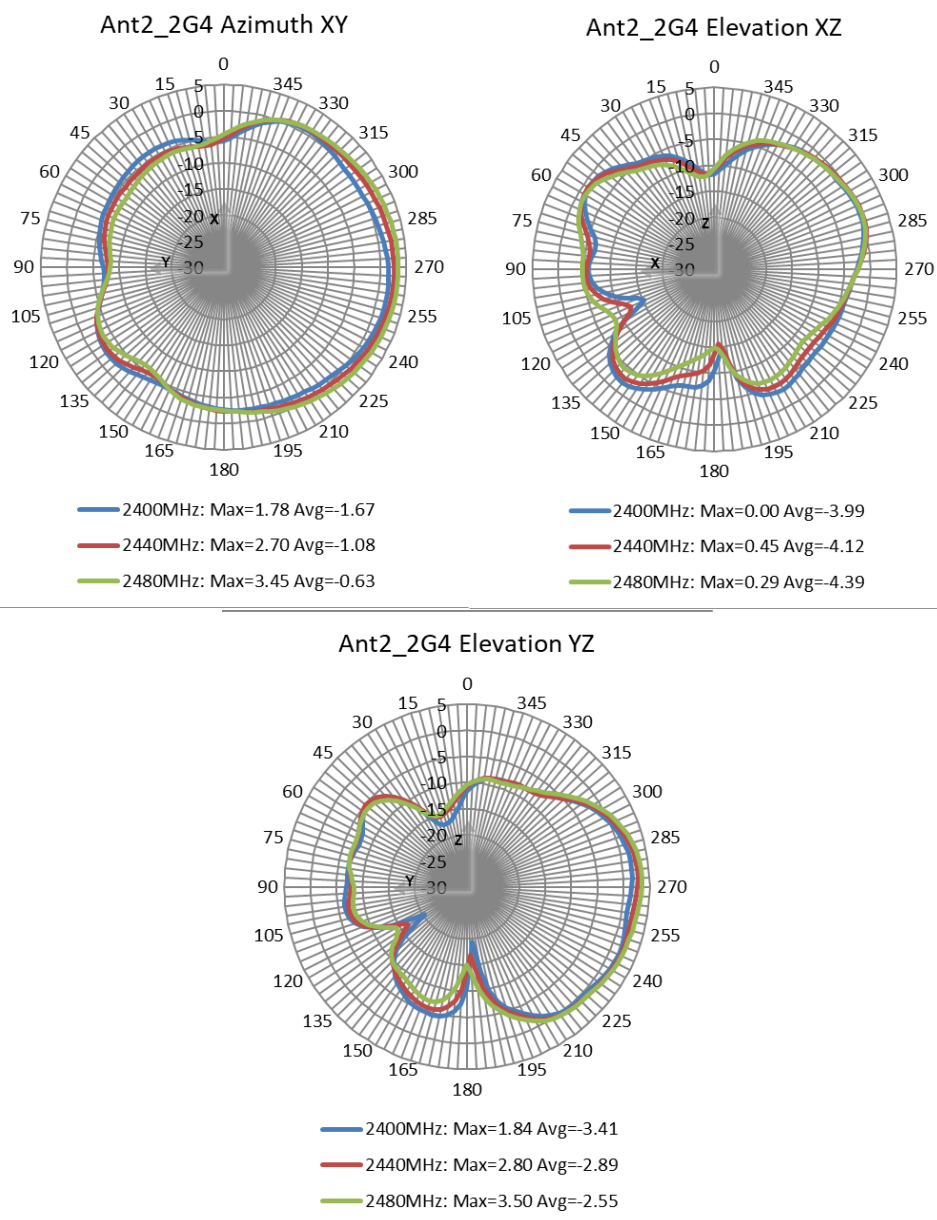


Figure 3: Model N01FVAE Radiation Patterns at 2.4 GHz & 2.44 GHz & 2.48 GHz

5. Dimensions

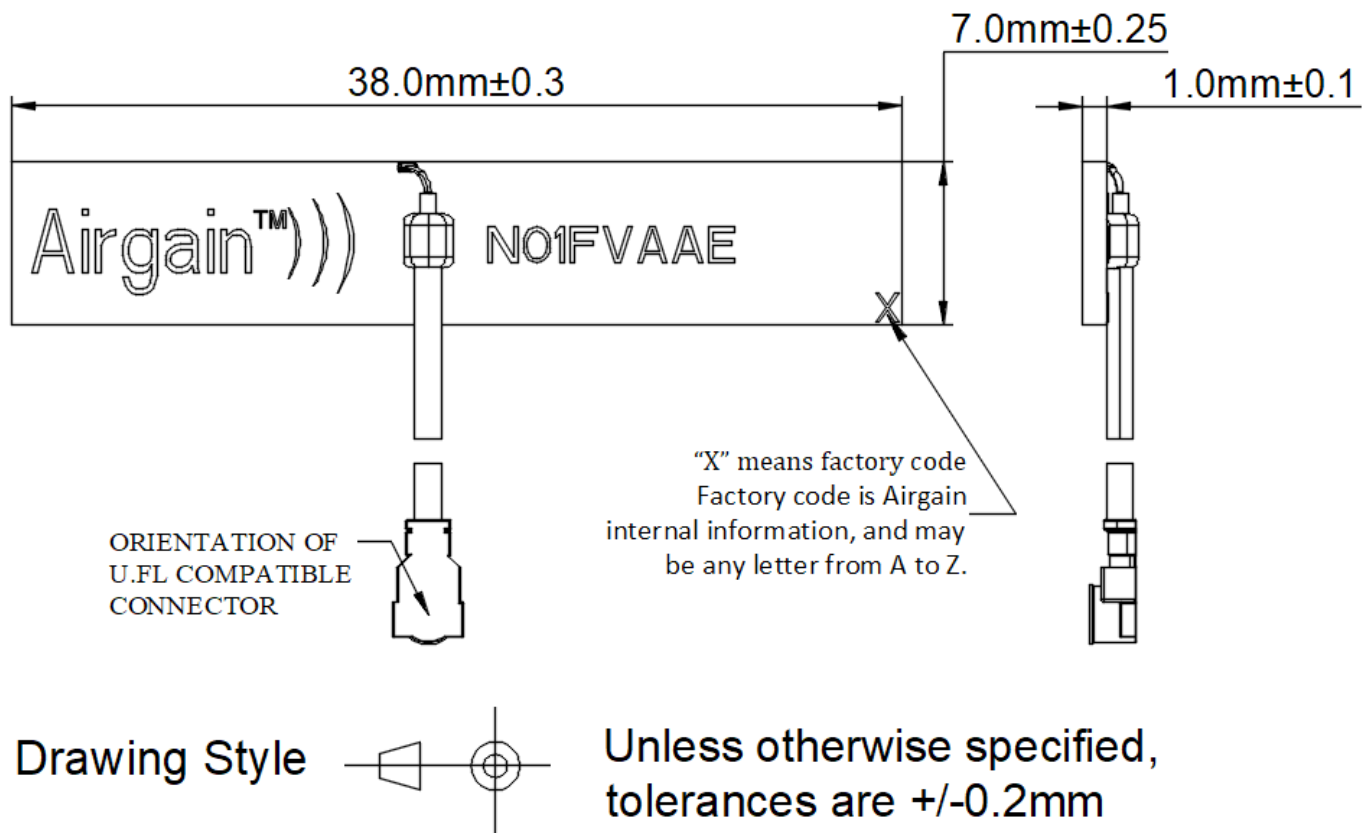


Figure 4: Model N01FVAAE Dimensions

6. ROHS

Airgain N01FVAAE embedded antennas are RoHS compliant.

7. Feature and Options Information

Airgain N01FVAAE antennas are equipped with an RF cable I/O interface. Optional cable termination such as U.FL-compatible micro coax connectors and cable mounted EMI ferrite cores are available. To aid mounting the N01FVAAE, pre-applied, double-sided adhesive tape is available on the N01FVAAE -T Series.

7.1 Part Number Conventions

Airgain uses a three-staged standard number system for our part numbers, which serially define the antenna type, tape type, cable type/length, and connector type/interface, as described below:

Antenna #	Tape type -XX (if required)	Packaging type -xx	Cable Assembly Type -xxxxxx		
			Cable Color -x	Cable length XXX	Connector type XX (if required)
N01FVA AE	Blank = No Tape T = Tape on bottom of element T10 = 1mm thick PE Tape affixed to bottom surface of antenna	PK1= singulated (individual) antennas (PK1 is mandatory)	G = Grey (Standard) B = Black (Non Standard) W = White (Non Standard) A = Blue (Non Standard)	Cable length in millimeters (mm) Sample Lengths*: 65, 100, 130, 150, 190, 230, 250, 300, 400	Blank = Stripped Cable U = U.FL connector C = U.FL connector plus Ferrite Core, core size: 3.5mm * 9.0mm * 1.5mm CS = stripped cable plus Ferrite Core, core size: 3.5mm * 9.0mm * 1.5mm UR2 = U.FL compatible connector, rotated 180°

* Standard cable lengths listed in RF Cable Datasheet

7.2 Part Number Example

N01FVA AE-T-PK1-G100U – N01FVA AE antenna with 1.6-mm double-sided adhesive tape, 100-mm cable, and U.FL-compatible connector.

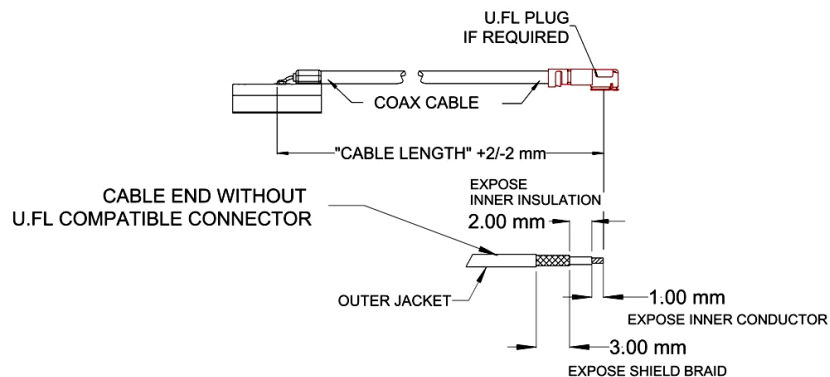


Figure 5: N01FVA AE with connector or stripped cable

8. Cable Data Sheet

Item	Specification	
Cable type	OD1.13	
Impedance	50 ± 3 ohms	
Inner conductor	Material	Tin-coated copper
	Conductor numbers	7
	Conductor size	0.08 mm
	Outer diameter	0.24 ± 0.02 mm
Dielectric layer	Material	FEP
	Color	Clear
	Average thickness	0.22 mm
	Diameter	0.7 ± 0.03 mm
Braid (shielding)	Material	Tin-coated copper
	Conductor size :total / O.D. of every wire(mm)	16*4/0.05 mm
	Coverage	90%± 5%
	Diameter	0.92 ± 0.05 mm
Outer cover	Material	FEP
	Color	Black / white / grey
	Average thickness	0.10 mm
	Diameter	1.13 ± 0.05 mm
VSWR testing	< 1.3@0~6GHz	
Attenuation (dB/1meter)	1GHz	≤2.2
	2GHz	≤3.1
	3GHz	≤3.8
	4GHz	≤4.4
	5GHz	≤4.9
	6GHz	≤5.4
Operating temperature	-55℃~+150℃	

