




TEST PLOT OF SPECTRAL DENSITY FOR 5755MHz AT CHAIN 1

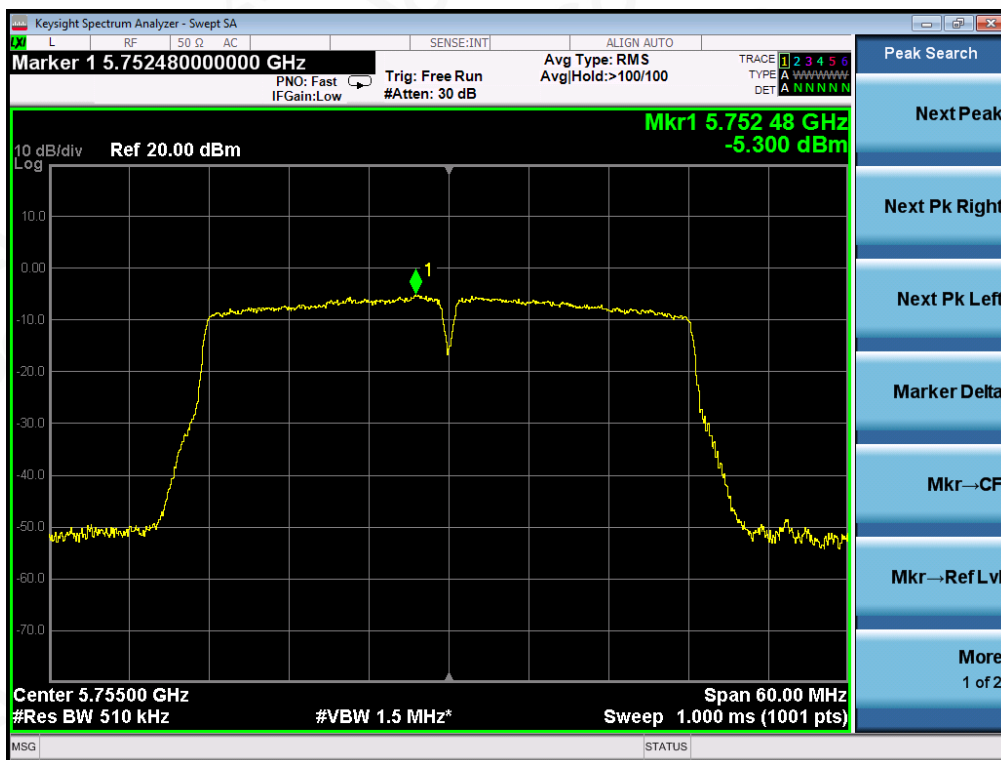


TEST PLOT OF SPECTRAL DENSITY FOR 5755MHz AT CHAIN 2

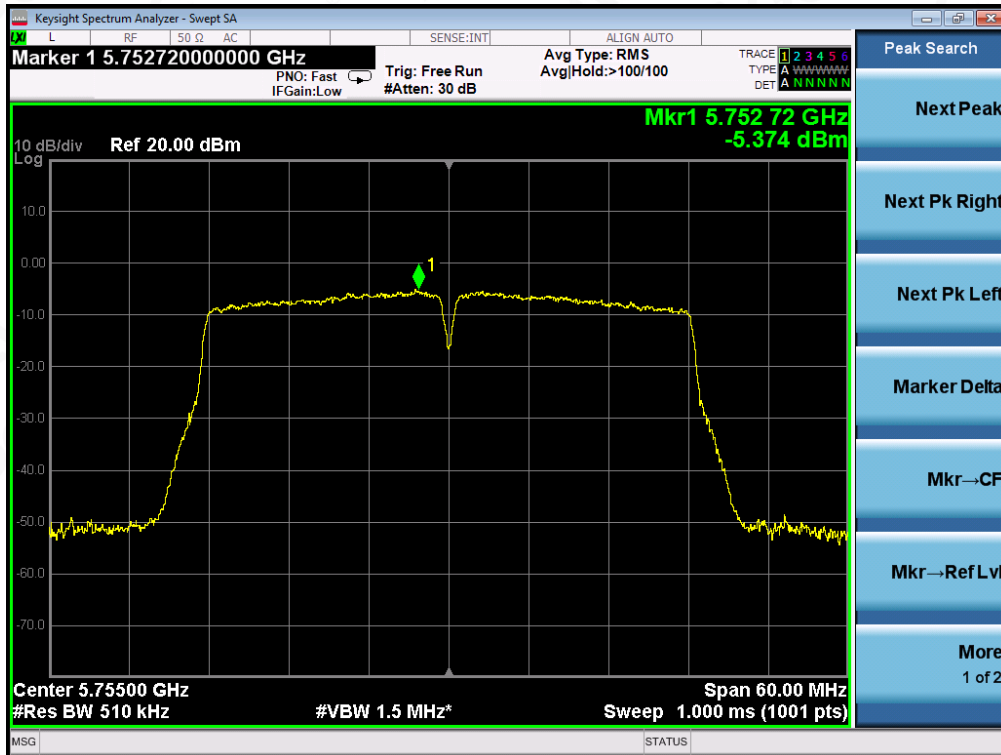

TEST PLOT OF SPECTRAL DENSITY FOR 5795MHz AT CHAIN 1

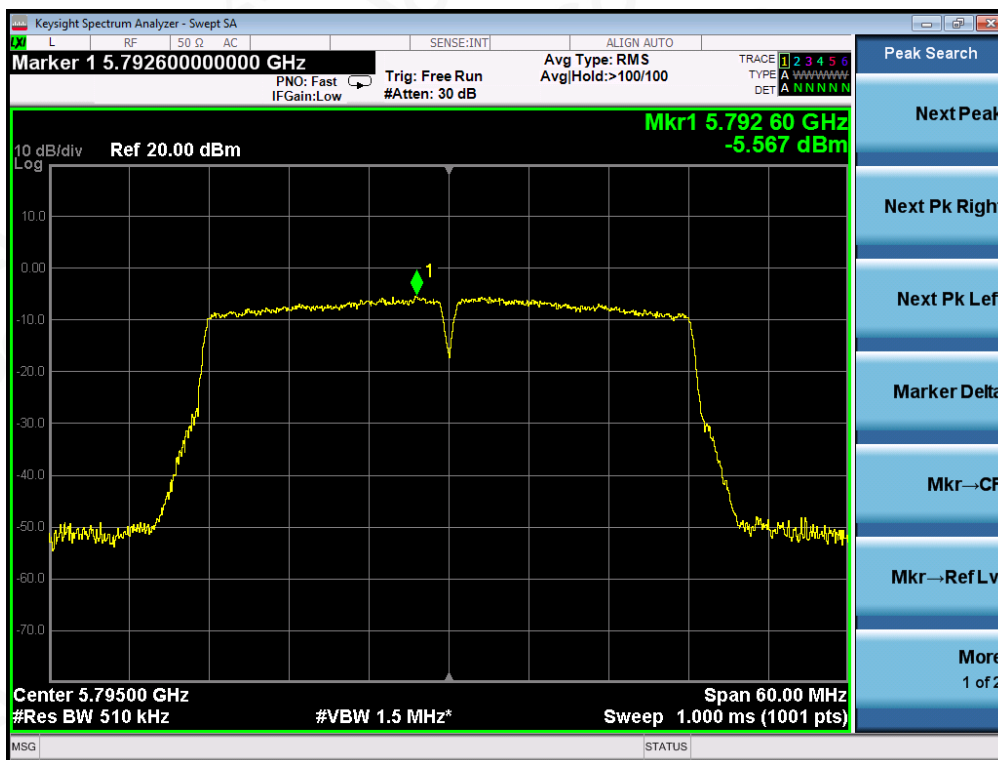


TEST PLOT OF SPECTRAL DENSITY FOR 5795MHz AT CHAIN 2

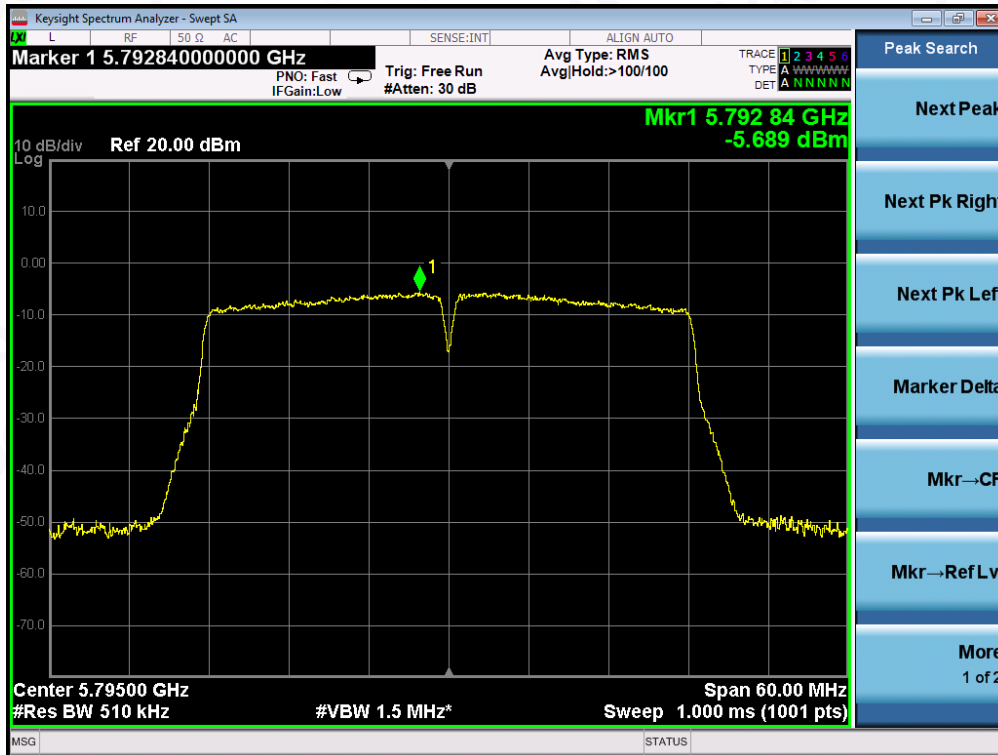

802.11ac80 TEST RESULT

TEST PLOT OF SPECTRAL DENSITY FOR 5210MHz AT CHAIN 1

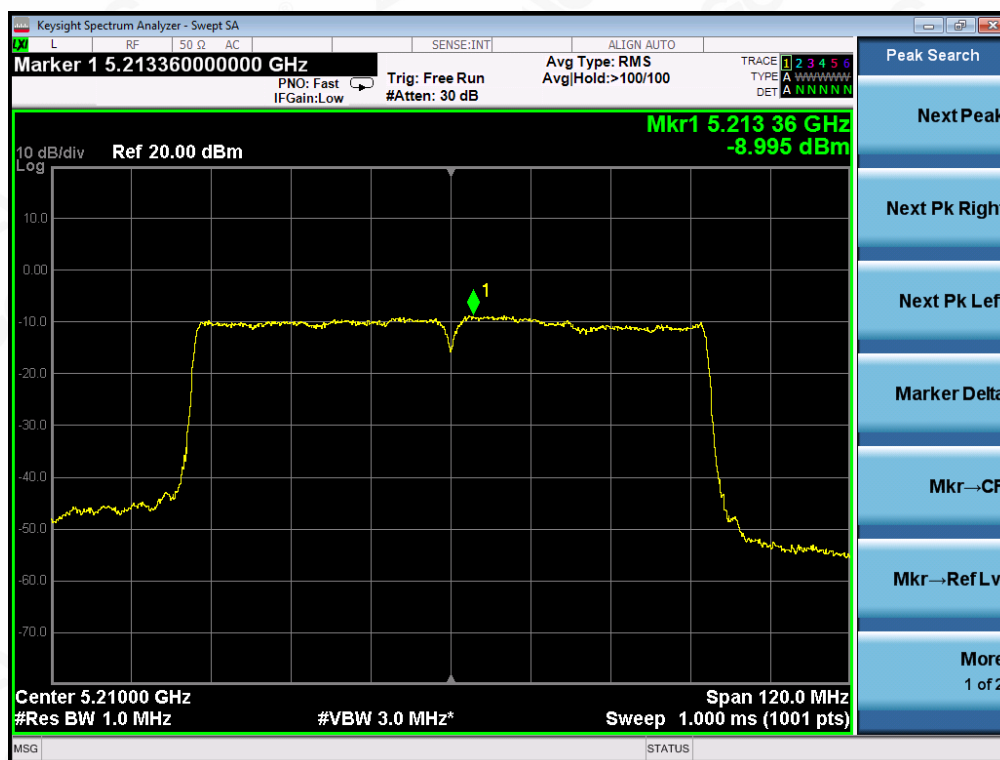

TEST PLOT OF SPECTRAL DENSITY FOR 5210MHz AT CHAIN 2



Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

TEST PLOT OF SPECTRAL DENSITY FOR 5775MHz AT CHAIN 1

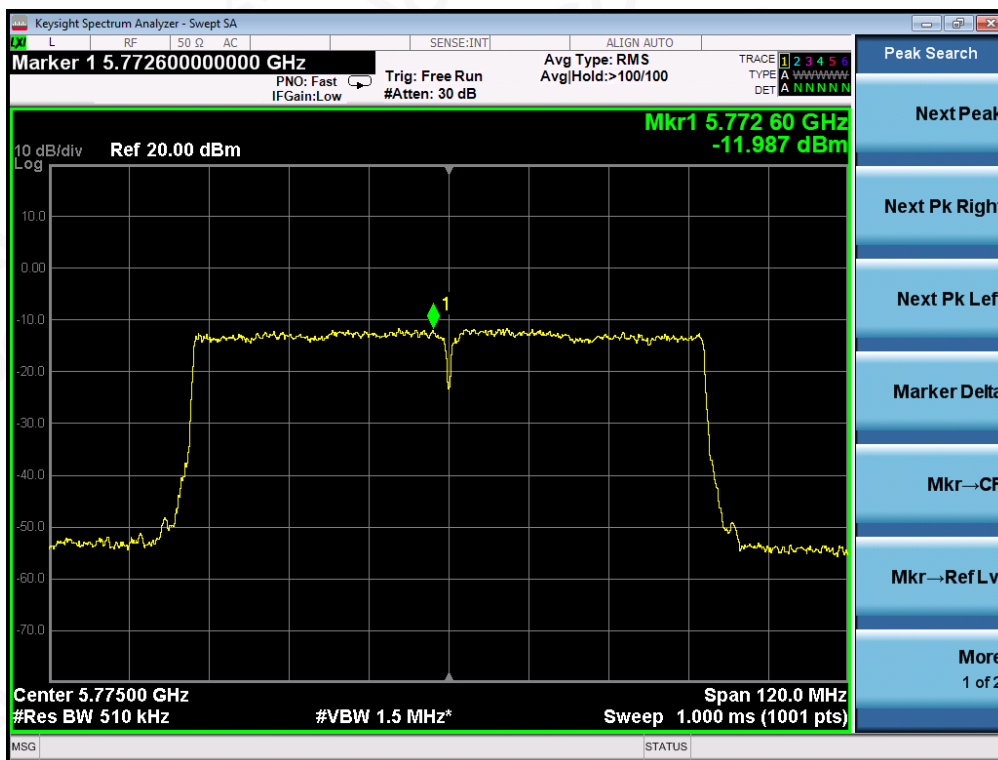

TEST PLOT OF SPECTRAL DENSITY FOR 5775MHz AT CHAIN 2



Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

11. CONDUCTED SPURIOUS EMISSION

11.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 789033 for compliance to FCC 47CFR 15.407 requirements.

11.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2.

11.3. MEASUREMENT EQUIPMENT USED



The same as described in section 6.



11.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT		
Applicable Limits	Measurement Result	
	Test channel	Criteria
-27dBm/MHz	5150MHz-5250MHz	PASS
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	5725MHz-5850MHz	PASS







FOR 802.11A20 MODULATION TEST PLOT OF OUT OF BAND EMISSIONS FOR MODULATION IN 5180MHz

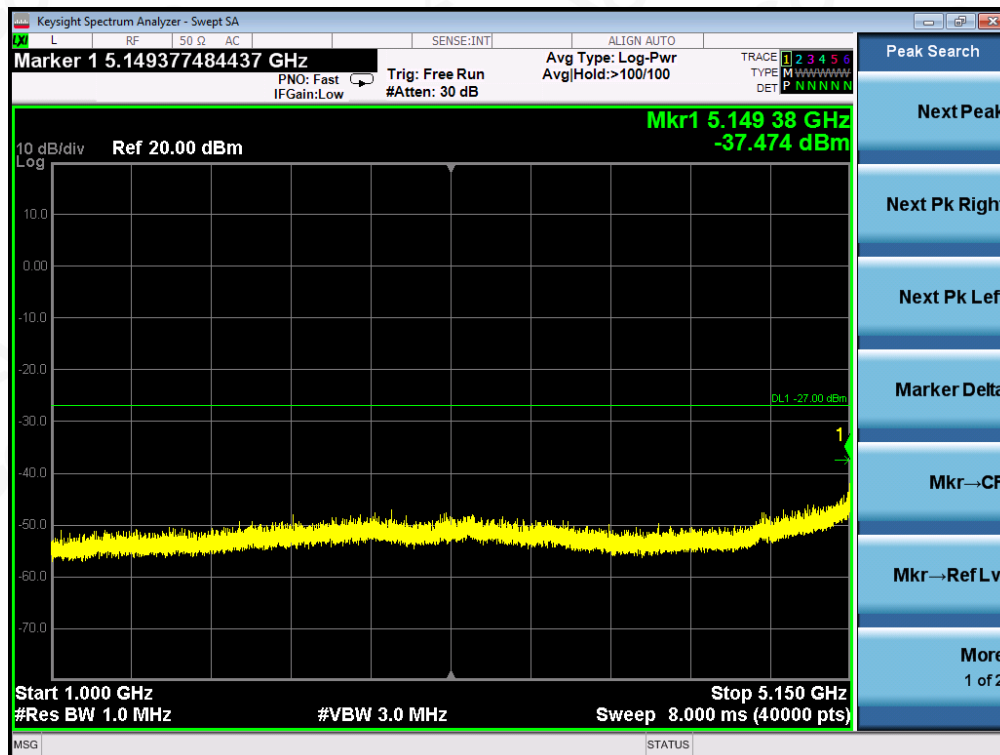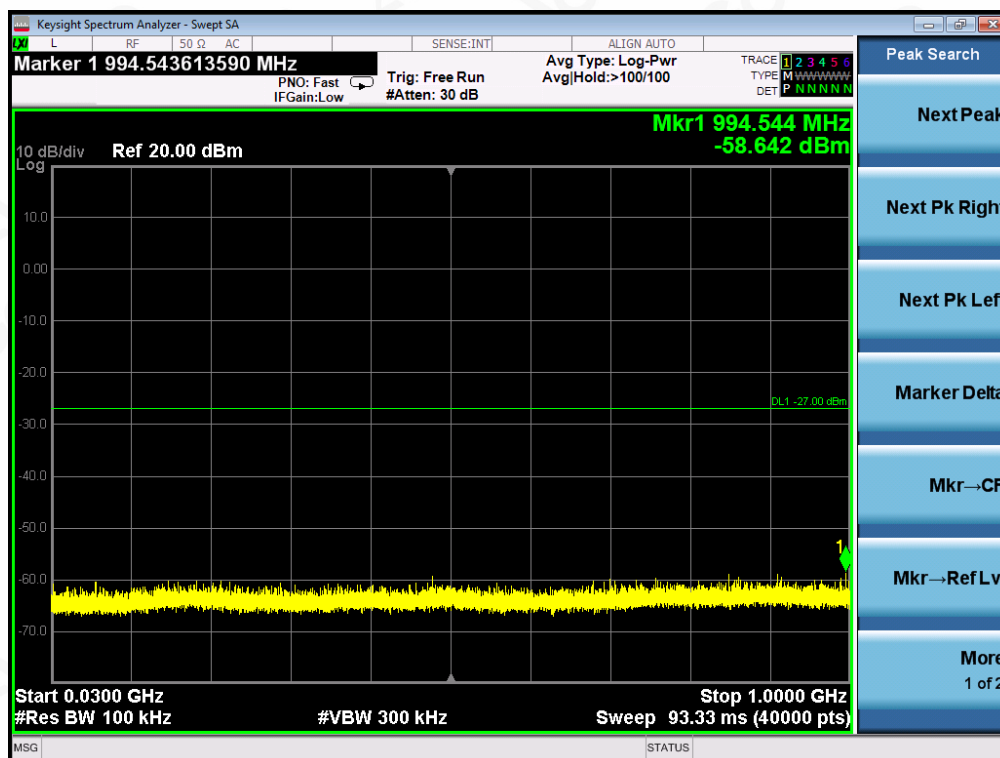

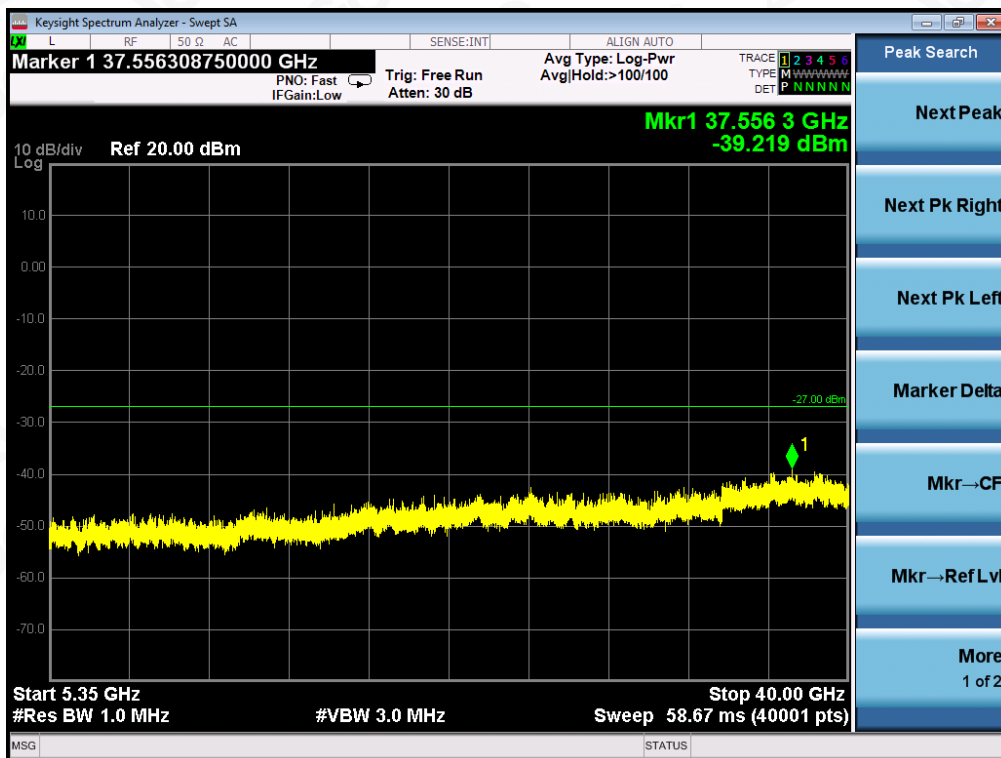
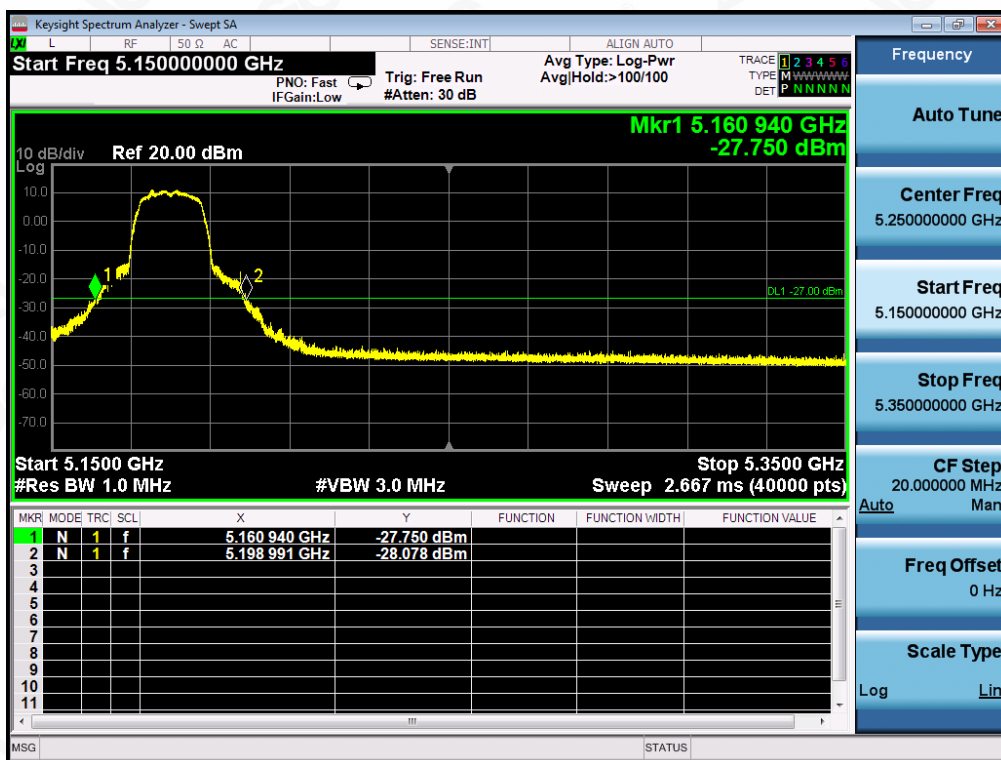




TEST PLOT OF OUT OF BAND EMISSIONS FOR MODULATION IN 5240MHz

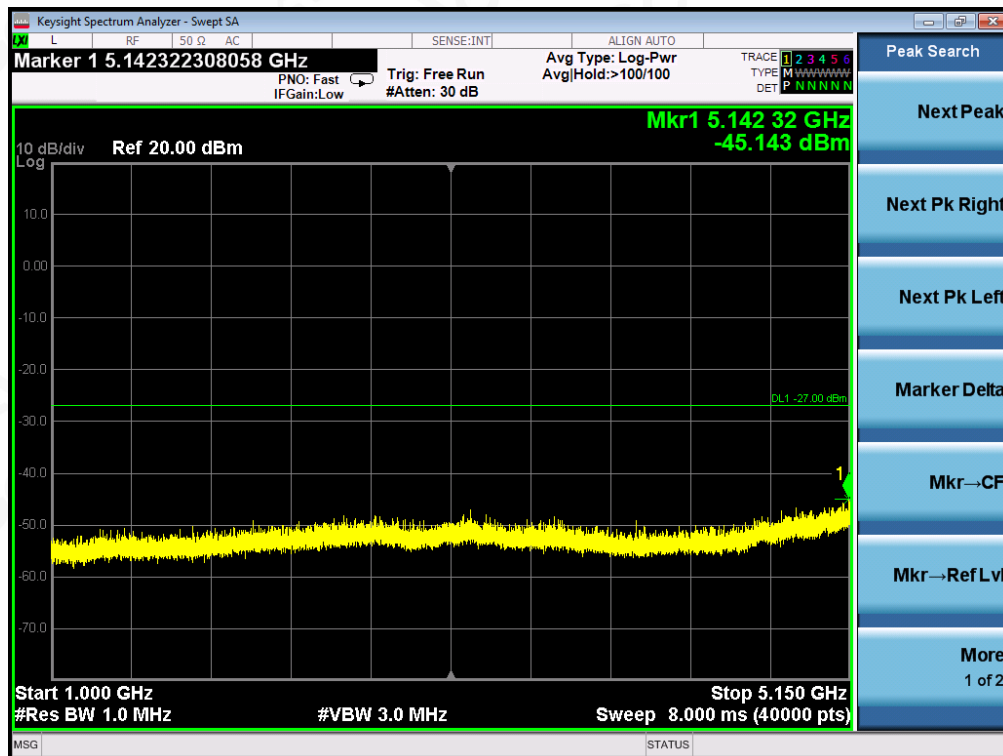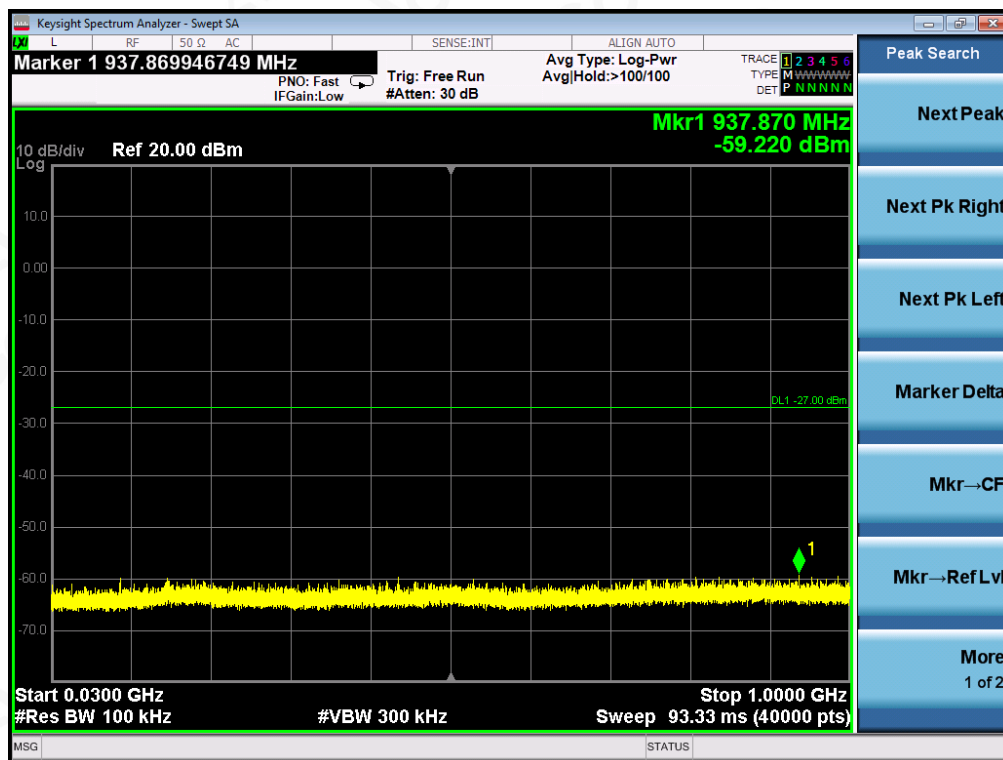

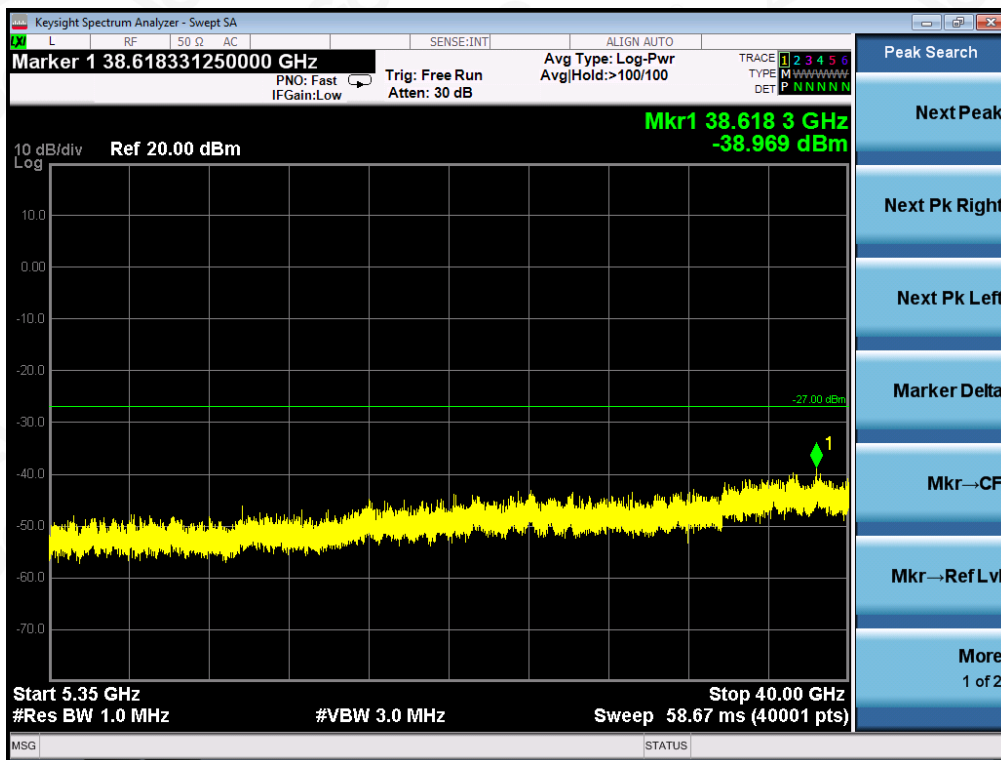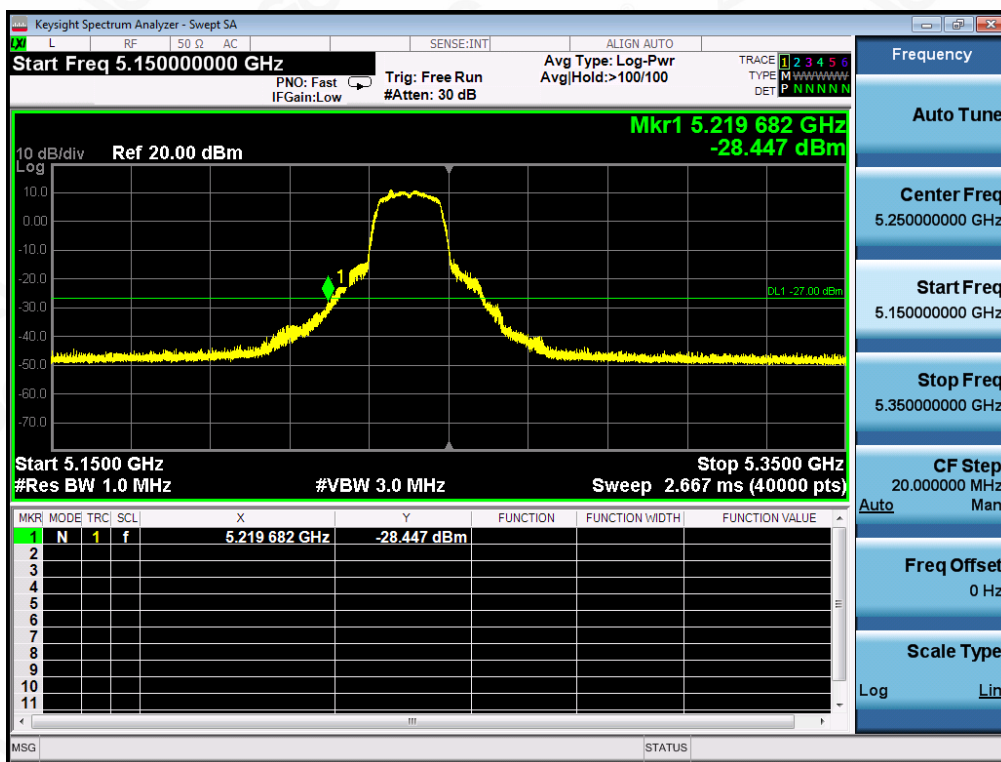

TEST PLOT OF OUT OF BAND EMISSIONS FOR MODULATION IN 5745MHz

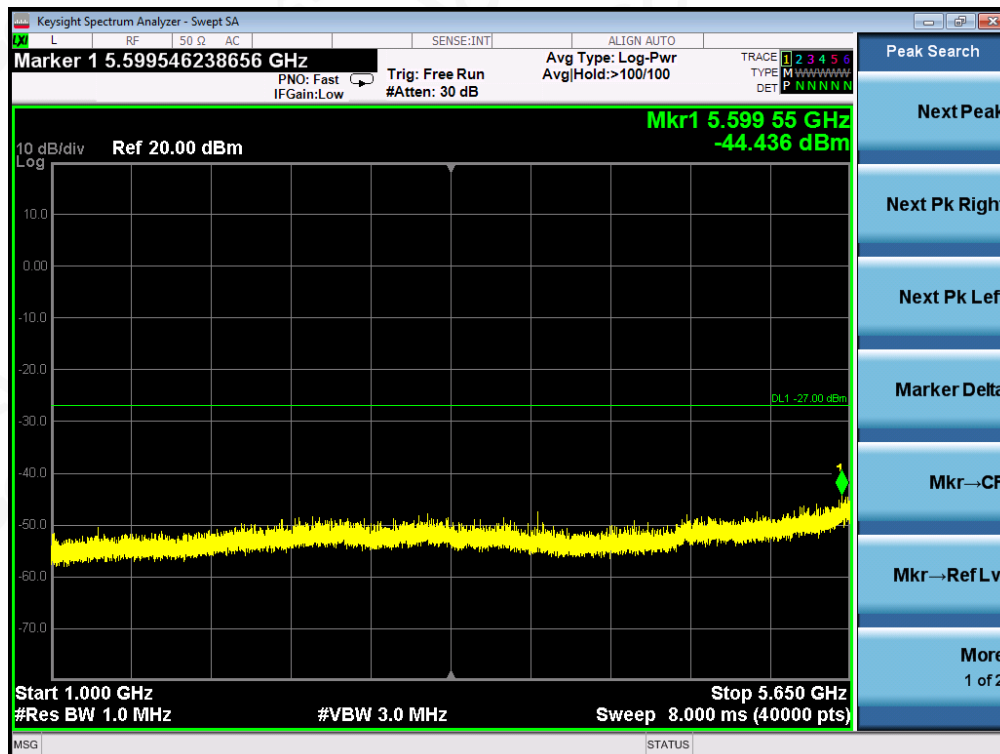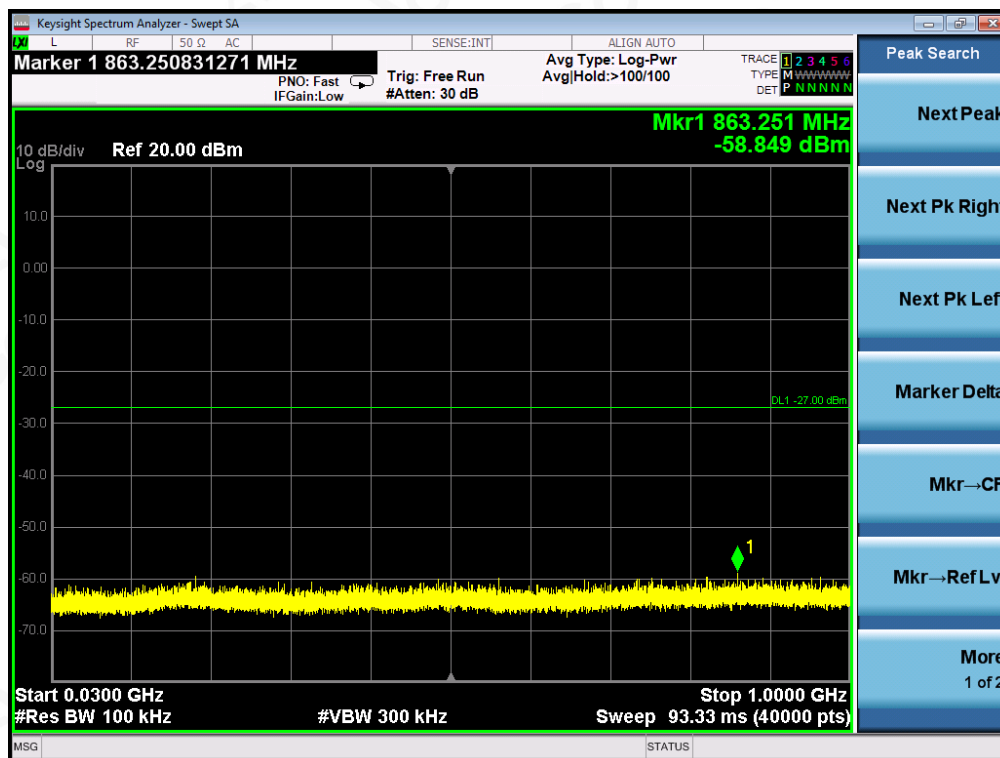

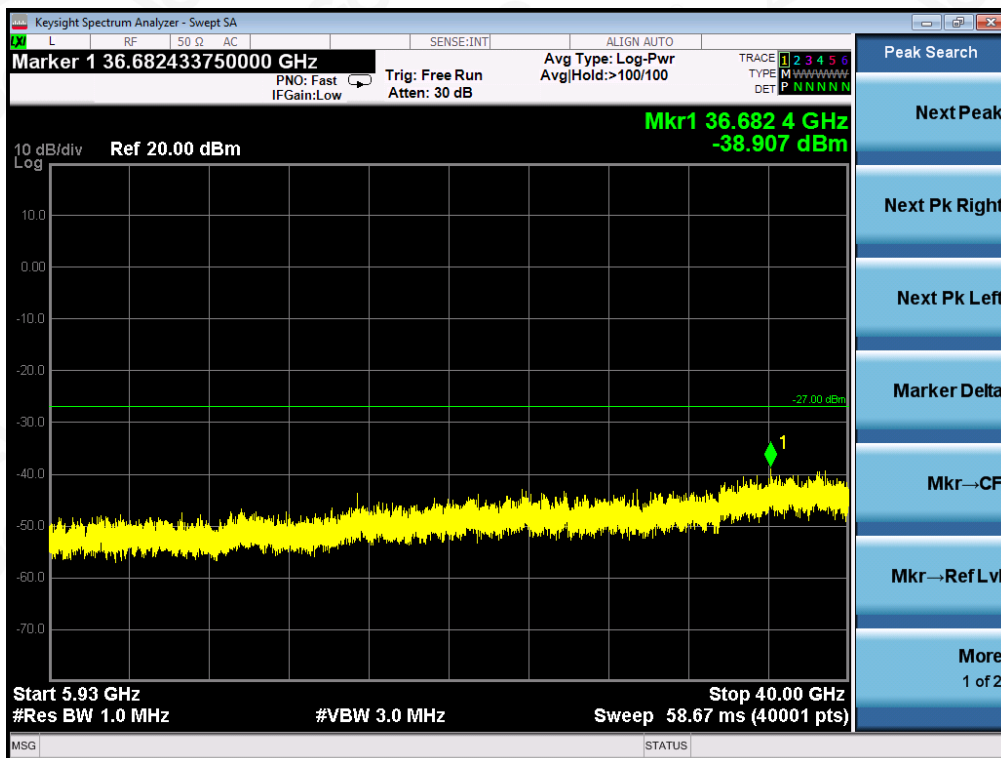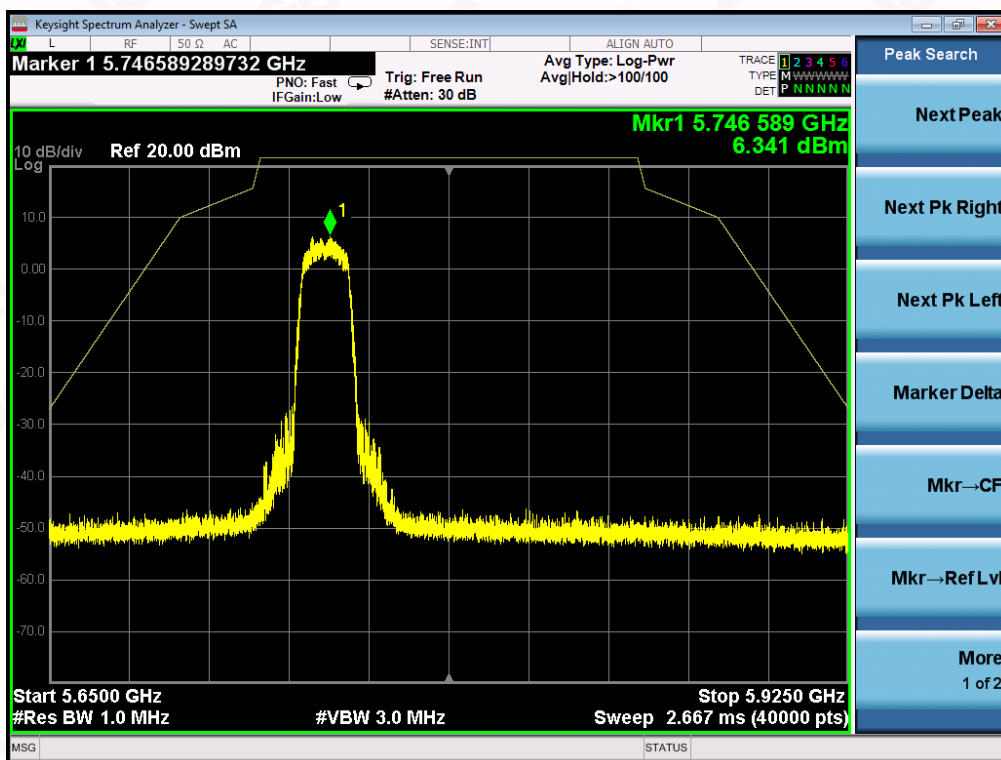

Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.



Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118



TEST PLOT OF OUT OF BAND EMISSIONS FOR MODULATION IN 5825MHz

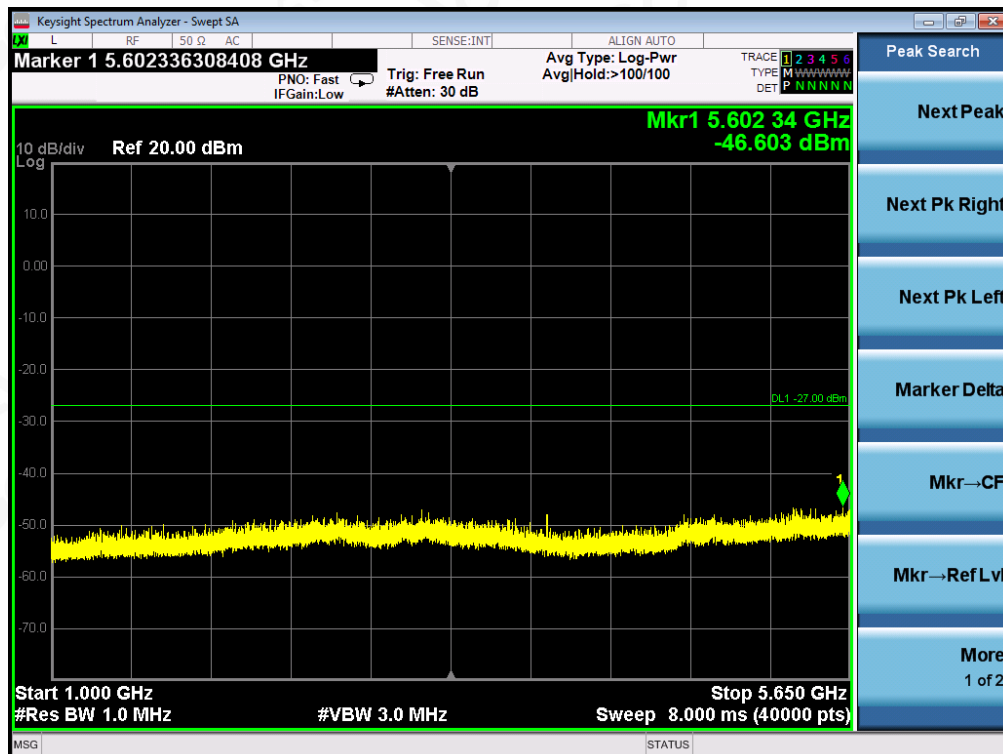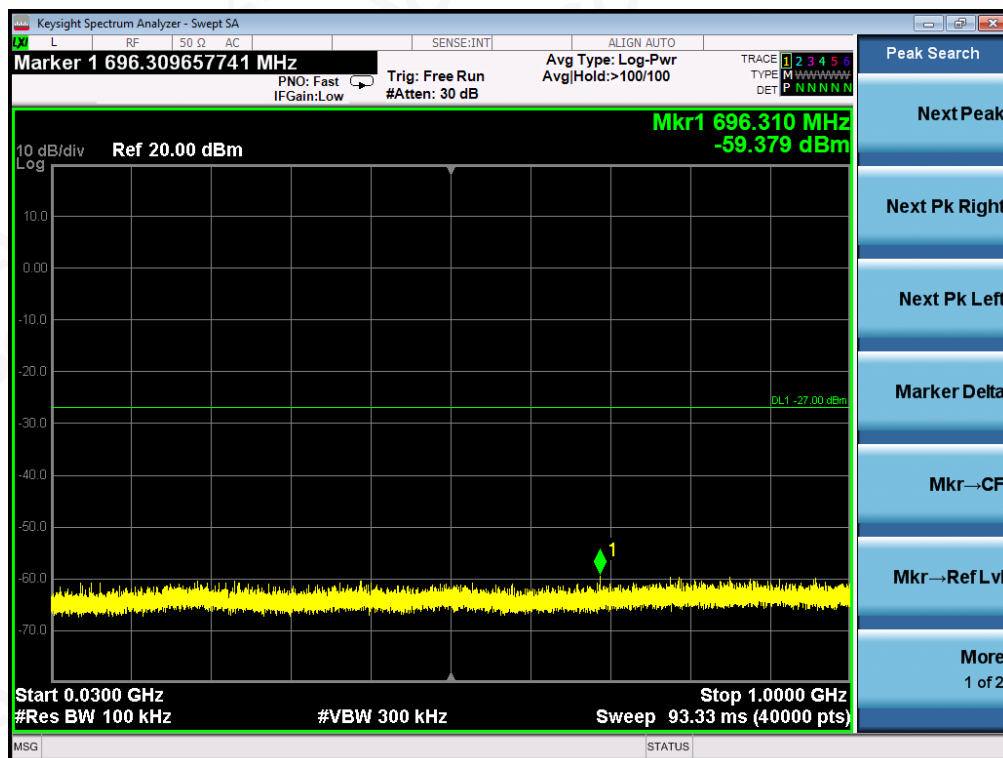

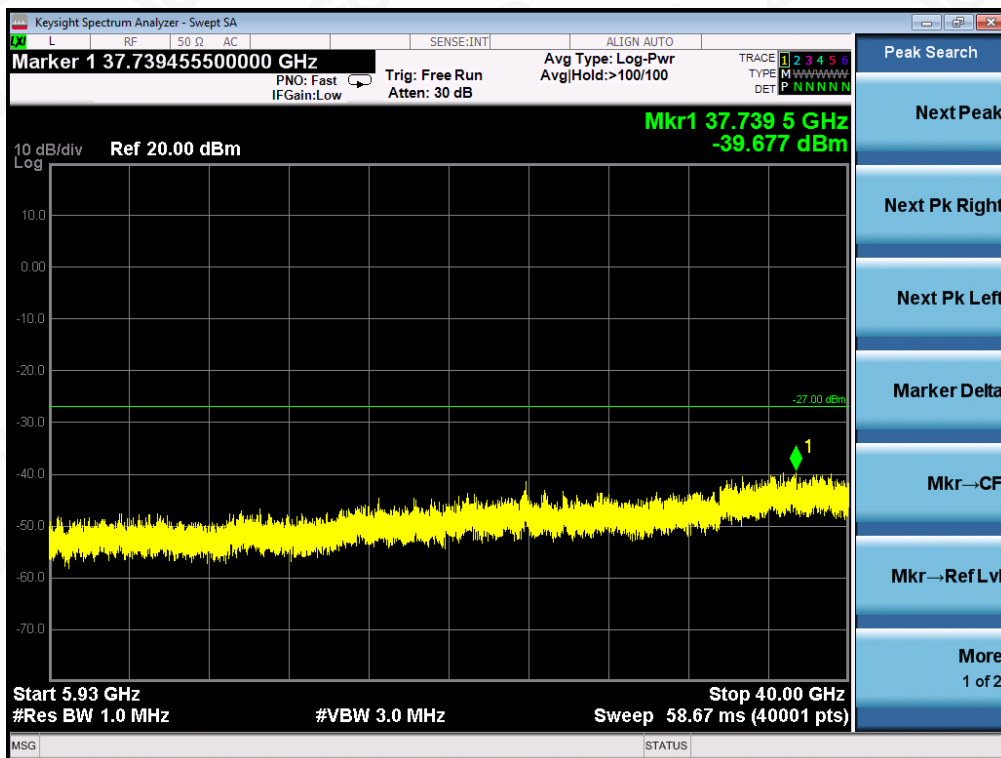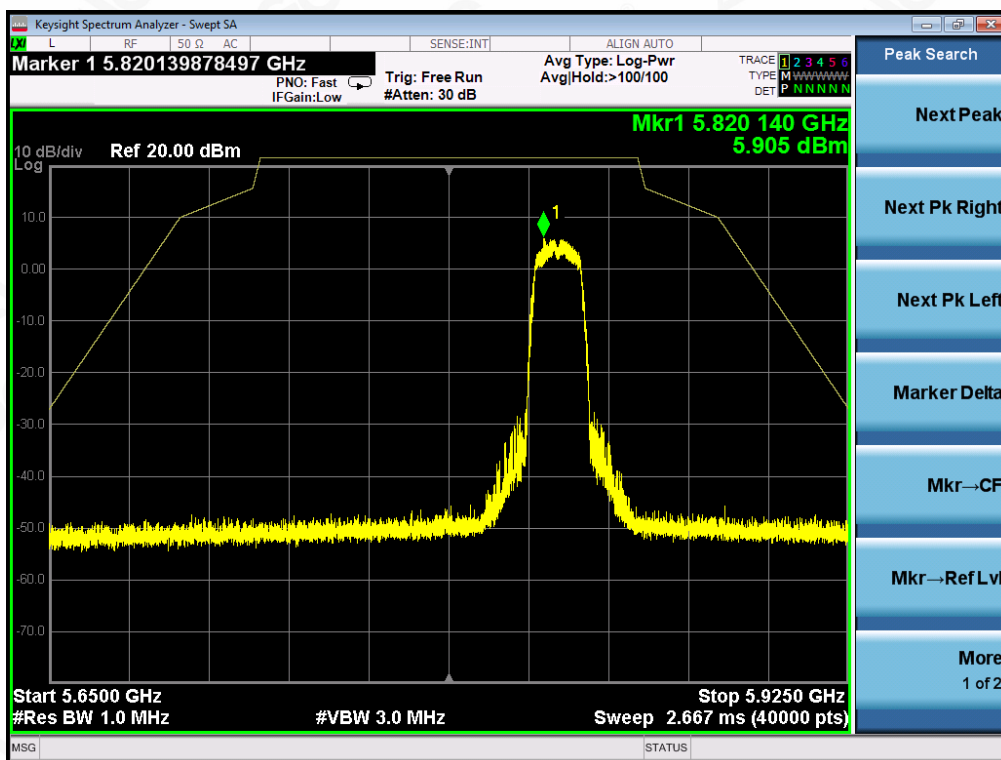

FOR 802.11N40 MODULATION

TEST PLOT OF OUT OF BAND EMISSIONS FOR MODULATION IN 5190MHz

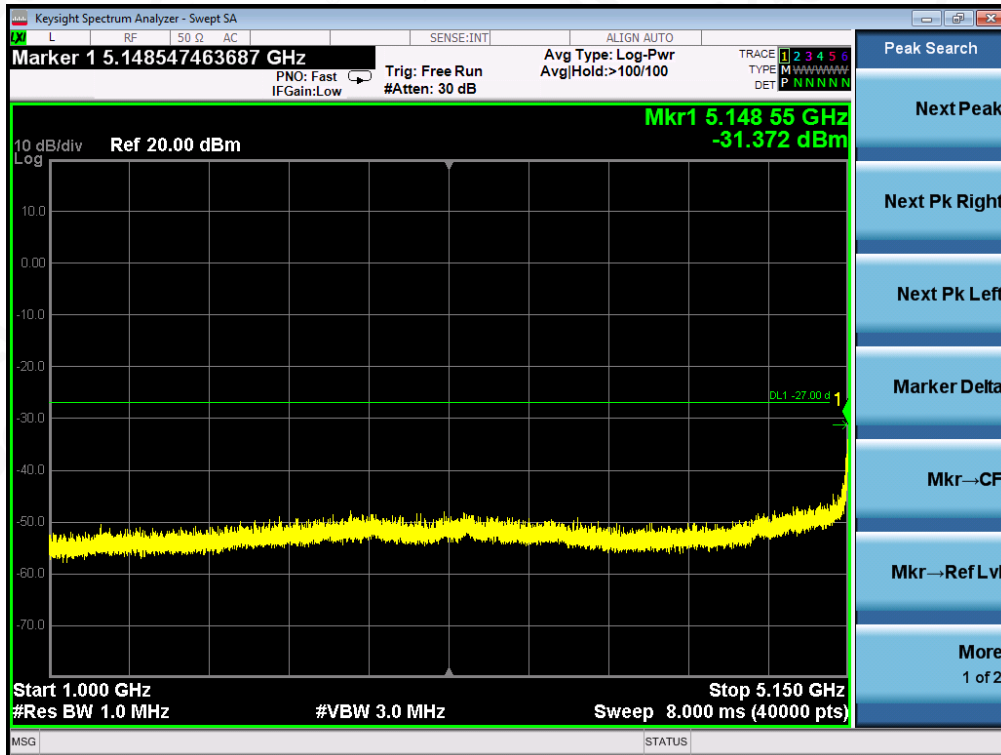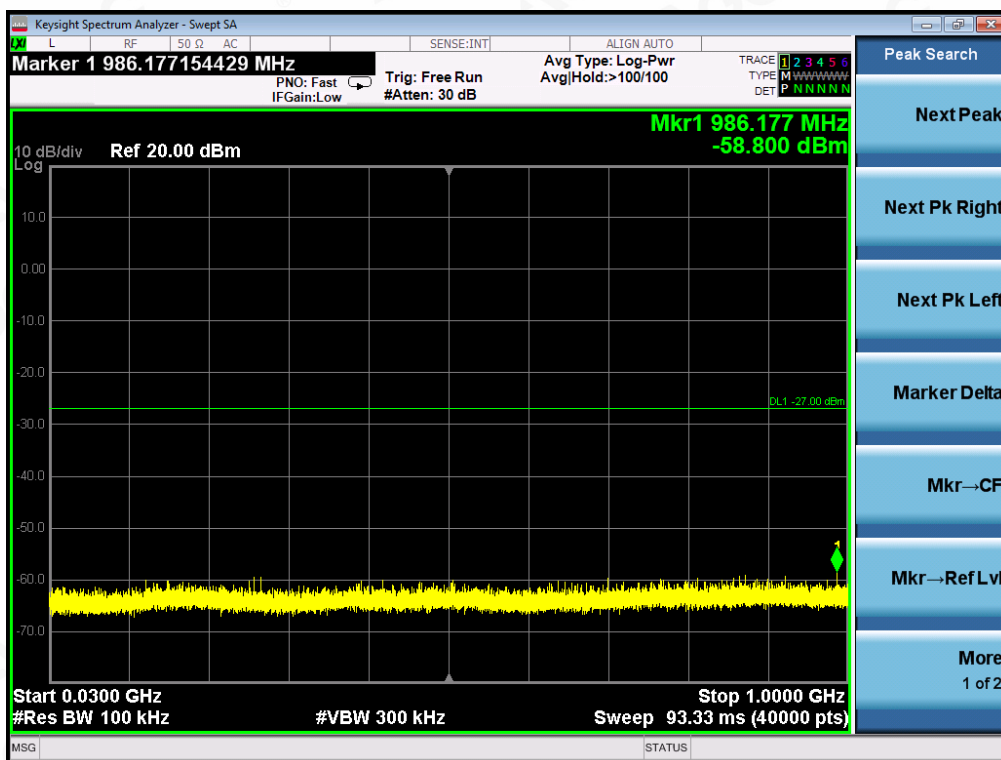

Attestation of Global Compliance



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



Tel: +86-755 2523 4088



E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

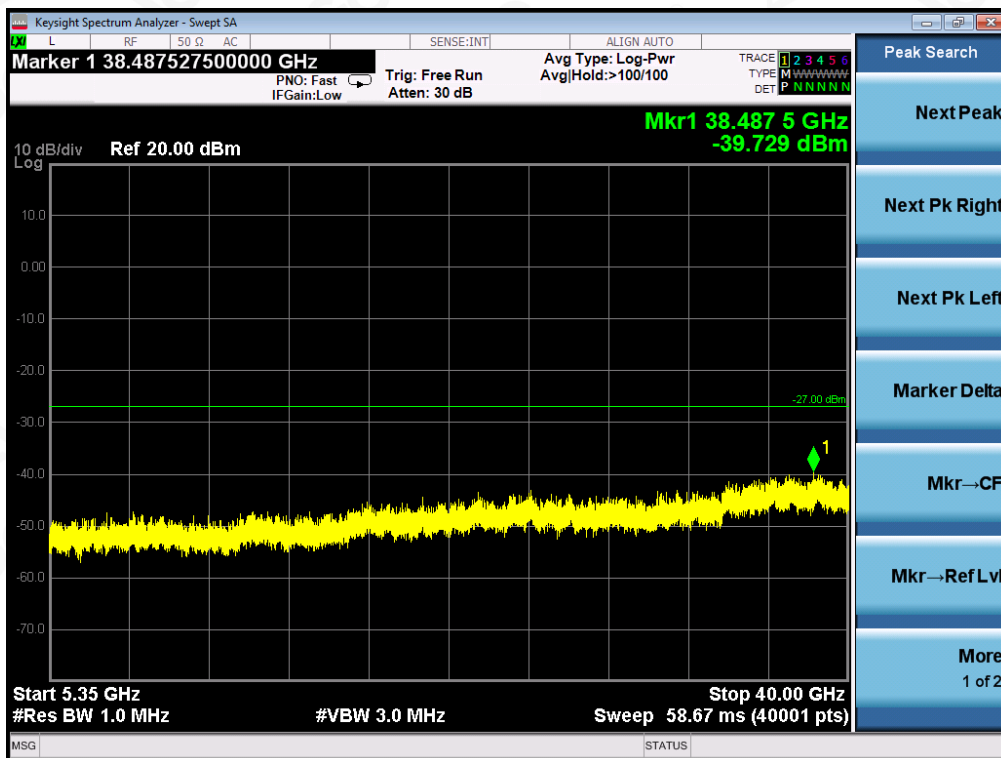
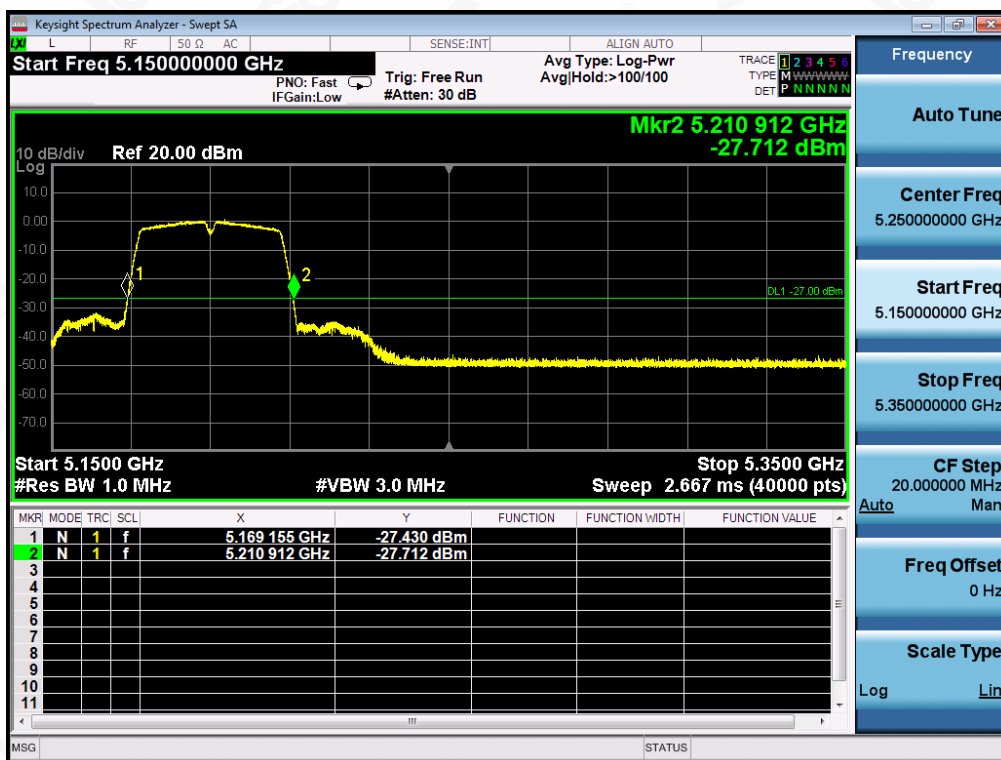




TEST PLOT OF OUT OF BAND EMISSIONS FOR MODULATION IN 5230MHz

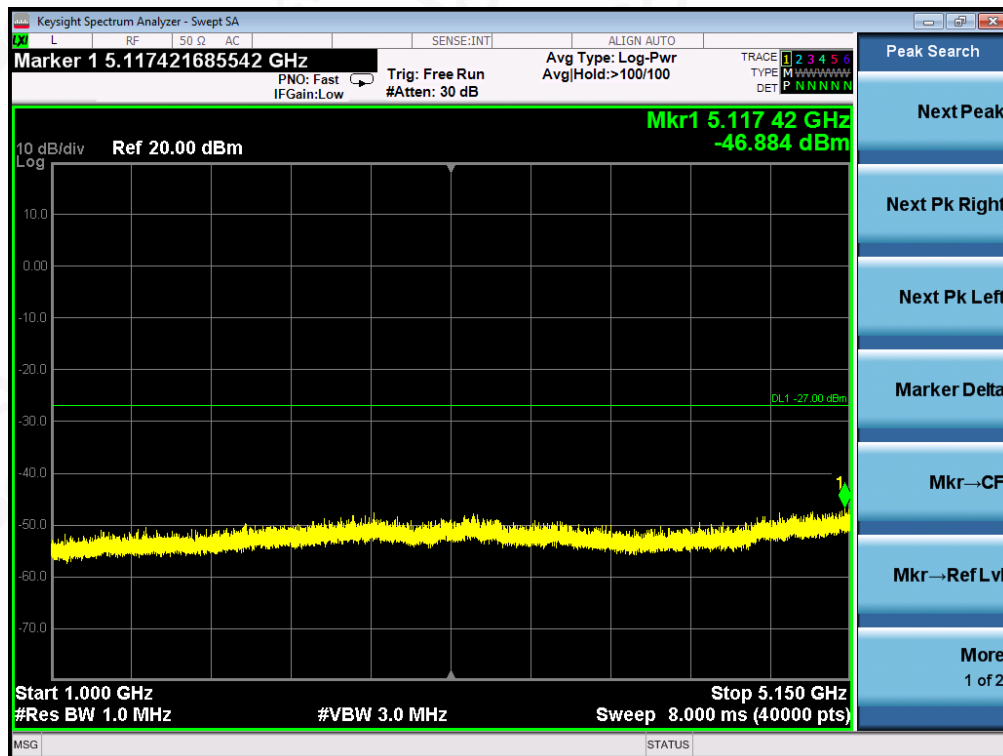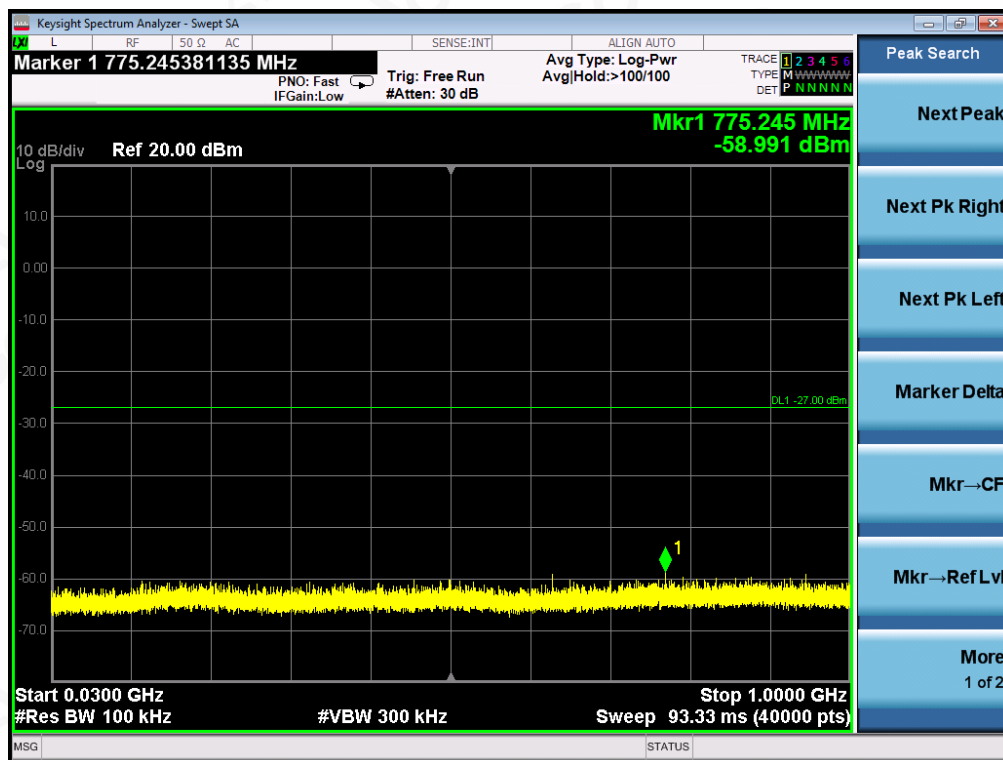

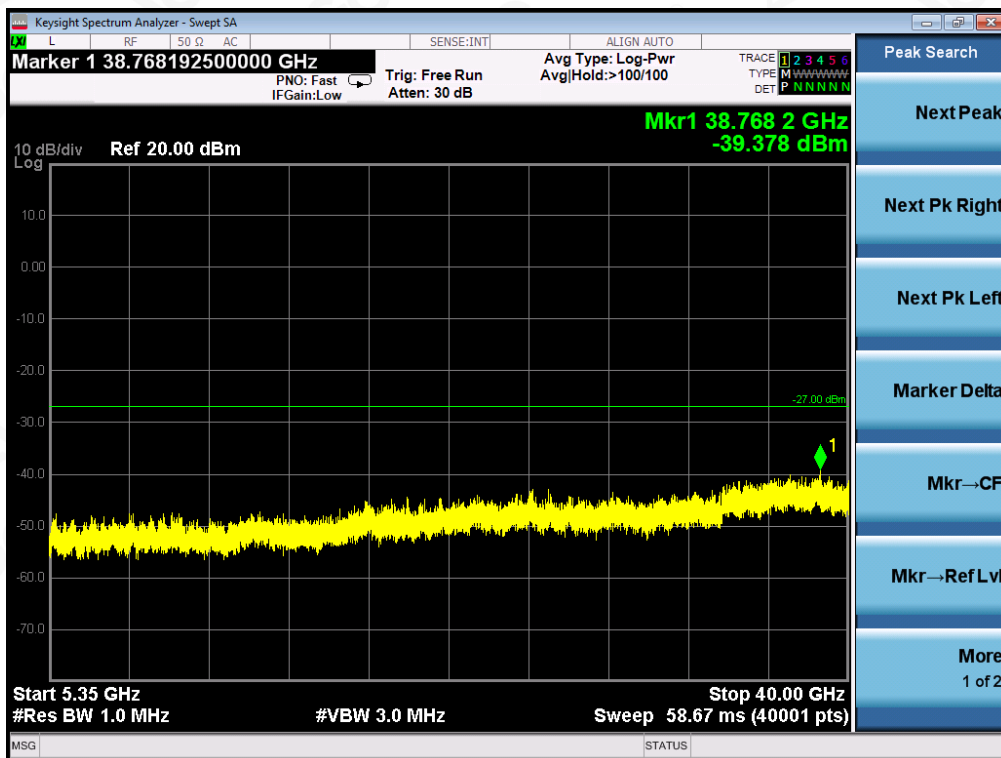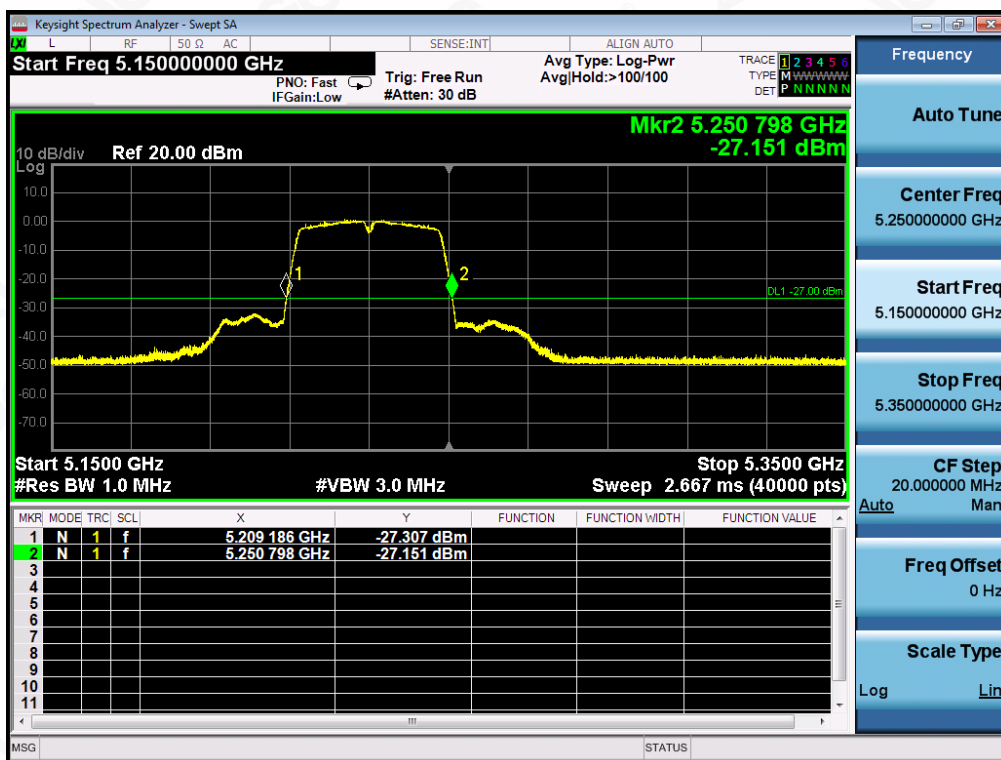

TEST PLOT OF OUT OF BAND EMISSIONS FOR MODULATION IN 5755MHz

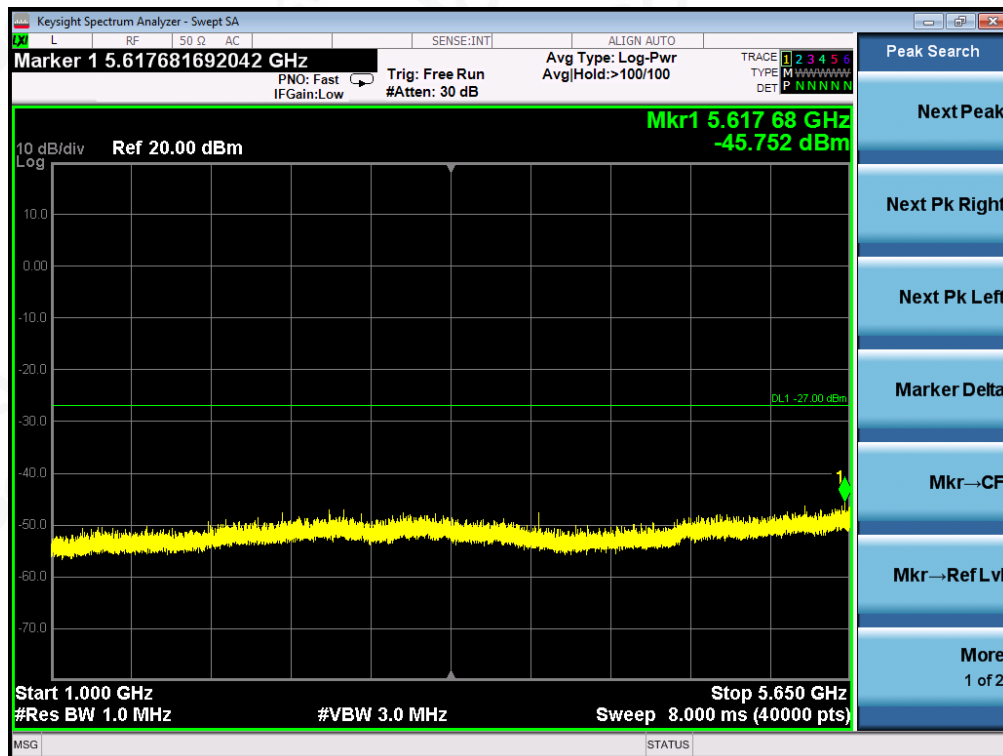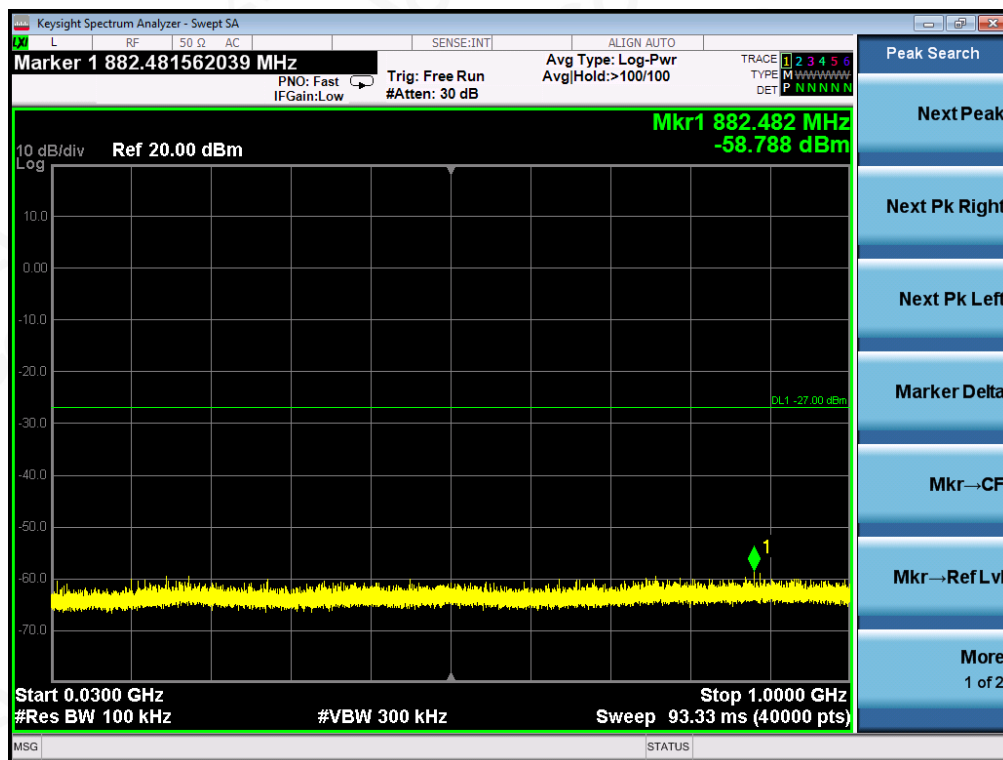

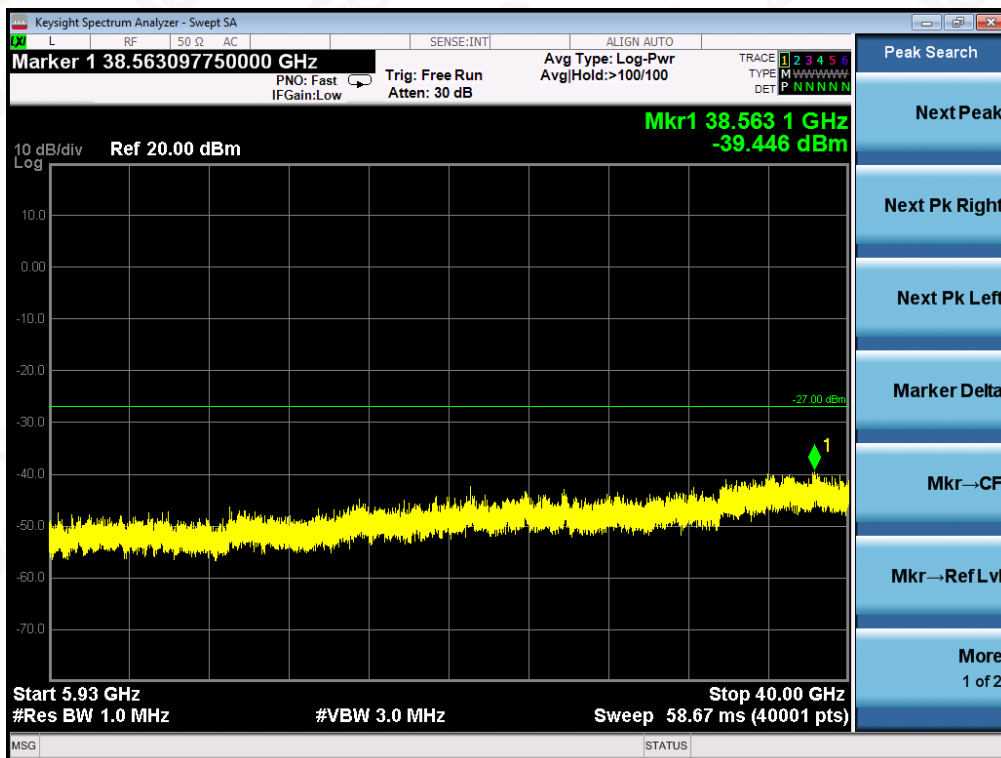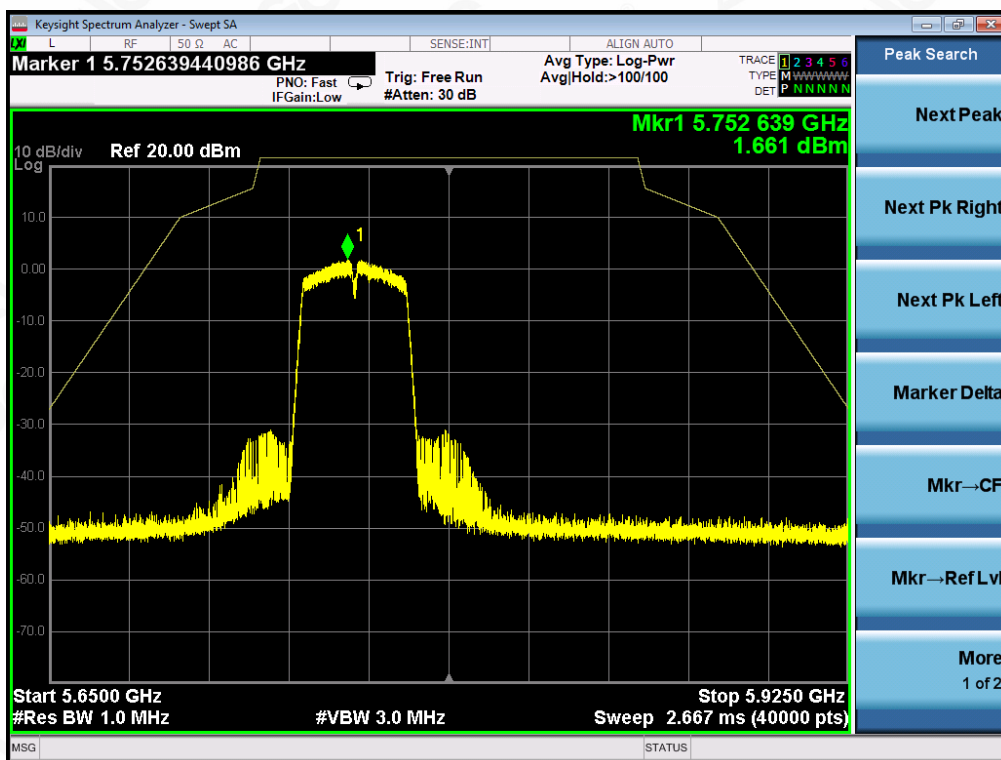

Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.



Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

TEST PLOT OF OUT OF BAND EMISSIONS FOR MODULATION IN 5795M

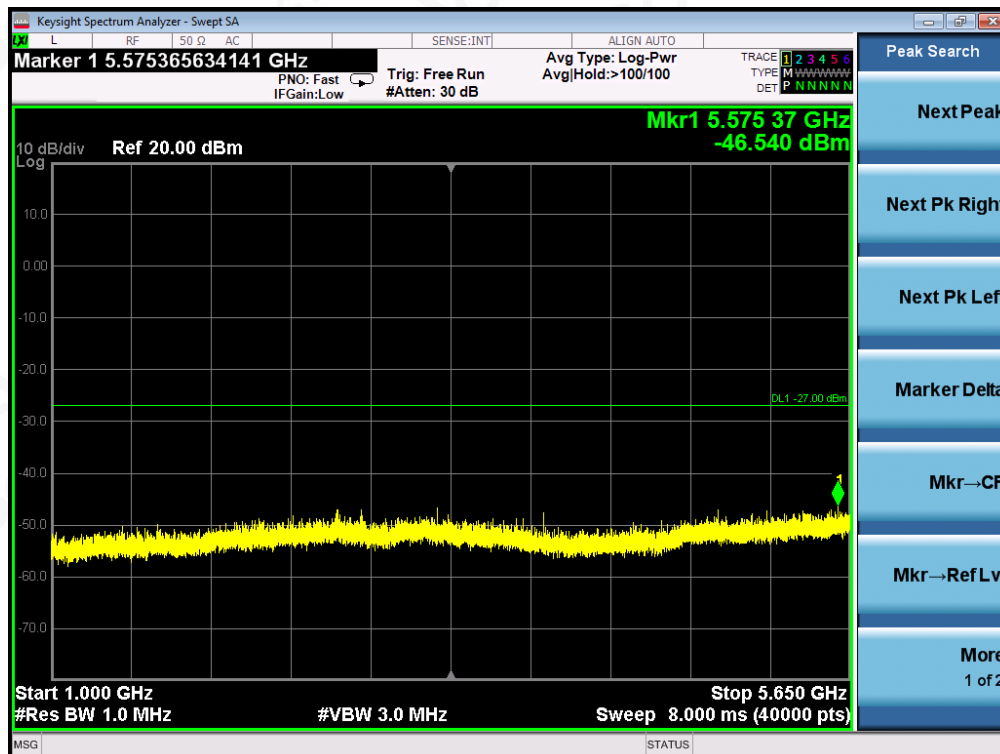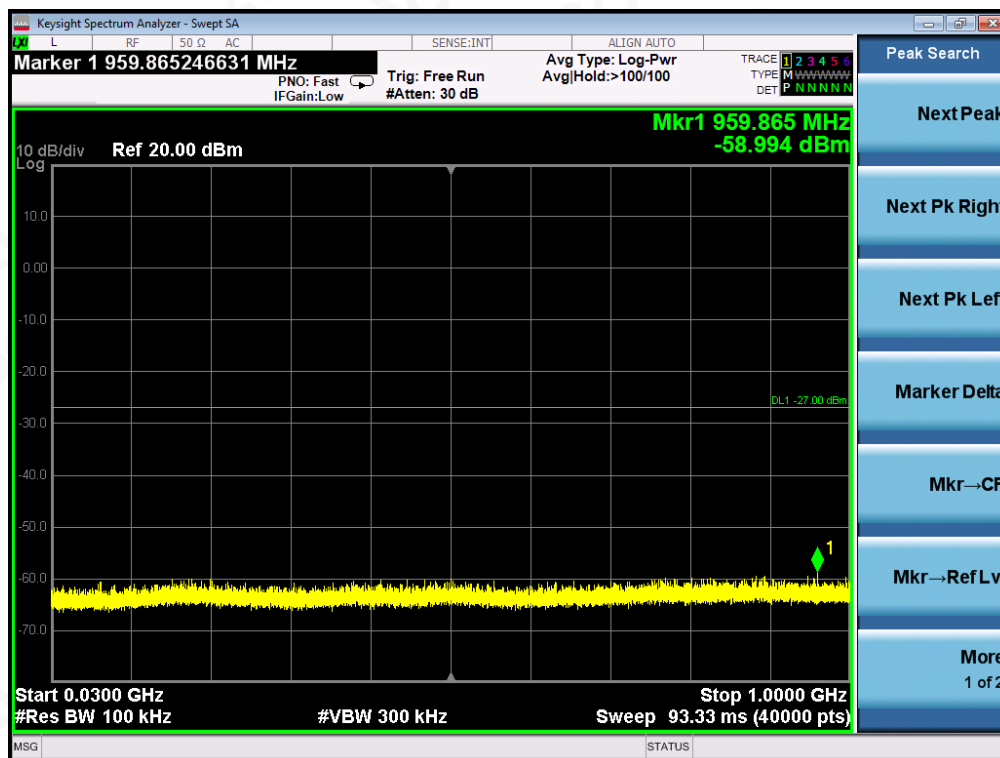

Attestation of Global Compliance



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088



E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

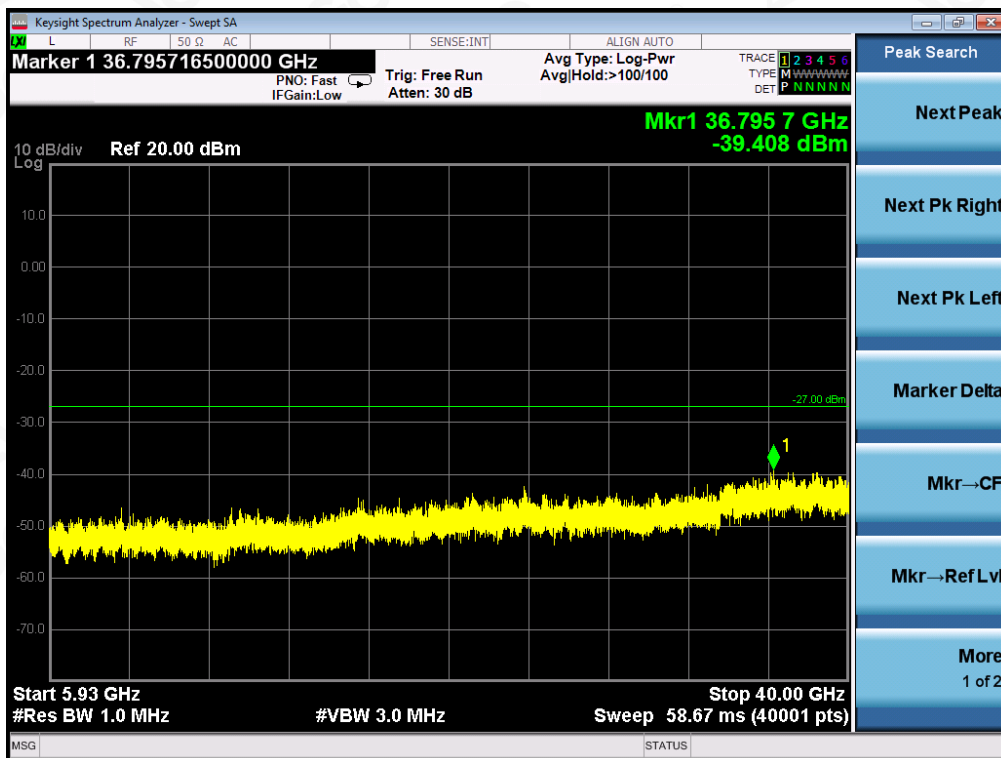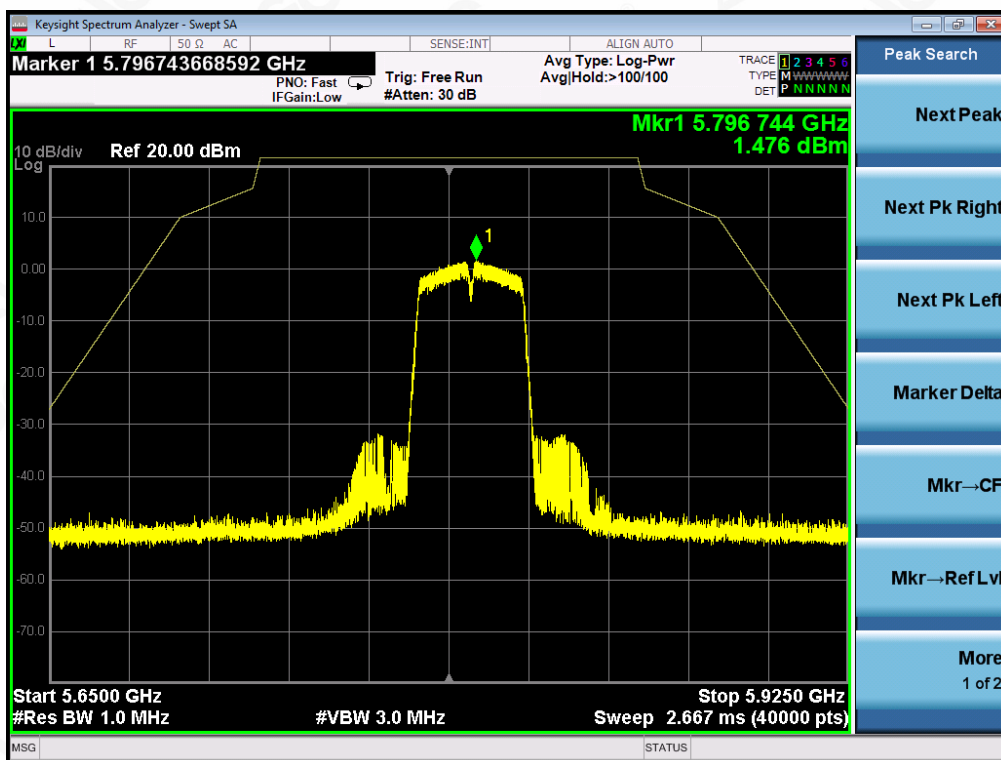

FOR 802.11AC80 MODULATION

TEST PLOT OF OUT OF BAND EMISSIONS FOR MODULATION IN 5210MHz

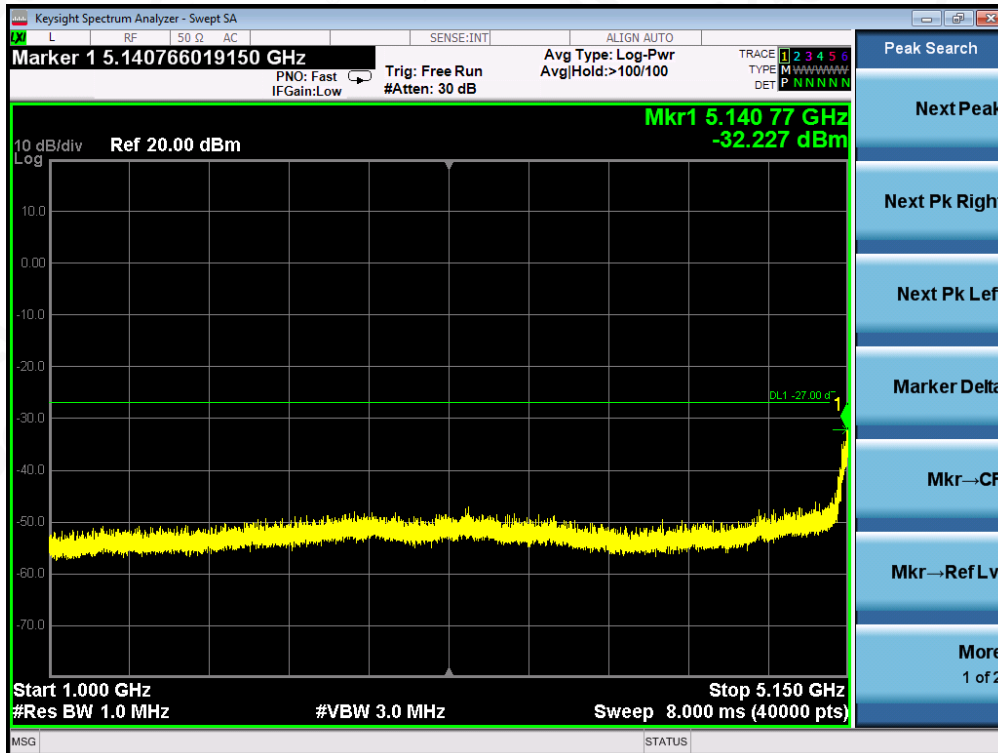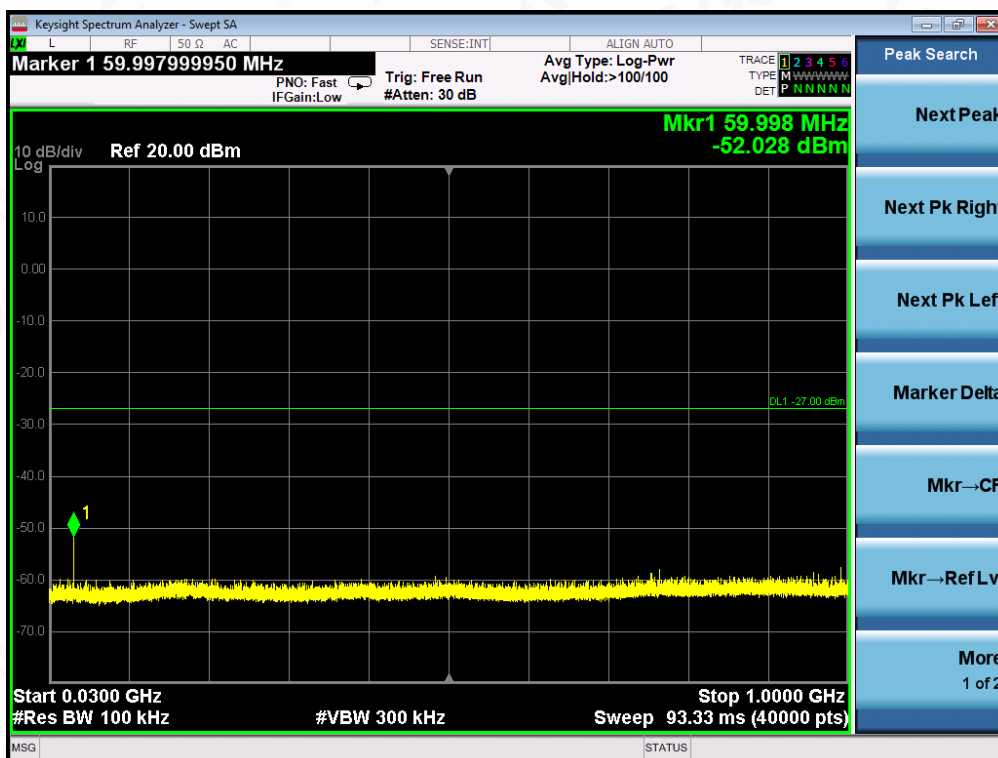

Attestation of Global Compliance



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



Tel: +86-755 2523 4088



E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

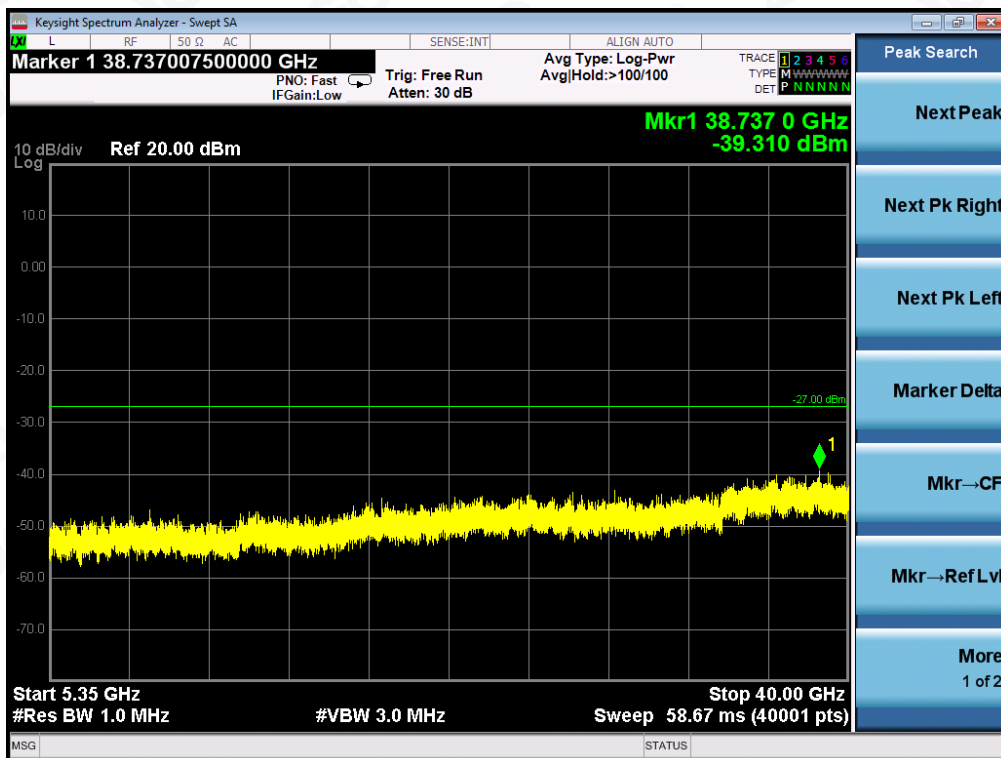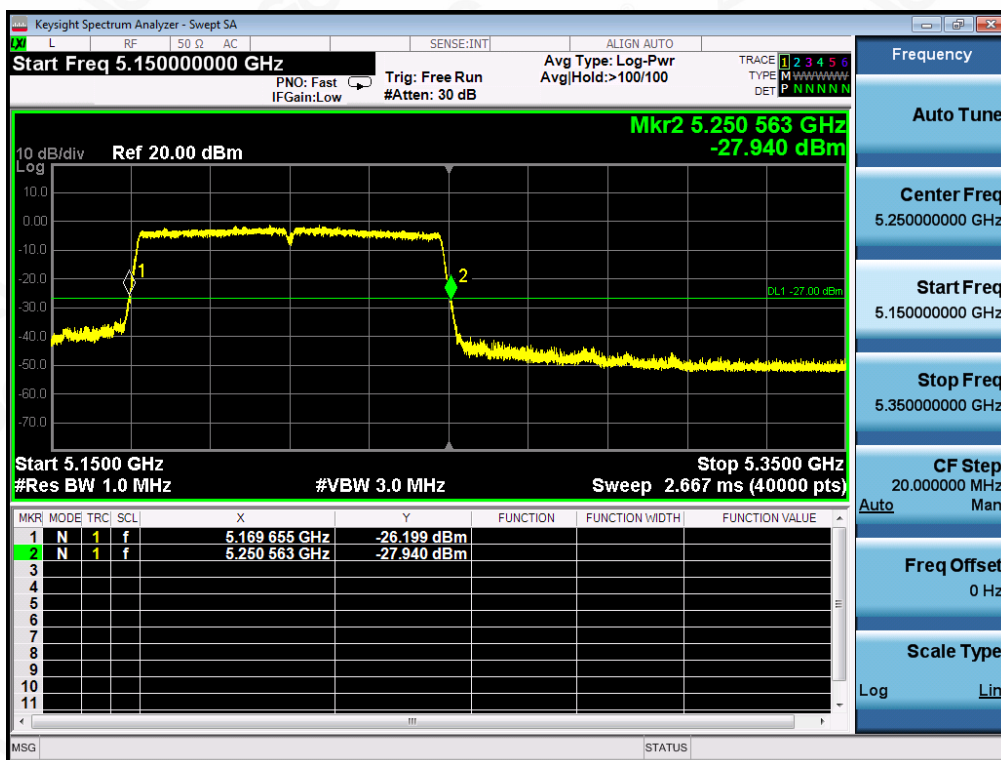

TEST PLOT OF OUT OF BAND EMISSIONS FOR MODULATION IN 5775MHz

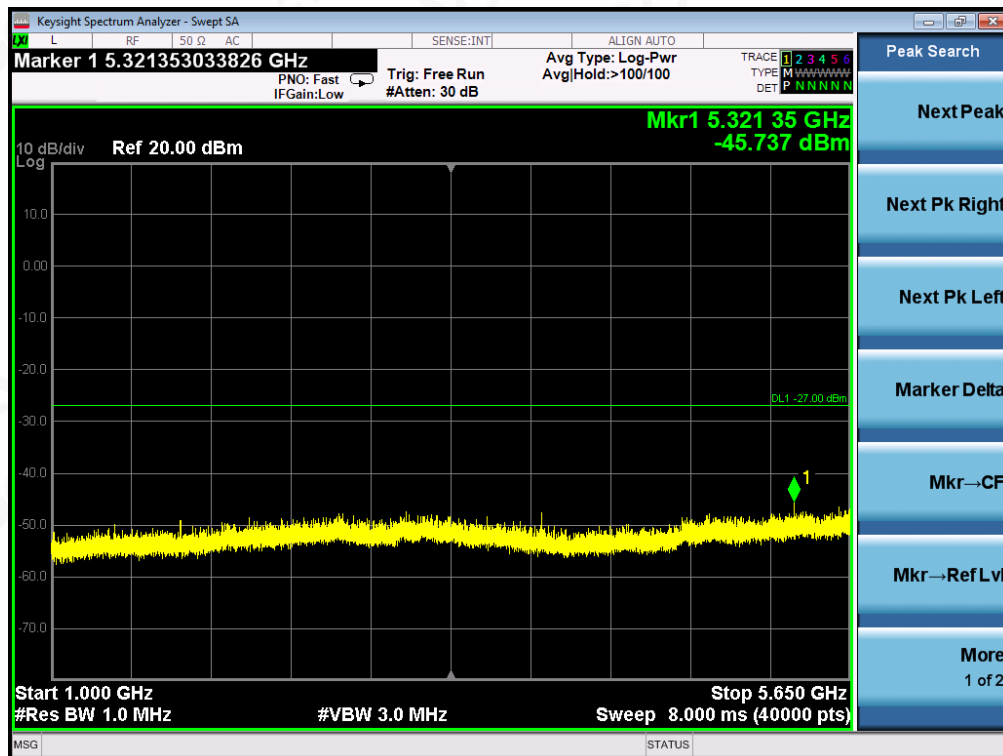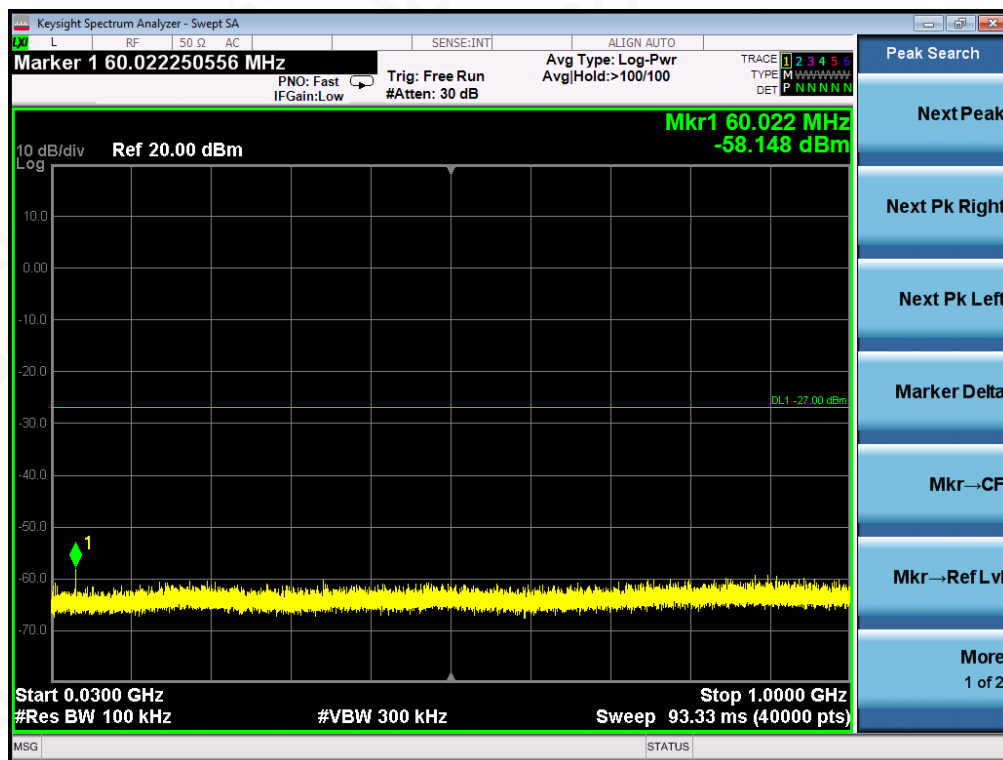

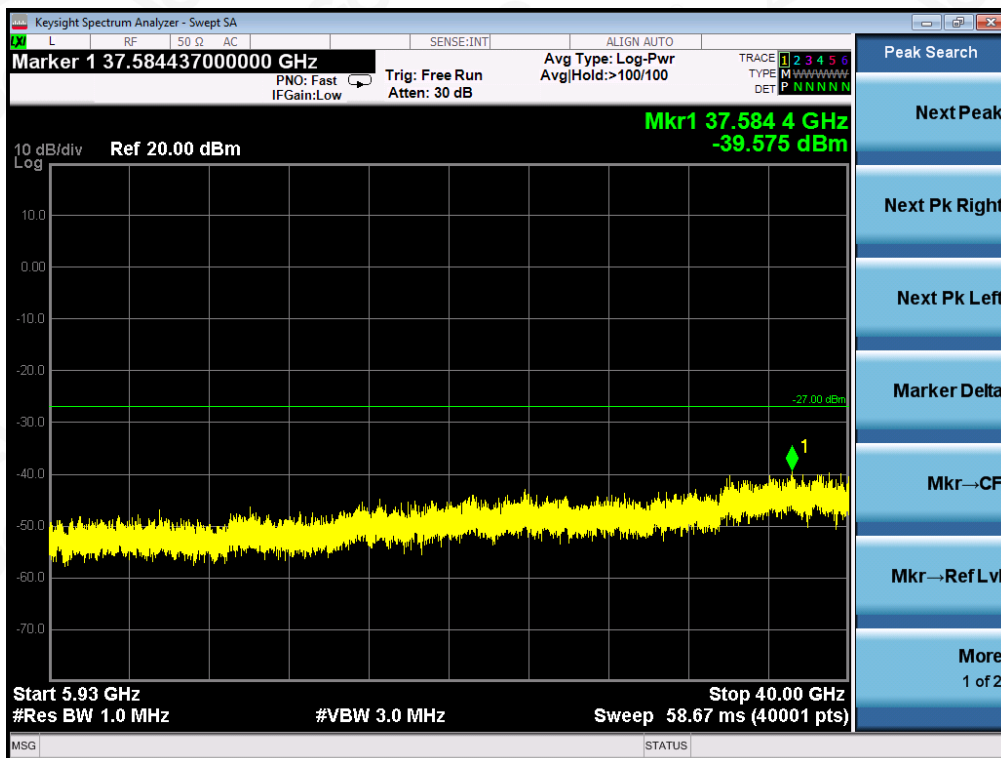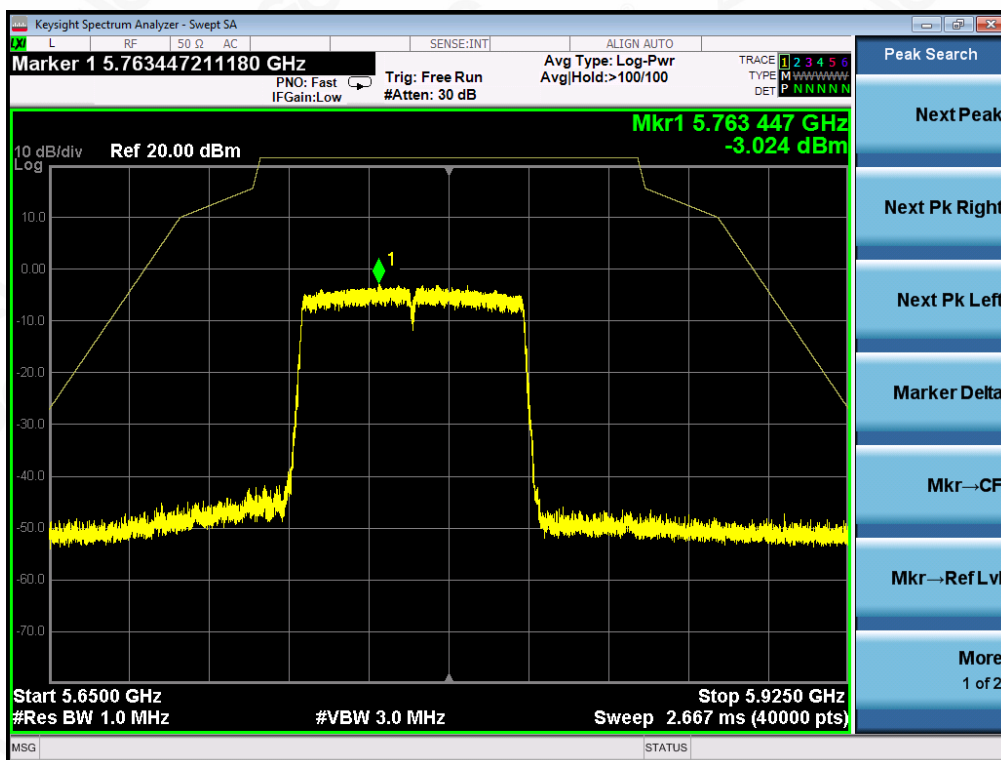

Note: All the 20MHz bandwidth modulation had been tested, the 802.11a20 was the worst case and record in his test report. All the 40MHz bandwidth modulation had been tested, the 802.11N40 was the worst case and record in his test report. All the 80MHz bandwidth modulation had been tested, the 802.11ac80 was the worst case and record in his test report.

Two transmit chains had been tested, the chain 1 was the worst case and record in the test report.

The spurious emission at chain 1 is more than 3dB below the limits, so the MIMO results for the spurious emissions are comply with the requirement.




12. RADIATED EMISSION

12.1. MEASUREMENT PROCEDURE


1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz RBW and 3M VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

12.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

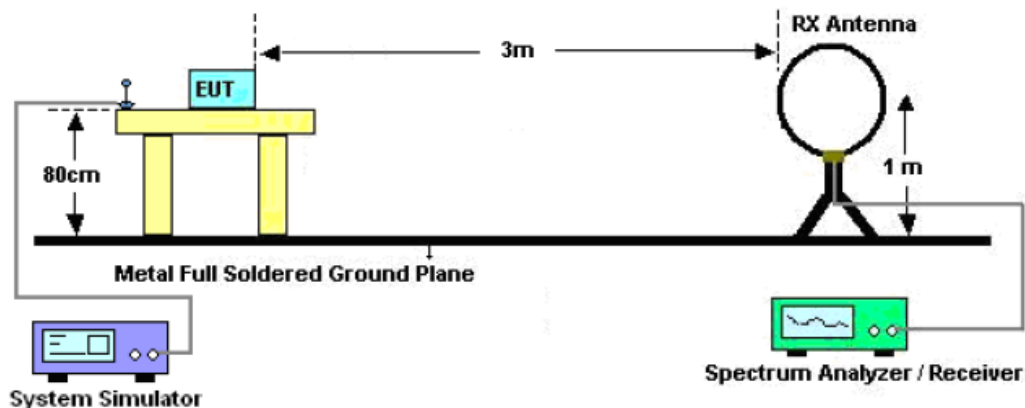

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

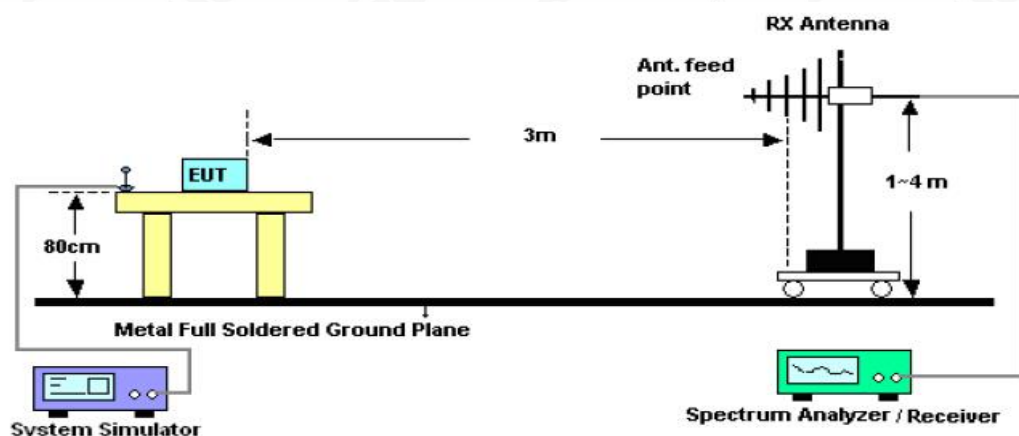

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

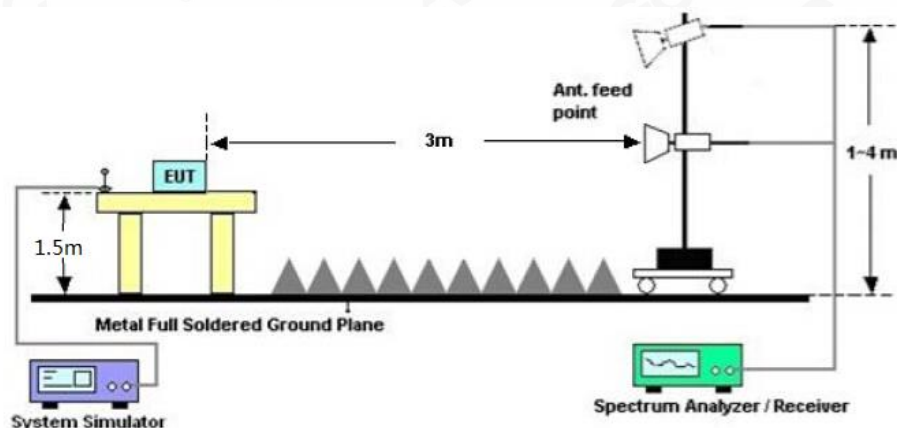

12.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested For restricted band radiated emission,
the test records reported below are the worst result compared to other modes.

12.4. TEST RESULT

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

EUT	LED Projector	Model Name	WK03A
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal



No.	Mk	Freq. MHz	Reading dBuV	Factor dBuV/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		233.7000	16.06	18.21	34.27	46.00	-11.73	peak			
2	!	359.8000	20.64	21.57	42.21	46.00	-3.79	peak			
3	*	411.5333	19.35	23.21	42.56	46.00	-3.44	peak			
4	!	717.0833	13.71	28.54	42.25	46.00	-3.75	peak			
5	!	742.9500	11.61	29.12	40.73	46.00	-5.27	peak			
6	!	833.4833	9.39	30.84	40.23	46.00	-5.77	peak			

RESULT: PASS

EUT	LED Projector	Model Name	WK03A
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	41.3167	16.83	20.04	36.87	40.00	-3.13	peak			
2		149.6333	15.04	19.21	34.25	43.50	-9.25	peak			
3		235.3167	18.87	18.33	37.20	46.00	-8.80	peak			
4		405.0667	15.06	23.08	38.14	46.00	-7.86	peak			
5		565.1167	13.15	26.27	39.42	46.00	-6.58	peak			
6		712.2333	9.23	28.43	37.66	46.00	-8.34	peak			

RESULT: PASS

Note: All test channels had been tested. The 802.11a20 at 5180MHz is the worst case and recorded in the test report.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Limit-Level.

The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION ABOVE 1GHZ

EUT	LED Projector	Model Name	WK03A
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ–Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
10360.042	42.57	9.14	51.71	74.00	-22.29	peak
10360.042	37.67	9.14	46.81	54.00	-7.19	AVG
15540.063	34.86	10.22	45.08	74.00	-28.92	peak
15540.063	30.89	10.22	41.11	54.00	-12.89	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RADIATED EMISSION ABOVE 1GHZ–Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
10360.042	44.57	9.14	53.71	74.00	-20.29	peak
10360.042	38.52	9.14	47.66	54.00	-6.34	AVG
15540.063	35.69	10.22	45.91	74.00	-28.09	peak
15540.063	31.78	10.22	42.00	54.00	-12.00	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



EUT	LED Projector	Model Name	WK03A
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5240MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ–Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
10480.042	43.20	9.27	52.47	74.00	-21.53	peak
10480.042	35.79	9.27	45.06	54.00	-8.94	AVG
15720.063	36.28	10.38	46.66	74.00	-27.34	peak
15720.063	32.40	10.38	42.78	54.00	-11.22	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RADIATED EMISSION ABOVE 1GHZ–Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
10480.042	42.65	9.27	51.92	74.00	-22.08	peak
10480.042	38.37	9.27	47.64	54.00	-6.36	AVG
15720.063	36.20	10.38	46.58	74.00	-27.42	peak
15720.063	33.53	10.38	43.91	54.00	-10.09	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

EUT	LED Projector	Model Name	WK03A
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5745MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ–Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
11490.042	44.30	9.42	53.72	74.00	-20.28	peak
11490.042	38.74	9.42	48.16	54.00	-5.84	AVG
17235.063	34.54	10.51	45.05	74.00	-28.95	peak
17235.063	32.49	10.51	43.00	54.00	-11.00	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RADIATED EMISSION ABOVE 1GHZ–Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
11490.042	45.02	9.42	54.44	74.00	-19.56	peak
11490.042	39.22	9.42	48.64	54.00	-5.36	AVG
17235.063	34.54	10.51	45.05	74.00	-28.95	peak
17235.063	32.10	10.51	42.61	54.00	-11.39	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

EUT	LED Projector	Model Name	WK03A
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5825MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ–Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
11650.042	43.36	9.62	52.98	74.00	-21.02	peak
11650.042	35.43	9.62	45.05	54.00	-8.95	AVG
17475.063	36.86	10.75	47.61	74.00	-26.39	peak
17475.063	34.78	10.75	45.53	54.00	-8.47	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RADIATED EMISSION ABOVE 1GHZ–Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
11650.042	43.93	9.62	53.55	74.00	-20.45	peak
11650.042	38.02	9.62	47.64	54.00	-6.36	AVG
17475.063	37.86	10.75	48.61	74.00	-25.39	peak
17475.063	35.32	10.75	46.07	54.00	-7.93	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Note: All the case had been tested. The 802.11a modulation is the worst case and recorded in the test report.
Other frequencies radiation emission from 1GHz to 40GHz at least have 20dB margin and not recorded in the test report.
Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Limit-Level.
The “Factor” value can be calculated automatically by software of measurement system.

13. BAND EDGE EMISSION


13.1. MEASUREMENT PROCEDURE

1. The EUT operates at transmitting mode. The operate channel is tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
2. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=1MHz, VBW=3MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz ; VBW=1/on time(1KHz) / Sweep=AUTO
3. Other procedures refer to clause 11.2.

Note:

1. Factor=Antenna Factor + Cable loss - Amplifier gain. Field Strength=Factor + Reading level
2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB(μ V) to represent the Amplitude. Use the F dB(μ V/m) to represent the Field Strength. So A=F.
3. Only the data of band edge emission at the restricted band 4.5GHz-5.15GHz record in the report. Other restricted band 5.35GHz-5.46GHz and 7.25GHz-7.77GHz were considered as ambient noise. No recording in the test report.


13.2. TEST SET-UP

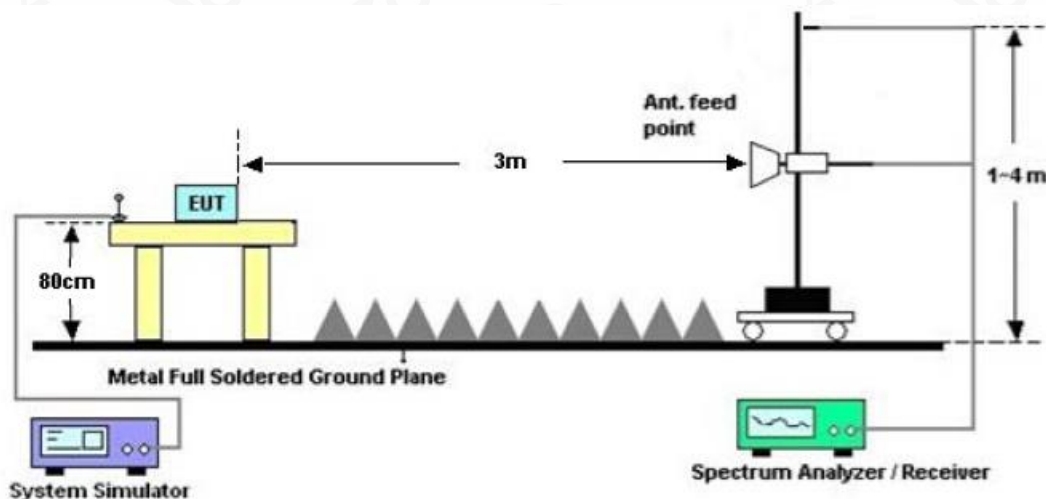


13.3. TEST RESULT

EUT	LED Projector	Model Name	WK03A
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal

PK Value

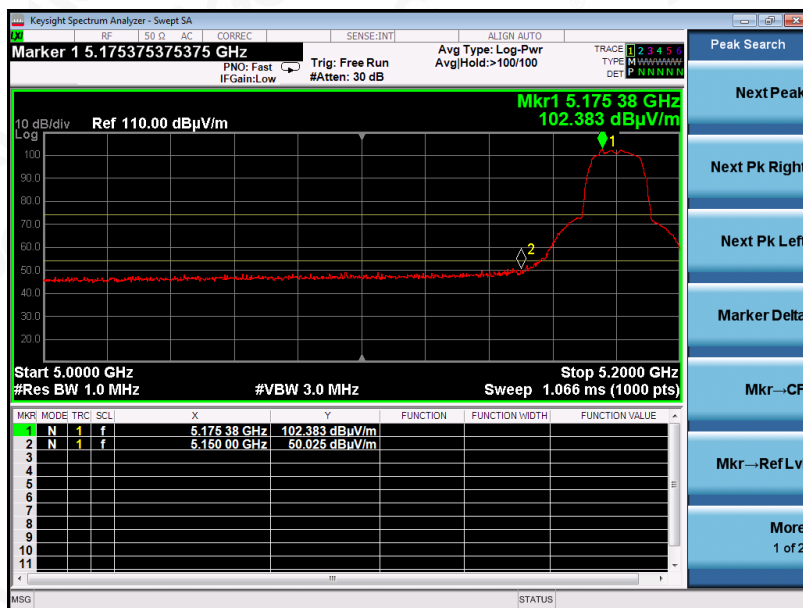

AV Value

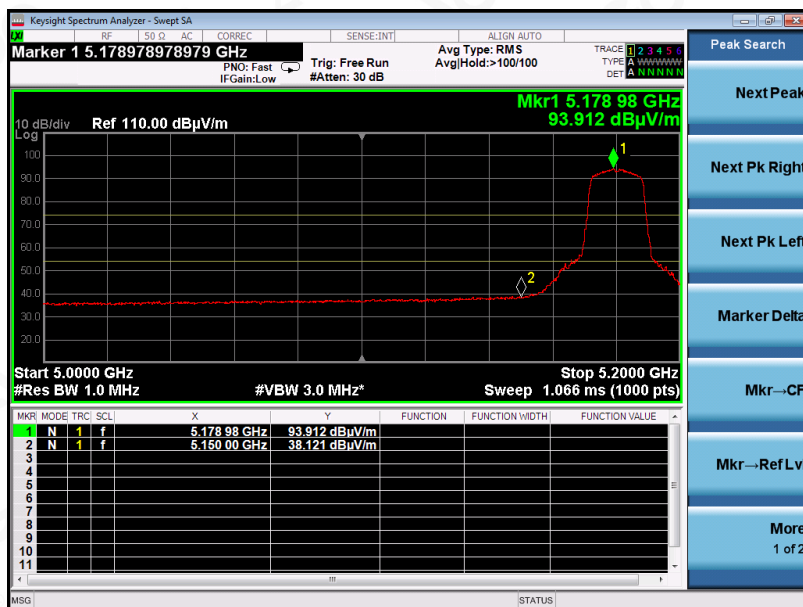

Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China


Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com


Service Hotline: 400 089 2118

EUT	LED Projector	Model Name	WK03A
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical

PK Value

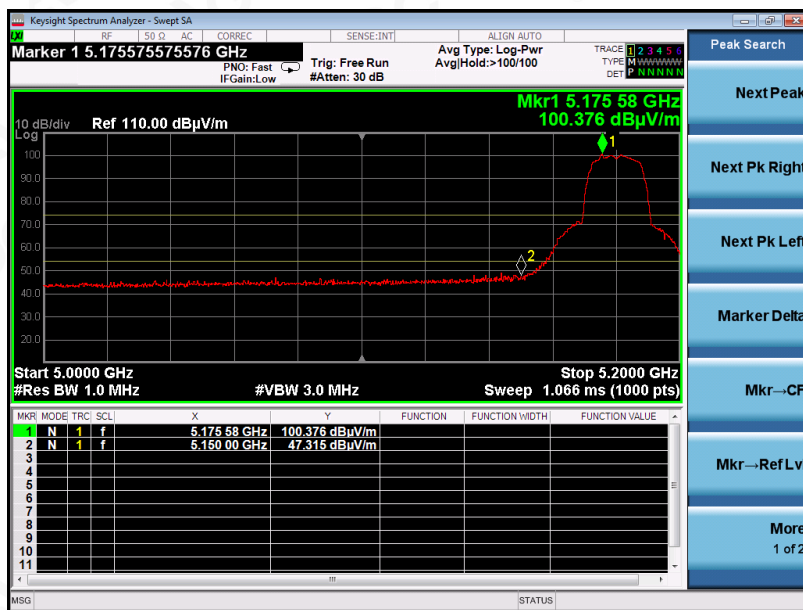

AV Value

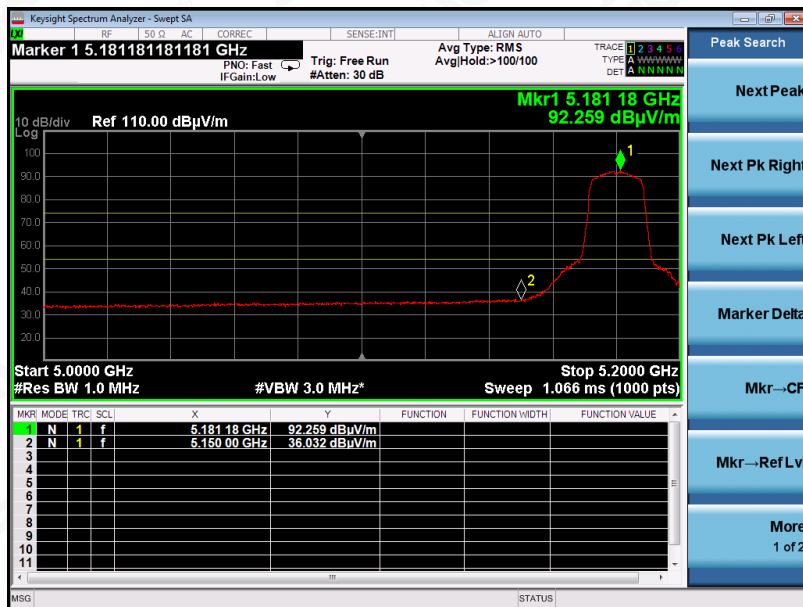

EUT	LED Projector	Model Name	WK03A
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Horizontal

PK Value




AV Value



EUT	LED Projector	Model Name	WK03A
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Vertical

PK Value

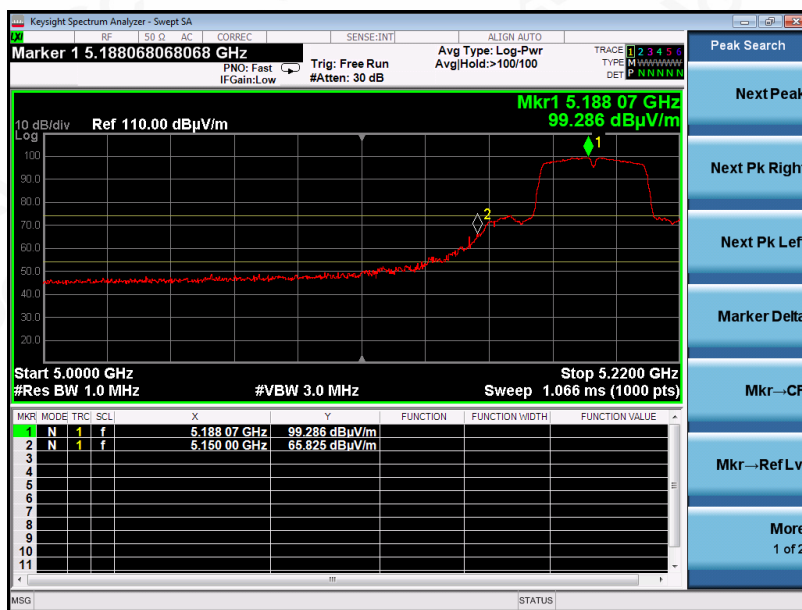

AV Value




EUT	LED Projector	Model Name	WK03A
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5210MHz	Antenna	Horizontal

PK Value



AV Value

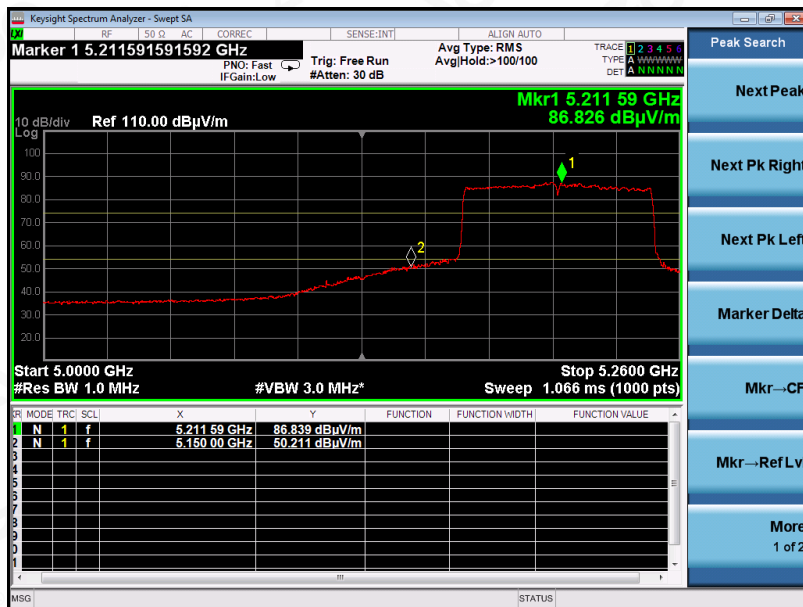

Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

EUT	LED Projector	Model Name	WK03A
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5210MHz	Antenna	Vertical

PK Value



AV Value



RESULT: PASS


Note: All the 20MHz bandwidth modulation had been tested, the 802.11a20 was the worst case and record in his test report. All the 40MHz bandwidth modulation had been tested, the 802.11N40 was the worst case and record in his test report.

14. FREQUENCY STABILITY

14.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the operation frequency.
3. Set SPA Centre Frequency = Operation Frequency. SPAN=enough to measure the emission is maintained within the band
4. Set SPA Trace 1 Max hold, then View.
5. Extreme temperature rule is -10°C~60°C.

14.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

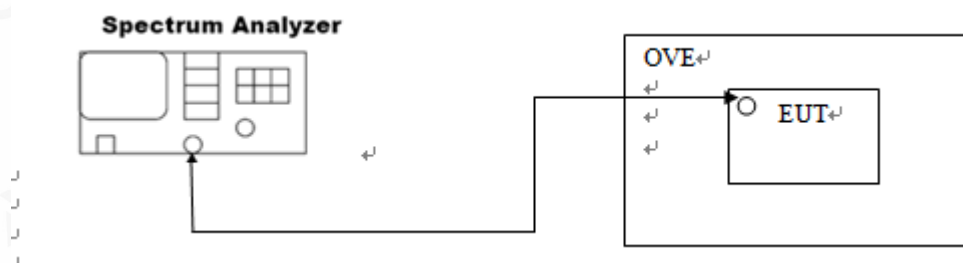

14.3. MEASUREMENT RESULTS

Test Mode	Temperature	Measurement Frequency (MHz)	Result	Conclusion
802.11a	- 10℃	5180	within the band	PASS
	0℃	5180	within the band	PASS
	10℃	5180	within the band	PASS
	20℃	5180	within the band	PASS
	30℃	5180	within the band	PASS
	40℃	5180	within the band	PASS
	50℃	5180	within the band	PASS
	60℃	5180	within the band	PASS
	- 10℃	5240	within the band	PASS
	0℃	5240	within the band	PASS
	10℃	5240	within the band	PASS
	20℃	5240	within the band	PASS
	30℃	5240	within the band	PASS
	40℃	5240	within the band	PASS
	50℃	5240	within the band	PASS
	60℃	5240	within the band	PASS
	- 10℃	5745	within the band	PASS
	0℃	5745	within the band	PASS
	10℃	5745	within the band	PASS
	20℃	5745	within the band	PASS
	30℃	5745	within the band	PASS
	40℃	5745	within the band	PASS
	50℃	5745	within the band	PASS
	60℃	5240	within the band	PASS
	- 10℃	5825	within the band	PASS
	0℃	5825	within the band	PASS
	10℃	5825	within the band	PASS
	20℃	5825	within the band	PASS
	30℃	5825	within the band	PASS
	40℃	5825	within the band	PASS
	50℃	5825	within the band	PASS
	60℃	5825	within the band	PASS



Test Mode	Temperature	Measurement Frequency (MHz)	Result	Conclusion
802.11n20	- 10℃	5180	within the band	PASS
	0℃	5180	within the band	PASS
	10℃	5180	within the band	PASS
	20℃	5180	within the band	PASS
	30℃	5180	within the band	PASS
	40℃	5180	within the band	PASS
	50℃	5180	within the band	PASS
	60℃	5180	within the band	PASS
	- 10℃	5240	within the band	PASS
	0℃	5240	within the band	PASS
	10℃	5240	within the band	PASS
	20℃	5240	within the band	PASS
	30℃	5240	within the band	PASS
	40℃	5240	within the band	PASS
	50℃	5240	within the band	PASS
	60℃	5240	within the band	PASS
	- 10℃	5745	within the band	PASS
	0℃	5745	within the band	PASS
	10℃	5745	within the band	PASS
	20℃	5745	within the band	PASS
	30℃	5745	within the band	PASS
	40℃	5745	within the band	PASS
	50℃	5745	within the band	PASS
	60℃	5240	within the band	PASS
	- 10℃	5825	within the band	PASS
	0℃	5825	within the band	PASS
	10℃	5825	within the band	PASS
	20℃	5825	within the band	PASS
	30℃	5825	within the band	PASS
	40℃	5825	within the band	PASS
	50℃	5825	within the band	PASS
	60℃	5825	within the band	PASS



Test Mode	Temperature	Measurement Frequency (MHz)	Result	Conclusion
802.11ac20	- 10℃	5180	within the band	PASS
	0℃	5180	within the band	PASS
	10℃	5180	within the band	PASS
	20℃	5180	within the band	PASS
	30℃	5180	within the band	PASS
	40℃	5180	within the band	PASS
	50℃	5180	within the band	PASS
	60℃	5180	within the band	PASS
	- 10℃	5240	within the band	PASS
	0℃	5240	within the band	PASS
	10℃	5240	within the band	PASS
	20℃	5240	within the band	PASS
	30℃	5240	within the band	PASS
	40℃	5240	within the band	PASS
	50℃	5240	within the band	PASS
	60℃	5240	within the band	PASS
	- 10℃	5745	within the band	PASS
	0℃	5745	within the band	PASS
	10℃	5745	within the band	PASS
	20℃	5745	within the band	PASS
	30℃	5745	within the band	PASS
	40℃	5745	within the band	PASS
	50℃	5745	within the band	PASS
	60℃	5240	within the band	PASS
	- 10℃	5825	within the band	PASS
	0℃	5825	within the band	PASS
	10℃	5825	within the band	PASS
	20℃	5825	within the band	PASS
	30℃	5825	within the band	PASS
	40℃	5825	within the band	PASS
	50℃	5825	within the band	PASS
	60℃	5825	within the band	PASS



Test Mode	Temperature	Measurement Frequency (MHz)	Result	Conclusion
802.11n40	- 10℃	5190	within the band	PASS
	0℃	5190	within the band	PASS
	10℃	5190	within the band	PASS
	20℃	5190	within the band	PASS
	30℃	5190	within the band	PASS
	40℃	5190	within the band	PASS
	50℃	5190	within the band	PASS
	60℃	5190	within the band	PASS
	- 10℃	5230	within the band	PASS
	0℃	5230	within the band	PASS
	10℃	5230	within the band	PASS
	20℃	5230	within the band	PASS
	30℃	5230	within the band	PASS
	40℃	5230	within the band	PASS
	50℃	5230	within the band	PASS
	60℃	5230	within the band	PASS
	- 10℃	5755	within the band	PASS
	0℃	5755	within the band	PASS
	10℃	5755	within the band	PASS
	20℃	5755	within the band	PASS
	30℃	5755	within the band	PASS
	40℃	5755	within the band	PASS
	50℃	5755	within the band	PASS
	60℃	5755	within the band	PASS
	- 10℃	5795	within the band	PASS
	0℃	5795	within the band	PASS
	10℃	5795	within the band	PASS
	20℃	5795	within the band	PASS
	30℃	5795	within the band	PASS
	40℃	5795	within the band	PASS
	50℃	5795	within the band	PASS
	60℃	5795	within the band	PASS



Test Mode	Temperature	Measurement Frequency (MHz)	Result	Conclusion
802.11ac40	- 10℃	5190	within the band	PASS
	0℃	5190	within the band	PASS
	10℃	5190	within the band	PASS
	20℃	5190	within the band	PASS
	30℃	5190	within the band	PASS
	40℃	5190	within the band	PASS
	50℃	5190	within the band	PASS
	60℃	5190	within the band	PASS
	- 10℃	5230	within the band	PASS
	0℃	5230	within the band	PASS
	10℃	5230	within the band	PASS
	20℃	5230	within the band	PASS
	30℃	5230	within the band	PASS
	40℃	5230	within the band	PASS
	50℃	5230	within the band	PASS
	60℃	5230	within the band	PASS
	- 10℃	5755	within the band	PASS
	0℃	5755	within the band	PASS
	10℃	5755	within the band	PASS
	20℃	5755	within the band	PASS
	30℃	5755	within the band	PASS
	40℃	5755	within the band	PASS
	50℃	5755	within the band	PASS
	60℃	5755	within the band	PASS
	- 10℃	5795	within the band	PASS
	0℃	5795	within the band	PASS
	10℃	5795	within the band	PASS
	20℃	5795	within the band	PASS
	30℃	5795	within the band	PASS
	40℃	5795	within the band	PASS
	50℃	5795	within the band	PASS
	60℃	5795	within the band	PASS



Test Mode	Temperature	Measurement Frequency (MHz)	Result	Conclusion
802.11ac80	- 10℃	5210	within the band	PASS
	0℃	5210	within the band	PASS
	10℃	5210	within the band	PASS
	20℃	5210	within the band	PASS
	30℃	5210	within the band	PASS
	40℃	5210	within the band	PASS
	50℃	5210	within the band	PASS
	60℃	5210	within the band	PASS
	- 10℃	5775	within the band	PASS
	0℃	5775	within the band	PASS
	10℃	5775	within the band	PASS
	20℃	5775	within the band	PASS
	30℃	5775	within the band	PASS
	40℃	5775	within the band	PASS
	50℃	5775	within the band	PASS
	60℃	5775	within the band	PASS



15. FCC LINE CONDUCTED EMISSION TEST


15.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

15.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

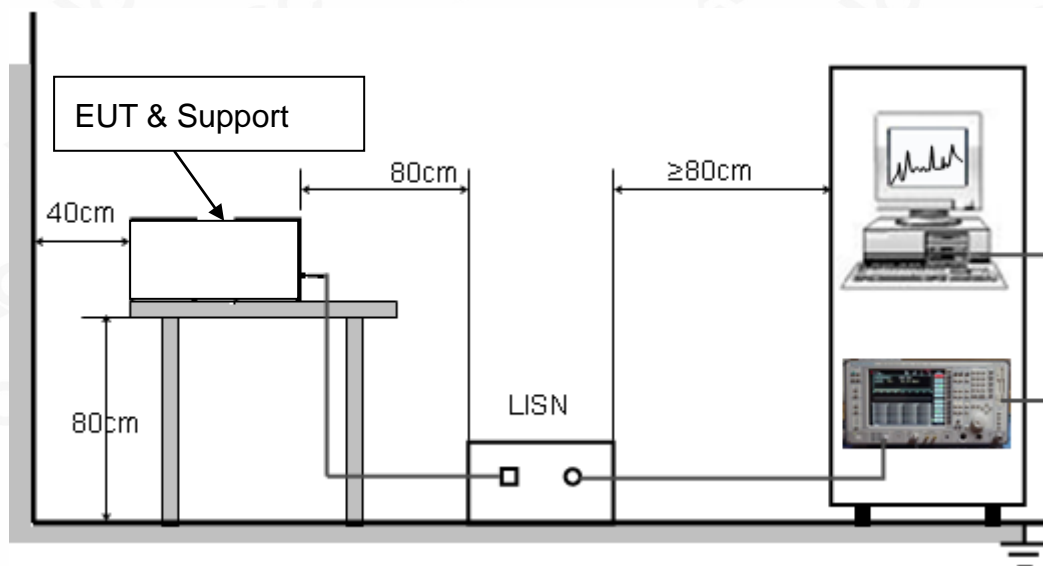

15.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received charging voltage by adapter which received 120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

15.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

15.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

LINE CONDUCTED EMISSION TEST-L

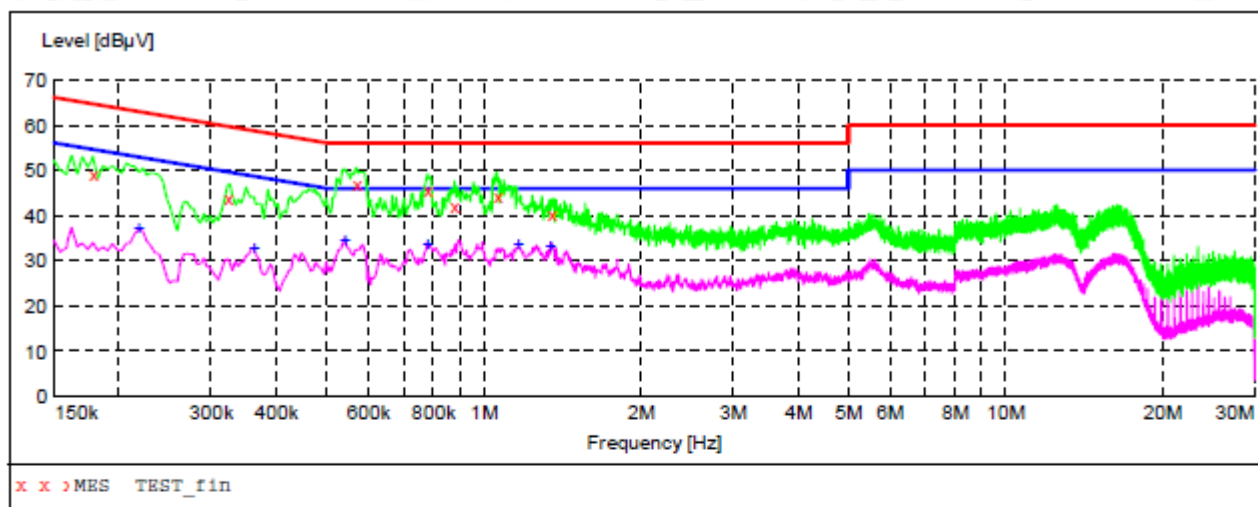

MEASUREMENT RESULT: "TEST_fin"

7/31/2019 5:57PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.178000	49.10	10.9	65	15.5	QP	L1	FLO
0.322000	44.10	10.8	60	15.6	QP	L1	FLO
0.570000	47.20	10.9	56	8.8	QP	L1	FLO
0.778000	45.80	10.7	56	10.2	QP	L1	FLO
0.878000	42.00	11.0	56	14.0	QP	L1	FLO
1.058000	44.60	11.4	56	11.4	QP	L1	FLO
1.346000	40.30	11.5	56	15.7	QP	L1	FLO

MEASUREMENT RESULT: "TEST_fin2"

7/31/2019 5:57PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.218000	37.20	10.9	53	15.7	AV	L1	FLO
0.362000	32.80	10.5	49	15.9	AV	L1	FLO
0.542000	34.70	11.0	46	11.3	AV	L1	FLO
0.778000	33.70	10.7	46	12.3	AV	L1	FLO
1.166000	33.50	11.5	46	12.5	AV	L1	FLO
1.342000	33.20	11.5	46	12.8	AV	L1	FLO



Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

LINE CONDUCTED EMISSION TEST-N

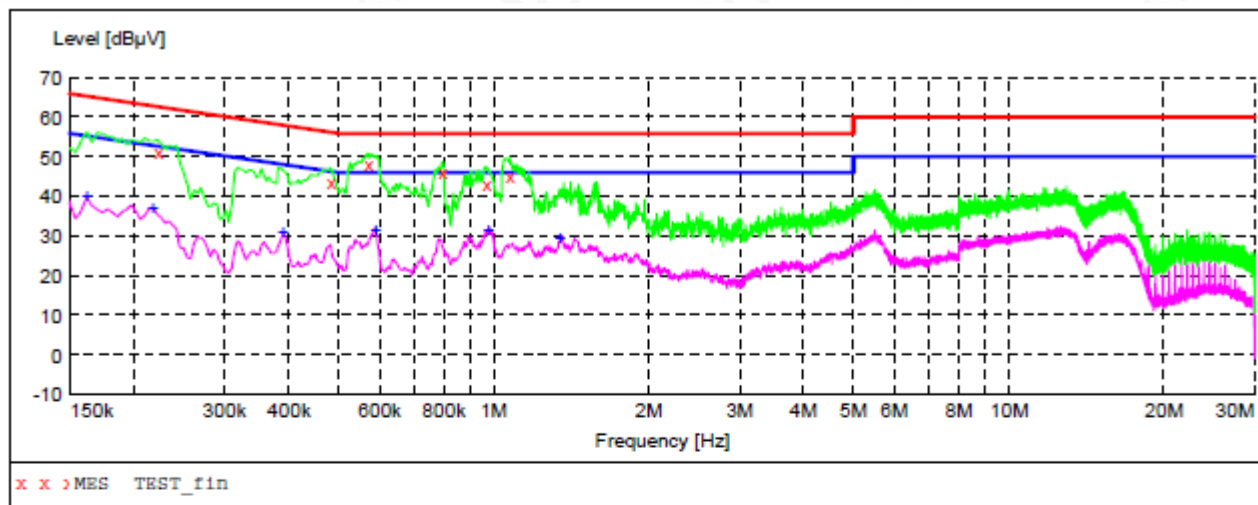

MEASUREMENT RESULT: "TEST_fin"

7/31/2019 5:44PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.222000	51.50	10.9	63	11.2	QP	N	FLO
0.482000	43.80	11.1	56	12.5	QP	N	FLO
0.570000	48.00	10.9	56	8.0	QP	N	FLO
0.794000	46.30	10.7	56	9.7	QP	N	FLO
0.966000	43.30	11.3	56	12.7	QP	N	FLO
1.074000	45.00	11.4	56	11.0	QP	N	FLO

MEASUREMENT RESULT: "TEST_fin2"

7/31/2019 5:44PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.162000	40.10	10.8	55	15.3	AV	N	FLO
0.218000	37.50	10.9	53	15.4	AV	N	FLO
0.390000	31.20	10.4	48	16.9	AV	N	FLO
0.590000	31.80	10.8	46	14.2	AV	N	FLO
0.978000	31.80	11.4	46	14.2	AV	N	FLO
1.346000	29.60	11.5	46	16.4	AV	N	FLO

RESULT: PASS


Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com


Service Hotline: 400 089 2118

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP BELOW 1GHZ

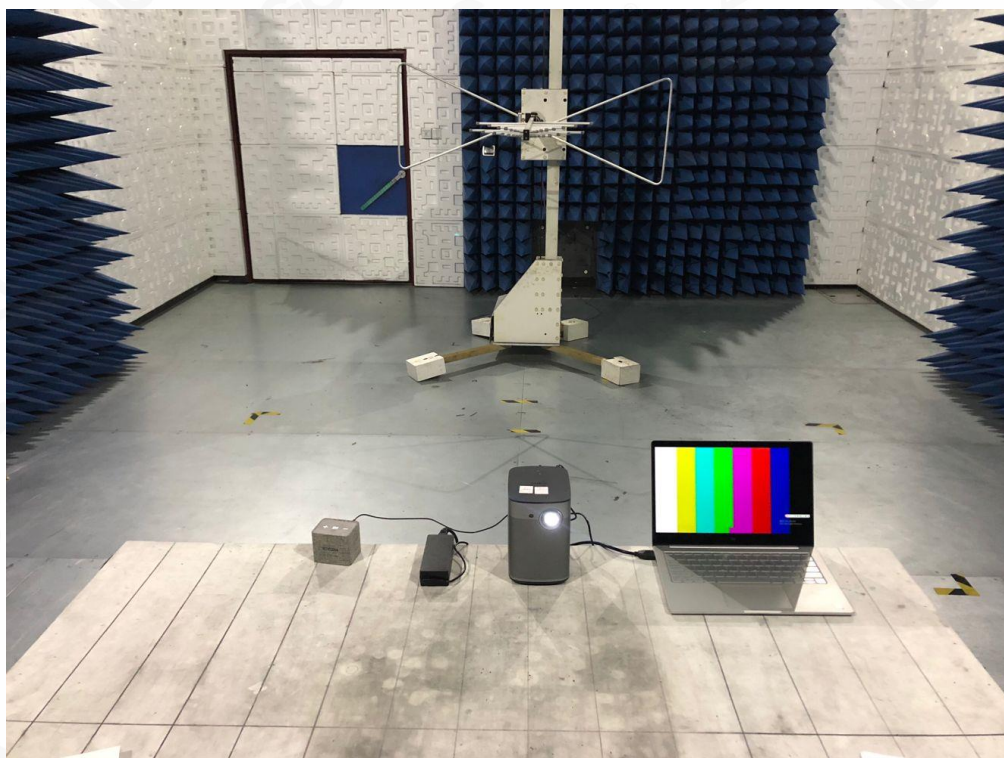

FCC RADIATED EMISSION TEST SETUP ABOVE 1GHZ



----END OF REPORT----

