



FCC RF Test Report

APPLICANT : BlackBerry Ltd.
EQUIPMENT : GSM Quad-band/HSPA-UMTS Penta-band/
LTE Deca-band mobile phone
BRAND NAME : BlackBerry
MODEL NAME : BBA100-1
MARKETING NAME : DTEK60
FCC ID : L6ABBA1001
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Jul. 20, 2016 and testing was completed on Aug. 14, 2016. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Product Feature of Equipment Under Test	5
1.4. Product Specification of Equipment Under Test	6
1.5. Modification of EUT	6
1.6. Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	7
1.7. Testing Location	7
1.8. Applicable Standards	8
1.9. Specification of Accessory	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System	10
2.3 Support Unit used in test configuration	11
2.4 Measurement Results Explanation Example	11
3 CONDUCTED TEST RESULT.....	12
3.1 Measuring Instruments.....	12
3.2 Test Setup	12
3.3 Test Result of Conducted Test.....	12
3.4 Conducted Output Power and ERP/EIRP	13
3.5 Peak-to-Average Ratio	14
3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	15
3.7 Conducted Band Edge	16
3.8 Conducted Spurious Emission	17
3.9 Frequency Stability	18
4 RADIATED TEST ITEMS	19
4.1 Measuring Instruments.....	19
4.2 Test Setup	19
4.3 Test Result of Radiated Test.....	19
4.4 Field Strength of Spurious Radiation Measurement	20
5 LIST OF MEASURING EQUIPMENT	21
6 UNCERTAINTY OF EVALUATION	22
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG672002A	Rev. 01	Initial issue of report	Aug. 23, 2016

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.6	§2.1049 §22.917(b) §24.238(b) §27.53(g)	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability for Temperature & Voltage	< 2.5 ppm for Part 22H	PASS	-
	§2.1055 §24.235 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §24.238(a) §27.53(h)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 14.06 dB at 2512.000 MHz



1 General Description

1.1. Applicant

BlackBerry Ltd.

2200 University Ave E., Waterloo, ON, CAN. N2K0A7

1.2. Manufacturer

TCL Communication Ltd.

5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	GSM Quad-band/HSPA-UMTS Penta-band/ LTE Deca-band mobile phone
Brand Name	BlackBerry
Model Name	BBA100-1
Marketing Name	DTEK60
FCC ID	L6ABBA1001
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/ HSPA+(16QAM uplink is not supported) /DC-HSDPA/LTE/NFC/ WLAN 2.4GHz 802.11b/g/n HT20/ WLAN 5GHz 802.11a/n HT20/HT40/ WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/ Bluetooth v3.0+EDR/ Bluetooth v4.0 LE/ Bluetooth v4.2 LE
IMEI Code	Conducted: 004402243144205/004402243144201 Radiation: 004402243143991/004402243144411 ERP/EIRP: NA
HW Version	PIO
SW Version	AAF884
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM/GPRS/EDGE: 850: 824.2 MHz ~ 848.8 MHz 1900: 1850.2 MHz ~ 1909.8MHz WCDMA: Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz Band IV: 1712.4 MHz ~ 1752.6 MHz
Rx Frequency	GSM/GPRS/EDGE: 850: 869.2 MHz ~ 893.8 MHz 1900: 1930.2 MHz ~ 1989.8 MHz WCDMA: Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz Band IV: 2112.4 MHz ~ 2152.6 MHz
Maximum Output Power to Antenna	GSM/GPRS/EDGE: 850: 33.45 dBm 1900: 30.61 dBm WCDMA: Band V: 23.69 dBm Band II: 23.75 dBm Band IV: 23.62 dBm
Antenna Gain	Cellular Band: -1.00 dBi PCS Band: 0 dBi for GSM1900 0.40 dBi for WCDMA Band II AWS Band: 0.50 dBi
Antenna Type	LDS Antenna
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: QPSK (Uplink) HSDPA /DC-HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink) HSPA+: 16QAM (Uplink is not supported) DC-HSDPA : 64QAM

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22H	GSM850 GSM	GMSK	1.0715	0.0203 ppm	243KGXW
Part 22H	GSM850 EDGE class 8	8PSK	0.2118	0.0287 ppm	246KG7W
Part 22H	WCDMA Band V RMC 12.2Kbps	QPSK	0.1426	0.0251 ppm	4M14F9W
Part 24E	GSM1900 GSM	GMSK	1.1508	0.0154 ppm	244KGXW
Part 24E	GSM1900 EDGE class 8	8PSK	0.3589	0.0191 ppm	245KG7W
Part 24E	WCDMA Band II RMC 12.2Kbps	QPSK	0.2600	0.0069 ppm	4M15F9W
Part 27L	WCDMA Band IV RMC 12.2Kbps	QPSK	0.2582	0.0162 ppm	4M14F9W

1.7. Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.	
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958	
Test Site No.	Sporton Site No.	
	TH01-KS	

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978	
Test Site No.	Sporton Site No.	FCC/IC Registration No.
	03CH07-HY	TW1022/4086B

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E), 27(L)
- ANSI / TIA / EIA-603-D-2010
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.9. Specification of Accessory

Specification of Accessory				
AC Adapter 1	Brand Name	N/A	Model Name	QC10US
	Power Rating	I/P: 100-240Vac, 500mA, O/P: 5Vdc, 2000mA/9Vdc, 1670mA		
	Manufacturer	BYD	S/N	CBA0060AGHC1
AC Adapter 2	Brand Name	N/A	Model Name	QC10EU
	Power Rating	I/P: 100-240Vac, 500mA, O/P: 5Vdc, 2000mA/9Vdc, 1670mA		
	Manufacturer	BYD	S/N	CBA0060AAHC1
AC Adapter 3	Brand Name	N/A	Model Name	QC10UK
	Power Rating	I/P: 100-240Vac, 500mA, O/P: 5Vdc, 2000mA/9Vdc, 1670mA		
	Manufacturer	BYD	S/N	CBA0060ABHC1
AC Adapter 4	Brand Name	N/A	Model Name	QC10AU
	Power Rating	I/P: 100-240Vac, 500mA, O/P: 5Vdc, 2000mA/9Vdc, 1670mA		
	Manufacturer	BYD	S/N	CBA0060ACHC1
Battery 1	Brand Name	N/A	Model Name	TLp030F2
	Power Rating	3.84Vdc, 3000mAh		
	Manufacturer	SCUD	S/N	CAC3000027C2
Battery 2	Brand Name	N/A	Model Name	TLp030F1
	Power Rating	3.84Vdc, 3000mAh		
	Manufacturer	BYD	S/N	CAC3000026C1
USB Cable	Brand Name	N/A	Model Name	CDA0000078CF
	Signal Line Type	1.00m shielded without core		
Earphone	Brand Name	N/A	Model Name	CCB0045A16C3
	Signal Line Type	1.24m non-shielded without core		

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10th harmonic for GSM850 and WCDMA Band V.
2. 30 MHz to 10th harmonic for WCDMA Band IV.
3. 30 MHz to 10th harmonic for GSM1900 and WCDMA Band II.


All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:


Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GSM Link ■ EDGE class 8 Link	■ GSM Link ■ EDGE class 8 Link
GSM 1900	■ GSM Link ■ EDGE class 8 Link	■ GSM Link ■ EDGE class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

2.2 Connection Diagram of Test System

22(H), 24(E), 27(L) for Battery 1 / 22(H) for Battery 2

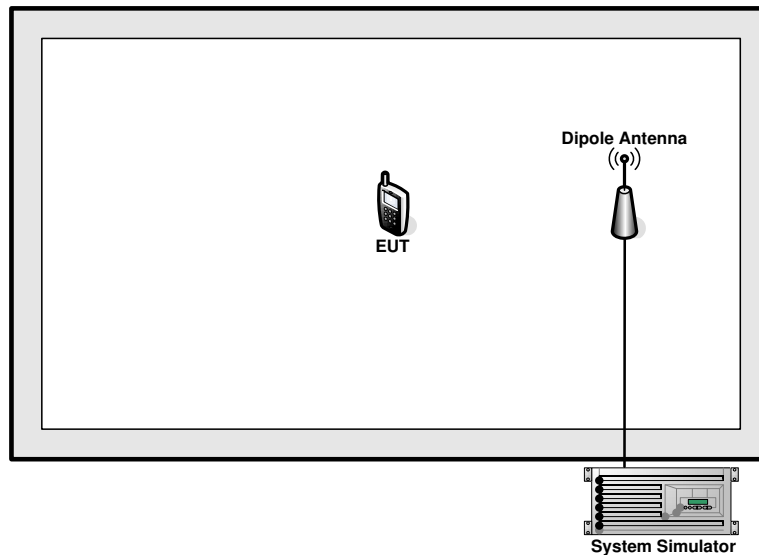

24(E), 27(L) for Battery 2

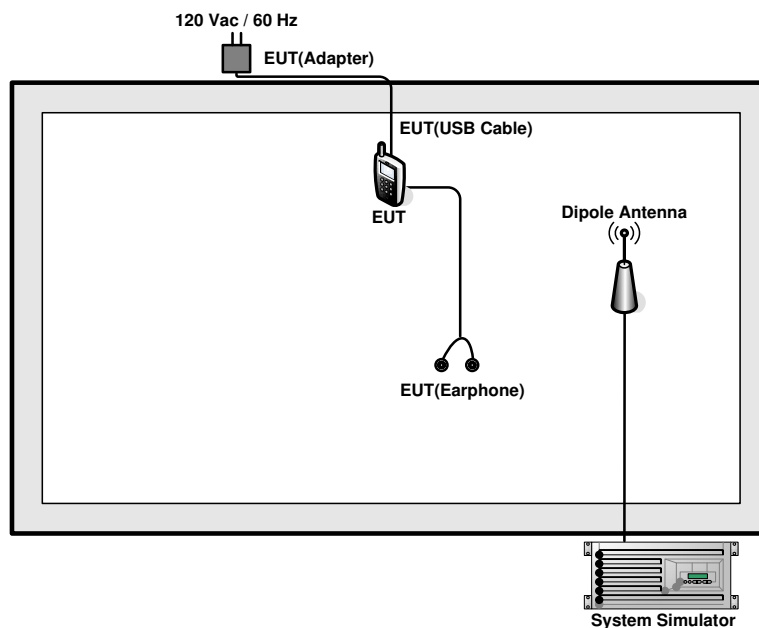

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW INSTEK	GPD-2303S	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.5 dB and a 10dB attenuator.

Example :

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.5 + 10 = 14.5 \text{ (dB)}\end{aligned}$$


3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

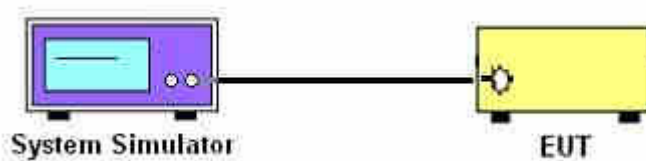

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

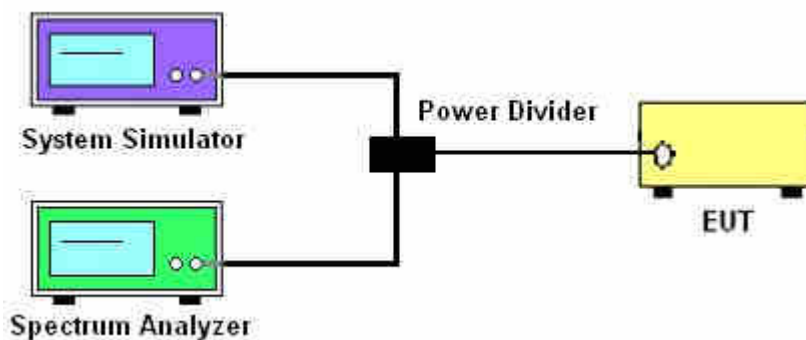

3.2.3 Frequency Stability

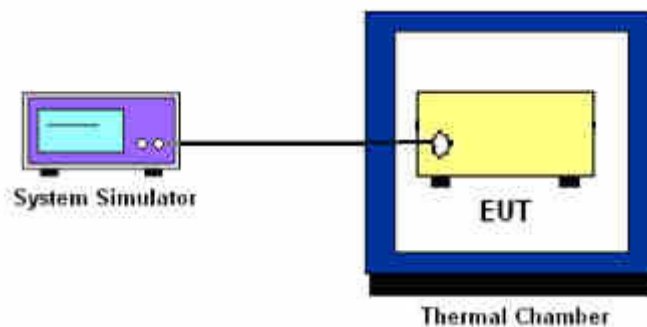

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V.

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II.

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. Set EUT to transmit at maximum output power.
4. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
5. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
Record the maximum PAPR level associated with a probability of 0.1%.

3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$
$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$
$$= -13\text{dBm}.$$

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
= -13dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz



4.2.2 For radiated test above 1GHz

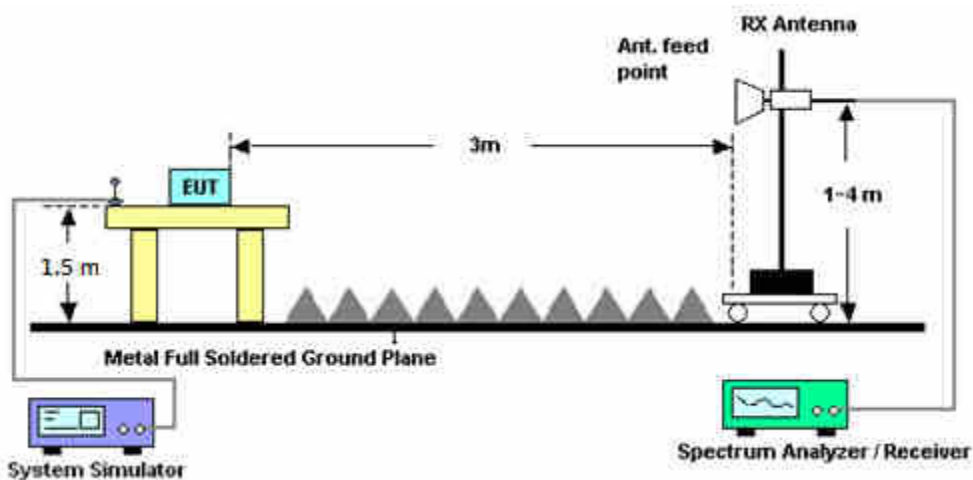

4.3 Test Result of Radiated Test

Please refer to Appendix B.

4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12. $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Sep. 10, 2015	Aug. 06, 2016~ Aug. 07, 2016	Sep. 09, 2016	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 24, 2015	Aug. 06, 2016~ Aug. 07, 2016	Oct. 23, 2016	Conducted (TH01-KS)
Bilog Antenna	TESEQ	CBL 6111D	35419	30MHz to 1GHz	Jan. 13, 2016	Aug. 09, 2016~ Aug. 14, 2016	Jan. 12, 2017	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 21, 2015	Aug. 09, 2016~ Aug. 14, 2016	Aug. 20, 2016	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917057 6	18GHz ~ 40GHz	Apr. 15, 2016	Aug. 09, 2016~ Aug. 14, 2016	Apr. 14, 2017	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz-1GHz	Mar. 18, 2016	Aug. 09, 2016~ Aug. 14, 2016	Mar. 17, 2017	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-00 101800-30-1	1590075	1GHz ~ 18GHz	Apr. 15, 2016	Aug. 09, 2016~ Aug. 14, 2016	Apr. 14, 2017	Radiation (03CH07-HY)
Preamplifier	MITEQ	JS44-18004 000-33-8P	1840917	18GHz ~ 40GHz	Jun. 14, 2016	Aug. 09, 2016~ Aug. 14, 2016	Jun. 13, 2017	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Feb. 27, 2016	Aug. 09, 2016~ Aug. 14, 2016	Feb. 26, 2017	Radiation (03CH07-HY)
Controller	ChainTek	Chaintek 3000	N/A	Control Turn table	NCR	Aug. 09, 2016~ Aug. 14, 2016	NCR	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	NCR	Aug. 09, 2016~ Aug. 14, 2016	NCR	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	NCR	Aug. 09, 2016~ Aug. 14, 2016	NCR	Radiation (03CH07-HY)

NCR: No Calibration Required

6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.1dB
---	-------

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.4dB
---	-------

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.0dB
---	-------

Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	33.35	33.40	33.45	30.29	30.61	30.60
GPRS class 8	33.33	33.39	33.44	30.28	30.59	30.59
GPRS class 10	31.41	31.18	31.12	27.99	28.10	27.79
GPRS class 11	29.85	29.79	29.73	26.63	26.82	26.56
GPRS class 12	28.90	28.50	28.22	25.37	25.47	25.23
EGPRS class 8	26.41	26.31	26.18	25.27	25.55	25.38
EGPRS class 10	24.83	24.73	24.55	23.70	23.93	23.74
EGPRS class 11	23.20	23.02	22.80	22.12	22.34	22.14
EGPRS class 12	22.70	22.70	22.70	20.56	20.71	20.61

Conducted Power (*Unit: dBm)									
Band	WCDMA Band V			WCDMA Band II			WCDMA Band IV		
Channel	4132	4182	4233	9262	9400	9538	1312	1413	1513
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
AMR 12.2K	23.67	23.64	23.51	23.41	23.56	23.73	23.34	23.40	23.60
RMC 12.2K	23.69	23.65	23.53	23.43	23.58	23.75	23.36	23.41	23.62
HSDPA Subtest-1	22.71	22.68	22.56	22.44	22.51	22.67	22.47	22.49	22.67
HSDPA Subtest-2	22.70	22.68	22.57	22.45	22.53	22.71	22.47	22.49	22.70
HSDPA Subtest-3	22.24	22.24	22.16	21.94	22.07	22.25	21.96	22.05	22.28
HSDPA Subtest-4	22.25	22.24	22.13	21.98	22.12	22.22	21.99	22.01	22.23
DC-HSDPA Subtest-1	22.68	22.63	22.55	22.35	22.48	22.65	22.45	22.43	22.62
DC-HSDPA Subtest-2	22.68	22.65	22.51	22.41	22.49	22.68	22.43	22.45	22.61
DC-HSDPA Subtest-3	22.21	22.21	22.16	21.87	22.02	22.18	21.95	22.01	22.23
DC-HSDPA Subtest-4	22.25	22.23	22.13	21.92	22.01	22.19	21.99	22.03	22.28
HSUPA Subtest-1	22.90	22.76	22.62	22.43	22.56	22.74	22.89	22.48	23.08
HSUPA Subtest-2	20.92	20.76	20.66	20.45	20.60	20.70	20.95	20.56	21.21
HSUPA Subtest-3	21.91	21.73	21.65	21.41	21.54	21.73	21.94	21.55	22.16
HSUPA Subtest-4	20.93	20.77	20.64	20.40	20.59	20.71	20.98	20.53	21.22
HSUPA Subtest-5	22.80	22.80	22.60	22.40	22.60	22.70	22.50	22.60	22.80

**ERP/EIRP**

Cellular Band ($G_T - L_C = -1.00$ dB)									
Modes	GSM850 (GSM)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Conducted Power (dBm)	33.35	33.40	33.45	26.41	26.31	26.18	23.69	23.65	23.53
Conducted Power (Watts)	2.16	2.19	2.21	0.44	0.43	0.41	0.23	0.23	0.23
ERP(dBm)	30.20	30.25	30.30	23.26	23.16	23.03	21.54	21.50	21.38
ERP(Watts)	1.0471	1.0593	1.0715	0.2118	0.2070	0.2009	0.1426	0.1413	0.1374

PCS Band ($G_T - L_C = 0$ dB) for GSM1900/PCS Band ($G_T - L_C = 0.40$ dB) for WCDMA Band II									
Modes	GSM1900 (GSM)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Conducted Power (dBm)	30.29	30.61	30.60	25.27	25.55	25.38	23.43	23.58	23.75
Conducted Power (Watts)	1.07	1.15	1.15	0.34	0.36	0.35	0.22	0.23	0.24
EIRP(dBm)	30.29	30.61	30.60	25.27	25.55	25.38	23.83	23.98	24.15
EIRP(Watts)	1.0691	1.1508	1.1482	0.3365	0.3589	0.3451	0.2415	0.2500	0.2600



AWS Band ($G_T - L_C = 0.50$ dB)			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312 (Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
Conducted Power (dBm)	23.36	23.41	23.62
Conducted Power (Watts)	0.22	0.22	0.23
EIRP(dBm)	23.86	23.91	24.12
EIRP(Watts)	0.2432	0.2460	0.2582

**Peak-to-Average Ratio**

Mode	GSM850		Limit: 13dB
Mod.	GSM(dB)	EDGE class 8(dB)	Result
Lowest CH	0.20	3.28	PASS
Middle CH	0.14	3.30	
Highest CH	0.17	3.45	


Mode	GSM1900		Limit: 13dB
Mod.	GSM(dB)	EDGE class 8(dB)	Result
Lowest CH	0.20	3.13	PASS
Middle CH	0.14	3.25	
Highest CH	0.14	3.22	

Mode	WCDMA Band V(dB)	WCDMA Band II(dB)	WCDMA Band IV(dB)	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	2.35	2.96	3.16	PASS
Middle CH	2.84	2.99	2.81	
Highest CH	2.55	2.96	2.78	




GSM850 (GSM)

Lowest Channel

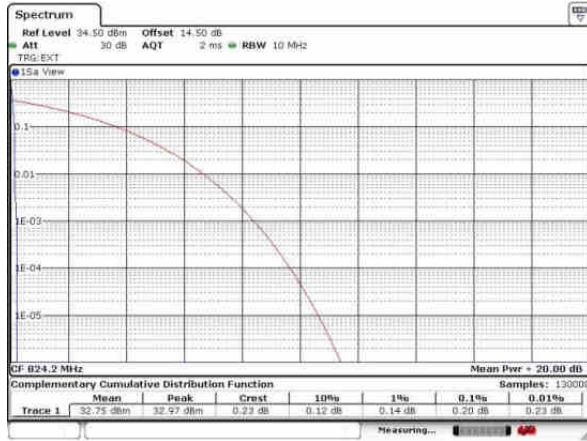


GSM850 (EDGE class 8)

Lowest Channel

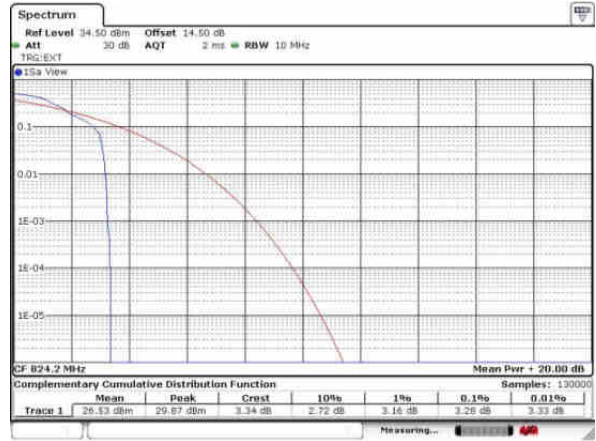


Middle Channel

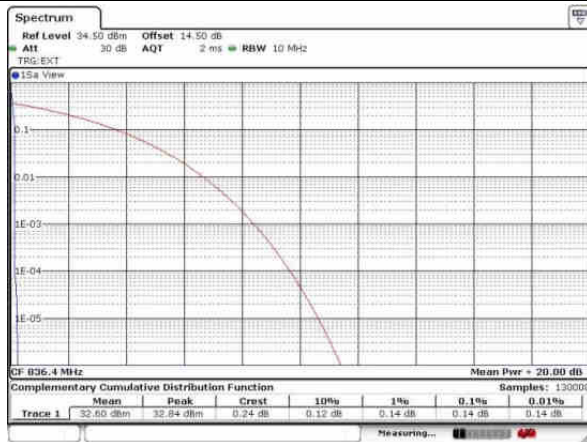

Middle Channel



Highest Channel

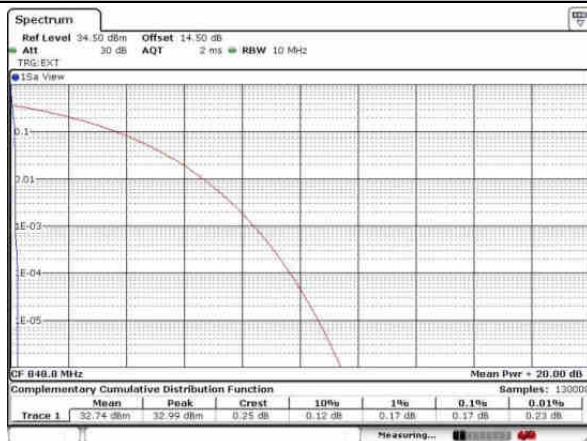


Highest Channel






GSM1900 (GSM)

Lowest Channel

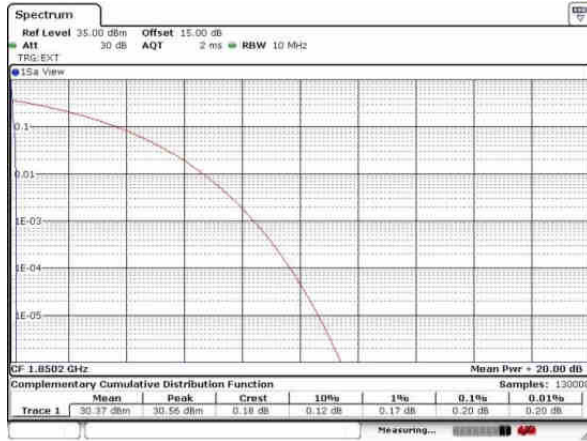


GSM1900 (EDGE class 8)

Lowest Channel

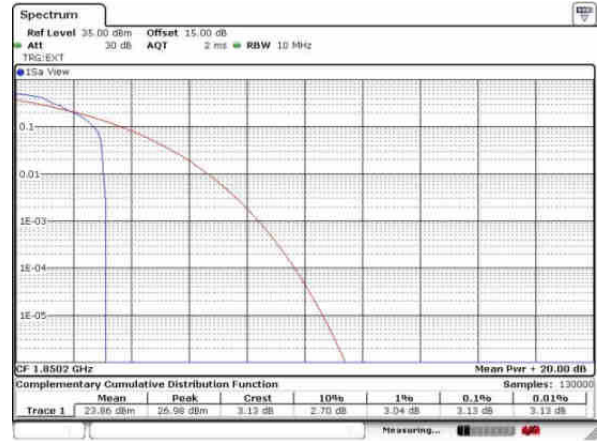


Middle Channel

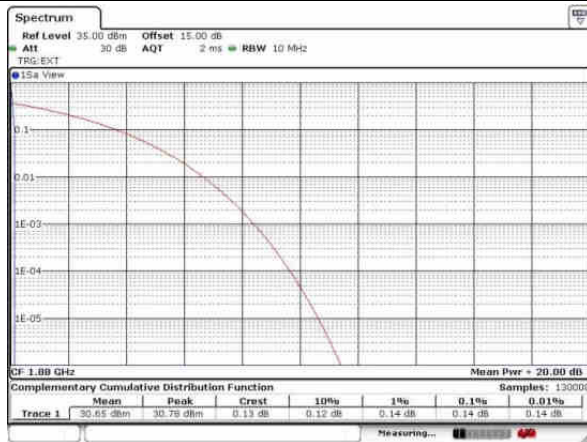


Middle Channel



Highest Channel

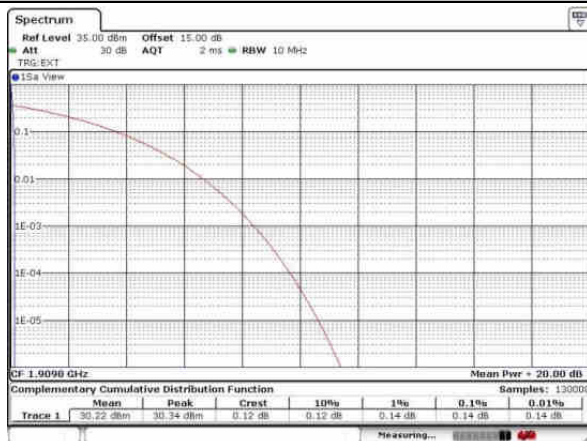


Highest Channel

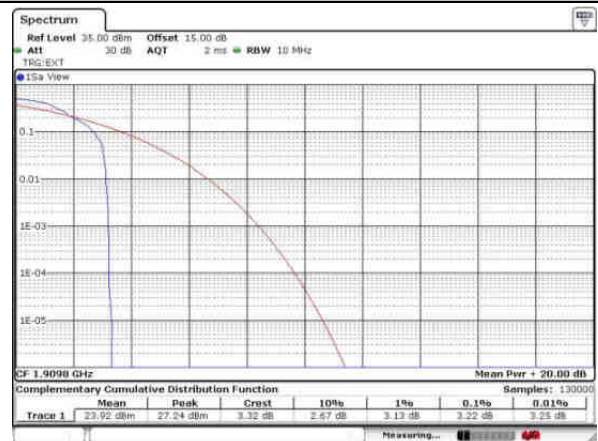




WCDMA Band V (RMC 12.2Kbps)

Lowest Channel

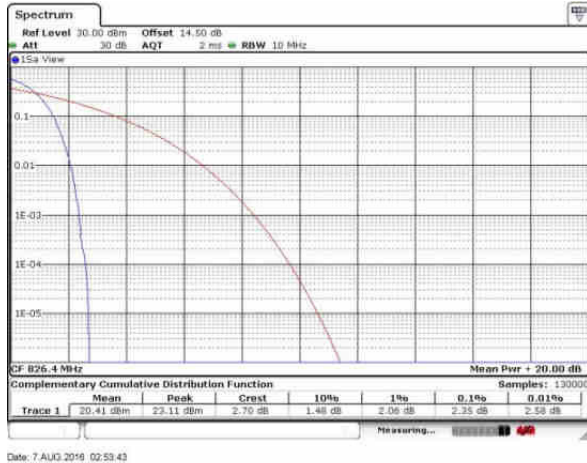


WCDMA Band II (RMC 12.2Kbps)


Lowest Channel

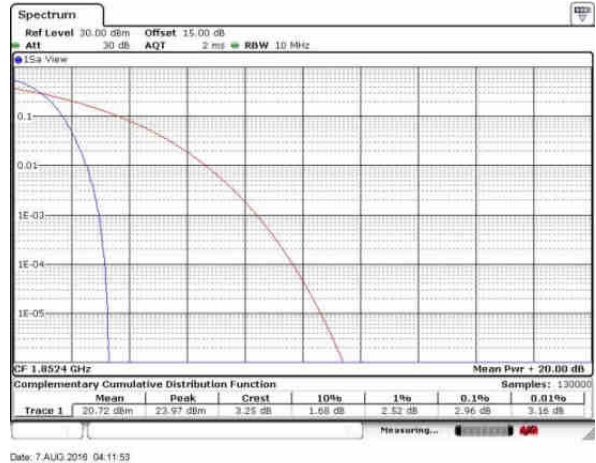


Middle Channel

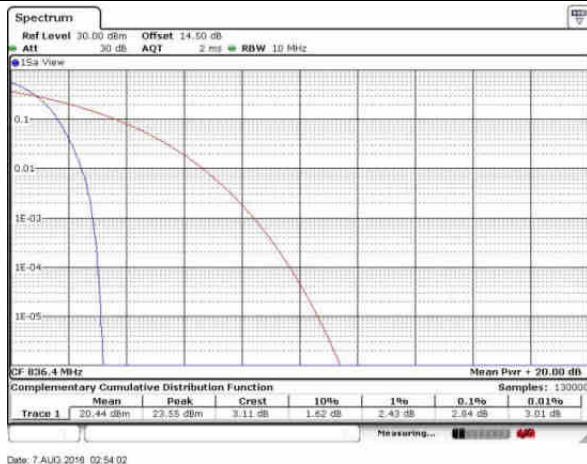


Middle Channel

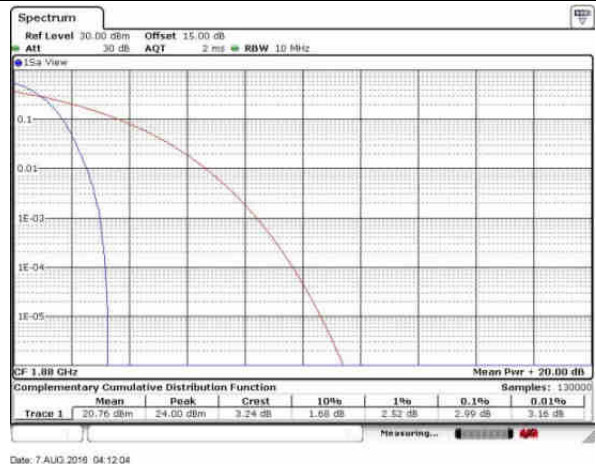

Highest Channel

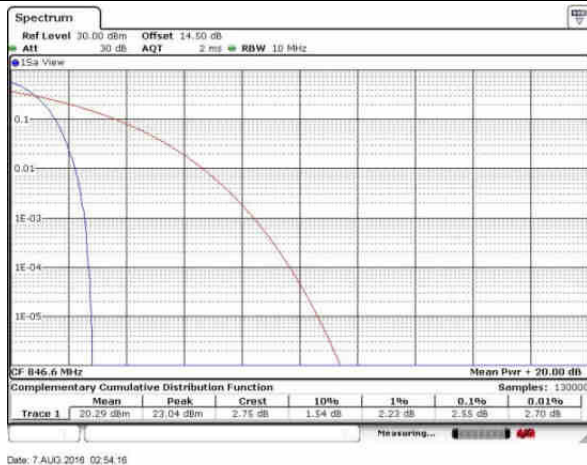


Highest Channel

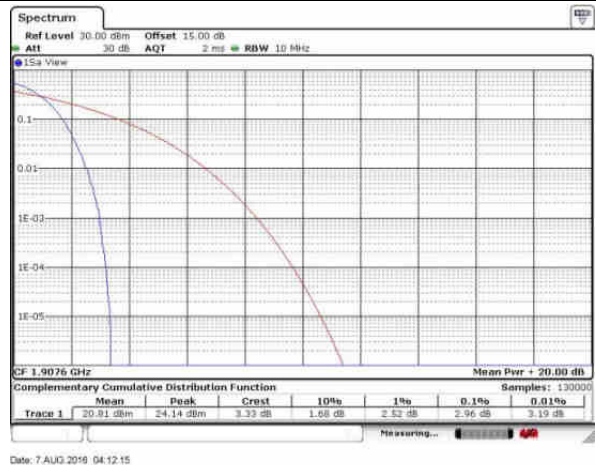




WCDMA Band IV (RMC 12.2Kbps)


Lowest Channel

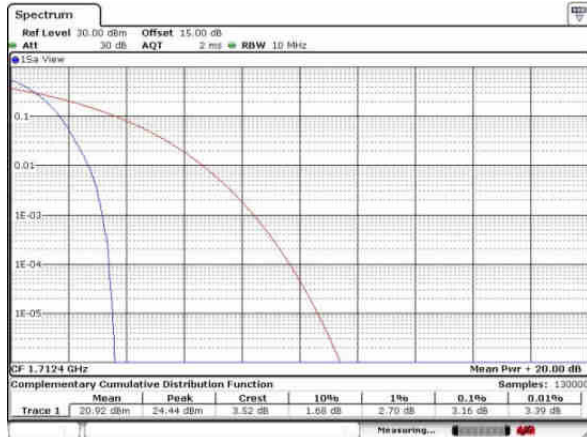

Middle Channel

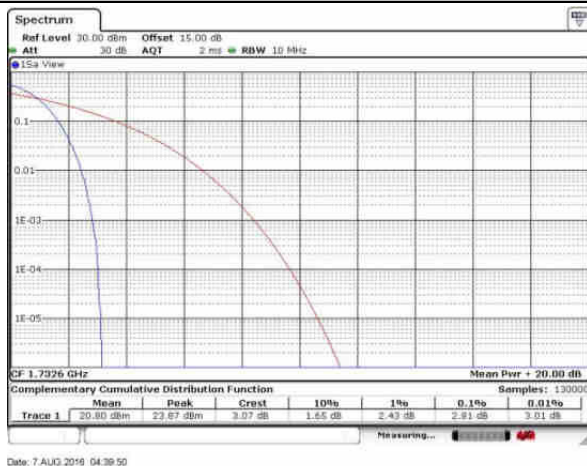

Highest Channel

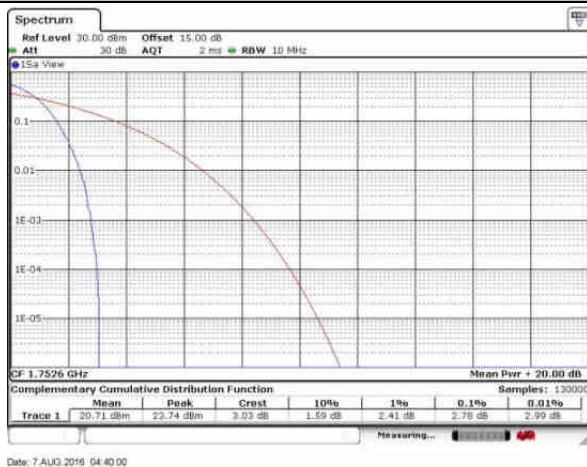

**26dB Bandwidth**

Mode	GSM850	
Mod.	GSM(MHz)	EDGE class 8(MHz)
Lowest CH	0.315	0.311
Middle CH	0.317	0.311
Highest CH	0.314	0.313


Mode	GSM1900	
Mod.	GSM(MHz)	EDGE class 8(MHz)
Lowest CH	0.311	0.314
Middle CH	0.317	0.315
Highest CH	0.315	0.310

Mode	WCDMA Band V(MHz)	WCDMA Band II(MHz)	WCDMA Band IV(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.73	4.73	4.72
Middle CH	4.73	4.73	4.73
Highest CH	4.74	4.73	4.74




GSM850 (GSM)

Lowest Channel

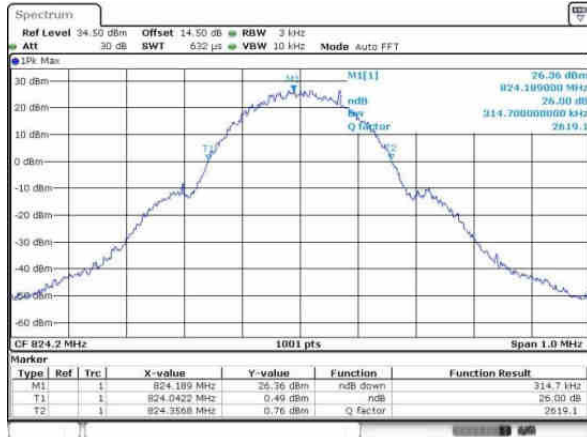


GSM850 (EDGE class 8)


Lowest Channel

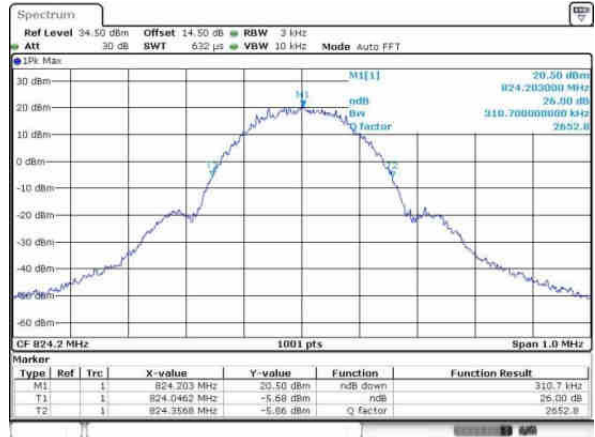


Middle Channel

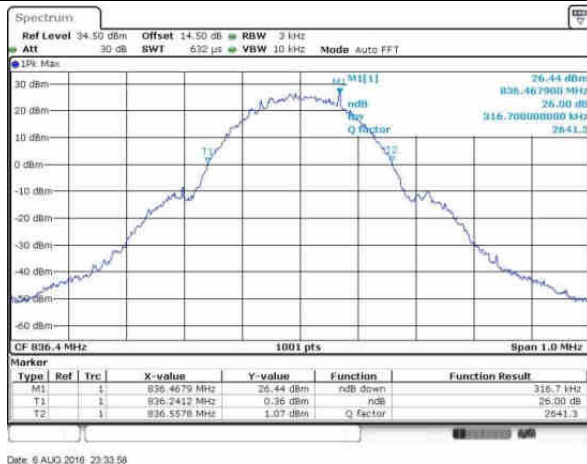


Middle Channel

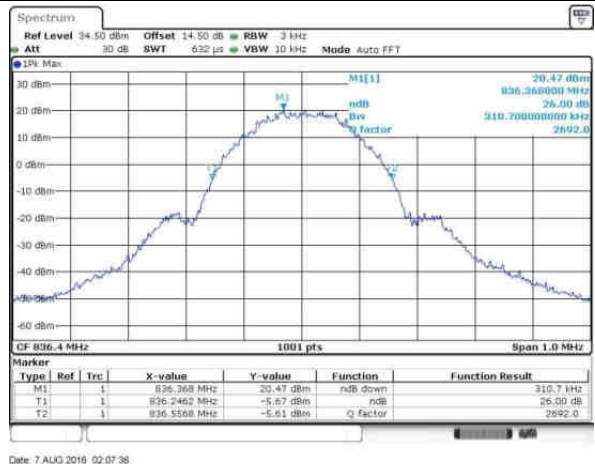

Highest Channel

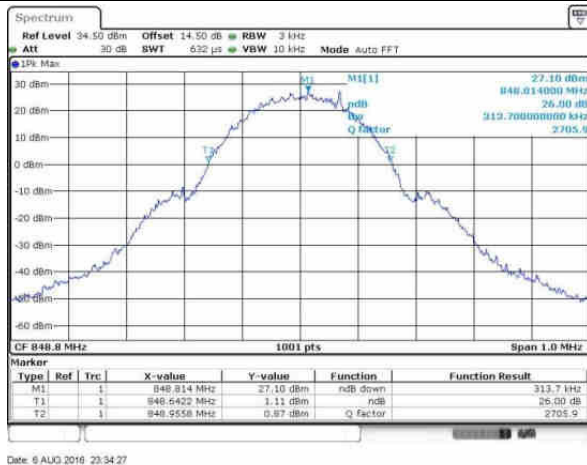


Highest Channel

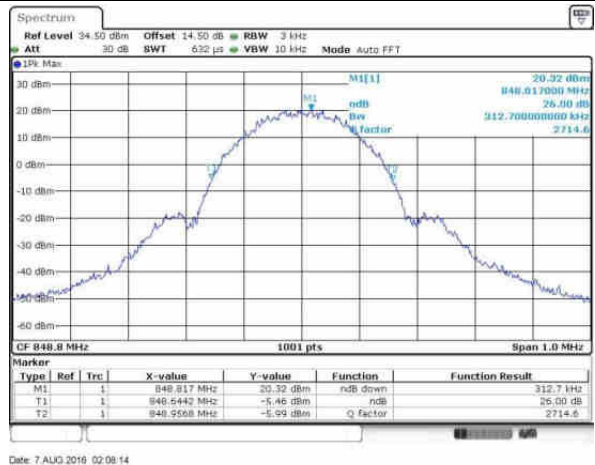



GSM1900 (GSM)


Lowest Channel

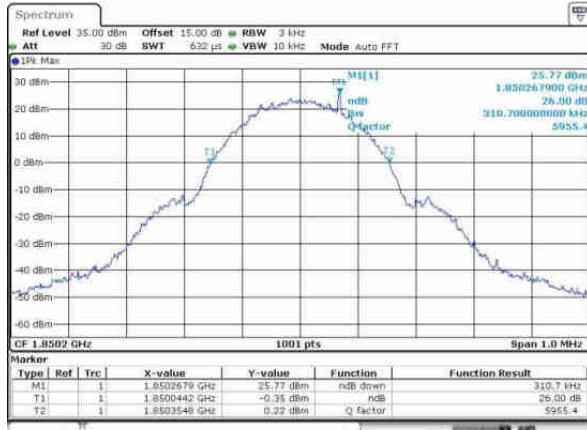

Date: 7 AUG 2016 02:59:34


GSM1900 (EDGE class 8)

Lowest Channel

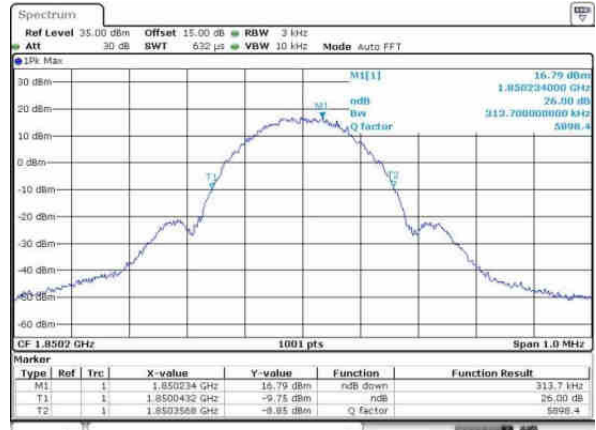


Date: 7 AUG 2016 03:23:21

Middle Channel

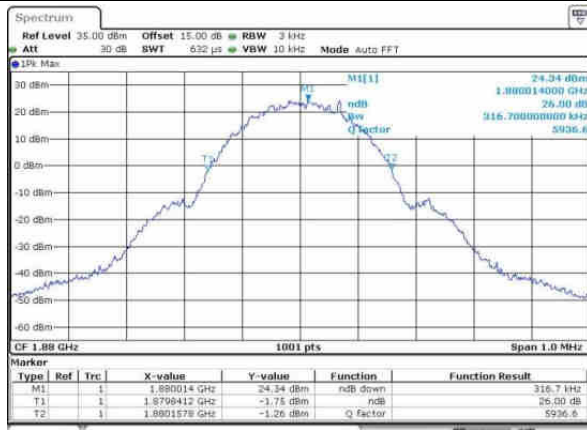


Date: 7 AUG 2016 03:00:03

Middle Channel

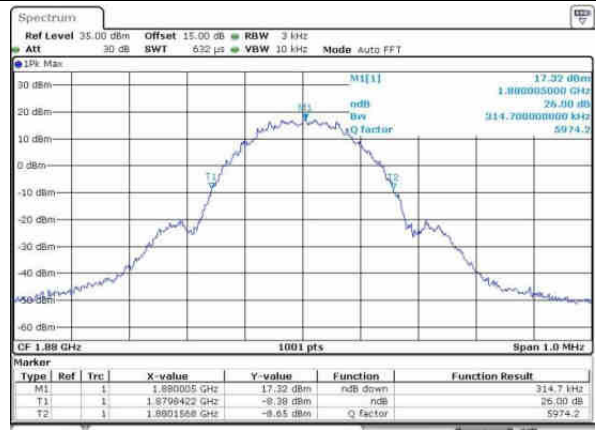


Date: 7 AUG 2016 03:24:04

Highest Channel

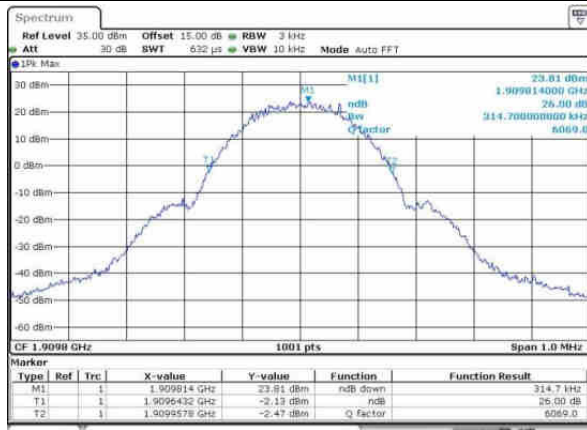

Date: 7 AUG 2016 03:00:31

Highest Channel

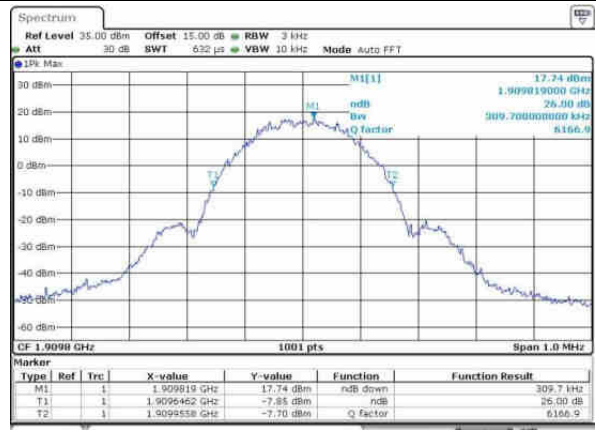


Date: 7 AUG 2016 03:24:47




WCDMA Band V (RMC 12.2Kbps)

Lowest Channel

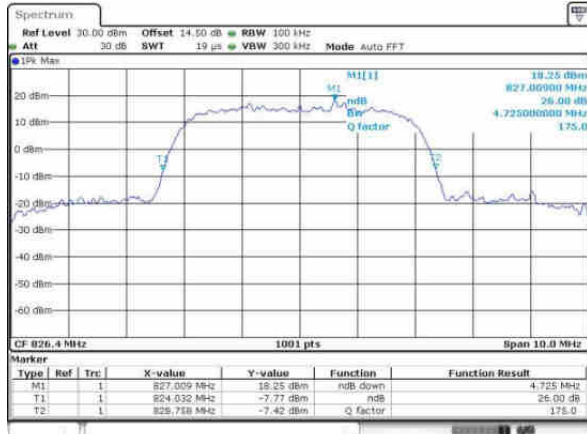


WCDMA Band II (RMC 12.2Kbps)


Lowest Channel

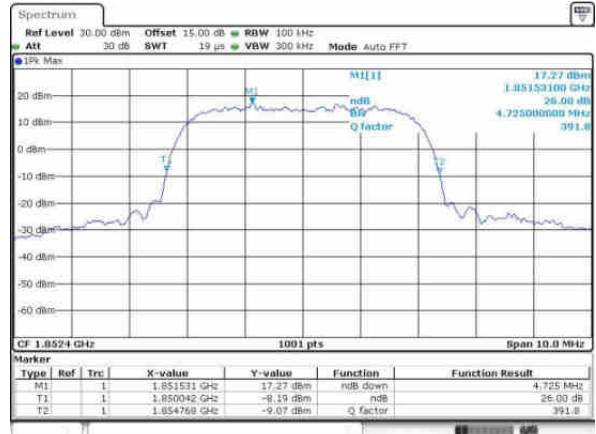


Middle Channel

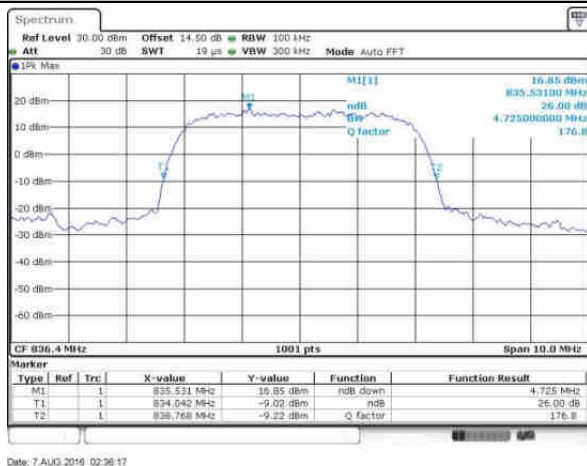


Middle Channel

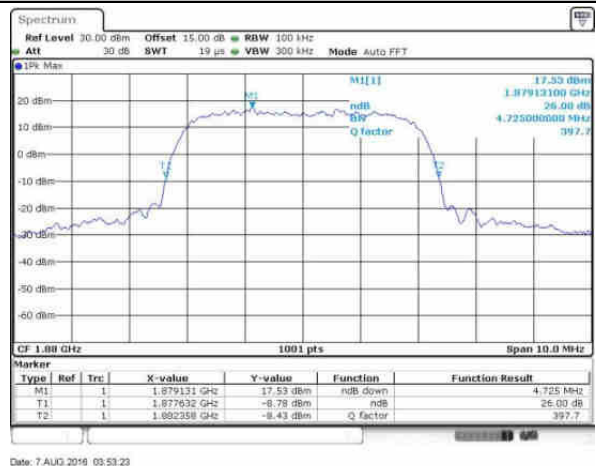

Highest Channel

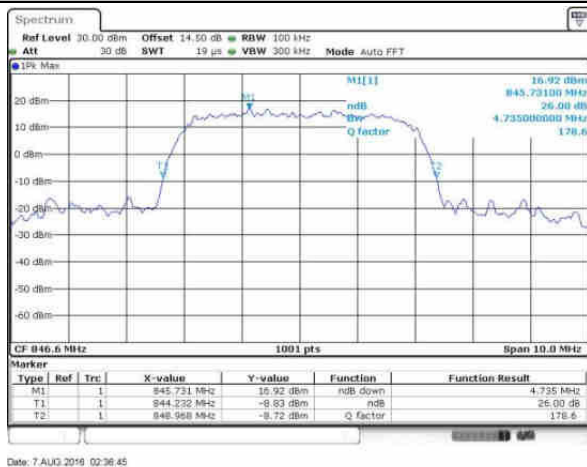


Highest Channel

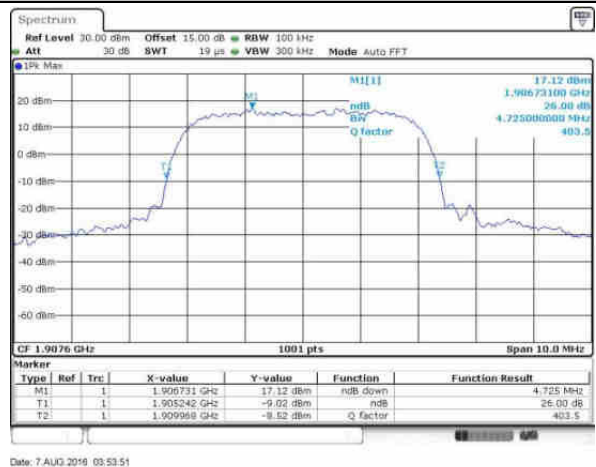




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

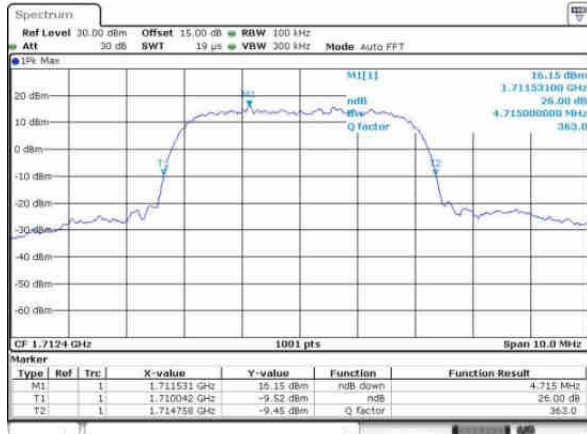


Date: 7 AUG 2019 04:16:20

Middle Channel

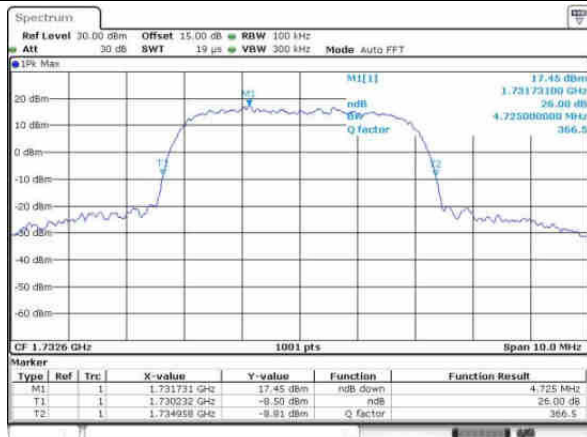

Date: 7 AUG 2019 04:16:48

Highest Channel

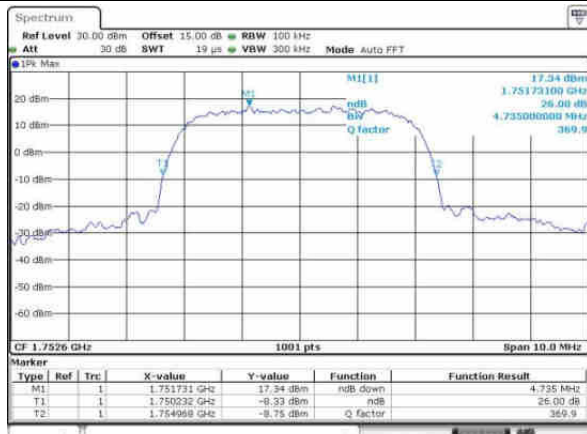

Date: 7 AUG 2019 04:17:17

**Occupied Bandwidth**

Mode	GSM850	
Mod.	GSM(MHz)	EDGE class 8(MHz)
Lowest CH	0.243	0.245
Middle CH	0.243	0.246
Highest CH	0.242	0.242


Mode	GSM1900	
Mod.	GSM(MHz)	EDGE class 8(MHz)
Lowest CH	0.242	0.242
Middle CH	0.244	0.244
Highest CH	0.243	0.245

Mode	WCDMA Band V(MHz)	WCDMA Band II(MHz)	WCDMA Band IV(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.14	4.14	4.14
Middle CH	4.12	4.15	4.13
Highest CH	4.14	4.14	4.13




GSM850 (GSM)

Lowest Channel

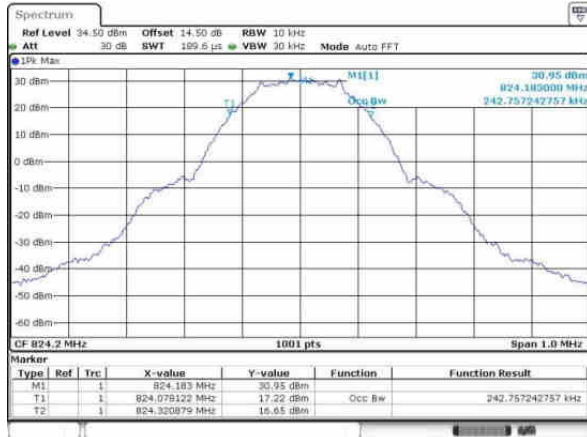


GSM850 (EDGE class 8)

Lowest Channel

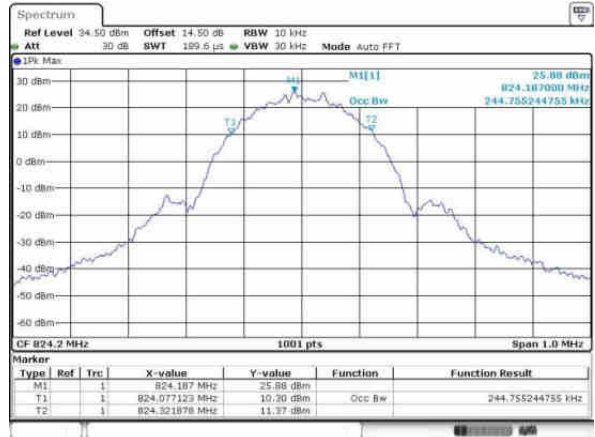


Middle Channel

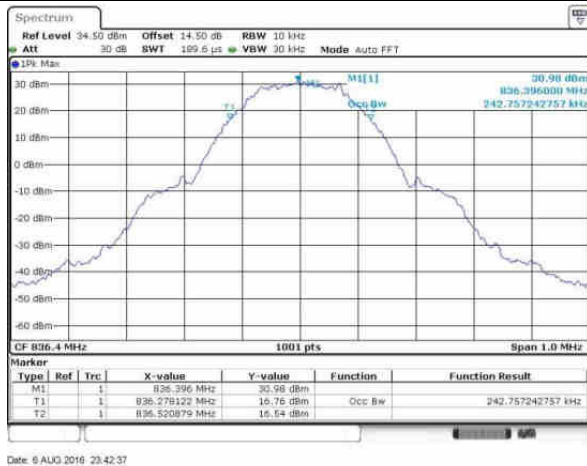

Middle Channel



Highest Channel

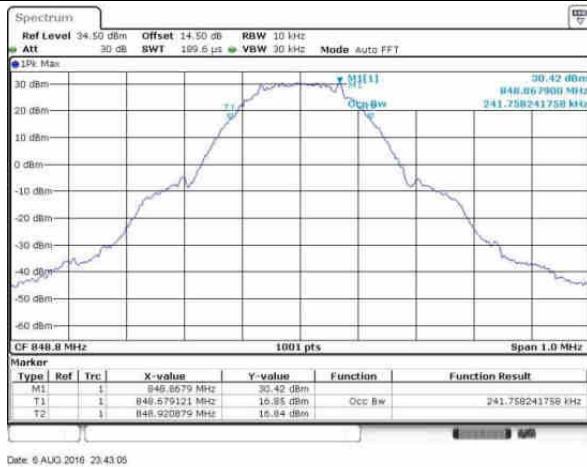


Highest Channel





GSM1900 (GSM)


Lowest Channel

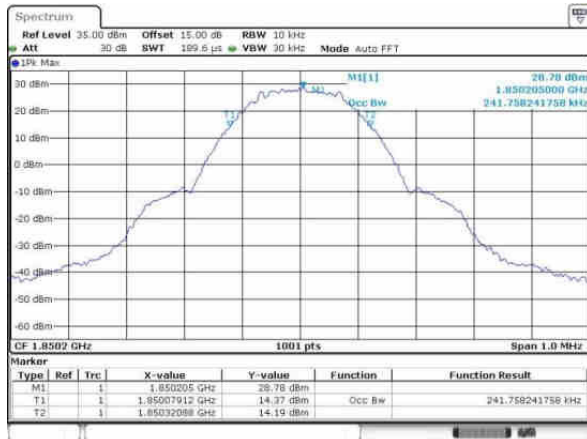

Date: 7 AUG 2016 03:07:11

GSM1900 (EDGE class 8)

Lowest Channel

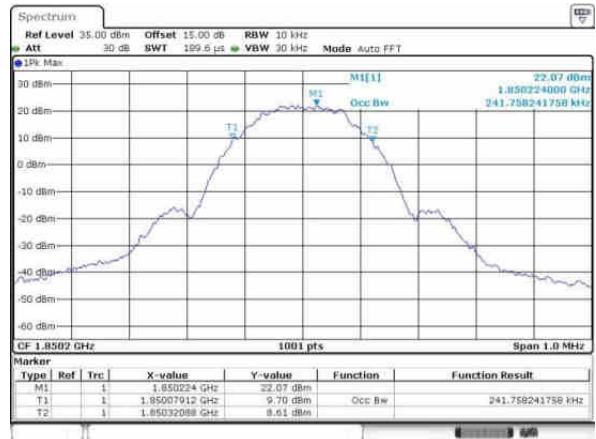


Date: 7 AUG 2016 03:32:39

Middle Channel



Date: 7 AUG 2016 03:07:39

Middle Channel

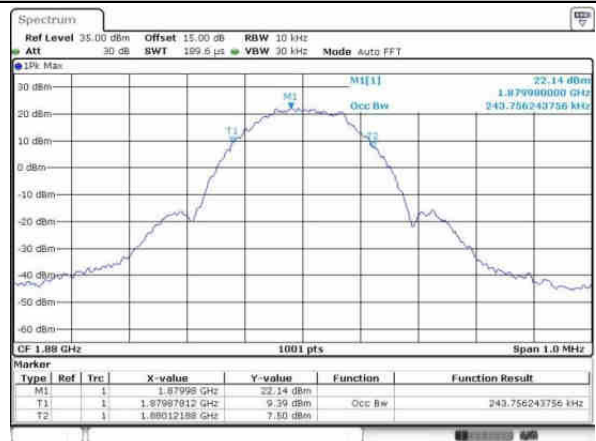

Date: 7 AUG 2016 03:33:15

Highest Channel



Date: 7 AUG 2016 03:08:08

Highest Channel




Date: 7 AUG 2016 03:35:51



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

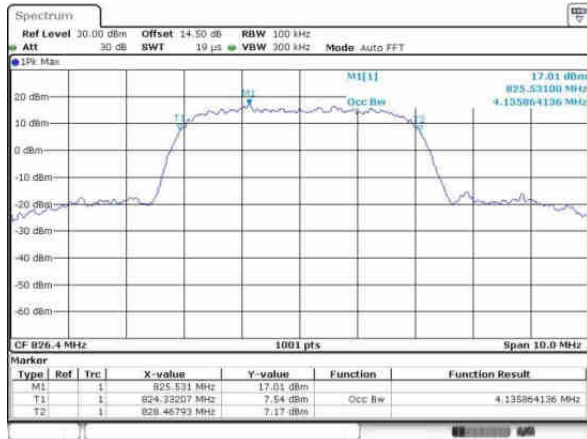

Date: 7.AUG.2016 02:41:20


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

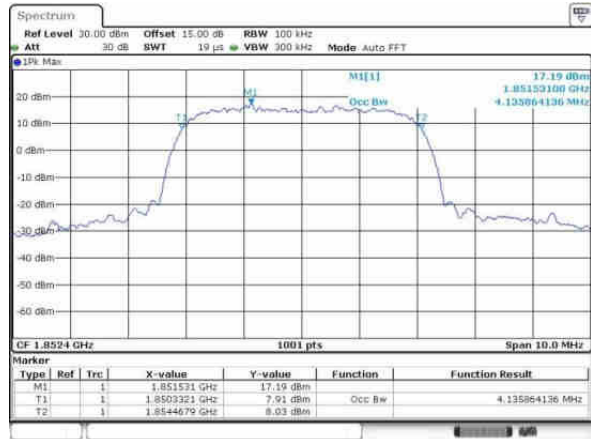


Date: 7.AUG.2016 03:57:27

Middle Channel

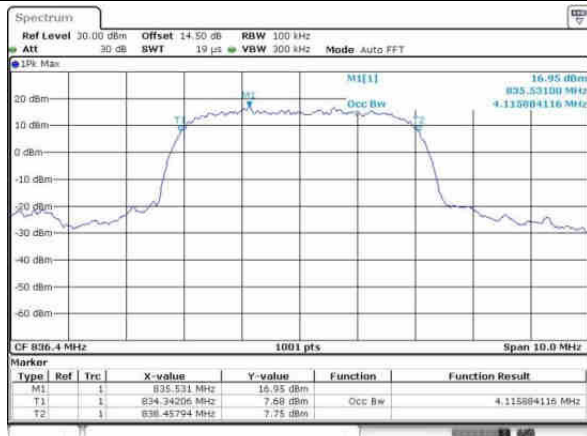


Date: 7.AUG.2016 02:41:49

Middle Channel

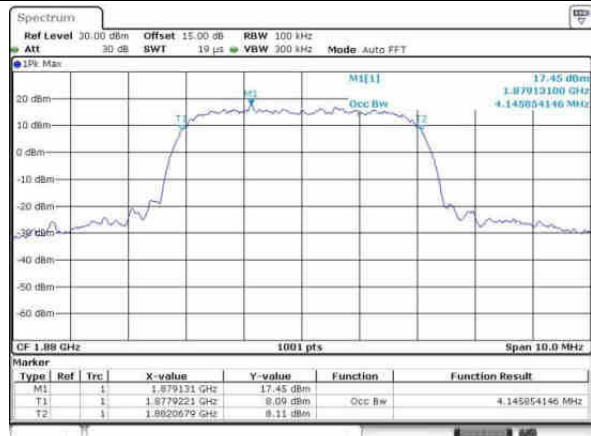


Date: 7.AUG.2016 03:57:55

Highest Channel

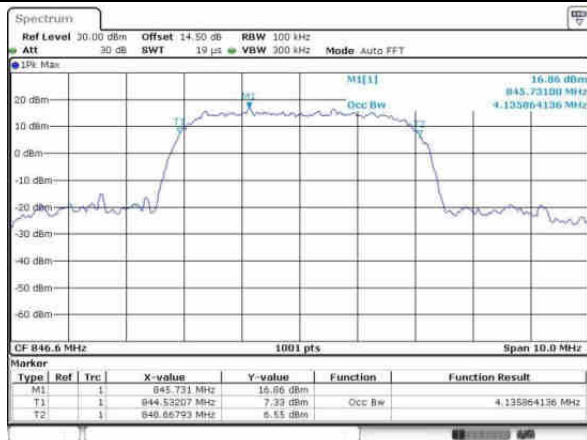

Date: 7.AUG.2016 02:42:17

Highest Channel

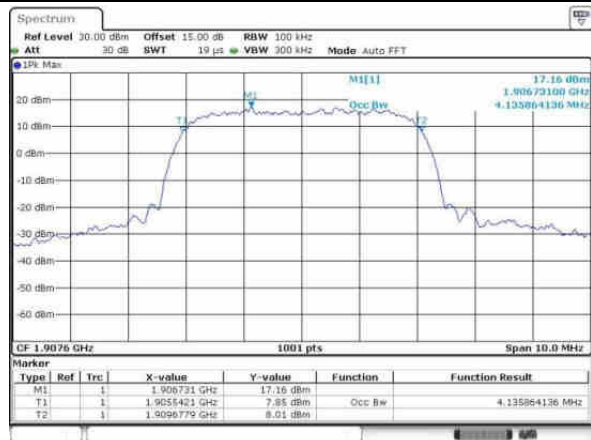


Date: 7.AUG.2016 03:58:24




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

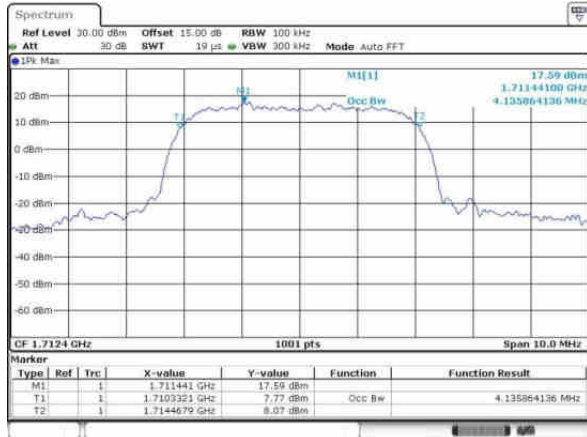


Date: 7 AUG 2016 04:23:33

Middle Channel

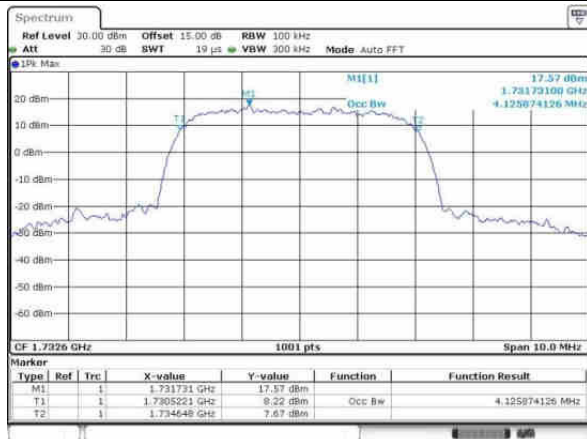


Date: 7 AUG 2016 04:24:01

Highest Channel

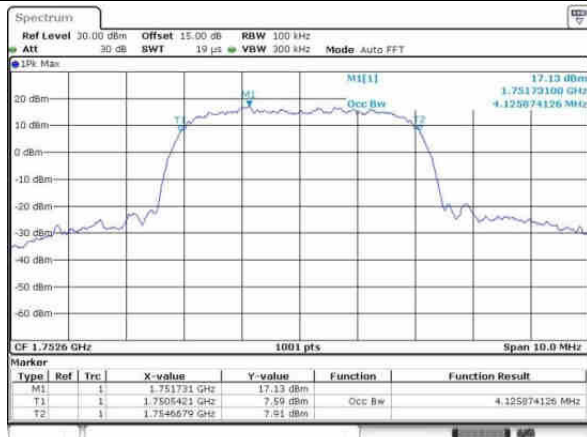


Date: 7 AUG 2016 04:24:30

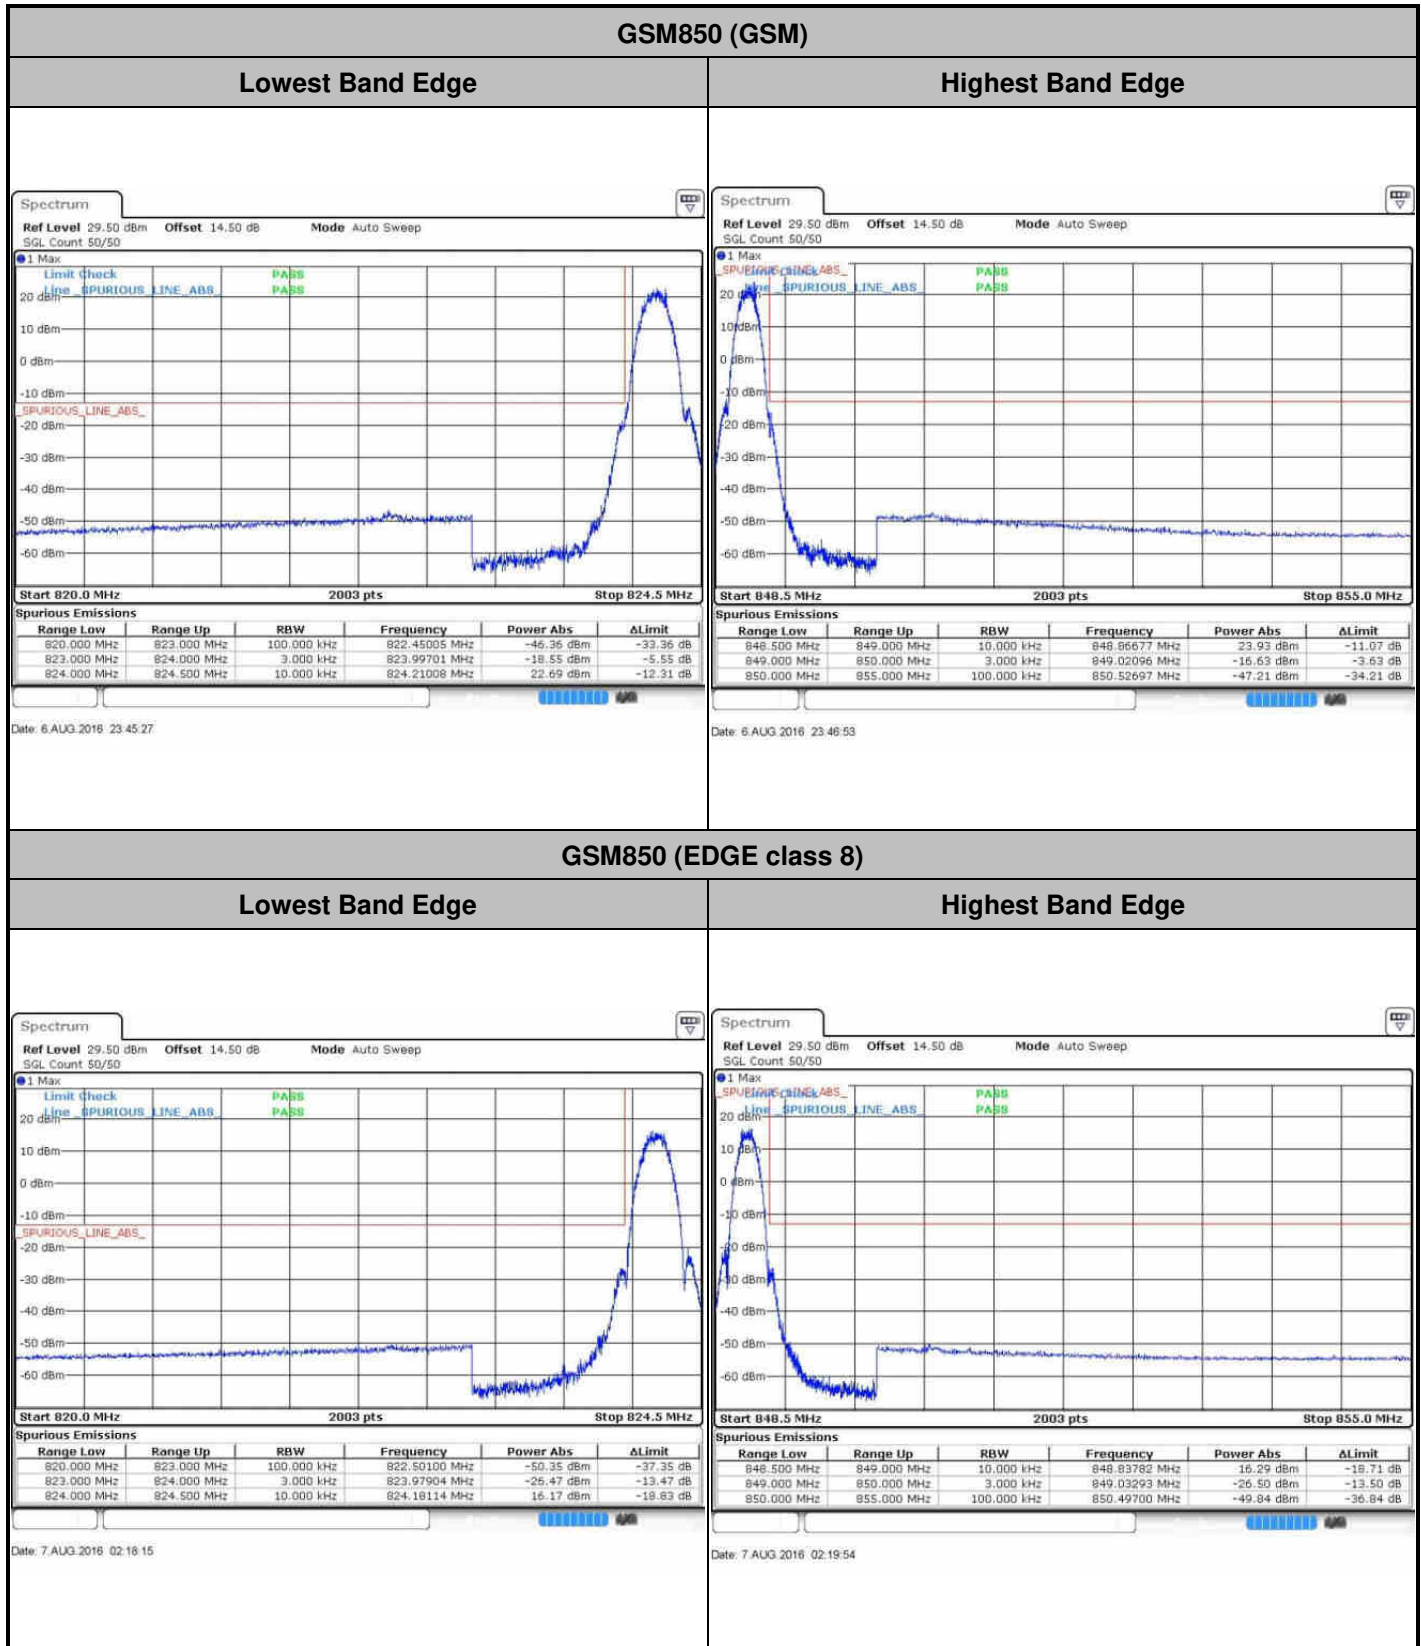**Conducted Band Edge**




GSM1900 (GSM)

Lowest Band Edge

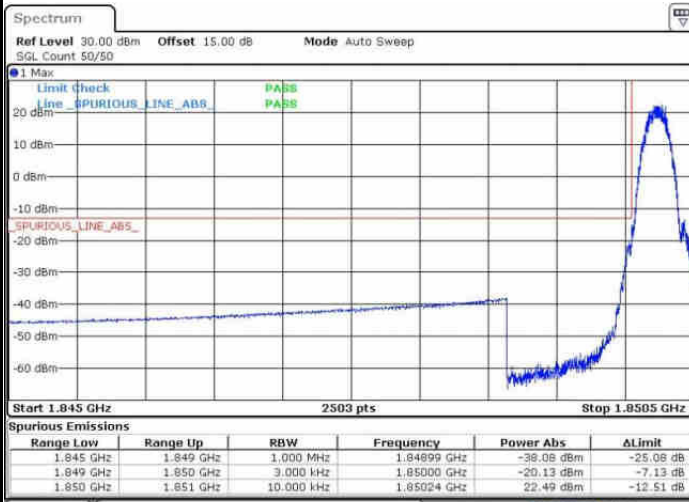


Highest Band Edge

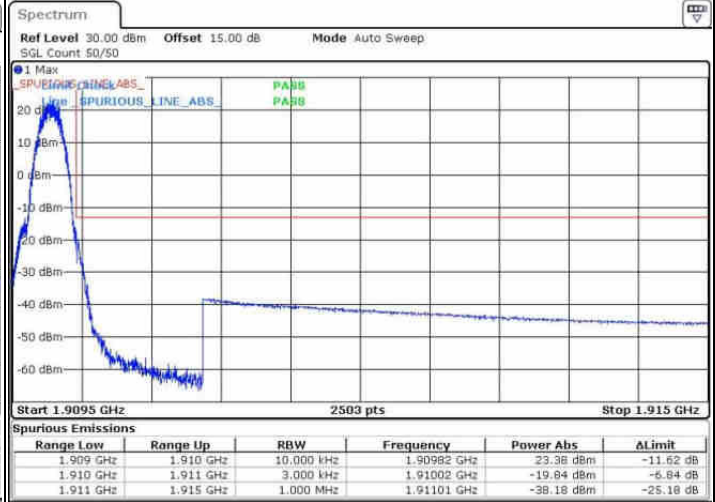


GSM1900 (EDGE class 8)

Lowest Band Edge

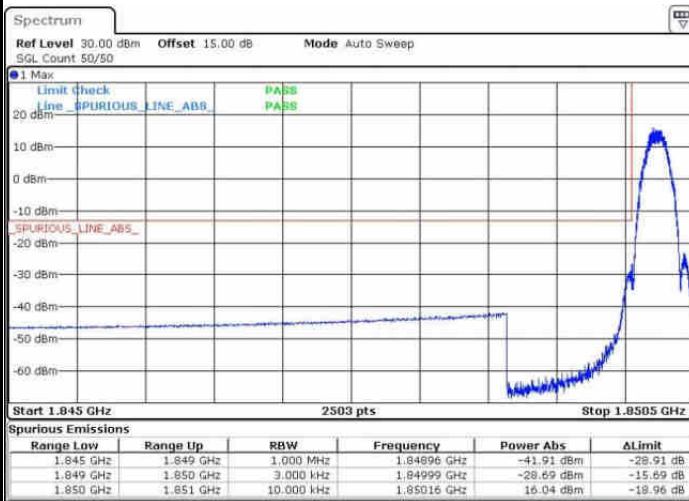

Highest Band Edge

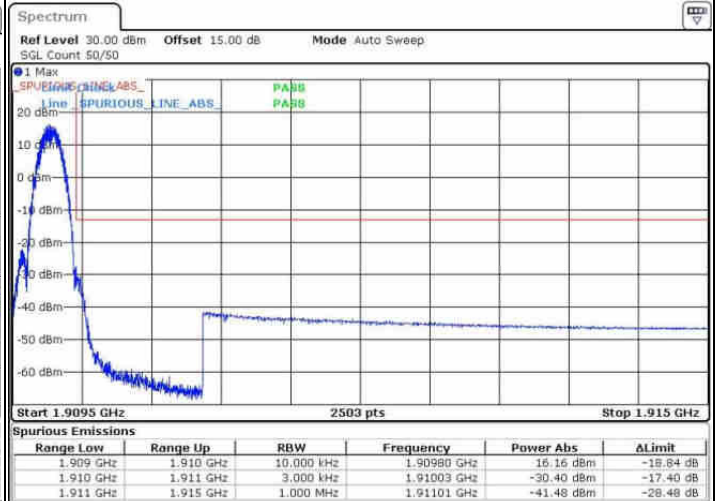



WCDMA Band V (RMC 12.2Kbps)

Lowest Band Edge



Highest Band Edge



WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge




Highest Band Edge





WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

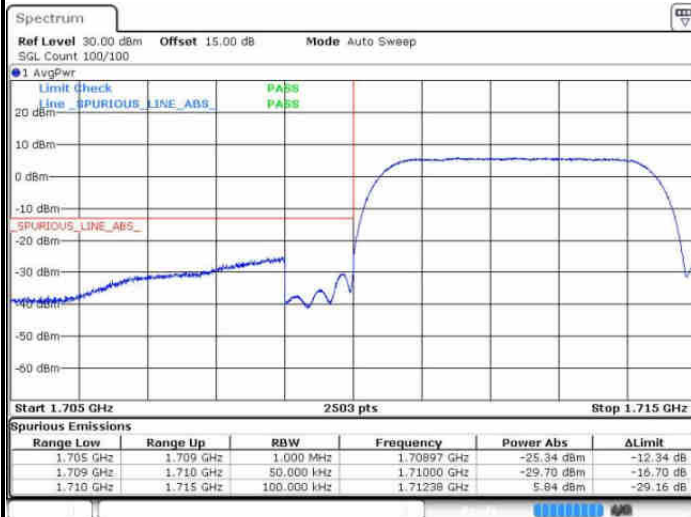

Highest Band Edge






Conducted Spurious Emission

GSM850 (GSM)


Lowest Channel

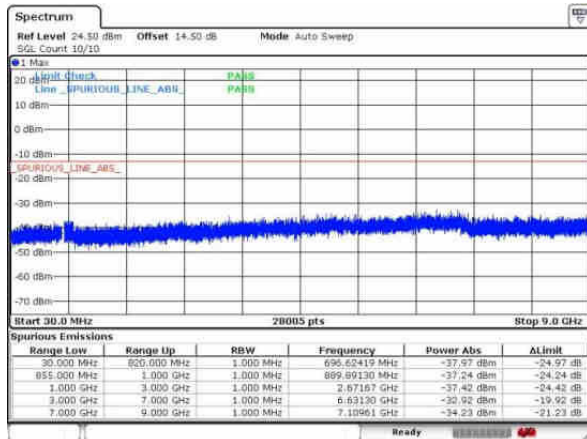

Date: 6 AUG 2016 23:51:41


GSM850 (EDGE class 8)

Lowest Channel

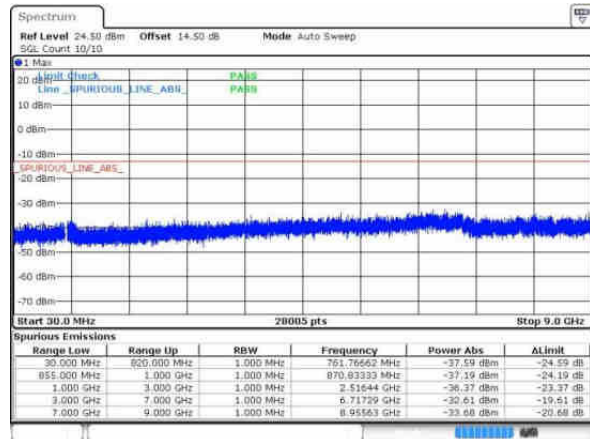


Date: 7 AUG 2016 02:21:28

Middle Channel

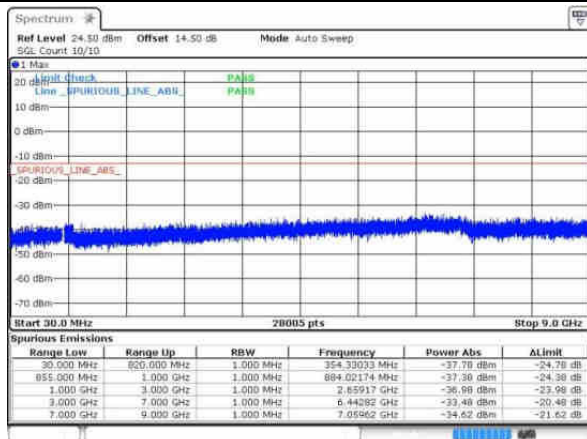


Date: 6 AUG 2016 23:49:42

Middle Channel

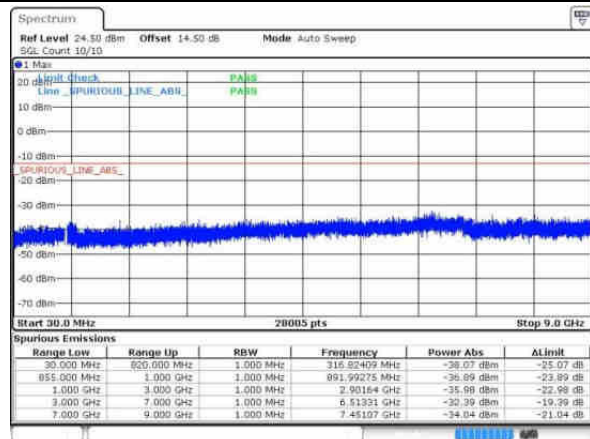


Date: 7 AUG 2016 02:23:00

Highest Channel

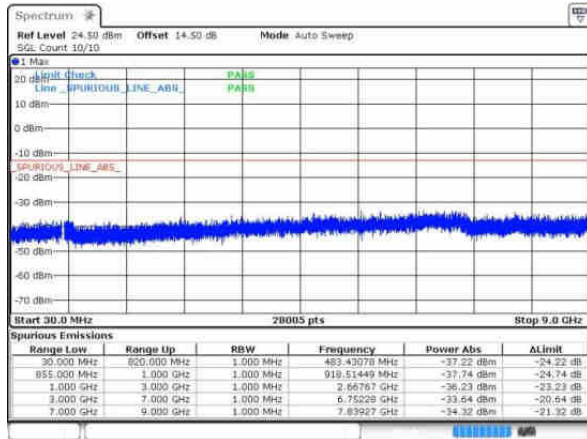

Date: 6 AUG 2016 23:50:58

Highest Channel

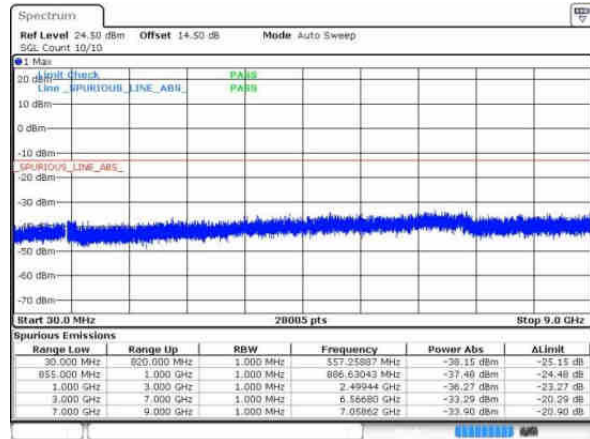


Date: 7 AUG 2016 02:24:40



GSM1900 (GSM)


Lowest Channel

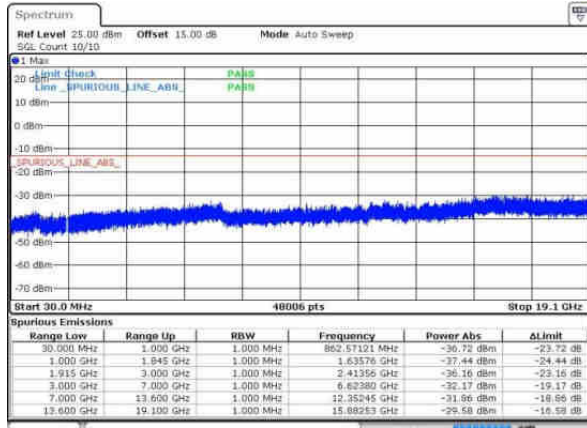

Date: 7 AUG 2016 03:14:44


GSM1900 (EDGE class 8)

Lowest Channel

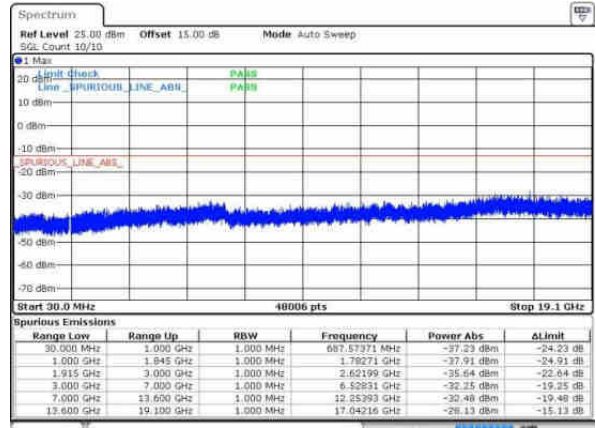


Date: 7 AUG 2016 03:42:33

Middle Channel

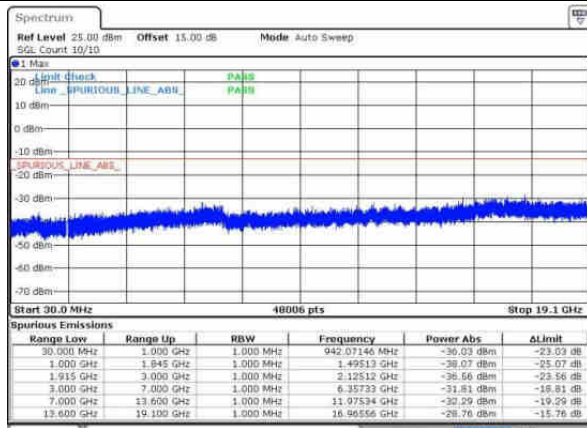


Date: 7 AUG 2016 03:16:01

Middle Channel

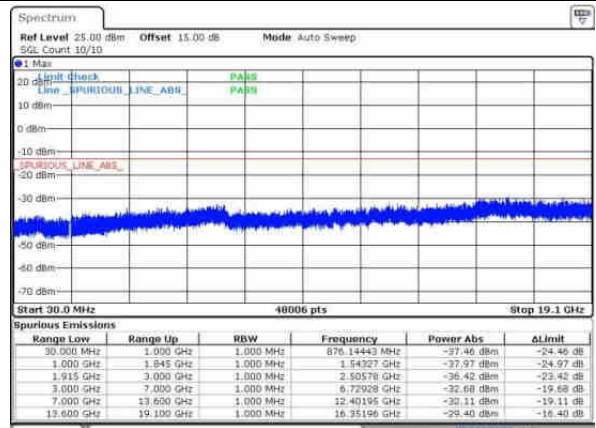


Date: 7 AUG 2016 03:44:00

Highest Channel

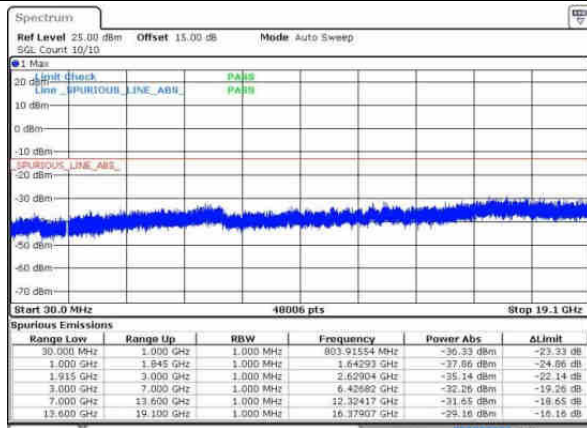

Date: 7 AUG 2016 03:17:17

Highest Channel

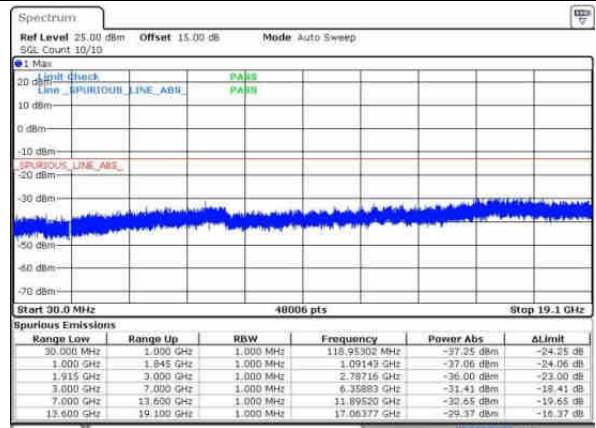


Date: 7 AUG 2016 03:45:25




WCDMA Band V (RMC 12.2Kbps)

Lowest Channel

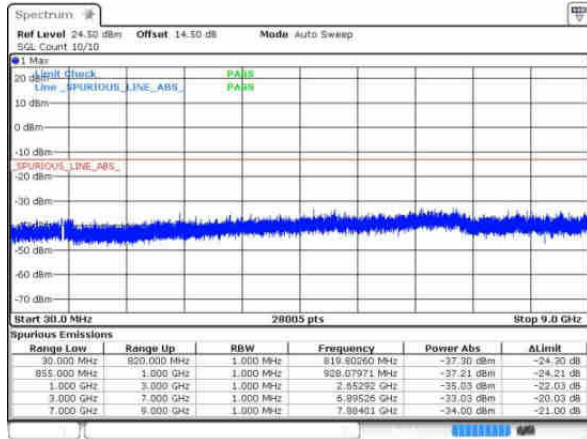


WCDMA Band II (RMC 12.2Kbps)


Lowest Channel

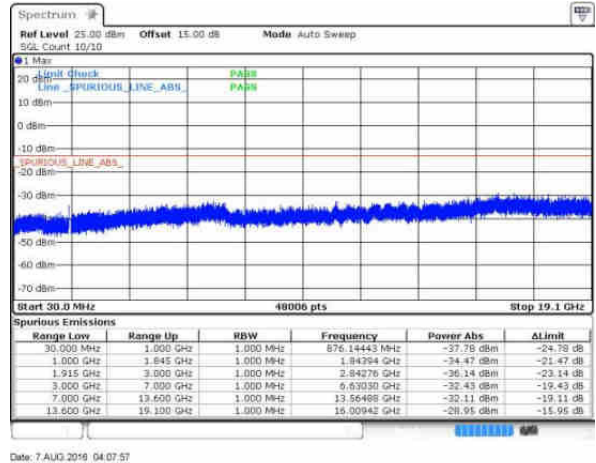


Middle Channel

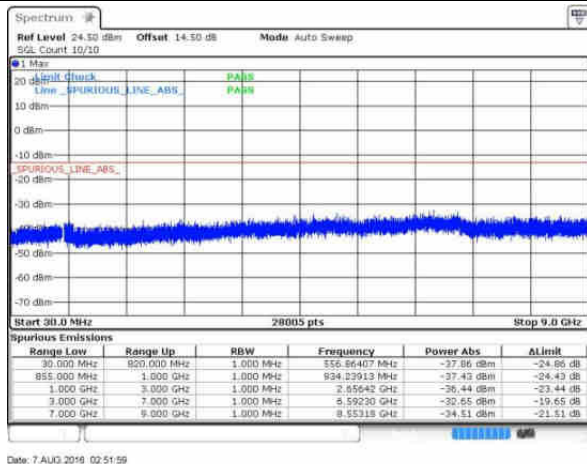


Middle Channel

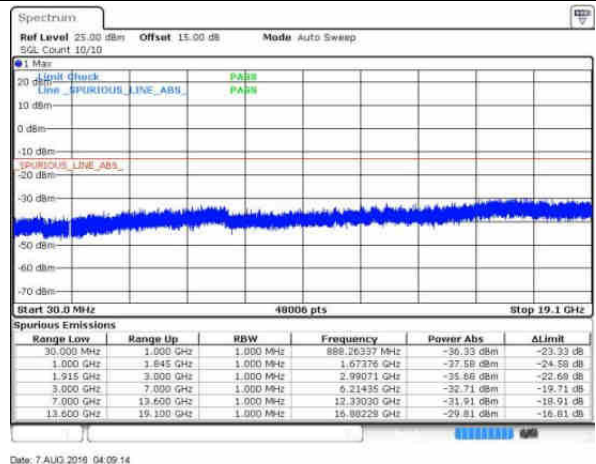

Highest Channel

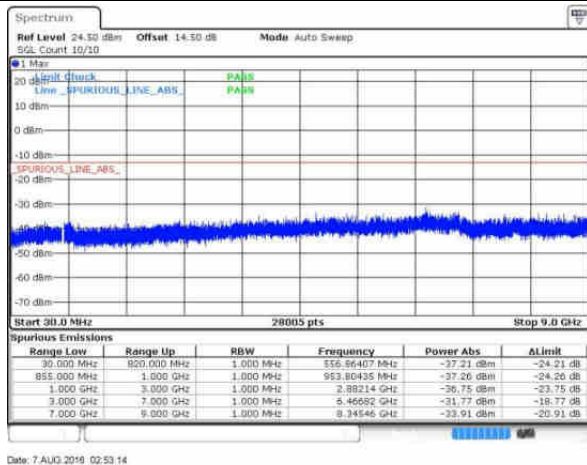


Highest Channel

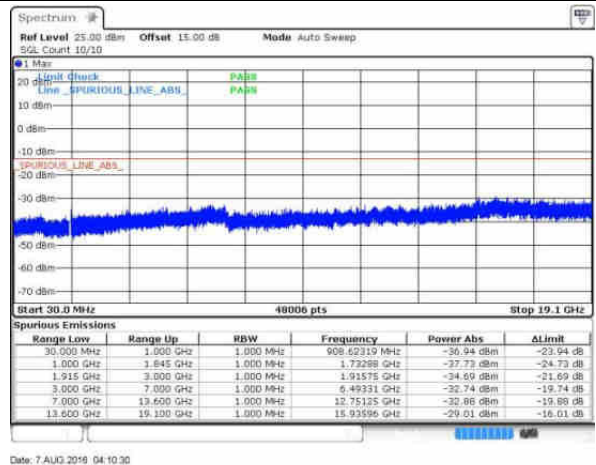




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

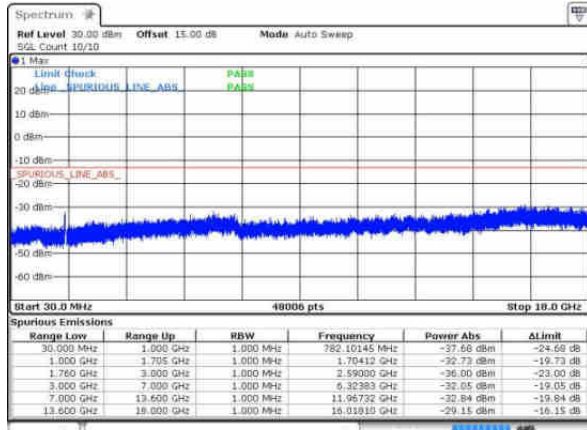


Date: 7 AUG 2019 04:34:58

Middle Channel

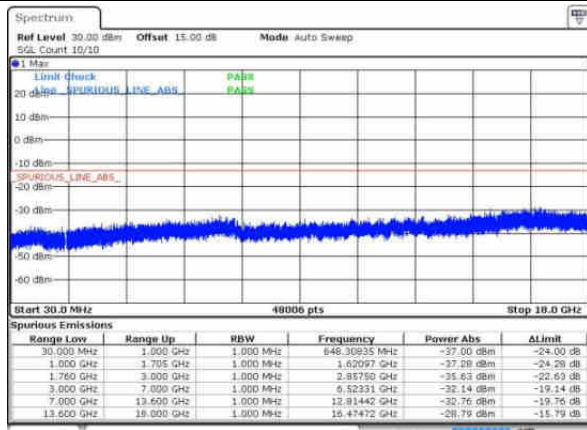

Date: 7 AUG 2019 04:36:15

Highest Channel

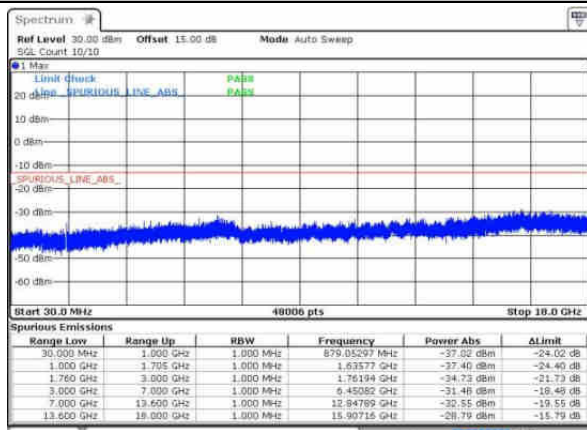

Date: 7 AUG 2019 04:37:30



Frequency Stability

Test Conditions	Middle Channel	GSM850 (GSM)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0203	0.0179	PASS
40	Normal Voltage	0.0072	0.0108	
30	Normal Voltage	0.0060	0.0215	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0120	0.0024	
0	Normal Voltage	0.0143	0.0155	
-10	Normal Voltage	0.0036	0.0287	
-20	Normal Voltage	0.0179	0.0048	
-30	Normal Voltage	0.0143	0.0120	
20	Maximum Voltage	0.0084	0.0108	
20	Normal Voltage	0.0167	0.0072	
20	Battery End Point	0.0060	0.0048	

Note: Normal Voltage = 3.8 V. ; Battery End Point (BEP) = 3.6 V. ; Maximum Voltage = 4.35 V

Test Conditions	Middle Channel	GSM1900 (GSM)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0005	0.0191	PASS
40	Normal Voltage	0.0144	0.0149	
30	Normal Voltage	0.0106	0.0112	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0032	0.0032	
0	Normal Voltage	0.0122	0.0096	
-10	Normal Voltage	0.0037	0.0170	
-20	Normal Voltage	0.0154	0.0005	
-30	Normal Voltage	0.0048	0.0021	
20	Maximum Voltage	0.0149	0.0128	
20	Normal Voltage	0.0032	0.0074	
20	Battery End Point	0.0000	0.0011	

Note:

1. Normal Voltage = 3.8 V. ; Battery End Point (BEP) = 3.6 V. ; Maximum Voltage = 4.35 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0012	PASS
40	Normal Voltage	0.0191	
30	Normal Voltage	0.0179	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0060	
0	Normal Voltage	0.0239	
-10	Normal Voltage	0.0251	
-20	Normal Voltage	0.0036	
-30	Normal Voltage	0.0155	
20	Maximum Voltage	0.0048	
20	Normal Voltage	0.0203	
20	Battery End Point	0.0143	

Note: Normal Voltage = 3.8 V. ; Battery End Point (BEP) = 3.6 V. ; Maximum Voltage =4.35 V

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0069	PASS
40	Normal Voltage	0.0037	
30	Normal Voltage	0.0032	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0011	
0	Normal Voltage	0.0043	
-10	Normal Voltage	0.0021	
-20	Normal Voltage	0.0069	
-30	Normal Voltage	0.0027	
20	Maximum Voltage	0.0053	
20	Normal Voltage	0.0032	
20	Battery End Point	0.0016	

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.6 V. ; Maximum Voltage =4.35 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0115	PASS
40	Normal Voltage	0.0162	
30	Normal Voltage	0.0023	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0092	
0	Normal Voltage	0.0063	
-10	Normal Voltage	0.0029	
-20	Normal Voltage	0.0052	
-30	Normal Voltage	0.0069	
20	Maximum Voltage	0.0087	
20	Normal Voltage	0.0012	
20	Battery End Point	0.0081	

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.6 V. ; Maximum Voltage =4.35V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

Battery 1

GSM850 (GSM)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Low	1648	-59.69	-13	-46.69	-47.27	-61.45	0.98	4.89	H
	2472	-36.92	-13	-23.92	-29.94	-38.8	1.28	5.32	H
	4120	-61.97	-13	-48.97	-57.61	-66.61	1.83	8.62	H
	1648	-62.86	-13	-49.86	-50.9	-64.62	0.98	4.89	V
	2472	-42.34	-13	-29.34	-35.82	-44.22	1.28	5.32	V
	4120	-64.39	-13	-51.39	-60.15	-69.03	1.83	8.62	V
Middle	1672	-56.19	-13	-43.19	-44.05	-57.87	0.99	4.82	H
	2512	-31.31	-13	-18.31	-24.45	-33.28	1.29	5.41	H
	4184	-59.51	-13	-46.51	-55.31	-64.13	1.87	8.64	H
	1672	-60.47	-13	-47.47	-48.81	-62.15	0.99	4.82	V
	2512	-28.66	-13	-15.66	-22.23	-30.63	1.29	5.41	V
	4184	-58.90	-13	-45.90	-54.85	-63.52	1.87	8.64	V
High	1696	-59.58	-13	-46.58	-47.58	-61.18	1.00	4.75	H
	2544	-45.27	-13	-32.27	-38.47	-47.25	1.30	5.44	H
	3392	-64.36	-13	-51.36	-59.86	-68.16	1.57	7.52	H
	1696	-62.68	-13	-49.68	-51.11	-64.28	1.00	4.75	V
	2544	-43.59	-13	-30.59	-37.29	-45.57	1.30	5.44	V
	3392	-64.67	-13	-51.67	-60.23	-68.47	1.57	7.52	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM850 (EDGE class 8)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Low	1648	-63.69	-13	-50.69	-51.24	-65.45	0.98	4.89	H
	2472	-39.88	-13	-26.88	-32.86	-41.76	1.28	5.32	H
	3298	-65.37	-13	-52.37	-60.47	-68.79	1.54	7.11	H
	1648	-66.54	-13	-53.54	-54.62	-68.3	0.98	4.89	V
	2472	-43.59	-13	-30.59	-37.04	-45.47	1.28	5.32	V
	3298	-64.86	-13	-51.86	-60.24	-68.28	1.54	7.11	V
Middle	1672	-49.37	-13	-36.37	-50.26	-51.05	0.99	4.82	H
	2512	-46.86	-13	-33.86	-39.99	-48.83	1.29	5.41	H
	3345	-64.79	-13	-51.79	-60.05	-68.4	1.56	7.32	H
	1672	-64.16	-13	-51.16	-52.49	-65.84	0.99	4.82	V
	2512	-45.59	-13	-32.59	-39.18	-47.56	1.29	5.41	V
	3345	-64.77	-13	-51.77	-60.25	-68.38	1.56	7.32	V
High	1696	-63.36	-13	-50.36	-51.42	-64.96	1.00	4.75	H
	2544	-49.38	-13	-36.38	-42.55	-51.36	1.30	5.44	H
	3393	-64.78	-13	-51.78	-60.2	-68.59	1.57	7.53	H
	1696	-66.94	-13	-53.94	-55.42	-68.54	1.00	4.75	V
	2544	-52.78	-13	-39.78	-46.44	-54.76	1.30	5.44	V
	3393	-64.66	-13	-51.66	-60.21	-68.47	1.57	7.53	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (GSM)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Low	3702	-61.44	-13	-48.44	-57.05	-68.01	1.67	8.24	H
	5550	-46.15	-13	-33.15	-48.74	-53.22	2.65	9.72	H
	7404	-35.21	-13	-22.21	-39.25	-44.36	2.46	11.61	H
	9252	-51.96	-13	-38.96	-58.39	-62.02	2.54	12.60	H
	11100	-49.24	-13	-36.24	-60.22	-59.01	2.69	12.46	H
	12948	-51.99	-13	-38.99	-64.9	-62.01	2.92	12.94	H
	14806	-52.59	-13	-39.59	-65.42	-62.44	3.52	13.37	H
	16654	-47.56	-13	-34.56	-63.08	-56.02	3.93	12.38	H
	3702	-62.12	-13	-49.12	-57.85	-68.69	1.67	8.24	V
	5550	-46.61	-13	-33.61	-49.96	-53.68	2.65	9.72	V
	7404	-35.62	-13	-22.62	-39.89	-44.77	2.46	11.61	V
	9252	-53.71	-13	-40.71	-60.47	-63.77	2.54	12.60	V
	11100	-48.24	-13	-35.24	-59.14	-58.01	2.69	12.46	V
	12948	-54.03	-13	-41.03	-66.31	-64.05	2.92	12.94	V
	14806	-51.54	-13	-38.54	-64.58	-61.39	3.52	13.37	V
	16654	-46.87	-13	-33.87	-61.74	-55.33	3.93	12.38	V
Middle	3762	-59.42	-13	-46.42	-55.12	-66.05	1.69	8.31	H
	5640	-47.41	-13	-34.41	-50.46	-54.46	2.71	9.76	H
	7518	-33.27	-13	-20.27	-37.27	-42.66	2.42	11.81	H
	9399	-49.14	-13	-36.14	-55.9	-59.11	2.57	12.54	H
	11278	-49.74	-13	-36.74	-61.43	-59.44	2.68	12.39	H
	13158	-51.79	-13	-38.79	-64.45	-62.04	2.97	13.22	H
	15037	-54.97	-13	-41.97	-67.65	-65.01	3.61	13.65	H
	16917	-45.63	-13	-32.63	-61.38	-54.44	3.89	12.70	H
	3762	-61.03	-13	-48.03	-56.48	-67.66	1.69	8.31	V
	5640	-47.28	-13	-34.28	-50.13	-54.33	2.71	9.76	V
	7518	-36.38	-13	-23.38	-40.63	-45.77	2.42	11.81	V
	9399	-52.64	-13	-39.64	-59.78	-62.61	2.57	12.54	V
	11278	-47.41	-13	-34.41	-58.82	-57.11	2.68	12.39	V
	13158	-47.76	-13	-34.76	-60.37	-58.01	2.97	13.22	V
	15037	-53.18	-13	-40.18	-66.34	-63.22	3.61	13.65	V
	16917	-45.58	-13	-32.58	-61.41	-54.39	3.89	12.70	V
High	3822	-57.01	-13	-44.01	-52.6	-63.69	1.71	8.39	H
	5730	-45.28	-13	-32.28	-48.57	-52.31	2.76	9.79	H
	7638	-44.53	-13	-31.53	-48.97	-54.03	2.38	11.88	H
	9546	-47.64	-13	-34.64	-54.46	-57.51	2.60	12.47	H
	11457	-49.42	-13	-36.42	-61.8	-59.05	2.68	12.32	H
	13368	-40.56	-13	-27.56	-59.81	-51.05	3.02	13.52	H
	15279	-51.73	-13	-38.73	-65.48	-62.01	3.71	13.99	H
	17190	-48.29	-13	-35.29	-64.41	-57.77	3.85	13.33	H
	3822	-57.53	-13	-44.53	-53.14	-64.21	1.71	8.39	V
	5730	-46.49	-13	-33.49	-49.73	-53.52	2.76	9.79	V
	7638	-44.71	-13	-31.71	-49.42	-54.21	2.38	11.88	V
	9546	-53.34	-13	-40.34	-60.68	-63.21	2.60	12.47	V



	11457	-45.59	-13	-32.59	-57.91	-55.22	2.68	12.32	V
	13368	-40.84	-13	-27.84	-53.46	-51.33	3.02	13.52	V
	15279	-52.93	-13	-39.93	-66.98	-63.21	3.71	13.99	V
	17190	-45.91	-13	-32.91	-62.32	-55.39	3.85	13.33	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (EDGE class 8)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Low	3702	-63.11	-13	-50.11	-58.9	-69.68	1.67	8.24	H
	5550	-55.59	-13	-42.59	-57.95	-62.66	2.65	9.72	H
	7398	-41.09	-13	-28.09	-45.27	-50.22	2.46	11.60	H
	9252	-56.52	-13	-43.52	-62.98	-66.58	2.54	12.60	H
	11100	-54.64	-13	-41.64	-65.75	-64.41	2.69	12.46	H
	12948	-56.04	-13	-43.04	-69	-66.06	2.92	12.94	H
	14806	-56.84	-13	-43.84	-69.69	-66.69	3.52	13.37	H
	16654	-52.42	-13	-39.42	-67.66	-60.88	3.93	12.38	H
	3702	-64.02	-13	-51.02	-59.74	-70.59	1.67	8.24	V
	5550	-56.52	-13	-43.52	-59.02	-63.59	2.65	9.72	V
	7404	-41.41	-13	-28.41	-45.5	-50.56	2.46	11.61	V
	9252	-58.29	-13	-45.29	-65.25	-68.35	2.54	12.60	V
	11100	-51.25	-13	-38.25	-62.11	-61.02	2.69	12.46	V
	12948	-56.75	-13	-43.75	-69.16	-66.77	2.92	12.94	V
	14806	-54.03	-13	-41.03	-67.11	-63.88	3.52	13.37	V
	16654	-53.89	-13	-40.89	-67.75	-62.35	3.93	12.38	V
Middle	3762	-62.38	-13	-49.38	-57.81	-69.01	1.69	8.31	H
	5640	-55.50	-13	-42.50	-58.34	-62.55	2.71	9.76	H
	7518	-40.82	-13	-27.82	-44.96	-50.21	2.42	11.81	H
	9399	-55.85	-13	-42.85	-62.6	-65.82	2.57	12.54	H
	11278	-52.99	-13	-39.99	-64.65	-62.69	2.68	12.39	H
	13158	-55.41	-13	-42.41	-68.2	-65.66	2.97	13.22	H
	15037	-57.29	-13	-44.29	-70.15	-67.33	3.61	13.65	H
	16917	-53.07	-13	-40.07	-68.75	-61.88	3.89	12.70	H
	3762	-63.48	-13	-50.48	-59.1	-70.11	1.69	8.31	V
	5640	-55.21	-13	-42.21	-58.17	-62.26	2.71	9.76	V
	7518	-44.27	-13	-31.27	-48.54	-53.66	2.42	11.81	V
	9399	-59.25	-13	-46.25	-66.42	-69.22	2.57	12.54	V
	11278	-52.41	-13	-39.41	-64.08	-62.11	2.68	12.39	V
	13158	-51.76	-13	-38.76	-63.84	-62.01	2.97	13.22	V
	15037	-54.62	-13	-41.62	-67.85	-64.66	3.61	13.65	V
	16917	-47.74	-13	-34.74	-63.39	-56.55	3.89	12.70	V
High	3822	-62.54	-13	-49.54	-58.1	-69.22	1.71	8.39	H
	5730	-57.99	-13	-44.99	-61.38	-65.02	2.76	9.79	H
	7638	-46.51	-13	-33.51	-51.04	-56.01	2.38	11.88	H
	9546	-57.82	-13	-44.82	-64.58	-67.69	2.60	12.47	H
	11457	-56.39	-13	-43.39	-68.57	-66.02	2.68	12.32	H
	13368	-50.22	-13	-37.22	-62.78	-60.71	3.02	13.52	H
	15279	-58.05	-13	-45.05	-72	-68.33	3.71	13.99	H
	17190	-51.63	-13	-38.63	-67.67	-61.11	3.85	13.33	H
	3822	-62.65	-13	-49.65	-58.27	-69.33	1.71	8.39	V
	5730	-52.36	-13	-39.36	-55.78	-59.39	2.76	9.79	V
	7638	-47.91	-13	-34.91	-52.69	-57.41	2.38	11.88	V
	9546	-58.14	-13	-45.14	-65.43	-68.01	2.60	12.47	V



	11457	-52.42	-13	-39.42	-64.62	-62.05	2.68	12.32	V
	13368	-43.28	-13	-30.28	-60.43	-53.77	3.02	13.52	V
	15279	-55.74	-13	-42.74	-69.69	-66.02	3.71	13.99	V
	17190	-51.96	-13	-38.96	-68.32	-61.44	3.85	13.33	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band V(RMC 12.2Kbps)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Low	1648	-66.26	-13	-53.26	-53.85	-68.02	0.98	4.89	H
	2480	-35.61	-13	-22.61	-28.62	-37.52	1.28	5.34	H
	4128	-60.93	-13	-47.93	-56.54	-65.57	1.83	8.63	H
	1648	-68.11	-13	-55.11	-56.18	-69.87	0.98	4.89	V
	2480	-38.83	-13	-25.83	-32.28	-40.74	1.28	5.34	V
	4128	-61.88	-13	-48.88	-57.67	-66.52	1.83	8.63	V
Middle	1672	-68.36	-13	-55.36	-56.2	-70.04	0.99	4.82	H
	2504	-48.65	-13	-35.65	-41.75	-50.61	1.29	5.40	H
	3345	-64.78	-13	-51.78	-60.2	-68.39	1.56	7.32	H
	1672	-68.77	-13	-55.77	-57.1	-70.45	0.99	4.82	V
	2504	-46.36	-13	-33.36	-39.89	-48.32	1.29	5.40	V
	3345	-64.55	-13	-51.55	-60.01	-68.16	1.56	7.32	V
High	1696	-66.41	-13	-53.41	-54.45	-68.01	1.00	4.75	H
	2536	-40.18	-13	-27.18	-33.56	-42.16	1.30	5.43	H
	3392	-64.41	-13	-51.41	-60.05	-68.21	1.57	7.52	H
	1696	-68.42	-13	-55.42	-56.96	-70.02	1.00	4.75	V
	2536	-44.01	-13	-31.01	-37.83	-45.99	1.30	5.43	V
	3392	-64.25	-13	-51.25	-59.97	-68.05	1.57	7.52	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band II(RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Low	3708	-59.75	-13	-46.75	-55.53	-66.33	1.67	8.25	H
	5562	-58.17	-13	-45.17	-60.75	-65.23	2.66	9.72	H
	7404	-35.21	-13	-22.21	-39.23	-44.36	2.46	11.61	H
	3708	-59.91	-13	-46.91	-55.69	-66.49	1.67	8.25	V
	5562	-48.48	-13	-35.48	-61.06	-55.54	2.66	9.72	V
	7416	-37.87	-13	-24.87	-42.07	-47.05	2.46	11.63	V
Middle	3762	-55.96	-13	-42.96	-51.61	-62.59	1.69	8.31	H
	5646	-55.72	-13	-42.72	-58.66	-62.77	2.71	9.76	H
	7524	-38.27	-13	-25.27	-42.4	-47.66	2.42	11.81	H
	3762	-56.86	-13	-43.86	-52.53	-63.49	1.69	8.31	V
	5646	-56.74	-13	-43.74	-59.77	-63.79	2.71	9.76	V
	7524	-40.27	-13	-27.27	-44.74	-49.66	2.42	11.81	V
High	3816	-57.91	-13	-44.91	-53.53	-64.59	1.70	8.38	H
	5718	-55.98	-13	-42.98	-59.24	-63.02	2.75	9.79	H
	7626	-44.06	-13	-31.06	-48.52	-53.55	2.39	11.88	H
	3816	-58.54	-13	-45.54	-54.21	-65.22	1.70	8.38	V
	5718	-58.11	-13	-45.11	-59.57	-65.15	2.75	9.79	V
	7626	-46.56	-13	-33.56	-51.19	-56.05	2.39	11.88	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band IV(RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Low	3426	-53.44	-13	-40.44	-49.09	-59.53	1.58	7.67	H
	5142	-58.56	-13	-45.56	-58.9	-65.84	2.42	9.70	H
	6846	-56.27	-13	-43.27	-60.73	-64.25	2.64	10.62	H
	3426	-56.28	-13	-43.28	-51.89	-62.37	1.58	7.67	V
	5142	-60.96	-13	-47.96	-61.15	-68.24	2.42	9.70	V
	6846	-49.58	-13	-36.58	-53.95	-57.56	2.64	10.62	V
Middle	3468	-58.25	-13	-45.25	-54	-64.51	1.59	7.86	H
	5196	-55.57	-13	-42.57	-56.18	-62.82	2.45	9.70	H
	6936	-54.73	-13	-41.73	-59.11	-62.84	2.61	10.72	H
	3468	-60.43	-13	-47.43	-56.13	-66.69	1.59	7.86	V
	5196	-54.18	-13	-41.18	-54.72	-61.43	2.45	9.70	V
	6936	-49.49	-13	-36.49	-53.83	-57.6	2.61	10.72	V
High	3504	-52.57	-13	-39.57	-48.47	-58.97	1.61	8.00	H
	5256	-60.38	-13	-47.38	-61.28	-67.6	2.48	9.70	H
	7008	-53.99	-13	-40.99	-58.23	-62.22	2.59	10.82	H
	3504	-57.98	-13	-44.98	-53.76	-64.38	1.61	8.00	V
	5256	-61.49	-13	-48.49	-62.31	-68.71	2.48	9.70	V
	7008	-48.96	-13	-35.96	-53.26	-57.19	2.59	10.82	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



Battery 2

GSM850 (GSM)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-53.93	-13	-40.93	-42.07	-55.61	0.99	4.82	H
	2512	-27.29	-13	-14.29	-20.7	-29.26	1.29	5.41	H
	3345	-64.89	-13	-51.89	-60.42	-68.5	1.56	7.32	H
	1672	-55.91	-13	-42.91	-44.55	-57.59	0.99	4.82	V
	2512	-27.06	-13	-14.06	-20.93	-29.03	1.29	5.41	V
	3345	-64.68	-13	-51.68	-60.44	-68.29	1.56	7.32	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM1900 (GSM)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3762	-57.84	-13	-44.84	-53.64	-64.47	1.69	8.31	H
	5640	-48.35	-13	-35.35	-51.52	-55.4	2.71	9.76	H
	7518	-50.47	-13	-37.47	-54.67	-59.86	2.42	11.81	H
	9399	-38.93	-13	-25.93	-45.78	-48.9	2.57	12.54	H
	11278	-54.80	-13	-41.80	-66.62	-64.5	2.68	12.39	H
	13158	-46.43	-13	-33.43	-59.37	-56.68	2.97	13.22	H
	15037	-53.11	-13	-40.11	-66.17	-63.15	3.61	13.65	H
	16917	-59.70	-13	-46.70	-75.65	-68.51	3.89	12.70	H
	3762	-60.01	-13	-47.01	-55.83	-66.64	1.69	8.31	V
	5640	-48.16	-13	-35.16	-51.29	-55.21	2.71	9.76	V
	7518	-52.64	-13	-39.64	-57.12	-62.03	2.42	11.81	V
	9399	-41.62	-13	-28.62	-48.88	-51.59	2.57	12.54	V
	11278	-52.81	-13	-39.81	-64.58	-62.51	2.68	12.39	V
	13158	-43.25	-13	-30.25	-55.94	-53.5	2.97	13.22	V
	15037	-49.25	-13	-36.25	-62.58	-59.29	3.61	13.65	V
	16917	-58.49	-13	-45.49	-74.42	-67.3	3.89	12.70	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band IV(RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
High	3504	-52.21	-13	-39.21	-48.39	-58.61	1.61	8.00	H
	5256	-62.78	-13	-49.78	-63.97	-70	2.48	9.70	H
	7014	-59.81	-13	-46.81	-64.33	-68.05	2.59	10.83	H
	8760	-50.63	-13	-37.63	-56.99	-60.8	2.43	12.60	H
	10512	-60.25	-13	-47.25	-69.34	-69.96	2.69	12.40	H
	12276	-57.03	-13	-44.03	-69.7	-66.64	2.75	12.36	H
	3510	-54.50	-13	-41.50	-50.5	-60.9	1.61	8.01	V
	5256	-62.28	-13	-49.28	-63.34	-69.5	2.48	9.70	V
	7008	-54.41	-13	-41.41	-59.01	-62.64	2.59	10.82	V
	8766	-46.95	-13	-33.95	-53.71	-57.12	2.43	12.61	V
	10512	-60.25	-13	-47.25	-69.14	-69.96	2.69	12.40	V
	12276	-54.39	-13	-41.39	-66.4	-64	2.75	12.36	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.