

RF Exposure Report

Report No.: AGC11758240846FH01

FCC ID : 2A482-PPPG1030C

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Power Bank

BRAND NAME: baseus

MODEL NAME : PPPG-1030C

APPLICANT: Shenzhen Baseus Technology Co., Ltd.

DATE OF ISSUE : Dec. 16, 2024

47 CFR FCC Part 2.1091

STANDARD(S) : 47 CFR FCC Part 2.1093

KDB 680101 D01 v04

REPORT VERSION: V1.0

Attestation of Global Co., Ltd



Page 2 of 17

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Dec. 16, 2024	Valid	Initial Release







Table of Contents

1. General Information	4
2. Product Information	5
2.1 Product Technical Description	5
2.2 DUT Coil and Size Information	5
2.3 Related Submittal(S)/Grant (S)	6
2.4 Test Methodology	6
2.5 Equipment Approval Considerations	6
3. Test Environment	7
3.1 Address of The Test Laboratory	7
3.2 Test Facility	7
3.3 Environmental Conditions	8
3.4 Measurement Uncertainty	8
3.5 List of Equipment Used	8
4.System Test Configuration	9
4.1 Configuration of Tested System	g
4.2 Equipment Used in Tested System	g
5. Description of Test Modes	10
6. Maximum Permissible Exposure	11
6.1 Test Limits	11
6.2 Test Setup (Block Diagram of Configuration)	12
6.3 Test Procedures	14
6.4 Test Result	15
Appendix I: Photographs of Test Setup	17
Appendix II: Photographs of Test EUT	17



Page 4 of 17




1. General Information

Applicant	Shenzhen Baseus Technology Co., Ltd.
Address	2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou Community, Bantian Street, Longgang District, Shenzhen, China
Manufacturer	Shenzhen Baseus Technology Co., Ltd.
Address	2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou Community, Bantian Street, Longgang District, Shenzhen, China
Factory	Shenzhen Joway Power Supply Co., Ltd.
Address	Floor 1-5 of Bldg 10th and Bldg 11th, Antuoshan High-Tech Industrial Park, Sha'er Community, Shajing Street, Bao'an District, Shenzhen, China
Product Designation	Power Bank
Brand Name	baseus
Test Model	PPPG-1030C
Series Model(s)	N/A
Difference Description	N/A
Date of receipt of test item	Oct. 31, 2024
Date of Test	Oct. 31, 2024~ Dec. 16, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-RFE-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Jouk bai	
	Jack Gui (Project Engineer)	Dec. 16, 2024
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Dec. 16, 2024
Approved By	Angole Li	
-	Angela Li (Authorized Officer)	Dec. 16, 2024





2. Product Information

2.1 Product Technical Description

Operation Frequency Band	115KHz-205KHz, 360KHz±5KHz
Hardware Version	V1.0
Software Version	v1.0
Modulation Type	ASK
Antenna Designation	Coil Antenna
Antenna Gain	0dBi
Input Rating	DC 5V/9V/12V by adapter or DC 3.6V by battery
Output Rating	5W/7.5W/15W Max

2.2 DUT Coil and Size Information

Output Power for Each Coil	5W/7.5W/15W Max						
Distance to transmitter:	Top: 2.8mm; Bottom: 16mm; Left: 32mm; Right: 32mm; Front: 73mm; Rear: 30mm						
DUT Size	Unit:mm	o L	H H				
	A	В	С	D	Е	F	G
	42.5±0.5	20 ^{+0.25} -1.2	20.3±0.2	39±1	38±2	40±2	4±1
	Н	I					
	0.95±0.1	2.2±0.1				(4) 517	

Remark: The information above are provided by the manufacturer. More detailed feature of the EUT please refers to the user manual.



Page 6 of 17

2.3 Related Submittal(S)/Grant (S)

This submittal(s) (test report) is intended for FCC ID: 2A482-PPPG1030C, filing to comply with Part 2.1091&2.1093 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2.1091	Radiofrequency Radiation Exposure Evaluation: Mobile Devices.
2	FCC 47 CFR Part 2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices.
3	KDB 680106	D01 RF Exposure Wireless Charging Base App v04

2.5 Equipment Approval Considerations

No.	Requirements	Conditions of the EUT
1	WPT operating frequency (or frequencies).	115~205kHz 360kHz±5kHz
2	Number of radiating structure (Coil)	Only one coil
3	Conducted Power for each radiating structure	The maximum power is 15W
4	§2.1091-Mobile or §2.1093-Portable demonstrated scenarios of operation, including RF exposure compliance information	Mobile and Portable Device
5	Maximum distance from the WPT transmitter at which, by design, a load can be charged (including slow-charging operations)	Charging with the load contact directly



Page 7 of 17

3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 8 of 17

3.3 Environmental Conditions

	Normal Conditions	Extreme Conditions
Temperature range (℃)	15 - 35	0 - 30
Relative humidity range	20 % - 75 %	20 % - 75 %
Pressure range (kPa)	86 - 106	86 - 106

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

3.4 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Test Items	Measurement Uncertainty
E-Field Strength (0.003-0.4MHz)	±1.5dB
E-Field Strength (0.4-10MHz)	±1.3dB
H-Field Strength (0.003-0.4MHz)	±1.3dB
H-Field Strength (0.4-10MHz)	±1.2dB

3.5 List of Equipment Used


Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
\boxtimes	AGC-RF-011	Broadband Field Meter	WAVECONTROL	SMP2	J-0004	2024-06-06	2025-06-05
\boxtimes	AGC-RF-012	Probe FHP	WAVECONTROL	WP400	J-0015	2024-06-06	2025-06-05



Page 9 of 17

4.System Test Configuration

4.1 Configuration of Tested System



4.2 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Wireless Charging Load		YBZ-QI 2.0	5W/7.5W/15W Max	
2	Adapter	HUAWEI	HW-200440C00		0.8m unshielded

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1					



Page 10 of 17

5. Description of Test Modes

No.	Test Mode Description	Exposure Conditions
1	Type-C Input+ EUT + Wireless Load(5W)	Mobile
2	Type-C Input+ EUT + Wireless Load(0W)	Mobile
3	EUT + Wireless Load(15W)	Portable
4	EUT + Wireless Load(7.5W)	Portable
5	EUT + Wireless Load(5W)	Portable
6	EUT + Wireless Load(0W)	Portable

Note:

- 1. All test modes were pre-tested, but we only recorded the worst case in this report.
- 2. When the output power is 15W, the operating frequency is 360±5kHz; for other output levels, the operating frequency is 115kHz-205kHz.
- 3. When the prototype is in charging state, the wireless charging power output is only 5W.




Page 11 of 17

6. Maximum Permissible Exposure

6.1 Test Limits

Frequency Range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)					
(A) Limits for Occupational/Controlled Exposures									
0.3-3.0	614	1.63	*(100)	6					
3.0-30	1842/f	4.89/f	*(900/f2)	6					
30-300	61.4	0.163	1.0	6					
300-1500	/	/	f/300	6					
1500-100,000	/	/	5	6					
	(B) Limits for Gene	eral Population/Uncontrolle	ed Exposure						
0.3-1.34	614	1.63	*(100)	30					
1.34-30	824/f	2.19/f	*(180/f2)	30					
30-300	27.5	0.073	0.2	30					
300-1500	/	/	f/1500	30					
1500-100,00	/	/	1.0	30					


- F=frequency in MHz
- *=Plane-wave equivalent power density
- RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz: 614V/m,1.63A/m).
- Per KDB 680106 D01 v04, RF exposure evaluation at 20cm surrounding the device and 20cm above the top surface. Emission between 50 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 1.63/Am and aggregate H-field strengths from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.






6.2 Test Setup (Block Diagram of Configuration)

For Mobile Test Setup:

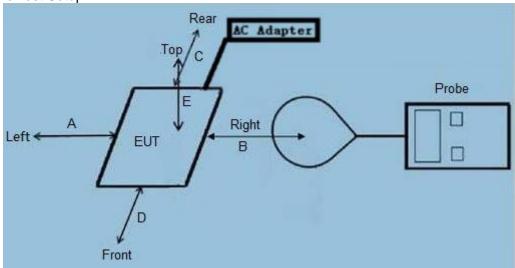


Note: The distance of the points A/B/C/D/E is 20cm.

For Portable Test Setup:

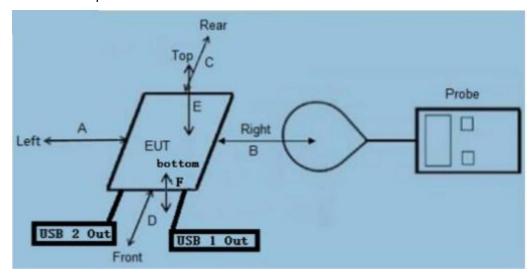


Note:

- The distance of the points A/B/C/D/E/F is 0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20cm.
- The values tested by the probe are X, Y, and Z on three axes perpendicular to the edge of the device. Top and bottom side coincident with the axis (Y) of the main coil.
- As shown in the above picture, the test layout is not for the real object, only the requirements of the test layout listed in the standard requirements are presented, for reference only.
- The actual test EUT distinguishes the test type according to the requirements as shown in the figure above.





Perform H-field/E-field measurements are taken along all three axes the device from 0cm~20cm in 2cm minimum increment for each edge surface of the host/client pair. If the center of the probe sensing element is more than 5mm from the probe outer edge, the field strengths need to be estimated for the positions that are not reachable.

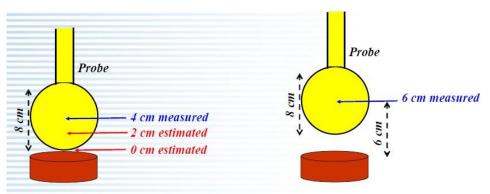

Example of probe measurements in points close to the device surface: estimates compared with measurements at 4 and 6 cm provide validation

According to Calibration information and specification about WP400 Probe, The Probe WP400 Probe's sensitive elements center is located in the probe's center, and the dimensions is 12.5x12.5mm. so the actual 0cm field strengths need to be estimated for the positions that are not reachable. The Extrapolated Value Calculation Method please Refer item 7). And the result of test distance 2cm~20cm was measured value.

WP400 Probe	Length	Width	Radius	
WP400 Plobe	12.5cm	12.5cm	6.25cm	


Note: The device is a coil emitting structure, just need to evaluated H-field.




Report No.: AGC11758240846FH01 Page 14 of 17

6.3 Test Procedures

- For Mobile Exposure Conditions:
- a) The RF exposure test was performed in anechoic chamber;
- b) E and H-field measurements should be made with the center of the probe at a distance of 20cm surrounding the EUT.
- c) The highest emission level was recorded and compared with limit.
- d) The EUT was measured according to the dictates of KDB 680106 v04.
- For Portable Exposure Conditions:
- a) The RF exposure test was performed in anechoic chamber;
- b) H-field measurements should be made along all three axes the device from 0cm~20cm in 2cm minimum increment for each edge surface of the host/client pair. If the center of the probe sensing element is more than 5mm from the probe outer edge, the field strengths need to be estimated for the positions that are not reachable, and the estimation methods are:
 - determine the distance from the test probe's sensitive elements to the probe tip based on the calibration information and/or specification of the test probe.
 - Use Biot-Savart law, equation and the measured value building mathematical model, where Biot-Savart equation is:



$$B = \frac{\mu_0 * I * N * R^2}{2 * (R^2 + x^2)^{3/2}}$$



Symbol Defini	Symbol Definition								
В	means H-field value. (Unit: A/m)								
$μ_0$ is space permeability, $μ0=4π*10^{-7}$.									
I	a current element passing through a coil. (Unit: A)								
R	the distance from the center point of the wireless charging device to other edges. R=42/2=21mm=0.21cm								
Х	means the evaluated point to the coil center. (For top & bottom side: x=test distance; For other side:x=test distance+R)								
N Number of turns, according to provided "Antenna specification" files: N=12									



Page 15 of 17

- Validate numerical calculation model through the probe measurements for the two closest points the
 device surface, and with 2cm increments, to ensure the value to show a 30% agreement between the
 model and the probe measurements.
- Estimate H-field strengths for the positions that are not reachable via numerical calculation.
- a) Test performed with all the radiating structures operating at maximum power at the same time.
- b) The highest emission level was recorded and compared with limit.
- c) The EUT was measured according to the dictates of KDB 680106 v04

6.4 Test Result

Mobile devices are evaluated as follows:

Worst Mode	Test Position	Distance (cm)	H-Field Strength (A/m)	Limit (A/m)	Result
Mode 1	Side A	20	0.251	1.63	Pass
Mode 1	Side B	20	0.182	1.63	Pass
Mode 1	Side C	20	0.213	1.63	Pass
Mode 1	Side D	20	0.178	1.63	Pass
Mode 1	Side E	20	0.103	1.63	Pass

Worst Mode	Test Position	Distance (cm)	E-Field Strength (V/m)	Limit (V/m)	Result
Mode 1	Side A	20	0.695	614	Pass
Mode 1	Side B	20	0.621	614	Pass
Mode 1	Side C	20	0.642	614	Pass
Mode 1	Side D	20	0.611	614	Pass
Mode 1	Side E	20	0.607	614	Pass



Report No.: AGC11758240846FH01 Page 16 of 17

Portable devices are evaluated as follows:

Validation results for the numerical calculation model

Worst Mode	Test Position	Distance (cm)	Measured H-Field (A/m)	Estimated H-Field (A/m)	Agreement Ratio (%)	Limit (%)	Result
Mode 1	Side A	8	0.0075	0.0074	1.34	30	Pass
Mode 1	Side A	10	0.0043	0.0040	6.59	30	Pass
Mode 1	Side B	8	0.0067	0.0055	19.67	30	Pass
Mode 1	Side B	10	0.0032	0.0033	8.45	30	Pass
Mode 1	Side C	8	0.0068	0.0054	22.95	30	Pass
Mode 1	Side C	10	0.0031	0.0038	7.79	30	Pass
Mode 1	Side D	8	0.0045	0.0038	16.87	30	Pass
Mode 1	Side D	10	0.0022	0.0017	13.33	30	Pass
Mode 1	Side E	8	0.0091	0.0087	4.49	30	Pass
Mode 1	Side E	10	0.0046	0.0049	5.71	30	Pass
Mode 1	Side F	8	0.0175	00102	11.40	30	Pass
Mode 1	Side F	10	0.0048	0.0041	15.73	30	Pass

Note: The percent ratio agreement is the difference between the estimated and measured values divided by the average of the estimated and measured values.

Final Measurement and Estimation Results (Worst Mode: Mode 1)

Measured H-Field Strength Values (A/m)									
Test Distance	_	Test Position						Limit	D 11
(cm)	Туре	Side A	Side B	Side C	Side D	Side E	Side F	(A/m)	Result
0	Estimate	1.0152	0.7792	0.8336	0.6502	0.6952	0.7656	1.63	Pass
2	Estimate	0.1265	0.0973	0.1041	0.0806	0.2454	0.2862	1.63	Pass
4	Estimate	0.0358	0.0316	0.0346	0.0232	0.0652	0.0718	1.63	Pass
6	Estimate	0.0148	0.0128	0.0142	0.0096	0.0224	0.0226	1.63	Pass
8	Measured	0.0075	0.0067	0.0068	0.0045	0.0091	0.0102	1.63	Pass
10	Measured	0.0043	0.0032	0.0031	0.0022	0.0046	0.0048	1.63	Pass
12	Measured	0.0025	0.0021	0.0024	0.0011	0.0029	0.0024	1.63	Pass
14	Measured	0.0021	0.0017	0.0019	0.0009	0.0021	0.0019	1.63	Pass
16	Measured	0.0018	0.0015	0.0014	0.0007	0.0017	0.0016	1.63	Pass
18	Measured	0.0015	0.0013	0.0012	0.0005	0.0013	0.0014	1.63	Pass
20	Measured	0.0012	0.0011	0.0010	0.0003	0.0011	0.0012	1.63	Pass



Page 17 of 17

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC11758240846AP02

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC11758240846AP03

----End of Report----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.