


Antenna


1、S11

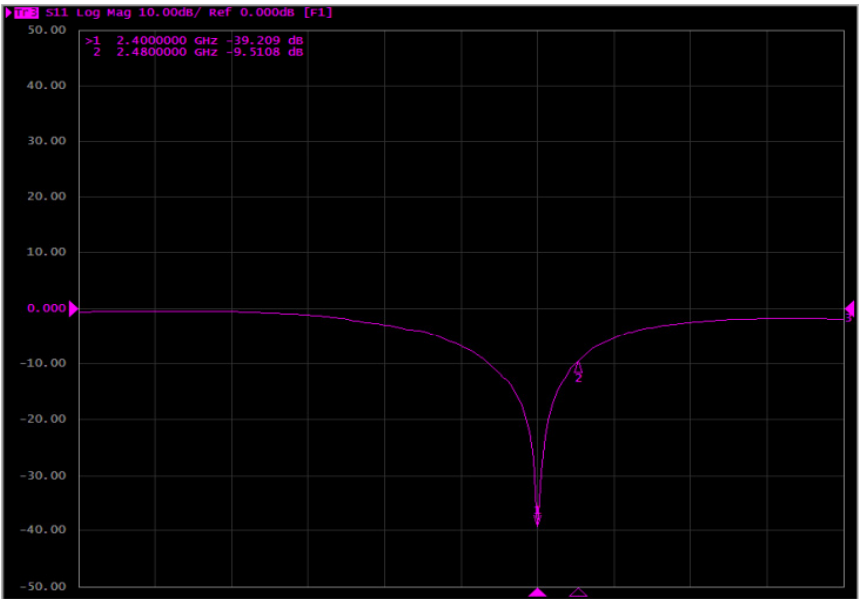


2. Passive OTA


	2.400G	2.405G	2.410G	2.415G	2.420G	2.425G	2.430G	2.435G	2.440G	2.445G	2.450G	2.455G	2.460G	2.465G	2.470G	2.475G	2.480G
Efficiency(%)	53.92	54.07	53.93	53.95	54.09	54.01	54.17	54.32	54.29	53.88	53.17	52.52	51.56	50.95	50.41	50.28	50.03
Maximum gain(dBi)	0.66	0.70	0.70	0.71	0.74	0.72	0.71	0.74	0.79	0.76	0.64	0.55	0.55	0.62	0.71	0.76	0.82
Average gain(dBi)	-2.68	-2.67	-2.68	-2.68	-2.67	-2.68	-2.66	-2.65	-2.65	-2.69	-2.74	-2.80	-2.88	-2.93	-2.97	-2.99	-3.01

2.44GHz X-Y plane View

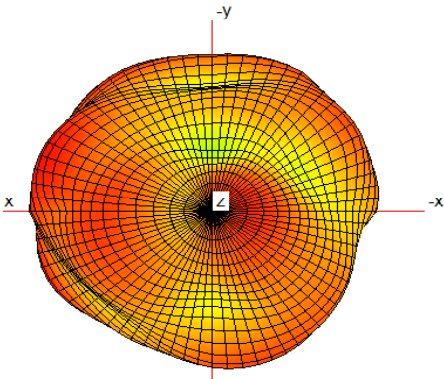

2.44GHz Y-Z plane View

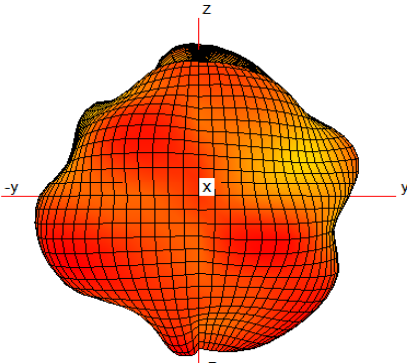

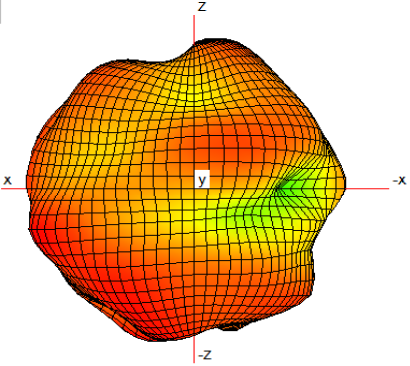2.44GHz X-Z plane View	
	
Manufacture: YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD. Address: No.666 Hu'an Rd. Huli District Xiamen City, Fujian, P.R. China Model: BH76LD-ANT-V10	

Antenna Dimensions

