


REVISIONS

REV	DESCRIPTION	DATE	APPROVE
A	NEW RELEASE	01/07/19	EDWARD SU



REEL DIRECTION ↓

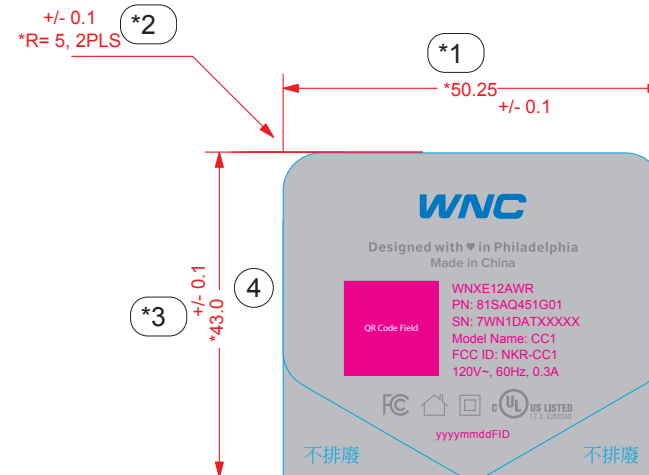

NOTES:

1. MATERIAL: WHITE PET(金利宝HTYL50(EB)), t=0.05

ADHESIVE: 網紋背膠, t=0.035

FINISH: 上霧PET(廣爾納T025ATMJ(T)(30)(B)), t=0.025

2. COLOR:

a. 底色為白色

b. 網版印刷/印刷顏色如圖面標示

3. 捲狀出貨, 無須虛刀

4. 離型紙左右間距各3±0.5mm, 上下間距各3.0±0.5mm

5. 被貼物材質:PC

6. UL Approved,PGJ12

須搭配碳帶: Ricoh Company Ltd., Type "B110A", "B110C" or "B110CX" thermal transfer ribbons.

色版 C8A-S0165
PANTONE COOL GREY 8C
ONLINE PRINT (FOR REFERENCE ONLY)
DIE CUT

TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1 附著力測試	ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5 % is affected.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE: INTEGRAL DIMENSIONS ± 0.2 1 PLACE DECIMAL ± 0.2 ANGULAR DIMENSIONS ± 2° HOLES UNDER Ø5.00 ± 0.2		THIRD ANGLE PROJECTION 		WNC 啟碁科技股份有限公司 Wistron NeWeb Corp. 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C. Tel: 886-3-6667799 Fax: 886-3-5788726	
DRAWN AMANDA LAI		01/07/19		DWG TITLE LABEL, PR, SFINITY, XE1v2-WN, CHINA, SAQ4-CC1	
ENGR AMANDA LAI		01/07/19		SIZE A4	REV A
APVD EDWARD SU		01/07/19		SCALE 1/1	SHEET 1 OF 1