

TEST REPORT

Application No.: SZCR2310003424AT
Applicant: Baicells Technologies Co., Ltd.
Address of Applicant: 9-10F,1stBldg.,No.81BeiqingRoad,Haidian District,Beijing,China
Manufacturer: Baicells Technologies Co., Ltd.
Address of Manufacturer: 9-10F,1stBldg.,No.81BeiqingRoad,Haidian District,Beijing,China
Equipment Under Test (EUT):
EUT Name: 5G Indoor CPE
Model No.: EG3661M-NR6
Trade Mark: Baicells
FCC ID: 2AG32EG3661MNR6
Standard(s) : 47 CFR Part 15, Subpart E 15.407
Date of Receipt: 2023-10-25
Date of Test: 2024-06-07 to 2024-06-21
Date of Issue: 2024-07-03

Test Result:	Pass*

* In the configuration tested, the EUT complied with the standards specified above.

Keny Xu

Keny Xu
EMC Laboratory Manager



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 2 of 1015

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2024-07-03		Original

Authorized for issue by:				
		Frank Chen		
		Frank Chen/Project Engineer		
		Eric Fu		
		Eric Fu/Reviewer		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass
Transmission in the Absence of Data		N/A	47 CFR Part 15, Subpart E 15.407 (c)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)	Pass
Duty Cycle		KDB 789033 II B 1	KDB 789033 D02 II B 1	Pass
99% Bandwidth		KDB 789033 II D	N/A	Pass
26dB Emission bandwidth		KDB 789033 D02 II C 1	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Minimum 6 dB bandwidth (5.725-5.85 GHz band)		KDB 789033 D02 II C 2	47 CFR Part 15, Subpart E 15.407 (e)	Pass
Maximum Conducted output power		KDB 789033 D02 II E	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Peak Power spectrum density		KDB 789033 D02 II F	47 CFR Part 15, Subpart E 15.407 (a)	Pass
In-Band Emissions		KDB 987594 D02 U-NII 6GHz EMC Measurement v02r01	47 CFR Part 15, Subpart E 15.407 (b)(7)	Pass
Radiated Emissions (Below 1GHz)		KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions (Above 1GHz)		KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions which fall in the restricted bands		KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Frequency Stability		ANSI C63.10 (2013) Section 6.8	47 CFR Part 15, Subpart E 15.407 (g)	Pass
Transmitter Power Control		KDB 789033 D02 II E	47 CFR Part 15, Subpart E 15.407 (h)(1)	Pass
Contention Based Protocol		KDB 987594 D02 v02r01	47 CFR Part 15, Subpart E 15.407 (d)	Pass*

Remark: * the Contention Based Protocol test is only apply for 6G WiFi function.



3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	7
4.1 Details of E.U.T.	7
4.2 Description of Test Mode	8
4.3 Description of Support Units	10
4.4 Measurement Uncertainty	11
4.5 Test Location	12
4.6 Test Facility	12
4.7 Deviation from Standards	12
4.8 Abnormalities from Standard Conditions	12
5 Equipment List	13
6 Radio Spectrum Technical Requirement	19
6.1 Antenna Requirement	19
6.1.1 Test Requirement:	19
6.1.2 Conclusion	19
6.2 Transmission in the Absence of Data	20
6.2.1 Test Requirement:	20
6.2.2 Conclusion	20
7 Radio Spectrum Matter Test Results	21
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	21
7.1.1 E.U.T. Operation	21
7.1.2 Test Setup Diagram	22
7.1.3 Measurement Procedure and Data	22
7.2 Duty Cycle	25
7.2.1 E.U.T. Operation	25
7.2.2 Test Mode Description	25
7.2.3 Test Setup Diagram	25
7.2.4 Measurement Procedure and Data	25
7.3 99% Bandwidth	26
7.3.1 E.U.T. Operation	26
7.3.2 Test Mode Description	26
7.3.3 Test Setup Diagram	26
7.3.4 Measurement Procedure and Data	26
7.4 26dB Emission bandwidth	27
7.4.1 E.U.T. Operation	27
7.4.2 Test Mode Description	27



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 5 of 1015

7.4.3	Test Setup Diagram	27
7.4.4	Measurement Procedure and Data.....	27
7.5	Minimum 6 dB bandwidth.....	28
7.5.1	E.U.T. Operation	28
7.5.2	Test Mode Description	28
7.5.3	Test Setup Diagram	28
7.5.4	Measurement Procedure and Data.....	28
7.6	In-Band Emissions	29
7.6.1	E.U.T. Operation	29
7.6.2	Test Mode Description	29
7.6.3	Test Setup Diagram	30
7.6.4	Measurement Procedure and Data.....	30
7.7	Maximum Conducted output power	31
7.7.1	E.U.T. Operation	31
7.7.2	Test Mode Description	31
7.7.3	Test Setup Diagram	32
7.7.4	Measurement Procedure and Data.....	32
7.8	Peak Power spectrum density.....	33
7.8.1	E.U.T. Operation	33
7.8.2	Test Mode Description	33
7.8.3	Test Setup Diagram	34
7.8.4	Measurement Procedure and Data.....	34
7.9	Radiated Emissions (Below 1GHz)	35
7.9.1	E.U.T. Operation	35
7.9.2	Test Mode Description	35
7.9.3	Test Setup Diagram	36
7.9.4	Measurement Procedure and Data.....	37
7.10	Radiated Emissions (Above 1GHz).....	40
7.10.1	E.U.T. Operation.....	40
7.10.2	Test Mode Description.....	41
7.10.3	Test Setup Diagram.....	41
7.10.4	Measurement Procedure and Data	42
7.11	Radiated Emissions which fall in the restricted bands	231
7.11.1	E.U.T. Operation.....	231
7.11.2	Test Mode Description.....	232
7.11.3	Test Setup Diagram.....	232
7.11.4	Measurement Procedure and Data	233
7.12	Frequency Stability.....	402
7.12.1	E.U.T. Operation.....	402
7.12.2	Test Mode Description.....	402
7.12.3	Test Setup Diagram.....	402
7.12.4	Measurement Procedure and Data	402
7.13	Transmitter Power Control	403
7.13.1	E.U.T. Operation.....	403
7.13.2	Test Mode Description.....	403
7.13.3	Test Setup Diagram.....	403
7.13.4	Measurement Procedure and Data	403
7.14	Contention Based Protocol	404
7.14.1	E.U.T. Operation.....	404
7.14.2	Test Mode Description.....	404



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 6 of 1015

7.14.3	Test Setup Diagram.....	404
7.14.4	Measurement Procedure and Data	405
7.14.5	Measurement Procedure and Data	405
8	Test Setup Photo	406
9	EUT Constructional Details (EUT Photos)	406
10	Appendix.....	407



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply:		AC/DC ADAPTOR Model: DCT36W120300US-A2 Input Power: AC 100-240V~, 50/60Hz 1.0A MAX; DC Output: 12V 3A		
Cable(s):		DC cable:150cm unshielded		
Cable Loss (for RF conducted test):		1.5dB		
Operation Frequency:	Band	Mode	Frequency Range(MHz)	Number of channels
	UNII Band 1	802.11a/n(HT20)/ac(HT20)/ax(HEW20):	5180-5240	4
		802.11n(HT40)/ac(HT40)/ax(HEW40)	5190-5230	2
		802.11ac(HT80)/ax(HEW80)	5210	1
		802.11ac(HT160)/ax(HEW160)	5250	1
	UNII Band 2-A	802.11a/n(HT20)/ac(HT20)/ax(HEW20):	5260-5320	4
		802.11n(HT40)/ac(HT40)/ax(HEW40)	5270-5310	2
		802.11ac(HT80)/ax(HEW80)	5290	1
	UNII Band 2-C	802.11a/n(HT20)/ac(HT20)/ax(HEW20):	5500-5700	11
		802.11n(HT40)/ac(HT40)/ax(HEW40)	5510-5670	5
		802.11ac(HT80)/ax(HEW80)	5530,5610	2
		802.11ac(HT160)/ax(HEW160)	5570	1
	UNII Band 3	802.11a/n(HT20)/ac(HT20)/ax(HEW20):	5745-5825	5
		802.11n(HT40)/ac(HT40)/ax(HEW40)	5755-5795	2
		802.11ac(HT80)/ax(HEW80)	5775	1
	UNII Band 5	802.11a/n/ac/ax(HT20)	6115-6415	16
		802.11n/ac/ax(HT40)	6125-6405	8
		802.11ac/ax(HT80)	6145-6385	4
		802.11ac/ax(HT160)	6185-6345	2
	UNII Band 6	802.11a/n/ac/ax(HT20)	6435-6515	5
		802.11n/ac/ax(HT40)	6445-6485	2
		802.11ac/ax(HT80)	6465-6545	2
		802.11ac/ax(HT160)	6505	1
	UNII Band 7	802.11a/n/ac/ax(HT20)	6535-6855	17
		802.11n/ac/ax(HT40)	6525-6845	9
		802.11ac/ax(HT80)	6625-6785	3
		802.11ac/ax(HT160)	6665	1
	UNII Band 8	802.11a/n/ac/ax(HT20)	6875-7115	13
		802.11n/ac/ax(HT40)	6885-7085	6
		802.11ac/ax(HT80)	6865-7025	3
		802.11ac/ax(HT160)	6985	1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 8 of 1015

Modulation Type:	OFDM (64QAM, 16QAM, QPSK, BPSK); 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM); 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM); 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024-QAM)					
Channel Spacing:	802.11a/n/ac/ax 20: 20MHz; 802.11n/ac/ax 40: 40MHz; 802.11ac/ax 80: 80MHz; 802.11 ax 160: 160MHz					
DFS Function:	Support					
TPC Function:	Support					
Antenna Type:	Dipole Antenna					
Antenna Gain for WiFi 5G Band:	/	UNII Band 1	UNII Band 2A	UNII Band 2C	UNII Band 3	
	ANT 1	4.51dBi	4.51dBi	4.96dBi	3.98dBi	
	ANT 2	4.51dBi	4.51dBi	4.96dBi	3.98dBi	
Antenna Gain for WiFi 6E Band:	/	UNII Band 5	UNII Band 6	UNII Band 7	UNII Band 8	
	ANT 1	4.84dBi	4.84dBi	4.96dBi	4.84dBi	
	ANT 2	4.84dBi	4.84dBi	4.96dBi	4.84dBi	

Remark: The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

4.2 Description of Test Mode

Mode Code	Description
01	TX mode (U-NII-1) Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT160), data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW80), data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW160). final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.
02	TX mode (U-NII-2A) Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT160), data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW80), data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW160), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 9 of 1015

03	TX mode (U-NII-2C)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT160),data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW80), data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW160),final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.
04	TX mode (U-NII-3)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW80), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.
05	TX mode (U-NII-5)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT160),data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW80), data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW160),final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.
06	TX mode (U-NII-6)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW80), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 10 of 1015

07	TX mode (U-NII-7)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT160),data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW80), data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW160),final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.
08	TX mode (U-NII-8)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT160),data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW80), data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW160),final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
--	--	--	--
The EUT has been tested as an independent unit.			



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4.4 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	$\pm 3.1\text{dB}$
Duty Cycle	$\pm 0.37\%$
99% Bandwidth	$\pm 3\%$
26dB Emission bandwidth	$\pm 3\%$
In-Band Emissions	$\pm 3\%$
Minimum 6 dB bandwidth (5.725-5.85 GHz band)	$\pm 3\%$
Maximum Conducted output power	$\pm 0.75\text{dB}$
Peak Power spectrum density	$\pm 2.84\text{dB}$
Radiated Emissions (Below 1GHz)	$\pm 6.0\text{dB}$ for 3m; $\pm 5.0\text{dB}$ for 10m
Radiated Emissions (Above 1GHz)	$\pm 4.6\text{dB}$ (1-18GHz); $\pm 4.8\text{dB}$ (18-40GHz)
Radiated Emissions which fall in the restricted bands	$\pm 6.0\text{dB}$ (below 1GHz); $\pm 4.6\text{dB}$ (above 1GHz);
Frequency Stability	$\pm 7.25 \times 10^{-8}$
Transmitter Power Control	$\pm 0.75\text{dB}$
Remark: The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.	

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 12 of 1015

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI (Member No. 1937)

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC –Designation Number: CN1336

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

• Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2022-05-14	2025-05-13
EMI Test Receiver	Rohde&Schwarz	ESCI	SEM004-02	2024-03-14	2025-03-13
Matching Pad	N/A	N/A	SEM021-23	2024-03-20	2025-03-19
Matching Pad	N/A	N/A	SEM021-24	2024-03-20	2025-03-19
Measurement Software	AUDIX	e3 V8.2014-6-27a	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2023-07-07	2024-07-06
LISN	Rohde&Schwarz	ENV216	SEM007-01	2023-09-19	2024-09-18
LISN	ETS-LINDGREN	3816/2	SEM007-02	2024-03-14	2025-03-13

Duty Cycle					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2023-10-19	2024-10-18
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2024-03-14	2025-03-13
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2023-09-19	2024-09-18
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2023-07-07	2024-07-06
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2024-03-27	2025-03-26
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2024-03-19	2025-03-18

99% Bandwidth					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2023-10-19	2024-10-18
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2024-03-14	2025-03-13
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2023-09-19	2024-09-18
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2023-07-07	2024-07-06
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2024-03-27	2025-03-26
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2024-03-19	2025-03-18



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 14 of 1015

26dB Emission bandwidth					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2023-10-19	2024-10-18
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2024-03-14	2025-03-13
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2023-09-19	2024-09-18
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2023-07-07	2024-07-06
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2024-03-27	2025-03-26
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2024-03-19	2025-03-18

In-Band Emissions					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2023-10-19	2024-10-18
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2024-03-14	2025-03-13
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2023-09-19	2024-09-18
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2023-07-07	2024-07-06
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2024-03-27	2025-03-26
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2024-03-19	2025-03-18

Minimum 6 dB bandwidth (5.725-5.85 GHz band)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2023-10-19	2024-10-18
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2024-03-14	2025-03-13
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2023-09-19	2024-09-18
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2023-07-07	2024-07-06
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2024-03-27	2025-03-26
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2024-03-19	2025-03-18



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 15 of 1015

Maximum Conducted output power					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Power Sensor	TST PASS	TSPS2023R	SEM009-26	2024-03-27	2025-03-26
Power Sensor	KEYSIGHT	U2021XA	SEM009-16	2024-03-14	2025-03-13
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2023-10-19	2024-10-18
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2024-03-14	2025-03-13
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2023-09-19	2024-09-18
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2023-07-07	2024-07-06
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2024-03-27	2025-03-26
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2024-03-19	2025-03-18

Peak Power spectrum density					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2023-10-19	2024-10-18
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2024-03-14	2025-03-13
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2023-09-19	2024-09-18
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2023-07-07	2024-07-06
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2024-03-27	2025-03-26
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2024-03-19	2025-03-18

Radiated Emissions (Below 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Loop Antenna	ETS-Lindgren	6502	SEM003-08	2023-11-20	2025-11-19
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2023-06-19	2026-06-18
MXE EMI Receiver	Agilent Technologies	N9038A	SEM004-15	2023-10-19	2024-10-18
BiConiLog Antenna	ETS-LINDGREN	3142C	SEM003-01	2023-09-16	2025-09-15
Pre-Amplifier	Agilent Technologies	8447D	SEM005-01	2024-03-14	2025-03-13
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2023-07-07	2024-07-06



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 16 of 1015

Radiated Emissions (Above 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
3m Fully-Anechoic Chamber	AUDIX	N/A	SEM001-02	2024-05-11	2027-05-10
Signal Analyzer	Rohde & Schwarz	FSV40	SEM008-04	2024-03-15	2025-03-14
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2023-07-23	2025-07-22
Microwave system amplifier	Agilent	83017A	SEM005-25	2023-09-19	2024-09-18
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2023-07-07	2024-07-06
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	SEM003-15	2022-08-10	2024-08-09
Pre-Amplifier	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2024-03-15	2025-03-14

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
3m Fully-Anechoic Chamber	AUDIX	N/A	SEM001-02	2024-05-11	2027-05-10
Signal Analyzer	Rohde & Schwarz	FSV40	SEM008-04	2024-03-15	2025-03-14
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2023-07-23	2025-07-22
Microwave system amplifier	Agilent	83017A	SEM005-25	2023-09-19	2024-09-18
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2023-07-07	2024-07-06

Frequency Stability					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2023-10-19	2024-10-18
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2024-03-14	2025-03-13
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2023-09-19	2024-09-18
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2023-07-07	2024-07-06
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2024-03-27	2025-03-26
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2024-03-19	2025-03-18

Transmitter Power Control



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SGS-CSTC Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 17 of 1015

Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2023-10-19	2024-10-18
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2024-03-14	2025-03-13
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2023-09-19	2024-09-18
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2023-07-07	2024-07-06
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2024-03-27	2025-03-26
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2024-03-19	2025-03-18



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 18 of 1015

CBP					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Shielding Room	AUDIX	N/A	SEM001-08	2022-05-14	2025-05-13
EXA Signal Analyzer	KEYSIGHT	N9010A	SEM004-09	2024-03-27	2025-03-26
Signal Generator	KEYSIGHT	N5171B	SEM006-13	2024-03-14	2025-03-13
MXG Vector Signal Generator	KEYSIGHT	N5182A	SEM006-14	2024-03-14	2025-03-13
ESG Vector Signal Generator	KEYSIGHT	E4438C	SEM006-15	2023-09-19	2024-09-18
DC Power Supply	KEYSIGHT	E3642A	SEM011-07	2024-03-19	2025-03-18
Manual Step Attenuator	KEYSIGHT	8494B	SEM021-05	2024-03-27	2025-03-26
Manual Step Attenuator	KEYSIGHT	8496B	SEM021-06	2024-03-27	2025-03-26
Power Sensor	TST PASS	TSPS2023R	SEM009-26	2024-03-27	2025-03-26
Power Sensor	TST PASS	TSPS2023R	SEM009-27	2024-03-27	2025-03-26
Power Sensor	TST PASS	TSPS2023R	SEM009-28	2024-03-27	2025-03-26
Power Sensor	TST PASS	TSPS2023R	SEM009-29	2024-03-27	2025-03-26
Programmable Temperature&Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2024-03-19	2025-03-18
Universal Radio Communication Tester	Rohde&Schwarz	CMW500	SEM010-08	2024-03-14	2025-03-13
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM028-01	2023-07-07	2024-07-06

General used equipment					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	deli	8838	SEM002-32	2023-07-28	2024-07-27
Humidity/ Temperature Indicator	deli	8838	SEM002-33	2023-07-28	2024-07-27
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2024-03-18	2025-03-17



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain as below:

/	UNII Band 1	UNII Band 2A	UNII Band 2C	UNII Band 3	UNII Band 5	UNII Band 6
ANT 1	4.51dBi	4.51dBi	4.96dBi	3.98dBi	4.84dBi	4.84dBi
ANT 2	4.51dBi	4.51dBi	4.96dBi	3.98dBi	4.84dBi	4.84dBi

Antenna location: Refer to internal photo.



6.2 Transmission in the Absence of Data

6.2.1 Test Requirement:

47 CFR Part 15, Subpart E 15.407 (c)

6.2.2 Conclusion

Standard Requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

EUT Details:

WIFI chip support automatically discontinue transmission in case of either absence of information to transmit or operational failure, if the chip detect absence of information to transmit or operational failure, it will be automatically shut off.



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 23.4 °C

Humidity: 47.3 % RH


Atmospheric Pressure: 1000 mbar

Pre-scan / Final test	Mode Code
Final test	01
Pre-scan	02
Pre-scan	03
Pre-scan	04
Pre-scan	05
Pre-scan	06
Pre-scan	07
Pre-scan	08

Please refer to Clause 4.2 for the detail of the test modes.



7.1.2 Test Setup Diagram

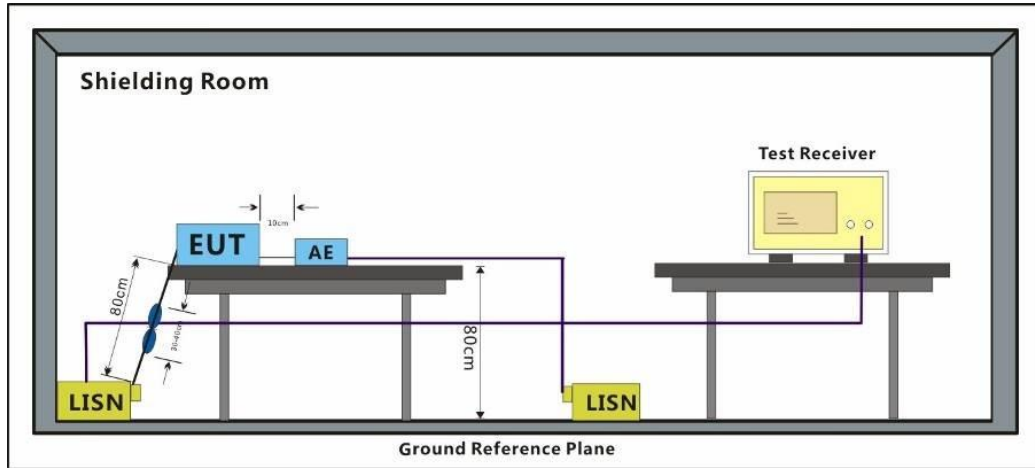

7.1.3 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 23 of 1015

Test Mode: 01; Line: Live line

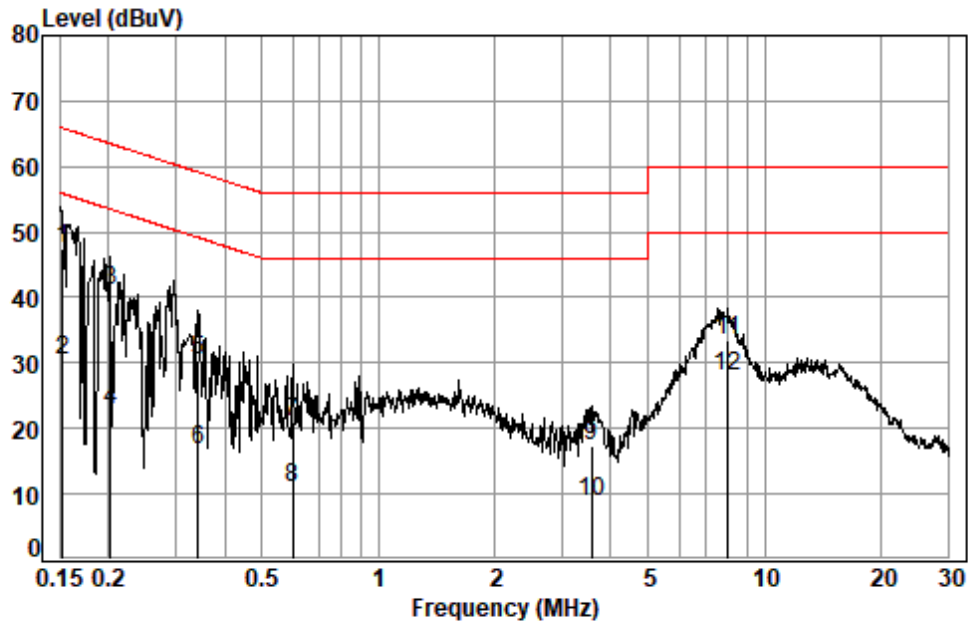

Site : Shielding Room
Condition: Line
Job No. : 03424AT
Test mode: 01

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1 *	0.1524	0.11	9.70	37.65	47.46	65.87	-18.41	QP
2	0.1524	0.11	9.70	20.54	30.35	55.87	-25.52	Average
3	0.2029	0.11	9.72	31.30	41.13	63.49	-22.36	QP
4	0.2029	0.11	9.72	13.02	22.85	53.49	-30.64	Average
5	0.3410	0.13	9.75	20.58	30.46	59.18	-28.72	QP
6	0.3410	0.13	9.75	6.74	16.62	49.18	-32.56	Average
7	0.6011	0.16	9.77	11.18	21.11	56.00	-34.89	QP
8	0.6011	0.16	9.77	1.16	11.09	46.00	-34.91	Average
9	3.5654	0.20	9.86	7.41	17.47	56.00	-38.53	QP
10	3.5654	0.20	9.86	-1.29	8.77	46.00	-37.23	Average
11	8.0624	0.20	10.09	23.10	33.39	60.00	-26.61	QP
12 *	8.0624	0.20	10.09	17.70	27.99	50.00	-22.01	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (Shenzhen) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 01; Line: Neutral Line

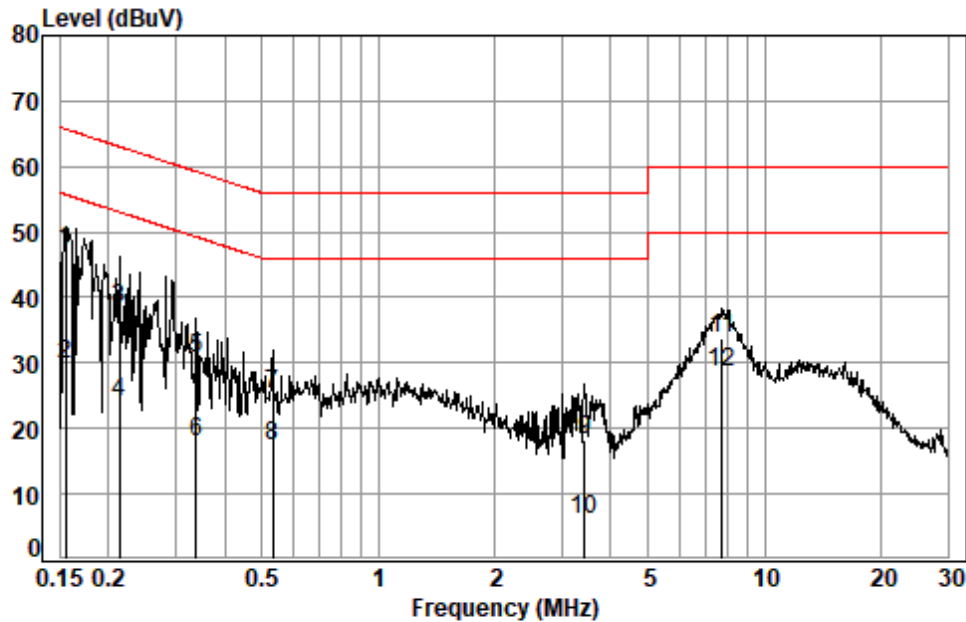

Site : Shielding Room
Condition: Neutral
Job No. : 03424AT
Test mode: 01

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1 *	0.1548	0.11	9.71	37.33	47.15	65.74	-18.59	QP
2	0.1548	0.11	9.71	19.97	29.79	55.74	-25.95	Average
3	0.2139	0.11	9.72	28.51	38.34	63.05	-24.71	QP
4	0.2139	0.11	9.72	14.12	23.95	53.05	-29.10	Average
5	0.3374	0.13	9.75	20.88	30.76	59.27	-28.51	QP
6	0.3374	0.13	9.75	8.00	17.88	49.27	-31.39	Average
7	0.5322	0.15	9.76	15.28	25.19	56.00	-30.81	QP
8	0.5322	0.15	9.76	7.52	17.43	46.00	-28.57	Average
9	3.4174	0.20	9.86	8.25	18.31	56.00	-37.69	QP
10	3.4174	0.20	9.86	-4.10	5.96	46.00	-40.04	Average
11	7.7689	0.20	10.09	23.48	33.77	60.00	-26.23	QP
12 *	7.7689	0.20	10.09	18.37	28.66	50.00	-21.34	Average



7.2 Duty Cycle

Test Requirement: KDB 789033 D02 II B 1
Test Method: KDB 789033 II B 1

7.2.1 E.U.T. Operation


Operating Environment:
Temperature: 25.7 °C Humidity: 42.3 % RH Atmospheric Pressure: 1000 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code
Final test	01
Final test	02
Final test	03
Final test	04
Final test	05
Final test	06
Final test	07
Final test	08

Please refer to Clause 4.2 for the detail of the test modes.

7.2.3 Test Setup Diagram

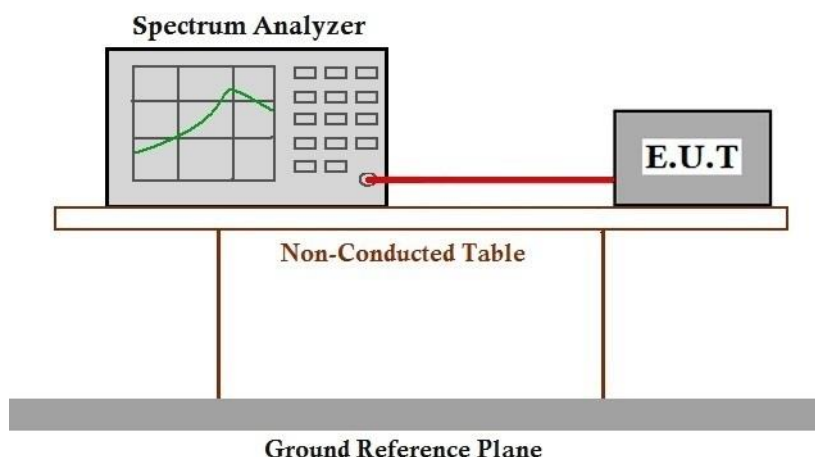

7.2.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.3 99% Bandwidth

Test Requirement N/A
Test Method: KDB 789033 II D

7.3.1 E.U.T. Operation


Operating Environment:
Temperature: 25.7 °C Humidity: 42.3 % RH Atmospheric Pressure: 1000 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code
Final test	01
Final test	02
Final test	03
Final test	04
Final test	05
Final test	06
Final test	07
Final test	08

Please refer to Clause 4.2 for the detail of the test modes.

7.3.3 Test Setup Diagram

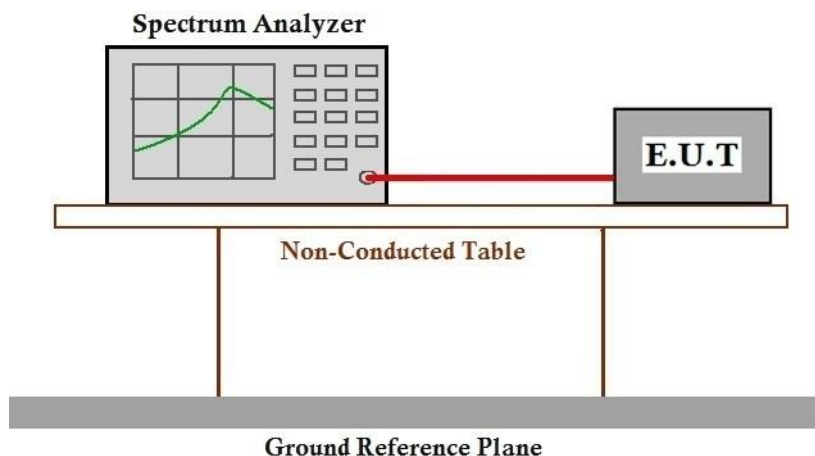

7.3.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.4 26dB Emission bandwidth

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: KDB 789033 D02 II C 1

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 25.7 °C

Humidity: 42.3 % RH


Atmospheric Pressure: 1000 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code
Final test	01
Final test	02
Final test	03
Final test	04
Final test	05
Final test	06
Final test	07
Final test	08

Please refer to Clause 4.2 for the detail of the test modes.

7.4.3 Test Setup Diagram

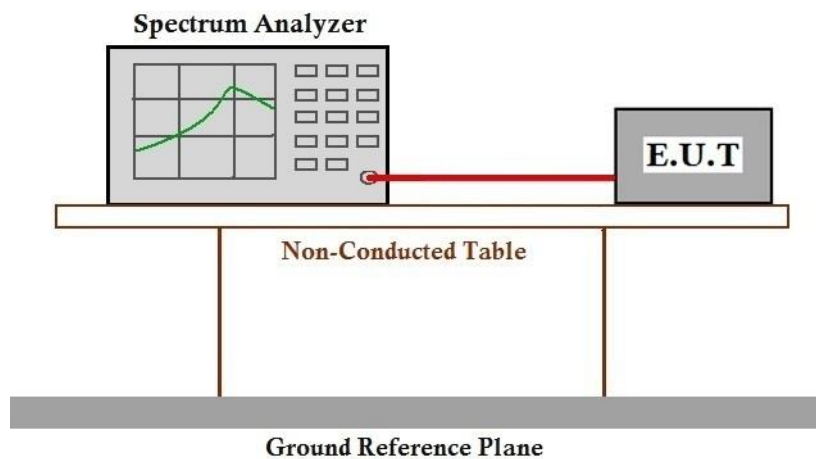

7.4.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.5 Minimum 6 dB bandwidth

Test Requirement 47 CFR Part 15, Subpart E 15.407 (e)

Test Method: KDB 789033 D02 II C 2

Limit:

Frequency band(MHz)	Limit
5725-5850	≥500 kHz

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 25.7 °C

Humidity: 42.3 % RH


Atmospheric Pressure: 1000 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code
Final test	04
Final test	05
Final test	06
Final test	07
Final test	08

Please refer to Clause 4.2 for the detail of the test modes.

7.5.3 Test Setup Diagram

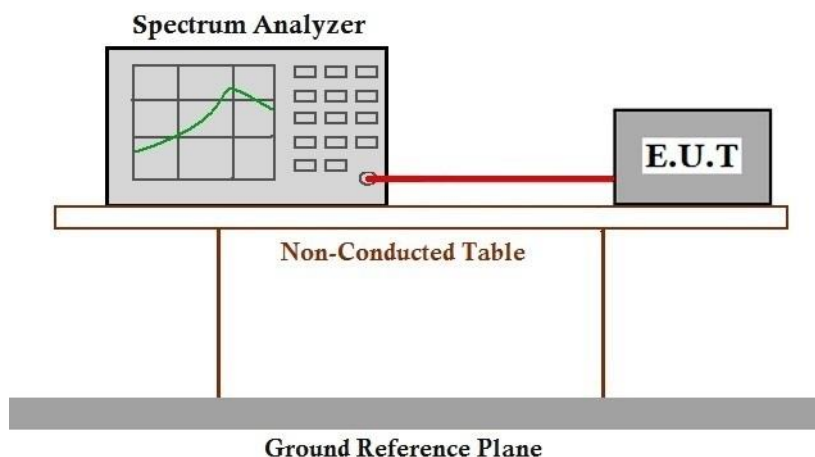

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.6 In-Band Emissions

Test Requirement 47 CFR Part 15, Subpart E 15.407 (b)(7)
Test Method: KDB 987594 D02 U-NII 6GHz EMC Measurement v02r01

Limit:

For transmitters operating within the 5.925–7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

7.6.1 E.U.T. Operation


Operating Environment:
Temperature: 25.7 °C Humidity: 42.3 % RH Atmospheric Pressure: 1000 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code
Final test	05
Final test	06
Final test	07
Final test	08

Please refer to Clause 4.2 for the detail of the test modes.

7.6.3 Test Setup Diagram

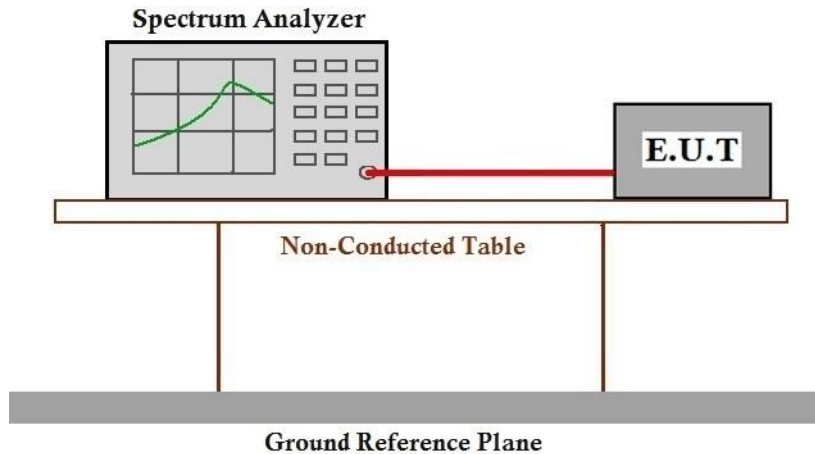

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch
Inspection & Testing Services

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.7 Maximum Conducted output power

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: KDB 789033 D02 II E

Limit:

Frequency band(MHz)	Limit
5150-5250	≤1W(30dBm) for master device
	≤250mW(24dBm) for client device
5250-5350	≤250mW(24dBm) or 11dBm+10logB*
5470-5725	≤250mW(24dBm) or 11dBm+10logB*
5725-5850	≤1W(30dBm)
Remark:	* Where B is the 26dB emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 25.7 °C

Humidity: 42.3 % RH

Atmospheric Pressure: 1000 mbar


7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code
Final test	01
Final test	02
Final test	03
Final test	04
Final test	05
Final test	06
Final test	07
Final test	08

Please refer to Clause 4.2 for the detail of the test modes.



7.7.3 Test Setup Diagram

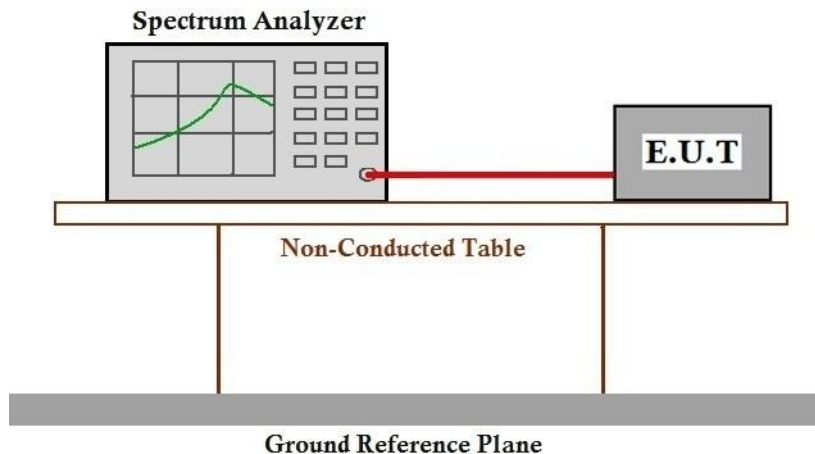

7.7.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.8 Peak Power spectrum density

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: KDB 789033 D02 II F

Limit:

Frequency band(MHz)	Limit
5150-5250	≤17dBm in 1MHz for master device
	≤11dBm in 1MHz for client device
5250-5350	≤11dBm in 1MHz for client device
5470-5725	≤11dBm in 1MHz for client device
5725-5850	≤30dBm in 500 kHz
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 25.7 °C

Humidity: 42.3 % RH

Atmospheric Pressure: 1000 mbar


7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code
Final test	01
Final test	02
Final test	03
Final test	04
Final test	05
Final test	06
Final test	07
Final test	08

Please refer to Clause 4.2 for the detail of the test modes.



7.8.3 Test Setup Diagram

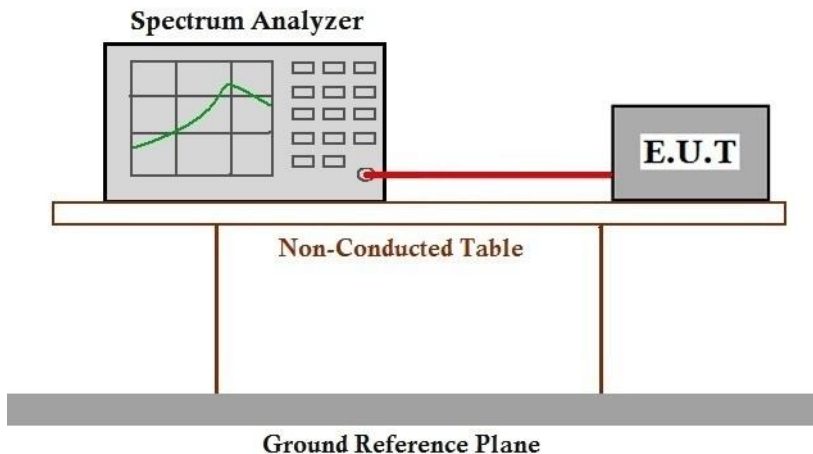

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.9 Radiated Emissions (Below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: KDB 789033 D02 II G

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 23.2 °C

Humidity: 45.8 % RH

Atmospheric Pressure: 1000 mbar


7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code
Final test	01
Pre-scan	02
Pre-scan	03
Pre-scan	04
Pre-scan	05
Pre-scan	06
Pre-scan	07
Pre-scan	08

Please refer to Clause 4.2 for the detail of the test modes.



7.9.3 Test Setup Diagram

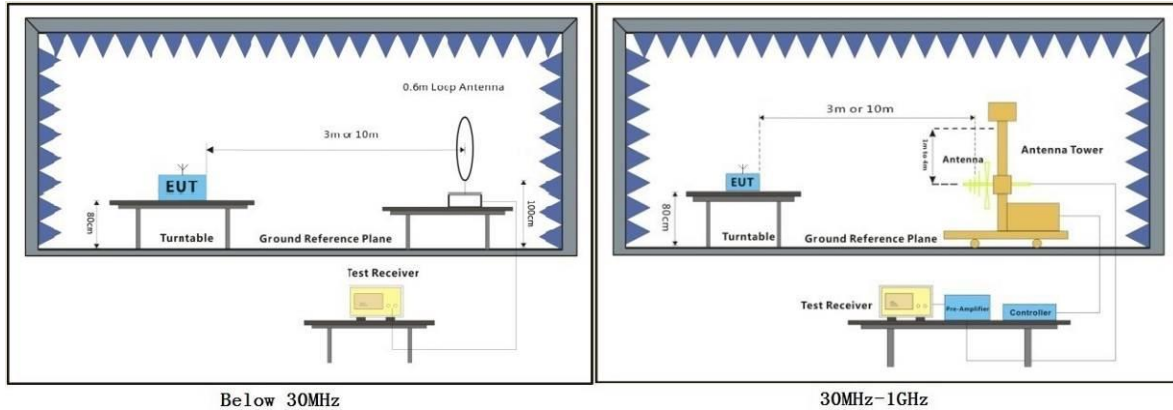

7.9.4 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11a. Only the worst case is recorded in the report.
3. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
4. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.



Test Mode: 01; Polarity: Horizontal

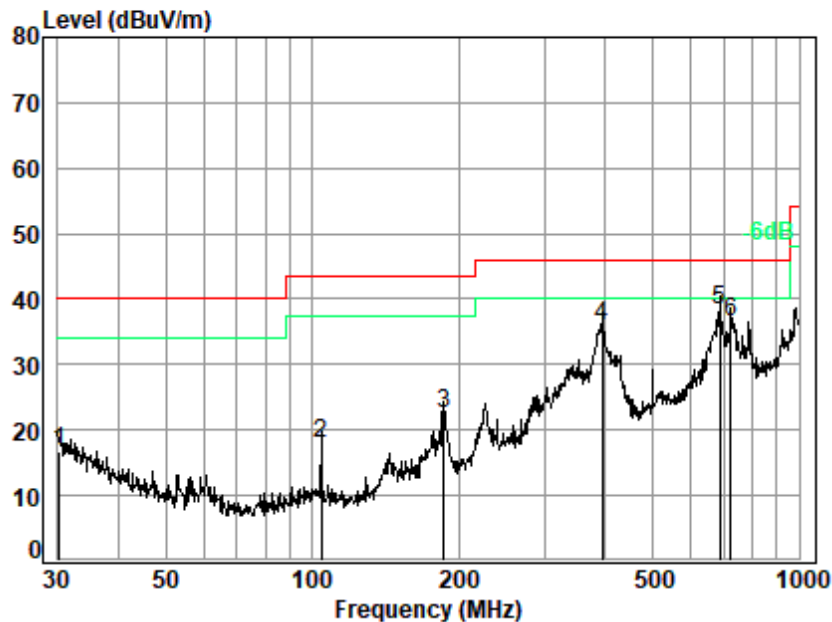

Site : chamber

Condition: 3m HORIZONTAL


Job No. : 03424AT

Test Mode: 01

	Ant	Cable	Preamp	Read		Limit	Over	
Freq	Factor	Loss	Factor	Level	Level	Line	Limit	Remark
MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	30.211	21.10	0.64	27.80	22.74	16.68	40.00	-23.32 QP
2	104.170	12.23	1.21	27.59	32.00	17.85	43.50	-25.65 QP
3	186.441	14.30	1.66	27.30	33.75	22.41	43.50	-21.09 QP
4	394.855	20.70	2.53	27.31	40.01	35.93	46.00	-10.07 QP
5 q	687.151	25.71	3.47	27.96	37.23	38.45	46.00	-7.55 QP
6	724.261	26.22	3.59	27.84	34.68	36.65	46.00	-9.35 QP



Test Mode: 01; Polarity: Vertical

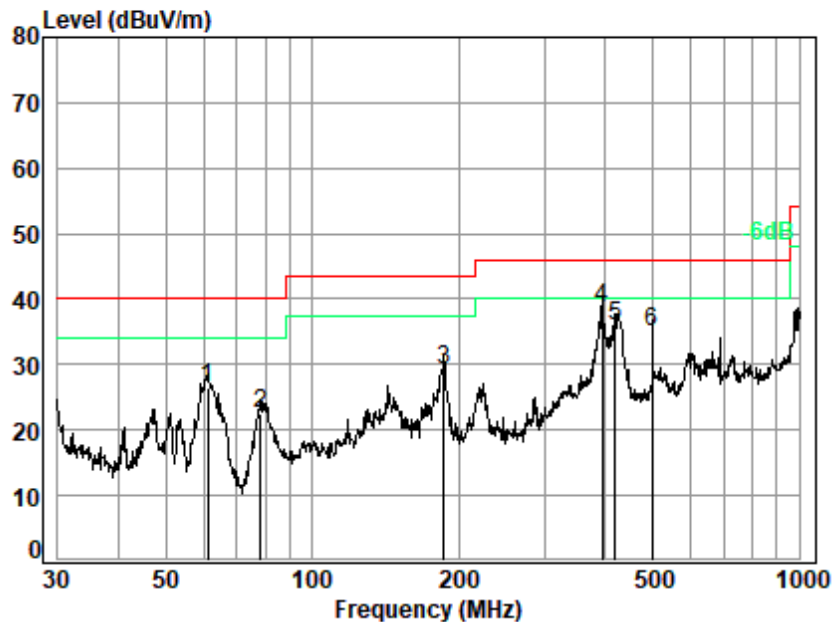

Site : chamber
Condition: 3m VERTICAL
Job No. : 03424AT
Test Mode: 01

		Ant	Cable	Preamp	Read	Limit	Over	
	Freq	Factor	Loss	Factor	Level	Level	Line	Limit Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1	61.132	11.36	0.93	27.72	41.91	26.48	40.00	-13.52 QP
2	78.413	10.40	1.05	27.67	38.73	22.51	40.00	-17.49 QP
3	186.441	14.30	1.66	27.30	40.58	29.24	43.50	-14.26 QP
4 q	393.472	20.72	2.53	27.31	42.65	38.59	46.00	-7.41 QP
5	419.108	20.61	2.61	27.42	40.01	35.81	46.00	-10.19 QP
6	499.425	22.90	2.89	27.78	36.84	34.85	46.00	-11.15 QP



7.10 Radiated Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: KDB 789033 D02 II G

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1GHz	500	3
*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (4) For transmitters operating in the 5.725-5.85 GHz band: (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. (5) For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.		

7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 20.3 °C

Humidity: 56.0 % RH

Atmospheric Pressure: 1000 mbar




7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code
Final test	01
Final test	02
Final test	03
Final test	04
Final test	05
Final test	06
Final test	07
Final test	08

Please refer to Clause 4.2 for the detail of the test modes.

7.10.3 Test Setup Diagram

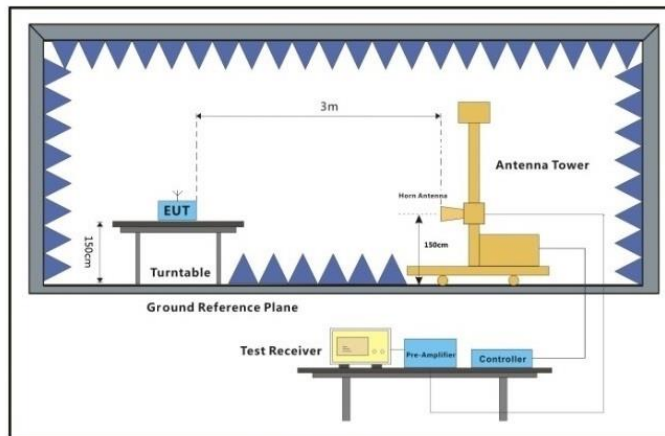

Above 1GHz



7.10.4 Measurement Procedure and Data


- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
5. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.



Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

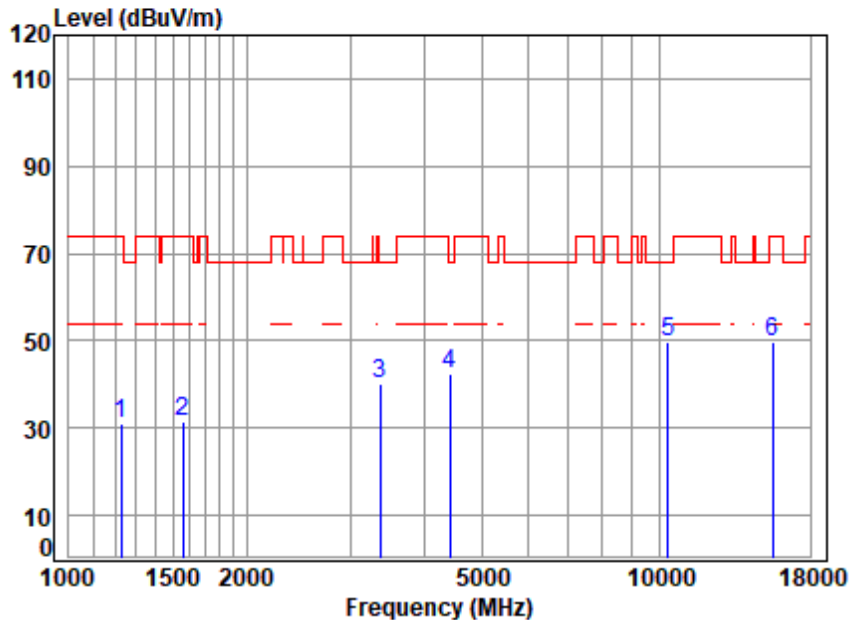


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5180 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1227.791	3.63	24.79	38.34	40.81	30.89	74.00	-43.11	peak
2	1560.673	4.15	26.96	38.40	38.77	31.48	74.00	-42.52	peak
3	3366.778	6.06	32.20	36.12	37.79	39.93	68.20	-28.27	peak
4	4417.841	7.07	34.59	35.78	36.68	42.56	68.20	-25.64	peak
5	10360.000	12.73	37.10	37.54	37.24	49.53	68.20	-18.67	peak
6	15540.000	14.23	41.10	37.23	31.81	49.91	74.00	-24.09	peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

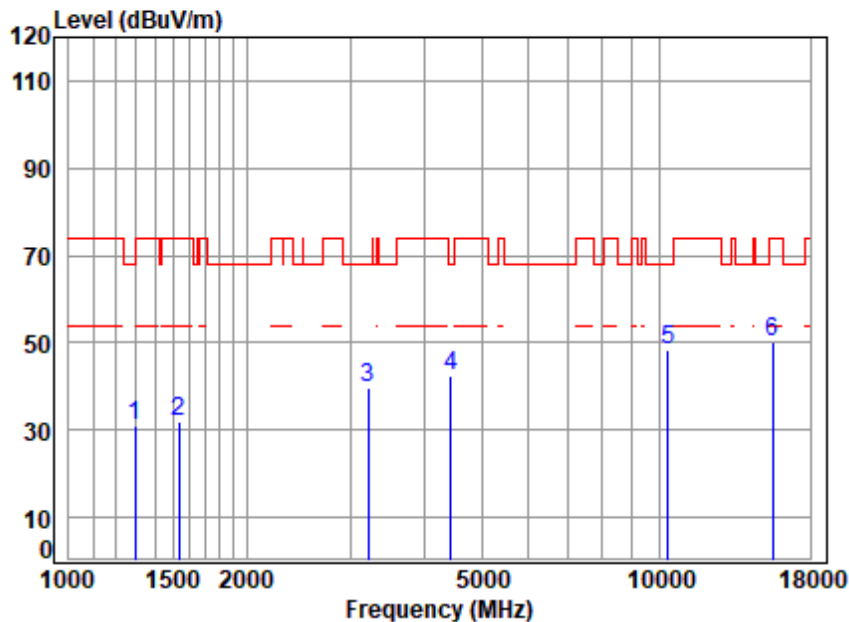


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5180 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	3.75	24.82	38.36	40.83	31.04	68.20	-37.16	peak
2	1533.841	4.11	26.94	38.39	39.13	31.79	74.00	-42.21	peak
3	3214.623	5.87	32.67	36.13	37.44	39.85	68.20	-28.35	peak
4	4443.453	7.09	34.28	35.77	36.98	42.58	68.20	-25.62	peak
5	10360.000	12.73	37.10	37.54	36.05	48.34	68.20	-19.86	peak
6	15540.000	14.23	41.10	37.23	32.03	50.13	74.00	-23.87	peak



Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

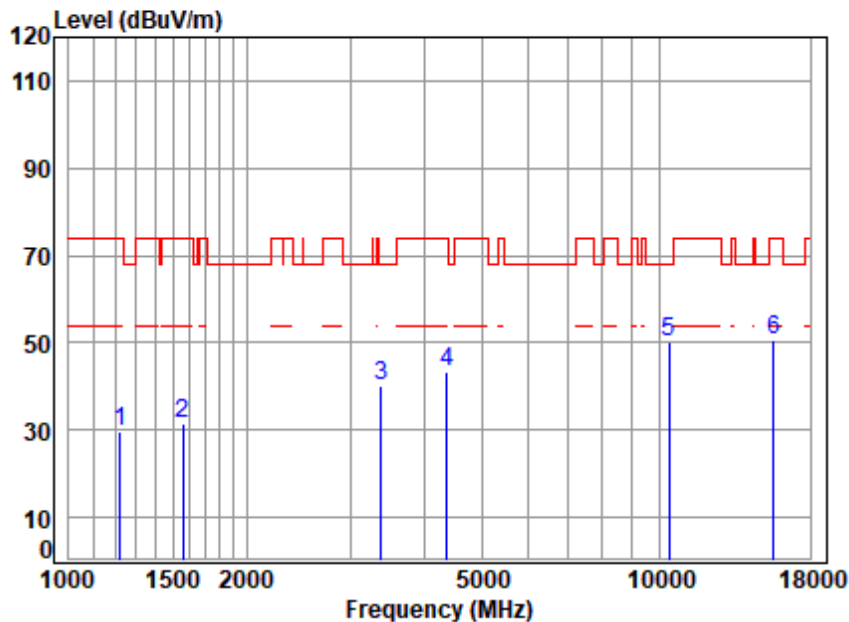


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03424AT
 Mode : 5200 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1220.714	3.62	24.69	38.34	39.88	29.85	74.00	-44.15	peak
2	1560.673	4.15	26.96	38.40	38.94	31.65	74.00	-42.35	peak
3	3376.523	6.07	32.26	36.12	37.86	40.07	68.20	-28.13	peak
4	4367.058	7.04	34.54	35.82	37.41	43.17	74.00	-30.83	peak
5	10400.000	12.74	37.10	37.56	37.68	49.96	68.20	-18.24	peak
6	15600.000	14.25	41.10	37.26	32.34	50.43	74.00	-23.57	peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

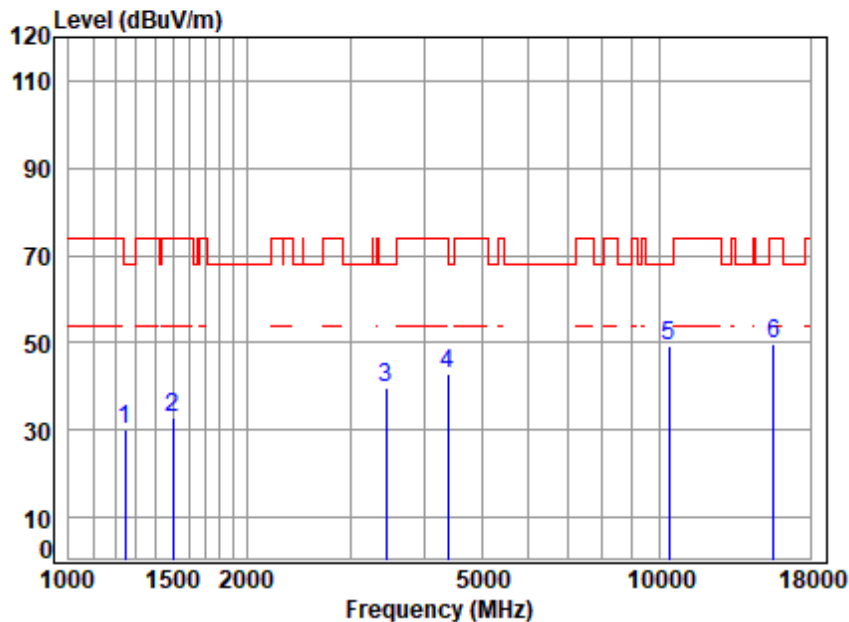


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5200 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.66	25.04	38.35	39.81	30.16	68.20	-38.04	peak
2	1498.781	4.06	26.77	38.39	40.27	32.71	74.00	-41.29	peak
3	3445.535	6.16	31.85	36.12	37.93	39.82	68.20	-28.38	peak
4	4392.376	7.05	34.74	35.80	37.01	43.00	74.00	-31.00	peak
5	10400.000	12.74	37.10	37.56	36.99	49.27	68.20	-18.93	peak
6	15600.000	14.25	41.10	37.26	31.60	49.69	74.00	-24.31	peak



Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

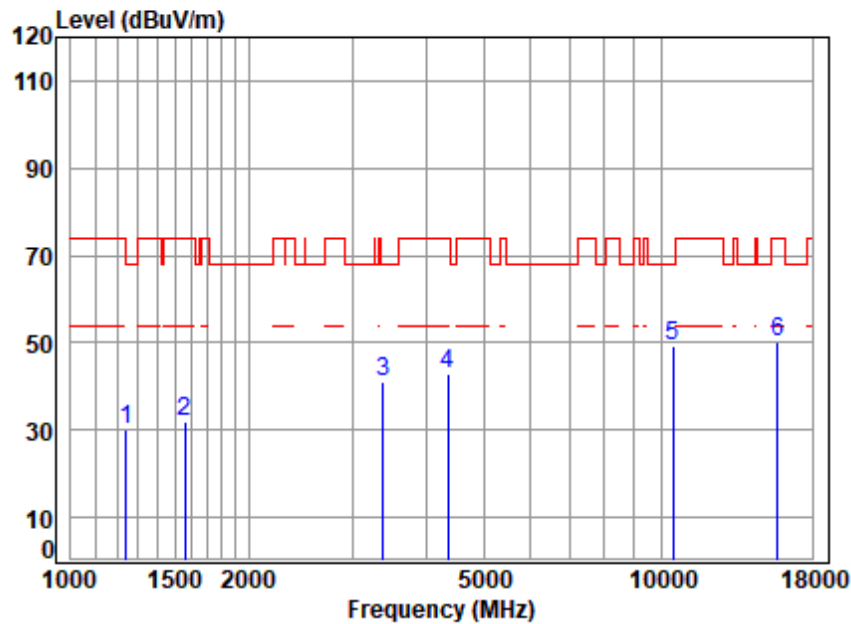


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5240 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	3.66	24.99	38.35	39.94	30.24	68.20	-37.96	peak
2	1560.673	4.15	26.96	38.40	39.20	31.91	74.00	-42.09	peak
3	3386.297	6.09	32.32	36.12	38.58	40.87	68.20	-27.33	peak
4	4354.454	7.03	34.44	35.83	37.39	43.03	74.00	-30.97	peak
5	10480.000	12.76	37.26	37.60	36.83	49.25	68.20	-18.95	peak
6	15720.000	14.29	41.22	37.31	32.02	50.22	74.00	-23.78	peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

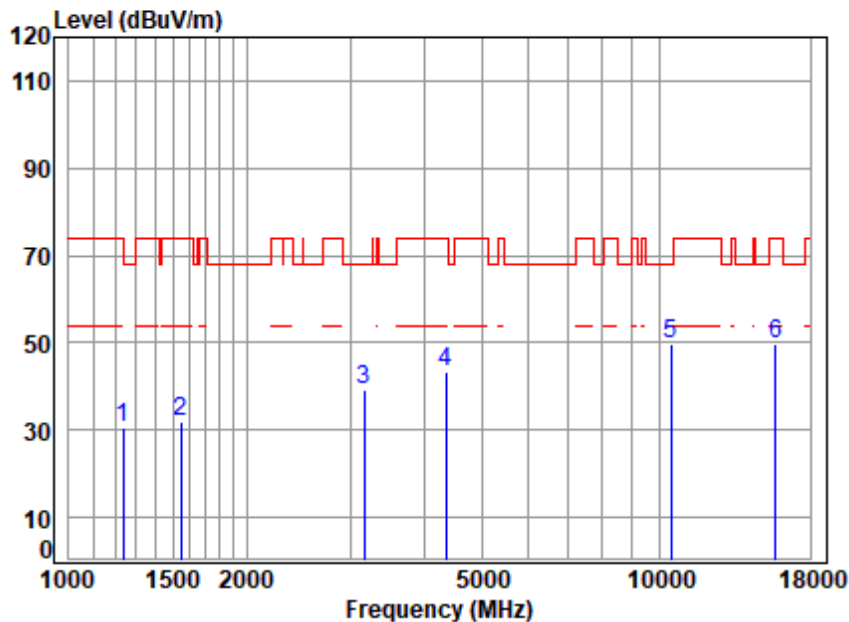


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03424AT
 Mode : 5240 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	3.65	24.94	38.35	40.37	30.61	74.00	-43.39	peak
2	1547.199	4.13	26.99	38.39	39.08	31.81	74.00	-42.19	peak
3	3159.355	5.80	32.57	36.13	37.22	39.46	68.20	-28.74	peak
4	4354.454	7.03	34.44	35.83	37.49	43.13	74.00	-30.87	peak
5	10480.000	12.76	37.26	37.60	37.11	49.53	68.20	-18.67	peak
6	15720.000	14.29	41.22	37.31	31.73	49.93	74.00	-24.07	peak



Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

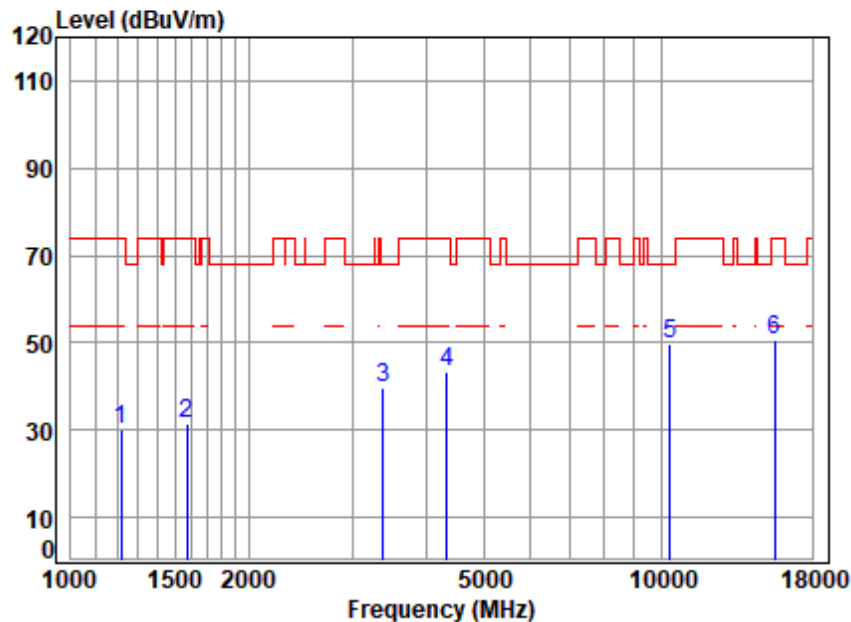


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5180 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1217.190	3.61	24.64	38.34	40.25	30.16	74.00	-43.84	peak
2	1574.265	4.17	26.90	38.40	39.03	31.70	74.00	-42.30	peak
3	3386.297	6.09	32.32	36.12	37.26	39.55	68.20	-28.65	peak
4	4341.886	7.02	34.34	35.84	37.68	43.20	74.00	-30.80	peak
5	10360.000	12.73	37.10	37.54	37.38	49.67	68.20	-18.53	peak
6	15540.000	14.23	41.10	37.23	32.47	50.57	74.00	-23.43	peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

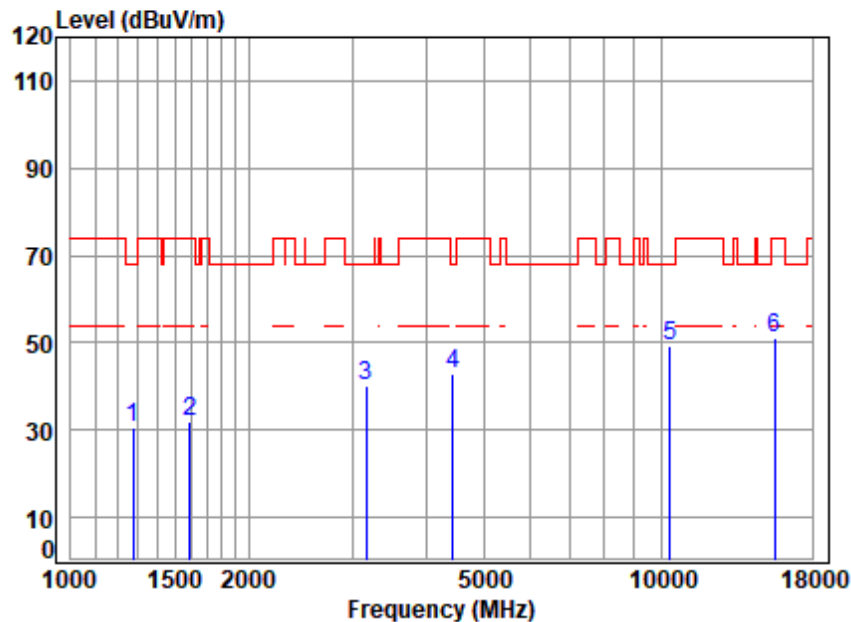


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5180 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1274.802	3.71	24.95	38.35	40.44	30.75	68.20	-37.45	peak
2	1592.571	4.19	26.83	38.40	39.27	31.89	74.00	-42.11	peak
3	3168.500	5.81	32.65	36.13	37.79	40.12	68.20	-28.08	peak
4	4430.628	7.08	34.43	35.77	37.09	42.83	68.20	-25.37	peak
5	10360.000	12.73	37.10	37.54	37.13	49.42	68.20	-18.78	peak
6	15540.000	14.23	41.10	37.23	33.00	51.10	74.00	-22.90	peak



Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

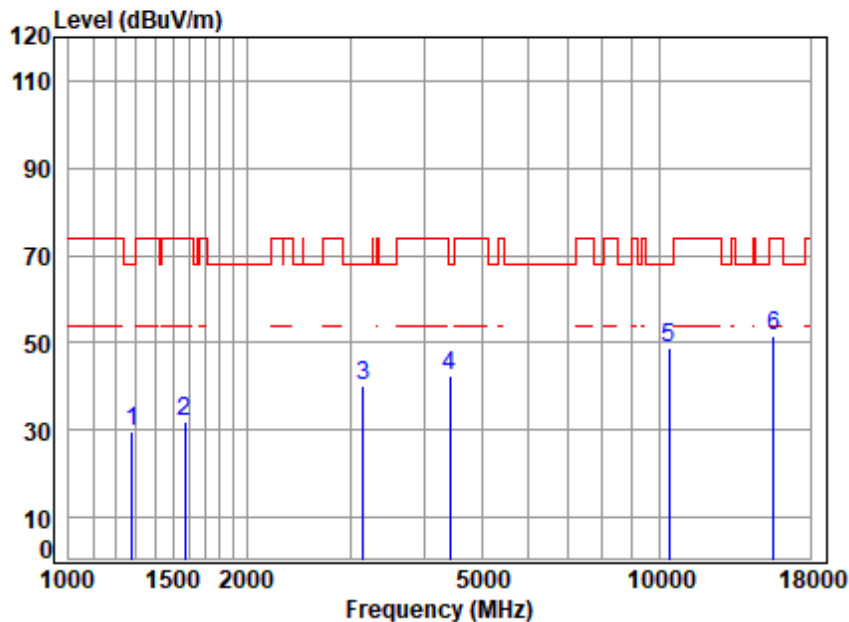


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03424AT
 Mode : 5200 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.72	24.91	38.35	39.34	29.62	68.20	-38.58	peak
2	1574.265	4.17	26.90	38.40	39.29	31.96	74.00	-42.04	peak
3	3150.237	5.78	32.50	36.13	38.07	40.22	68.20	-27.98	peak
4	4417.841	7.07	34.59	35.78	36.71	42.59	68.20	-25.61	peak
5	10400.000	12.74	37.10	37.56	36.54	48.82	68.20	-19.38	peak
6	15600.000	14.25	41.10	37.26	33.26	51.35	74.00	-22.65	peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

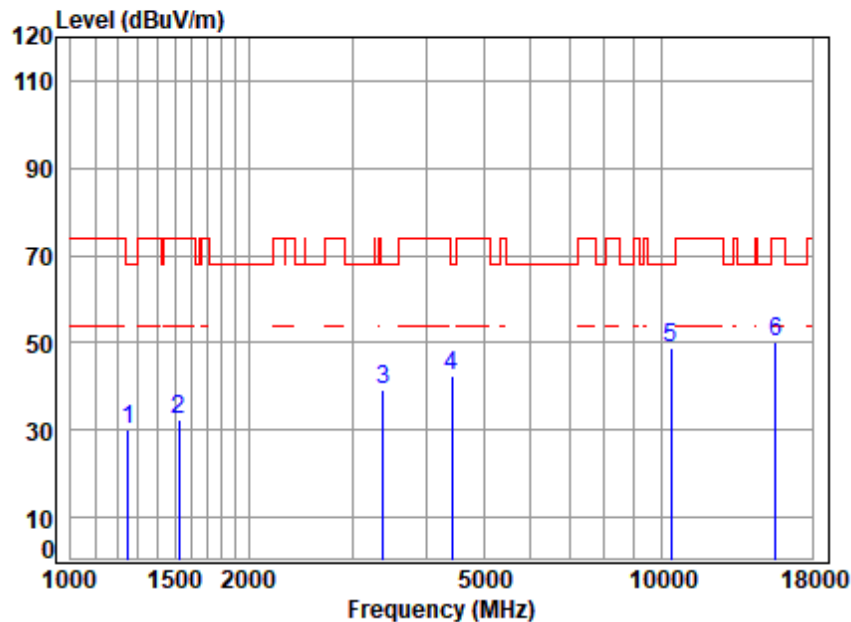


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5200 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1252.885	3.67	25.08	38.35	39.64	30.04	68.20	-38.16	peak
2	1525.000	4.10	26.90	38.39	39.74	32.35	74.00	-41.65	peak
3	3386.297	6.09	32.32	36.12	37.03	39.32	68.20	-28.88	peak
4	4417.841	7.07	34.59	35.78	36.58	42.46	68.20	-25.74	peak
5	10400.000	12.74	37.10	37.56	36.65	48.93	68.20	-19.27	peak
6	15600.000	14.25	41.10	37.26	32.12	50.21	74.00	-23.79	peak



Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

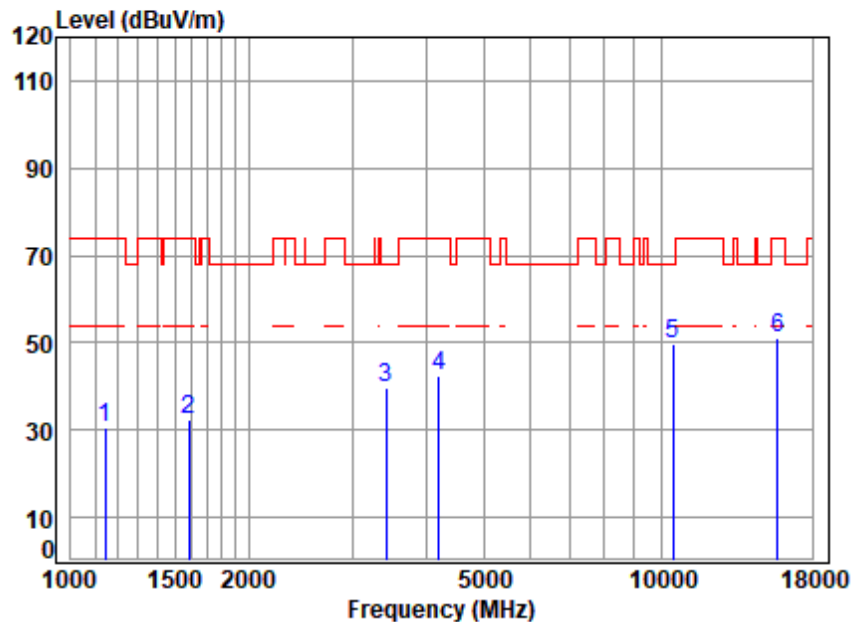


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5240 TX RSE
Note : 5G WIFI 11N20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1142.201	3.48	23.87	38.33	41.77	30.79	74.00	-43.21	peak
2	1587.975	4.18	26.85	38.40	39.61	32.24	74.00	-41.76	peak
3	3425.675	6.13	32.09	36.12	37.50	39.60	68.20	-28.60	peak
4	4193.872	6.92	33.80	35.95	37.60	42.37	74.00	-31.63	peak
5	10480.000	12.76	37.26	37.60	37.11	49.53	68.20	-18.67	peak
6	15720.000	14.29	41.22	37.31	32.89	51.09	74.00	-22.91	peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

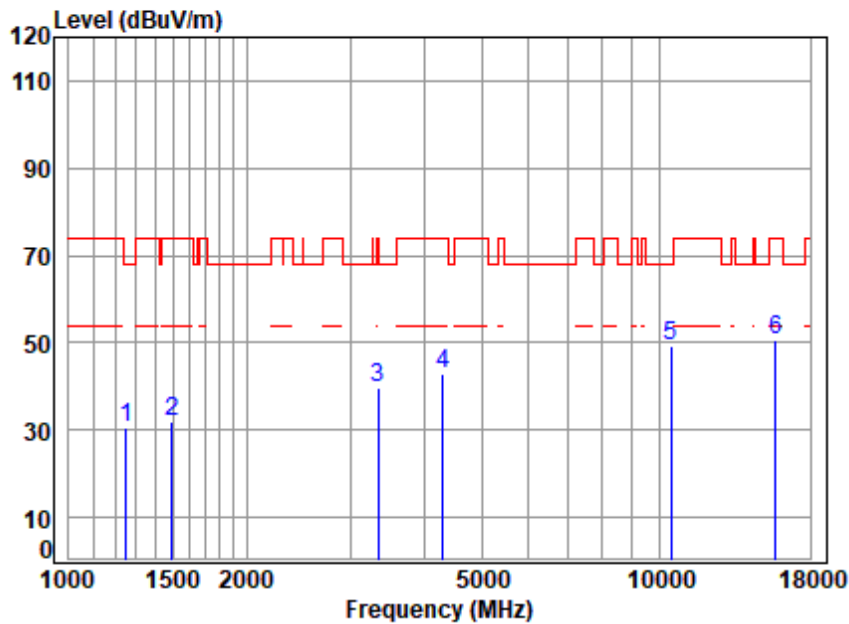


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5240 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.67	25.09	38.35	39.99	30.40	68.20	-37.80	peak
2	1494.455	4.05	26.64	38.39	39.48	31.78	74.00	-42.22	peak
3	3347.371	6.04	32.05	36.12	37.83	39.80	74.00	-34.20	peak
4	4304.400	6.99	34.04	35.87	37.78	42.94	74.00	-31.06	peak
5	10480.000	12.76	37.26	37.60	36.77	49.19	68.20	-19.01	peak
6	15720.000	14.29	41.22	37.31	32.44	50.64	74.00	-23.36	peak



Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

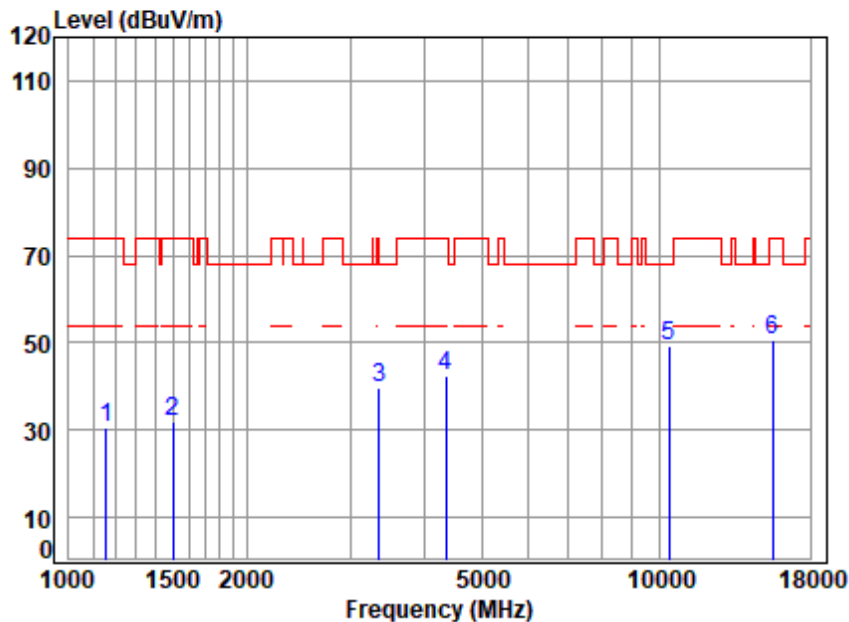


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5190 TX RSE
Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1158.828	3.51	23.99	38.33	41.20	30.37	74.00	-43.63	peak
2	1498.781	4.06	26.77	38.39	39.36	31.80	74.00	-42.20	peak
3	3357.061	6.05	32.14	36.12	37.61	39.68	74.00	-34.32	peak
4	4354.454	7.03	34.44	35.83	36.75	42.39	74.00	-31.61	peak
5	10380.000	12.74	37.10	37.55	36.88	49.17	68.20	-19.03	peak
6	15570.000	14.24	41.10	37.25	32.34	50.43	74.00	-23.57	peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

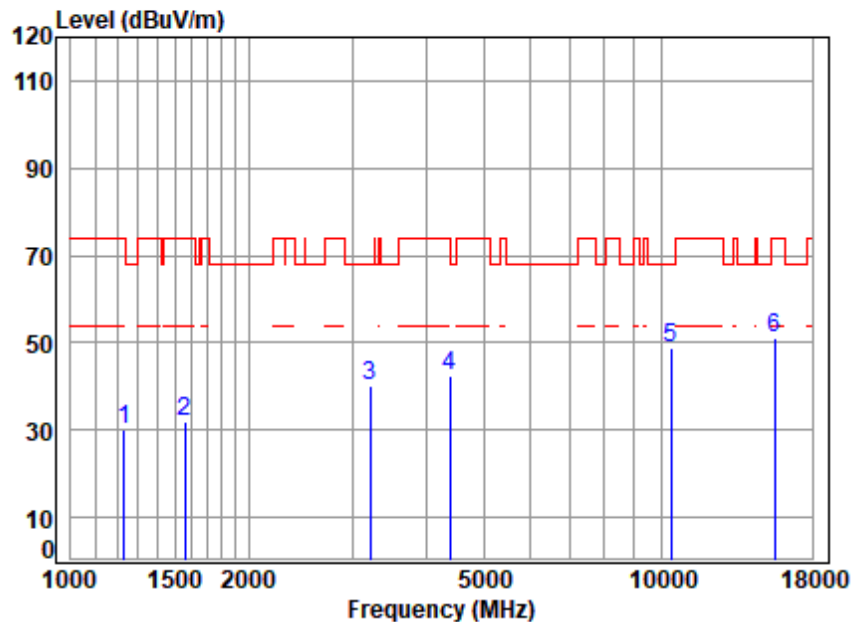


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5190 TX RSE
Note : 5G WIFI 11N40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1231.345	3.64	24.84	38.35	39.79	29.92	74.00	-44.08	peak
2	1560.673	4.15	26.96	38.40	39.18	31.89	74.00	-42.11	peak
3	3214.623	5.87	32.67	36.13	37.65	40.06	68.20	-28.14	peak
4	4379.699	7.04	34.64	35.81	36.70	42.57	74.00	-31.43	peak
5	10380.000	12.74	37.10	37.55	36.31	48.60	68.20	-19.60	peak
6	15570.000	14.24	41.10	37.25	33.17	51.26	74.00	-22.74	peak



Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

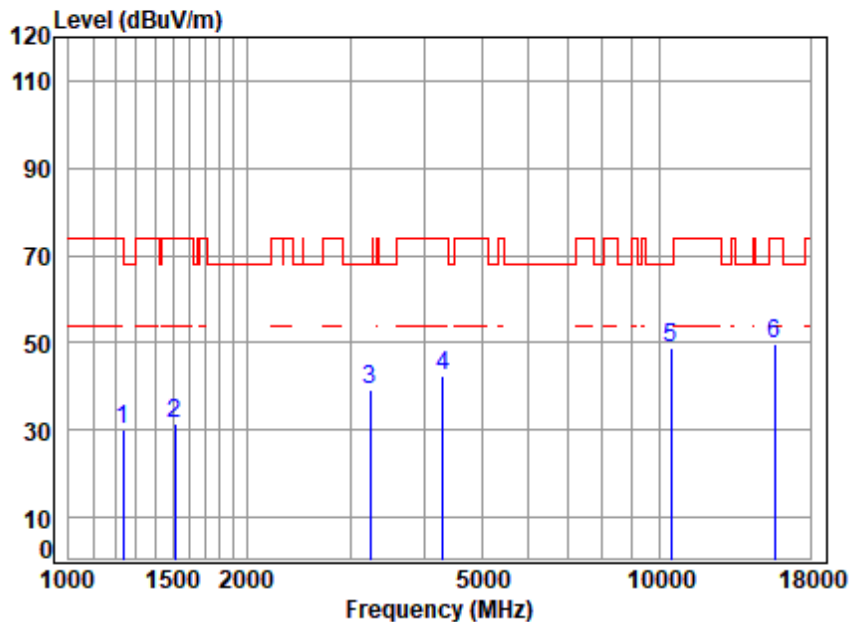


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5230 TX RSE
Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1234.909	3.64	24.89	38.35	39.92	30.10	74.00	-43.90	peak
2	1511.833	4.08	26.85	38.39	38.99	31.53	74.00	-42.47	peak
3	3233.260	5.89	32.37	36.13	37.26	39.39	68.20	-28.81	peak
4	4304.400	6.99	34.04	35.87	37.15	42.31	74.00	-31.69	peak
5	10460.000	12.76	37.22	37.59	36.52	48.91	68.20	-19.29	peak
6	15690.000	14.28	41.19	37.30	31.75	49.92	74.00	-24.08	peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

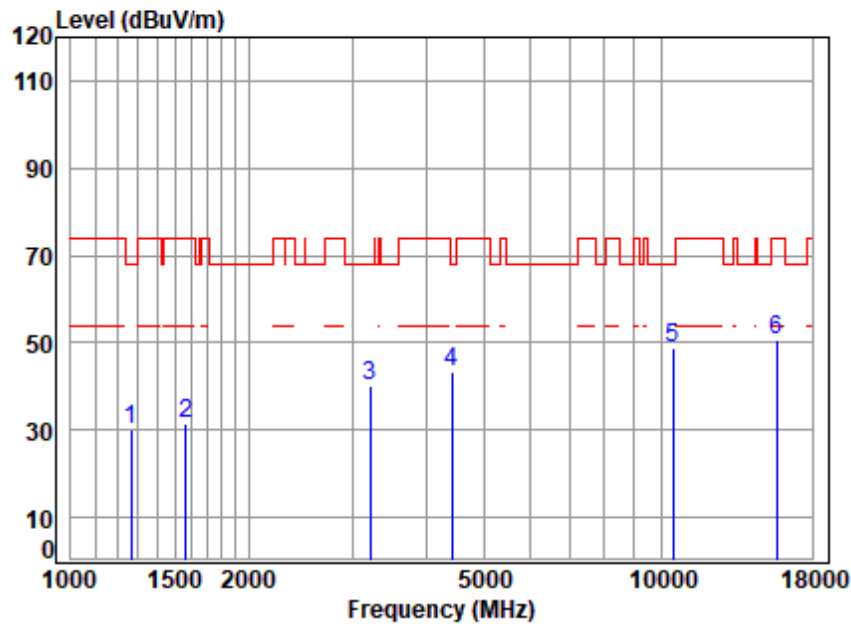

Site : chamber

Condition: 3m VERTICAL

Job No : 03424AT


Mode : 5230 TX RSE

Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	3.70	25.00	38.35	39.54	29.89	68.20	-38.31	peak
2	1565.191	4.15	26.94	38.40	38.71	31.40	74.00	-42.60	peak
3	3214.623	5.87	32.67	36.13	37.62	40.03	68.20	-28.17	peak
4	4417.841	7.07	34.59	35.78	37.33	43.21	68.20	-24.99	peak
5	10460.000	12.76	37.22	37.59	36.35	48.74	68.20	-19.46	peak
6	15690.000	14.28	41.19	37.30	32.57	50.74	74.00	-23.26	peak



Test Mode: 01; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

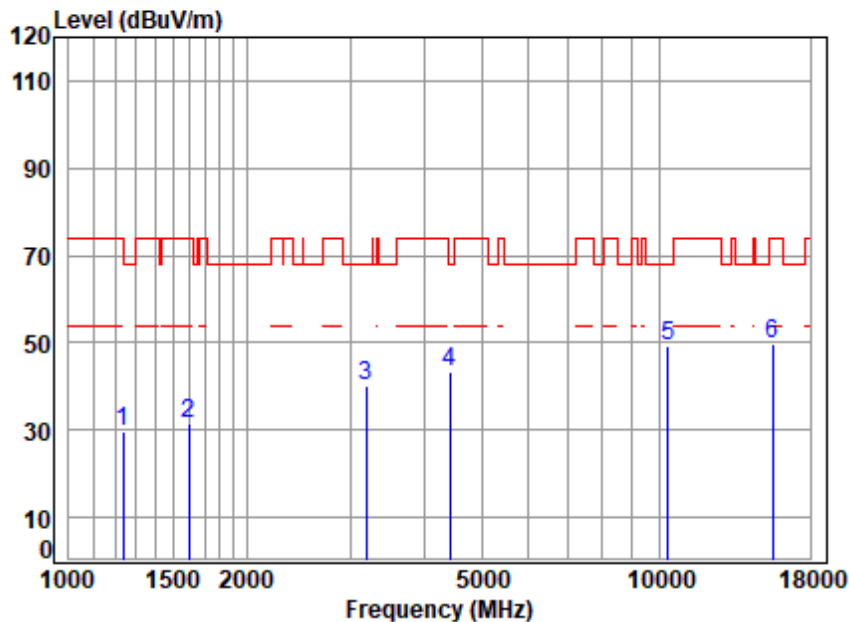


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5180 TX RSE
Note : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1234.909	3.64	24.89	38.35	39.68	29.86	74.00	-44.14	peak
2	1597.181	4.20	26.81	38.40	39.04	31.65	74.00	-42.35	peak
3	3186.869	5.83	32.79	36.13	37.56	40.05	68.20	-28.15	peak
4	4417.841	7.07	34.59	35.78	37.39	43.27	68.20	-24.93	peak
5	10360.000	12.73	37.10	37.54	36.88	49.17	68.20	-19.03	peak
6	15540.000	14.23	41.10	37.23	31.64	49.74	74.00	-24.26	peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

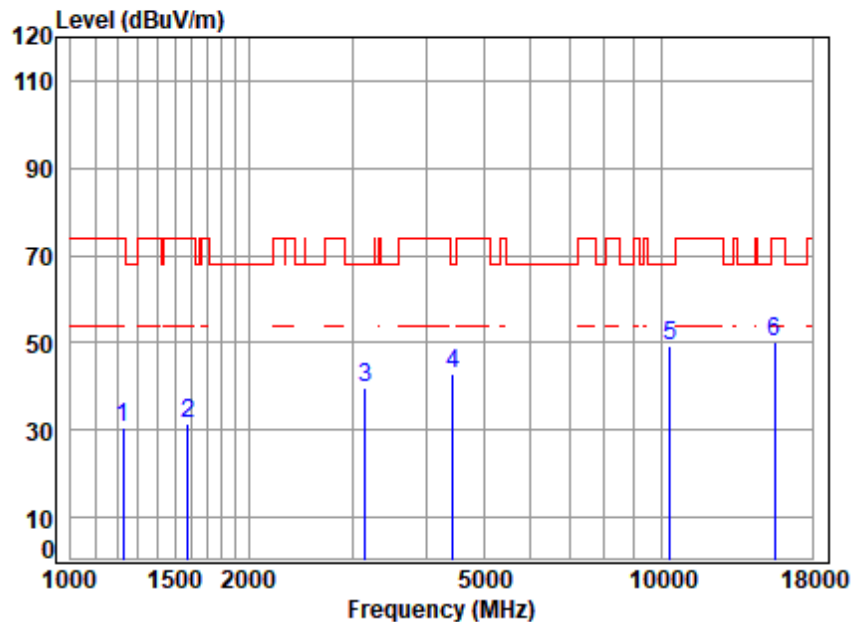


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5180 TX RSE
Note : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1227.791	3.63	24.79	38.34	40.50	30.58	74.00	-43.42	peak
2	1578.822	4.17	26.88	38.40	38.86	31.51	74.00	-42.49	peak
3	3150.237	5.78	32.50	36.13	37.62	39.77	68.20	-28.43	peak
4	4430.628	7.08	34.43	35.77	37.07	42.81	68.20	-25.39	peak
5	10360.000	12.73	37.10	37.54	37.16	49.45	68.20	-18.75	peak
6	15540.000	14.23	41.10	37.23	32.13	50.23	74.00	-23.77	peak



Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

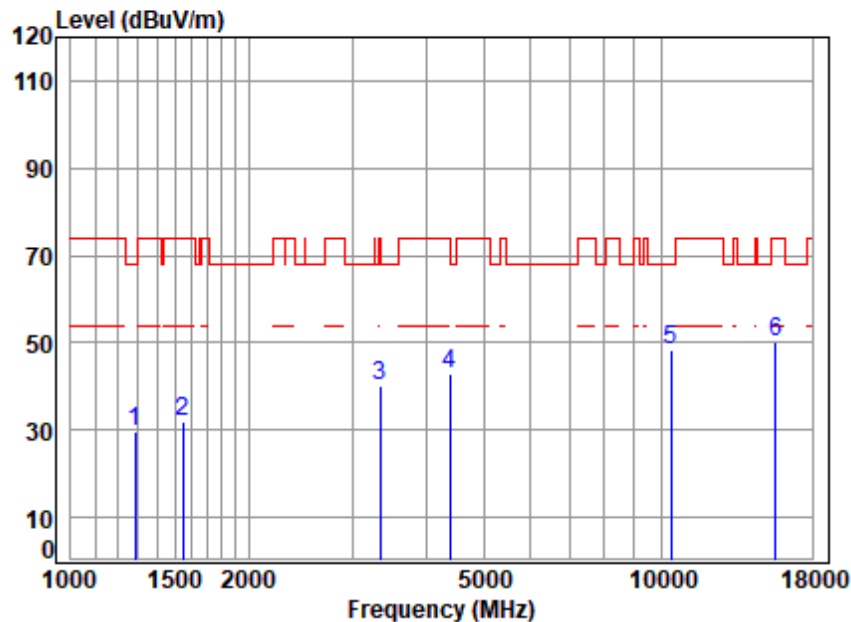

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5200 TX RSE
Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	3.73	24.88	38.35	39.49	29.75	68.20	-38.45	peak
2	1547.199	4.13	26.99	38.39	39.14	31.87	74.00	-42.13	peak
3	3347.371	6.04	32.05	36.12	38.04	40.01	74.00	-33.99	peak
4	4392.376	7.05	34.74	35.80	36.77	42.76	74.00	-31.24	peak
5	10400.000	12.74	37.10	37.56	36.10	48.38	68.20	-19.82	peak
6	15600.000	14.25	41.10	37.26	31.90	49.99	74.00	-24.01	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 62 of 1015

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

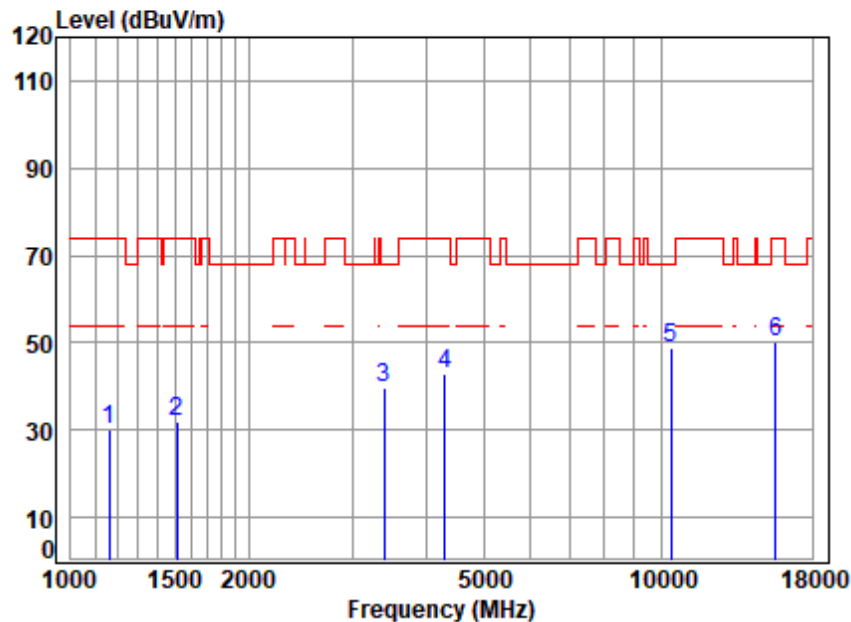

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5200 TX RSE
Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1162.182	3.51	24.02	38.33	40.90	30.10	74.00	-43.90	peak
2	1511.833	4.08	26.85	38.39	39.59	32.13	74.00	-41.87	peak
3	3396.098	6.10	32.38	36.12	37.49	39.85	68.20	-28.35	peak
4	4304.400	6.99	34.04	35.87	37.78	42.94	74.00	-31.06	peak
5	10400.000	12.74	37.10	37.56	36.32	48.60	68.20	-19.60	peak
6	15600.000	14.25	41.10	37.26	31.94	50.03	74.00	-23.97	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

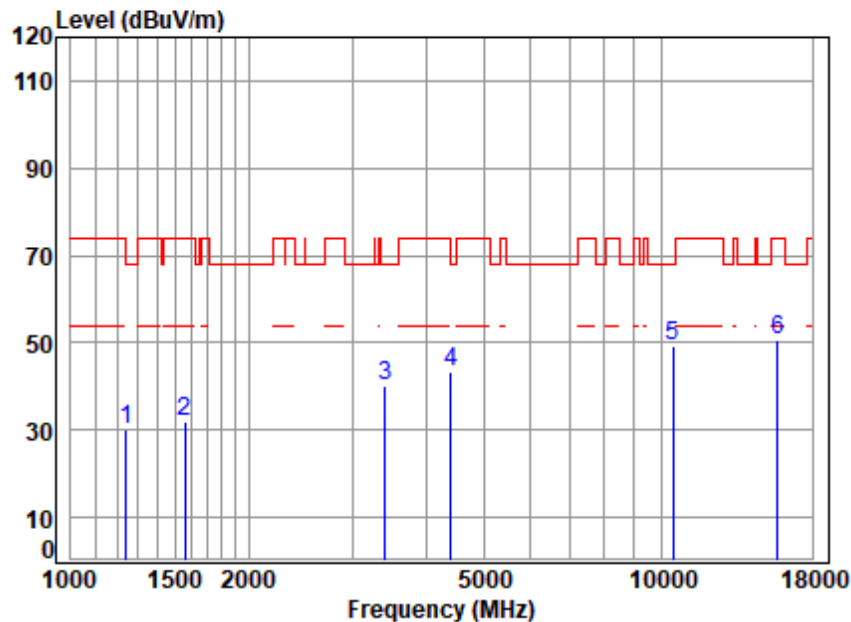


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03424AT
 Mode : 5240 TX RSE
 Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	3.66	24.99	38.35	39.99	30.29	68.20	-37.91	peak
2	1560.673	4.15	26.96	38.40	39.36	32.07	74.00	-41.93	peak
3	3405.929	6.11	32.33	36.12	37.64	39.96	68.20	-28.24	peak
4	4405.090	7.06	34.74	35.79	37.26	43.27	68.20	-24.93	peak
5	10480.000	12.76	37.26	37.60	36.89	49.31	68.20	-18.89	peak
6	15720.000	14.29	41.22	37.31	32.48	50.68	74.00	-23.32	peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

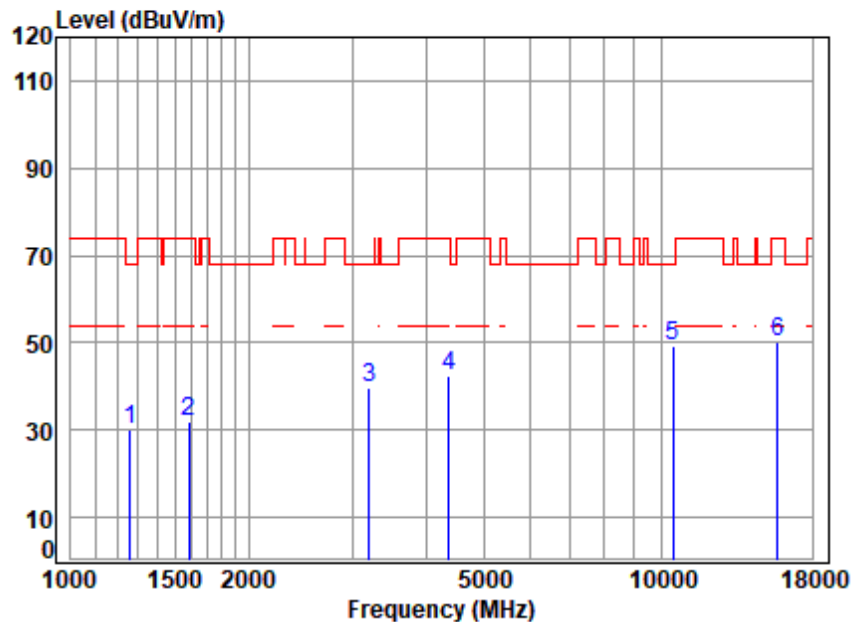


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03424AT
 Mode : 5240 TX RSE
 Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1260.149	3.69	25.04	38.35	39.52	29.90	68.20	-38.30	peak
2	1587.975	4.18	26.85	38.40	39.11	31.74	74.00	-42.26	peak
3	3196.094	5.84	32.87	36.13	37.08	39.66	68.20	-28.54	peak
4	4367.058	7.04	34.54	35.82	36.72	42.48	74.00	-31.52	peak
5	10480.000	12.76	37.26	37.60	36.69	49.11	68.20	-19.09	peak
6	15720.000	14.29	41.22	37.31	32.08	50.28	74.00	-23.72	peak



Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

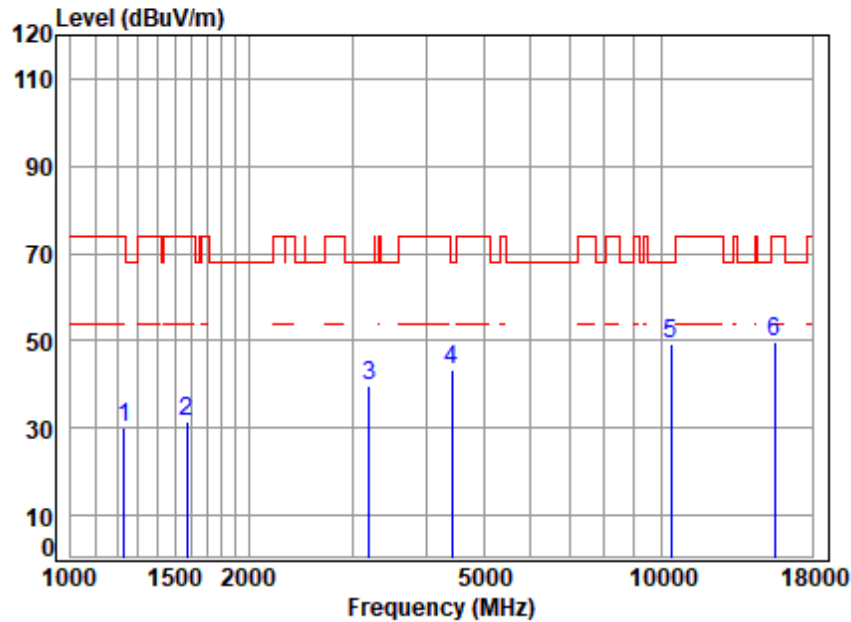


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5190 TX RSE
Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1231.345	3.64	24.84	38.35	40.03	30.16	74.00	-43.84	peak
2	1574.265	4.17	26.90	38.40	39.02	31.69	74.00	-42.31	peak
3	3205.345	5.86	32.81	36.13	37.21	39.75	68.20	-28.45	peak
4	4417.841	7.07	34.59	35.78	37.59	43.47	68.20	-24.73	peak
5	10380.000	12.74	37.10	37.55	36.94	49.23	68.20	-18.97	peak
6	15570.000	14.24	41.10	37.25	31.55	49.64	74.00	-24.36	peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

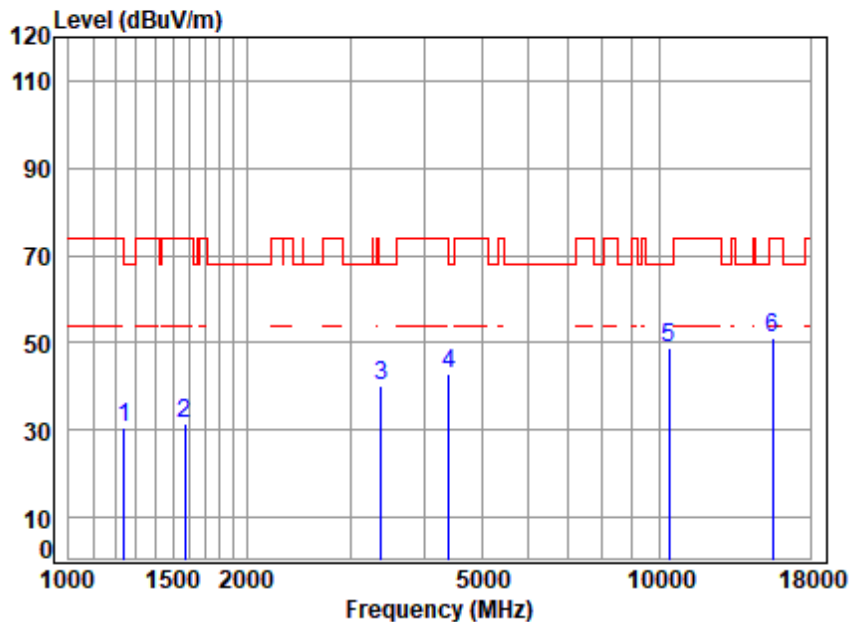

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03424AT
 Mode : 5190 TX RSE
 Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	3.66	24.99	38.35	40.05	30.35	68.20	-37.85	peak
2	1574.265	4.17	26.90	38.40	39.01	31.68	74.00	-42.32	peak
3	3386.297	6.09	32.32	36.12	37.66	39.95	68.20	-28.25	peak
4	4405.090	7.06	34.74	35.79	37.02	43.03	68.20	-25.17	peak
5	10380.000	12.74	37.10	37.55	36.31	48.60	68.20	-19.60	peak
6	15570.000	14.24	41.10	37.25	33.12	51.21	74.00	-22.79	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 67 of 1015

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

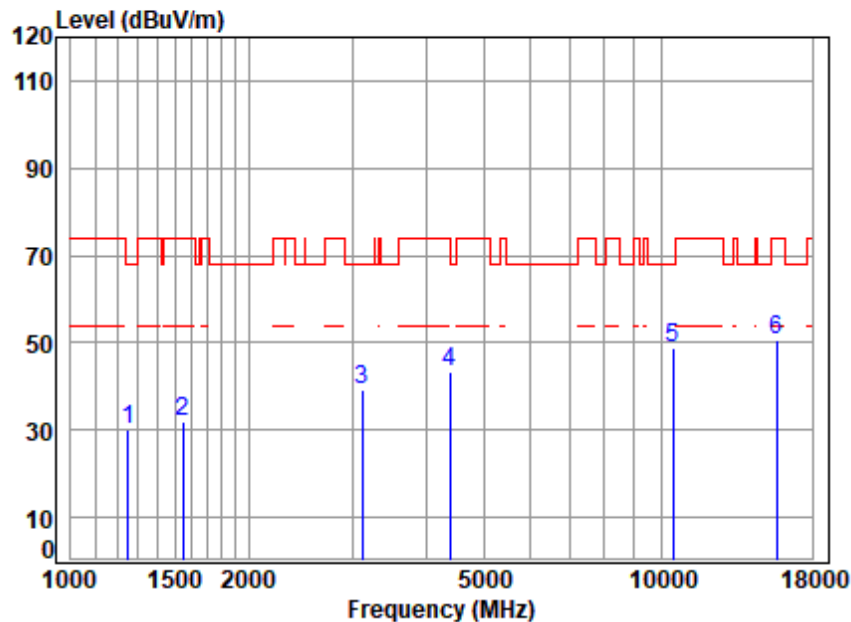

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5230 TX RSE
Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1252.885	3.67	25.08	38.35	39.67	30.07	68.20	-38.13	peak
2	1547.199	4.13	26.99	38.39	39.04	31.77	74.00	-42.23	peak
3	3114.025	5.74	31.85	36.13	37.91	39.37	68.20	-28.83	peak
4	4392.376	7.05	34.74	35.80	37.29	43.28	74.00	-30.72	peak
5	10460.000	12.76	37.22	37.59	36.32	48.71	68.20	-19.49	peak
6	15690.000	14.28	41.19	37.30	32.26	50.43	74.00	-23.57	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

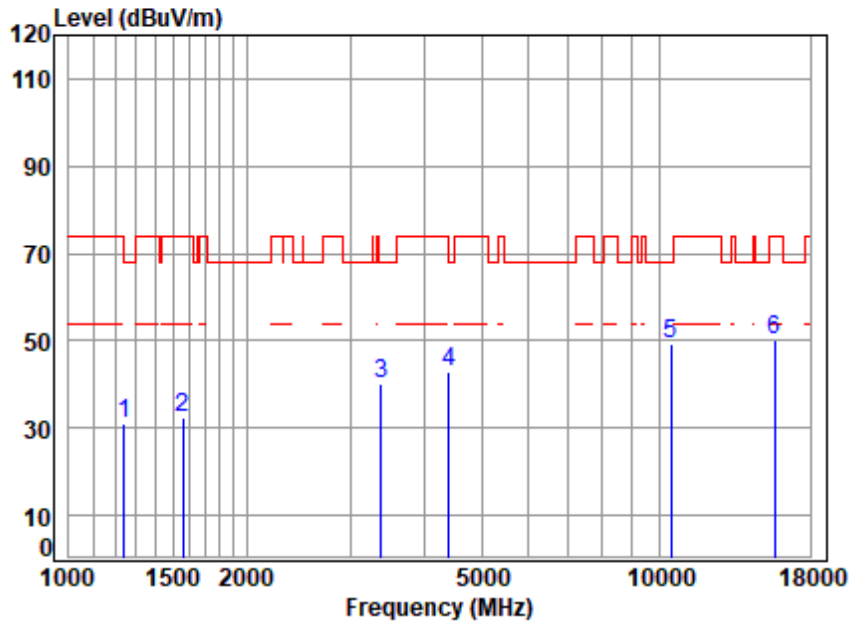


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5230 TX RSE
Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	3.66	24.99	38.35	40.67	30.97	68.20	-37.23	peak
2	1560.673	4.15	26.96	38.40	39.69	32.40	74.00	-41.60	peak
3	3376.523	6.07	32.26	36.12	37.74	39.95	68.20	-28.25	peak
4	4405.090	7.06	34.74	35.79	36.75	42.76	68.20	-25.44	peak
5	10460.000	12.76	37.22	37.59	36.86	49.25	68.20	-18.95	peak
6	15690.000	14.28	41.19	37.30	32.06	50.23	74.00	-23.77	peak



Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

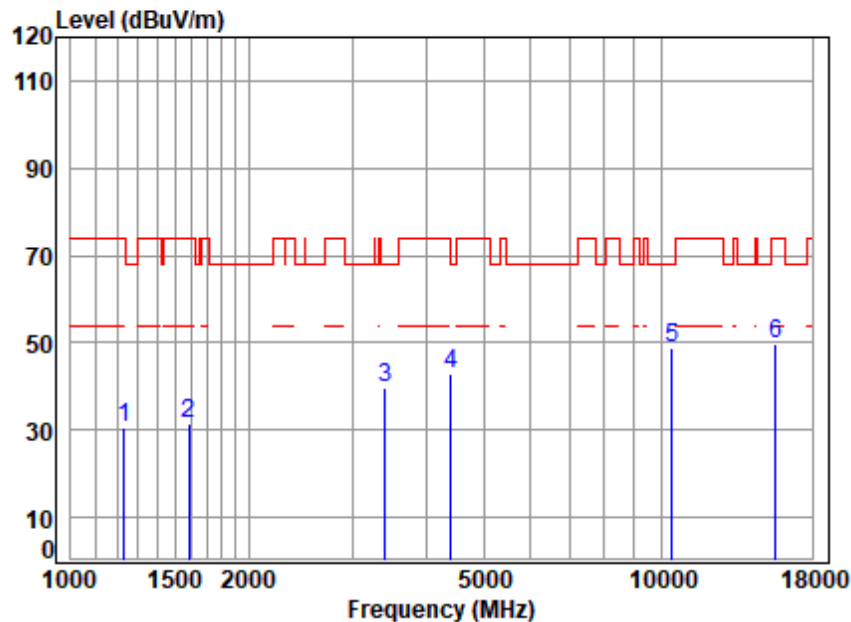


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5210 TX RSE
Note : 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1231.345	3.64	24.84	38.35	40.47	30.60	74.00	-43.40	peak
2	1587.975	4.18	26.85	38.40	38.97	31.60	74.00	-42.40	peak
3	3405.929	6.11	32.33	36.12	37.31	39.63	68.20	-28.57	peak
4	4405.090	7.06	34.74	35.79	36.86	42.87	68.20	-25.33	peak
5	10420.000	12.75	37.14	37.57	36.69	49.01	68.20	-19.19	peak
6	15630.000	14.26	41.13	37.27	31.84	49.96	74.00	-24.04	peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

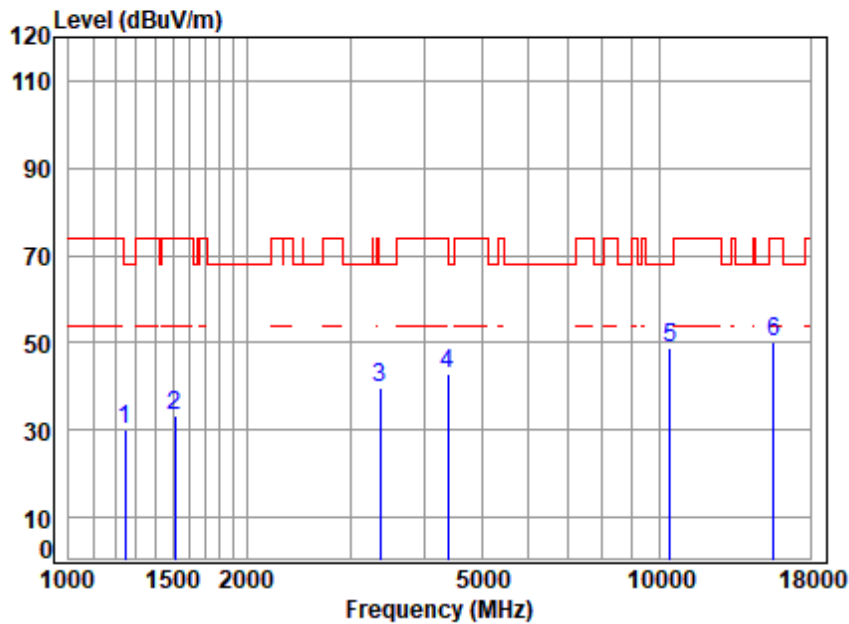


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5210 TX RSE
Note : 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.66	25.04	38.35	39.63	29.98	68.20	-38.22	peak
2	1511.833	4.08	26.85	38.39	40.61	33.15	74.00	-40.85	peak
3	3366.778	6.06	32.20	36.12	37.70	39.84	68.20	-28.36	peak
4	4379.699	7.04	34.64	35.81	36.86	42.73	74.00	-31.27	peak
5	10420.000	12.75	37.14	37.57	36.71	49.03	68.20	-19.17	peak
6	15630.000	14.26	41.13	37.27	32.13	50.25	74.00	-23.75	peak



Test Mode: 02; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

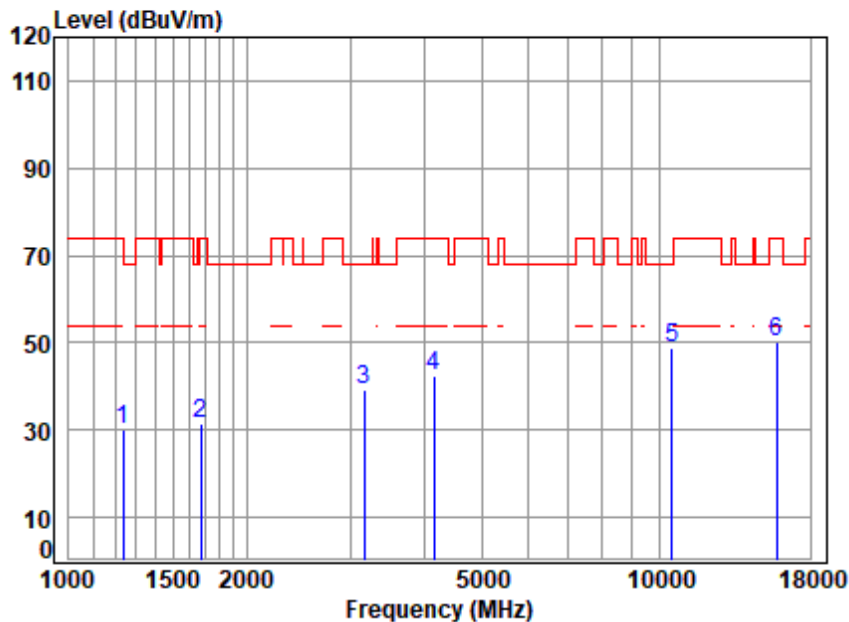


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5260 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1234.909	3.64	24.89	38.35	40.00	30.18	74.00	-43.82	peak
2	1672.779	4.30	26.25	38.41	39.31	31.45	74.00	-42.55	peak
3	3168.500	5.81	32.65	36.13	37.12	39.45	68.20	-28.75	peak
4	4145.664	6.88	33.73	35.99	37.70	42.32	74.00	-31.68	peak
5	10520.000	12.77	37.30	37.62	36.57	49.02	68.20	-19.18	peak
6	15780.000	14.31	41.28	37.33	31.97	50.23	74.00	-23.77	peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

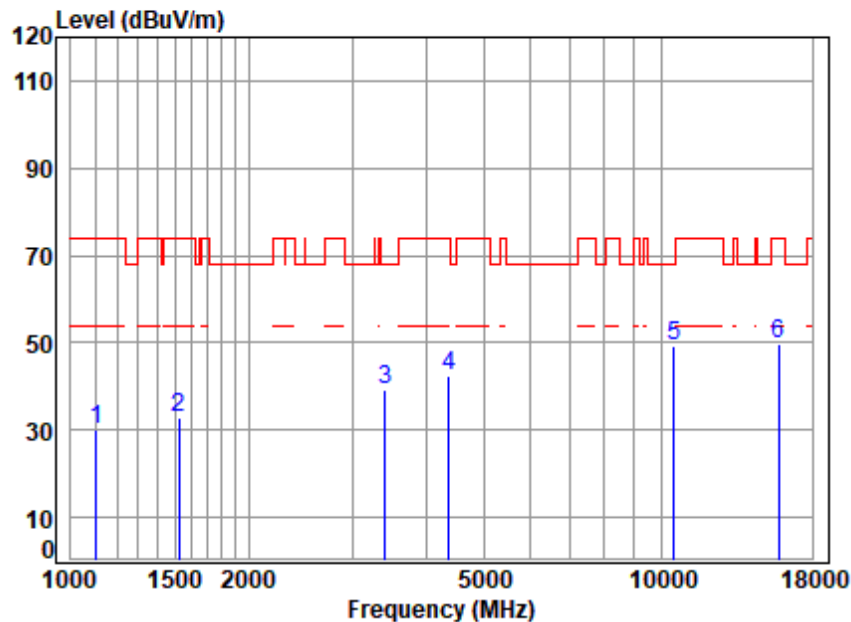


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03424AT
 Mode : 5260 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1106.457	3.41	23.73	38.32	41.26	30.08	74.00	-43.92	peak
2	1525.000	4.10	26.90	38.39	40.08	32.69	74.00	-41.31	peak
3	3405.929	6.11	32.33	36.12	37.01	39.33	68.20	-28.87	peak
4	4367.058	7.04	34.54	35.82	36.67	42.43	74.00	-31.57	peak
5	10520.000	12.77	37.30	37.62	36.97	49.42	68.20	-18.78	peak
6	15780.000	14.31	41.28	37.33	31.47	49.73	74.00	-24.27	peak



Test Mode: 02; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

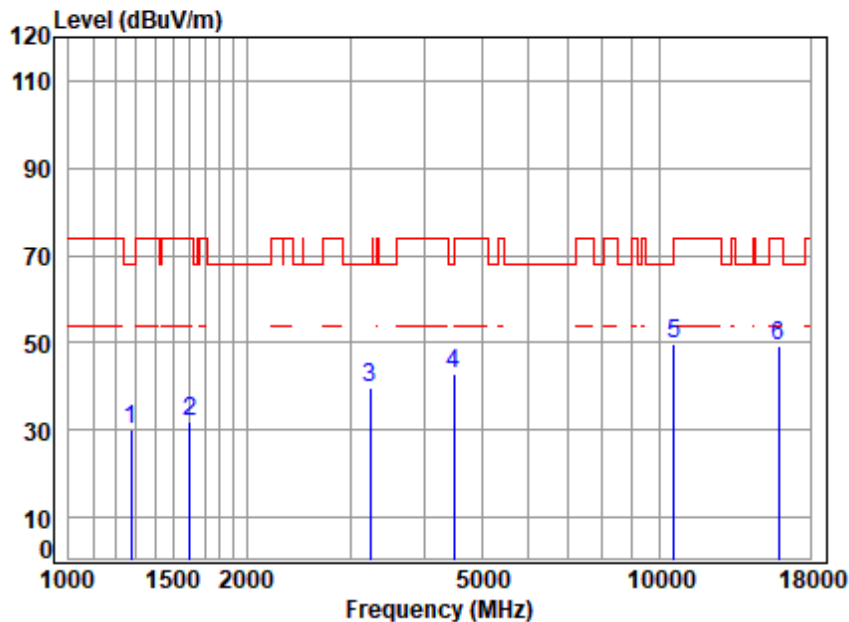


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5300 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1274.802	3.71	24.95	38.35	39.81	30.12	68.20	-38.08	peak
2	1601.804	4.20	26.78	38.40	39.22	31.80	74.00	-42.20	peak
3	3242.619	5.90	32.22	36.13	37.90	39.89	68.20	-28.31	peak
4	4482.150	7.11	33.81	35.74	37.61	42.79	68.20	-25.41	peak
5	10600.000	12.80	37.30	37.66	37.21	49.65	68.20	-18.55	peak
6	15900.000	14.35	41.40	37.38	31.10	49.47	74.00	-24.53	peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

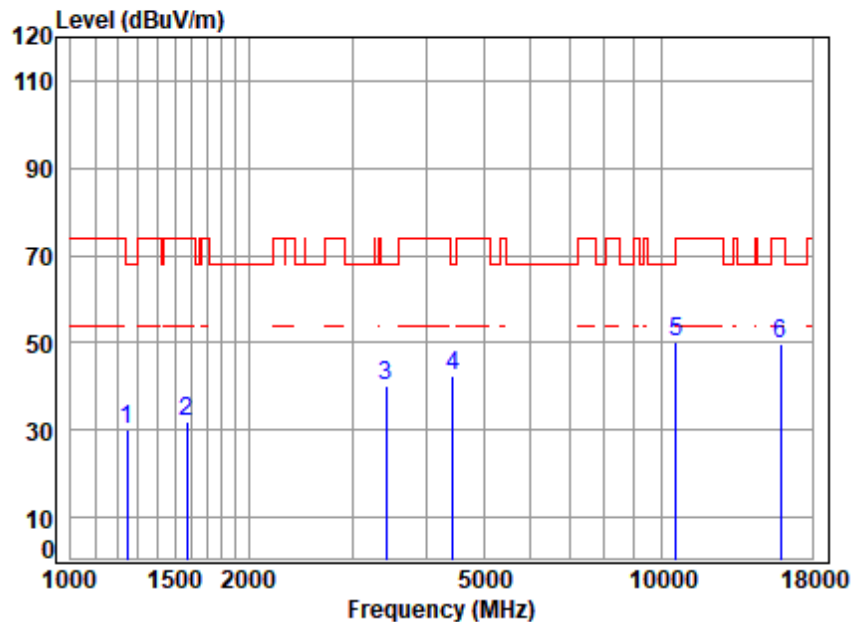


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5300 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.66	25.04	38.35	39.99	30.34	68.20	-37.86	peak
2	1574.265	4.17	26.90	38.40	39.09	31.76	74.00	-42.24	peak
3	3415.787	6.12	32.21	36.12	38.00	40.21	68.20	-27.99	peak
4	4443.453	7.09	34.28	35.77	36.73	42.33	68.20	-25.87	peak
5	10600.000	12.80	37.30	37.66	37.56	50.00	68.20	-18.20	peak
6	15900.000	14.35	41.40	37.38	31.29	49.66	74.00	-24.34	peak



Test Mode: 02; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

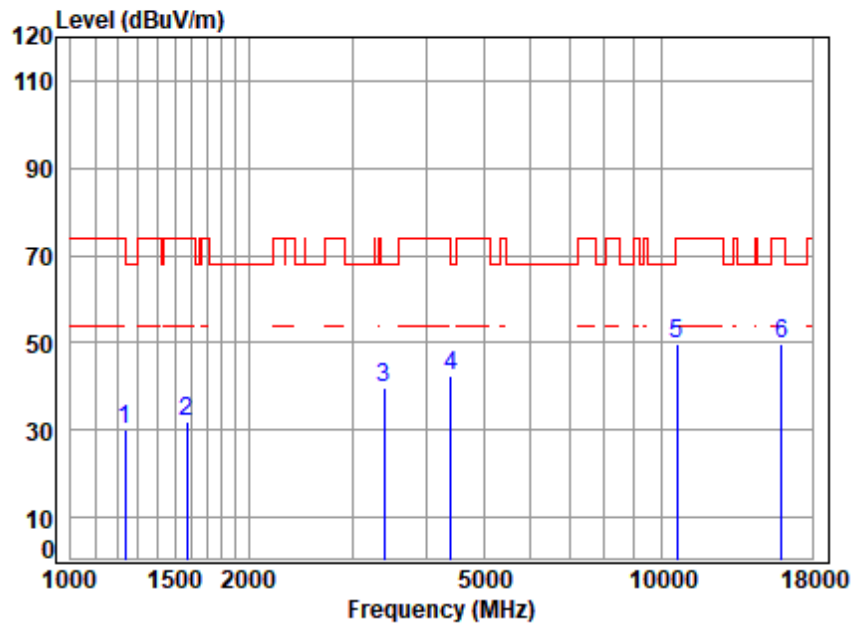


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5320 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	3.65	24.94	38.35	40.02	30.26	74.00	-43.74	peak
2	1574.265	4.17	26.90	38.40	39.48	32.15	74.00	-41.85	peak
3	3396.098	6.10	32.38	36.12	37.50	39.86	68.20	-28.34	peak
4	4405.090	7.06	34.74	35.79	36.41	42.42	68.20	-25.78	peak
5	10640.000	12.81	37.22	37.68	37.28	49.63	74.00	-24.37	peak
6	q15960.000	14.37	41.52	37.40	31.28	49.77	74.00	-24.23	peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

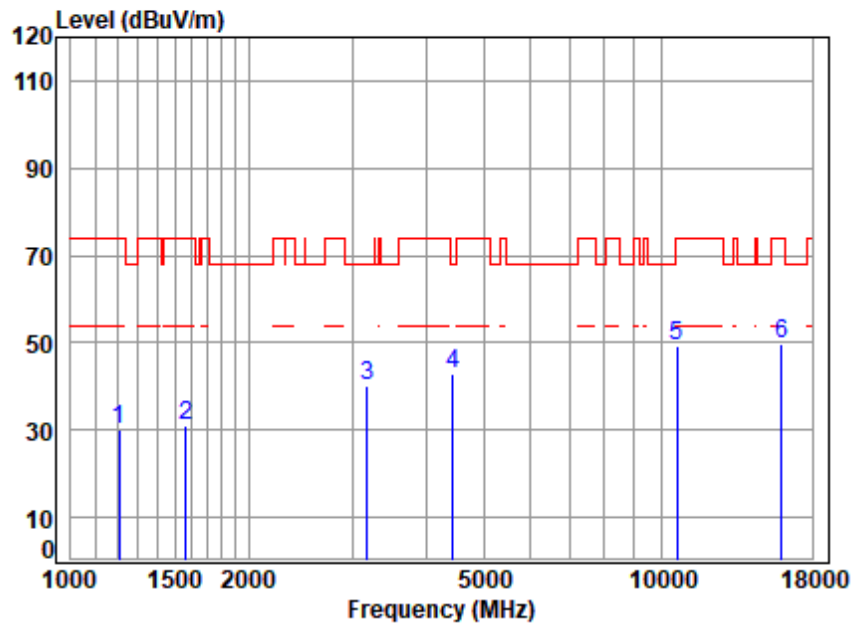


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5320 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1206.682	3.59	24.49	38.34	40.17	29.91	74.00	-44.09	peak
2	1569.721	4.16	26.92	38.40	38.53	31.21	74.00	-42.79	peak
3	3177.672	5.82	32.72	36.13	37.78	40.19	68.20	-28.01	peak
4	4443.453	7.09	34.28	35.77	37.15	42.75	68.20	-25.45	peak
5	10640.000	12.81	37.22	37.68	37.12	49.47	74.00	-24.53	peak
6	15960.000	14.37	41.52	37.40	31.31	49.80	74.00	-24.20	peak



Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

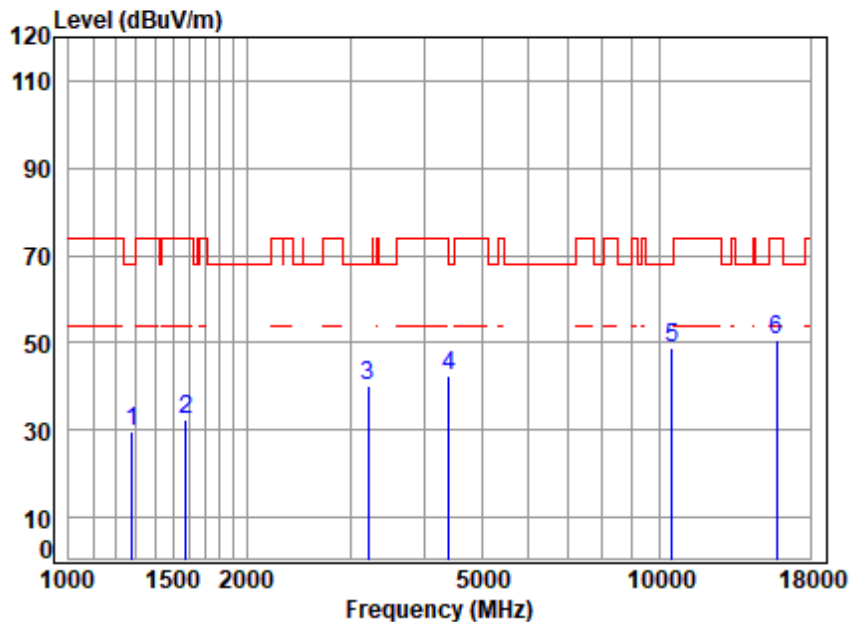


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5260 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1278.492	3.72	24.93	38.35	39.55	29.85	68.20	-38.35	peak
2	1578.822	4.17	26.88	38.40	39.69	32.34	74.00	-41.66	peak
3	3214.623	5.87	32.67	36.13	37.55	39.96	68.20	-28.24	peak
4	4405.090	7.06	34.74	35.79	36.47	42.48	68.20	-25.72	peak
5	10520.000	12.77	37.30	37.62	36.49	48.94	68.20	-19.26	peak
6	15780.000	14.31	41.28	37.33	32.36	50.62	74.00	-23.38	peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

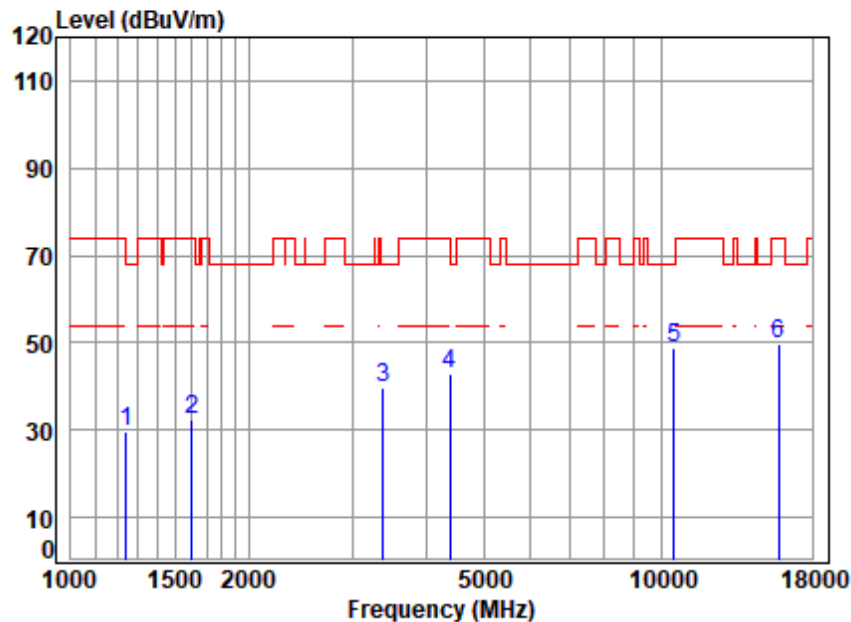


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5260 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	3.66	24.99	38.35	39.39	29.69	68.20	-38.51	peak
2	1601.804	4.20	26.78	38.40	39.63	32.21	74.00	-41.79	peak
3	3386.297	6.09	32.32	36.12	37.59	39.88	68.20	-28.32	peak
4	4379.699	7.04	34.64	35.81	37.19	43.06	74.00	-30.94	peak
5	10520.000	12.77	37.30	37.62	36.58	49.03	68.20	-19.17	peak
6	15780.000	14.31	41.28	37.33	31.48	49.74	74.00	-24.26	peak



Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

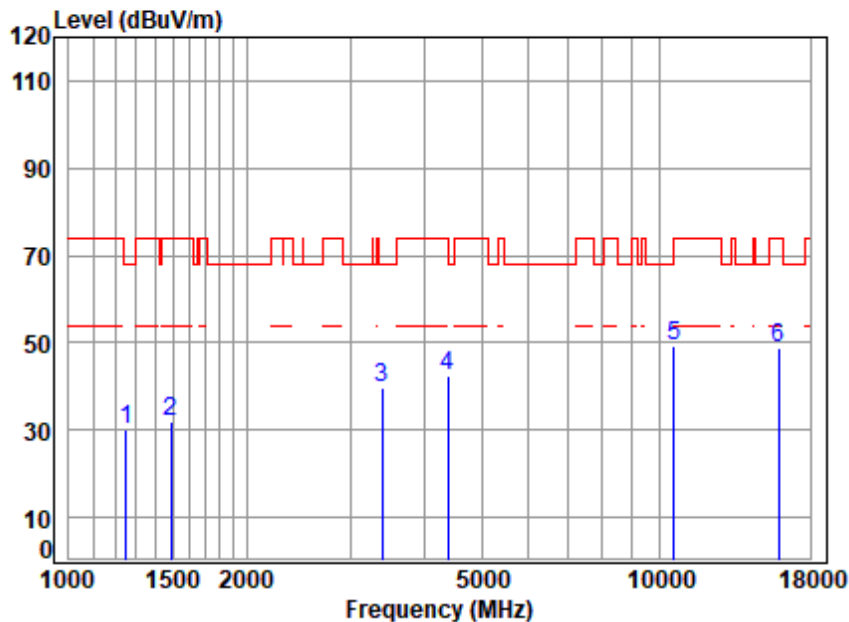


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5300 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1252.885	3.67	25.08	38.35	39.62	30.02	68.20	-38.18	peak
2	1490.142	4.05	26.52	38.39	39.62	31.80	74.00	-42.20	peak
3	3396.098	6.10	32.38	36.12	37.28	39.64	68.20	-28.56	peak
4	4392.376	7.05	34.74	35.80	36.63	42.62	74.00	-31.38	peak
5	10600.000	12.80	37.30	37.66	36.84	49.28	68.20	-18.92	peak
6	15900.000	14.35	41.40	37.38	30.57	48.94	74.00	-25.06	peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

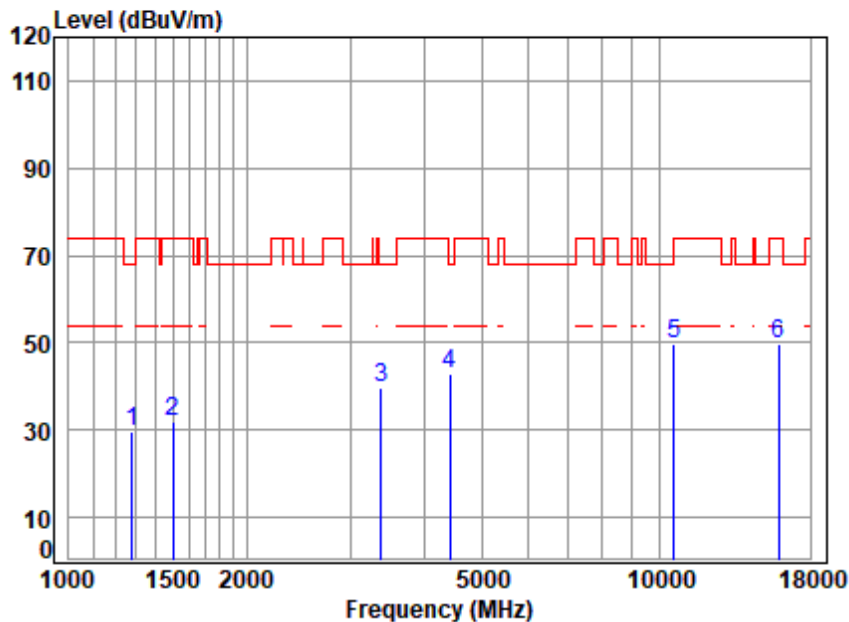


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5300 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1278.492	3.72	24.93	38.35	39.49	29.79	68.20	-38.41	peak
2	1503.119	4.07	26.81	38.39	39.28	31.77	74.00	-42.23	peak
3	3386.297	6.09	32.32	36.12	37.34	39.63	68.20	-28.57	peak
4	4417.841	7.07	34.59	35.78	36.88	42.76	68.20	-25.44	peak
5	10600.000	12.80	37.30	37.66	37.46	49.90	68.20	-18.30	peak
6	15900.000	14.35	41.40	37.38	31.14	49.51	74.00	-24.49	peak



Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

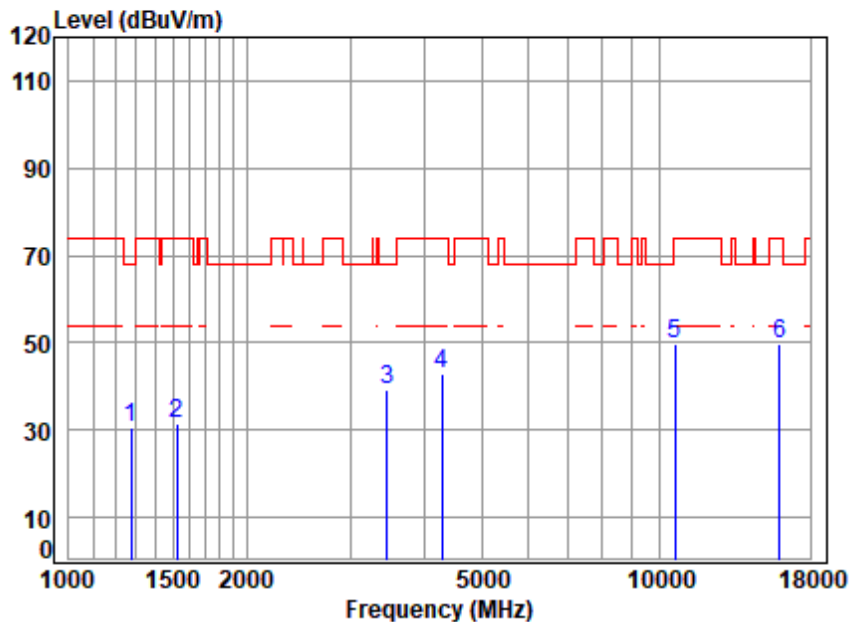


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5320 TX RSE
Note : 5G WIFI 11N20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1274.802	3.71	24.95	38.35	40.44	30.75	68.20	-37.45	peak
2	1525.000	4.10	26.90	38.39	38.73	31.34	74.00	-42.66	peak
3	3455.508	6.17	31.78	36.12	37.36	39.19	68.20	-29.01	peak
4	4291.977	6.99	33.97	35.88	37.93	43.01	74.00	-30.99	peak
5	10640.000	12.81	37.22	37.68	37.50	49.85	74.00	-24.15	peak
6	15960.000	14.37	41.52	37.40	31.14	49.63	74.00	-24.37	peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

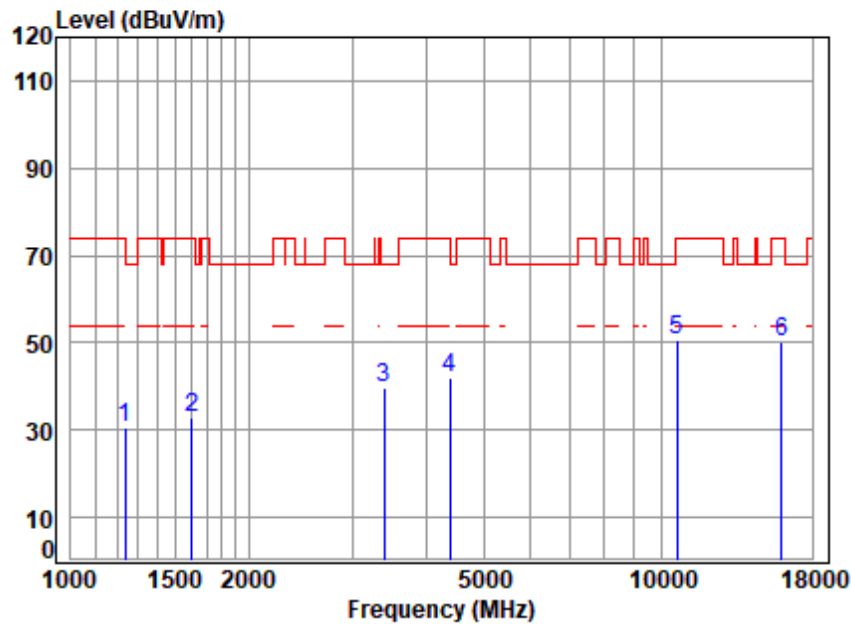


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5320 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1234.909	3.64	24.89	38.35	40.54	30.72	74.00	-43.28	peak
2	1601.804	4.20	26.78	38.40	40.09	32.67	74.00	-41.33	peak
3	3396.098	6.10	32.38	36.12	37.51	39.87	68.20	-28.33	peak
4	4392.376	7.05	34.74	35.80	36.15	42.14	74.00	-31.86	peak
5	10640.000	12.81	37.22	37.68	38.16	50.51	74.00	-23.49	peak
6	15960.000	14.37	41.52	37.40	31.53	50.02	74.00	-23.98	peak



Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

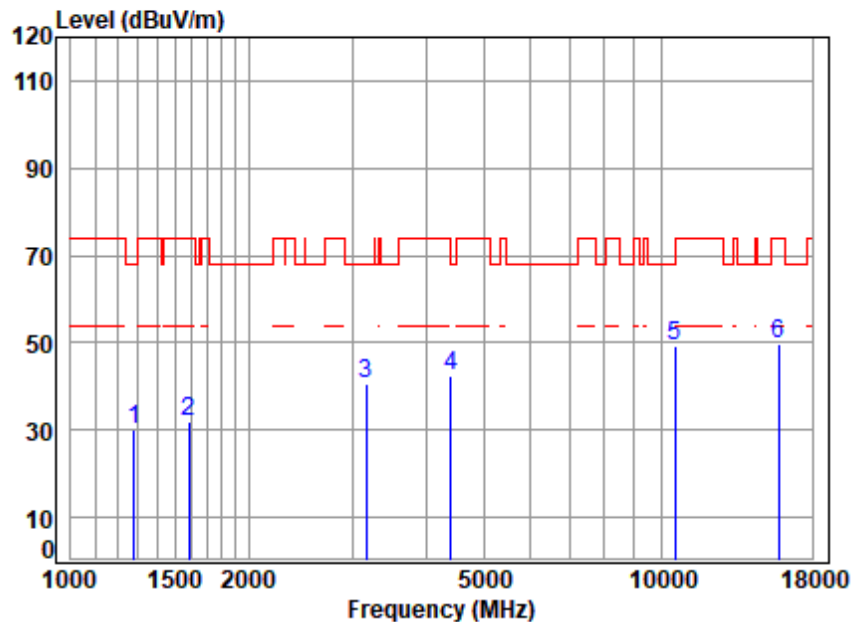


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5270 TX RSE
Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.72	24.91	38.35	39.94	30.22	68.20	-37.98	peak
2	1587.975	4.18	26.85	38.40	39.10	31.73	74.00	-42.27	peak
3	3159.355	5.80	32.57	36.13	38.30	40.54	68.20	-27.66	peak
4	4405.090	7.06	34.74	35.79	36.62	42.63	68.20	-25.57	peak
5	10540.000	12.78	37.30	37.63	36.95	49.40	68.20	-18.80	peak
6	15810.000	14.32	41.31	37.34	31.55	49.84	74.00	-24.16	peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

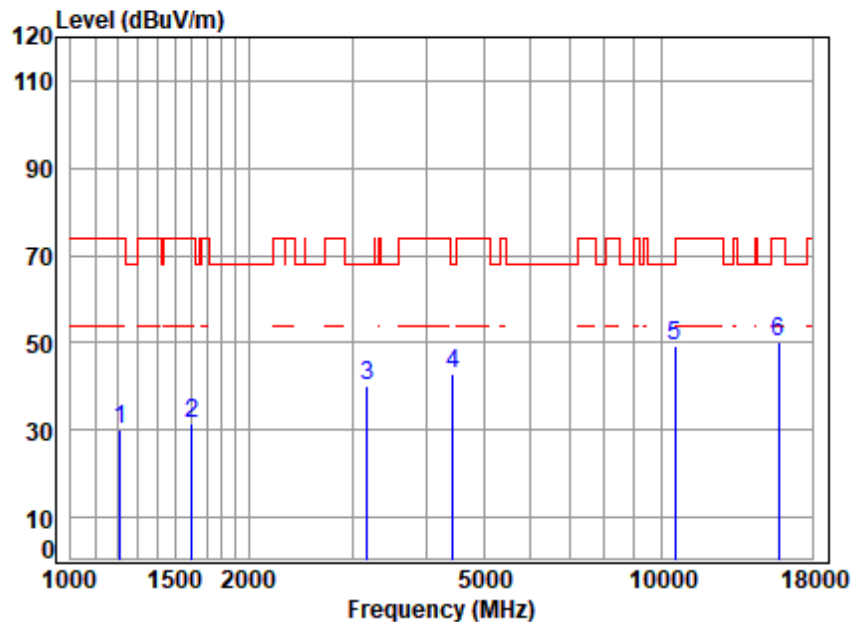

Site : chamber

Condition: 3m VERTICAL

Job No : 03424AT


Mode : 5270 TX RSE

Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1213.677	3.61	24.59	38.34	40.23	30.09	74.00	-43.91	peak
2	1601.804	4.20	26.78	38.40	38.73	31.31	74.00	-42.69	peak
3	3177.672	5.82	32.72	36.13	37.52	39.93	68.20	-28.27	peak
4	4443.453	7.09	34.28	35.77	37.30	42.90	68.20	-25.30	peak
5	10540.000	12.78	37.30	37.63	36.73	49.18	68.20	-19.02	peak
6	15810.000	14.32	41.31	37.34	31.96	50.25	74.00	-23.75	peak



Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

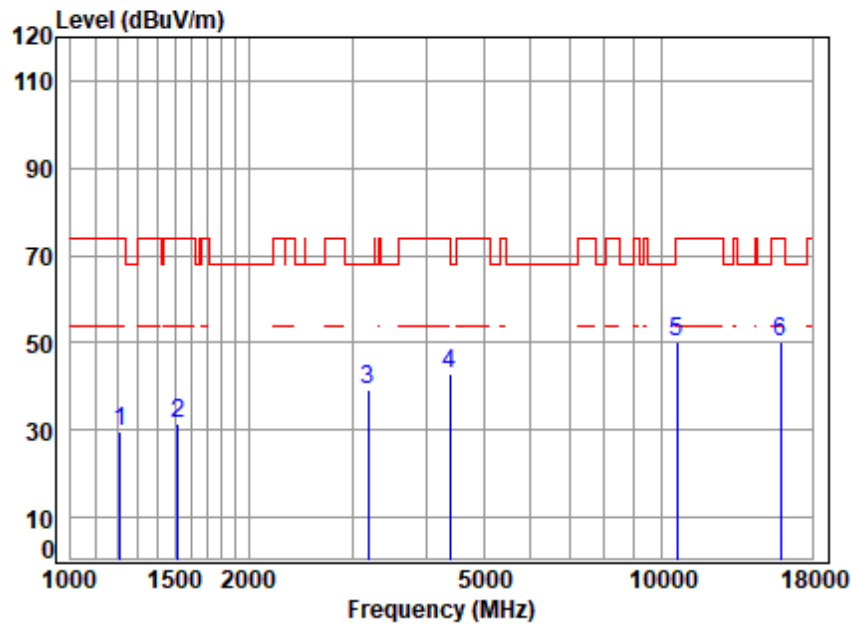


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5310 TX RSE
Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1213.677	3.61	24.59	38.34	39.86	29.72	74.00	-44.28	peak
2	1520.598	4.09	26.88	38.39	38.95	31.53	74.00	-42.47	peak
3	3186.869	5.83	32.79	36.13	36.87	39.36	68.20	-28.84	peak
4	4392.376	7.05	34.74	35.80	36.78	42.77	74.00	-31.23	peak
5	10620.000	12.80	37.26	37.67	37.77	50.16	74.00	-23.84	peak
6	15930.000	14.36	41.46	37.39	31.60	50.03	74.00	-23.97	peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

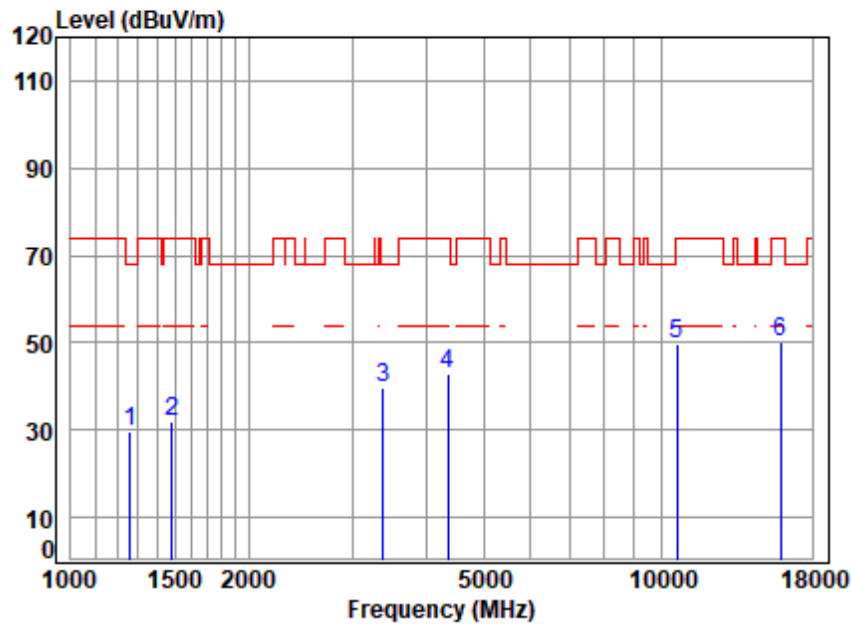


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5310 TX RSE
Note : 5G WIFI 11N40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1260.149	3.69	25.04	38.35	39.41	29.79	68.20	-38.41	peak
2	1485.841	4.04	26.40	38.39	39.94	31.99	74.00	-42.01	peak
3	3386.297	6.09	32.32	36.12	37.56	39.85	68.20	-28.35	peak
4	4354.454	7.03	34.44	35.83	37.25	42.89	74.00	-31.11	peak
5	10620.000	12.80	37.26	37.67	37.34	49.73	74.00	-24.27	peak
6	15930.000	14.36	41.46	37.39	31.59	50.02	74.00	-23.98	peak



Test Mode: 02; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

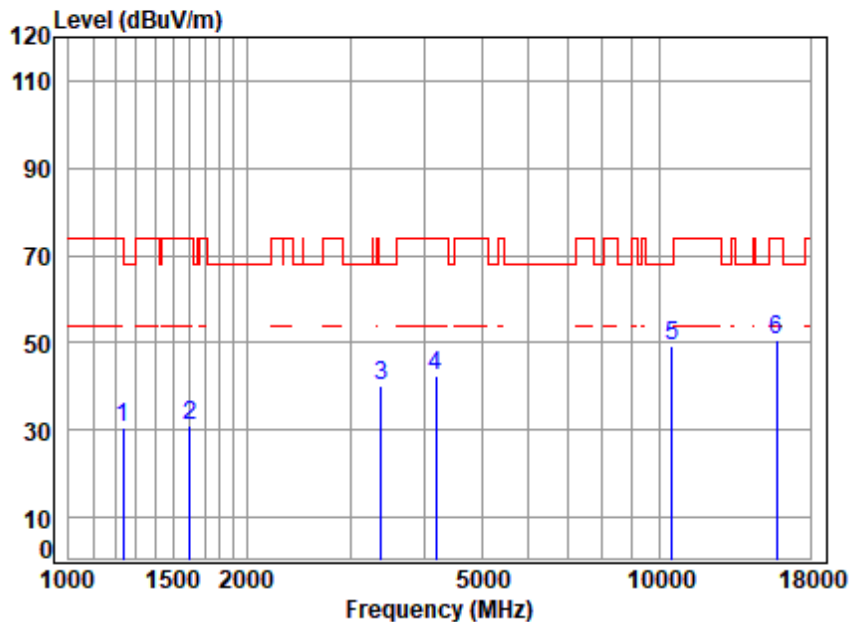


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5260 TX RSE
Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	3.65	24.94	38.35	40.18	30.42	74.00	-43.58	peak
2	1601.804	4.20	26.78	38.40	38.60	31.18	74.00	-42.82	peak
3	3376.523	6.07	32.26	36.12	37.88	40.09	68.20	-28.11	peak
4	4181.768	6.91	33.80	35.96	37.59	42.34	74.00	-31.66	peak
5	10520.000	12.77	37.30	37.62	36.72	49.17	68.20	-19.03	peak
6	15780.000	14.31	41.28	37.33	32.40	50.66	74.00	-23.34	peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

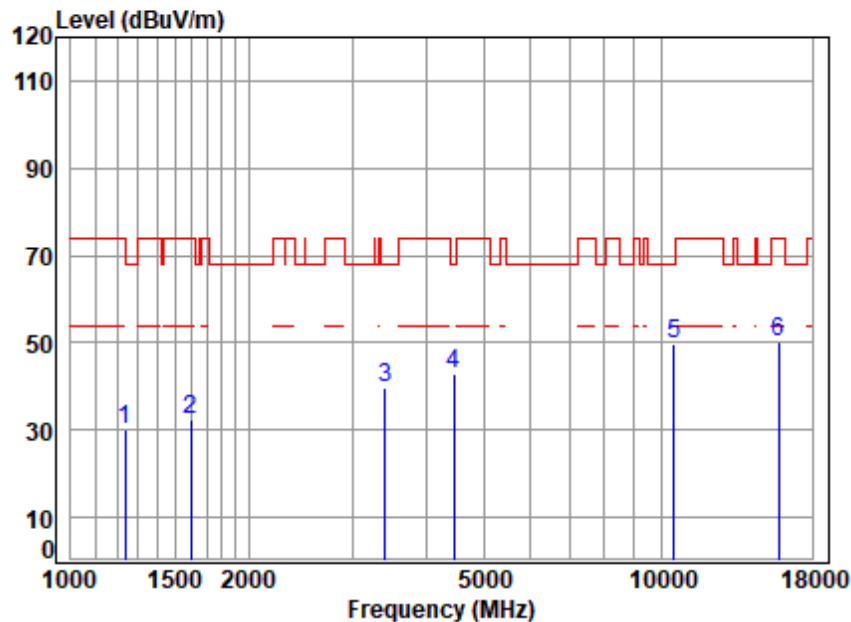


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5260 TX RSE
Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	3.65	24.94	38.35	39.91	30.15	74.00	-43.85	peak
2	1597.181	4.20	26.81	38.40	39.60	32.21	74.00	-41.79	peak
3	3405.929	6.11	32.33	36.12	37.20	39.52	68.20	-28.68	peak
4	4456.315	7.09	34.12	35.76	37.36	42.81	68.20	-25.39	peak
5	10520.000	12.77	37.30	37.62	37.45	49.90	68.20	-18.30	peak
6	15780.000	14.31	41.28	37.33	31.90	50.16	74.00	-23.84	peak



Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

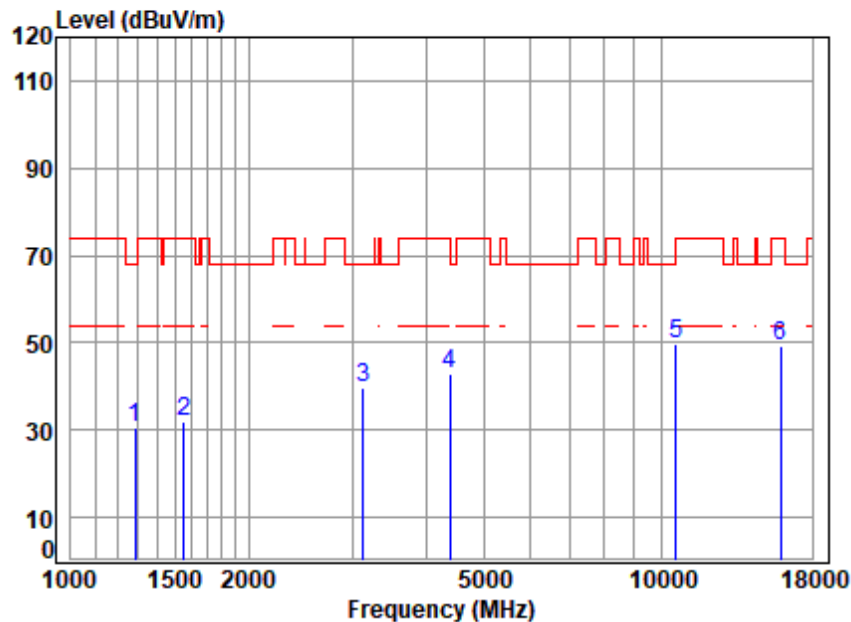


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5300 TX RSE
Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	3.73	24.88	38.35	40.42	30.68	68.20	-37.52	peak
2	1556.169	4.14	26.98	38.40	39.13	31.85	74.00	-42.15	peak
3	3132.079	5.76	32.18	36.13	37.69	39.50	68.20	-28.70	peak
4	4379.699	7.04	34.64	35.81	37.22	43.09	74.00	-30.91	peak
5	10600.000	12.80	37.30	37.66	37.50	49.94	68.20	-18.26	peak
6	15900.000	14.35	41.40	37.38	30.77	49.14	74.00	-24.86	peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

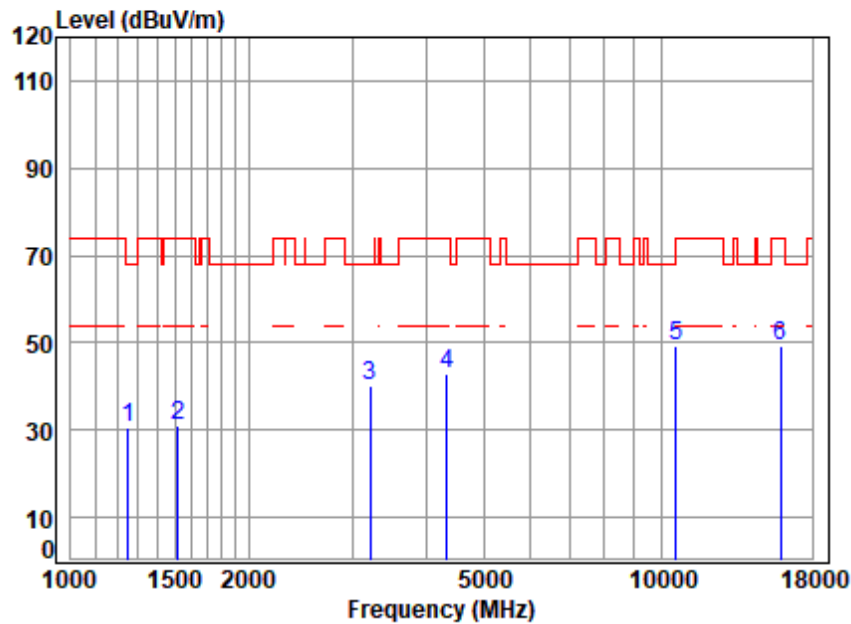

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5300 TX RSE
Note : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.67	25.09	38.35	40.02	30.43	68.20	-37.77	peak
2	1520.598	4.09	26.88	38.39	38.62	31.20	74.00	-42.80	peak
3	3214.623	5.87	32.67	36.13	37.59	40.00	68.20	-28.20	peak
4	4329.354	7.01	34.23	35.85	37.67	43.06	74.00	-30.94	peak
5	10600.000	12.80	37.30	37.66	36.75	49.19	68.20	-19.01	peak
6	15900.000	14.35	41.40	37.38	30.76	49.13	74.00	-24.87	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 91 of 1015

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

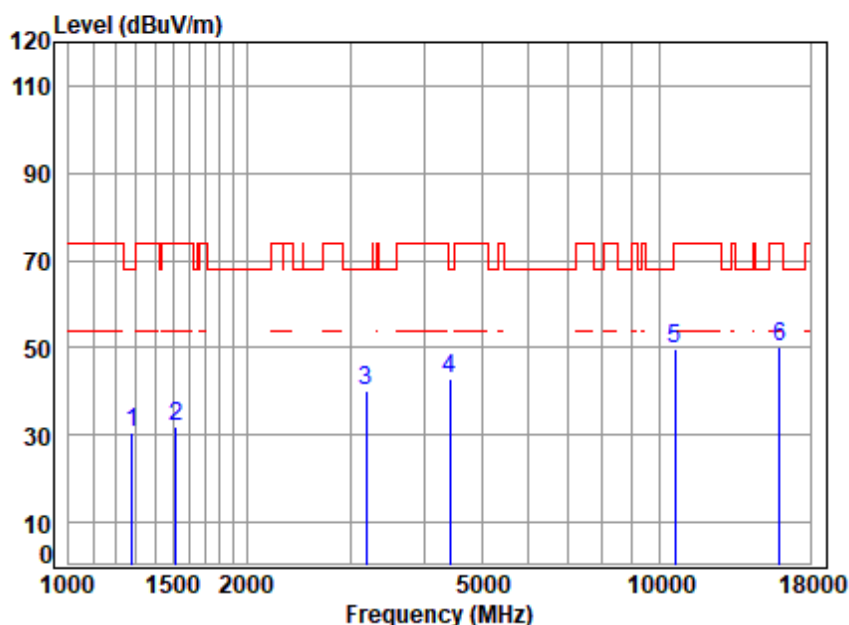

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5320 TX RSE
Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.72	24.91	38.35	40.30	30.58	68.20	-37.62	peak
2	1516.210	4.08	26.86	38.39	39.24	31.79	74.00	-42.21	peak
3	3186.869	5.83	32.79	36.13	37.83	40.32	68.20	-27.88	peak
4	4417.841	7.07	34.59	35.78	36.96	42.84	68.20	-25.36	peak
5	10640.000	12.81	37.22	37.68	37.44	49.79	74.00	-24.21	peak
6	q15960.000	14.37	41.52	37.40	31.51	50.00	74.00	-24.00	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

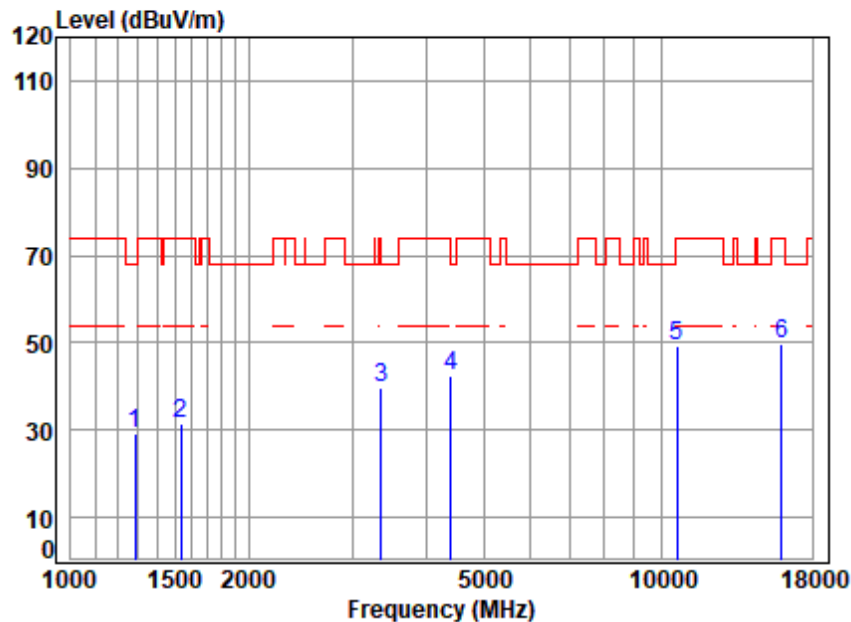


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5320 TX RSE
Note : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	3.73	24.88	38.35	39.10	29.36	68.20	-38.84	peak
2	1533.841	4.11	26.94	38.39	38.67	31.33	74.00	-42.67	peak
3	3357.061	6.05	32.14	36.12	37.72	39.79	74.00	-34.21	peak
4	4405.090	7.06	34.74	35.79	36.51	42.52	68.20	-25.68	peak
5	10640.000	12.81	37.22	37.68	36.92	49.27	74.00	-24.73	peak
6	15960.000	14.37	41.52	37.40	31.14	49.63	74.00	-24.37	peak



Test Mode: 02; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: Low

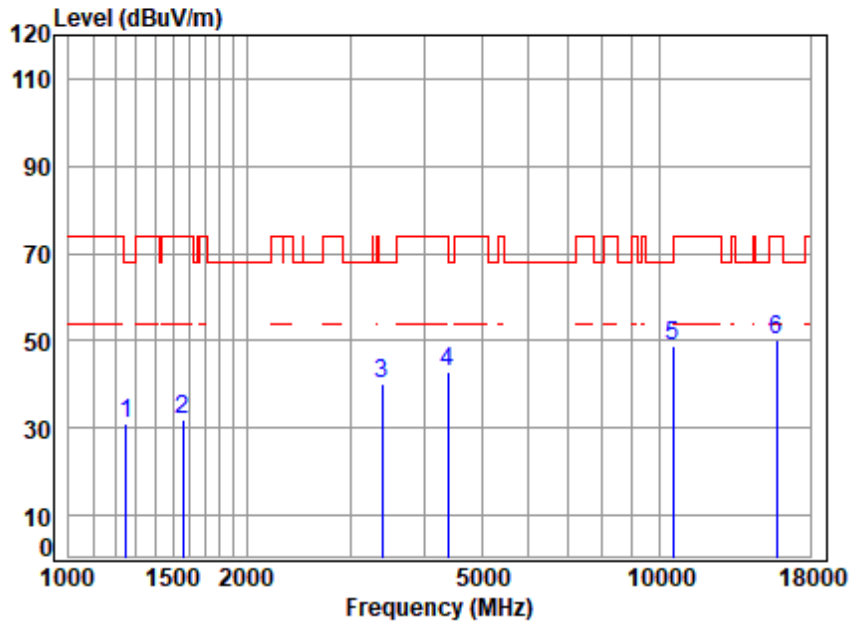


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5270 TX RSE
Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.67	25.09	38.35	40.76	31.17	68.20	-37.03	peak
2	1560.673	4.15	26.96	38.40	39.34	32.05	74.00	-41.95	peak
3	3396.098	6.10	32.38	36.12	37.83	40.19	68.20	-28.01	peak
4	4392.376	7.05	34.74	35.80	36.84	42.83	74.00	-31.17	peak
5	10540.000	12.78	37.30	37.63	36.41	48.86	68.20	-19.34	peak
6	15810.000	14.32	41.31	37.34	31.94	50.23	74.00	-23.77	peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

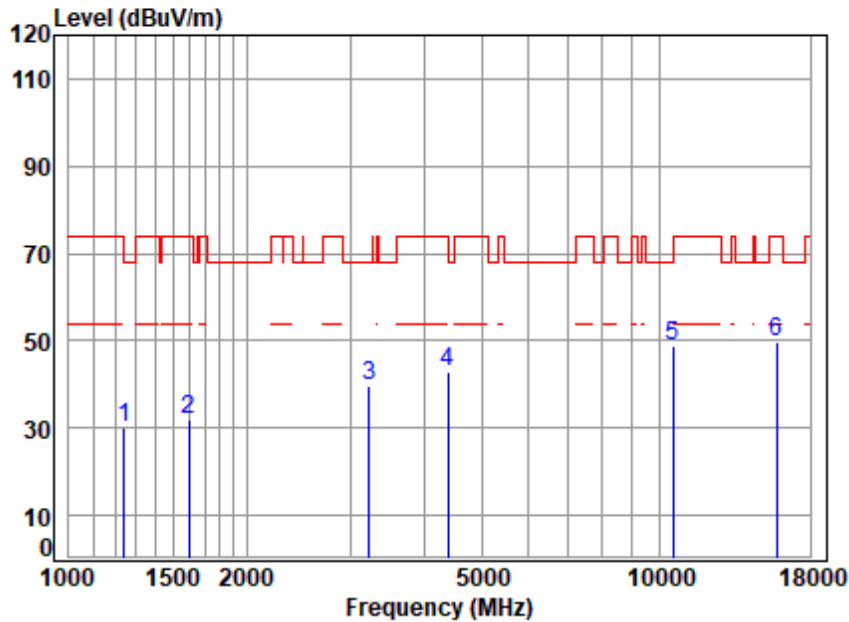

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5270 TX RSE
Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	3.66	24.99	38.35	39.98	30.28	68.20	-37.92	peak
2	1597.181	4.20	26.81	38.40	39.25	31.86	74.00	-42.14	peak
3	3223.928	5.88	32.52	36.13	37.38	39.65	68.20	-28.55	peak
4	4379.699	7.04	34.64	35.81	36.91	42.78	74.00	-31.22	peak
5	10540.000	12.78	37.30	37.63	36.43	48.88	68.20	-19.32	peak
6	15810.000	14.32	41.31	37.34	31.48	49.77	74.00	-24.23	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 95 of 1015

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

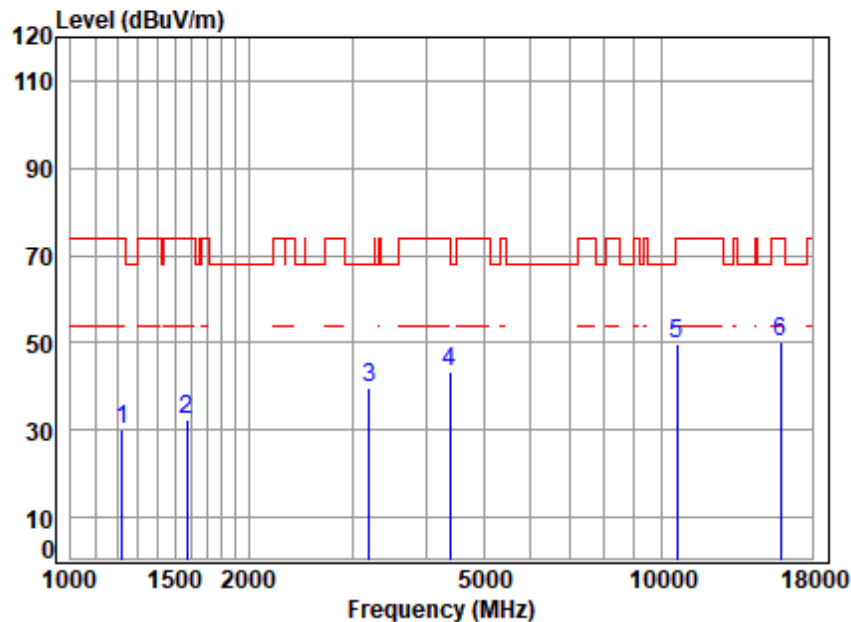

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5310 TX RSE
Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1220.714	3.62	24.69	38.34	40.12	30.09	74.00	-43.91	peak
2	1574.265	4.17	26.90	38.40	39.60	32.27	74.00	-41.73	peak
3	3196.094	5.84	32.87	36.13	37.14	39.72	68.20	-28.48	peak
4	4392.376	7.05	34.74	35.80	37.41	43.40	74.00	-30.60	peak
5	10620.000	12.80	37.26	37.67	37.54	49.93	74.00	-24.07	peak
6	q15930.000	14.36	41.46	37.39	31.90	50.33	74.00	-23.67	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

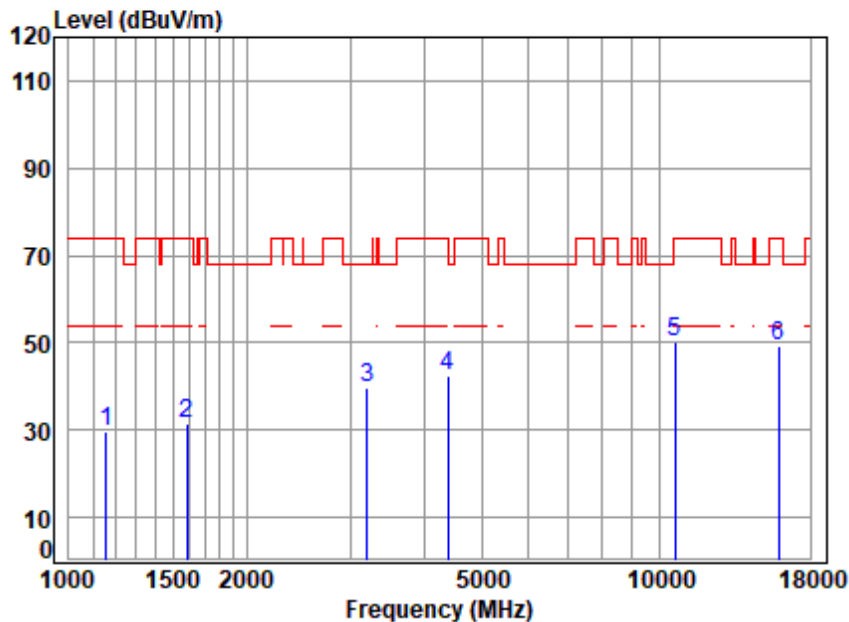


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5310 TX RSE
Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1158.828	3.51	23.99	38.33	40.64	29.81	74.00	-44.19	peak
2	1587.975	4.18	26.85	38.40	38.85	31.48	74.00	-42.52	peak
3	3196.094	5.84	32.87	36.13	37.05	39.63	68.20	-28.57	peak
4	4392.376	7.05	34.74	35.80	36.44	42.43	74.00	-31.57	peak
5	10620.000	12.80	37.26	37.67	37.66	50.05	74.00	-23.95	peak
6	15930.000	14.36	41.46	37.39	30.95	49.38	74.00	-24.62	peak



Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

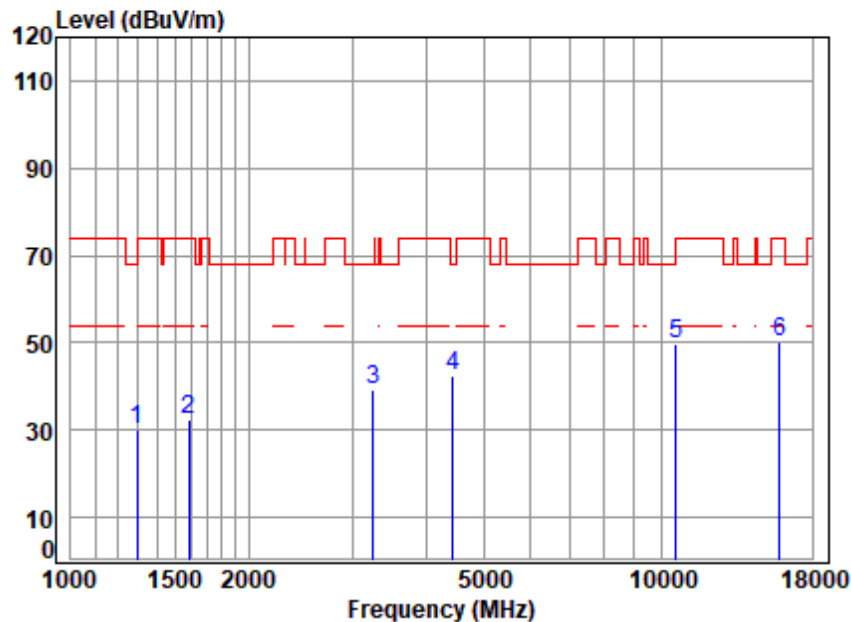


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5290 TX RSE
Note : 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	3.74	24.84	38.36	39.75	29.97	68.20	-38.23	peak
2	1583.392	4.18	26.87	38.40	39.90	32.55	74.00	-41.45	peak
3	3252.005	5.92	32.06	36.13	37.39	39.24	68.20	-28.96	peak
4	4430.628	7.08	34.43	35.77	36.55	42.29	68.20	-25.91	peak
5	10580.000	12.79	37.30	37.65	37.16	49.60	68.20	-18.60	peak
6	15870.000	14.34	41.37	37.37	31.77	50.11	74.00	-23.89	peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

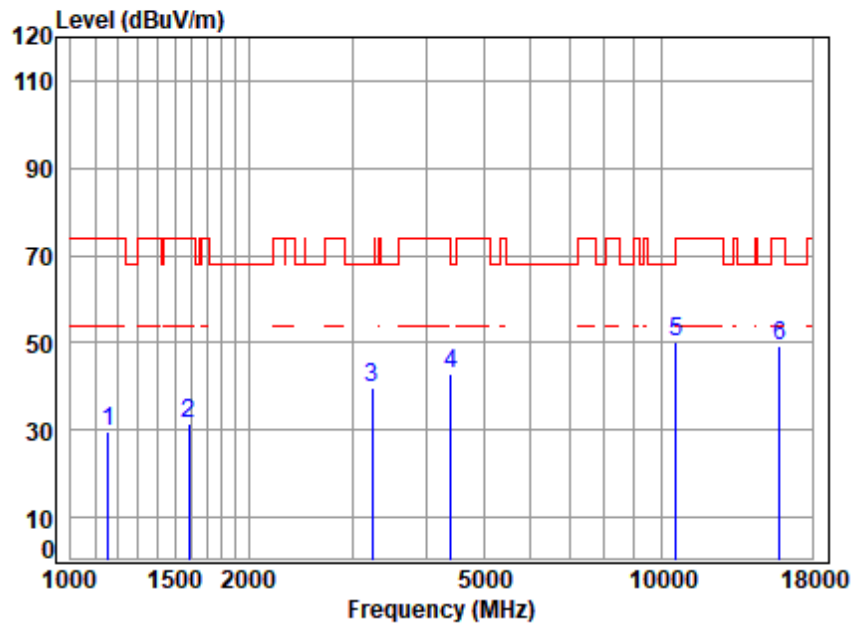


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5290 TX RSE
Note : 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1158.828	3.51	23.99	38.33	40.50	29.67	74.00	-44.33	peak
2	1583.392	4.18	26.87	38.40	38.97	31.62	74.00	-42.38	peak
3	3242.619	5.90	32.22	36.13	37.73	39.72	68.20	-28.48	peak
4	4405.090	7.06	34.74	35.79	36.91	42.92	68.20	-25.28	peak
5	10580.000	12.79	37.30	37.65	37.58	50.02	68.20	-18.18	peak
6	15870.000	14.34	41.37	37.37	31.06	49.40	74.00	-24.60	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

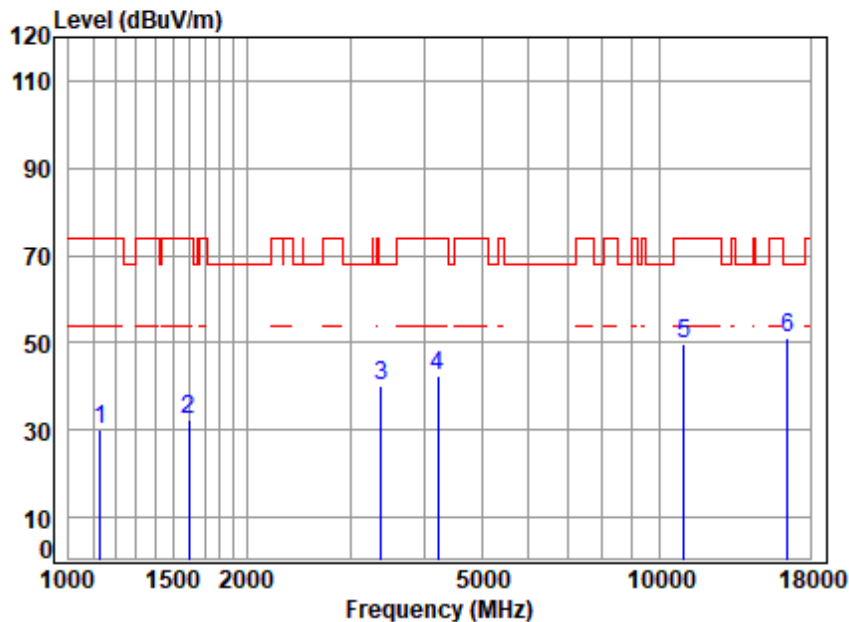


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5500 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1129.072	3.45	23.82	38.33	41.35	30.29	74.00	-43.71	peak
2	1597.181	4.20	26.81	38.40	39.78	32.39	74.00	-41.61	peak
3	3376.523	6.07	32.26	36.12	38.00	40.21	68.20	-27.99	peak
4	4218.186	6.93	33.80	35.93	37.69	42.49	74.00	-31.51	peak
5	11000.000	12.90	37.50	37.84	37.31	49.87	74.00	-24.13	peak
6	q16500.000	14.47	42.10	37.47	31.95	51.05	68.20	-17.15	peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

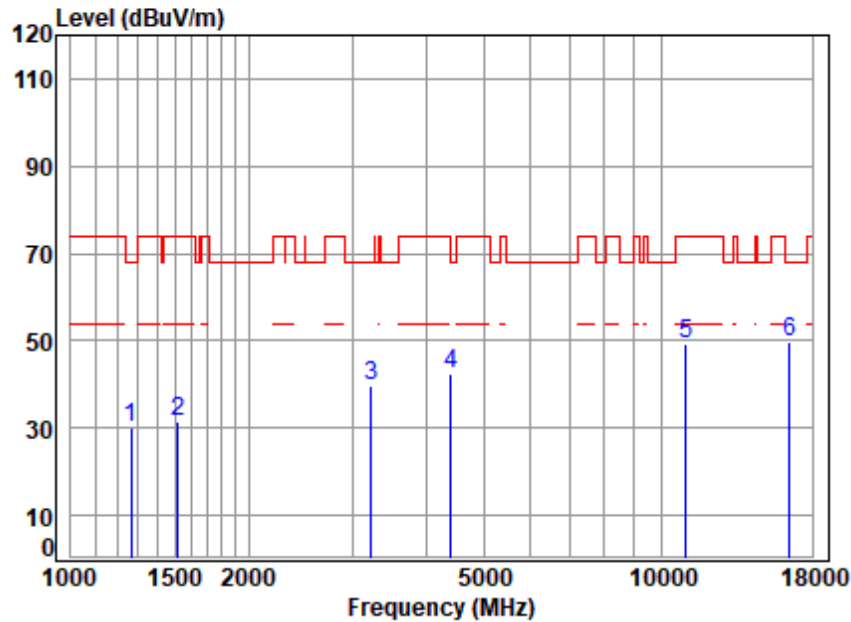


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03424AT
 Mode : 5500 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	3.70	25.00	38.35	39.68	30.03	68.20	-38.17	peak
2	1520.598	4.09	26.88	38.39	38.75	31.33	74.00	-42.67	peak
3	3223.928	5.88	32.52	36.13	37.45	39.72	68.20	-28.48	peak
4	4405.090	7.06	34.74	35.79	36.20	42.21	68.20	-25.99	peak
5	11000.000	12.90	37.50	37.84	36.84	49.40	74.00	-24.60	peak
6	16500.000	14.47	42.10	37.47	30.71	49.81	68.20	-18.39	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

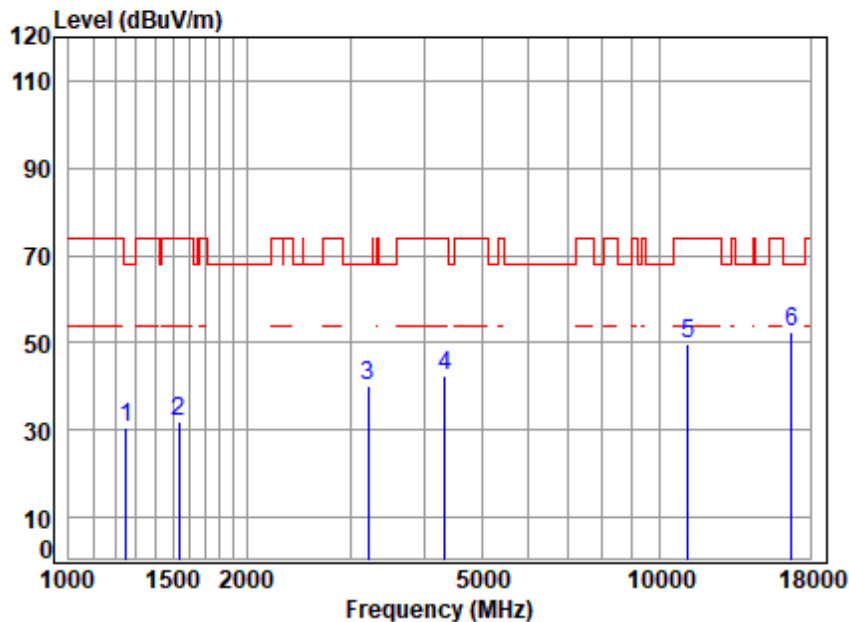


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5580 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.67	25.09	38.35	40.17	30.58	68.20	-37.62	peak
2	1538.281	4.12	26.95	38.39	39.26	31.94	74.00	-42.06	peak
3	3214.623	5.87	32.67	36.13	37.83	40.24	68.20	-27.96	peak
4	4341.886	7.02	34.34	35.84	36.75	42.27	74.00	-31.73	peak
5	11160.000	12.93	37.62	37.79	37.00	49.76	74.00	-24.24	peak
6	16740.000	14.51	42.78	37.49	32.80	52.60	68.20	-15.60	peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

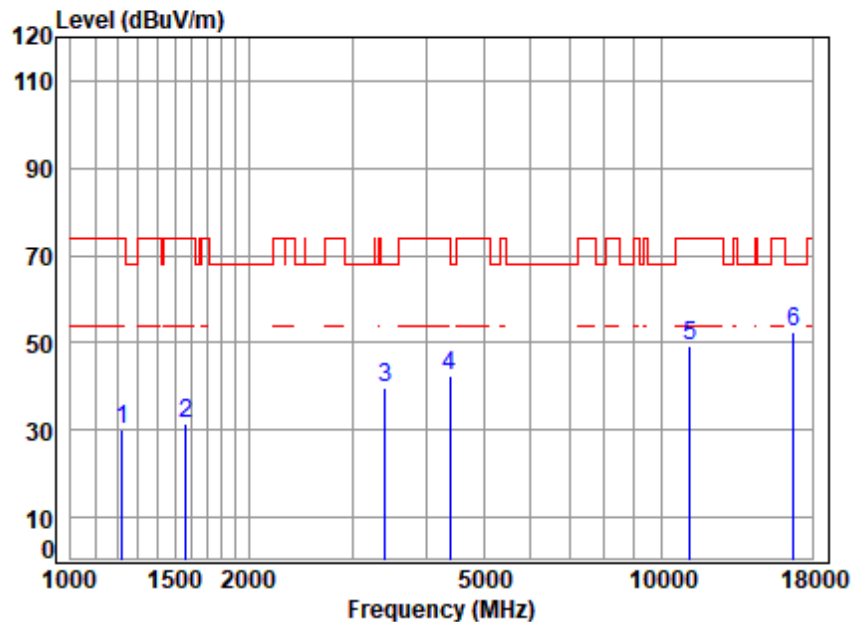


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5580 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1224.247	3.62	24.74	38.34	39.99	30.01	74.00	-43.99	peak
2	1569.721	4.16	26.92	38.40	38.88	31.56	74.00	-42.44	peak
3	3405.929	6.11	32.33	36.12	37.23	39.55	68.20	-28.65	peak
4	4392.376	7.05	34.74	35.80	36.51	42.50	74.00	-31.50	peak
5	11160.000	12.93	37.62	37.79	36.47	49.23	74.00	-24.77	peak
6	q16740.000	14.51	42.78	37.49	32.63	52.43	68.20	-15.77	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

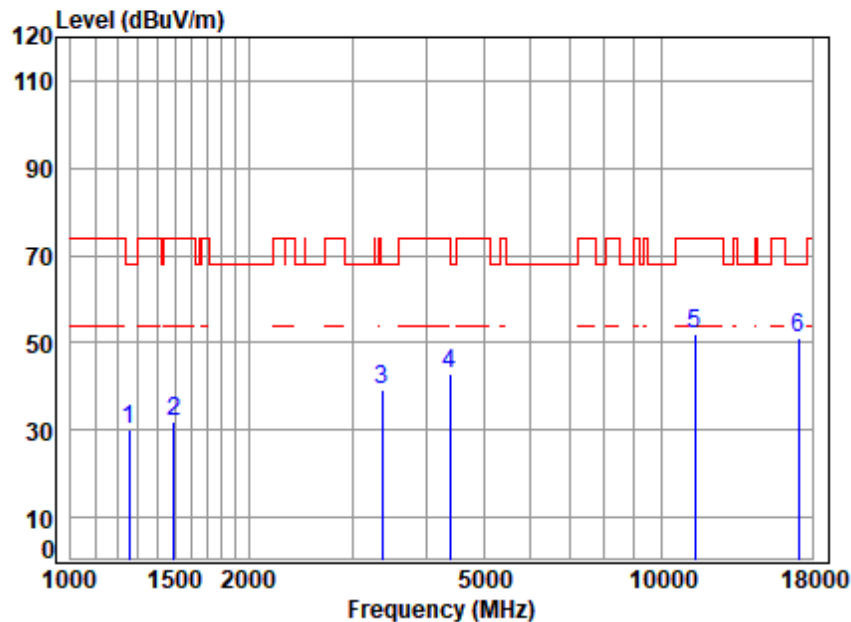


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5700 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	3.68	25.06	38.35	39.74	30.13	68.20	-38.07	peak
2	1494.455	4.05	26.64	38.39	39.78	32.08	74.00	-41.92	peak
3	3366.778	6.06	32.20	36.12	37.29	39.43	68.20	-28.77	peak
4	4379.699	7.04	34.64	35.81	36.83	42.70	74.00	-31.30	peak
5	11400.000	12.98	37.70	37.72	38.91	51.87	74.00	-22.13	peak
6	17100.000	14.62	43.10	37.53	30.90	51.09	68.20	-17.11	peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

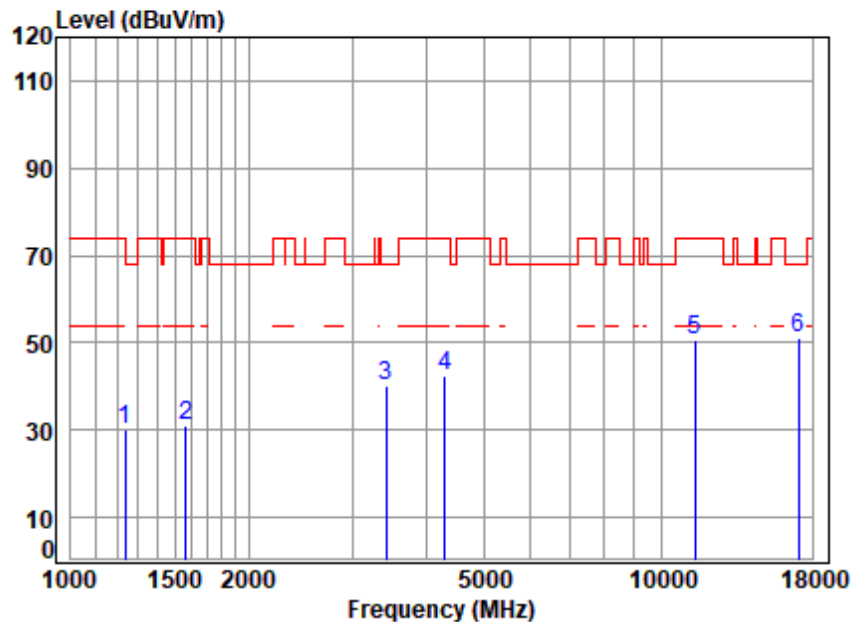


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5700 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	3.65	24.94	38.35	39.84	30.08	74.00	-43.92	peak
2	1565.191	4.15	26.94	38.40	38.55	31.24	74.00	-42.76	peak
3	3415.787	6.12	32.21	36.12	37.82	40.03	68.20	-28.17	peak
4	4304.400	6.99	34.04	35.87	37.39	42.55	74.00	-31.45	peak
5	11400.000	12.98	37.70	37.72	37.88	50.84	74.00	-23.16	peak
6	17100.000	14.62	43.10	37.53	31.02	51.21	68.20	-16.99	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

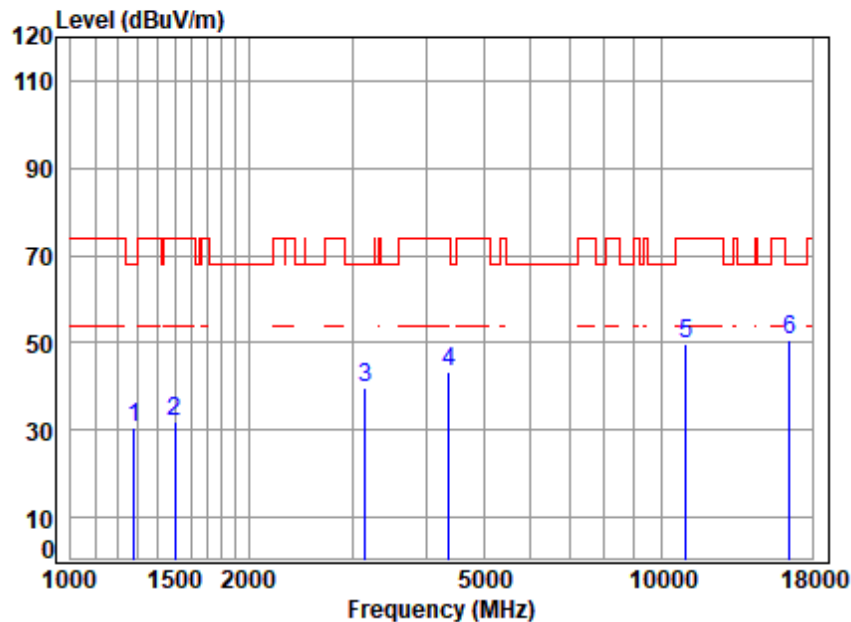


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5500 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.72	24.91	38.35	40.39	30.67	68.20	-37.53	peak
2	1503.119	4.07	26.81	38.39	39.44	31.93	74.00	-42.07	peak
3	3150.237	5.78	32.50	36.13	37.44	39.59	68.20	-28.61	peak
4	4367.058	7.04	34.54	35.82	37.45	43.21	74.00	-30.79	peak
5	11000.000	12.90	37.50	37.84	37.22	49.78	74.00	-24.22	peak
6	16500.000	14.47	42.10	37.47	31.33	50.43	68.20	-17.77	peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

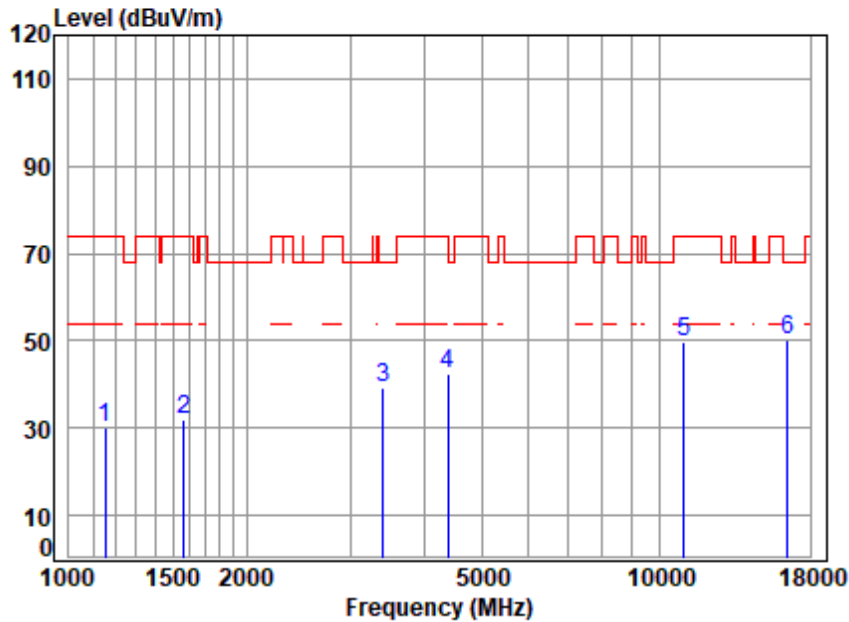


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5500 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	3.49	23.92	38.33	41.03	30.11	74.00	-43.89	peak
2	1565.191	4.15	26.94	38.40	39.09	31.78	74.00	-42.22	peak
3	3405.929	6.11	32.33	36.12	37.12	39.44	68.20	-28.76	peak
4	4379.699	7.04	34.64	35.81	36.59	42.46	74.00	-31.54	peak
5	11000.000	12.90	37.50	37.84	37.09	49.65	74.00	-24.35	peak
6	16500.000	14.47	42.10	37.47	31.10	50.20	68.20	-18.00	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

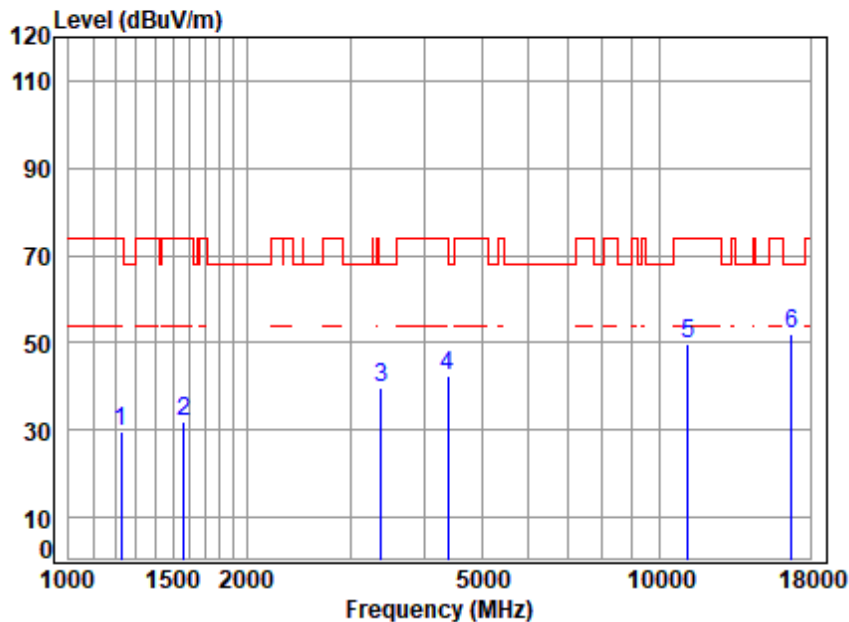


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03424AT
 Mode : 5580 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1227.791	3.63	24.79	38.34	39.67	29.75	74.00	-44.25	peak
2	1565.191	4.15	26.94	38.40	39.10	31.79	74.00	-42.21	peak
3	3386.297	6.09	32.32	36.12	37.34	39.63	68.20	-28.57	peak
4	4379.699	7.04	34.64	35.81	36.79	42.66	74.00	-31.34	peak
5	11160.000	12.93	37.62	37.79	37.01	49.77	74.00	-24.23	peak
6	16740.000	14.51	42.78	37.49	32.00	51.80	68.20	-16.40	peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

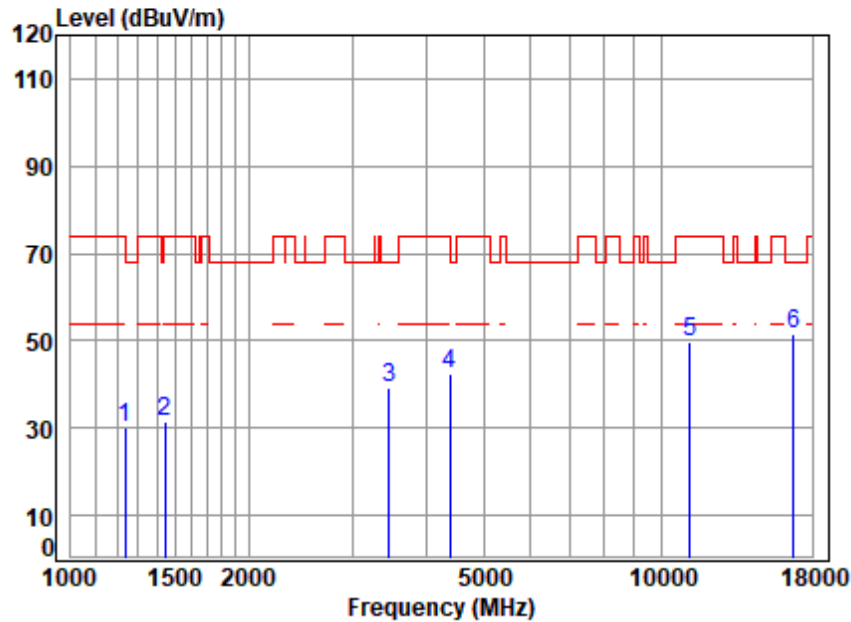


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5580 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	3.65	24.94	38.35	39.69	29.93	74.00	-44.07	peak
2	1443.509	3.98	25.30	38.38	40.60	31.50	74.00	-42.50	peak
3	3455.508	6.17	31.78	36.12	37.57	39.40	68.20	-28.80	peak
4	4379.699	7.04	34.64	35.81	36.41	42.28	74.00	-31.72	peak
5	11160.000	12.93	37.62	37.79	36.77	49.53	74.00	-24.47	peak
6	16740.000	14.51	42.78	37.49	31.94	51.74	68.20	-16.46	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

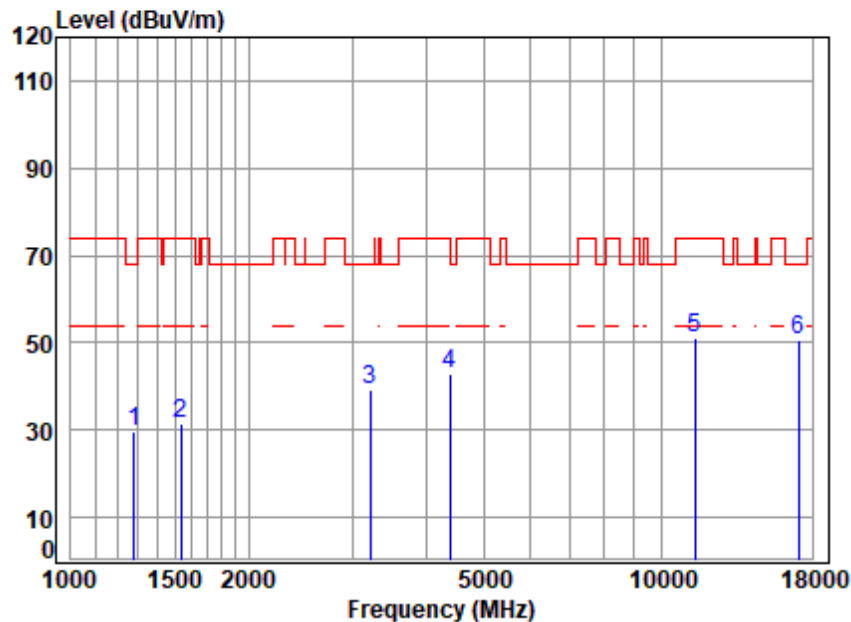


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5700 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.72	24.91	38.35	39.56	29.84	68.20	-38.36	peak
2	1538.281	4.12	26.95	38.39	38.75	31.43	74.00	-42.57	peak
3	3214.623	5.87	32.67	36.13	36.94	39.35	68.20	-28.85	peak
4	4379.699	7.04	34.64	35.81	36.84	42.71	74.00	-31.29	peak
5	11400.000	12.98	37.70	37.72	38.17	51.13	74.00	-22.87	peak
6	17100.000	14.62	43.10	37.53	30.65	50.84	68.20	-17.36	peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

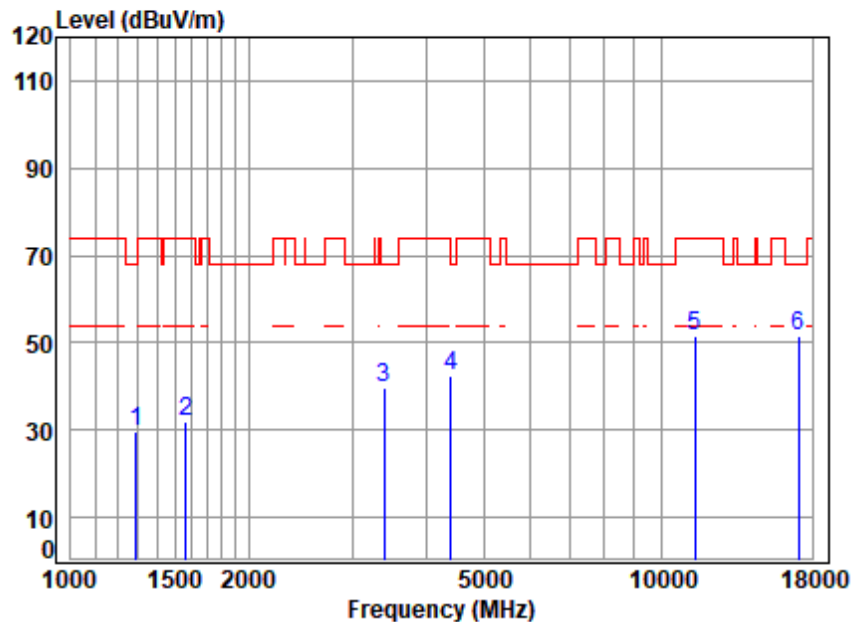


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5700 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.74	24.86	38.36	39.49	29.73	68.20	-38.47	peak
2	1565.191	4.15	26.94	38.40	39.41	32.10	74.00	-41.90	peak
3	3396.098	6.10	32.38	36.12	37.15	39.51	68.20	-28.69	peak
4	4405.090	7.06	34.74	35.79	36.62	42.63	68.20	-25.57	peak
5	11400.000	12.98	37.70	37.72	38.62	51.58	74.00	-22.42	peak
6	17100.000	14.62	43.10	37.53	31.58	51.77	68.20	-16.43	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

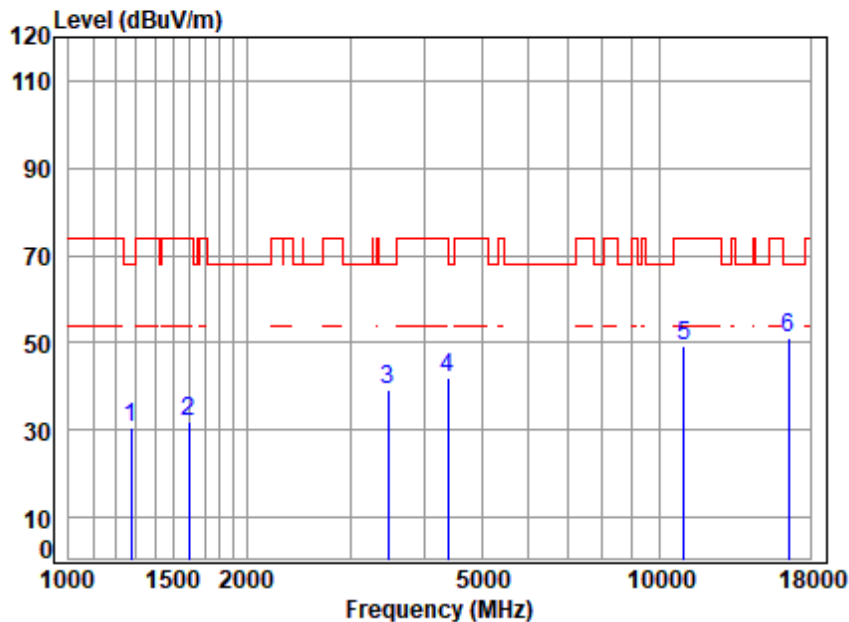


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03424AT
 Mode : 5510 TX RSE
 Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1274.802	3.71	24.95	38.35	40.12	30.43	68.20	-37.77	peak
2	1597.181	4.20	26.81	38.40	39.28	31.89	74.00	-42.11	peak
3	3475.541	6.19	31.70	36.12	37.52	39.29	68.20	-28.91	peak
4	4392.376	7.05	34.74	35.80	36.02	42.01	74.00	-31.99	peak
5	11020.000	12.90	37.50	37.83	36.70	49.27	74.00	-24.73	peak
6	16530.000	14.48	42.16	37.47	31.81	50.98	68.20	-17.22	peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

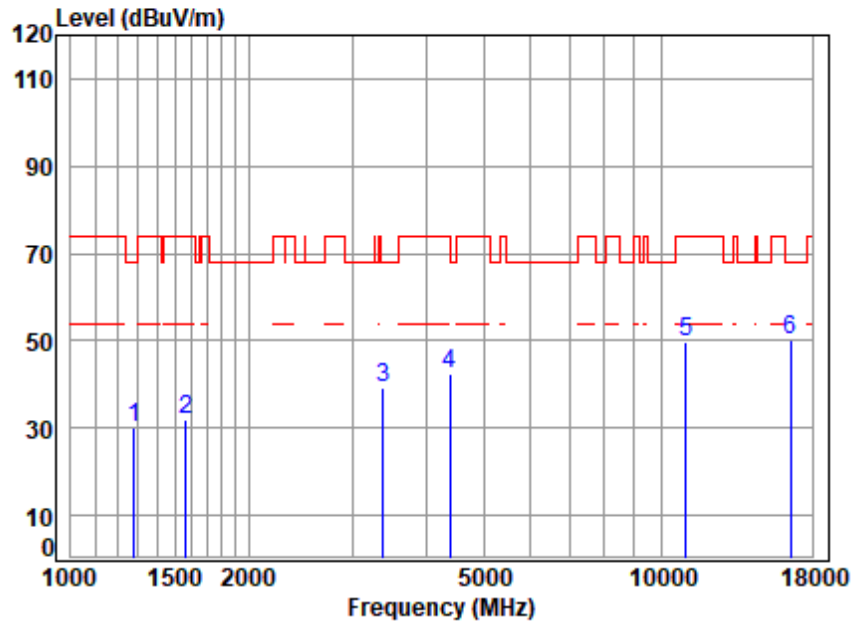

Site : chamber

Condition: 3m VERTICAL

Job No : 03424AT


Mode : 5510 TX RSE

Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.72	24.91	38.35	39.92	30.20	68.20	-38.00	peak
2	1569.721	4.16	26.92	38.40	39.46	32.14	74.00	-41.86	peak
3	3376.523	6.07	32.26	36.12	37.08	39.29	68.20	-28.91	peak
4	4379.699	7.04	34.64	35.81	36.40	42.27	74.00	-31.73	peak
5	11020.000	12.90	37.50	37.83	37.17	49.74	74.00	-24.26	peak
6	16530.000	14.48	42.16	37.47	31.04	50.21	68.20	-17.99	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

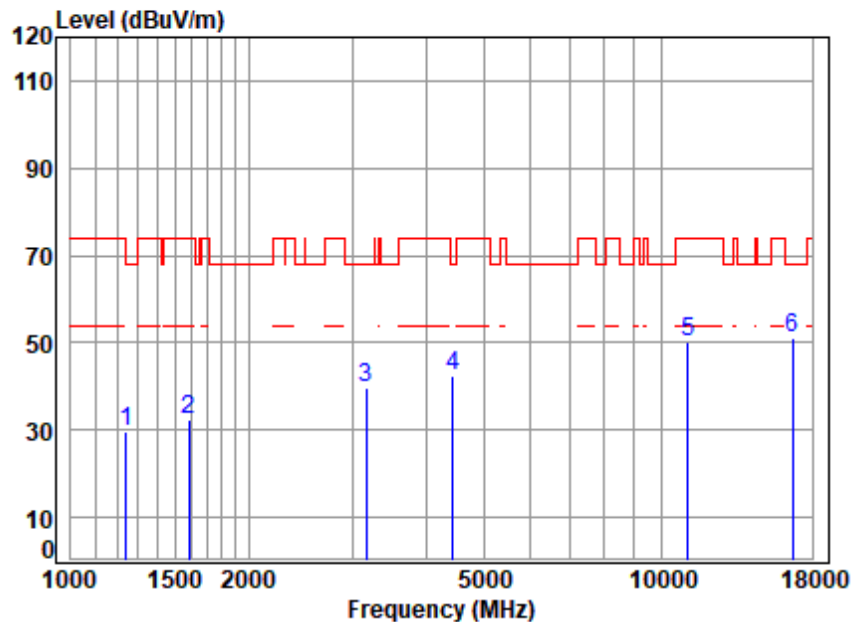


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5550 TX RSE
Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	3.66	24.99	38.35	39.23	29.53	68.20	-38.67	peak
2	1583.392	4.18	26.87	38.40	39.65	32.30	74.00	-41.70	peak
3	3168.500	5.81	32.65	36.13	37.36	39.69	68.20	-28.51	peak
4	4430.628	7.08	34.43	35.77	36.75	42.49	68.20	-25.71	peak
5	11100.000	12.92	37.50	37.81	37.45	50.06	74.00	-23.94	peak
6	16650.000	14.50	42.50	37.48	31.70	51.22	68.20	-16.98	peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

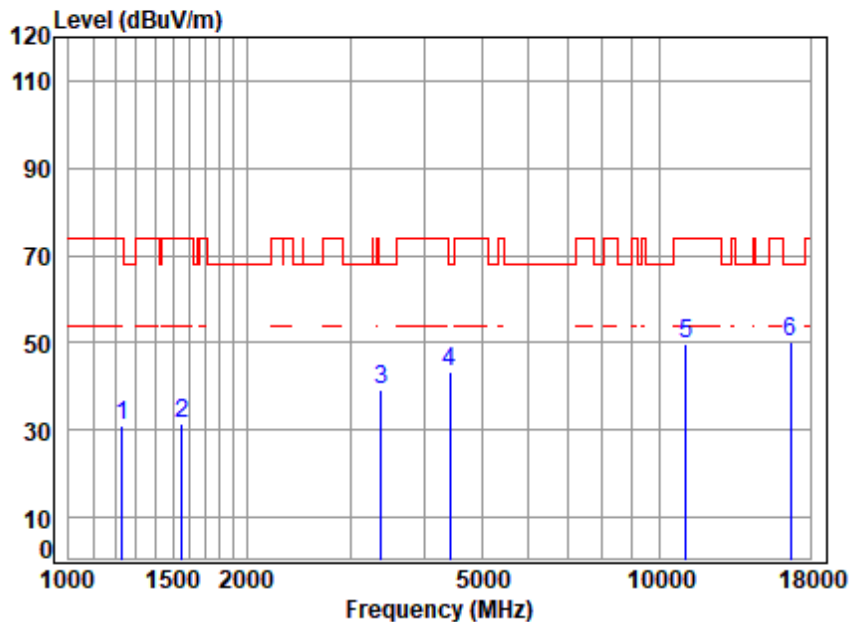


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5550 TX RSE
Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1231.345	3.64	24.84	38.35	40.69	30.82	74.00	-43.18	peak
2	1556.169	4.14	26.98	38.40	38.56	31.28	74.00	-42.72	peak
3	3386.297	6.09	32.32	36.12	37.06	39.35	68.20	-28.85	peak
4	4417.841	7.07	34.59	35.78	37.30	43.18	68.20	-25.02	peak
5	11100.000	12.92	37.50	37.81	37.22	49.83	74.00	-24.17	peak
6	q16650.000	14.50	42.50	37.48	30.61	50.13	68.20	-18.07	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

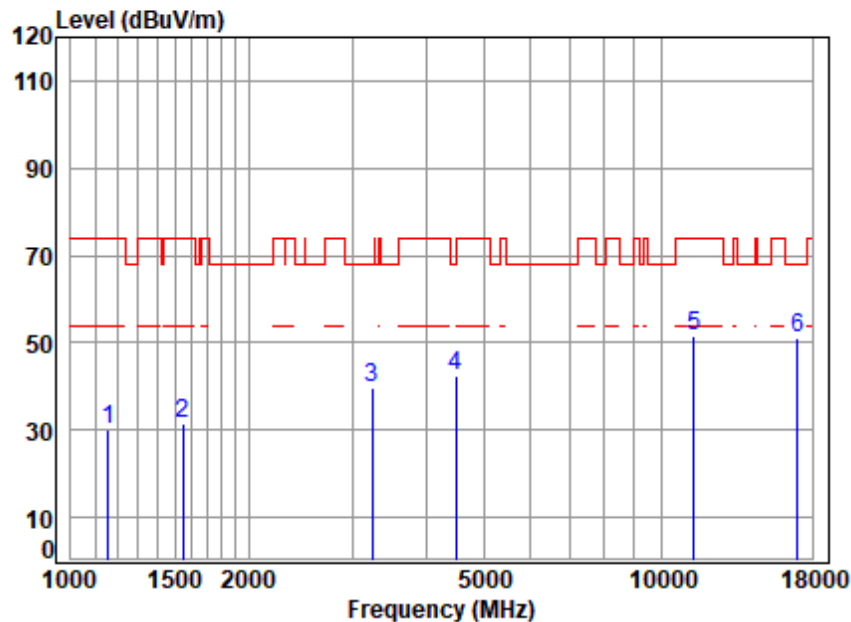

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03424AT
 Mode : 5670 TX RSE
 Note : 5G WIFI 11N40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1158.828	3.51	23.99	38.33	41.00	30.17	74.00	-43.83	peak
2	1547.199	4.13	26.99	38.39	38.90	31.63	74.00	-42.37	peak
3	3233.260	5.89	32.37	36.13	37.54	39.67	68.20	-28.53	peak
4	4495.125	7.12	33.66	35.73	37.27	42.32	68.20	-25.88	peak
5	11340.000	12.97	37.76	37.74	38.60	51.59	74.00	-22.41	peak
6	17010.000	14.57	43.10	37.51	30.87	51.03	68.20	-17.17	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

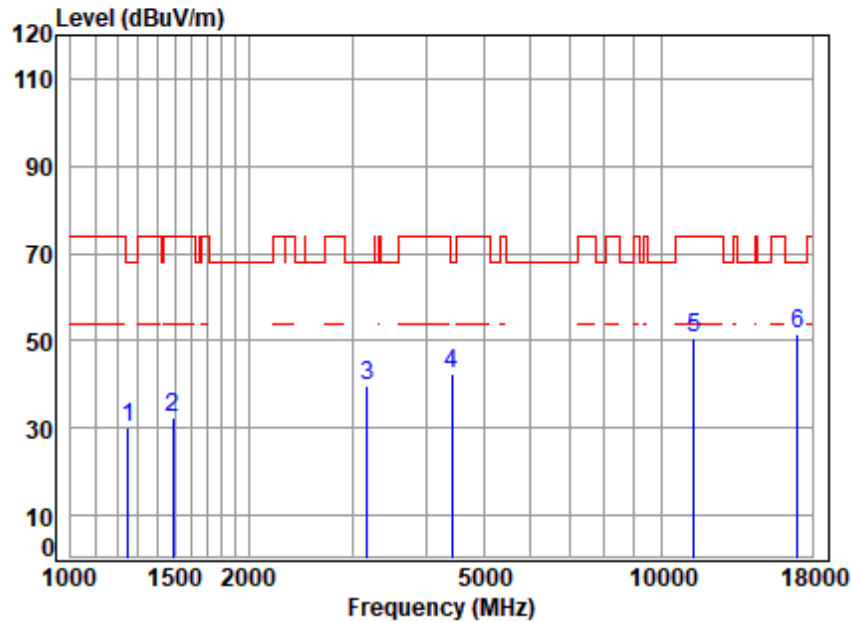


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5670 TX RSE
Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.67	25.09	38.35	39.84	30.25	68.20	-37.95	peak
2	1490.142	4.05	26.52	38.39	40.22	32.40	74.00	-41.60	peak
3	3177.672	5.82	32.72	36.13	37.12	39.53	68.20	-28.67	peak
4	4417.841	7.07	34.59	35.78	36.68	42.56	68.20	-25.64	peak
5	11340.000	12.97	37.76	37.74	37.45	50.44	74.00	-23.56	peak
6	q17010.000	14.57	43.10	37.51	31.56	51.72	68.20	-16.48	peak



Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

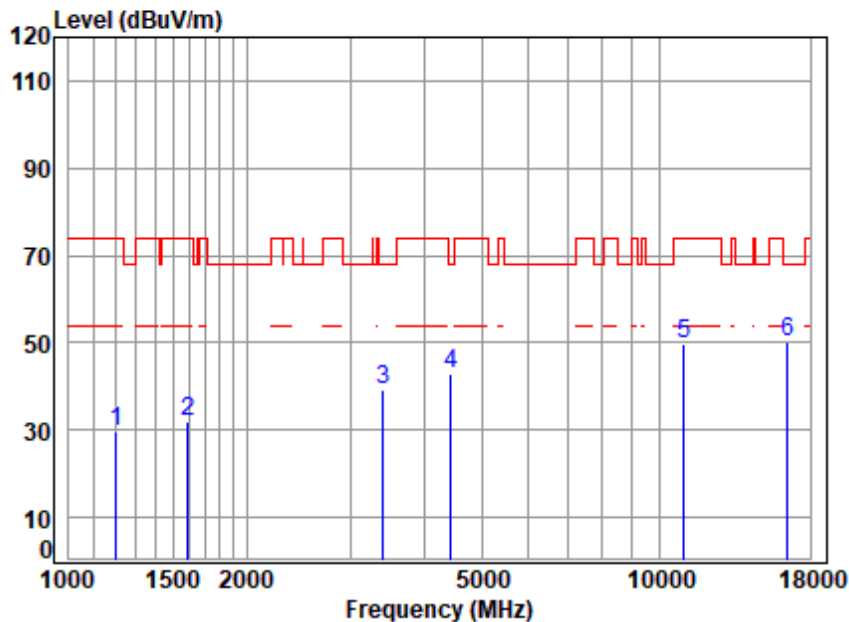


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03424AT
 Mode : 5500 TX RSE
 Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	3.59	24.44	38.34	40.07	29.76	74.00	-44.24	peak
2	1592.571	4.19	26.83	38.40	39.22	31.84	74.00	-42.16	peak
3	3405.929	6.11	32.33	36.12	36.74	39.06	68.20	-29.14	peak
4	4443.453	7.09	34.28	35.77	37.27	42.87	68.20	-25.33	peak
5	11000.000	12.90	37.50	37.84	37.15	49.71	74.00	-24.29	peak
6	16500.000	14.47	42.10	37.47	31.19	50.29	68.20	-17.91	peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

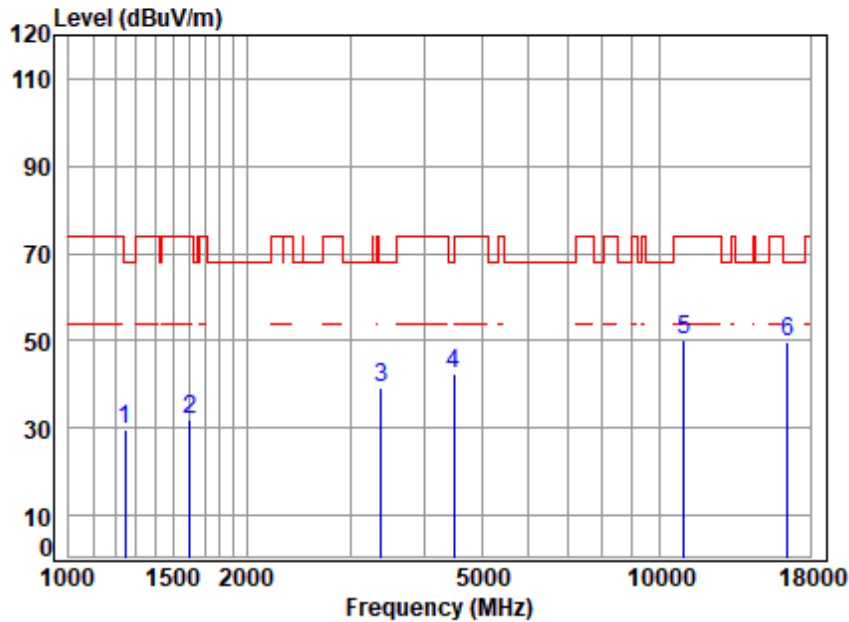

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03424AT
 Mode : 5500 TX RSE
 Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.66	25.04	38.35	39.53	29.88	68.20	-38.32	peak
2	1606.441	4.21	26.74	38.40	39.20	31.75	74.00	-42.25	peak
3	3376.523	6.07	32.26	36.12	37.14	39.35	68.20	-28.85	peak
4	4482.150	7.11	33.81	35.74	37.28	42.46	68.20	-25.74	peak
5	11000.000	12.90	37.50	37.84	37.44	50.00	74.00	-24.00	peak
6	16500.000	14.47	42.10	37.47	30.58	49.68	68.20	-18.52	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 119 of 1015

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

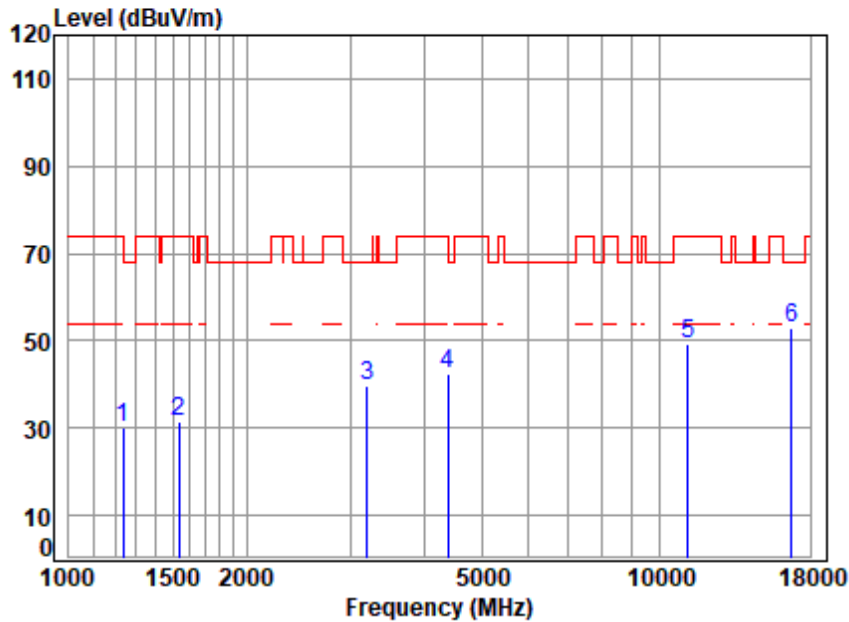

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5580 TX RSE
Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	3.65	24.94	38.35	39.93	30.17	74.00	-43.83	peak
2	1538.281	4.12	26.95	38.39	39.03	31.71	74.00	-42.29	peak
3	3196.094	5.84	32.87	36.13	36.90	39.48	68.20	-28.72	peak
4	4392.376	7.05	34.74	35.80	36.44	42.43	74.00	-31.57	peak
5	11160.000	12.93	37.62	37.79	36.60	49.36	74.00	-24.64	peak
6	16740.000	14.51	42.78	37.49	33.08	52.88	68.20	-15.32	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

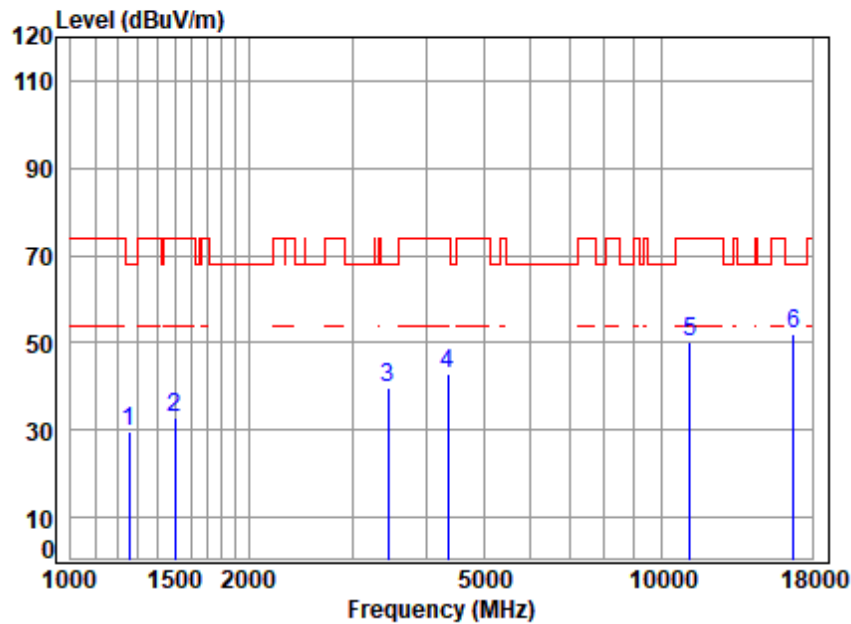

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5580 TX RSE
Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	3.68	25.06	38.35	39.30	29.69	68.20	-38.51	peak
2	1498.781	4.06	26.77	38.39	40.42	32.86	74.00	-41.14	peak
3	3445.535	6.16	31.85	36.12	37.94	39.83	68.20	-28.37	peak
4	4354.454	7.03	34.44	35.83	37.38	43.02	74.00	-30.98	peak
5	11160.000	12.93	37.62	37.79	37.59	50.35	74.00	-23.65	peak
6	q16740.000	14.51	42.78	37.49	32.03	51.83	68.20	-16.37	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 121 of 1015

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

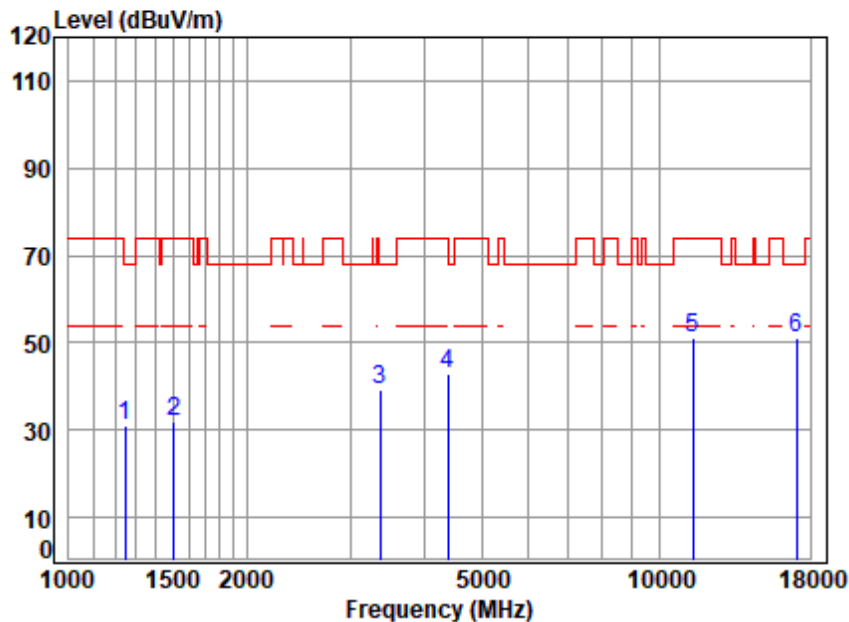

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5700 TX RSE
Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.66	25.04	38.35	40.65	31.00	68.20	-37.20	peak
2	1507.470	4.07	26.83	38.39	39.38	31.89	74.00	-42.11	peak
3	3366.778	6.06	32.20	36.12	37.20	39.34	68.20	-28.86	peak
4	4392.376	7.05	34.74	35.80	36.97	42.96	74.00	-31.04	peak
5	11400.000	12.98	37.70	37.72	38.05	51.01	74.00	-22.99	peak
6	17100.000	14.62	43.10	37.53	31.10	51.29	68.20	-16.91	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

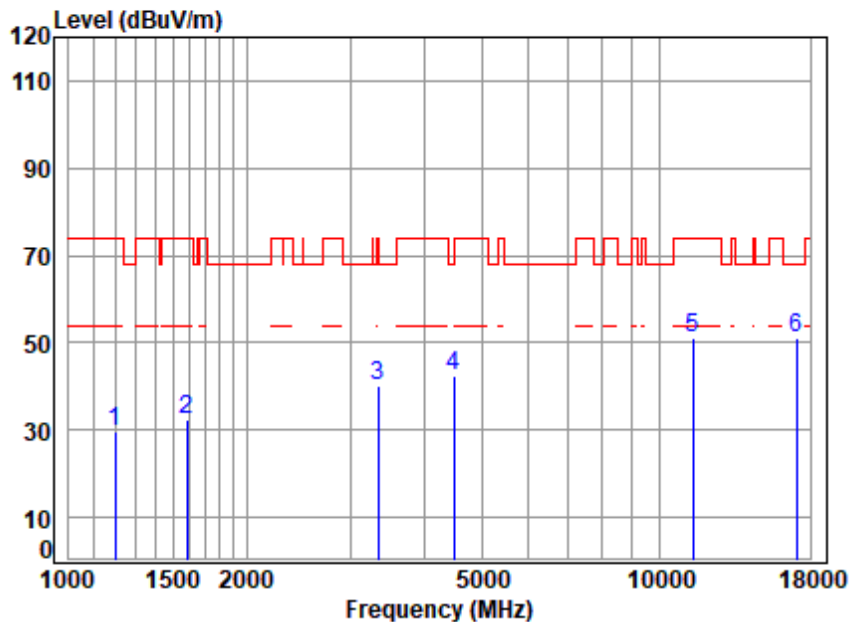

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03424AT
 Mode : 5700 TX RSE
 Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1199.726	3.58	24.40	38.34	40.16	29.80	74.00	-44.20	peak
2	1583.392	4.18	26.87	38.40	39.82	32.47	74.00	-41.53	peak
3	3337.710	6.02	31.88	36.13	38.45	40.22	74.00	-33.78	peak
4	4482.150	7.11	33.81	35.74	37.08	42.26	68.20	-25.94	peak
5	11400.000	12.98	37.70	37.72	38.26	51.22	74.00	-22.78	peak
6	17100.000	14.62	43.10	37.53	30.80	50.99	68.20	-17.21	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 123 of 1015

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: Low

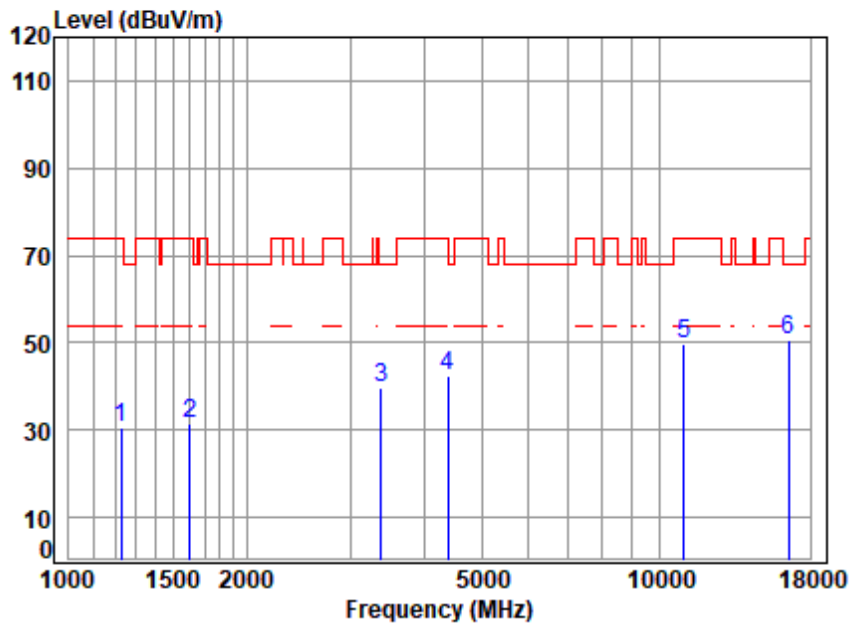

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5510 TX RSE
Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1227.791	3.63	24.79	38.34	40.31	30.39	74.00	-43.61	peak
2	1606.441	4.21	26.74	38.40	38.88	31.43	74.00	-42.57	peak
3	3386.297	6.09	32.32	36.12	37.62	39.91	68.20	-28.29	peak
4	4392.376	7.05	34.74	35.80	36.30	42.29	74.00	-31.71	peak
5	11020.000	12.90	37.50	37.83	36.96	49.53	74.00	-24.47	peak
6	16530.000	14.48	42.16	37.47	31.46	50.63	68.20	-17.57	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

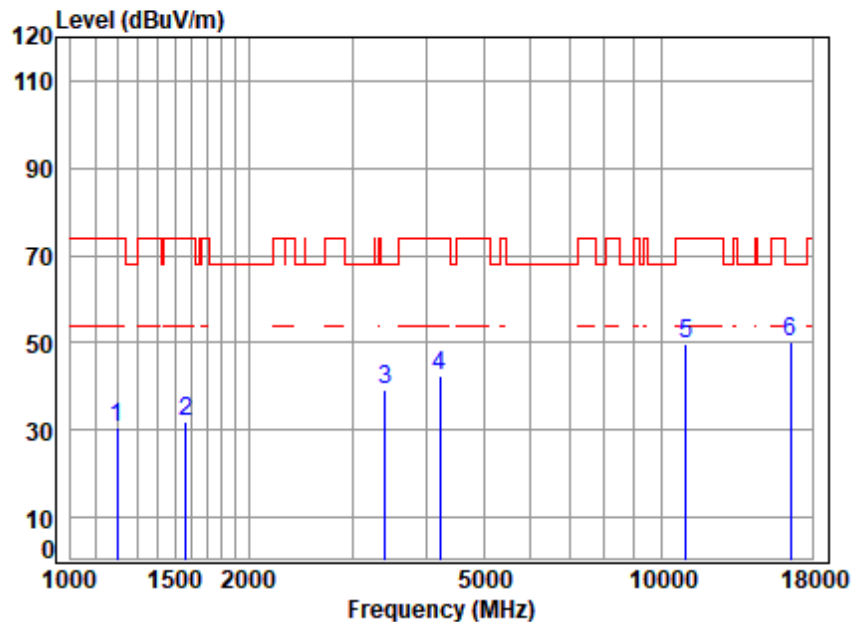


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5510 TX RSE
Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	3.58	24.36	38.34	40.88	30.48	74.00	-43.52	peak
2	1565.191	4.15	26.94	38.40	39.06	31.75	74.00	-42.25	peak
3	3405.929	6.11	32.33	36.12	37.01	39.33	68.20	-28.87	peak
4	4218.186	6.93	33.80	35.93	37.62	42.42	74.00	-31.58	peak
5	11020.000	12.90	37.50	37.83	37.07	49.64	74.00	-24.36	peak
6	q16530.000	14.48	42.16	37.47	31.16	50.33	68.20	-17.87	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:middle

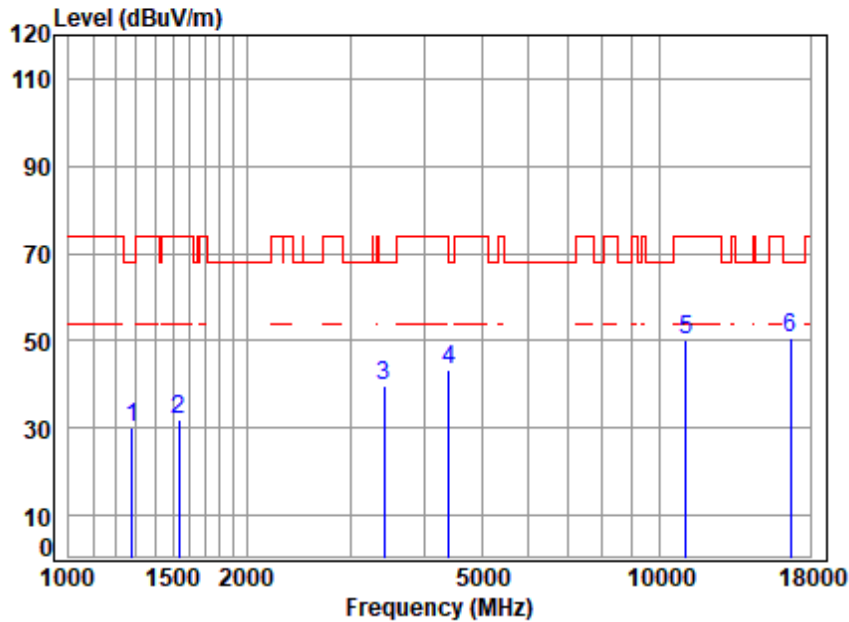


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5550 TX RSE
Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.72	24.91	38.35	39.74	30.02	68.20	-38.18	peak
2	1533.841	4.11	26.94	38.39	39.07	31.73	74.00	-42.27	peak
3	3415.787	6.12	32.21	36.12	37.69	39.90	68.20	-28.30	peak
4	4405.090	7.06	34.74	35.79	37.40	43.41	68.20	-24.79	peak
5	11100.000	12.92	37.50	37.81	37.44	50.05	74.00	-23.95	peak
6	q16650.000	14.50	42.50	37.48	30.91	50.43	68.20	-17.77	peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:middle

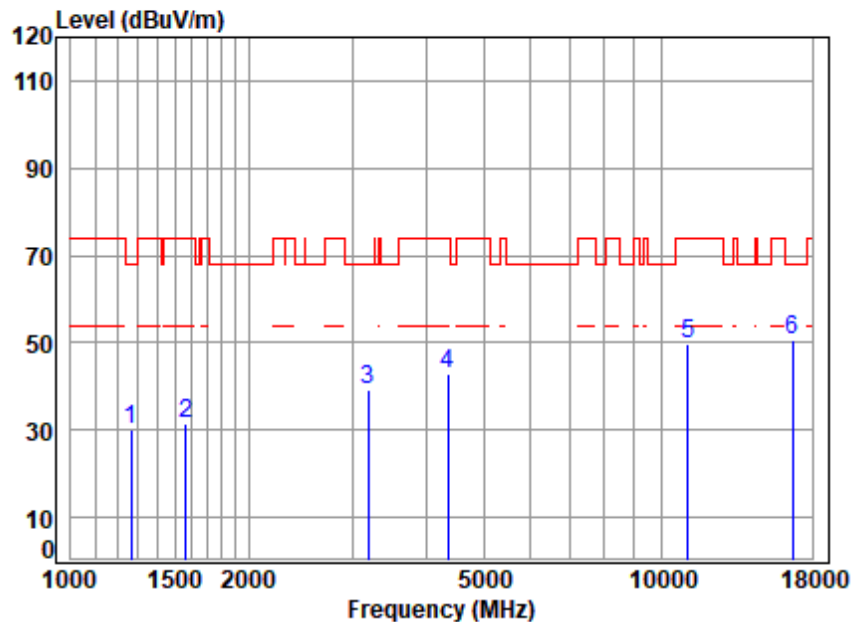

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5550 TX RSE
Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	3.70	25.00	38.35	39.72	30.07	68.20	-38.13	peak
2	1565.191	4.15	26.94	38.40	38.69	31.38	74.00	-42.62	peak
3	3186.869	5.83	32.79	36.13	36.93	39.42	68.20	-28.78	peak
4	4354.454	7.03	34.44	35.83	37.39	43.03	74.00	-30.97	peak
5	11100.000	12.92	37.50	37.81	37.13	49.74	74.00	-24.26	peak
6	q16650.000	14.50	42.50	37.48	30.95	50.47	68.20	-17.73	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 127 of 1015

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

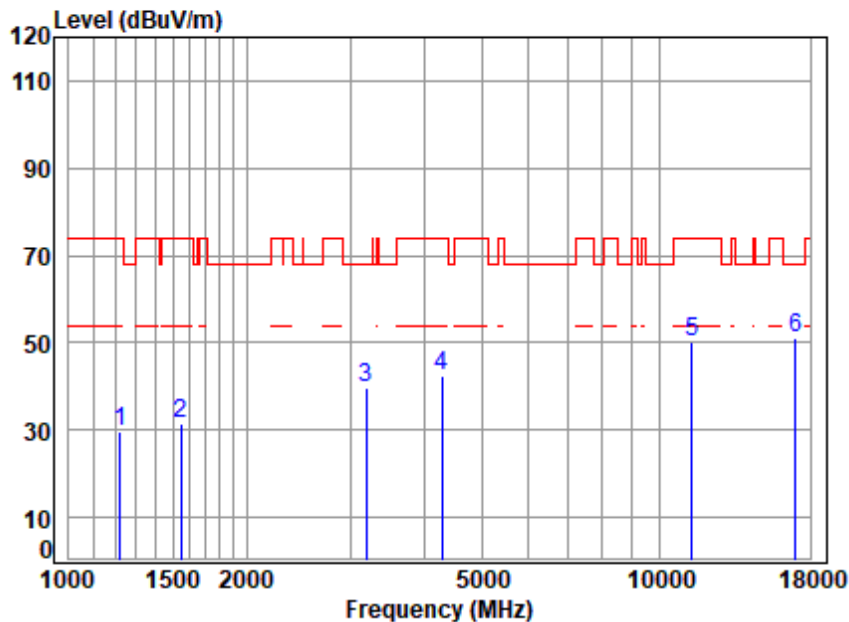

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5670 TX RSE
Note : 5G WIFI 11AX40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1224.247	3.62	24.74	38.34	39.79	29.81	74.00	-44.19	peak
2	1547.199	4.13	26.99	38.39	38.64	31.37	74.00	-42.63	peak
3	3186.869	5.83	32.79	36.13	37.16	39.65	68.20	-28.55	peak
4	4291.977	6.99	33.97	35.88	37.57	42.65	74.00	-31.35	peak
5	11340.000	12.97	37.76	37.74	37.08	50.07	74.00	-23.93	peak
6	q17010.000	14.57	43.10	37.51	30.97	51.13	68.20	-17.07	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

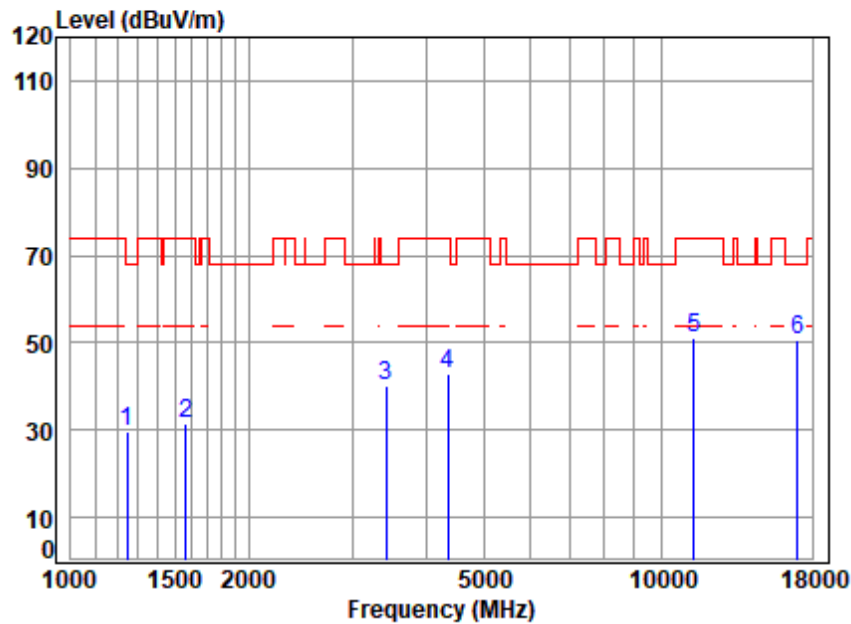


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5670 TX RSE
Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.66	25.04	38.35	39.39	29.74	68.20	-38.46	peak
2	1565.191	4.15	26.94	38.40	38.99	31.68	74.00	-42.32	peak
3	3415.787	6.12	32.21	36.12	37.88	40.09	68.20	-28.11	peak
4	4354.454	7.03	34.44	35.83	37.15	42.79	74.00	-31.21	peak
5	11340.000	12.97	37.76	37.74	37.95	50.94	74.00	-23.06	peak
6	q17010.000	14.57	43.10	37.51	30.58	50.74	68.20	-17.46	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

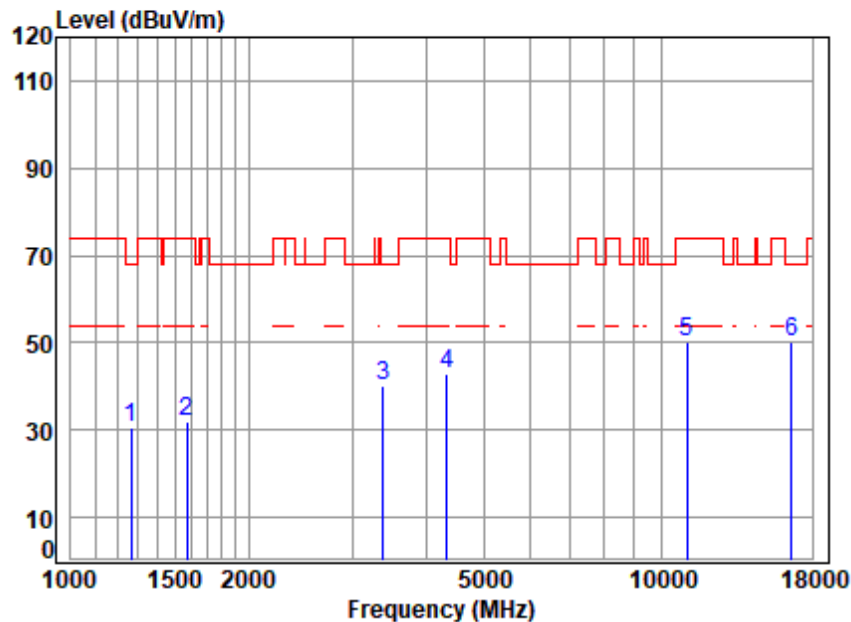


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03424AT
 Mode : 5530 TX RSE
 Note : 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	3.70	25.00	38.35	40.17	30.52	68.20	-37.68	peak
2	1574.265	4.17	26.90	38.40	39.16	31.83	74.00	-42.17	peak
3	3386.297	6.09	32.32	36.12	37.87	40.16	68.20	-28.04	peak
4	4341.886	7.02	34.34	35.84	37.29	42.81	74.00	-31.19	peak
5	11060.000	12.91	37.50	37.82	37.64	50.23	74.00	-23.77	peak
6	16590.000	14.49	42.28	37.47	31.05	50.35	68.20	-17.85	peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

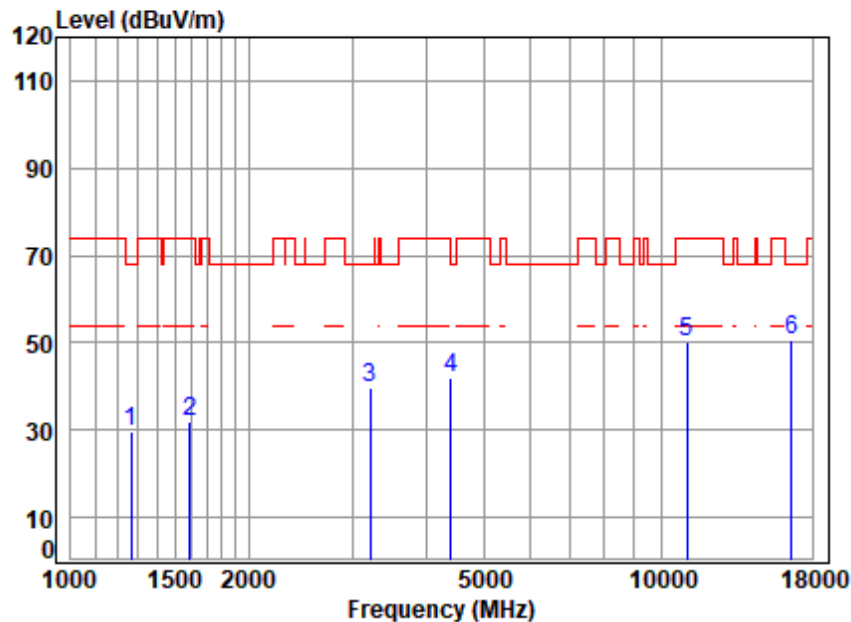


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5530 TX RSE
Note : 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	3.70	25.00	38.35	39.50	29.85	68.20	-38.35	peak
2	1592.571	4.19	26.83	38.40	39.28	31.90	74.00	-42.10	peak
3	3214.623	5.87	32.67	36.13	37.35	39.76	68.20	-28.44	peak
4	4405.090	7.06	34.74	35.79	35.88	41.89	68.20	-26.31	peak
5	11060.000	12.91	37.50	37.82	37.79	50.38	74.00	-23.62	peak
6	16590.000	14.49	42.28	37.47	31.35	50.65	68.20	-17.55	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

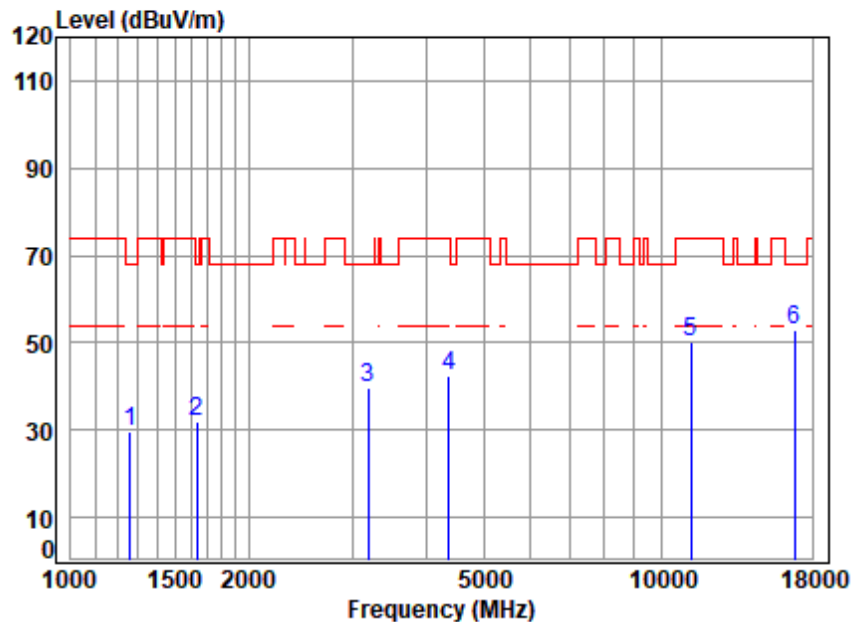

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5610 TX RSE
Note : 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1260.149	3.69	25.04	38.35	39.47	29.85	68.20	-38.35	peak
2	1634.543	4.25	26.45	38.41	39.53	31.82	68.20	-36.38	peak
3	3186.869	5.83	32.79	36.13	37.33	39.82	68.20	-28.38	peak
4	4367.058	7.04	34.54	35.82	36.53	42.29	74.00	-31.71	peak
5	11220.000	12.94	37.72	37.77	37.48	50.37	74.00	-23.63	peak
6	q16830.000	14.53	42.99	37.50	32.93	52.95	68.20	-15.25	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 132 of 1015

Test Mode: 03; Polarity: Vertical; Modulation: 802.11ax(Full RU0); Bandwidth: 80MHz; Channel: middle

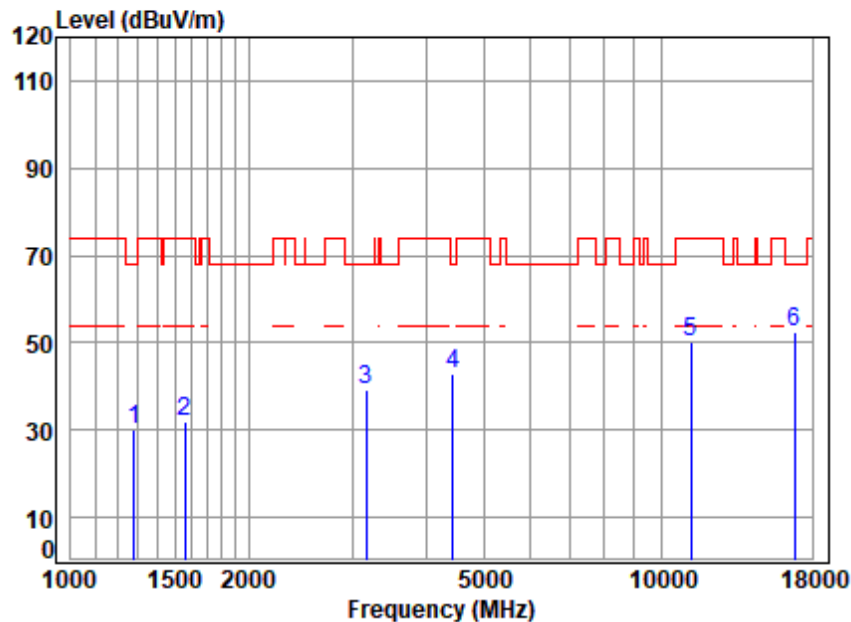

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5610 TX RSE
Note : 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1278.492	3.72	24.93	38.35	39.67	29.97	68.20	-38.23	peak
2	1560.673	4.15	26.96	38.40	39.02	31.73	74.00	-42.27	peak
3	3159.355	5.80	32.57	36.13	37.18	39.42	68.20	-28.78	peak
4	4430.628	7.08	34.43	35.77	36.99	42.73	68.20	-25.47	peak
5	11220.000	12.94	37.72	37.77	37.16	50.05	74.00	-23.95	peak
6	q16830.000	14.53	42.99	37.50	32.67	52.69	68.20	-15.51	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

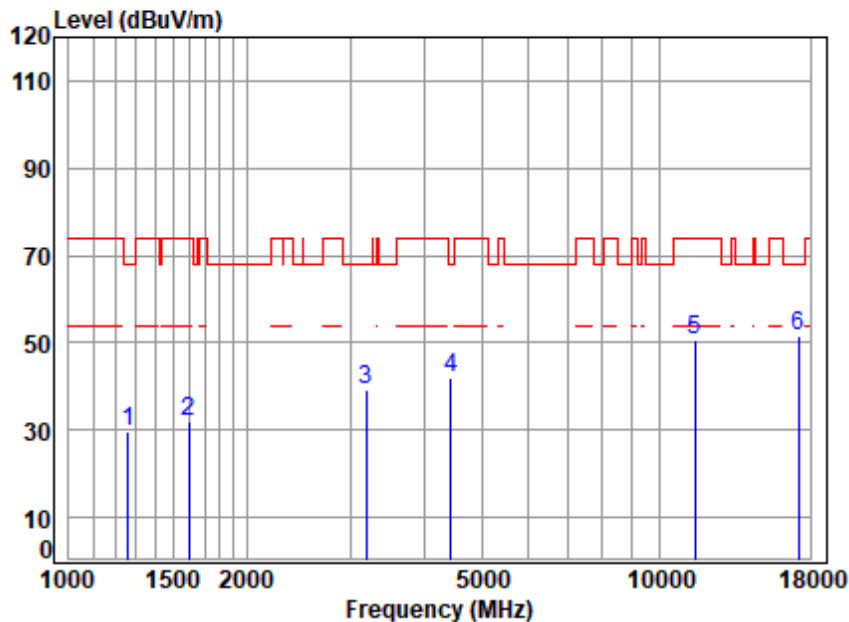


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5745 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1260.149	3.69	25.04	38.35	39.48	29.86	68.20	-38.34	peak
2	1597.181	4.20	26.81	38.40	39.28	31.89	74.00	-42.11	peak
3	3186.869	5.83	32.79	36.13	36.94	39.43	68.20	-28.77	peak
4	4430.628	7.08	34.43	35.77	36.40	42.14	68.20	-26.06	peak
5	11490.000	13.00	37.79	37.69	37.53	50.63	74.00	-23.37	peak
6	17235.000	14.70	43.03	37.55	31.48	51.66	68.20	-16.54	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

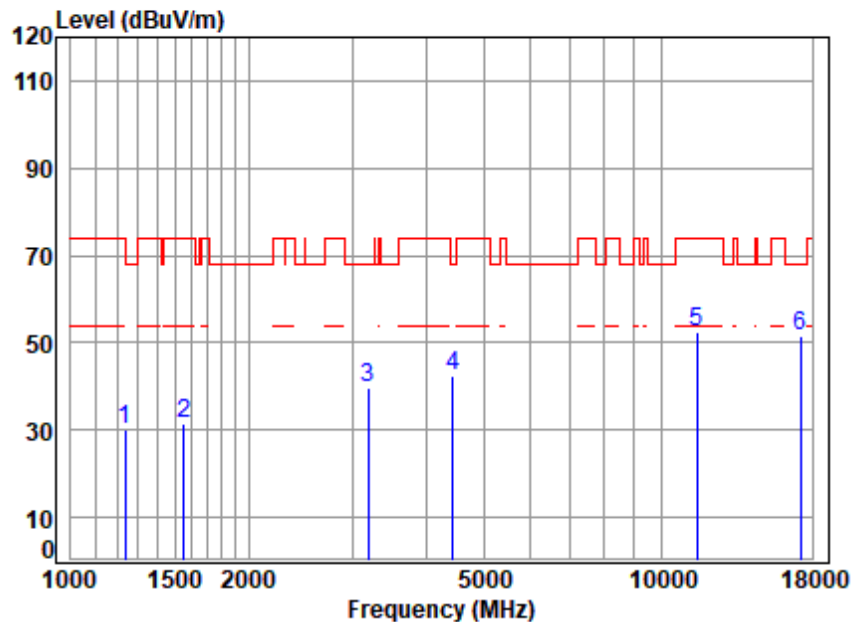


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5745 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1234.909	3.64	24.89	38.35	39.99	30.17	74.00	-43.83	peak
2	1551.677	4.13	26.99	38.40	38.84	31.56	74.00	-42.44	peak
3	3186.869	5.83	32.79	36.13	37.35	39.84	68.20	-28.36	peak
4	4430.628	7.08	34.43	35.77	36.69	42.43	68.20	-25.77	peak
5	11490.000	13.00	37.79	37.69	39.43	52.53	74.00	-21.47	peak
6	17235.000	14.70	43.03	37.55	31.40	51.58	68.20	-16.62	peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

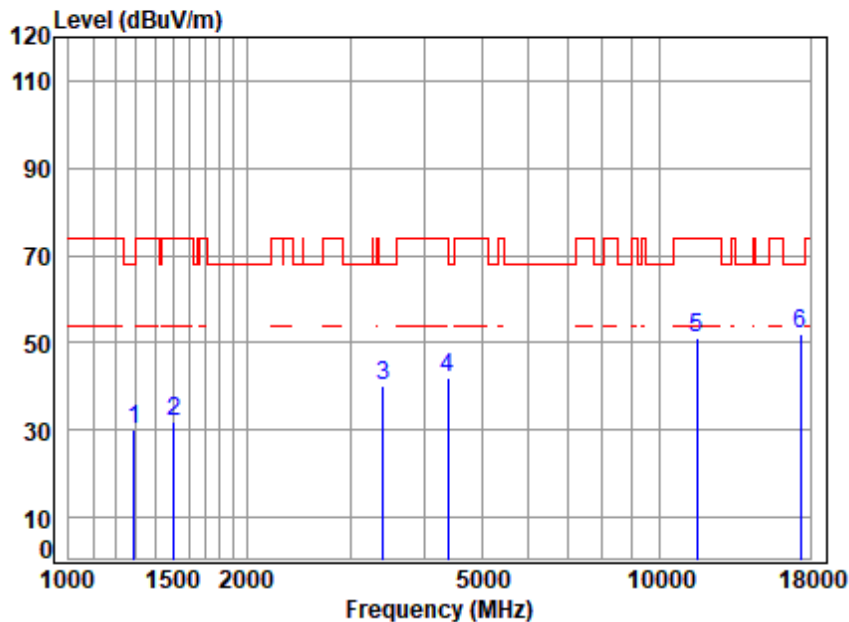


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5785 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.74	24.86	38.36	39.83	30.07	68.20	-38.13	peak
2	1507.470	4.07	26.83	38.39	39.36	31.87	74.00	-42.13	peak
3	3405.929	6.11	32.33	36.12	37.71	40.03	68.20	-28.17	peak
4	4392.376	7.05	34.74	35.80	36.14	42.13	74.00	-31.87	peak
5	11570.000	13.01	37.73	37.67	38.10	51.17	74.00	-22.83	peak
6	17355.000	14.77	43.26	37.56	31.32	51.79	68.20	-16.41	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

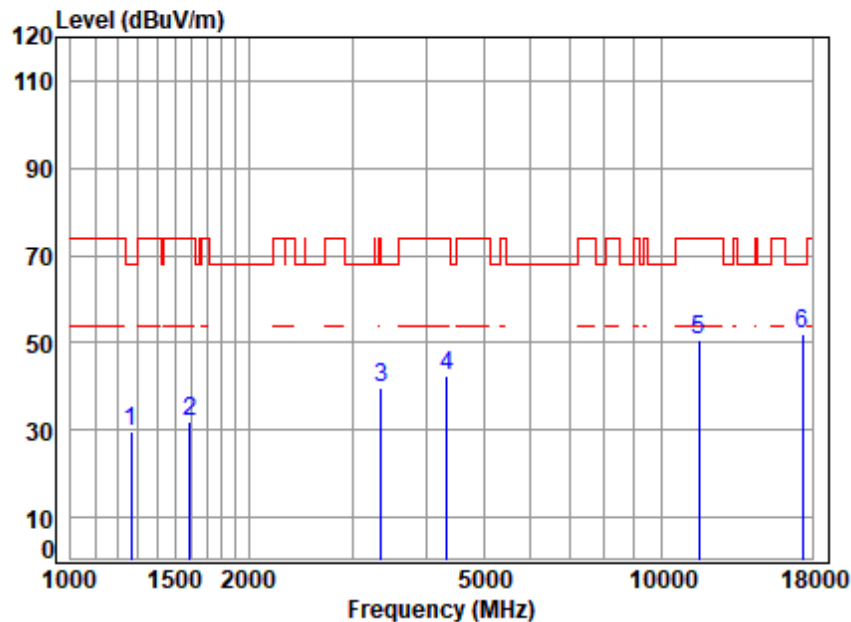


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5785 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1263.796	3.69	25.02	38.35	39.51	29.87	68.20	-38.33	peak
2	1592.571	4.19	26.83	38.40	39.11	31.73	74.00	-42.27	peak
3	3357.061	6.05	32.14	36.12	37.50	39.57	74.00	-34.43	peak
4	4341.886	7.02	34.34	35.84	37.10	42.62	74.00	-31.38	peak
5	11570.000	13.01	37.73	37.67	37.69	50.76	74.00	-23.24	peak
6	q17355.000	14.77	43.26	37.56	31.63	52.10	68.20	-16.10	peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

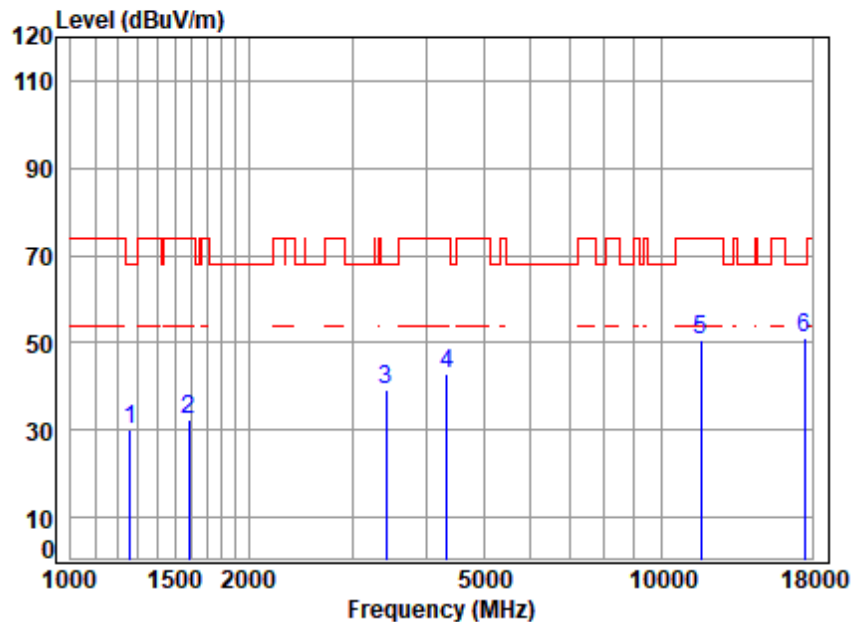


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5825 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1260.149	3.69	25.04	38.35	39.58	29.96	68.20	-38.24	peak
2	1583.392	4.18	26.87	38.40	39.66	32.31	74.00	-41.69	peak
3	3415.787	6.12	32.21	36.12	36.97	39.18	68.20	-29.02	peak
4	4341.886	7.02	34.34	35.84	37.27	42.79	74.00	-31.21	peak
5	11650.000	13.03	37.80	37.65	37.49	50.67	74.00	-23.33	peak
6	17475.000	14.84	43.40	37.58	30.44	51.10	68.20	-17.10	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

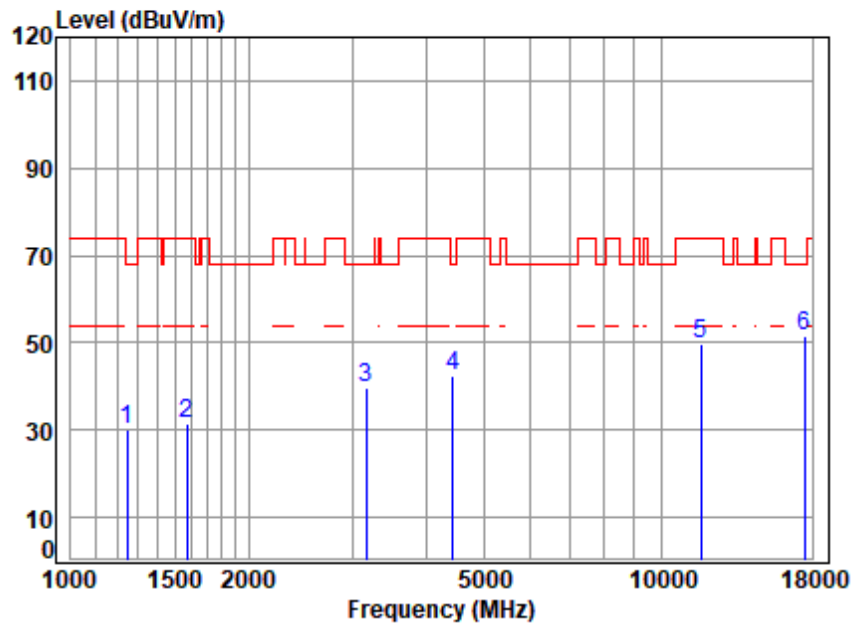


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5825 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.66	25.04	38.35	39.62	29.97	68.20	-38.23	peak
2	1574.265	4.17	26.90	38.40	38.72	31.39	74.00	-42.61	peak
3	3168.500	5.81	32.65	36.13	37.55	39.88	68.20	-28.32	peak
4	4430.628	7.08	34.43	35.77	36.76	42.50	68.20	-25.70	peak
5	11650.000	13.03	37.80	37.65	36.71	49.89	74.00	-24.11	peak
6	17475.000	14.84	43.40	37.58	30.96	51.62	68.20	-16.58	peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

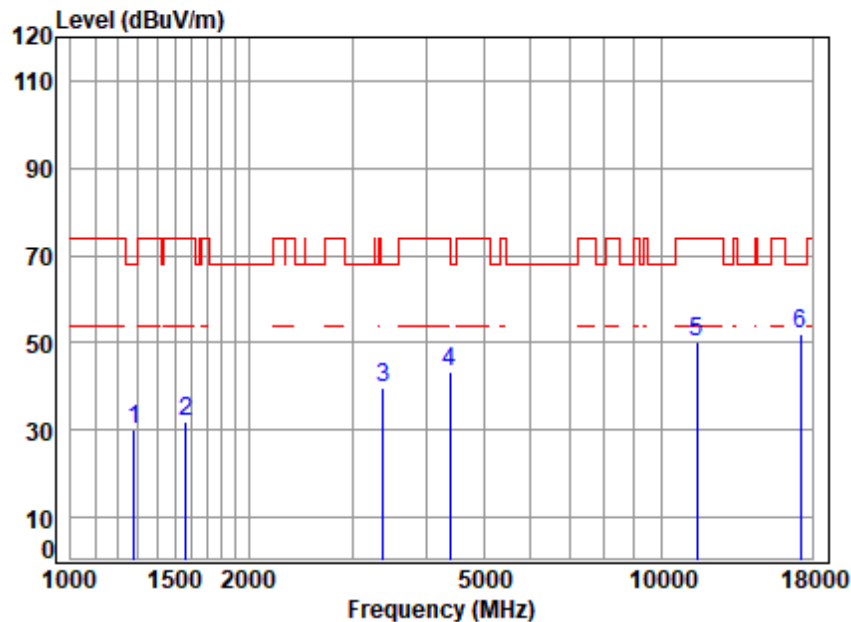


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5745 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1278.492	3.72	24.93	38.35	39.66	29.96	68.20	-38.24	peak
2	1569.721	4.16	26.92	38.40	39.39	32.07	74.00	-41.93	peak
3	3386.297	6.09	32.32	36.12	37.20	39.49	68.20	-28.71	peak
4	4379.699	7.04	34.64	35.81	37.41	43.28	74.00	-30.72	peak
5	11490.000	13.00	37.79	37.69	37.04	50.14	74.00	-23.86	peak
6	17235.000	14.70	43.03	37.55	31.72	51.90	68.20	-16.30	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

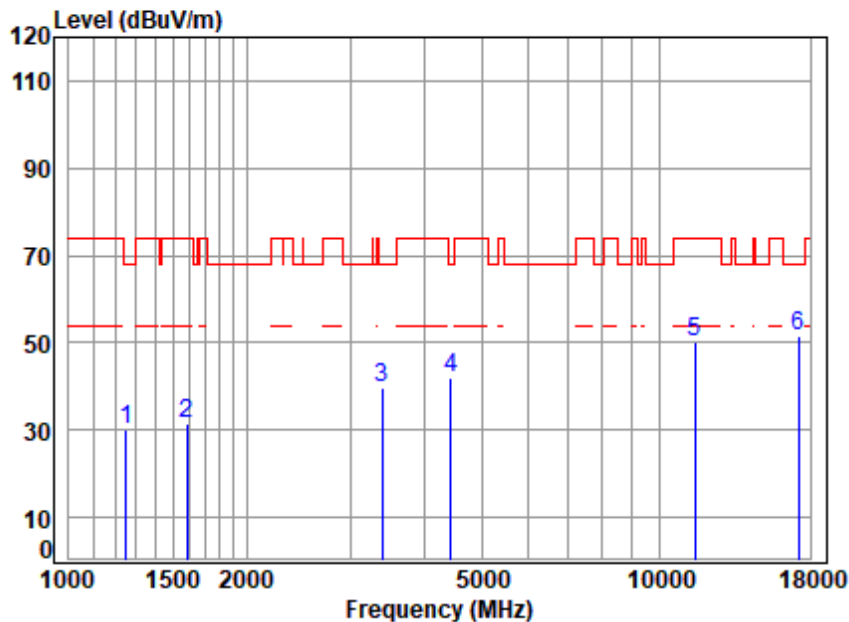


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5745 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.67	25.09	38.35	39.72	30.13	68.20	-38.07	peak
2	1587.975	4.18	26.85	38.40	39.00	31.63	74.00	-42.37	peak
3	3396.098	6.10	32.38	36.12	37.45	39.81	68.20	-28.39	peak
4	4430.628	7.08	34.43	35.77	36.42	42.16	68.20	-26.04	peak
5	11490.000	13.00	37.79	37.69	37.06	50.16	74.00	-23.84	peak
6	17235.000	14.70	43.03	37.55	31.44	51.62	68.20	-16.58	peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

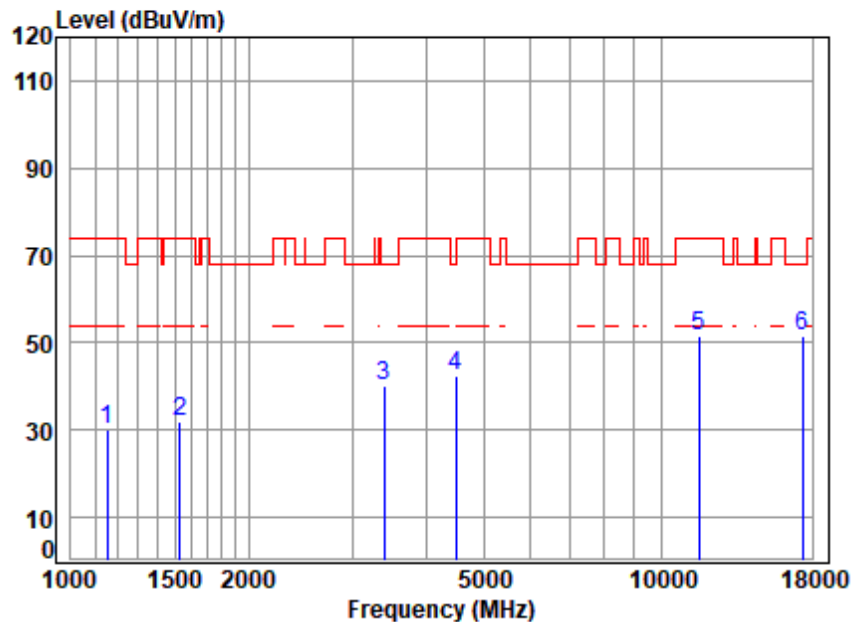


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5785 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	3.49	23.92	38.33	40.98	30.06	74.00	-43.94	peak
2	1529.414	4.10	26.92	38.39	39.16	31.79	74.00	-42.21	peak
3	3396.098	6.10	32.38	36.12	37.90	40.26	68.20	-27.94	peak
4	4495.125	7.12	33.66	35.73	37.39	42.44	68.20	-25.76	peak
5	11570.000	13.01	37.73	37.67	38.30	51.37	74.00	-22.63	peak
6	q17355.000	14.77	43.26	37.56	31.00	51.47	68.20	-16.73	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

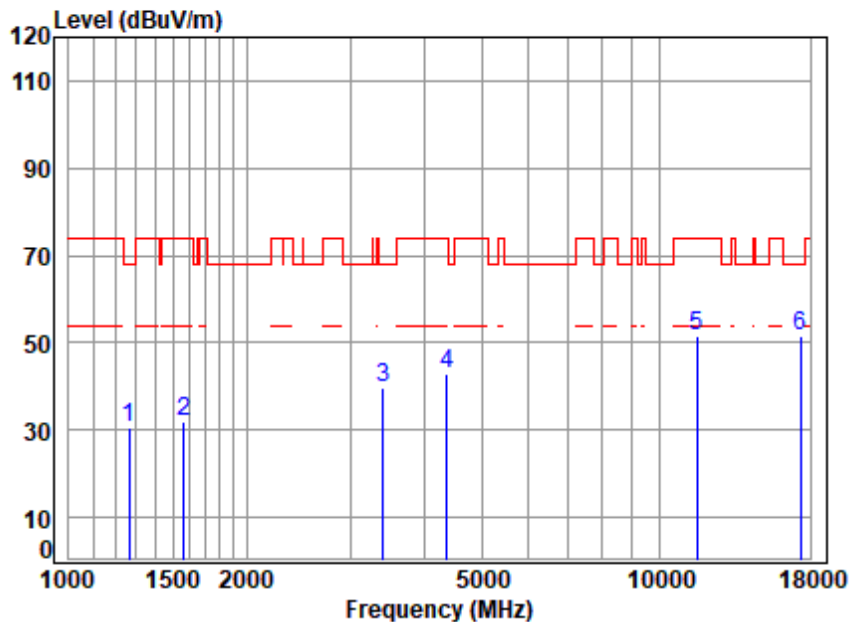


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5785 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1263.796	3.69	25.02	38.35	40.17	30.53	68.20	-37.67	peak
2	1569.721	4.16	26.92	38.40	39.10	31.78	74.00	-42.22	peak
3	3405.929	6.11	32.33	36.12	37.58	39.90	68.20	-28.30	peak
4	4367.058	7.04	34.54	35.82	37.08	42.84	74.00	-31.16	peak
5	11570.000	13.01	37.73	37.67	38.51	51.58	74.00	-22.42	peak
6	q17355.000	14.77	43.26	37.56	31.20	51.67	68.20	-16.53	peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

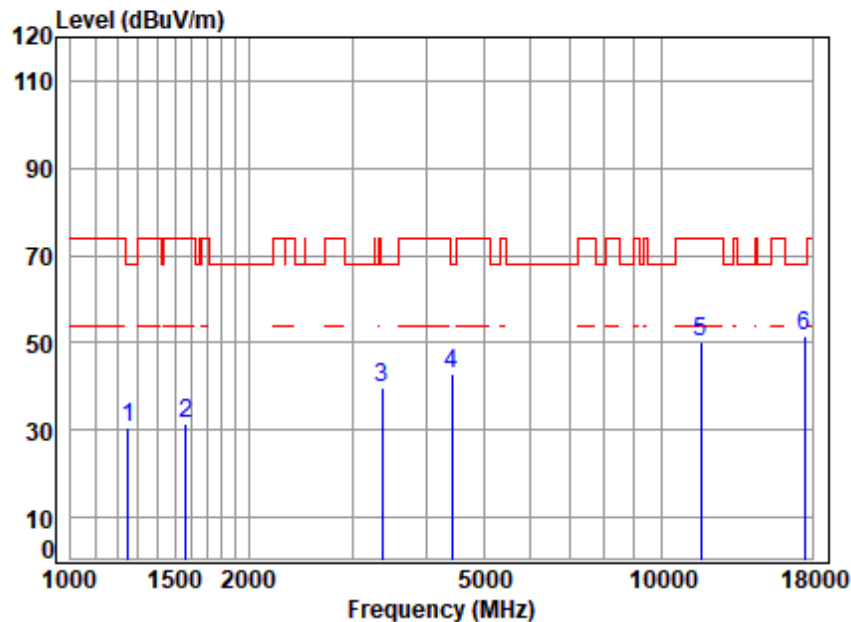


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5825 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.67	25.09	38.35	40.28	30.69	68.20	-37.51	peak
2	1569.721	4.16	26.92	38.40	39.01	31.69	74.00	-42.31	peak
3	3366.778	6.06	32.20	36.12	37.44	39.58	68.20	-28.62	peak
4	4417.841	7.07	34.59	35.78	37.18	43.06	68.20	-25.14	peak
5	11650.000	13.03	37.80	37.65	36.87	50.05	74.00	-23.95	peak
6	17475.000	14.84	43.40	37.58	30.95	51.61	68.20	-16.59	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

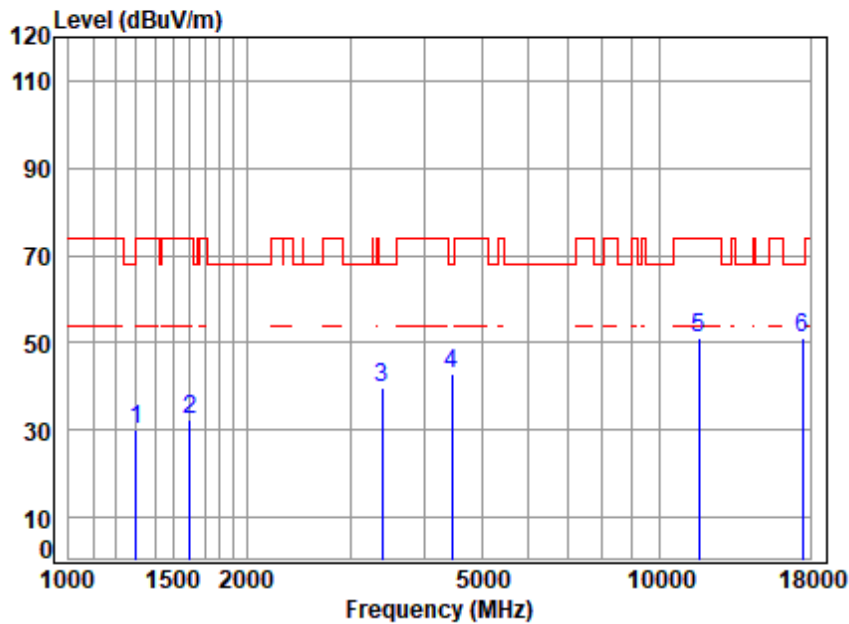


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5825 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	3.76	24.79	38.36	39.82	30.01	74.00	-43.99	peak
2	1601.804	4.20	26.78	38.40	39.67	32.25	74.00	-41.75	peak
3	3396.098	6.10	32.38	36.12	37.17	39.53	68.20	-28.67	peak
4	4456.315	7.09	34.12	35.76	37.44	42.89	68.20	-25.31	peak
5	11650.000	13.03	37.80	37.65	38.09	51.27	74.00	-22.73	peak
6	q17475.000	14.84	43.40	37.58	30.51	51.17	68.20	-17.03	peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

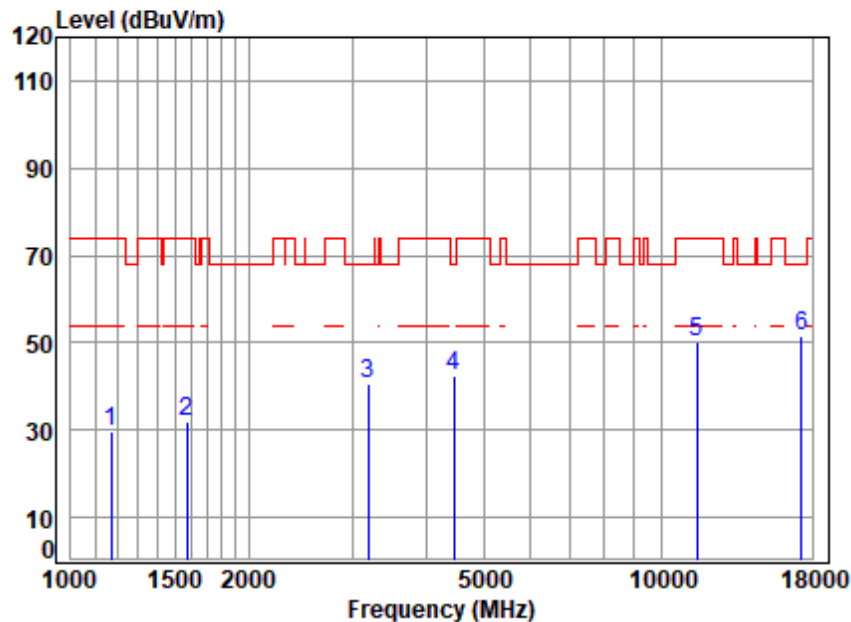


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5755 TX RSE
Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1172.303	3.53	24.12	38.33	40.50	29.82	74.00	-44.18	peak
2	1574.265	4.17	26.90	38.40	39.46	32.13	74.00	-41.87	peak
3	3186.869	5.83	32.79	36.13	38.11	40.60	68.20	-27.60	peak
4	4456.315	7.09	34.12	35.76	36.94	42.39	68.20	-25.81	peak
5	11510.000	13.00	37.79	37.69	37.09	50.19	74.00	-23.81	peak
6	17265.000	14.72	43.06	37.55	31.29	51.52	68.20	-16.68	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

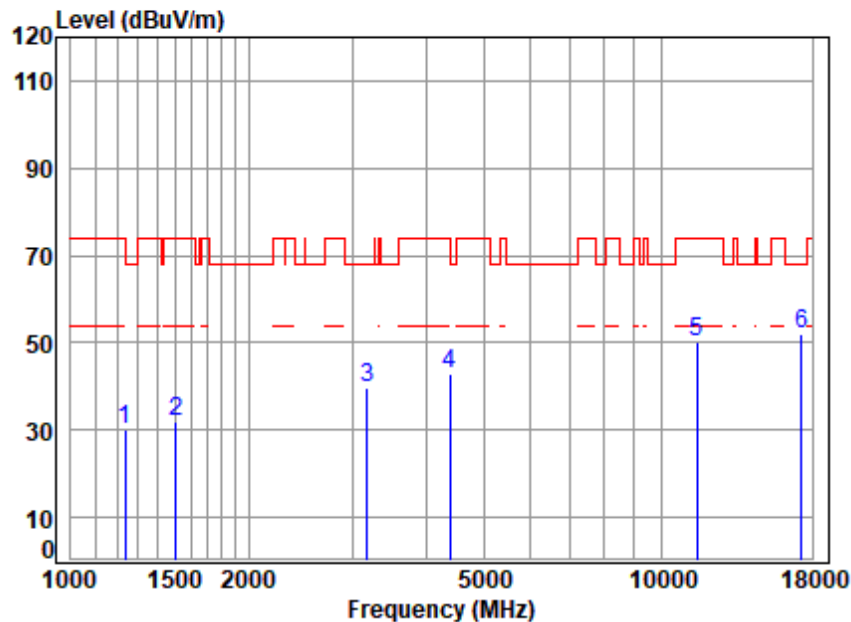


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5755 TX RSE
Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	3.65	24.94	38.35	40.01	30.25	74.00	-43.75	peak
2	1507.470	4.07	26.83	38.39	39.36	31.87	74.00	-42.13	peak
3	3177.672	5.82	32.72	36.13	37.25	39.66	68.20	-28.54	peak
4	4392.376	7.05	34.74	35.80	36.78	42.77	74.00	-31.23	peak
5	11510.000	13.00	37.79	37.69	37.30	50.40	74.00	-23.60	peak
6	17265.000	14.72	43.06	37.55	31.93	52.16	68.20	-16.04	peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

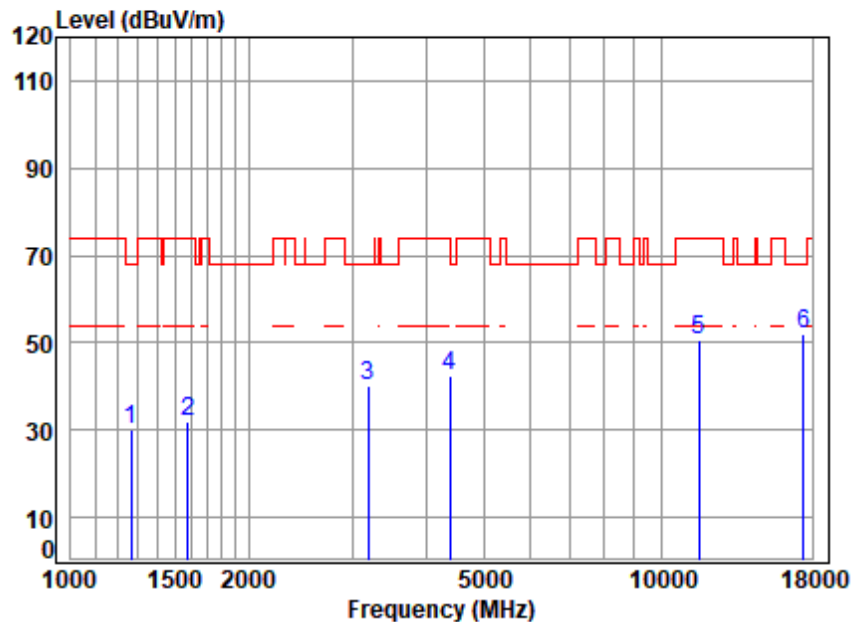


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5795 TX RSE
Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	3.70	25.00	38.35	39.57	29.92	68.20	-38.28	peak
2	1578.822	4.17	26.88	38.40	39.24	31.89	74.00	-42.11	peak
3	3186.869	5.83	32.79	36.13	37.52	40.01	68.20	-28.19	peak
4	4379.699	7.04	34.64	35.81	36.78	42.65	74.00	-31.35	peak
5	11590.000	13.01	37.71	37.67	37.44	50.49	74.00	-23.51	peak
6	q17385.000	14.79	43.35	37.57	31.61	52.18	68.20	-16.02	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

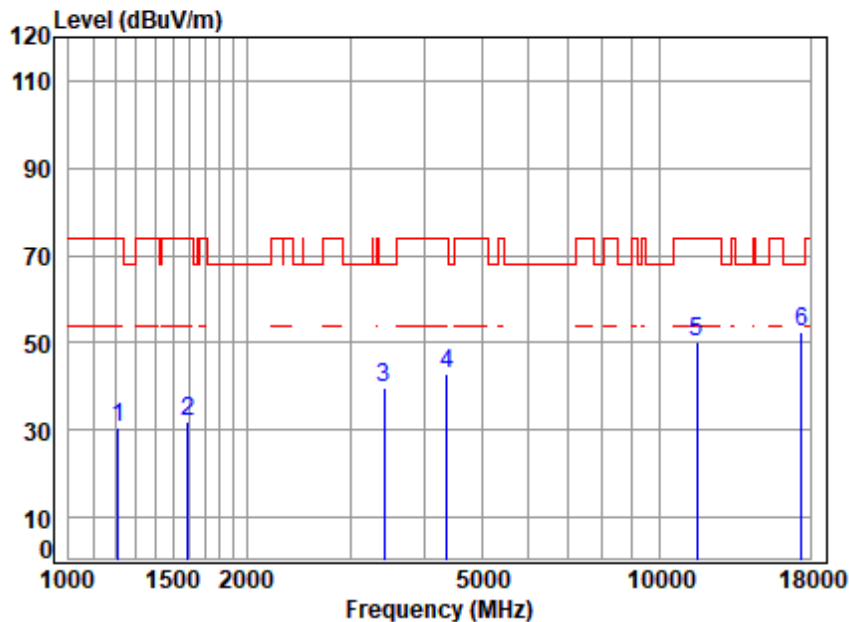


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5795 TX RSE
Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1210.174	3.60	24.54	38.34	40.95	30.75	74.00	-43.25	peak
2	1592.571	4.19	26.83	38.40	39.14	31.76	74.00	-42.24	peak
3	3415.787	6.12	32.21	36.12	37.38	39.59	68.20	-28.61	peak
4	4367.058	7.04	34.54	35.82	37.24	43.00	74.00	-31.00	peak
5	11590.000	13.01	37.71	37.67	37.01	50.06	74.00	-23.94	peak
6	q17385.000	14.79	43.35	37.57	31.70	52.27	68.20	-15.93	peak



Test Mode: 04; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

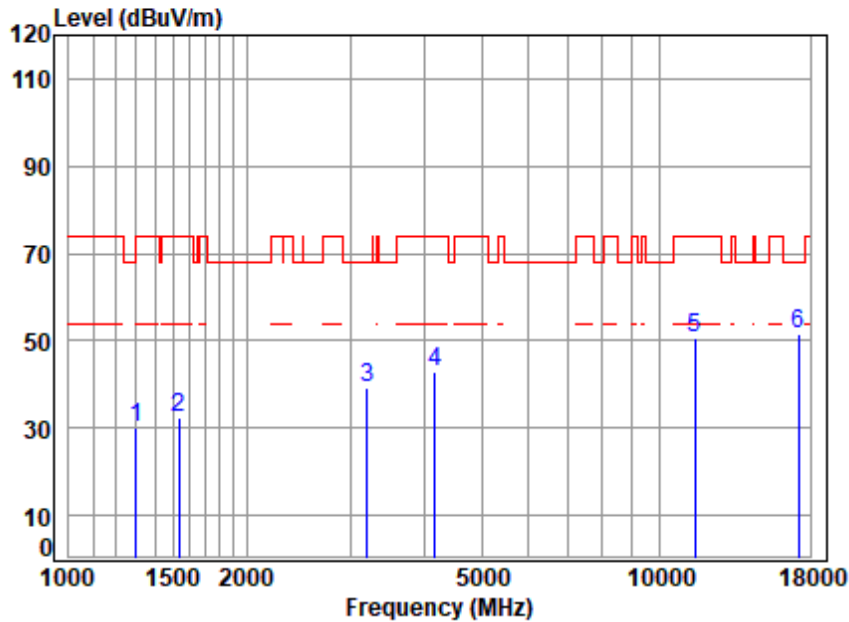


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5745 TX RSE
Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	3.76	24.79	38.36	40.15	30.34	74.00	-43.66	peak
2	1538.281	4.12	26.95	38.39	39.87	32.55	74.00	-41.45	peak
3	3196.094	5.84	32.87	36.13	36.87	39.45	68.20	-28.75	peak
4	4169.698	6.90	33.80	35.97	38.16	42.89	74.00	-31.11	peak
5	11490.000	13.00	37.79	37.69	37.69	50.79	74.00	-23.21	peak
6	17235.000	14.70	43.03	37.55	31.51	51.69	68.20	-16.51	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

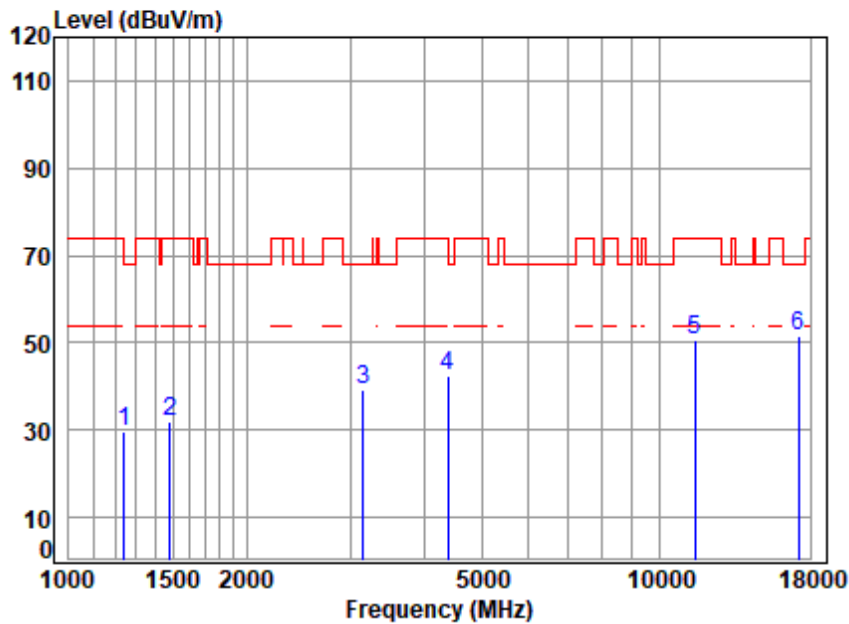

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5745 TX RSE
Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	3.66	24.99	38.35	39.41	29.71	68.20	-38.49	peak
2	1485.841	4.04	26.40	38.39	39.69	31.74	74.00	-42.26	peak
3	3150.237	5.78	32.50	36.13	36.92	39.07	68.20	-29.13	peak
4	4379.699	7.04	34.64	35.81	36.41	42.28	74.00	-31.72	peak
5	11490.000	13.00	37.79	37.69	37.50	50.60	74.00	-23.40	peak
6	17235.000	14.70	43.03	37.55	31.43	51.61	68.20	-16.59	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 151 of 1015

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

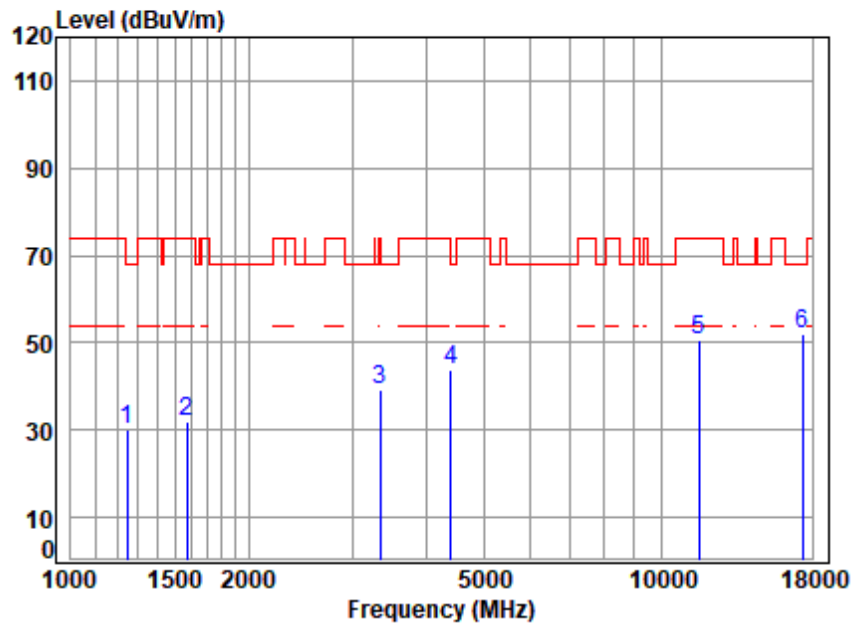

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5785 TX RSE
Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.66	25.04	38.35	39.80	30.15	68.20	-38.05	peak
2	1574.265	4.17	26.90	38.40	39.22	31.89	74.00	-42.11	peak
3	3347.371	6.04	32.05	36.12	37.28	39.25	74.00	-34.75	peak
4	4405.090	7.06	34.74	35.79	38.00	44.01	68.20	-24.19	peak
5	11570.000	13.01	37.73	37.67	37.71	50.78	74.00	-23.22	peak
6	17355.000	14.77	43.26	37.56	31.44	51.91	68.20	-16.29	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

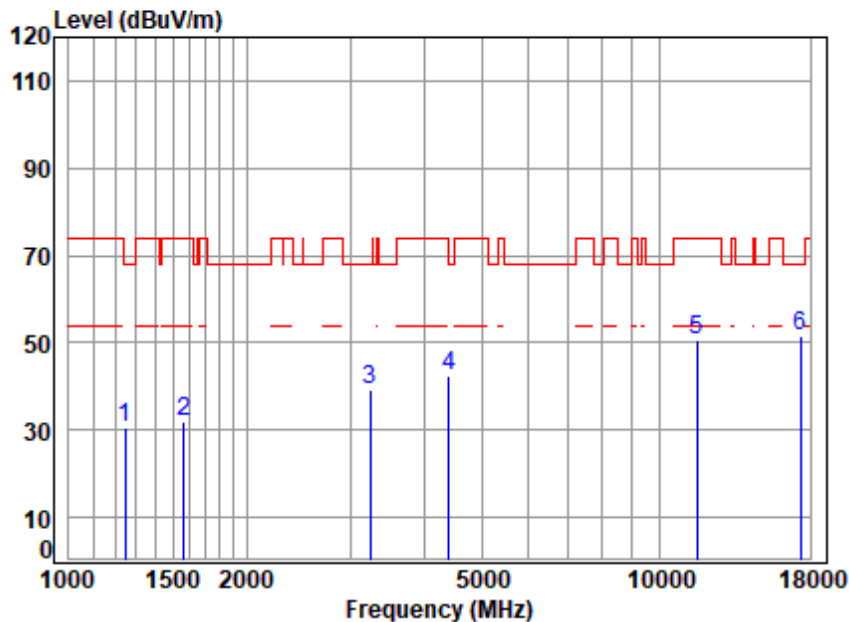

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5785 TX RSE
Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.66	25.04	38.35	40.21	30.56	68.20	-37.64	peak
2	1569.721	4.16	26.92	38.40	39.04	31.72	74.00	-42.28	peak
3	3233.260	5.89	32.37	36.13	37.18	39.31	68.20	-28.89	peak
4	4405.090	7.06	34.74	35.79	36.44	42.45	68.20	-25.75	peak
5	11570.000	13.01	37.73	37.67	37.74	50.81	74.00	-23.19	peak
6	q17355.000	14.77	43.26	37.56	31.13	51.60	68.20	-16.60	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 153 of 1015

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

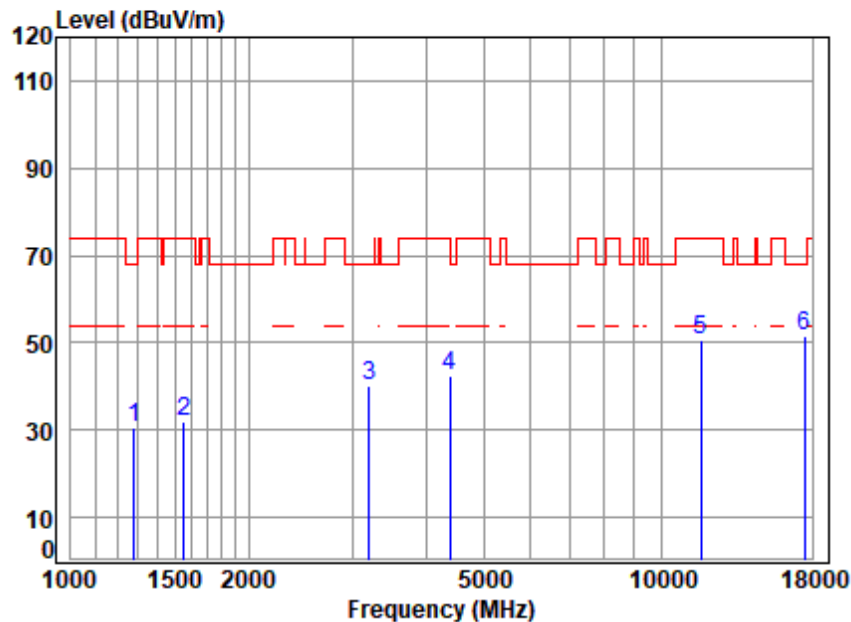

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5825 TX RSE
Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.72	24.91	38.35	40.25	30.53	68.20	-37.67	peak
2	1556.169	4.14	26.98	38.40	39.06	31.78	74.00	-42.22	peak
3	3196.094	5.84	32.87	36.13	37.44	40.02	68.20	-28.18	peak
4	4379.699	7.04	34.64	35.81	36.57	42.44	74.00	-31.56	peak
5	11650.000	13.03	37.80	37.65	37.41	50.59	74.00	-23.41	peak
6	17475.000	14.84	43.40	37.58	30.85	51.51	68.20	-16.69	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

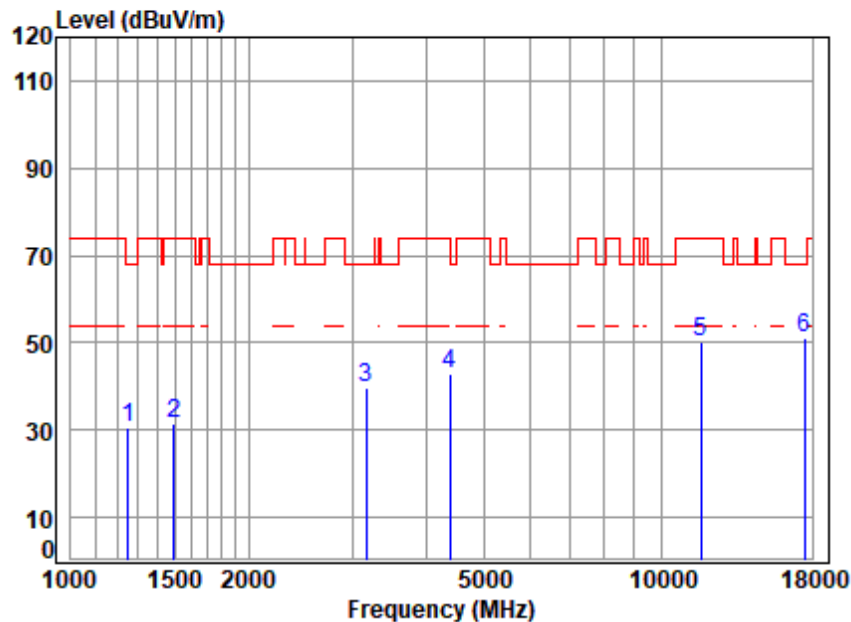


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03424AT
 Mode : 5825 TX RSE
 Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1252.885	3.67	25.08	38.35	39.99	30.39	68.20	-37.81	peak
2	1494.455	4.05	26.64	38.39	39.14	31.44	74.00	-42.56	peak
3	3168.500	5.81	32.65	36.13	37.36	39.69	68.20	-28.51	peak
4	4379.699	7.04	34.64	35.81	36.82	42.69	74.00	-31.31	peak
5	11650.000	13.03	37.80	37.65	37.07	50.25	74.00	-23.75	peak
6	17475.000	14.84	43.40	37.58	30.65	51.31	68.20	-16.89	peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

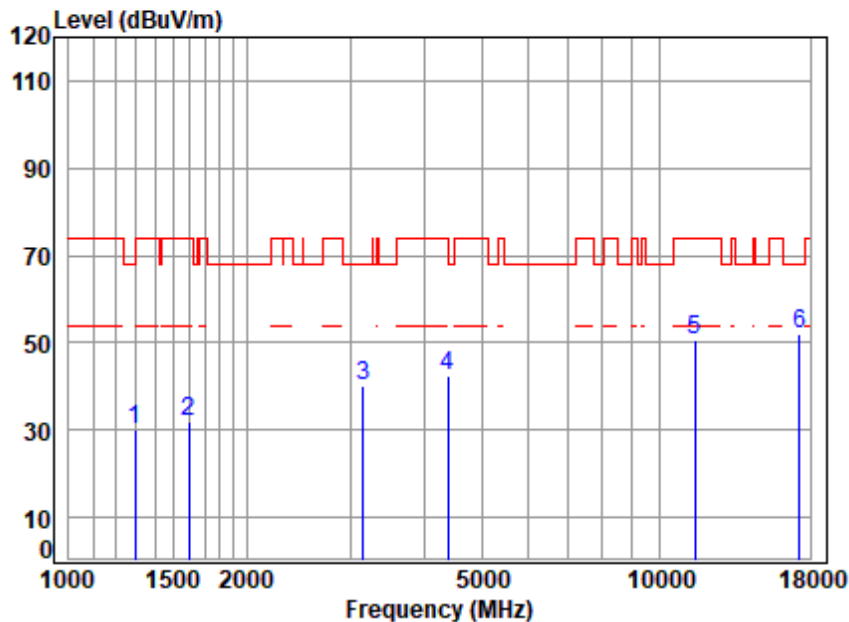

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5755 TX RSE
Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	3.75	24.82	38.36	40.06	30.27	68.20	-37.93	peak
2	1597.181	4.20	26.81	38.40	39.34	31.95	74.00	-42.05	peak
3	3150.237	5.78	32.50	36.13	38.03	40.18	68.20	-28.02	peak
4	4392.376	7.05	34.74	35.80	36.48	42.47	74.00	-31.53	peak
5	11510.000	13.00	37.79	37.69	37.41	50.51	74.00	-23.49	peak
6	17265.000	14.72	43.06	37.55	31.97	52.20	68.20	-16.00	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 156 of 1015

Test Mode: 04; Polarity: Vertical; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: Low

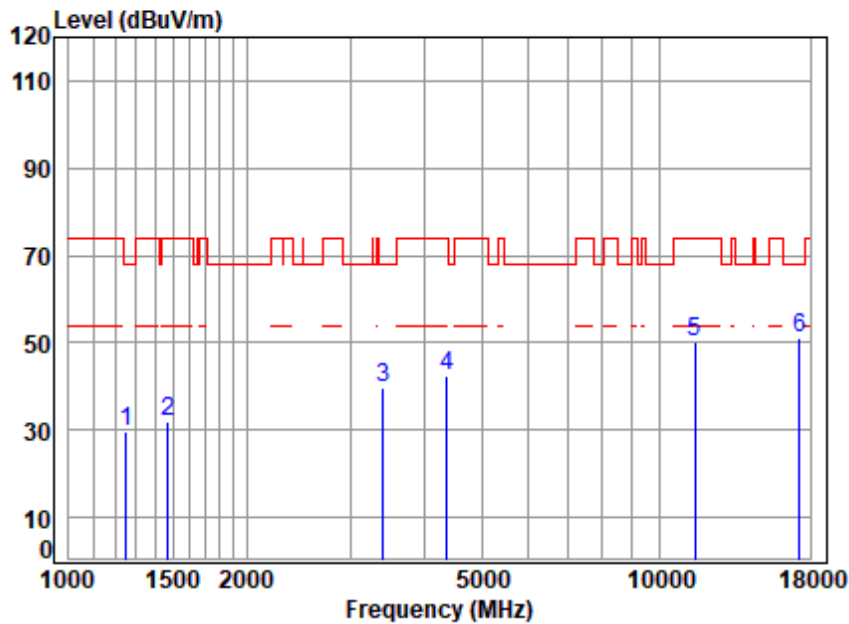

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5755 TX RSE
Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	3.67	25.09	38.35	39.47	29.88	68.20	-38.32	peak
2	1473.013	4.02	26.04	38.38	40.12	31.80	74.00	-42.20	peak
3	3405.929	6.11	32.33	36.12	37.41	39.73	68.20	-28.47	peak
4	4367.058	7.04	34.54	35.82	36.59	42.35	74.00	-31.65	peak
5	11510.000	13.00	37.79	37.69	37.24	50.34	74.00	-23.66	peak
6	17265.000	14.72	43.06	37.55	30.86	51.09	68.20	-17.11	peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 157 of 1015

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

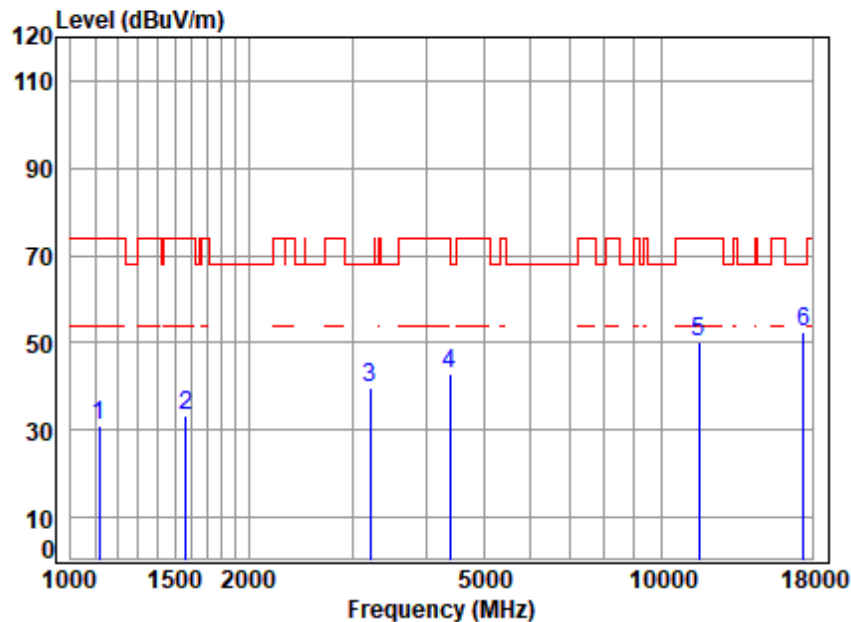

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5795 TX RSE
Note : 5G WIFI 11AX40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1116.093	3.43	23.76	38.32	42.00	30.87	74.00	-43.13	peak
2	1569.721	4.16	26.92	38.40	40.64	33.32	74.00	-40.68	peak
3	3214.623	5.87	32.67	36.13	37.49	39.90	68.20	-28.30	peak
4	4392.376	7.05	34.74	35.80	36.77	42.76	74.00	-31.24	peak
5	11590.000	13.01	37.71	37.67	37.26	50.31	74.00	-23.69	peak
6	17385.000	14.79	43.35	37.57	31.86	52.43	68.20	-15.77	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

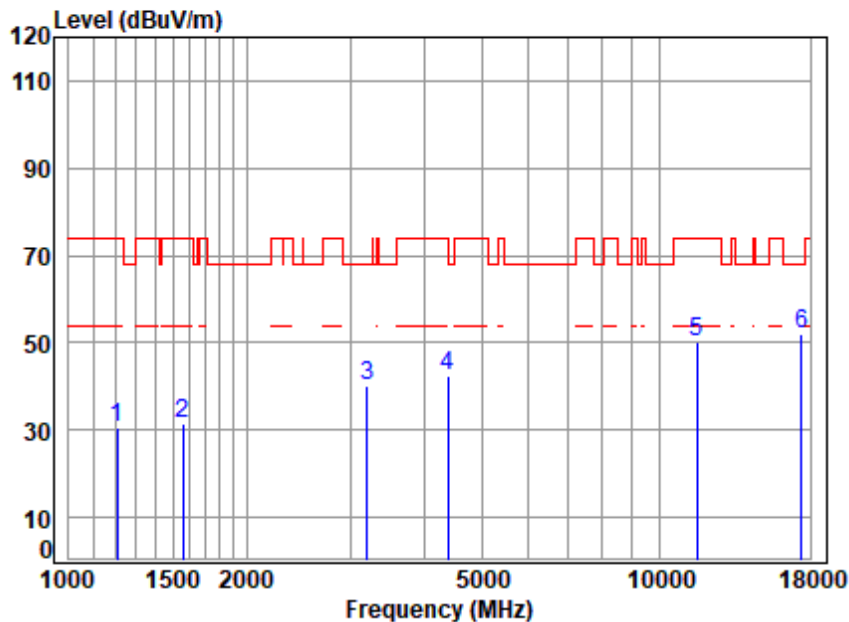

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5795 TX RSE
Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1206.682	3.59	24.49	38.34	40.96	30.70	74.00	-43.30	peak
2	1560.673	4.15	26.96	38.40	38.68	31.39	74.00	-42.61	peak
3	3196.094	5.84	32.87	36.13	37.45	40.03	68.20	-28.17	peak
4	4379.699	7.04	34.64	35.81	36.65	42.52	74.00	-31.48	peak
5	11590.000	13.01	37.71	37.67	37.22	50.27	74.00	-23.73	peak
6	q17385.000	14.79	43.35	37.57	31.25	51.82	68.20	-16.38	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 159 of 1015

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

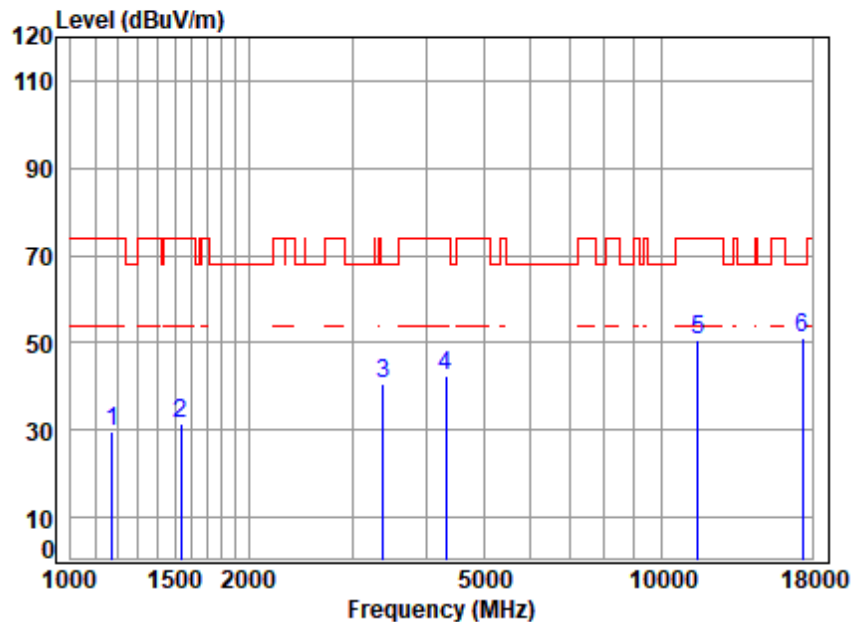

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5775 TX RSE
Note : 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1175.697	3.54	24.16	38.34	40.42	29.78	74.00	-44.22	peak
2	1533.841	4.11	26.94	38.39	38.94	31.60	74.00	-42.40	peak
3	3386.297	6.09	32.32	36.12	38.49	40.78	68.20	-27.42	peak
4	4316.859	7.00	34.13	35.86	37.03	42.30	74.00	-31.70	peak
5	11550.000	13.01	37.75	37.68	37.53	50.61	74.00	-23.39	peak
6	17325.000	14.76	43.17	37.56	30.65	51.02	68.20	-17.18	peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 160 of 1015

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

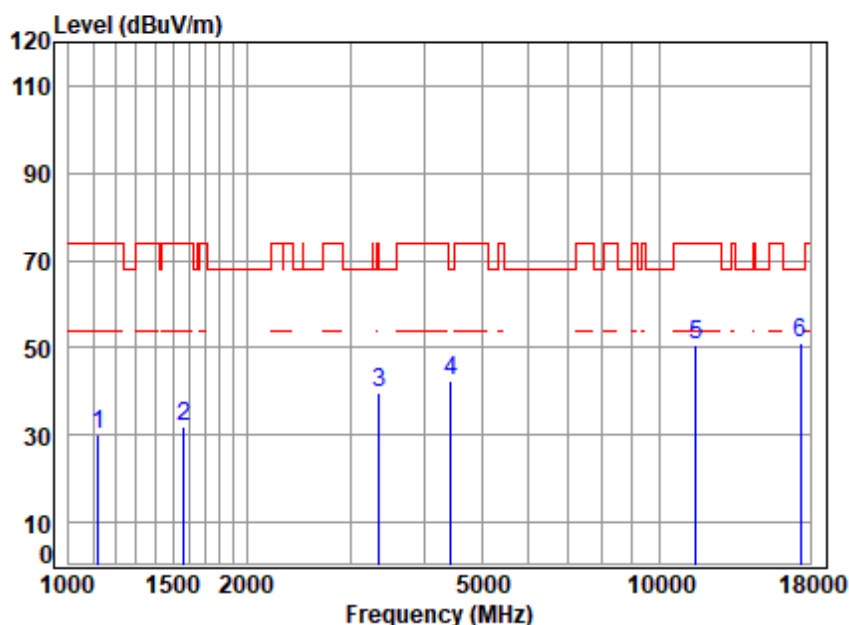

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5775 TX RSE
Note : 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1122.563	3.44	23.79	38.33	41.07	29.97	74.00	-44.03	peak
2	1565.191	4.15	26.94	38.40	39.44	32.13	74.00	-41.87	peak
3	3357.061	6.05	32.14	36.12	37.47	39.54	74.00	-34.46	peak
4	4430.628	7.08	34.43	35.77	36.70	42.44	68.20	-25.76	peak
5	11550.000	13.01	37.75	37.68	37.38	50.46	74.00	-23.54	peak
6	q17325.000	14.76	43.17	37.56	30.74	51.11	68.20	-17.09	peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 161 of 1015

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

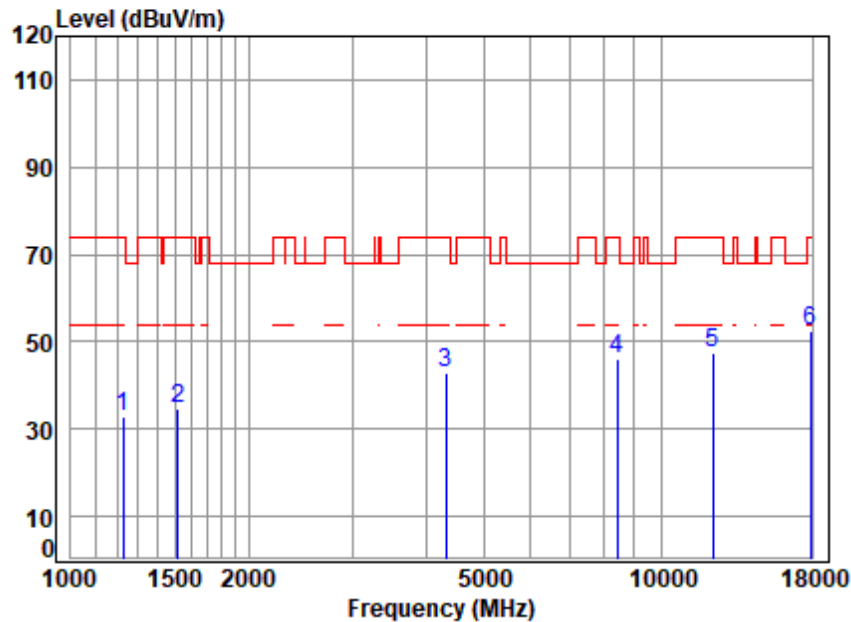

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6115 TX RSE
Note : 6E WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1227.791	3.72	24.79	61.56	65.72	32.67	74.00	-41.33	peak
2	1520.598	4.07	26.88	61.66	65.16	34.45	74.00	-39.55	peak
3	4316.859	7.04	34.13	61.47	63.14	42.84	74.00	-31.16	peak
4	8416.584	9.45	36.67	61.78	61.95	46.29	74.00	-27.71	peak
5	12230.000	11.96	37.71	62.71	60.60	47.56	74.00	-26.44	peak
6	p17865.000	15.32	43.90	61.02	54.23	52.43	74.00	-21.57	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

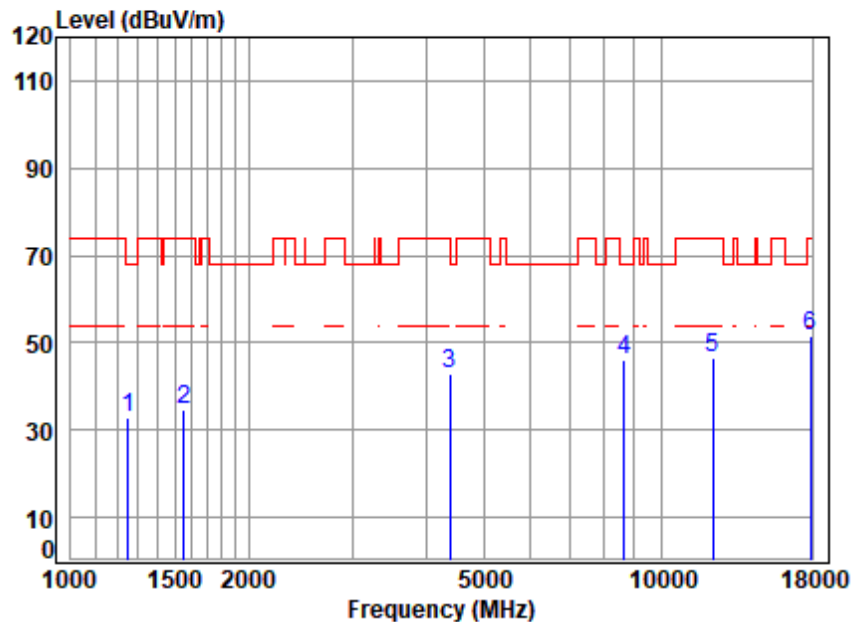


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6115 TX RSE
Note : 6E WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1252.885	3.75	25.08	61.57	65.81	33.07	68.20	-35.13	peak
2	1551.677	4.12	26.99	61.67	65.21	34.65	74.00	-39.35	peak
3	4392.376	7.13	34.74	61.53	62.47	42.81	74.00	-31.19	peak
4	8663.404	9.66	36.90	61.86	61.40	46.10	68.20	-22.10	peak
5	12230.000	11.96	37.71	62.71	59.55	46.51	74.00	-27.49	peak
6	17865.000	15.32	43.90	61.02	53.15	51.35	74.00	-22.65	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

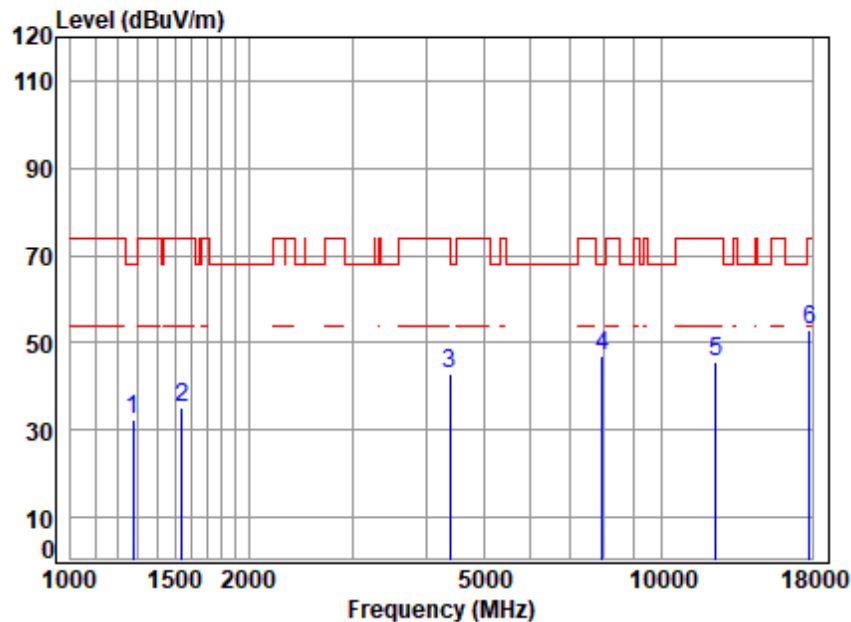


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6175 TX RSE
Note : 6E WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1274.802	3.78	24.95	61.58	65.26	32.41	68.20	-35.79	peak
2	1542.733	4.10	26.97	61.67	65.54	34.94	74.00	-39.06	peak
3	4379.699	7.11	34.64	61.52	62.80	43.03	74.00	-30.97	peak
4	7943.838	8.96	36.41	61.67	63.30	47.00	68.20	-21.20	peak
5	12350.000	12.02	37.90	62.71	58.30	45.51	74.00	-28.49	peak
6	p17793.090	15.23	43.89	61.09	54.92	52.95	74.00	-21.05	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

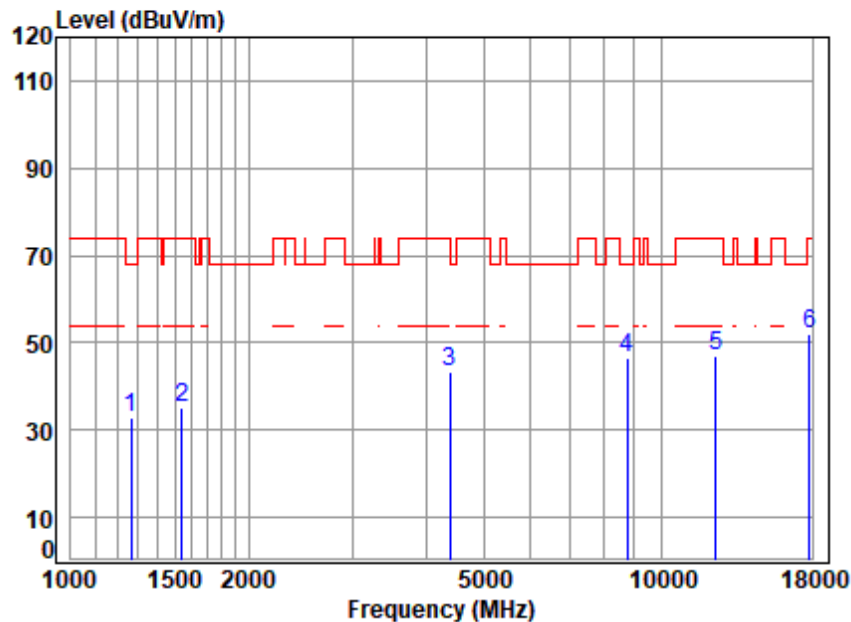


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6175 TX RSE
Note : 6E WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1263.796	3.77	25.02	61.58	65.51	32.72	68.20	-35.48	peak
2	1542.733	4.10	26.97	61.67	65.55	34.95	74.00	-39.05	peak
3	4379.699	7.11	34.64	61.52	63.17	43.40	74.00	-30.60	peak
4 p	8764.146	9.74	36.96	61.89	61.56	46.37	68.20	-21.83	peak
5	12350.000	12.02	37.90	62.71	59.86	47.07	74.00	-26.93	peak
6	17793.090	15.23	43.89	61.09	54.01	52.04	74.00	-21.96	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

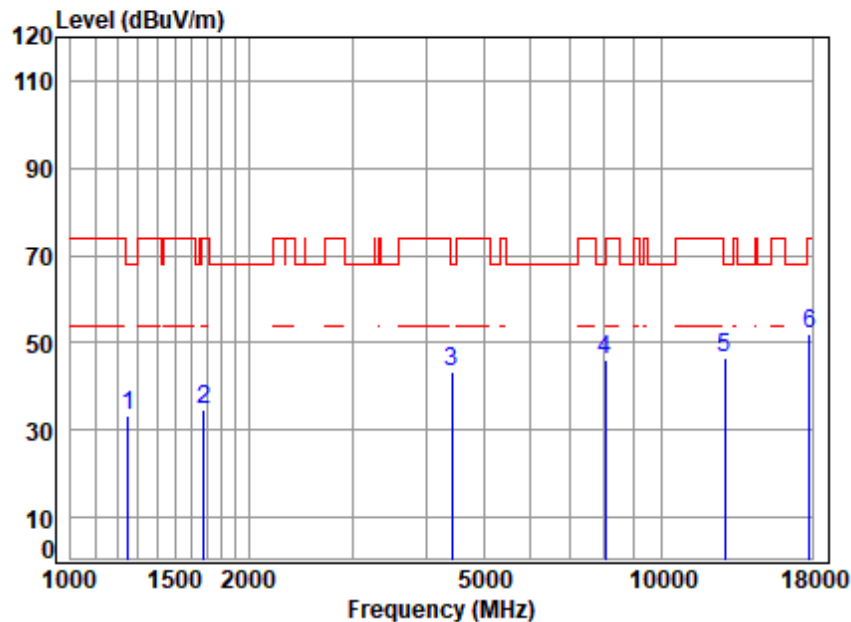


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6395 TX RSE
Note : 6E WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1252.885	3.75	25.08	61.57	66.15	33.41	68.20	-34.79	peak
2	1677.621	4.29	26.24	61.71	65.95	34.77	74.00	-39.23	peak
3	4417.841	7.16	34.59	61.56	63.32	43.51	68.20	-24.69	peak
4	8036.214	9.07	36.40	61.65	62.15	45.97	74.00	-28.03	peak
5	12790.000	12.14	38.10	62.68	59.17	46.73	68.20	-21.47	peak
6	17793.090	15.23	43.89	61.09	54.04	52.07	74.00	-21.93	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

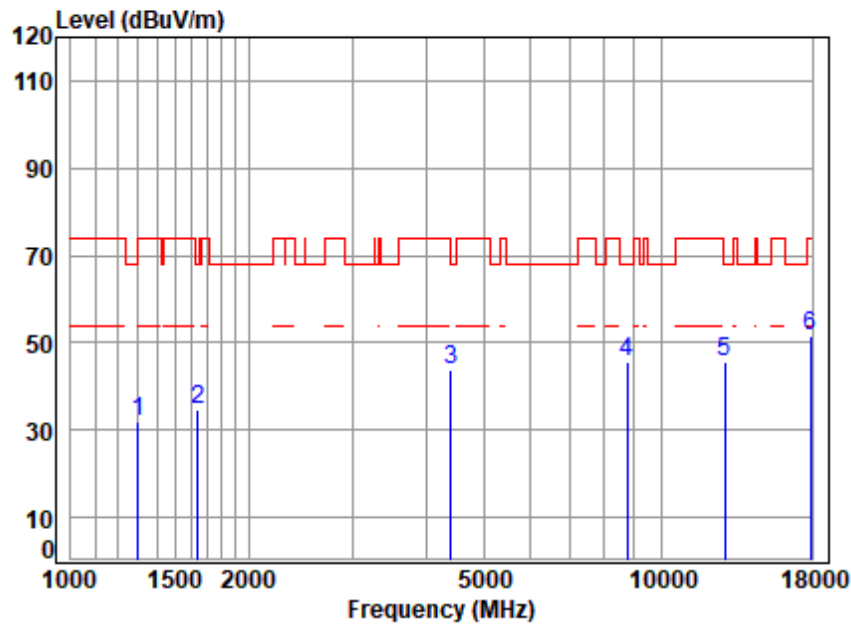


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6395 TX RSE
Note : 6E WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	3.81	24.79	61.59	64.76	31.77	74.00	-42.23	peak
2	1639.274	4.24	26.41	61.70	65.95	34.90	68.20	-33.30	peak
3	4405.090	7.14	34.74	61.55	63.47	43.80	68.20	-24.40	peak
4 p	8738.852	9.72	36.90	61.89	61.13	45.86	68.20	-22.34	peak
5	12790.000	12.14	38.10	62.68	58.16	45.72	68.20	-22.48	peak
6	17896.250	15.35	43.90	60.99	53.39	51.65	74.00	-22.35	peak



Test Mode: 05; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: Low

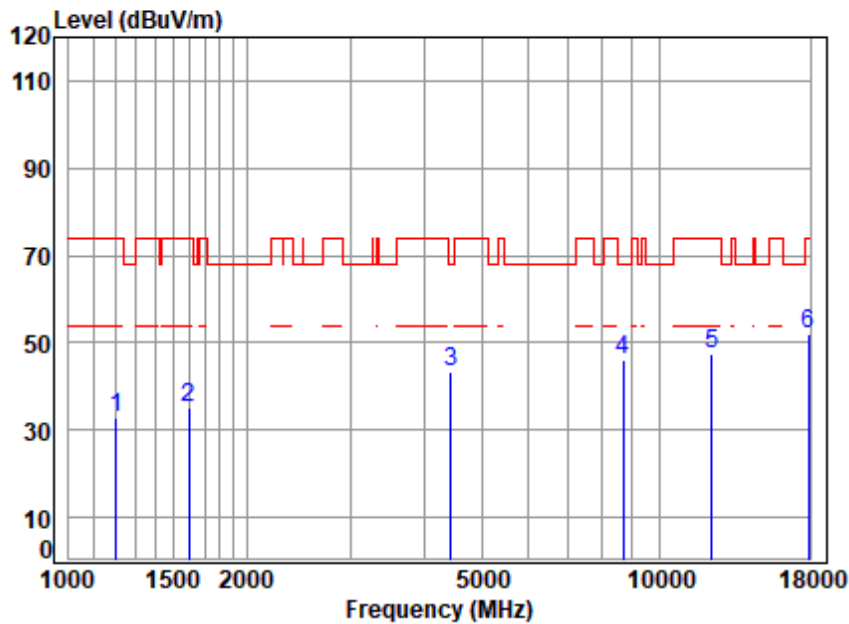


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6125 TX RSE
Note : 6E WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	3.69	24.44	61.56	66.22	32.79	74.00	-41.21	peak
2	1597.181	4.18	26.81	61.69	65.66	34.96	74.00	-39.04	peak
3	4430.628	7.17	34.43	61.57	63.09	43.12	68.20	-25.08	peak
4	8688.480	9.68	36.90	61.87	61.25	45.96	68.20	-22.24	peak
5	12250.000	11.96	37.73	62.71	60.32	47.30	74.00	-26.70	peak
6	p17895.000	15.35	43.90	60.99	53.65	51.91	74.00	-22.09	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

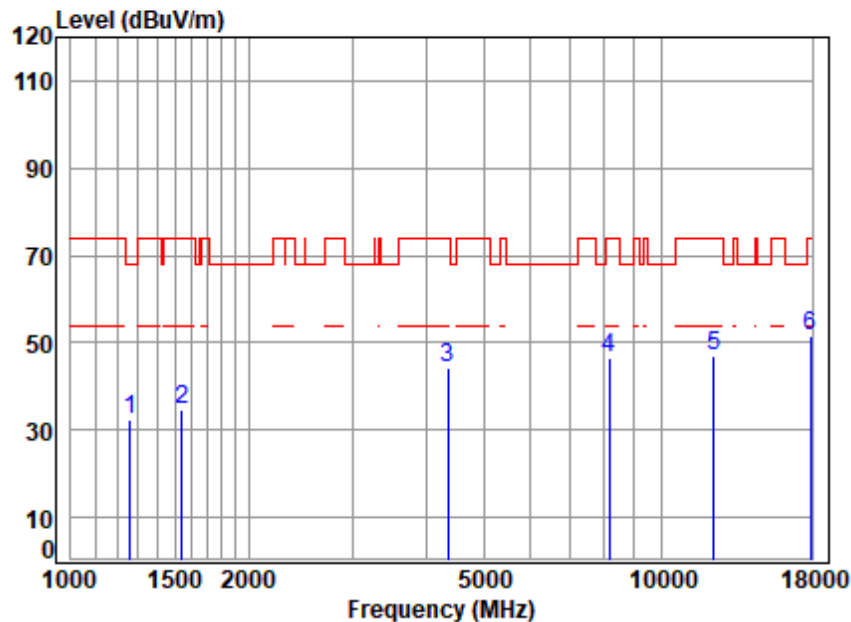

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6125 TX RSE
Note : 6E WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1260.149	3.76	25.04	61.58	65.30	32.52	68.20	-35.68	peak
2	1542.733	4.10	26.97	61.67	65.46	34.86	74.00	-39.14	peak
3	4354.454	7.08	34.44	61.50	64.19	44.21	74.00	-29.79	peak
4	8153.195	9.19	36.51	61.69	62.40	46.41	74.00	-27.59	peak
5	12250.000	11.96	37.73	62.71	59.96	46.94	74.00	-27.06	peak
6	p17895.000	15.35	43.90	60.99	53.38	51.64	74.00	-22.36	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 169 of 1015

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:middle

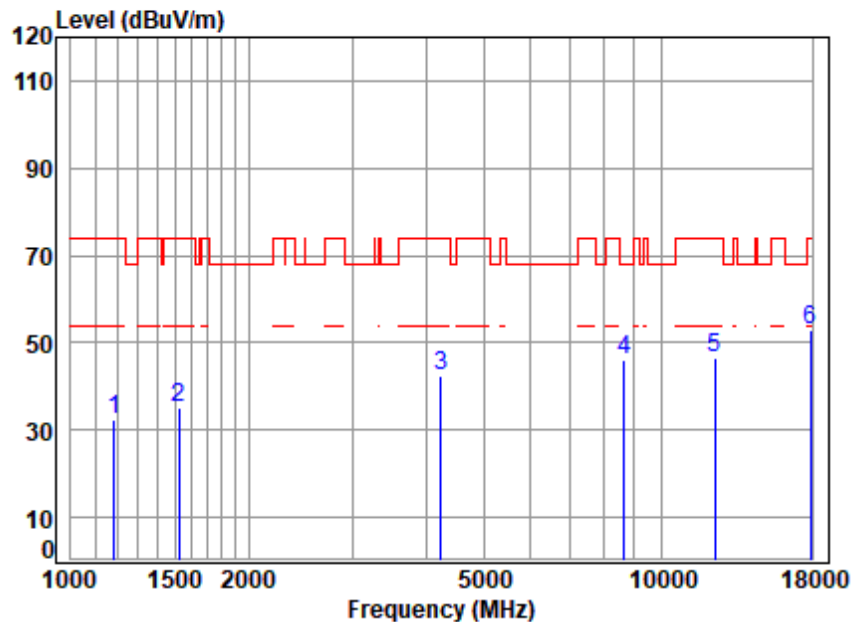

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6165 TX RSE
Note : 6E WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1185.936	3.66	24.26	61.55	66.17	32.54	74.00	-41.46	peak
2	1525.000	4.08	26.90	61.66	65.62	34.94	74.00	-39.06	peak
3	4230.396	6.94	33.80	61.39	63.24	42.59	74.00	-31.41	peak
4	8638.399	9.64	36.90	61.85	61.42	46.11	68.20	-22.09	peak
5	12330.000	12.02	37.90	62.71	59.51	46.72	74.00	-27.28	peak
6	p17896.250	15.35	43.90	60.99	54.48	52.74	74.00	-21.26	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:middle

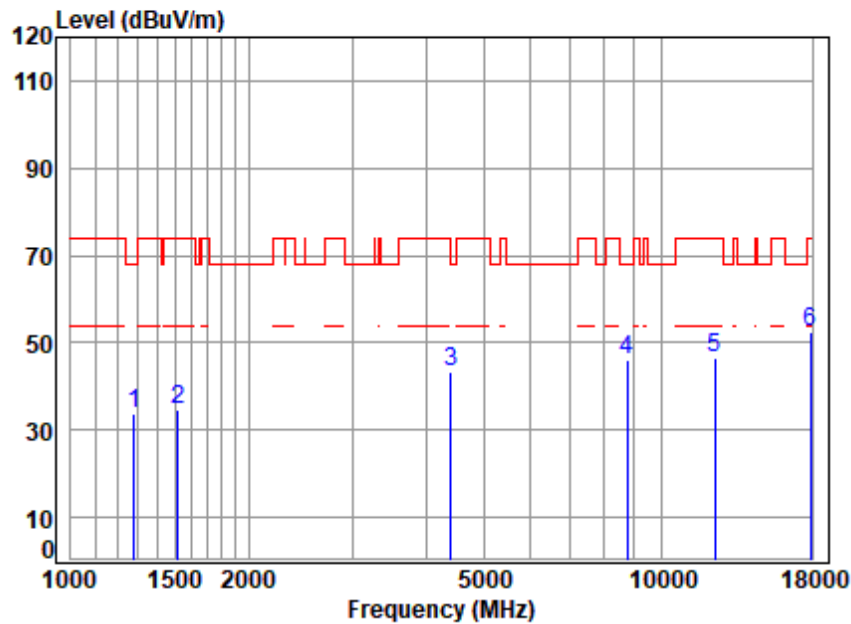


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6165 TX RSE
Note : 6E WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.79	24.91	61.58	66.54	33.66	68.20	-34.54	peak
2	1516.210	4.06	26.86	61.66	65.35	34.61	74.00	-39.39	peak
3	4405.090	7.14	34.74	61.55	63.21	43.54	68.20	-24.66	peak
4	8764.146	9.74	36.96	61.89	61.17	45.98	68.20	-22.22	peak
5	12330.000	12.02	37.90	62.71	59.47	46.68	74.00	-27.32	peak
6	p17896.250	15.35	43.90	60.99	54.16	52.42	74.00	-21.58	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

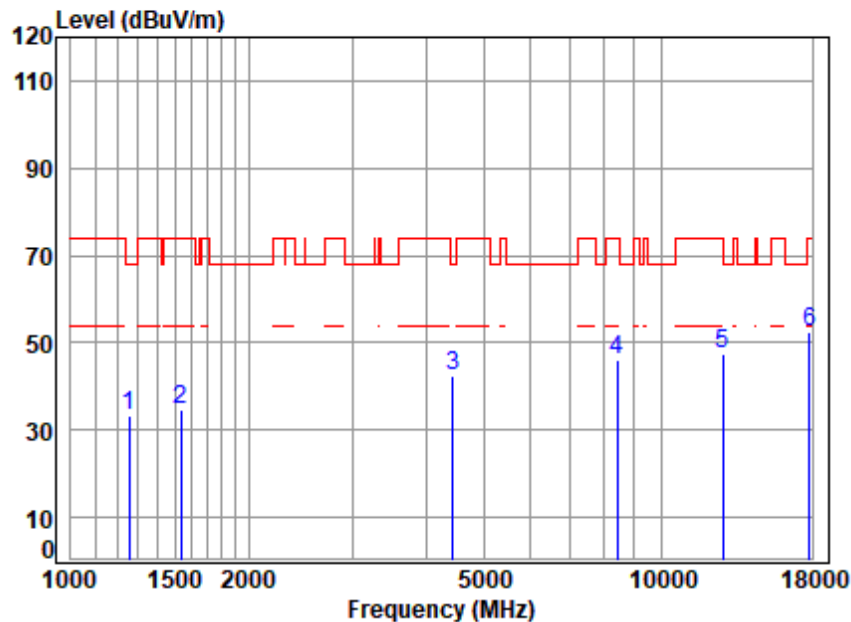


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6365 TX RSE
Note : 6E WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	3.76	25.06	61.58	66.08	33.32	68.20	-34.88	peak
2	1533.841	4.09	26.94	61.67	65.48	34.84	74.00	-39.16	peak
3	4430.628	7.17	34.43	61.57	62.44	42.47	68.20	-25.73	peak
4	8416.584	9.45	36.67	61.78	61.74	46.08	74.00	-27.92	peak
5	12730.000	12.12	38.10	62.68	59.76	47.30	68.20	-20.90	peak
6	17793.090	15.23	43.89	61.09	54.23	52.26	74.00	-21.74	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

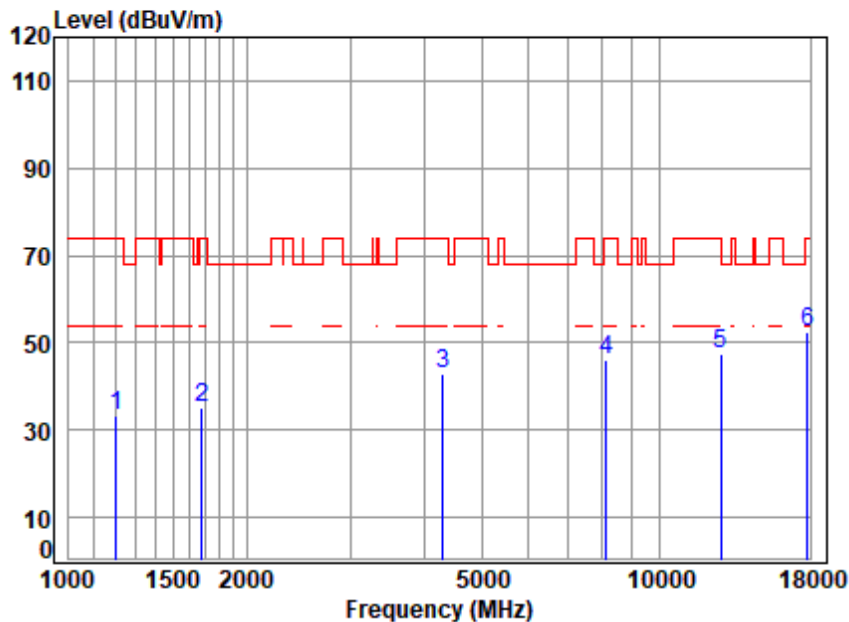


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6365 TX RSE
Note : 6E WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	3.69	24.44	61.56	66.68	33.25	74.00	-40.75	peak
2	1677.621	4.29	26.24	61.71	66.24	35.06	74.00	-38.94	peak
3	4304.400	7.02	34.04	61.46	63.48	43.08	74.00	-30.92	peak
4	8129.664	9.16	36.50	61.68	62.05	46.03	74.00	-27.97	peak
5	12730.000	12.12	38.10	62.68	59.91	47.45	68.20	-20.75	peak
6	17793.090	15.23	43.89	61.09	54.37	52.40	74.00	-21.60	peak



Test Mode: 05; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 80MHz; Channel: Low

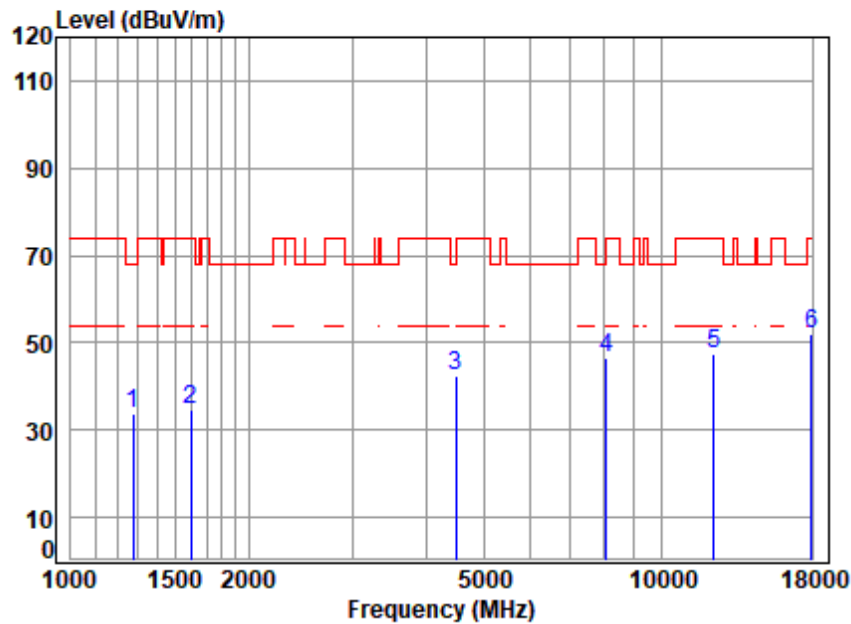


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6145 TX RSE
Note : 6E WIFI 11AX80

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1274.802	3.78	24.95	61.58	66.45	33.60	68.20	-34.60 peak
2	1597.181	4.18	26.81	61.69	65.38	34.68	74.00	-39.32 peak
3	4482.150	7.23	33.81	61.61	63.19	42.62	68.20	-25.58 peak
4	8082.804	9.11	36.47	61.67	62.48	46.39	74.00	-27.61 peak
5	12290.000	11.96	37.77	62.72	60.30	47.31	74.00	-26.69 peak
6	p17955.000	15.42	44.12	60.93	53.42	52.03	74.00	-21.97 peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:Low

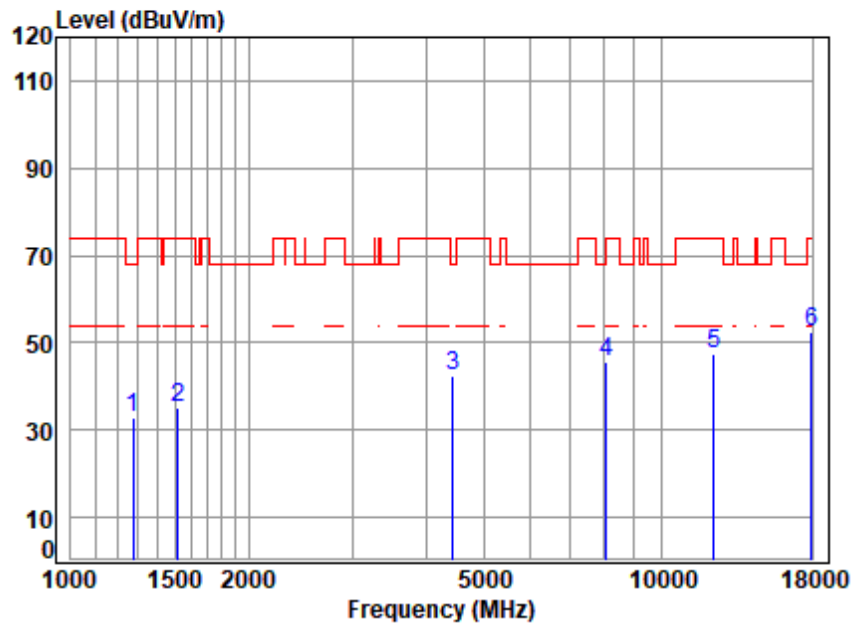


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6145 TX RSE
Note : 6E WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1274.802	3.78	24.95	61.58	65.72	32.87	68.20	-35.33	peak
2	1516.210	4.06	26.86	61.66	65.99	35.25	74.00	-38.75	peak
3	4443.453	7.19	34.28	61.58	62.76	42.65	68.20	-25.55	peak
4	8059.475	9.09	36.42	61.66	61.99	45.84	74.00	-28.16	peak
5	12290.000	11.96	37.77	62.72	60.63	47.64	74.00	-26.36	peak
6	p17955.000	15.42	44.12	60.93	54.00	52.61	74.00	-21.39	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

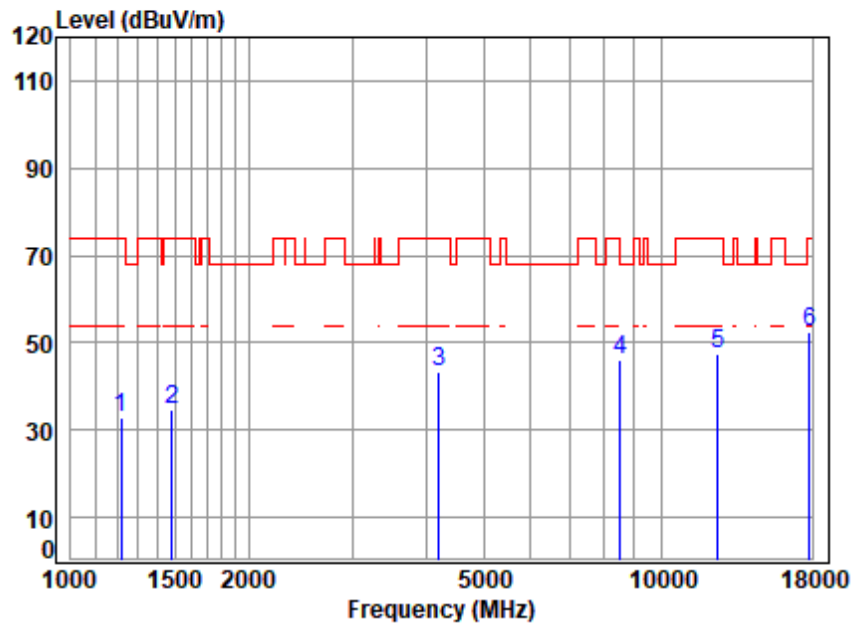


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6225 TX RSE
Note : 6E WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1217.190	3.71	24.64	61.56	66.00	32.79	74.00	-41.21	peak
2	1485.841	4.02	26.40	61.65	65.80	34.57	74.00	-39.43	peak
3	4193.872	6.89	33.80	61.35	63.83	43.17	74.00	-30.83	peak
4	8514.456	9.54	36.73	61.81	61.76	46.22	68.20	-21.98	peak
5	12450.000	12.01	37.90	62.71	60.20	47.40	74.00	-26.60	peak
6	p17844.590	15.29	43.90	61.04	54.49	52.64	74.00	-21.36	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

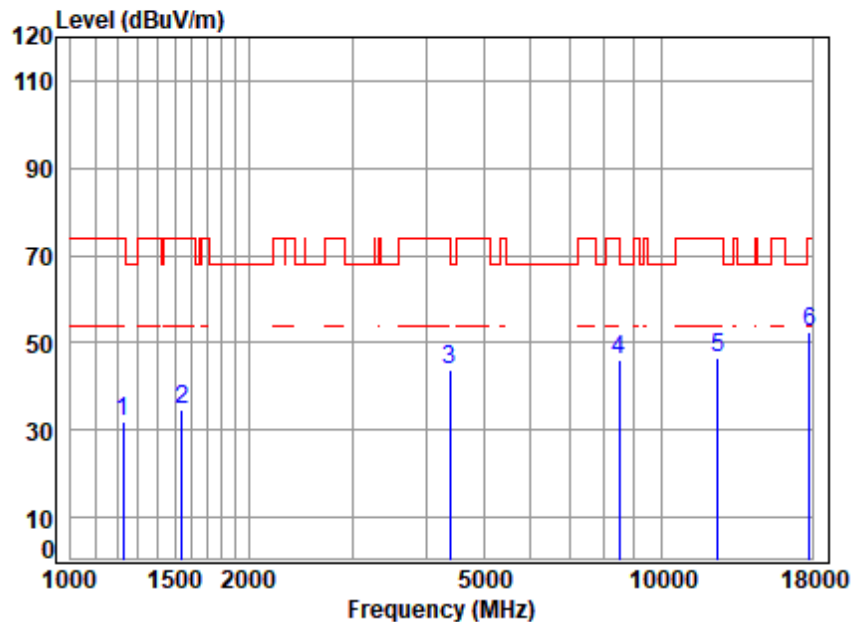

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6225 TX RSE
Note : 6E WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1227.791	3.72	24.79	61.56	65.15	32.10	74.00	-41.90	peak
2	1542.733	4.10	26.97	61.67	65.37	34.77	74.00	-39.23	peak
3	4392.376	7.13	34.74	61.53	63.60	43.94	74.00	-30.06	peak
4	8489.882	9.52	36.68	61.81	61.55	45.94	74.00	-28.06	peak
5	12450.000	12.01	37.90	62.71	59.14	46.34	74.00	-27.66	peak
6	p17793.090	15.23	43.89	61.09	54.40	52.43	74.00	-21.57	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 177 of 1015

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:High

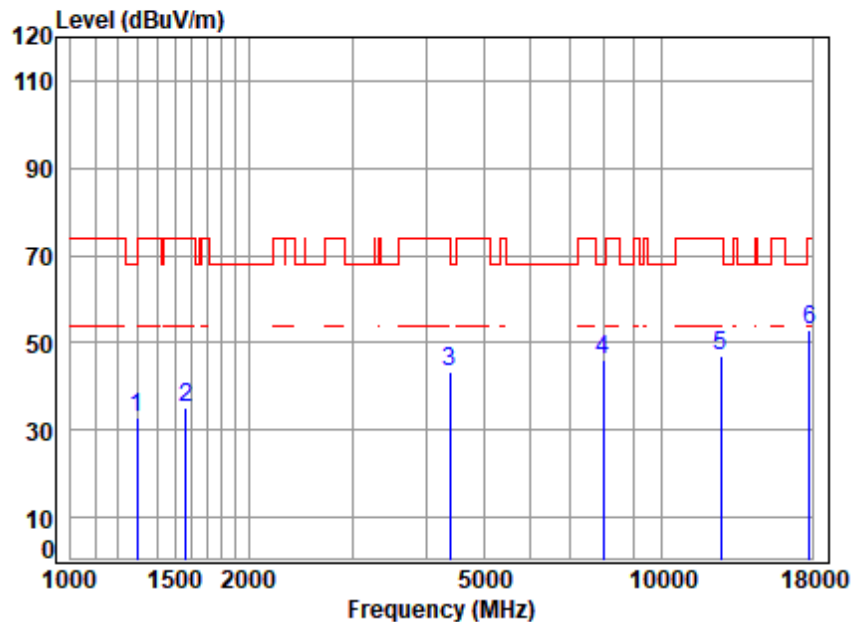

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6305 TX RSE
Note : 6E WIFI 11AX80

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1297.103	3.81	24.82	61.59	65.96	33.00	68.20	-35.20 peak
2	1565.191	4.14	26.94	61.68	65.94	35.34	74.00	-38.66 peak
3	4379.699	7.11	34.64	61.52	62.98	43.21	74.00	-30.79 peak
4	7989.893	9.02	36.40	61.64	62.15	45.93	68.20	-22.27 peak
5	12610.000	12.09	37.92	62.69	59.64	46.96	74.00	-27.04 peak
6	p17793.090	15.23	43.89	61.09	54.81	52.84	74.00	-21.16 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:High

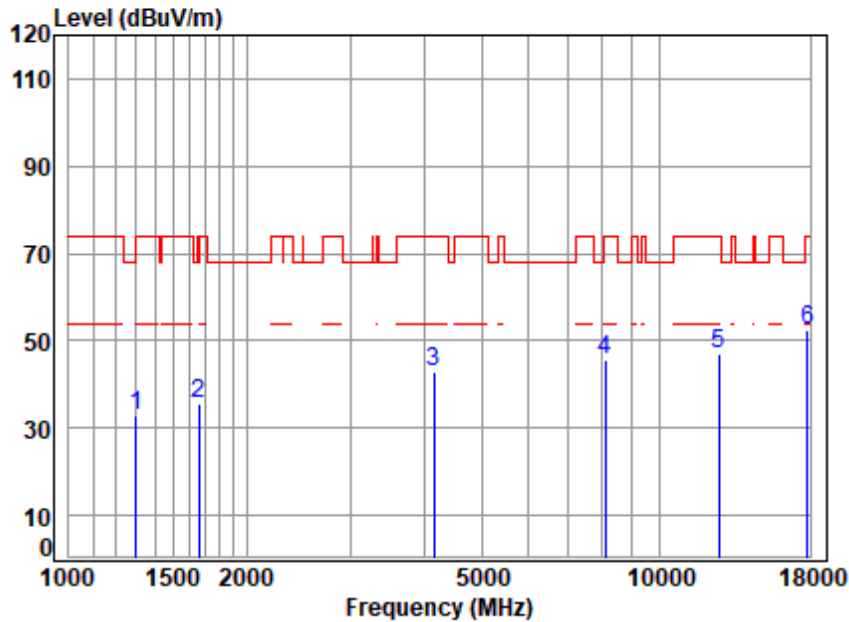


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6305 TX RSE
Note : 6E WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	3.81	24.79	61.59	65.87	32.88	74.00	-41.12	peak
2	1663.137	4.27	26.27	61.70	66.67	35.51	74.00	-38.49	peak
3	4145.664	6.83	33.73	61.31	63.73	42.98	74.00	-31.02	peak
4	8106.200	9.14	36.50	61.68	61.88	45.84	74.00	-28.16	peak
5	12610.000	12.09	37.92	62.69	59.89	47.21	74.00	-26.79	peak
6	p17793.090	15.23	43.89	61.09	54.47	52.50	74.00	-21.50	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:160MHz;

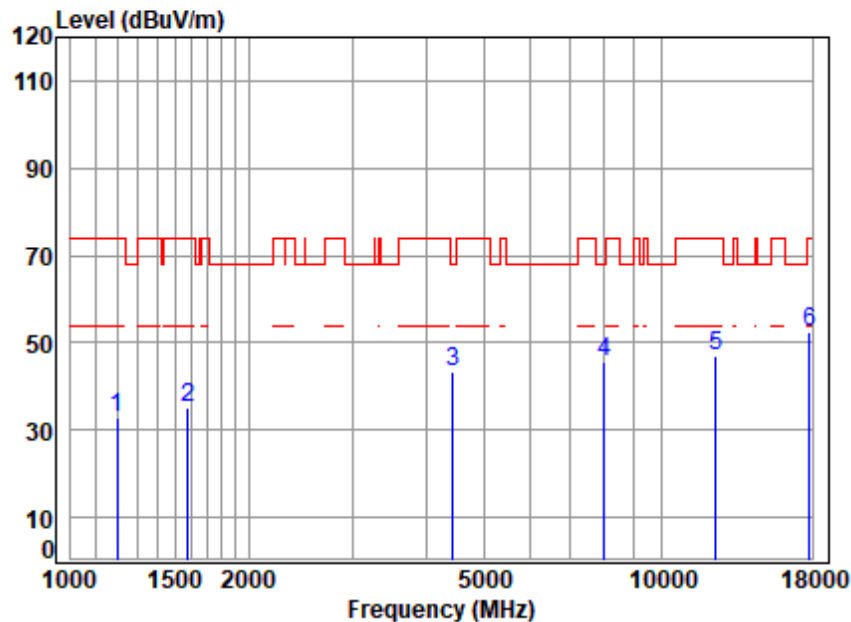


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03424AT
 Mode : 6185 TX RSE
 Note : 6E WIFI 11AX160

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	3.68	24.36	61.55	66.36	32.85	74.00	-41.15	peak
2	1578.822	4.16	26.88	61.68	65.67	35.03	74.00	-38.97	peak
3	4430.628	7.17	34.43	61.57	63.16	43.19	68.20	-25.01	peak
4	8013.020	9.04	36.40	61.64	61.83	45.63	68.20	-22.57	peak
5	12370.000	12.03	37.90	62.71	59.58	46.80	74.00	-27.20	peak
6	17844.590	15.29	43.90	61.04	54.46	52.61	74.00	-21.39	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:160MHz;

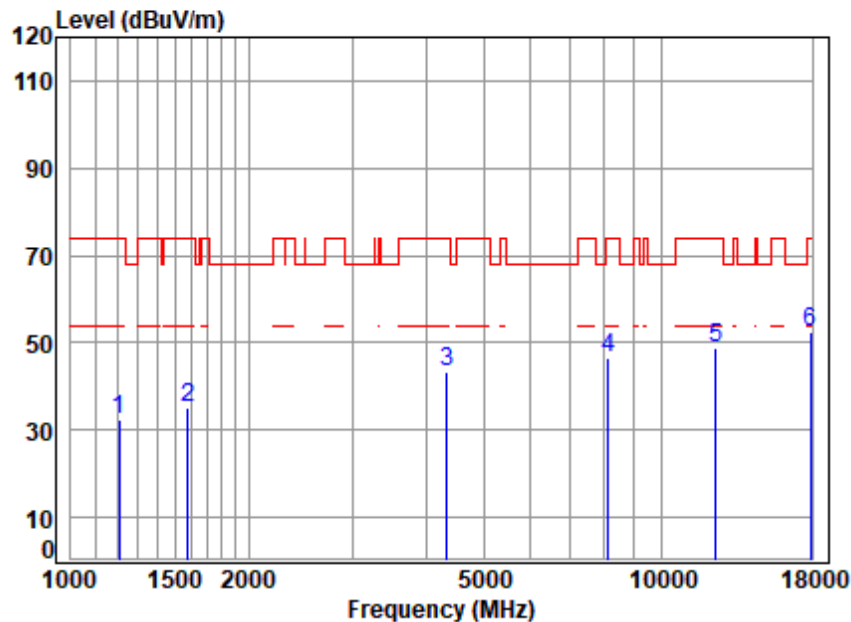


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6185 TX RSE
Note : 6E WIFI 11AX160

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1206.682	3.69	24.49	61.56	65.91	32.53	74.00	-41.47	peak
2	1578.822	4.16	26.88	61.68	65.77	35.13	74.00	-38.87	peak
3	4341.886	7.07	34.34	61.49	63.61	43.53	74.00	-30.47	peak
4	8129.664	9.16	36.50	61.68	62.58	46.56	74.00	-27.44	peak
5	12370.000	12.03	37.90	62.71	61.43	48.65	74.00	-25.35	peak
6	p17896.250	15.35	43.90	60.99	54.44	52.70	74.00	-21.30	peak



Test Mode: 06; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

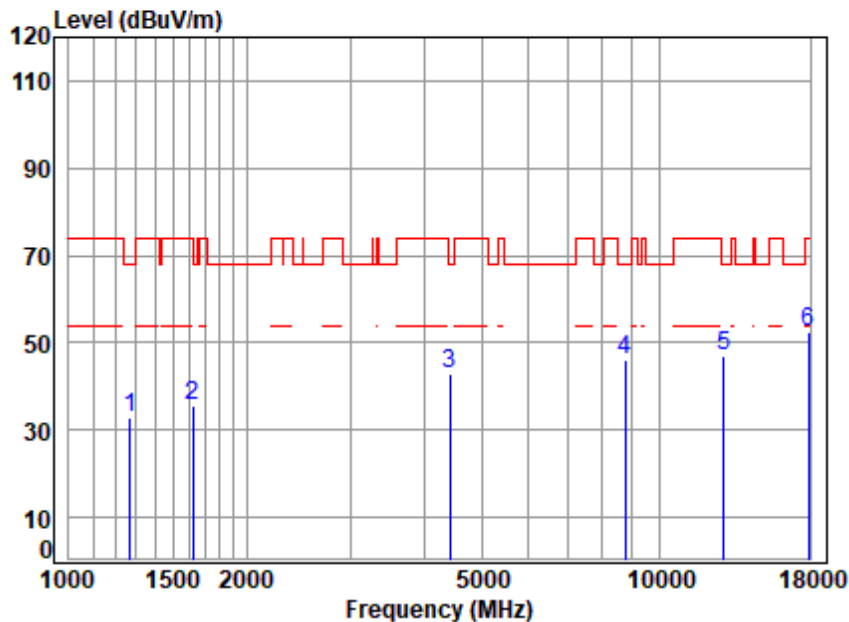


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6435 TX RSE
Note : 6E WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1271.123	3.77	24.97	61.58	65.65	32.81	68.20	-35.39 peak
2	1625.121	4.22	26.55	61.69	66.31	35.39	74.00	-38.61 peak
3	4417.841	7.16	34.59	61.56	62.78	42.97	68.20	-25.23 peak
4	8738.852	9.72	36.90	61.89	61.30	46.03	68.20	-22.17 peak
5	12870.000	12.17	38.17	62.68	59.13	46.79	68.20	-21.41 peak
6	17896.250	15.35	43.90	60.99	54.19	52.45	74.00	-21.55 peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

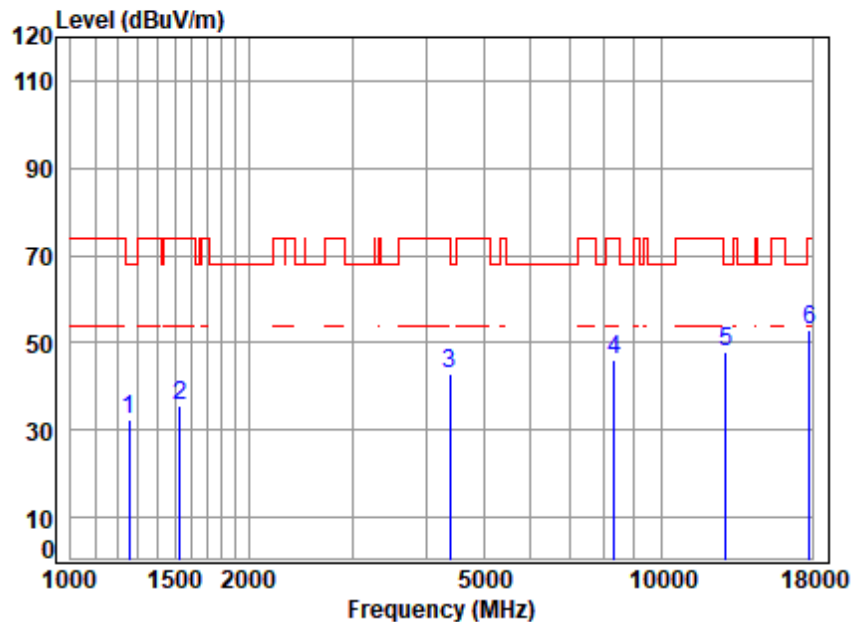


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6435 TX RSE
Note : 6E WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	3.76	25.06	61.58	64.97	32.21	68.20	-35.99	peak
2	1529.414	4.08	26.92	61.67	66.24	35.57	74.00	-38.43	peak
3	4379.699	7.11	34.64	61.52	62.67	42.90	74.00	-31.10	peak
4	8319.836	9.35	36.70	61.75	61.78	46.08	74.00	-27.92	peak
5	12870.000	12.17	38.17	62.68	60.28	47.94	68.20	-20.26	peak
6	17793.090	15.23	43.89	61.09	55.02	53.05	74.00	-20.95	peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

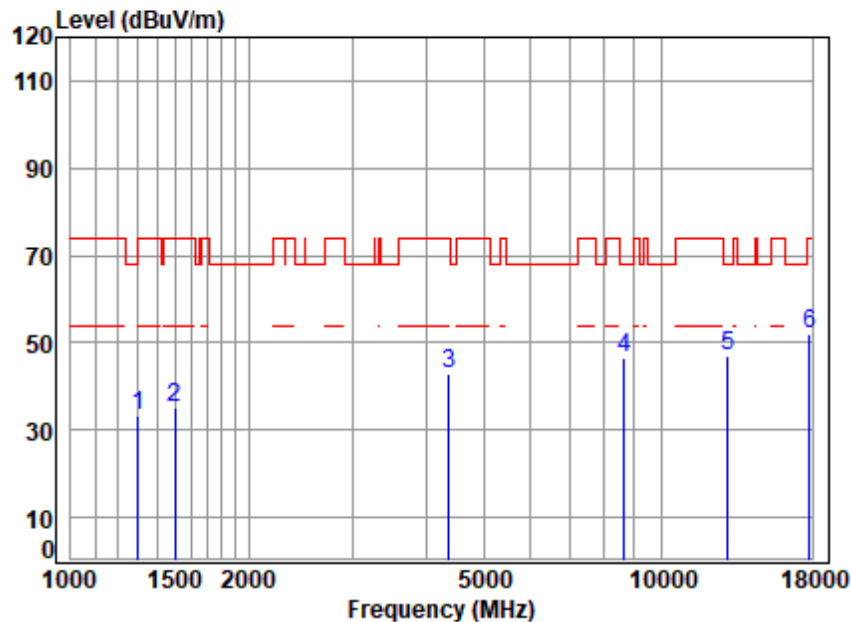


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6475 TX RSE
Note : 6E WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	3.81	24.79	61.59	66.23	33.24	74.00	-40.76	peak
2	1503.119	4.04	26.81	61.66	65.94	35.13	74.00	-38.87	peak
3	4367.058	7.10	34.54	61.51	62.98	43.11	74.00	-30.89	peak
4	8663.404	9.66	36.90	61.86	61.80	46.50	68.20	-21.70	peak
5	12950.000	12.19	38.15	62.67	59.27	46.94	68.20	-21.26	peak
6	17844.590	15.29	43.90	61.04	54.01	52.16	74.00	-21.84	peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

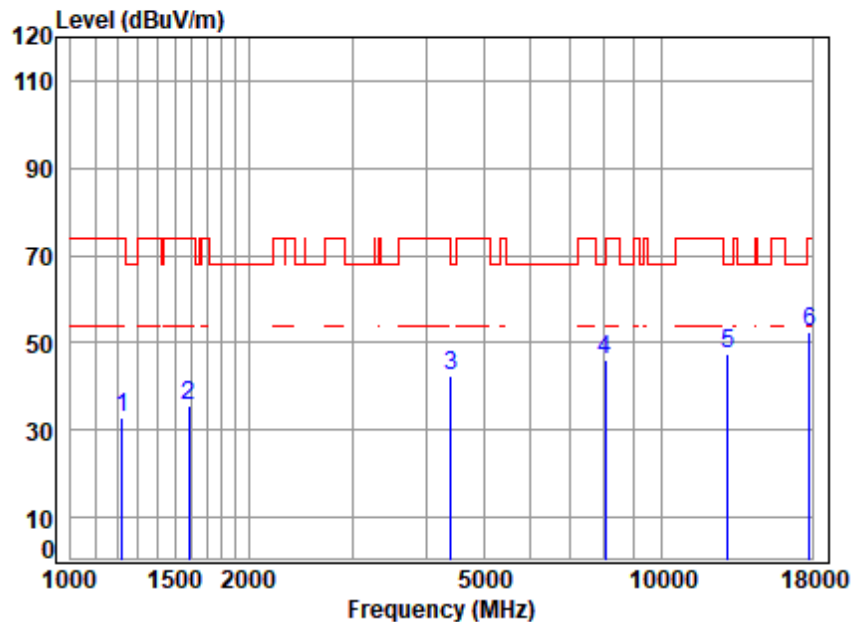

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6475 TX RSE
Note : 6E WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1224.247	3.71	24.74	61.56	65.95	32.84	74.00	-41.16	peak
2	1587.975	4.17	26.85	61.68	66.31	35.65	74.00	-38.35	peak
3	4405.090	7.14	34.74	61.55	62.20	42.53	68.20	-25.67	peak
4	8036.214	9.07	36.40	61.65	62.31	46.13	74.00	-27.87	peak
5	12950.000	12.19	38.15	62.67	59.57	47.24	68.20	-20.96	peak
6	17844.590	15.29	43.90	61.04	54.35	52.50	74.00	-21.50	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 185 of 1015

Test Mode: 06; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

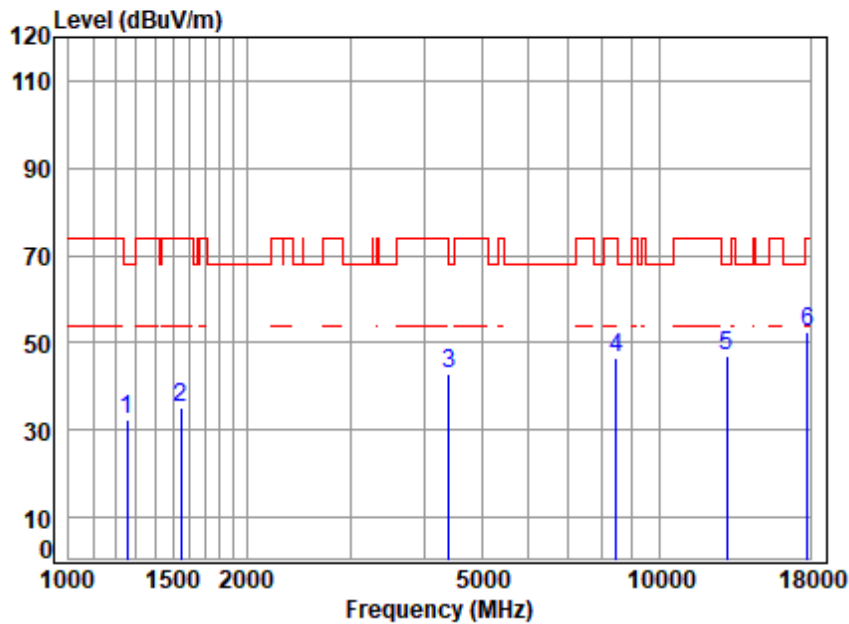

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6495 TX RSE
Note : 6E WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	3.76	25.06	61.58	65.34	32.58	68.20	-35.62	peak
2	1547.199	4.11	26.99	61.67	65.88	35.31	74.00	-38.69	peak
3	4405.090	7.14	34.74	61.55	62.37	42.70	68.20	-25.50	peak
4	8440.945	9.47	36.62	61.79	62.38	46.68	74.00	-27.32	peak
5	12990.000	12.21	38.11	62.67	59.44	47.09	68.20	-21.11	peak
6	17793.090	15.23	43.89	61.09	54.60	52.63	74.00	-21.37	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

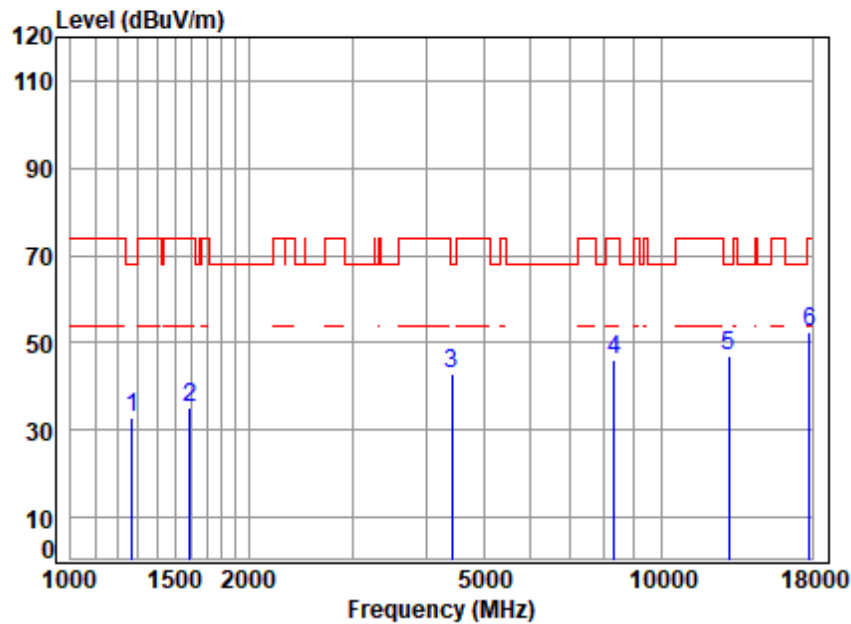


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6495 TX RSE
Note : 6E WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1271.123	3.77	24.97	61.58	65.64	32.80	68.20	-35.40	peak
2	1592.571	4.18	26.83	61.68	65.74	35.07	74.00	-38.93	peak
3	4417.841	7.16	34.59	61.56	62.89	43.08	68.20	-25.12	peak
4	8319.836	9.35	36.70	61.75	61.90	46.20	74.00	-27.80	peak
5	12990.000	12.21	38.11	62.67	59.32	46.97	68.20	-21.23	peak
6	17844.590	15.29	43.90	61.04	54.33	52.48	74.00	-21.52	peak



Test Mode: 06; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: Low

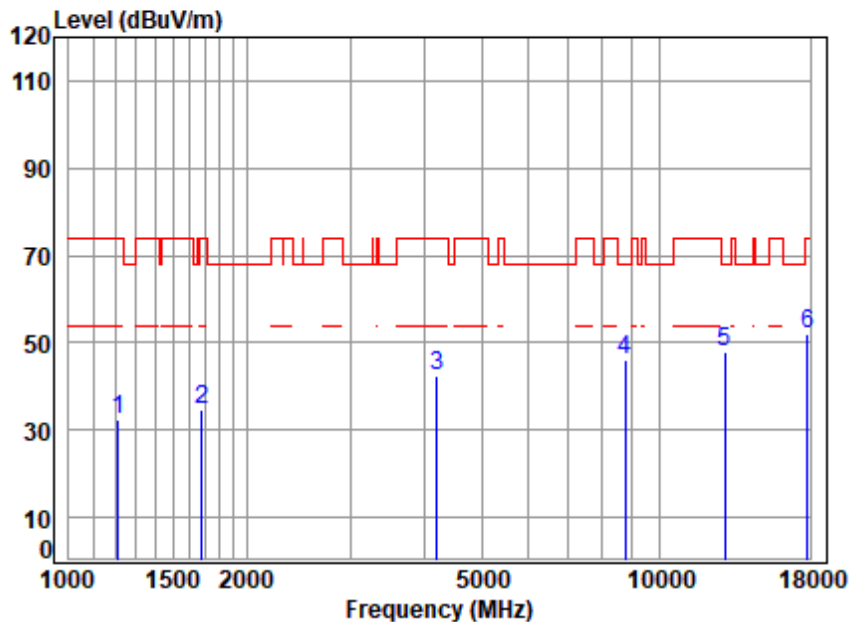


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6445 TX RSE
Note : 6E WIFI 11AX40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1213.677	3.70	24.59	61.56	65.88	32.61	74.00	-41.39	peak
2	1677.621	4.29	26.24	61.71	66.02	34.84	74.00	-39.16	peak
3	4193.872	6.89	33.80	61.35	63.06	42.40	74.00	-31.60	peak
4	8738.852	9.72	36.90	61.89	61.15	45.88	68.20	-22.32	peak
5	12890.000	12.18	38.19	62.67	60.30	48.00	68.20	-20.20	peak
6	17793.090	15.23	43.89	61.09	53.99	52.02	74.00	-21.98	peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

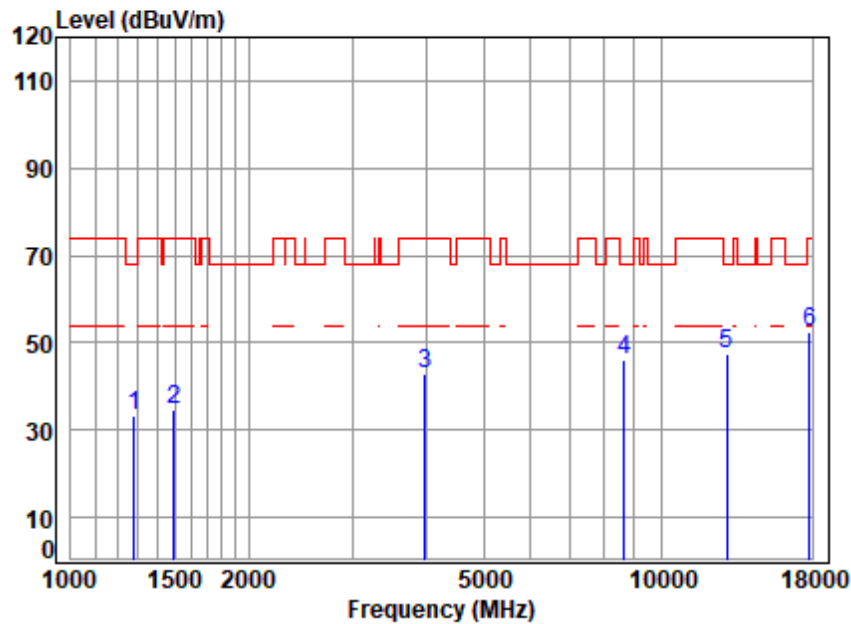

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6445 TX RSE
Note : 6E WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1278.492	3.78	24.93	61.58	66.34	33.47	68.20	-34.73	peak
2	1494.455	4.03	26.64	61.66	65.87	34.88	74.00	-39.12	peak
3	3981.257	6.65	33.19	61.17	64.22	42.89	74.00	-31.11	peak
4	8663.404	9.66	36.90	61.86	61.57	46.27	68.20	-21.93	peak
5	12890.000	12.18	38.19	62.67	59.57	47.27	68.20	-20.93	peak
6	17844.590	15.29	43.90	61.04	54.50	52.65	74.00	-21.35	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 189 of 1015

Test Mode: 06; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

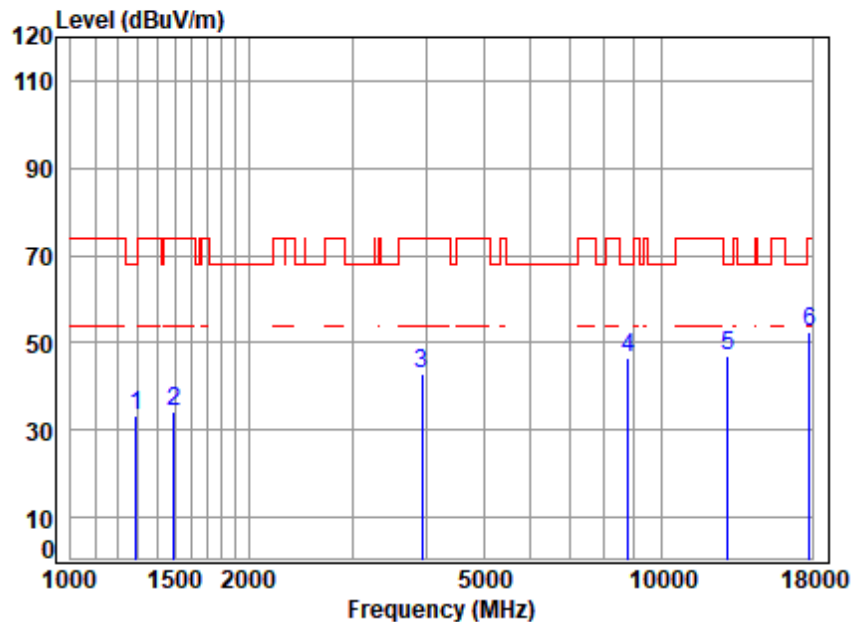

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6485 TX RSE
Note : 6E WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.80	24.86	61.59	66.24	33.31	68.20	-34.89	peak
2	1494.455	4.03	26.64	61.66	65.33	34.34	74.00	-39.66	peak
3	3935.493	6.63	33.59	61.18	64.02	43.06	74.00	-30.94	peak
4	8789.516	9.76	37.06	61.90	61.61	46.53	68.20	-21.67	peak
5	12970.000	12.20	38.13	62.67	59.52	47.18	68.20	-21.02	peak
6	17793.090	15.23	43.89	61.09	54.63	52.66	74.00	-21.34	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

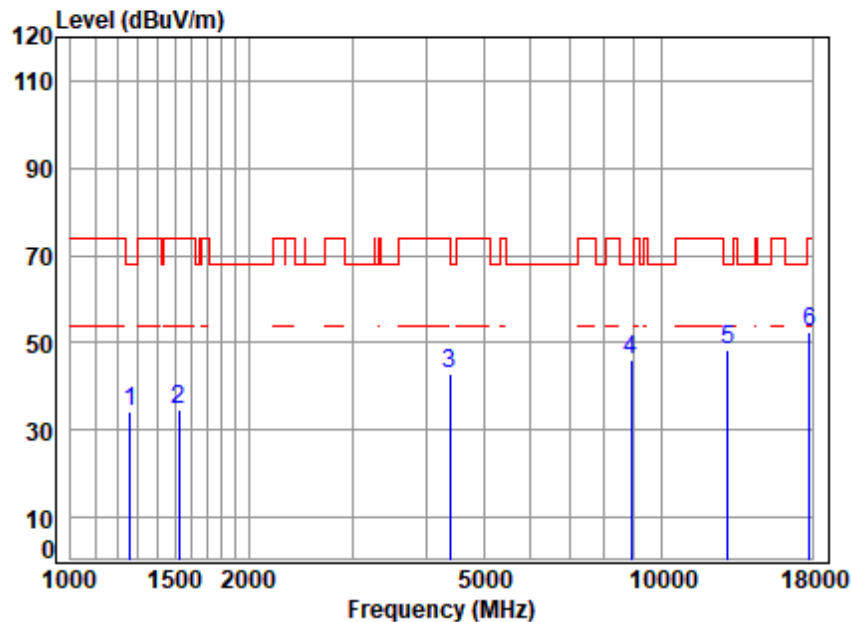


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6485 TX RSE
Note : 6E WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1260.149	3.76	25.04	61.58	66.80	34.02	68.20	-34.18	peak
2	1525.000	4.08	26.90	61.66	65.14	34.46	74.00	-39.54	peak
3	4379.699	7.11	34.64	61.52	62.79	43.02	74.00	-30.98	peak
4	8891.725	9.84	37.20	61.93	61.02	46.13	68.20	-22.07	peak
5	12970.000	12.20	38.13	62.67	60.76	48.42	68.20	-19.78	peak
6	17793.090	15.23	43.89	61.09	54.40	52.43	74.00	-21.57	peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz;

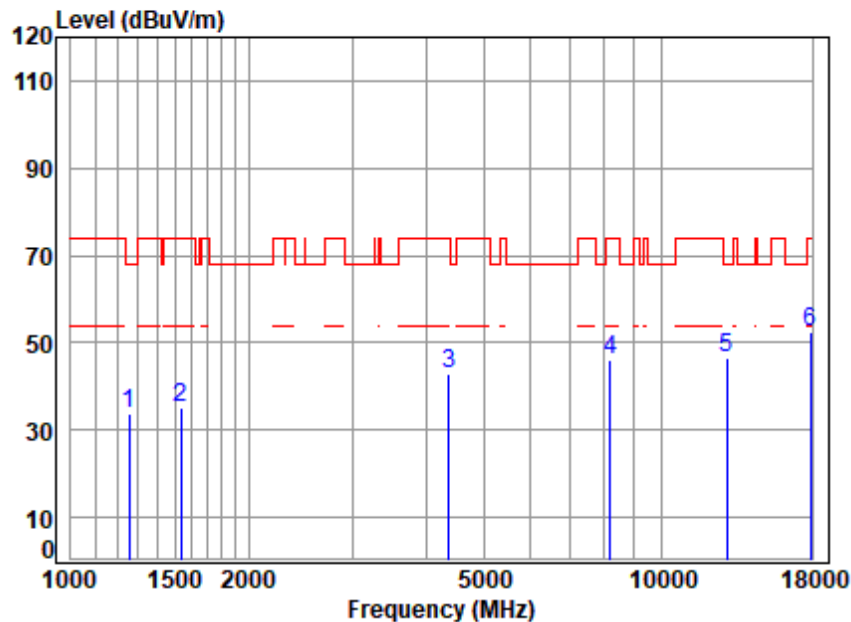


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6465 TX RSE
Note : 6E WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	3.76	25.06	61.58	66.67	33.91	68.20	-34.29	peak
2	1533.841	4.09	26.94	61.67	65.55	34.91	74.00	-39.09	peak
3	4367.058	7.10	34.54	61.51	62.95	43.08	74.00	-30.92	peak
4	8200.463	9.23	36.60	61.71	61.80	45.92	74.00	-28.08	peak
5	12930.000	12.19	38.17	62.67	59.08	46.77	68.20	-21.43	peak
6	p17896.250	15.35	43.90	60.99	54.34	52.60	74.00	-21.40	peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz;

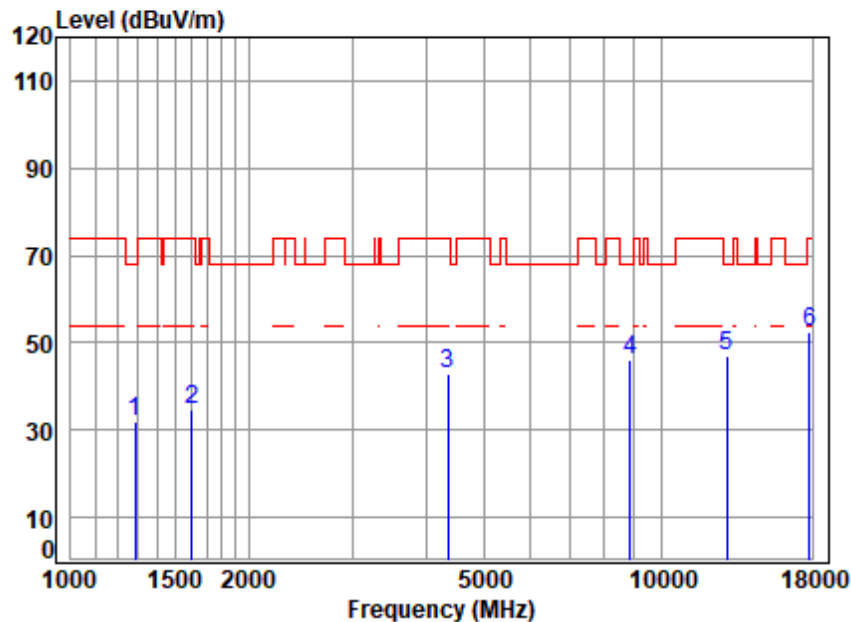

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6465 TX RSE
Note : 6E WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	3.79	24.88	61.59	64.94	32.02	68.20	-36.18	peak
2	1601.804	4.19	26.78	61.69	65.19	34.47	74.00	-39.53	peak
3	4354.454	7.08	34.44	61.50	62.94	42.96	74.00	-31.04	peak
4	8866.062	9.82	37.20	61.93	61.13	46.22	68.20	-21.98	peak
5	12930.000	12.19	38.17	62.67	59.14	46.83	68.20	-21.37	peak
6	17793.090	15.23	43.89	61.09	54.37	52.40	74.00	-21.60	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 193 of 1015

Test Mode: 07; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

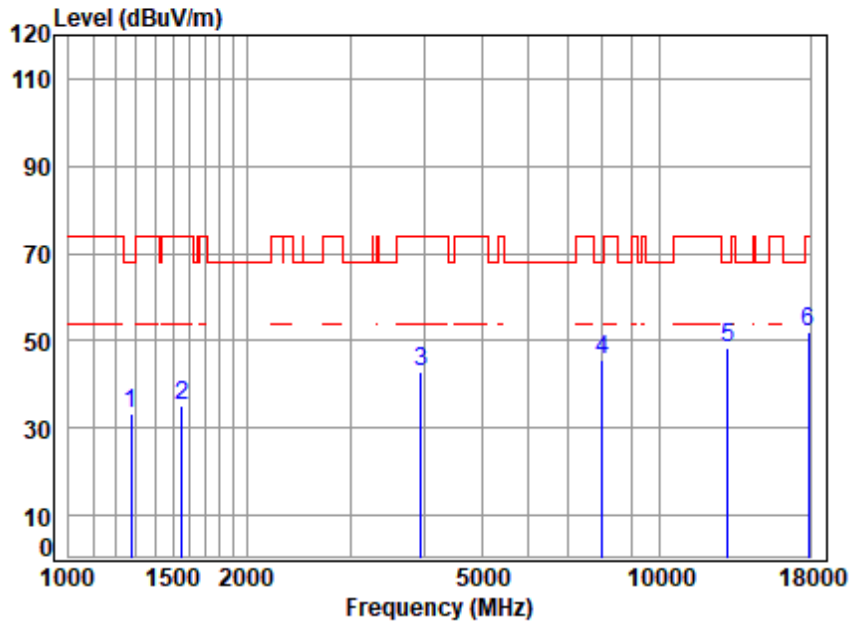

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6535 TX RSE
Note : 6E WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1274.802	3.78	24.95	61.58	66.19	33.34	68.20	-34.86	peak
2	1556.169	4.12	26.98	61.67	65.87	35.30	74.00	-38.70	peak
3	3946.885	6.64	33.52	61.18	63.88	42.86	74.00	-31.14	peak
4	8013.020	9.04	36.40	61.64	62.02	45.82	68.20	-22.38	peak
5	13070.000	12.29	38.31	62.66	60.30	48.24	68.20	-19.96	peak
6	17896.250	15.35	43.90	60.99	53.97	52.23	74.00	-21.77	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

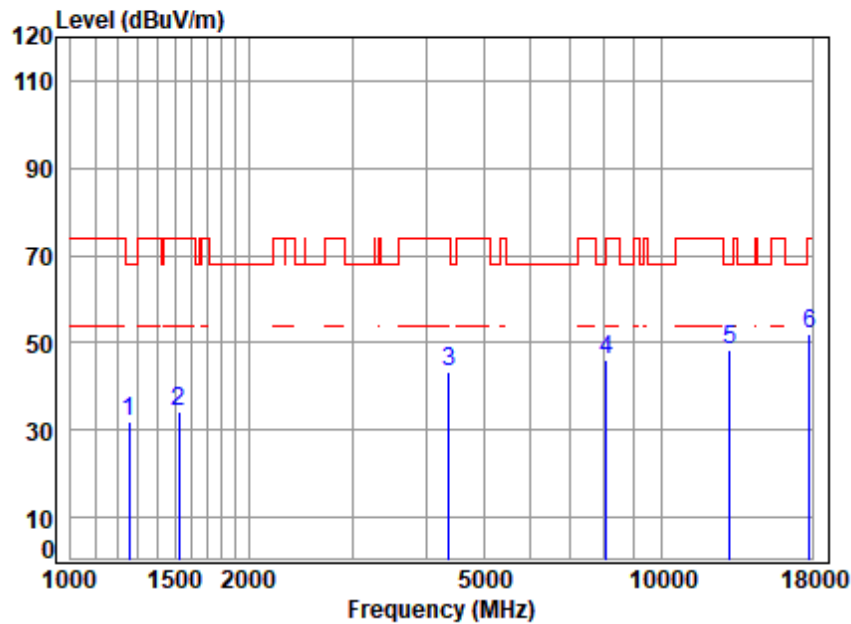


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6535 TX RSE
Note : 6E WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	3.76	25.06	61.58	64.91	32.15	68.20	-36.05	peak
2	1525.000	4.08	26.90	61.66	65.12	34.44	74.00	-39.56	peak
3	4367.058	7.10	34.54	61.51	63.18	43.31	74.00	-30.69	peak
4	8059.475	9.09	36.42	61.66	62.34	46.19	74.00	-27.81	peak
5	13070.000	12.29	38.31	62.66	60.24	48.18	68.20	-20.02	peak
6	17793.090	15.23	43.89	61.09	53.98	52.01	74.00	-21.99	peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

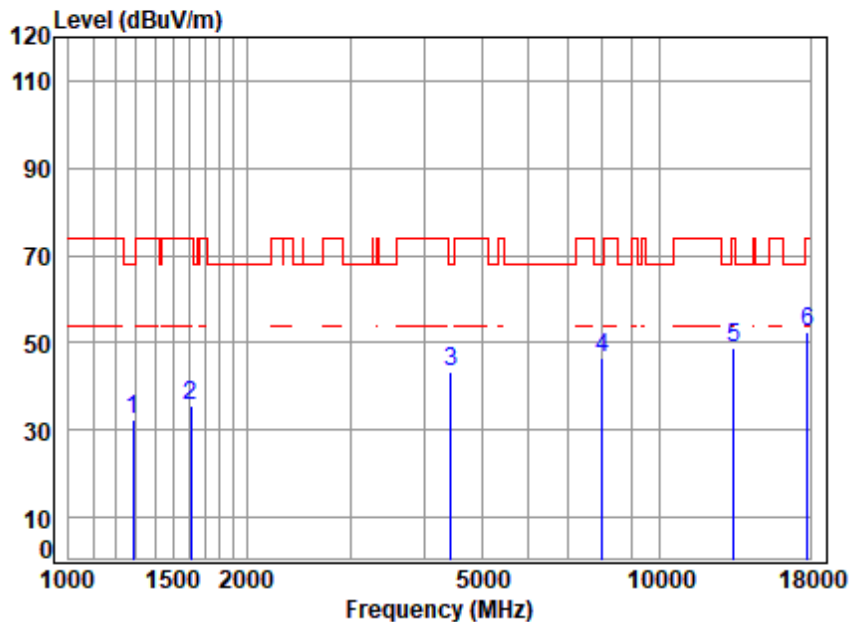


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6695 TX RSE
Note : 6E WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	3.79	24.88	61.59	65.46	32.54	68.20	-35.66	peak
2	1611.091	4.20	26.69	61.69	66.44	35.64	74.00	-38.36	peak
3	4443.453	7.19	34.28	61.58	63.35	43.24	68.20	-24.96	peak
4 p	8013.020	9.04	36.40	61.64	62.95	46.75	68.20	-21.45	peak
5	13390.000	12.63	38.78	62.64	59.85	48.62	74.00	-25.38	peak
6	17793.090	15.23	43.89	61.09	54.51	52.54	74.00	-21.46	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

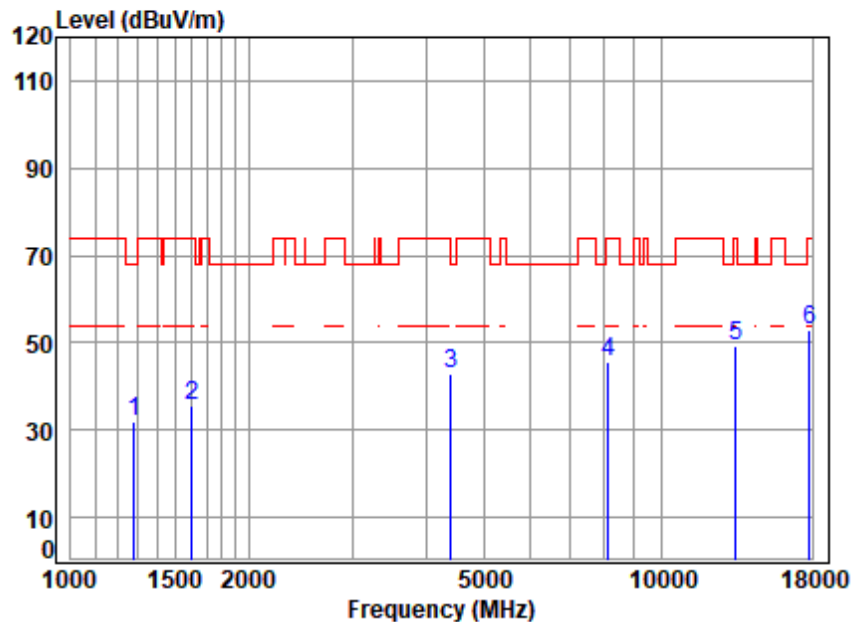


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6695 TX RSE
Note : 6E WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1282.193	3.79	24.91	61.58	64.99	32.11	68.20	-36.09 peak
2	1606.441	4.19	26.74	61.69	66.23	35.47	74.00	-38.53 peak
3	4405.090	7.14	34.74	61.55	62.46	42.79	68.20	-25.41 peak
4	8129.664	9.16	36.50	61.68	61.77	45.75	74.00	-28.25 peak
5	13390.000	12.63	38.78	62.64	60.59	49.36	74.00	-24.64 peak
6	p17793.090	15.23	43.89	61.09	54.81	52.84	74.00	-21.16 peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

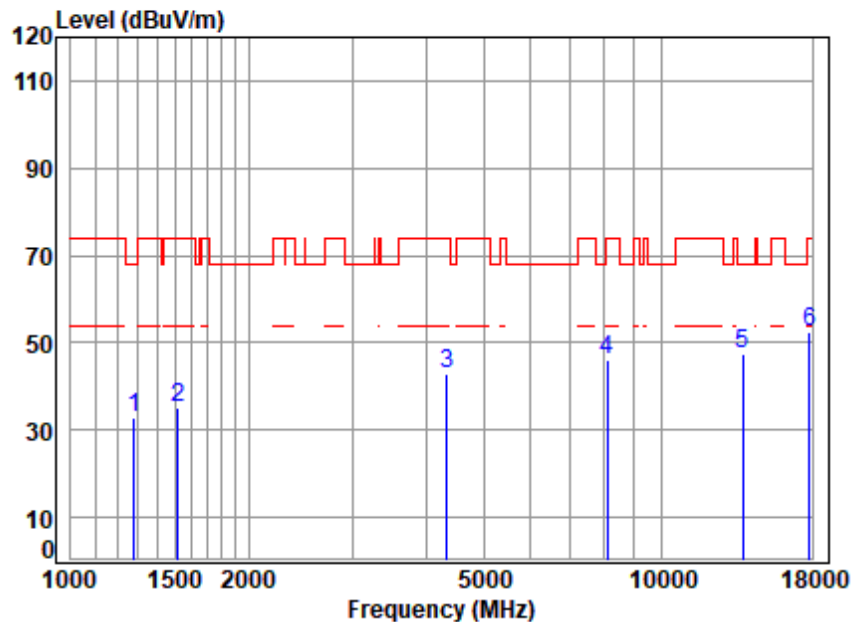


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03424AT
 Mode : 6855 TX RSE
 Note : 6E WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.79	24.91	61.58	65.82	32.94	68.20	-35.26	peak
2	1516.210	4.06	26.86	61.66	65.72	34.98	74.00	-39.02	peak
3	4341.886	7.07	34.34	61.49	62.94	42.86	74.00	-31.14	peak
4	8106.200	9.14	36.50	61.68	62.21	46.17	74.00	-27.83	peak
5	13710.000	12.87	39.12	62.63	58.17	47.53	68.20	-20.67	peak
6	17793.090	15.23	43.89	61.09	54.54	52.57	74.00	-21.43	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

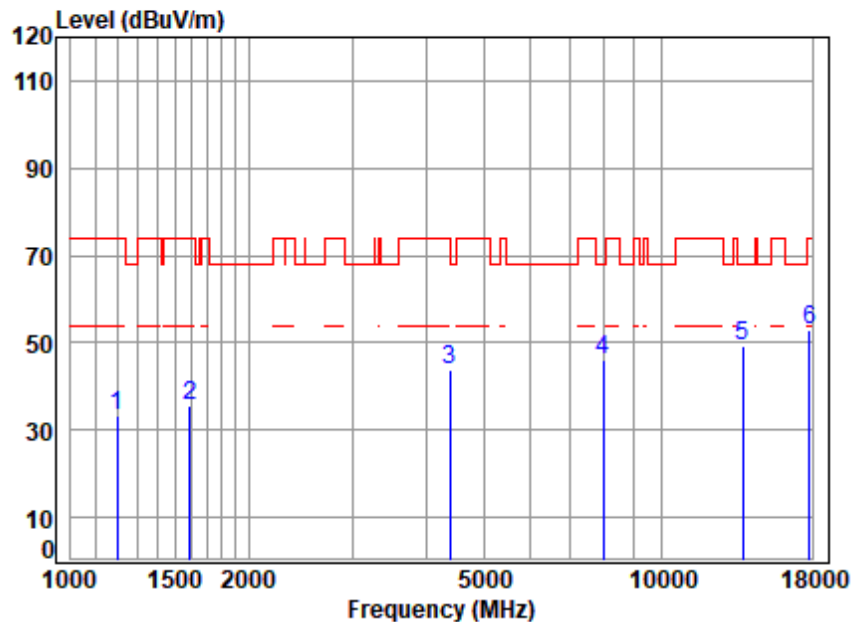


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6855 TX RSE
Note : 6E WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	3.68	24.36	61.55	66.88	33.37	74.00	-40.63	peak
2	1592.571	4.18	26.83	61.68	66.25	35.58	74.00	-38.42	peak
3	4392.376	7.13	34.74	61.53	63.27	43.61	74.00	-30.39	peak
4	7989.893	9.02	36.40	61.64	62.10	45.88	68.20	-22.32	peak
5	13710.000	12.87	39.12	62.63	60.04	49.40	68.20	-18.80	peak
6	17793.090	15.23	43.89	61.09	54.90	52.93	74.00	-21.07	peak



Test Mode: 07; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: Low

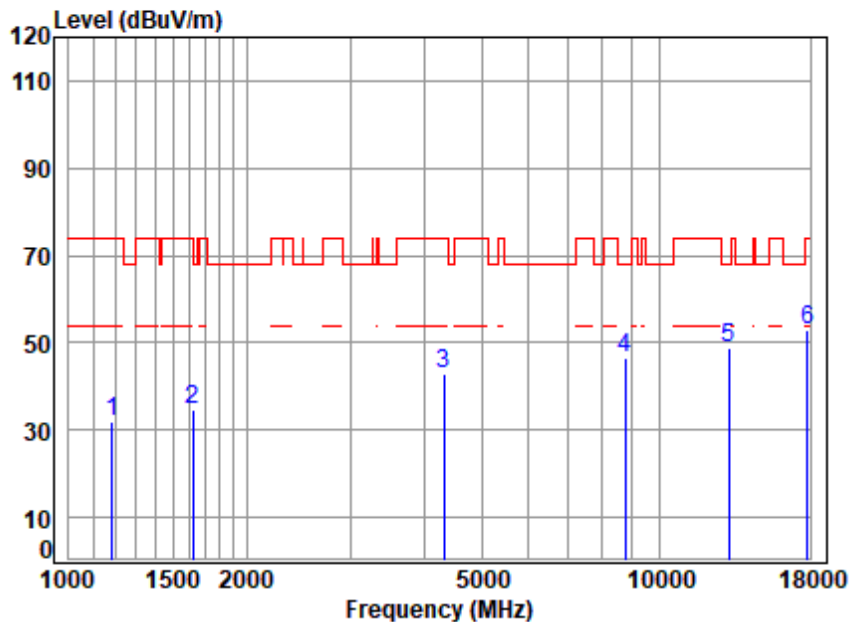


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6565 TX RSE
Note : 6E WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1185.936	3.66	24.26	61.55	65.65	32.02	74.00	-41.98	peak
2	1620.431	4.21	26.60	61.69	65.35	34.47	74.00	-39.53	peak
3	4316.859	7.04	34.13	61.47	63.03	42.73	74.00	-31.27	peak
4	8738.852	9.72	36.90	61.89	61.94	46.67	68.20	-21.53	peak
5	13130.000	12.35	38.46	62.66	60.65	48.80	68.20	-19.40	peak
6	17844.590	15.29	43.90	61.04	54.61	52.76	74.00	-21.24	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

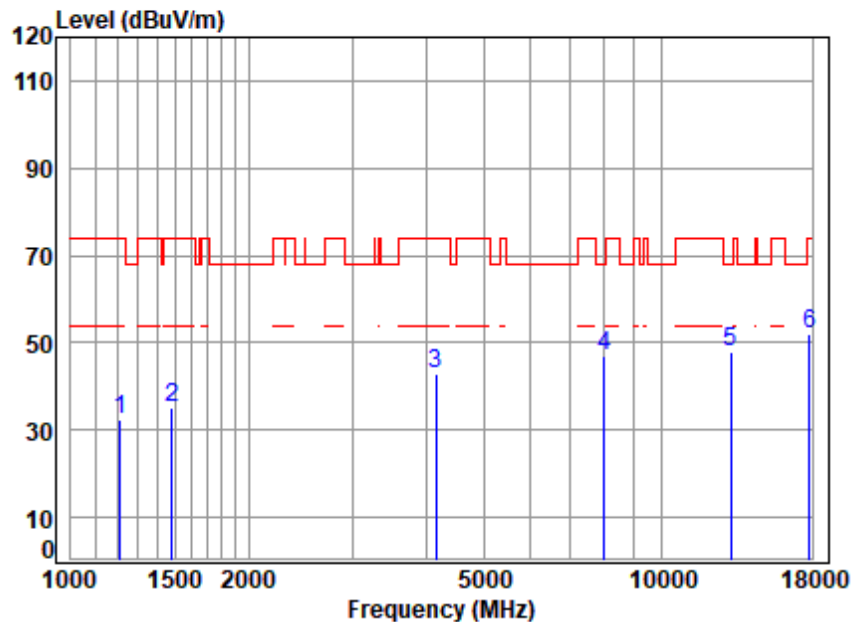

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6565 TX RSE
Note : 6E WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1213.677	3.70	24.59	61.56	65.84	32.57	74.00	-41.43	peak
2	1485.841	4.02	26.40	61.65	66.37	35.14	74.00	-38.86	peak
3	4157.664	6.85	33.80	61.32	63.61	42.94	74.00	-31.06	peak
4	8013.020	9.04	36.40	61.64	63.29	47.09	68.20	-21.11	peak
5	13130.000	12.35	38.46	62.66	59.62	47.77	68.20	-20.43	peak
6	17793.090	15.23	43.89	61.09	54.21	52.24	74.00	-21.76	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 201 of 1015

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:middle

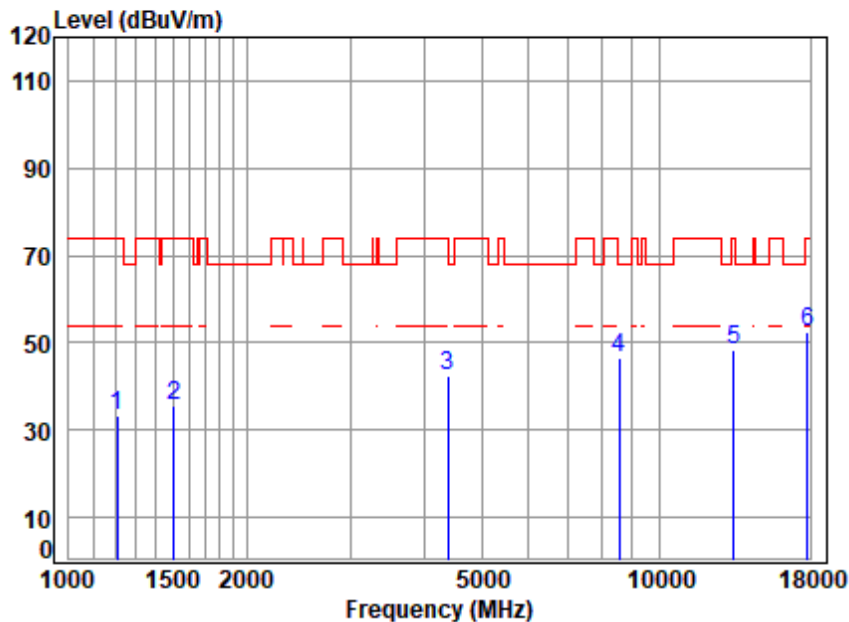

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6685 TX RSE
Note : 6E WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1206.682	3.69	24.49	61.56	66.58	33.20	74.00	-40.80	peak
2	1507.470	4.05	26.83	61.66	66.30	35.52	74.00	-38.48	peak
3	4392.376	7.13	34.74	61.53	62.32	42.66	74.00	-31.34	peak
4	8563.818	9.58	36.83	61.83	61.81	46.39	68.20	-21.81	peak
5	13370.000	12.61	38.74	62.65	59.87	48.57	74.00	-25.43	peak
6	p17793.090	15.23	43.89	61.09	54.31	52.34	74.00	-21.66	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:middle

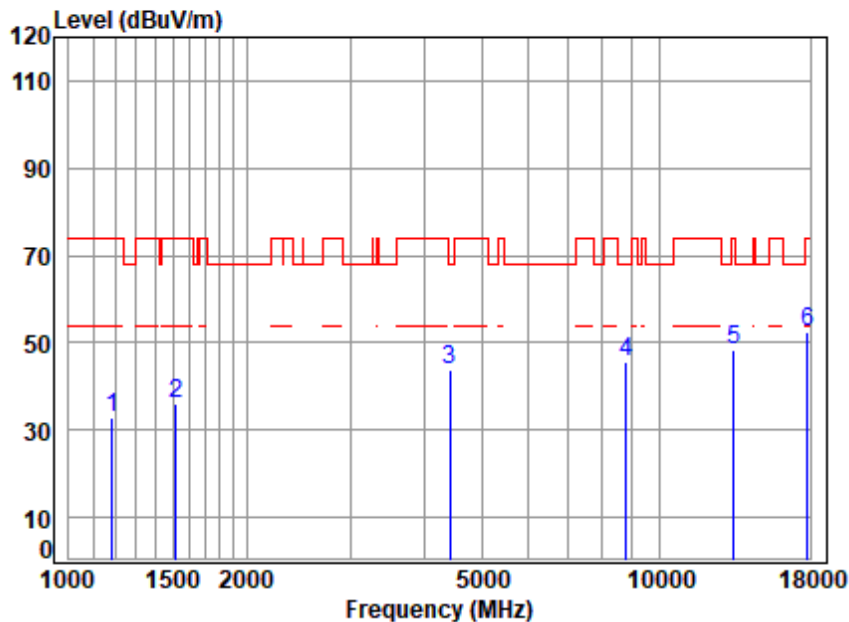

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6685 TX RSE
Note : 6E WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1182.513	3.66	24.23	61.55	66.58	32.92	74.00	-41.08	peak
2	1516.210	4.06	26.86	61.66	66.68	35.94	74.00	-38.06	peak
3	4417.841	7.16	34.59	61.56	63.51	43.70	68.20	-24.50	peak
4	8789.516	9.76	37.06	61.90	60.62	45.54	68.20	-22.66	peak
5	13370.000	12.61	38.74	62.65	59.71	48.41	74.00	-25.59	peak
6	p17793.090	15.23	43.89	61.09	54.50	52.53	74.00	-21.47	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 203 of 1015

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

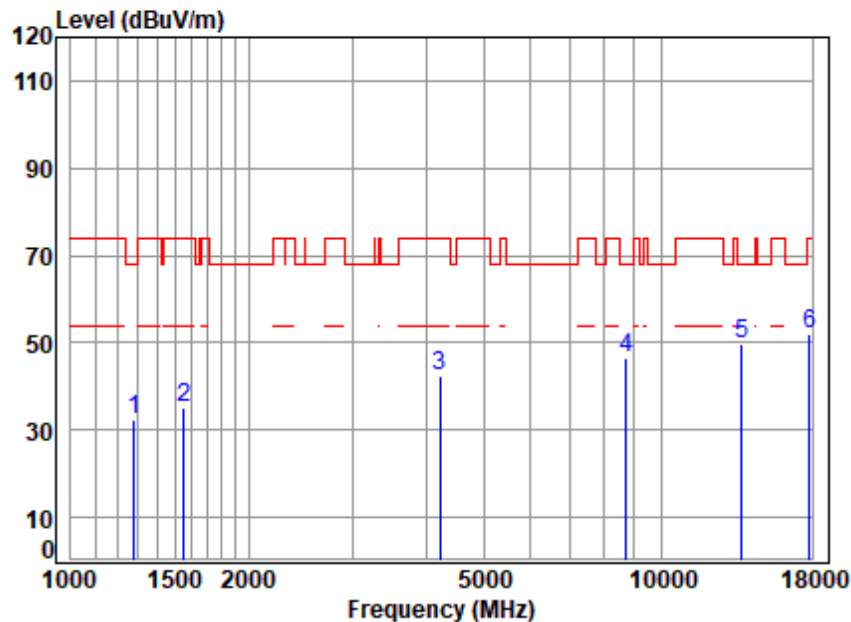

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6845 TX RSE
Note : 6E WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1278.492	3.78	24.93	61.58	65.41	32.54	68.20	-35.66	peak
2	1556.169	4.12	26.98	61.67	65.68	35.11	74.00	-38.89	peak
3	4218.186	6.92	33.80	61.38	63.20	42.54	74.00	-31.46	peak
4	8713.630	9.70	36.90	61.88	61.74	46.46	68.20	-21.74	peak
5	13690.000	12.86	39.08	62.63	60.20	49.51	68.20	-18.69	peak
6	17844.590	15.29	43.90	61.04	53.88	52.03	74.00	-21.97	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

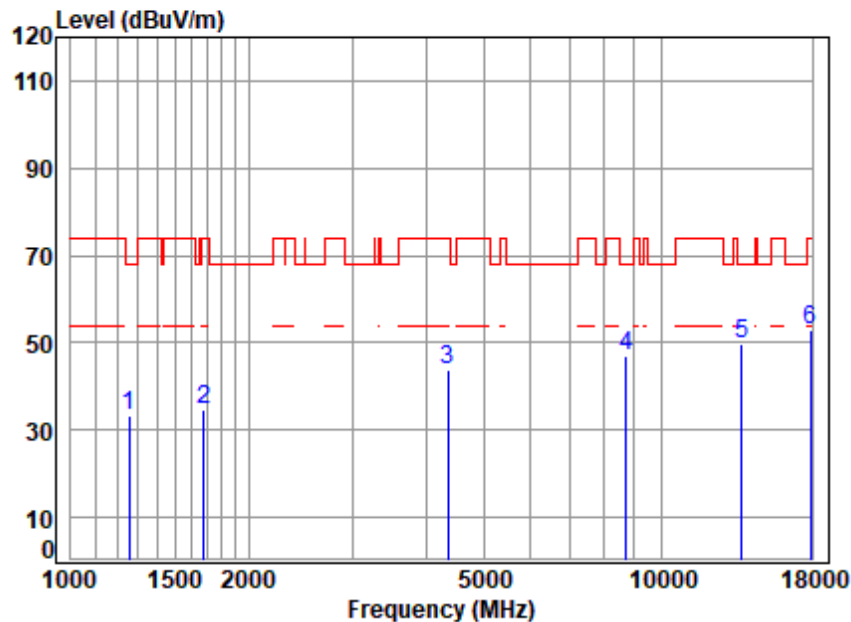


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6845 TX RSE
Note : 6E WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	3.76	25.06	61.58	65.93	33.17	68.20	-35.03	peak
2	1682.477	4.30	26.24	61.71	66.00	34.83	74.00	-39.17	peak
3	4354.454	7.08	34.44	61.50	63.69	43.71	74.00	-30.29	peak
4	8713.630	9.70	36.90	61.88	62.13	46.85	68.20	-21.35	peak
5	13690.000	12.86	39.08	62.63	60.53	49.84	68.20	-18.36	peak
6	17896.250	15.35	43.90	60.99	54.78	53.04	74.00	-20.96	peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:Low

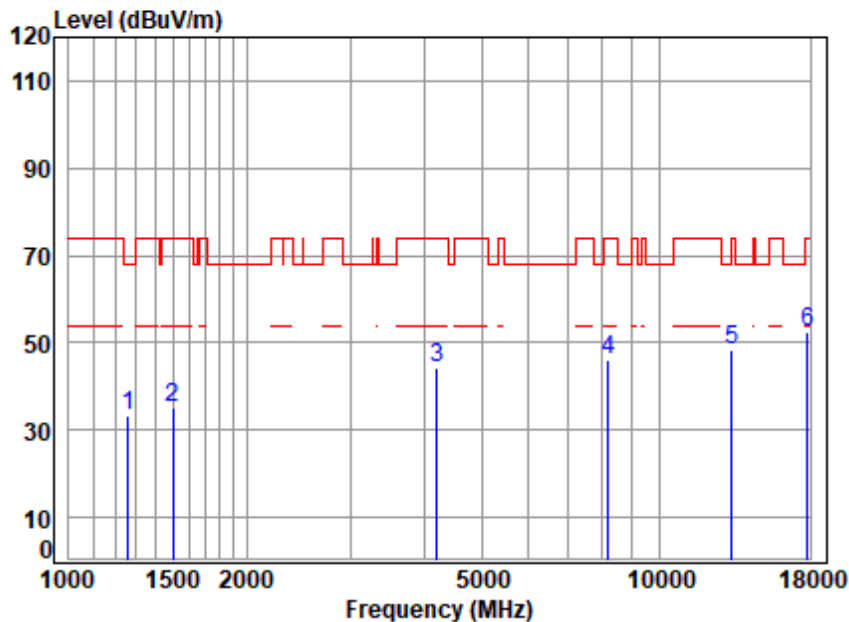


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6625 TX RSE
Note : 6E WIFI 11AX80

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1260.149	3.76	25.04	61.58	66.26	33.48	68.20	-34.72 peak
2	1498.781	4.04	26.77	61.66	65.77	34.92	74.00	-39.08 peak
3	4206.011	6.91	33.80	61.37	64.94	44.28	74.00	-29.72 peak
4	8200.463	9.23	36.60	61.71	62.08	46.20	74.00	-27.80 peak
5	13250.000	12.48	38.60	62.65	60.14	48.57	68.20	-19.63 peak
6	17793.090	15.23	43.89	61.09	54.47	52.50	74.00	-21.50 peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:Low

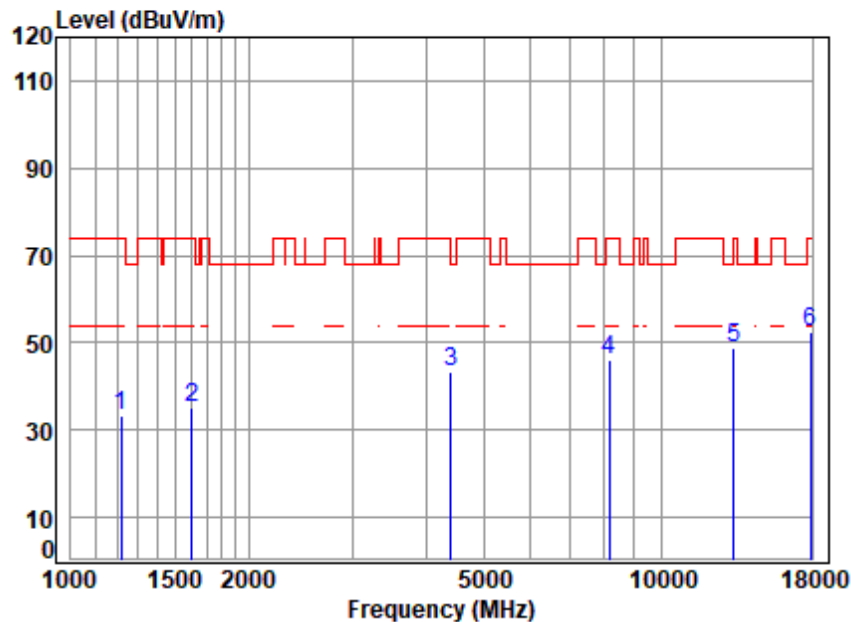

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6625 TX RSE
Note : 6E WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1217.190	3.71	24.64	61.56	66.33	33.12	74.00	-40.88	peak
2	1601.804	4.19	26.78	61.69	65.76	35.04	74.00	-38.96	peak
3	4405.090	7.14	34.74	61.55	62.98	43.31	68.20	-24.89	peak
4	8153.195	9.19	36.51	61.69	62.01	46.02	74.00	-27.98	peak
5	13250.000	12.48	38.60	62.65	60.17	48.60	68.20	-19.60	peak
6	17896.250	15.35	43.90	60.99	54.23	52.49	74.00	-21.51	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 207 of 1015

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

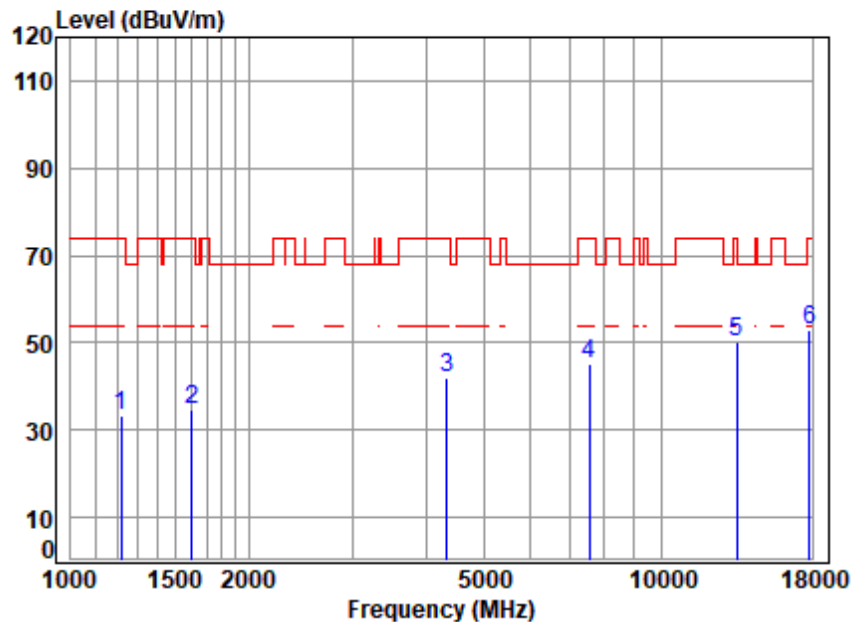

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6705 TX RSE
Note : 6E WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1217.190	3.71	24.64	61.56	66.41	33.20	74.00	-40.80	peak
2	1601.804	4.19	26.78	61.69	65.34	34.62	74.00	-39.38	peak
3	4329.354	7.05	34.23	61.48	62.39	42.19	74.00	-31.81	peak
4	7541.114	8.45	36.10	61.87	62.61	45.29	74.00	-28.71	peak
5	13410.000	12.65	38.80	62.64	61.37	50.18	68.20	-18.02	peak
6	17793.090	15.23	43.89	61.09	54.73	52.76	74.00	-21.24	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

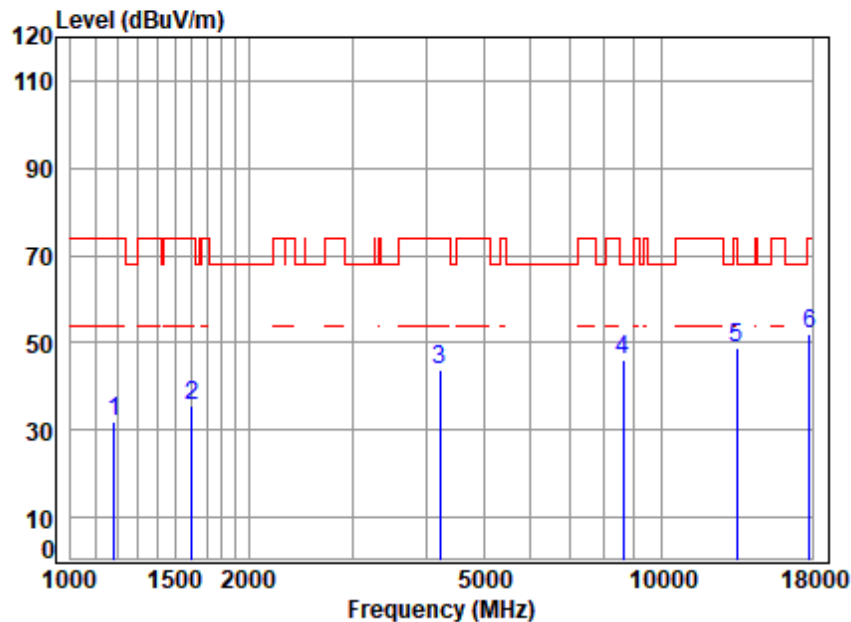

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6705 TX RSE
Note : 6E WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1182.513	3.66	24.23	61.55	65.79	32.13	74.00	-41.87	peak
2	1601.804	4.19	26.78	61.69	66.48	35.76	74.00	-38.24	peak
3	4218.186	6.92	33.80	61.38	64.27	43.61	74.00	-30.39	peak
4	8613.468	9.62	36.90	61.85	61.48	46.15	68.20	-22.05	peak
5	13410.000	12.65	38.80	62.64	59.82	48.63	68.20	-19.57	peak
6	17844.590	15.29	43.90	61.04	53.88	52.03	74.00	-21.97	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 209 of 1015

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:High

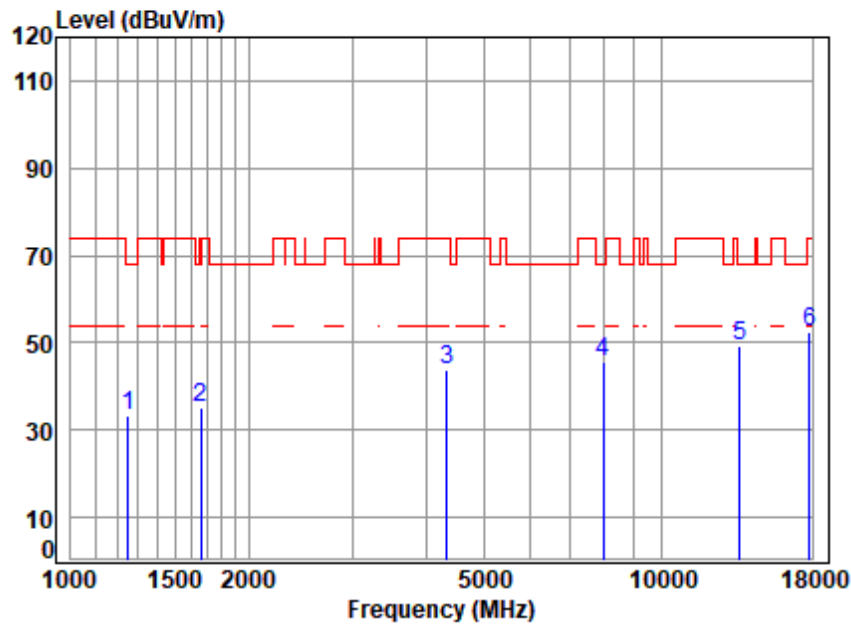

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03424AT
 Mode : 6785 TX RSE
 Note : 6E WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1252.885	3.75	25.08	61.57	65.83	33.09	68.20	-35.11	peak
2	1663.137	4.27	26.27	61.70	66.46	35.30	74.00	-38.70	peak
3	4329.354	7.05	34.23	61.48	63.77	43.57	74.00	-30.43	peak
4	7989.893	9.02	36.40	61.64	61.95	45.73	68.20	-22.47	peak
5	13570.000	12.79	38.87	62.63	60.23	49.26	68.20	-18.94	peak
6	17844.590	15.29	43.90	61.04	54.28	52.43	74.00	-21.57	peak




SGS-CSTC Standards Technical Services Co., Ltd.
 Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:High

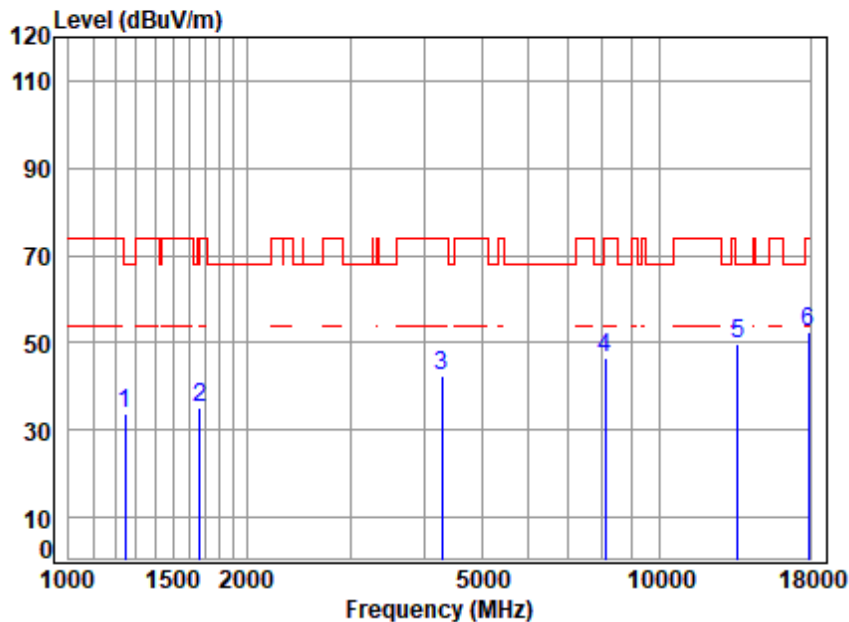


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03424AT
 Mode : 6785 TX RSE
 Note : 6E WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.74	25.04	61.57	66.49	33.70	68.20	-34.50	peak
2	1667.951	4.28	26.26	61.71	66.10	34.93	74.00	-39.07	peak
3	4279.589	6.99	33.92	61.43	63.13	42.61	74.00	-31.39	peak
4	8106.200	9.14	36.50	61.68	62.45	46.41	74.00	-27.59	peak
5	13570.000	12.79	38.87	62.63	60.62	49.65	68.20	-18.55	peak
6	17896.250	15.35	43.90	60.99	54.25	52.51	74.00	-21.49	peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:160MHz;

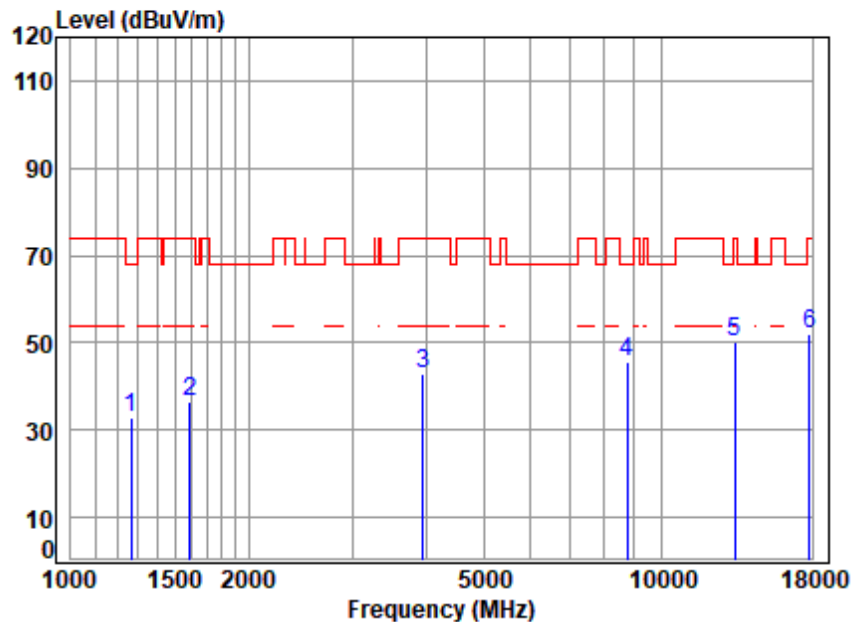


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6665 TX RSE
Note : 6E WIFI 11AX160

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	3.77	25.00	61.58	65.77	32.96	68.20	-35.24	peak
2	1592.571	4.18	26.83	61.68	67.26	36.59	74.00	-37.41	peak
3	3946.885	6.64	33.52	61.18	64.06	43.04	74.00	-30.96	peak
4	8738.852	9.72	36.90	61.89	61.03	45.76	68.20	-22.44	peak
5	13330.000	12.57	38.66	62.65	61.75	50.33	74.00	-23.67	peak
6	p17793.090	15.23	43.89	61.09	54.18	52.21	74.00	-21.79	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:160MHz;

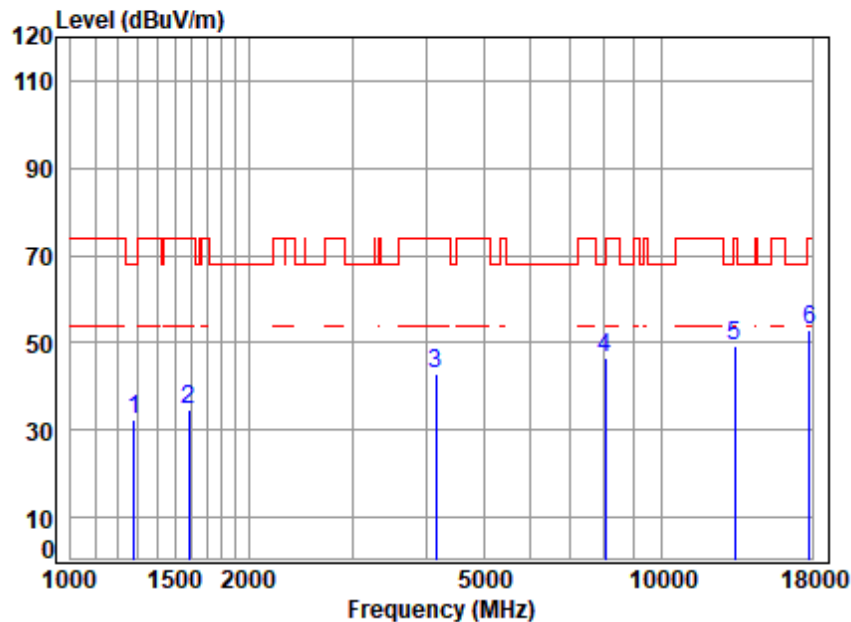


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6665 TX RSE
Note : 6E WIFI 11AX160

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.79	24.91	61.58	65.29	32.41	68.20	-35.79	peak
2	1587.975	4.17	26.85	61.68	65.35	34.69	74.00	-39.31	peak
3	4157.664	6.85	33.80	61.32	63.39	42.72	74.00	-31.28	peak
4	8036.214	9.07	36.40	61.65	62.61	46.43	74.00	-27.57	peak
5	13330.000	12.57	38.66	62.65	60.63	49.21	74.00	-24.79	peak
6	p17844.590	15.29	43.90	61.04	54.65	52.80	74.00	-21.20	peak



Test Mode: 08; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

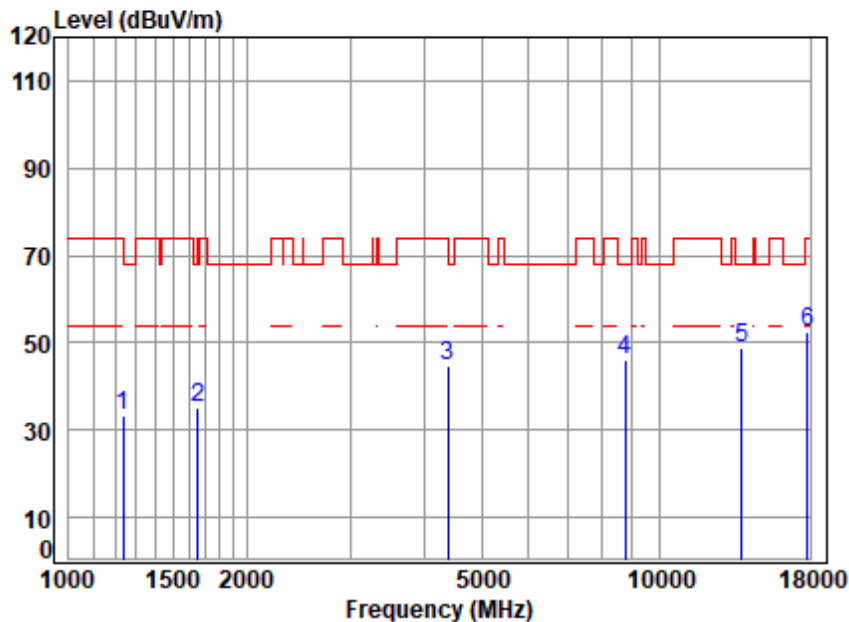


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03424AT
 Mode : 6895 TX RSE
 Note : 6E WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1234.909	3.73	24.89	61.57	66.04	33.09	74.00	-40.91	peak
2	1653.550	4.26	26.29	61.70	66.18	35.03	68.20	-33.17	peak
3	4379.699	7.11	34.64	61.52	64.52	44.75	74.00	-29.25	peak
4	8738.852	9.72	36.90	61.89	61.40	46.13	68.20	-22.07	peak
5	13790.000	12.92	39.28	62.62	59.15	48.73	68.20	-19.47	peak
6	17793.090	15.23	43.89	61.09	54.57	52.60	74.00	-21.40	peak



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

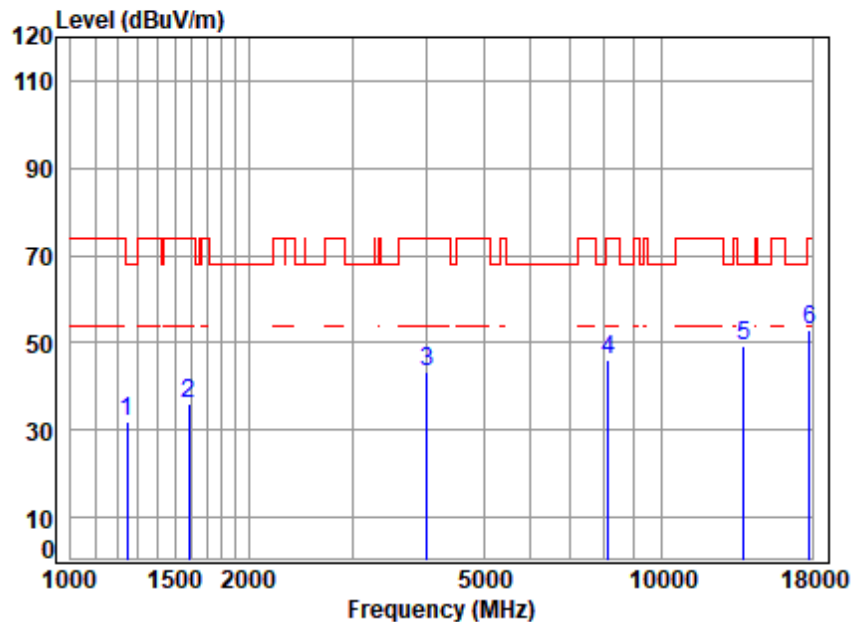

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6895 TX RSE
Note : 6E WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1245.663	3.74	25.04	61.57	64.64	31.85	68.20	-36.35 peak
2	1583.392	4.16	26.87	61.68	66.63	35.98	74.00	-38.02 peak
3	4015.929	6.67	32.84	61.19	64.97	43.29	74.00	-30.71 peak
4	8129.664	9.16	36.50	61.68	62.15	46.13	74.00	-27.87 peak
5	13790.000	12.92	39.28	62.62	59.50	49.08	68.20	-19.12 peak
6	17793.090	15.23	43.89	61.09	54.76	52.79	74.00	-21.21 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 215 of 1015

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

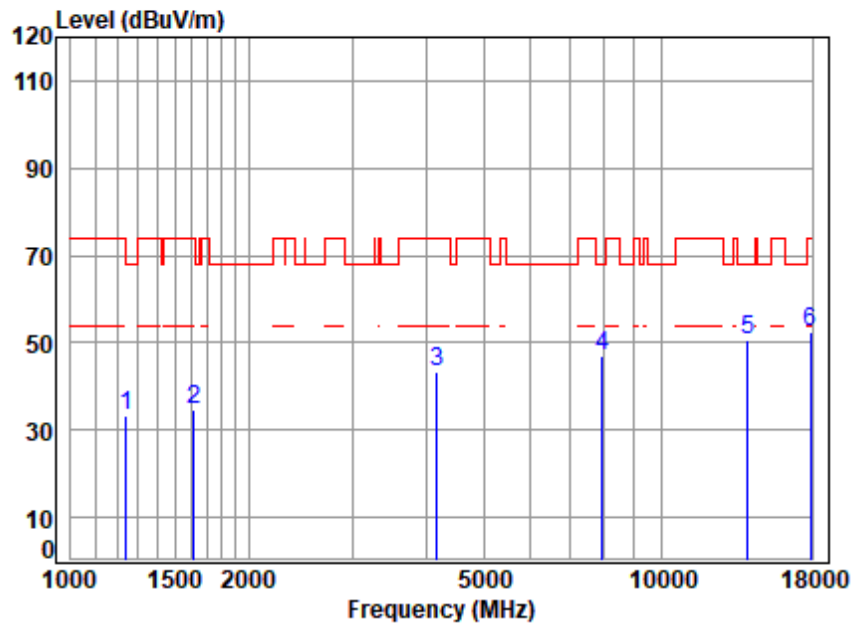

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6995 TX RSE
Note : 6E WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	3.74	24.99	61.57	66.03	33.19	68.20	-35.01	peak
2	1615.754	4.21	26.64	61.69	65.29	34.45	74.00	-39.55	peak
3	4169.698	6.86	33.80	61.33	64.03	43.36	74.00	-30.64	peak
4	7943.838	8.96	36.41	61.67	63.48	47.18	68.20	-21.02	peak
5	13990.000	13.03	39.68	62.61	60.50	50.60	68.20	-17.60	peak
6	17896.250	15.35	43.90	60.99	54.41	52.67	74.00	-21.33	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

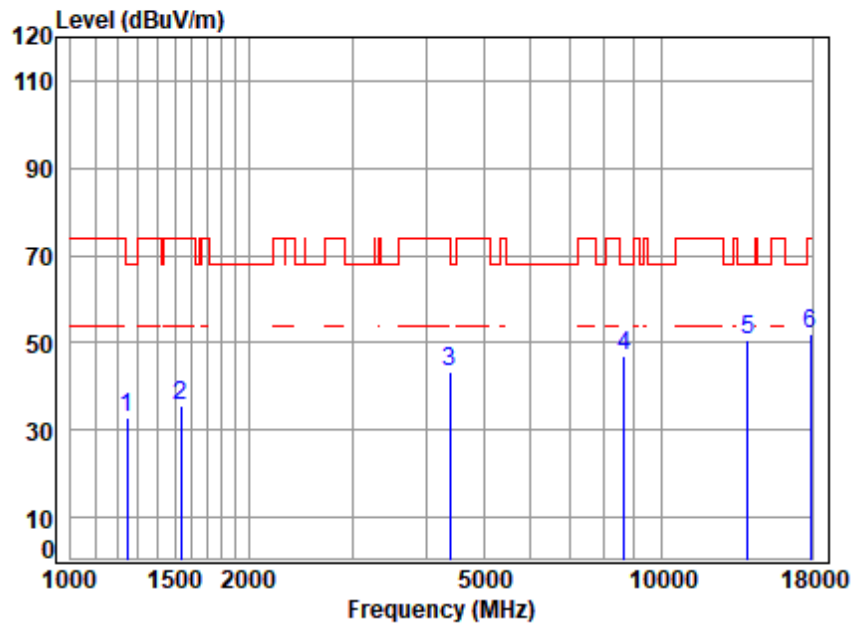

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6995 TX RSE
Note : 6E WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	3.74	25.04	61.57	65.77	32.98	68.20	-35.22	peak
2	1533.841	4.09	26.94	61.67	66.21	35.57	74.00	-38.43	peak
3	4379.699	7.11	34.64	61.52	62.94	43.17	74.00	-30.83	peak
4	8663.404	9.66	36.90	61.86	62.08	46.78	68.20	-21.42	peak
5	13990.000	13.03	39.68	62.61	60.38	50.48	68.20	-17.72	peak
6	17896.250	15.35	43.90	60.99	53.78	52.04	74.00	-21.96	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 217 of 1015

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

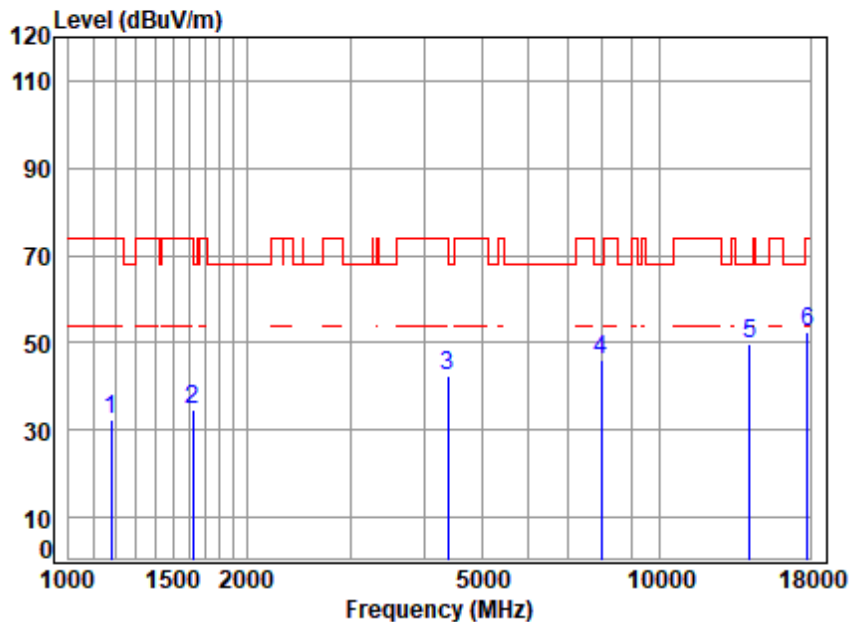

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 7115 TX RSE
Note : 6E WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1179.100	3.65	24.19	61.55	66.20	32.49	74.00	-41.51	peak
2	1625.121	4.22	26.55	61.69	65.69	34.77	74.00	-39.23	peak
3	4379.699	7.11	34.64	61.52	62.17	42.40	74.00	-31.60	peak
4	7989.893	9.02	36.40	61.64	62.13	45.91	68.20	-22.29	peak
5	14230.000	13.02	39.89	62.65	59.47	49.73	68.20	-18.47	peak
6	17793.090	15.23	43.89	61.09	54.67	52.70	74.00	-21.30	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

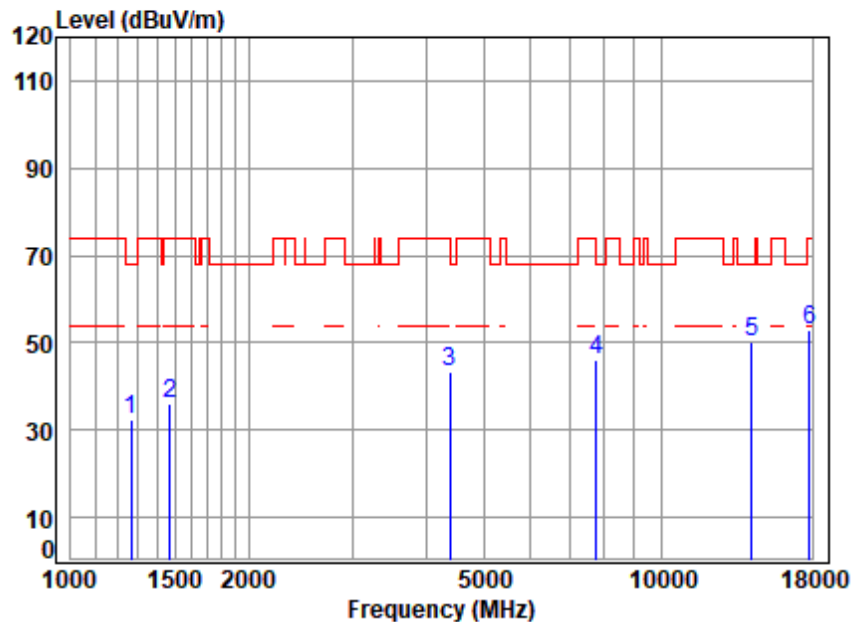


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 7115 TX RSE
Note : 6E WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	3.77	25.00	61.58	65.39	32.58	68.20	-35.62	peak
2	1473.013	4.01	26.04	61.65	67.73	36.13	74.00	-37.87	peak
3	4379.699	7.11	34.64	61.52	63.18	43.41	74.00	-30.59	peak
4	7762.260	8.74	36.25	61.76	62.71	45.94	68.20	-22.26	peak
5	14230.000	13.02	39.89	62.65	59.71	49.97	68.20	-18.23	peak
6	17793.090	15.23	43.89	61.09	54.81	52.84	74.00	-21.16	peak



Test Mode: 08; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: Low

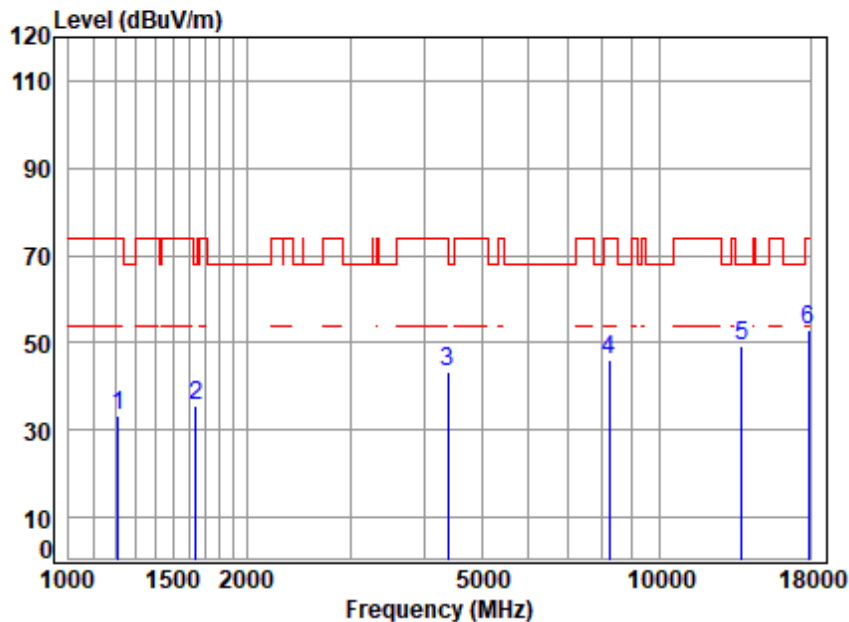


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6885 TX RSE
Note : 6E WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1213.677	3.70	24.59	61.56	66.37	33.10	74.00	-40.90	peak
2	1644.019	4.25	26.36	61.70	66.82	35.73	68.20	-32.47	peak
3	4392.376	7.13	34.74	61.53	63.07	43.41	74.00	-30.59	peak
4	8224.200	9.26	36.65	61.72	62.03	46.22	74.00	-27.78	peak
5	13770.000	12.91	39.24	62.62	59.66	49.19	68.20	-19.01	peak
6	17896.250	15.35	43.90	60.99	54.61	52.87	74.00	-21.13	peak



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

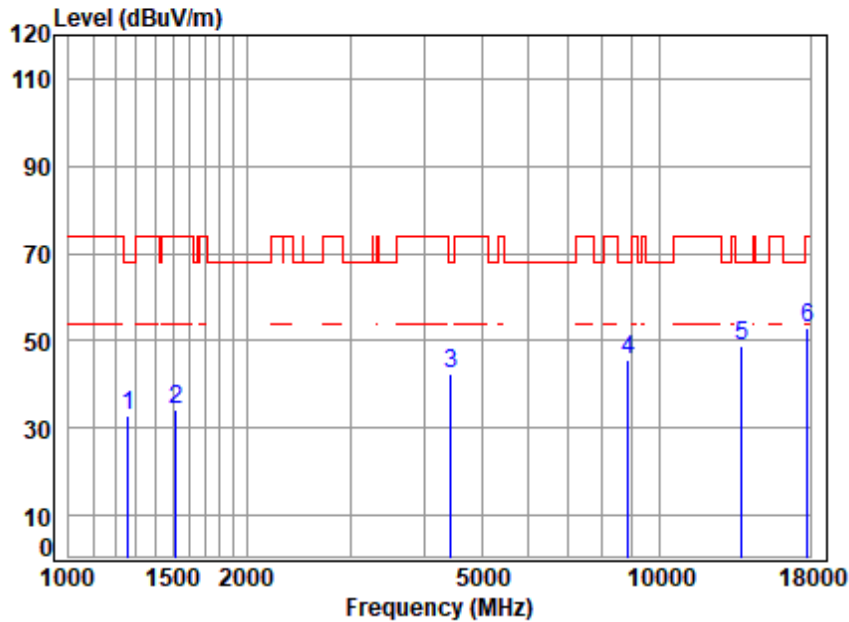

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6885 TX RSE
Note : 6E WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1260.149	3.76	25.04	61.58	65.54	32.76	68.20	-35.44	peak
2	1516.210	4.06	26.86	61.66	64.87	34.13	74.00	-39.87	peak
3	4443.453	7.19	34.28	61.58	62.63	42.52	68.20	-25.68	peak
4	8866.062	9.82	37.20	61.93	60.71	45.80	68.20	-22.40	peak
5	13770.000	12.91	39.24	62.62	59.49	49.02	68.20	-19.18	peak
6	17844.590	15.29	43.90	61.04	54.73	52.88	74.00	-21.12	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 221 of 1015

Test Mode: 08; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: middle

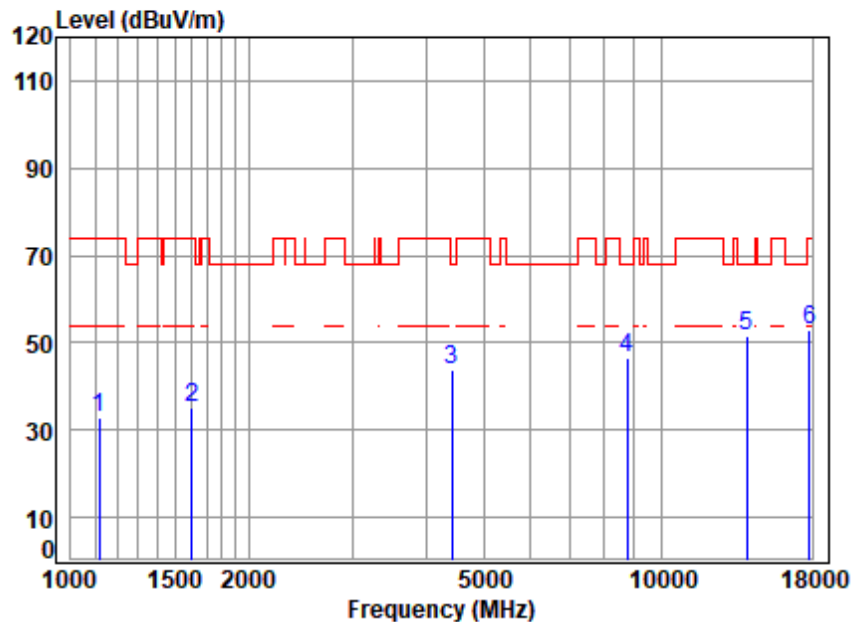

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6965 TX RSE
Note : 6E WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1119.323	3.57	23.78	61.52	67.09	32.92	74.00	-41.08	peak
2	1601.804	4.19	26.78	61.69	65.93	35.21	74.00	-38.79	peak
3	4417.841	7.16	34.59	61.56	63.65	43.84	68.20	-24.36	peak
4	8738.852	9.72	36.90	61.89	61.61	46.34	68.20	-21.86	peak
5	13930.000	13.00	39.56	62.61	61.73	51.68	68.20	-16.52	peak
6	17844.590	15.29	43.90	61.04	54.92	53.07	74.00	-20.93	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:middle

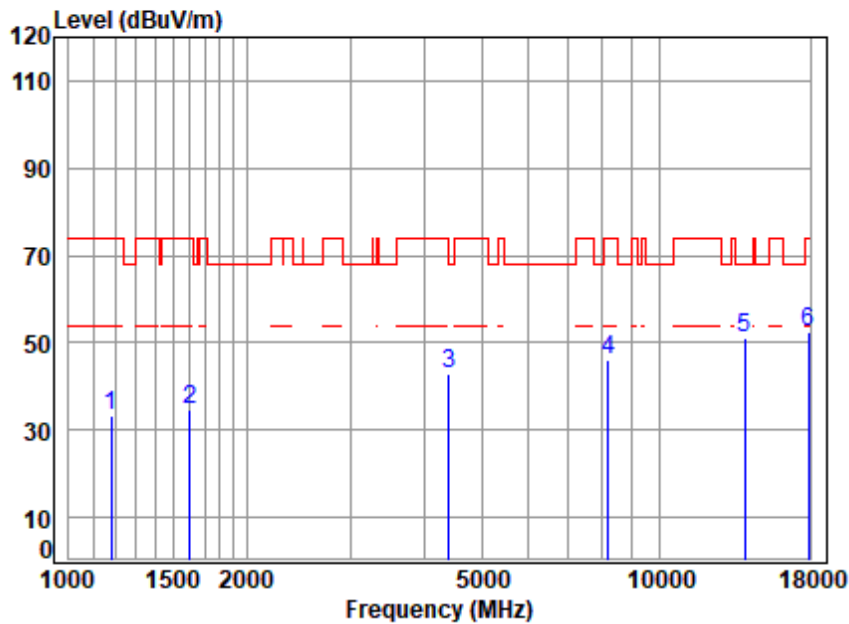


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6965 TX RSE
Note : 6E WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1179.100	3.65	24.19	61.55	66.98	33.27	74.00	-40.73	peak
2	1606.441	4.19	26.74	61.69	65.34	34.58	74.00	-39.42	peak
3	4405.090	7.14	34.74	61.55	62.58	42.91	68.20	-25.29	peak
4	8200.463	9.23	36.60	61.71	61.98	46.10	74.00	-27.90	peak
5	13930.000	13.00	39.56	62.61	60.99	50.94	68.20	-17.26	peak
6	17896.250	15.35	43.90	60.99	54.00	52.26	74.00	-21.74	peak



Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

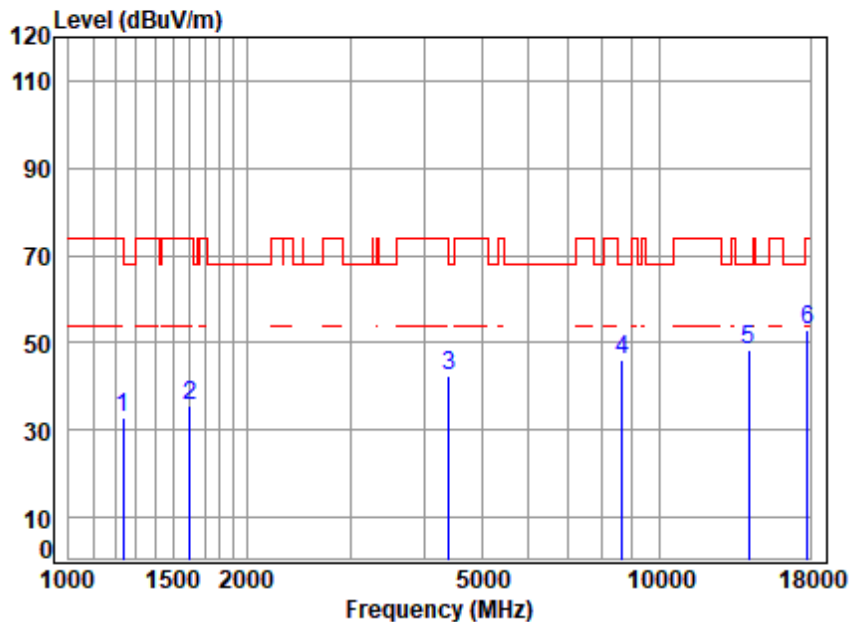


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 7085 TX RSE
Note : 6E WIFI 11AX40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	3.73	24.94	61.57	65.93	33.03	74.00	-40.97	peak
2	1606.441	4.19	26.74	61.69	66.38	35.62	74.00	-38.38	peak
3	4405.090	7.14	34.74	61.55	62.24	42.57	68.20	-25.63	peak
4	8638.399	9.64	36.90	61.85	61.33	46.02	68.20	-22.18	peak
5	14170.000	13.02	39.80	62.64	57.98	48.16	68.20	-20.04	peak
6	17793.090	15.23	43.89	61.09	55.05	53.08	74.00	-20.92	peak



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

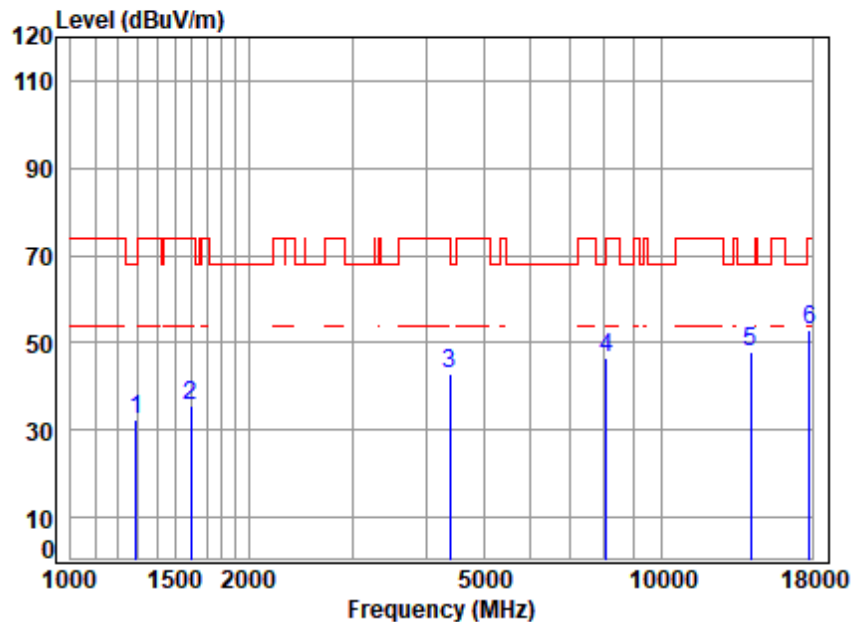


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 7085 TX RSE
Note : 6E WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.80	24.86	61.59	65.27	32.34	68.20	-35.86	peak
2	1597.181	4.18	26.81	61.69	66.19	35.49	74.00	-38.51	peak
3	4392.376	7.13	34.74	61.53	62.68	43.02	74.00	-30.98	peak
4	8059.475	9.09	36.42	61.66	62.53	46.38	74.00	-27.62	peak
5	14170.000	13.02	39.80	62.64	57.95	48.13	68.20	-20.07	peak
6	17793.090	15.23	43.89	61.09	54.93	52.96	74.00	-21.04	peak



Test Mode: 08; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 80MHz; Channel: Low

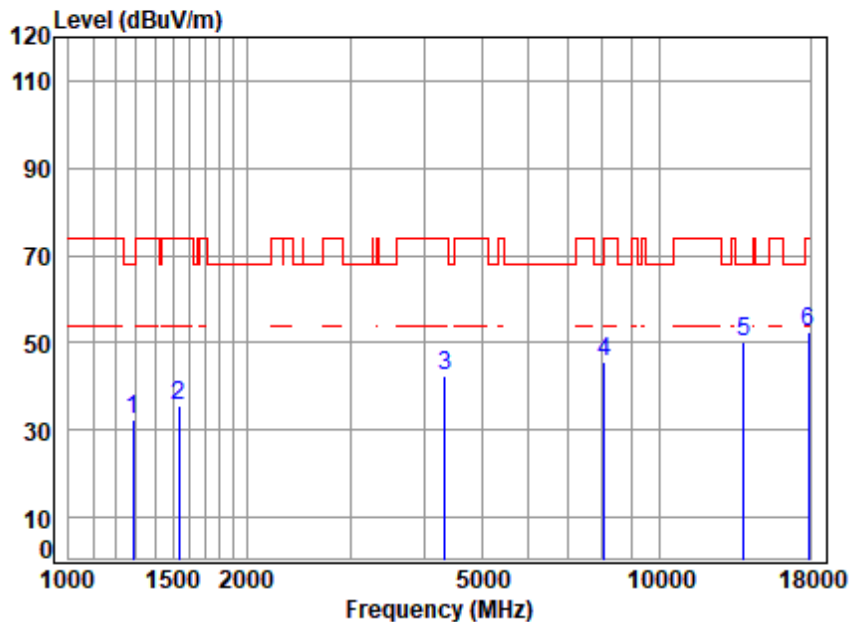


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6945 TX RSE
Note : 6E WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	3.79	24.88	61.59	65.48	32.56	68.20	-35.64	peak
2	1538.281	4.10	26.95	61.67	66.05	35.43	74.00	-38.57	peak
3	4341.886	7.07	34.34	61.49	62.61	42.53	74.00	-31.47	peak
4	8082.804	9.11	36.47	61.67	61.84	45.75	74.00	-28.25	peak
5	13890.000	12.98	39.48	62.62	60.43	50.27	68.20	-17.93	peak
6	17896.250	15.35	43.90	60.99	54.03	52.29	74.00	-21.71	peak



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:Low

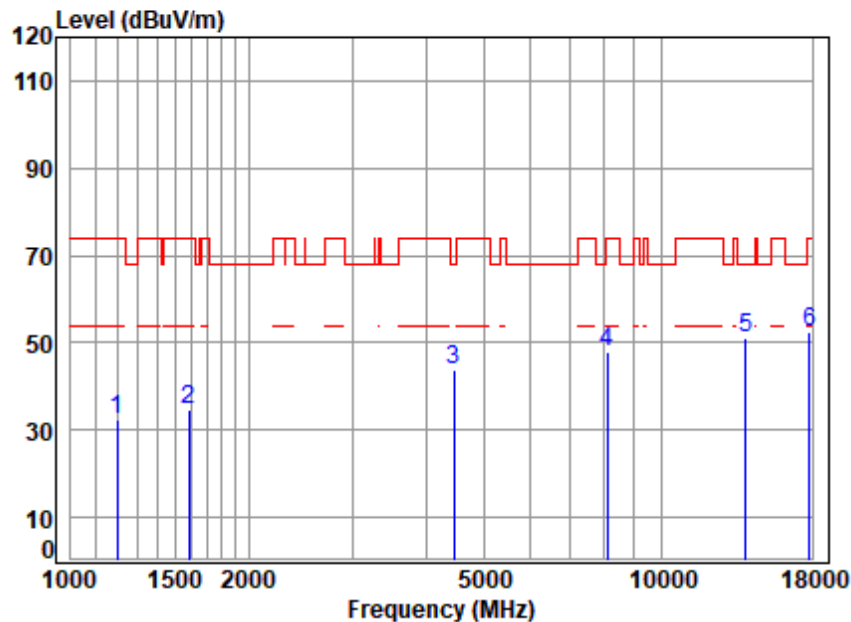

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6945 TX RSE
Note : 6E WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	3.68	24.36	61.55	65.96	32.45	74.00	-41.55	peak
2	1587.975	4.17	26.85	61.68	65.41	34.75	74.00	-39.25	peak
3	4456.315	7.20	34.12	61.59	64.00	43.73	68.20	-24.47	peak
4	8106.200	9.14	36.50	61.68	63.85	47.81	74.00	-26.19	peak
5	13890.000	12.98	39.48	62.62	61.17	51.01	68.20	-17.19	peak
6	17844.590	15.29	43.90	61.04	54.31	52.46	74.00	-21.54	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 227 of 1015

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel: High

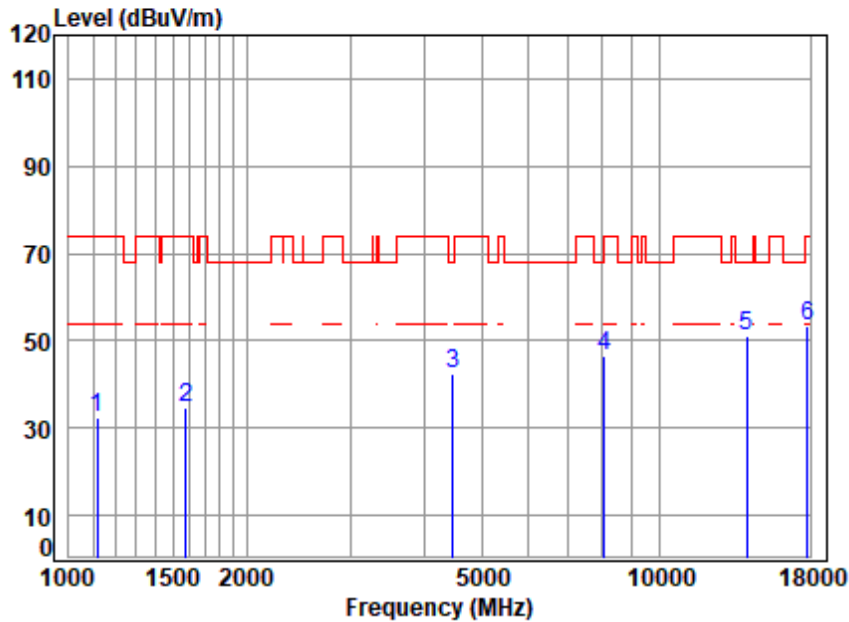

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 7025 TX RSE
Note : 6E WIFI 11AX80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1116.093	3.57	23.76	61.52	66.78	32.59	74.00	-41.41	peak
2	1578.822	4.16	26.88	61.68	65.43	34.79	74.00	-39.21	peak
3	4469.214	7.22	33.97	61.60	62.94	42.53	68.20	-25.67	peak
4	8059.475	9.09	36.42	61.66	62.56	46.41	74.00	-27.59	peak
5	14050.000	13.03	39.75	62.62	61.01	51.17	68.20	-17.03	peak
6	17793.090	15.23	43.89	61.09	55.16	53.19	74.00	-20.81	peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 228 of 1015

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel: High

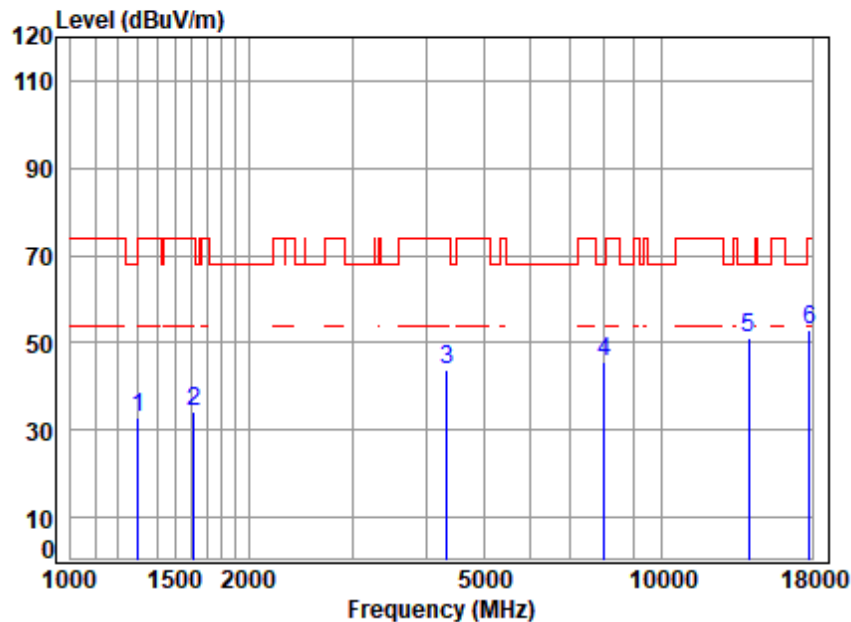

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 7025 TX RSE
Note : 6E WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	3.81	24.79	61.59	65.69	32.70	74.00	-41.30	peak
2	1615.754	4.21	26.64	61.69	65.18	34.34	74.00	-39.66	peak
3	4341.886	7.07	34.34	61.49	63.82	43.74	74.00	-30.26	peak
4	8013.020	9.04	36.40	61.64	61.75	45.55	68.20	-22.65	peak
5	14050.000	13.03	39.75	62.62	60.98	51.14	68.20	-17.06	peak
6	17793.090	15.23	43.89	61.09	54.84	52.87	74.00	-21.13	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:160MHz;

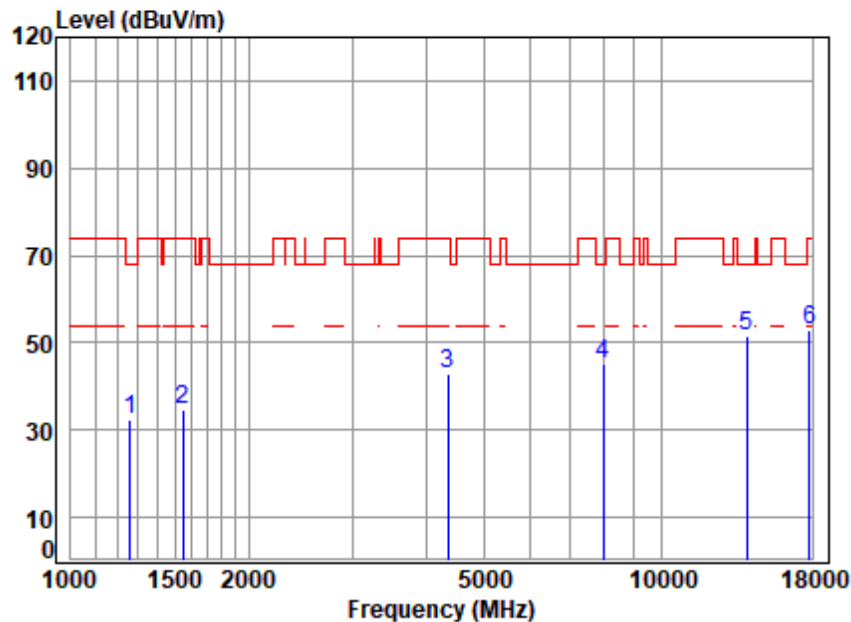


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 6985 TX RSE
Note : 6E WIFI 11AX160

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1260.149	3.76	25.04	61.58	65.36	32.58	68.20	-35.62	peak
2	1547.199	4.11	26.99	61.67	65.35	34.78	74.00	-39.22	peak
3	4354.454	7.08	34.44	61.50	63.08	43.10	74.00	-30.90	peak
4	7989.893	9.02	36.40	61.64	61.47	45.25	68.20	-22.95	peak
5	13970.000	13.02	39.64	62.61	61.34	51.39	68.20	-16.81	peak
6	17844.590	15.29	43.90	61.04	54.89	53.04	74.00	-20.96	peak



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:160MHz;

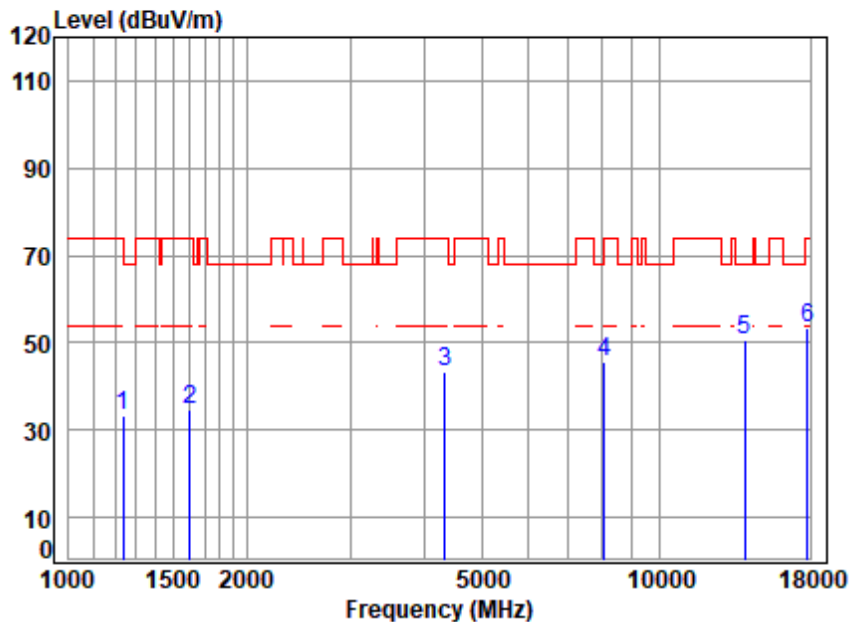

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 6985 TX RSE
Note : 6E WIFI 11AX160

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	3.73	24.94	61.57	66.22	33.32	74.00	-40.68	peak
2	1606.441	4.19	26.74	61.69	65.39	34.63	74.00	-39.37	peak
3	4341.886	7.07	34.34	61.49	63.49	43.41	74.00	-30.59	peak
4	8059.475	9.09	36.42	61.66	61.71	45.56	74.00	-28.44	peak
5	13970.000	13.02	39.64	62.61	60.46	50.51	68.20	-17.69	peak
6	17793.090	15.23	43.89	61.09	55.26	53.29	74.00	-20.71	peak



7.11 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: KDB 789033 D02 II G

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.11.1 E.U.T. Operation

Operating Environment:

Temperature: 20.2 °C

Humidity: 56.7 % RH

Atmospheric Pressure: 1000 mbar



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) Laboratory


No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.11.2 Test Mode Description

Pre-scan / Final test	Mode Code
Final test	01
Final test	02
Final test	03
Final test	04
Final test	05
Final test	06
Final test	07
Final test	08

Please refer to Clause 4.2 for the detail of the test modes.

7.11.3 Test Setup Diagram

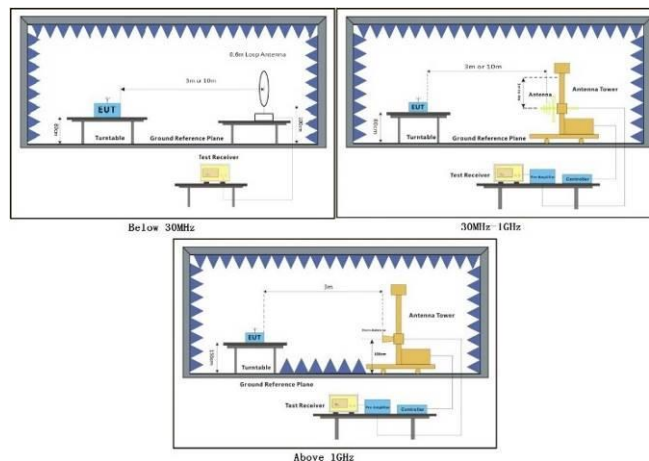


7.11.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
 - f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
 - g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
 - h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
 - i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
 - j. Repeat above procedures until all frequencies measured was complete.
- Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor



Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

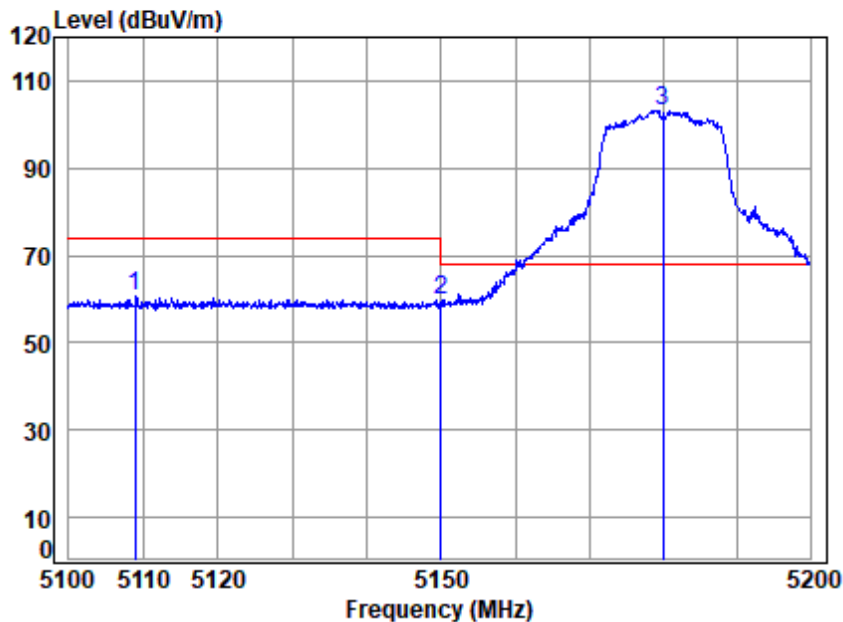

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5180 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5108.921	7.52	33.98	35.33	54.29	60.46	74.00	-13.54 peak
2	5149.980	7.55	33.90	35.31	53.41	59.55	74.00	-14.45 peak
3 q	5180.000	7.57	33.96	35.29	97.06	103.30	68.20	35.10 peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

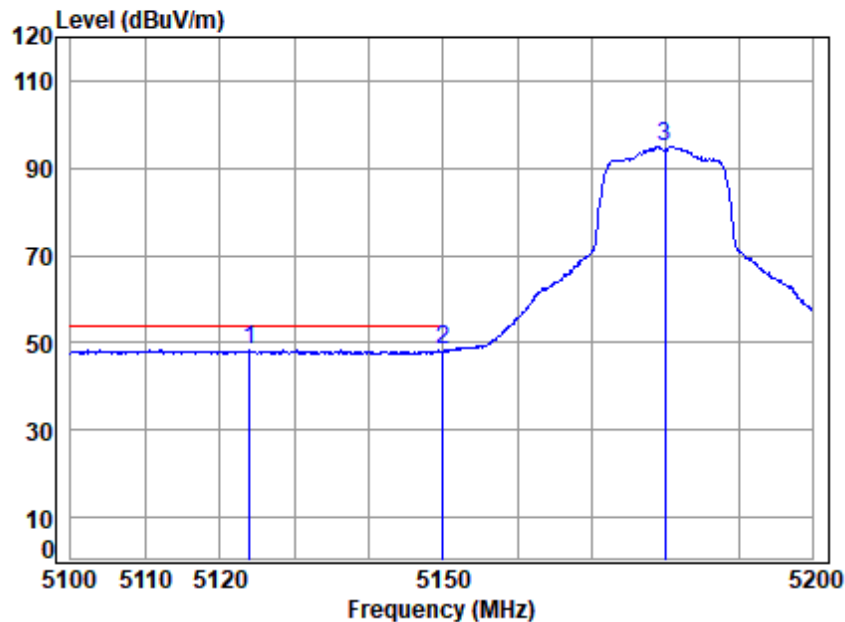


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5180 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 q 5124.022		7.53	33.95	35.32	42.30	48.46	54.00	-5.54 Average
2 5149.980		7.55	33.90	35.31	42.00	48.14	54.00	-5.86 Average
3 5180.000		7.57	33.96	35.29	88.89	95.13	-----	----- Average



Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

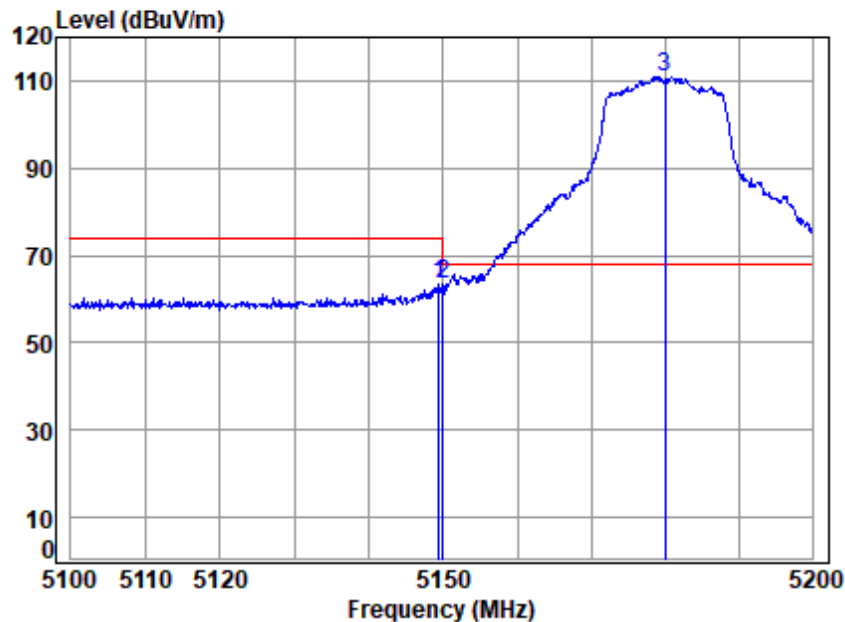


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5180 Band edge
: 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.458	7.55	33.90	35.31	57.13	63.27	74.00	-10.73	Peak
2	5149.980	7.55	33.90	35.31	57.32	63.46	74.00	-10.54	Peak
3 q	5180.000	7.57	33.96	35.29	104.74	110.98	68.20	42.78	Peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

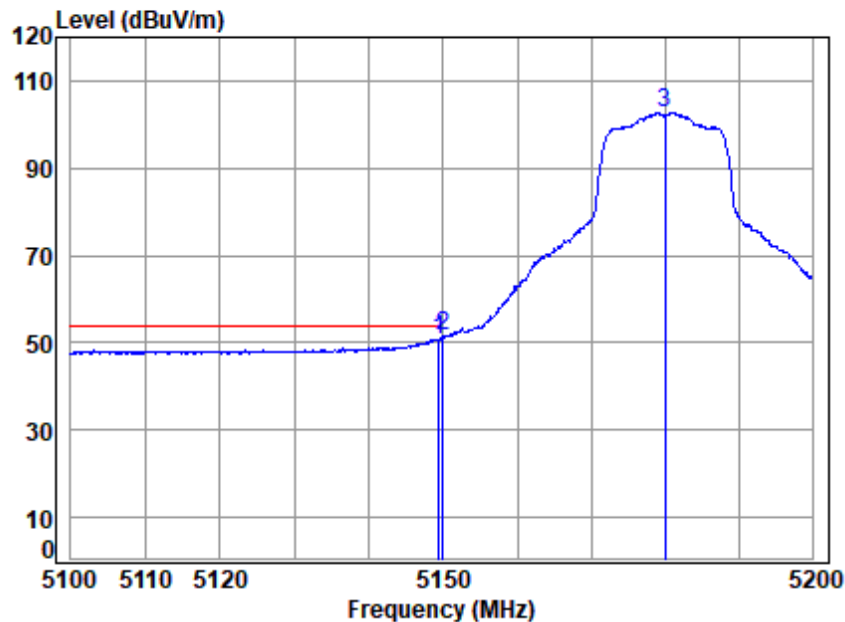


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5180 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.458	7.55	33.90	35.31	44.73	50.87	54.00	-3.13 Average
2 q	5149.980	7.55	33.90	35.31	45.48	51.62	54.00	-2.38 Average
3	5180.000	7.57	33.96	35.29	96.64	102.88	-----	----- Average



Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

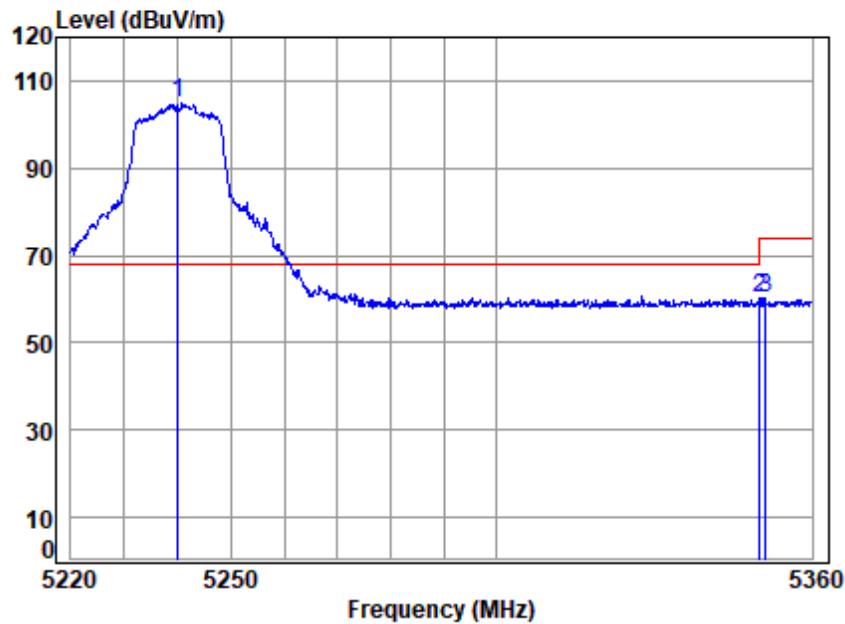


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5240 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5240.000	7.62	34.08	35.26	98.36	104.80	68.20	36.60	peak
2 5350.020	7.70	34.40	35.21	53.27	60.16	74.00	-13.84	peak
3 5351.070	7.71	34.40	35.21	53.43	60.33	74.00	-13.67	peak



Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

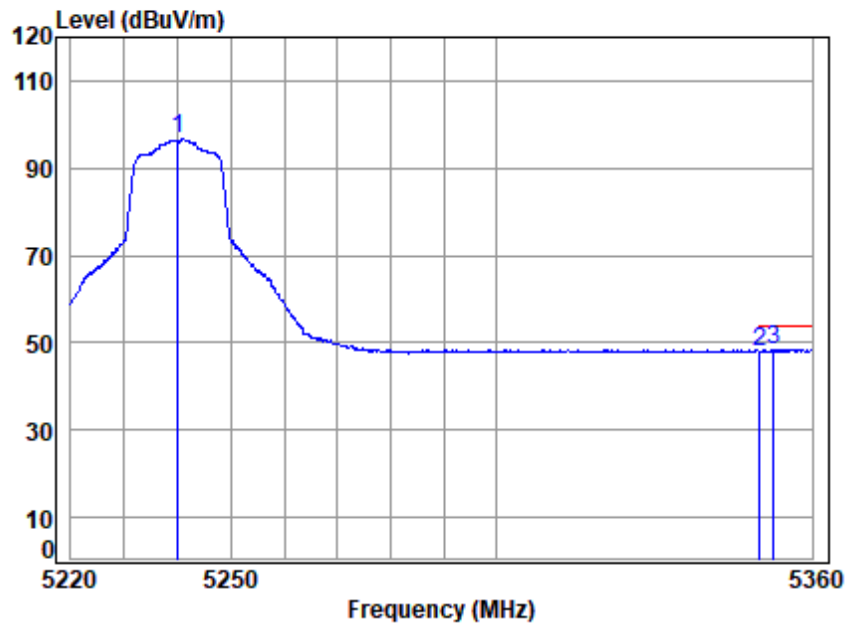


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5240 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5240.000	7.62	34.08	35.26	90.30	96.74	-----	----- Average
2	5350.020	7.70	34.40	35.21	41.13	48.02	54.00	-5.98 Average
3 q	5352.628	7.71	34.41	35.21	41.61	48.52	54.00	-5.48 Average



Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

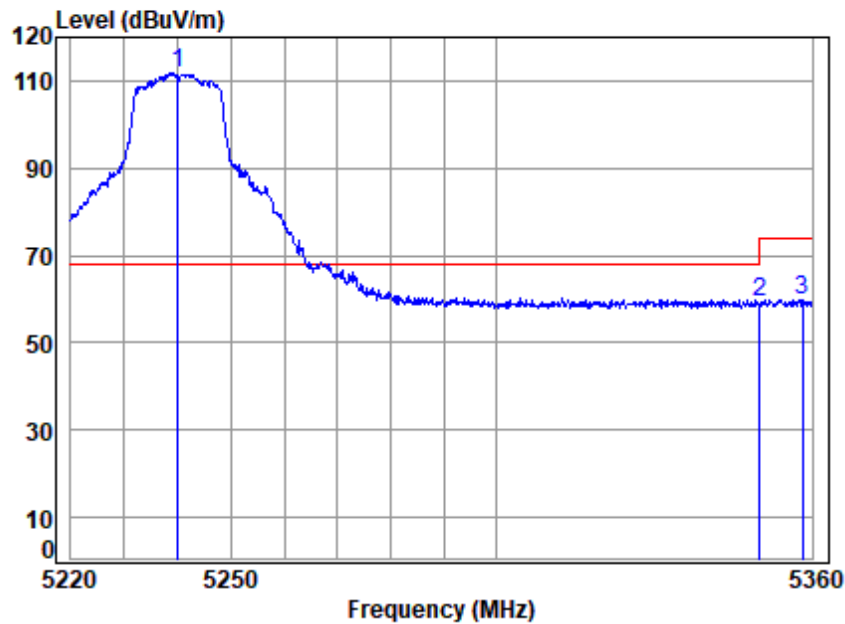

Site : chamber

Condition: 3m VERTICAL

Job No : 03424AT


Mode : 5240 Band edge

: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 q	5240.000	7.62	34.08	35.26	105.43	111.87	68.20	43.67 Peak
2	5350.020	7.70	34.40	35.21	52.28	59.17	74.00	-14.83 Peak
3	5358.156	7.71	34.43	35.20	52.97	59.91	74.00	-14.09 Peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

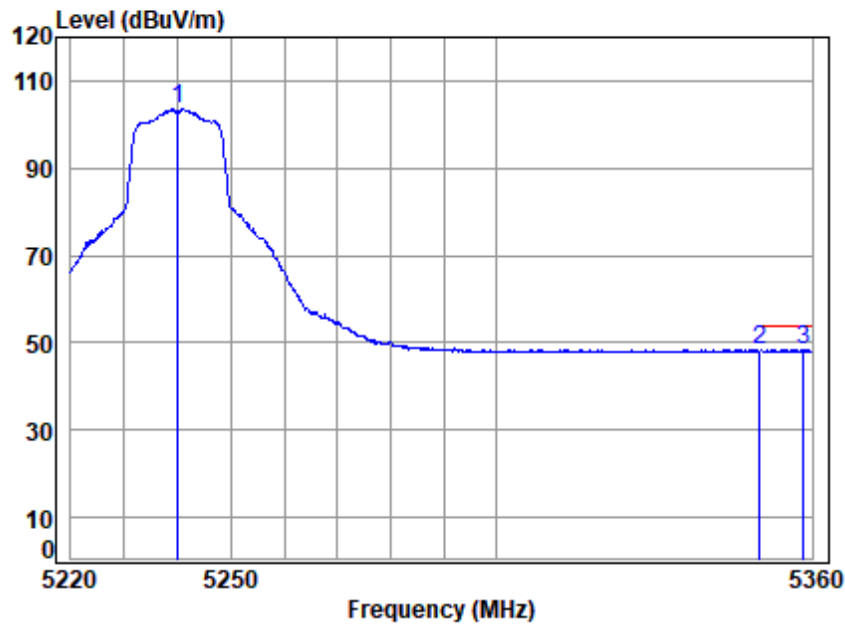


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5240 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5240.000	7.62	34.08	35.26	97.27	103.71	-----	----- Average
2	5350.020	7.70	34.40	35.21	41.37	48.26	54.00	-5.74 Average
3 q	5358.298	7.71	34.43	35.20	41.42	48.36	54.00	-5.64 Average



Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

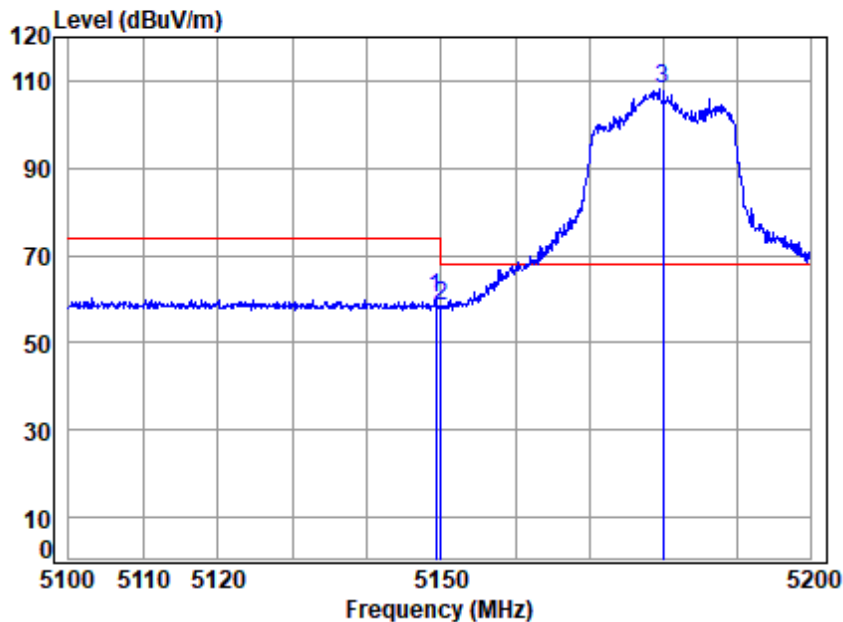

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5180 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.257	7.55	33.90	35.31	53.88	60.02	74.00	-13.98	peak
2	5149.980	7.55	33.90	35.31	52.35	58.49	74.00	-15.51	peak
3 q	5180.000	7.57	33.96	35.29	101.84	108.08	68.20	39.88	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

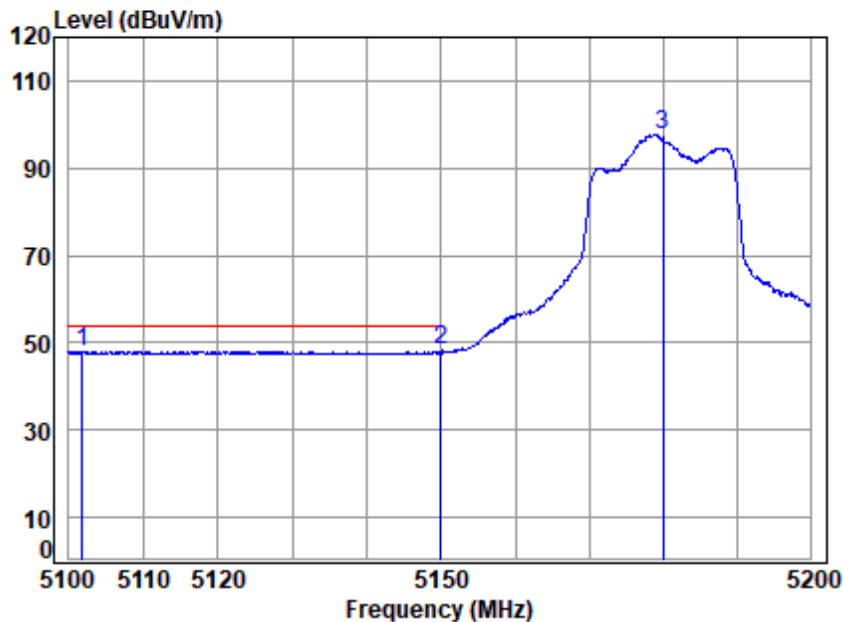


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5180 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5101.783	7.51	34.00	35.34	41.94	48.11	54.00	-5.89	Average
2 q 5149.980	7.55	33.90	35.31	42.20	48.34	54.00	-5.66	Average
3 5180.000	7.57	33.96	35.29	91.41	97.65	-----	-----	Average



Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

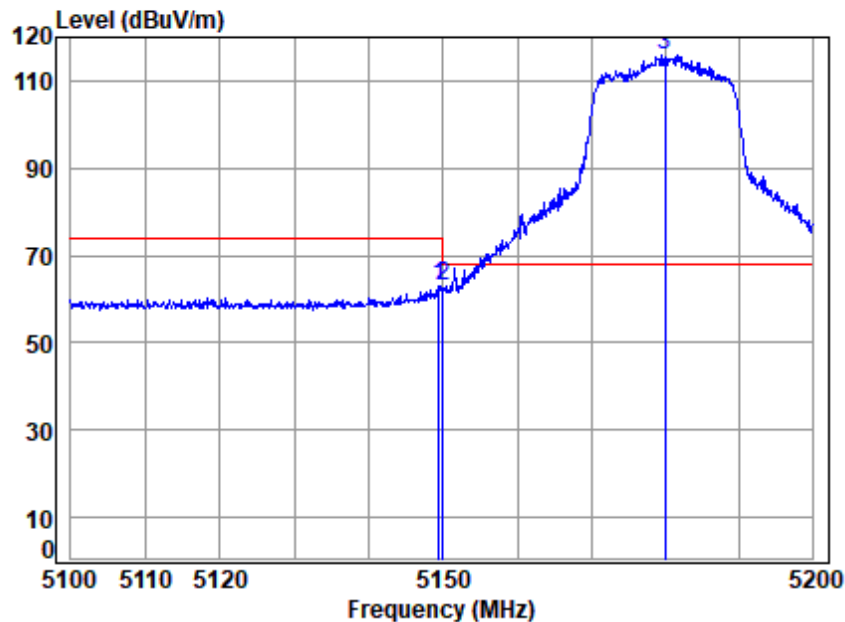


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5180 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.458	7.55	33.90	35.31	56.82	62.96	74.00	-11.04	Peak
2	5149.980	7.55	33.90	35.31	57.03	63.17	74.00	-10.83	Peak
3 q	5180.000	7.57	33.96	35.29	109.74	115.98	68.20	47.78	Peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

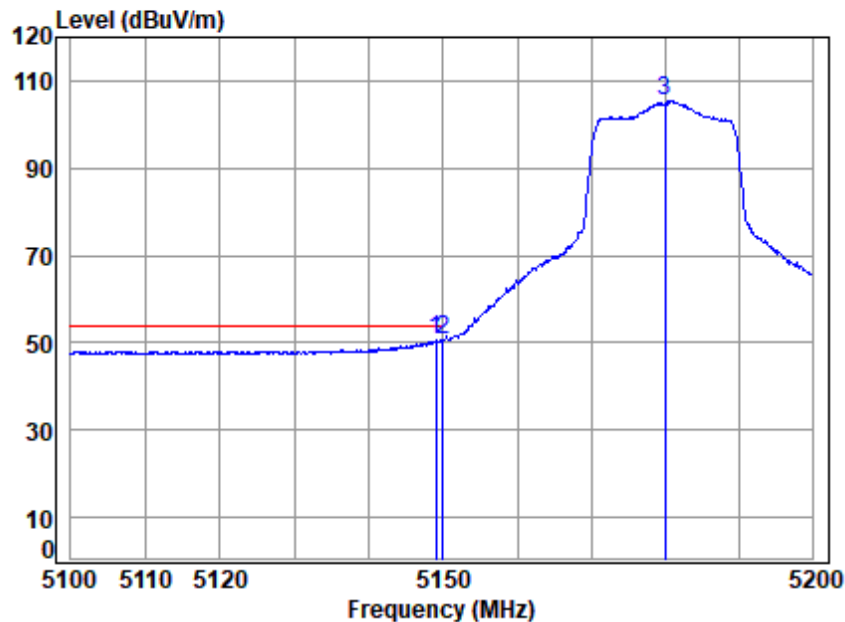

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5180 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5149.057	7.55	33.90	35.31	44.55	50.69	54.00	-3.31	Average
2 5149.980	7.55	33.90	35.31	44.55	50.69	54.00	-3.31	Average
3 5180.000	7.57	33.96	35.29	99.10	105.34	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 246 of 1015

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

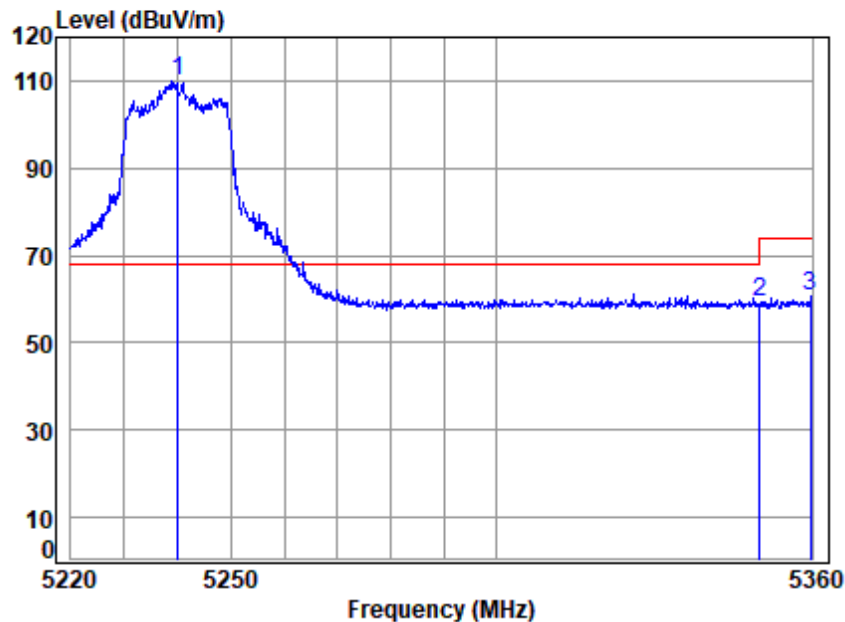

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5240 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 q 5240.000		7.62	34.08	35.26	103.73	110.17	68.20	41.97 peak
2 5350.020		7.70	34.40	35.21	52.56	59.45	74.00	-14.55 peak
3 5359.716		7.71	34.44	35.20	53.68	60.63	74.00	-13.37 peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

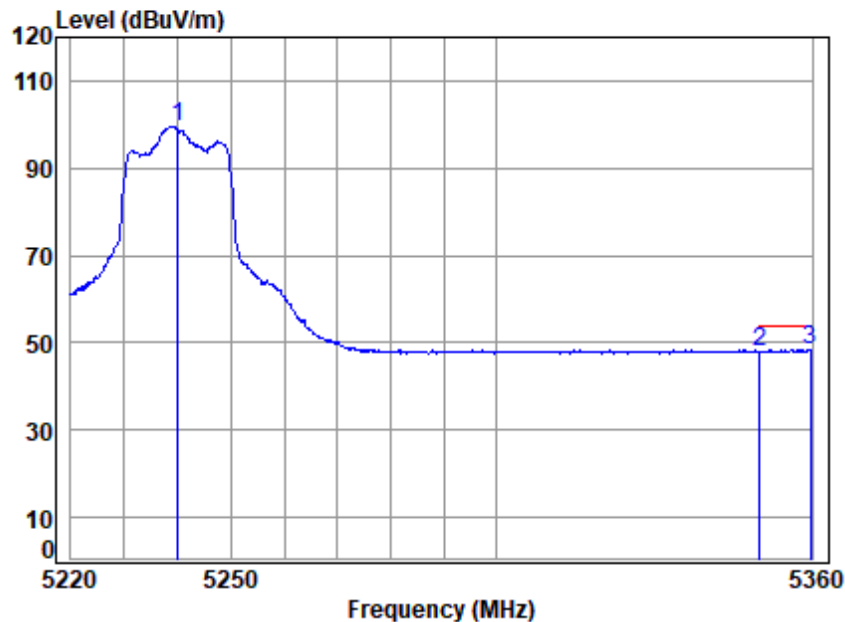


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5240 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5240.000	7.62	34.08	35.26	93.18	99.62	-----	----- Average
2	5350.020	7.70	34.40	35.21	41.21	48.10	54.00	-5.90 Average
3 q	5359.716	7.71	34.44	35.20	41.44	48.39	54.00	-5.61 Average



Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

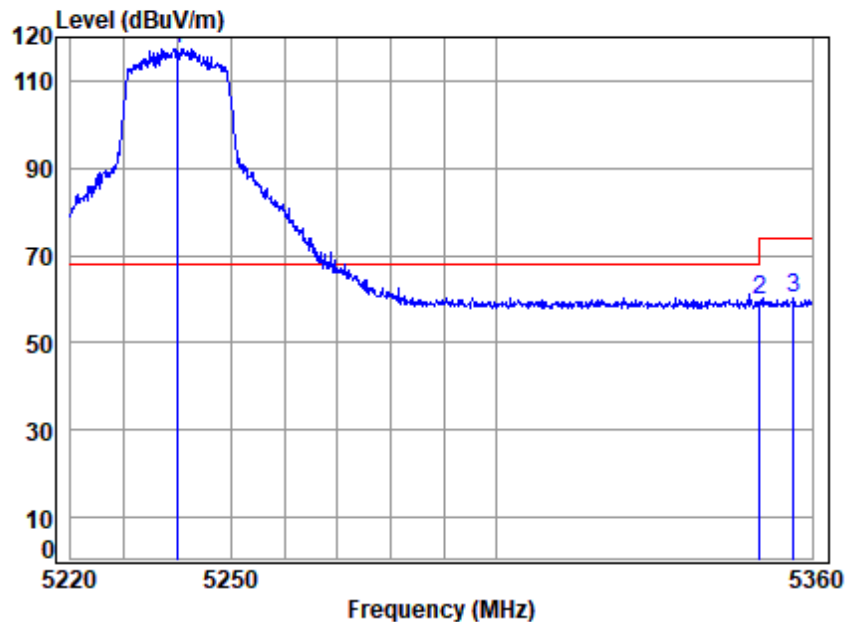


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5240 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5240.000	7.62	34.08	35.26	111.01	117.45	68.20	49.25	Peak
2 5350.020	7.70	34.40	35.21	52.95	59.84	74.00	-14.16	Peak
3 5356.455	7.71	34.43	35.20	53.19	60.13	74.00	-13.87	Peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

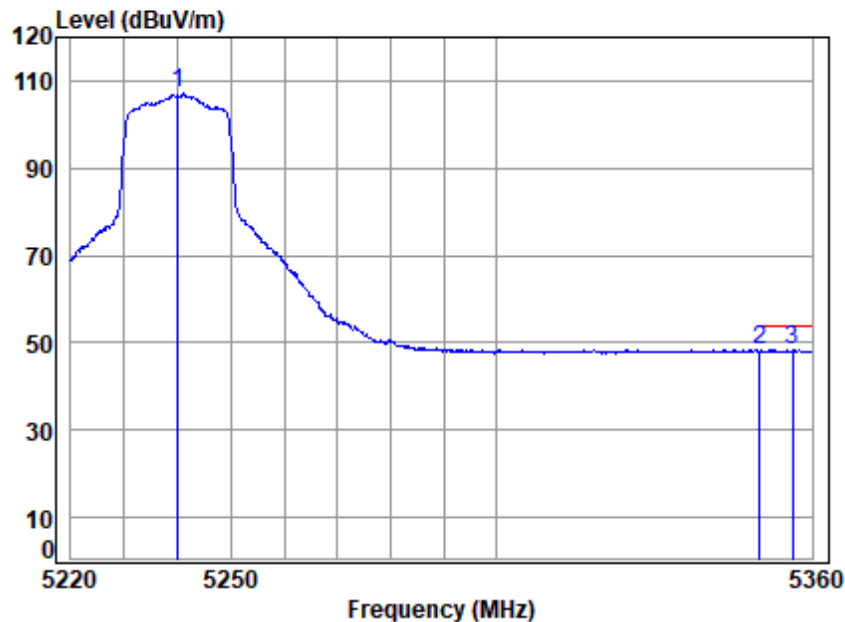


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5240 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5240.000	7.62	34.08	35.26	100.68	107.12	-----	----- Average
2	5350.020	7.70	34.40	35.21	41.27	48.16	54.00	-5.84 Average
3 q	5356.313	7.71	34.43	35.20	41.58	48.52	54.00	-5.48 Average



Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

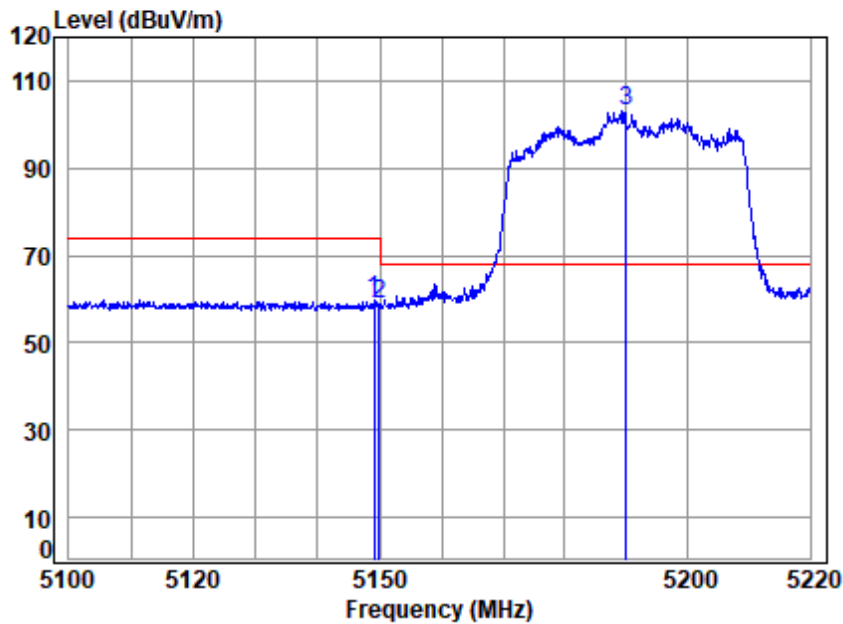


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5190 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5149.102	7.55	33.90	35.31	53.73	59.87	74.00	-14.13 peak
2	5149.980	7.55	33.90	35.31	52.70	58.84	74.00	-15.16 peak
3 q	5190.000	7.58	33.98	35.29	96.93	103.20	68.20	35.00 peak



Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

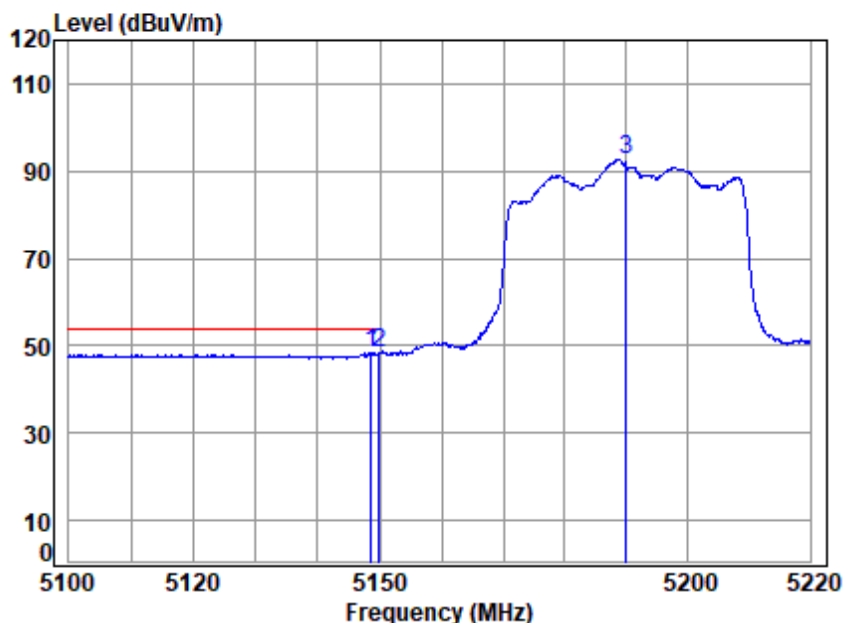


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5190 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5148.623	7.55	33.90	35.31	42.20	48.34	54.00	-5.66 Average
2 q	5149.980	7.55	33.90	35.31	42.26	48.40	54.00	-5.60 Average
3	5190.000	7.58	33.98	35.29	86.41	92.68	-----	----- Average



Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

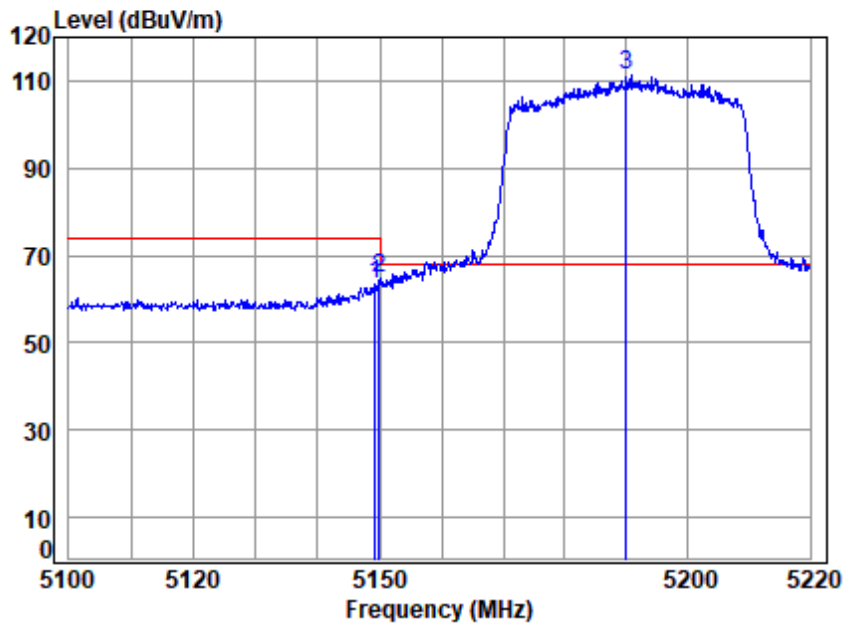


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5190 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5149.342	7.55	33.90	35.31	57.21	63.35	74.00	-10.65 Peak
2	5149.980	7.55	33.90	35.31	58.58	64.72	74.00	-9.28 Peak
3 q	5190.000	7.58	33.98	35.29	105.22	111.49	68.20	43.29 Peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

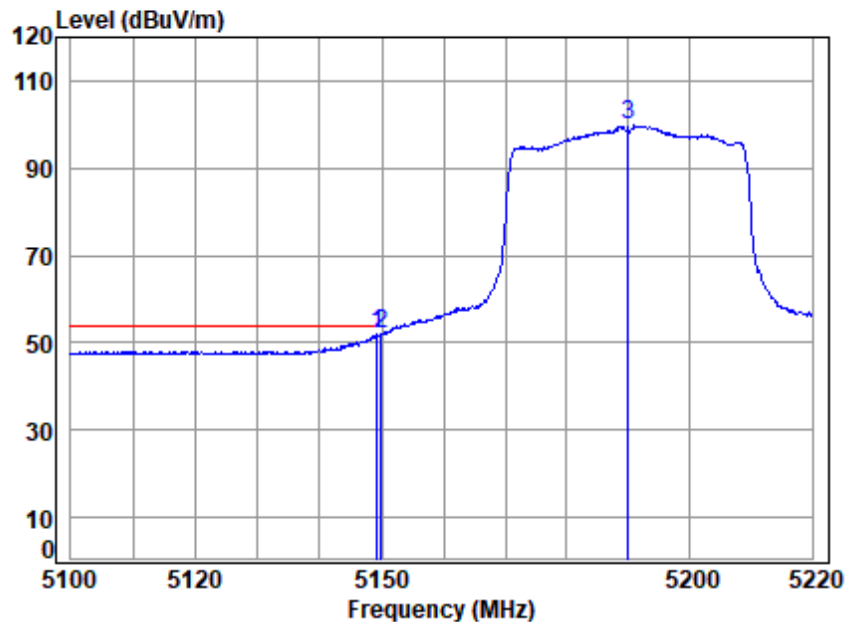


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5190 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5149.222	7.55	33.90	35.31	45.67	51.81	54.00	-2.19 Average
2 q	5149.980	7.55	33.90	35.31	46.06	52.20	54.00	-1.80 Average
3	5190.000	7.58	33.98	35.29	93.51	99.78	-----	----- Average



Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

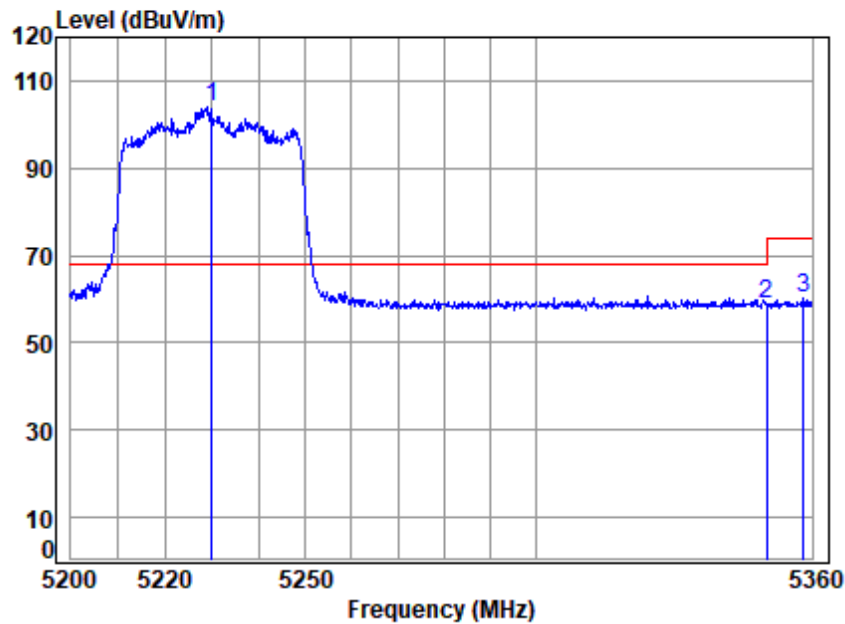

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5230 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q	5230.000	7.61	34.06	35.27	97.68	104.08	68.20	35.88	peak
2	5350.020	7.70	34.40	35.21	52.14	59.03	74.00	-14.97	peak
3	5358.051	7.71	34.43	35.20	53.23	60.17	74.00	-13.83	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 255 of 1015

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

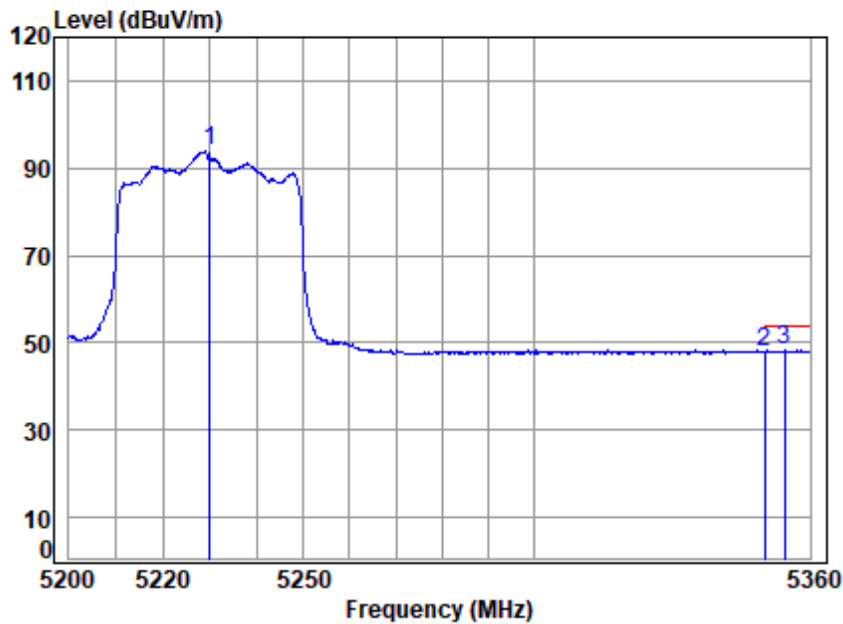

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5230 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5230.000	7.61	34.06	35.27	87.45	93.85	-----	-----	Average
2	5350.020	7.70	34.40	35.21	41.15	48.04	54.00	-5.96	Average
3 q	5354.318	7.71	34.42	35.21	41.46	48.38	54.00	-5.62	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

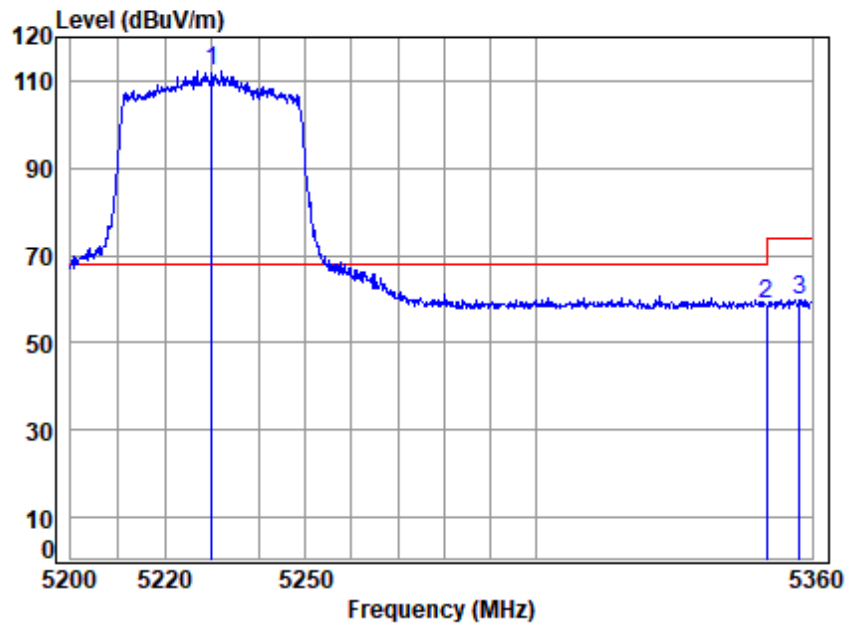

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5230 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 q 5230.000		7.61	34.06	35.27	105.85	112.25	68.20	44.05 Peak
2 5350.020		7.70	34.40	35.21	52.00	58.89	74.00	-15.11 Peak
3 5357.239		7.71	34.43	35.20	53.02	59.96	74.00	-14.04 Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

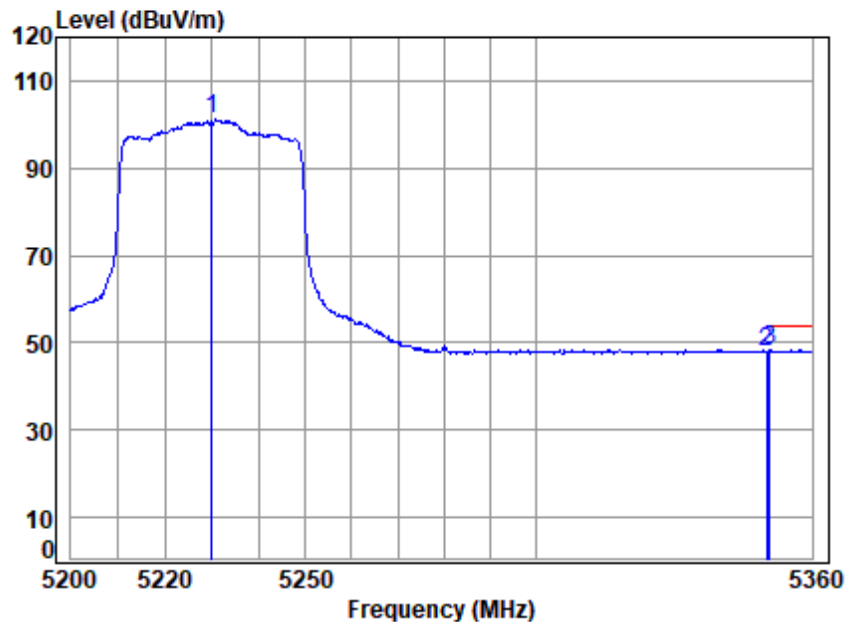


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5230 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5230.000	7.61	34.06	35.27	94.70	101.10	-----	----- Average
2	5350.020	7.70	34.40	35.21	41.02	47.91	54.00	-6.09 Average
3 q	5350.749	7.71	34.40	35.21	41.50	48.40	54.00	-5.60 Average



Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

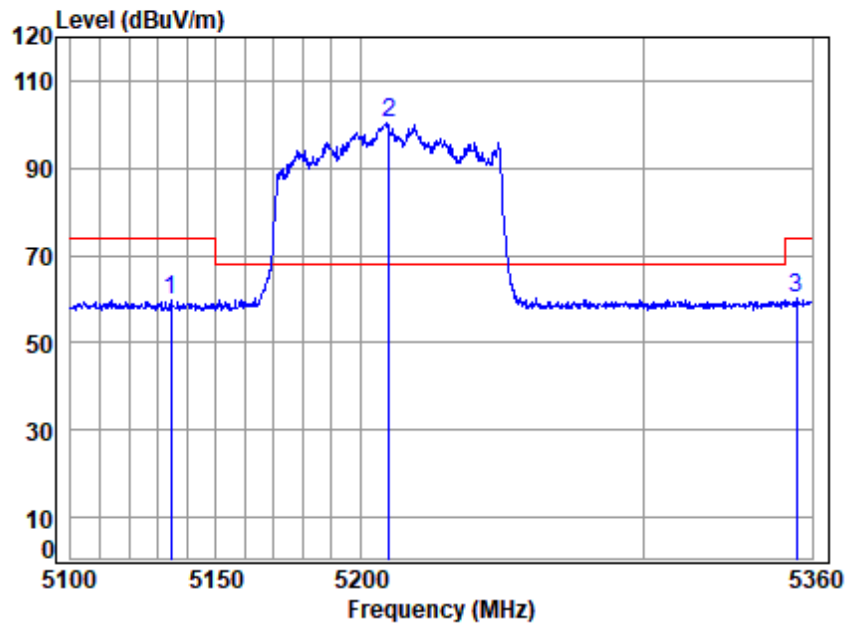


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5210 Band edge
: 5G WIFI 11AX80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5134.350	7.54	33.93	35.32	53.73	59.88	74.00	-14.12	peak
2 q	5210.000	7.60	34.02	35.28	93.99	100.33	68.20	32.13	peak
3	5354.406	7.71	34.42	35.21	53.34	60.26	74.00	-13.74	peak



Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

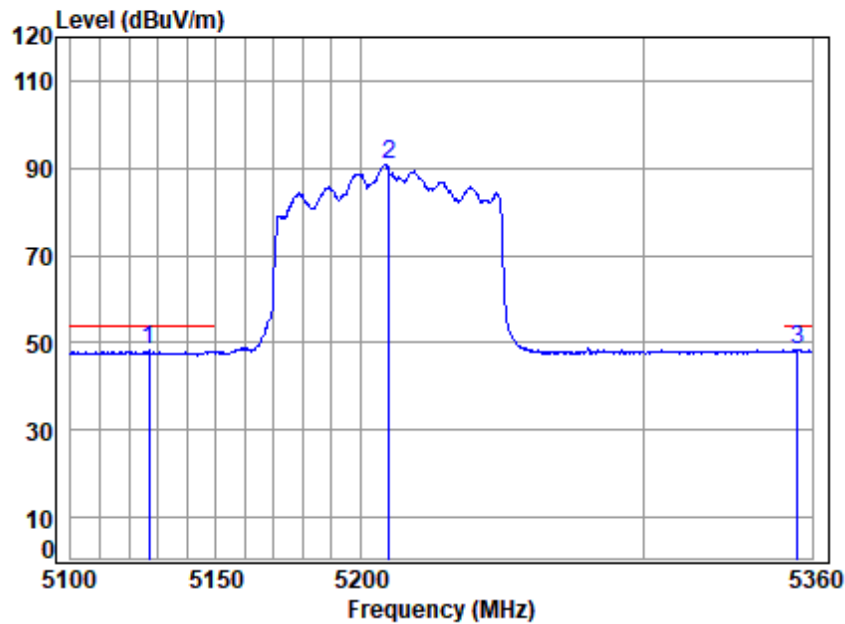


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5210 Band edge
: 5G WIFI 11AX80

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5126.696	7.53	33.95	35.32	42.17	48.33	54.00	-5.67	Average
2 5210.000	7.60	34.02	35.28	84.51	90.85	-----	-----	Average
3 5354.938	7.71	34.42	35.21	41.33	48.25	54.00	-5.75	Average



Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

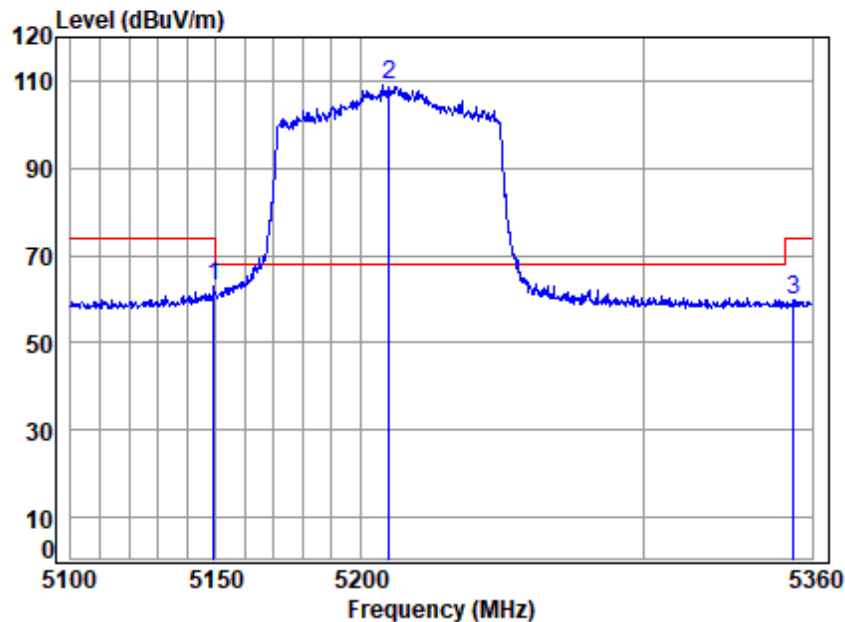


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5210 Band edge
: 5G WIFI 11AX80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.178	7.55	33.90	35.31	56.90	63.04	74.00	-10.96	Peak
2 q	5210.000	7.60	34.02	35.28	102.53	108.87	68.20	40.67	Peak
3	5353.341	7.71	34.41	35.21	52.90	59.81	74.00	-14.19	Peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

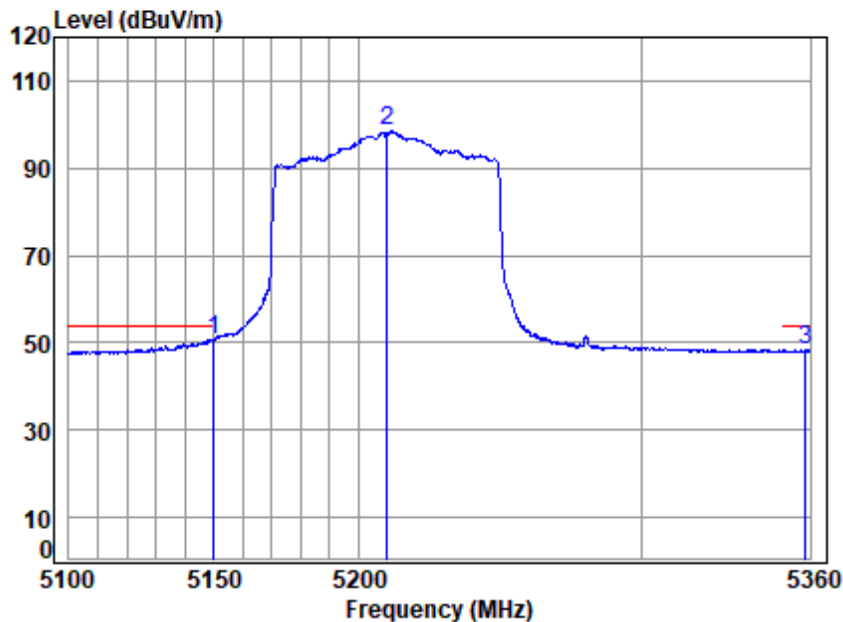


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5210 Band edge
: 5G WIFI 11AX80

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5149.947	7.55	33.90	35.31	44.61	50.75	54.00	-3.25	Average
2 5210.000	7.60	34.02	35.28	92.11	98.45	-----	-----	Average
3 5358.401	7.71	34.43	35.20	41.41	48.35	54.00	-5.65	Average



Test Mode: 02; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

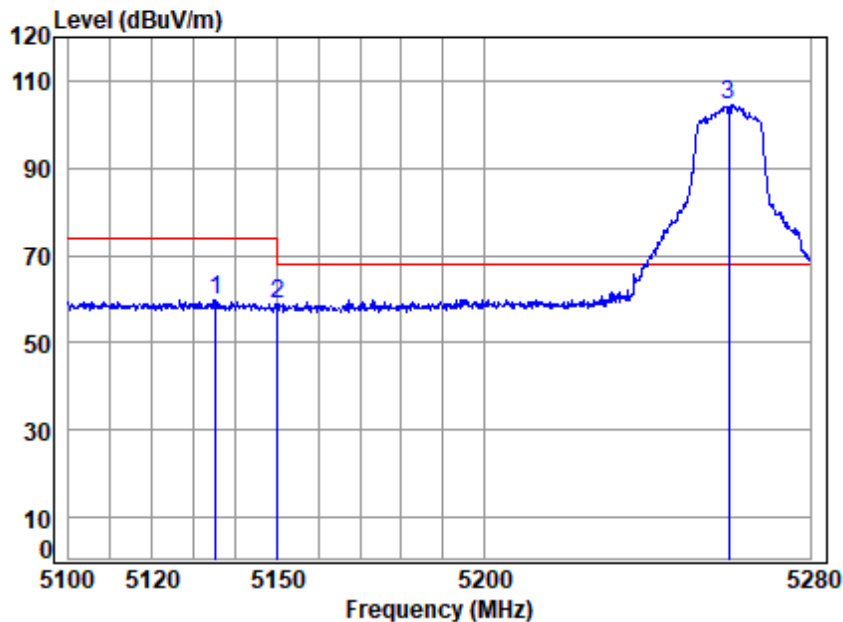


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5260 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5135.146	7.54	33.93	35.32	53.51	59.66	74.00	-14.34	peak
2	5149.980	7.55	33.90	35.31	52.65	58.79	74.00	-15.21	peak
3 q	5260.000	7.64	34.12	35.25	97.88	104.39	68.20	36.19	peak



Test Mode: 02; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

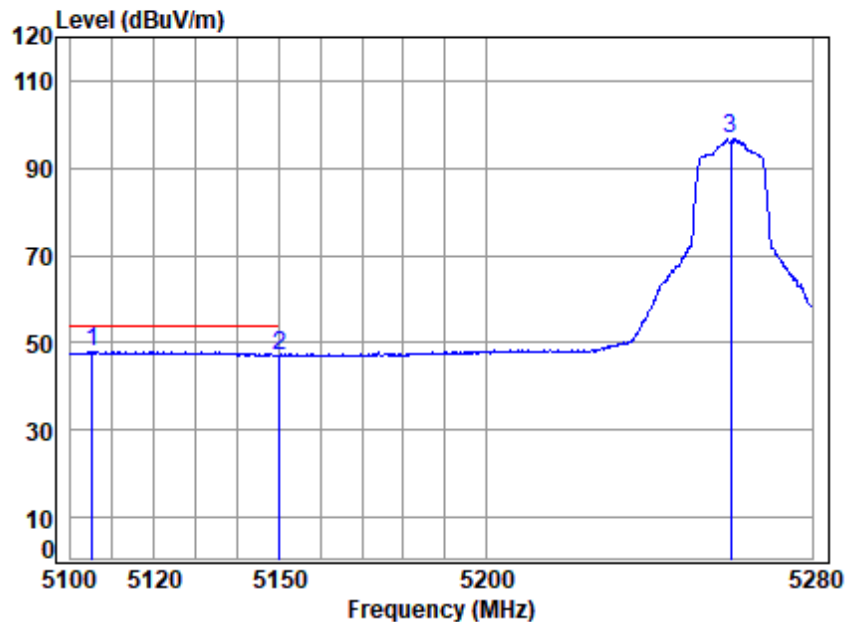


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5260 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5105.133	7.51	33.99	35.33	41.69	47.86	54.00	-6.14	Average
2 5149.980	7.55	33.90	35.31	41.07	47.21	54.00	-6.79	Average
3 5260.000	7.64	34.12	35.25	90.14	96.65	-----	-----	Average



Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

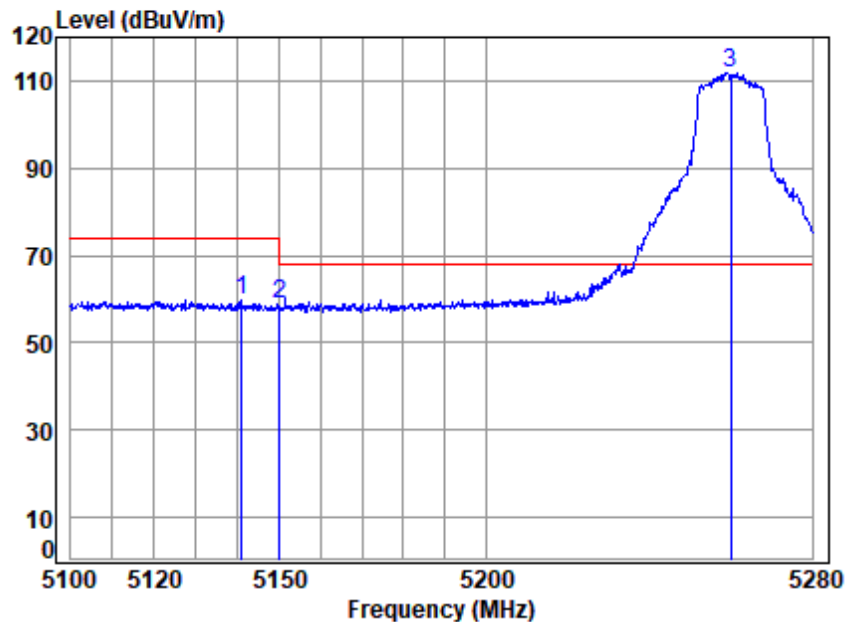


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5260 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5140.849	7.54	33.92	35.32	53.61	59.75	74.00	-14.25	Peak
2	5149.980	7.55	33.90	35.31	52.79	58.93	74.00	-15.07	Peak
3 q	5260.000	7.64	34.12	35.25	105.42	111.93	68.20	43.73	Peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

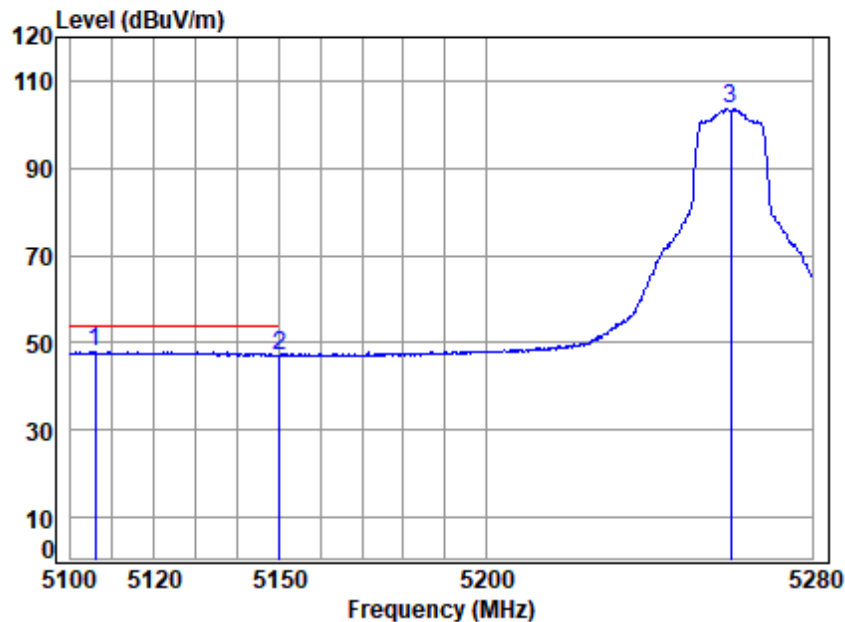


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5260 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5105.841	7.52	33.99	35.33	41.77	47.95	54.00	-6.05	Average
2 5149.980	7.55	33.90	35.31	41.07	47.21	54.00	-6.79	Average
3 5260.000	7.64	34.12	35.25	97.08	103.59	-----	-----	Average



Test Mode: 02; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

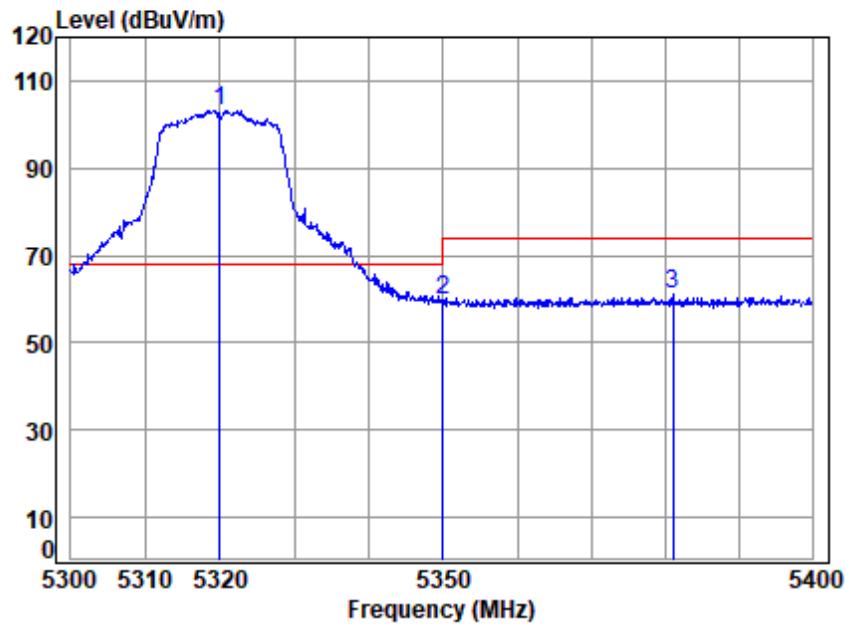


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5320 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 q	5320.000	7.68	34.28	35.22	96.56	103.30	68.20	35.10 peak
2	5350.020	7.70	34.40	35.21	52.87	59.76	74.00	-14.24 peak
3	5381.057	7.73	34.52	35.19	54.09	61.15	74.00	-12.85 peak



Test Mode: 02; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

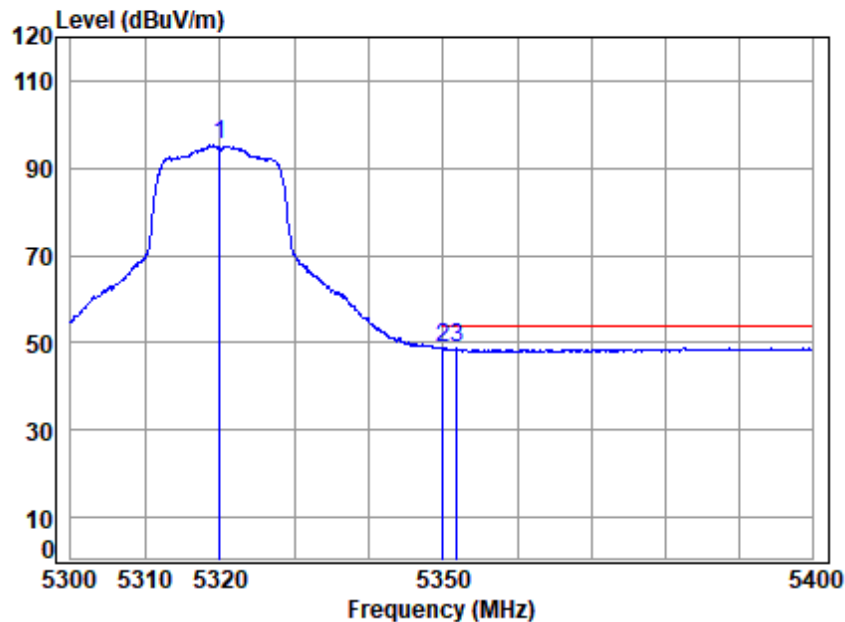


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5320 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5320.000	7.68	34.28	35.22	88.57	95.31	-----	----- Average
2	5350.020	7.70	34.40	35.21	41.83	48.72	54.00	-5.28 Average
3 q	5351.867	7.71	34.41	35.21	41.89	48.80	54.00	-5.20 Average



Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

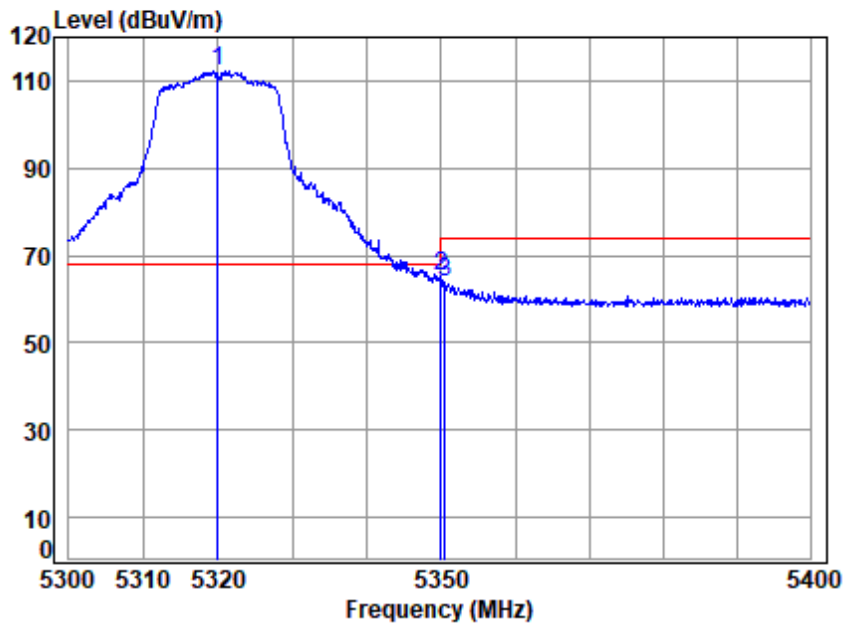

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5320 Band edge
: 5G WIFI 11A


		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5320.000	7.68	34.28	35.22	105.45	112.19	68.20	43.99	Peak
2 5350.020	7.70	34.40	35.21	58.20	65.09	74.00	-8.91	Peak
3 5350.566	7.71	34.40	35.21	56.94	63.84	74.00	-10.16	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

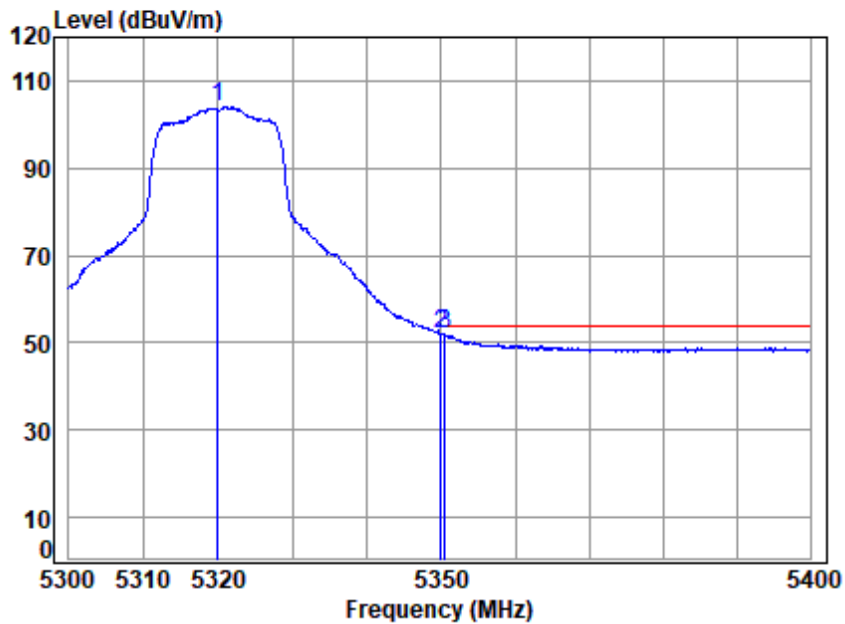

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5320 Band edge
: 5G WIFI 11A


		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5320.000	7.68	34.28	35.22	97.36	104.10	-----	----- Average
2 q	5350.020	7.70	34.40	35.21	45.31	52.20	54.00	-1.80 Average
3	5350.566	7.71	34.40	35.21	45.05	51.95	54.00	-2.05 Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 02; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

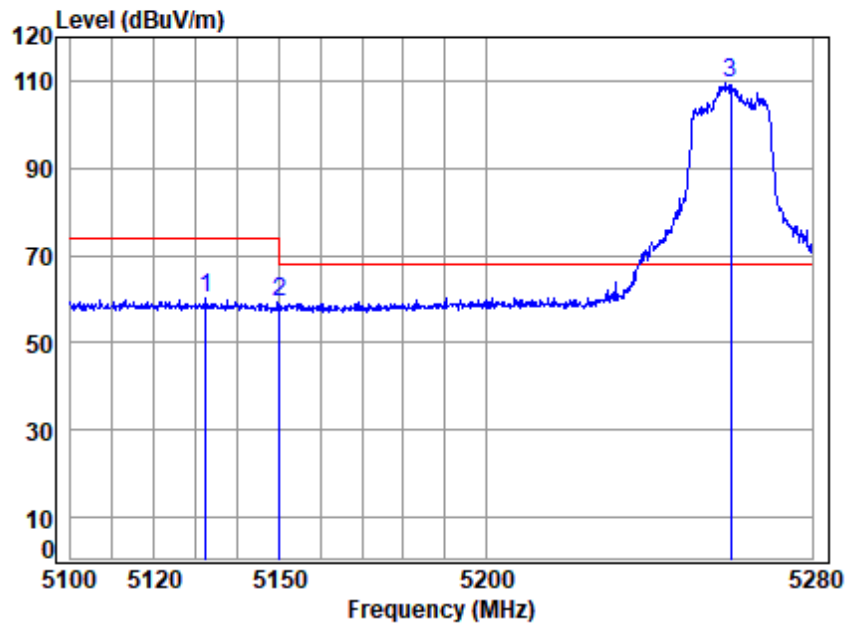


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5260 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5132.297	7.54	33.94	35.32	54.14	60.30	74.00	-13.70	peak
2	5149.980	7.55	33.90	35.31	53.02	59.16	74.00	-14.84	peak
3 q	5260.000	7.64	34.12	35.25	102.90	109.41	68.20	41.21	peak



Test Mode: 02; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

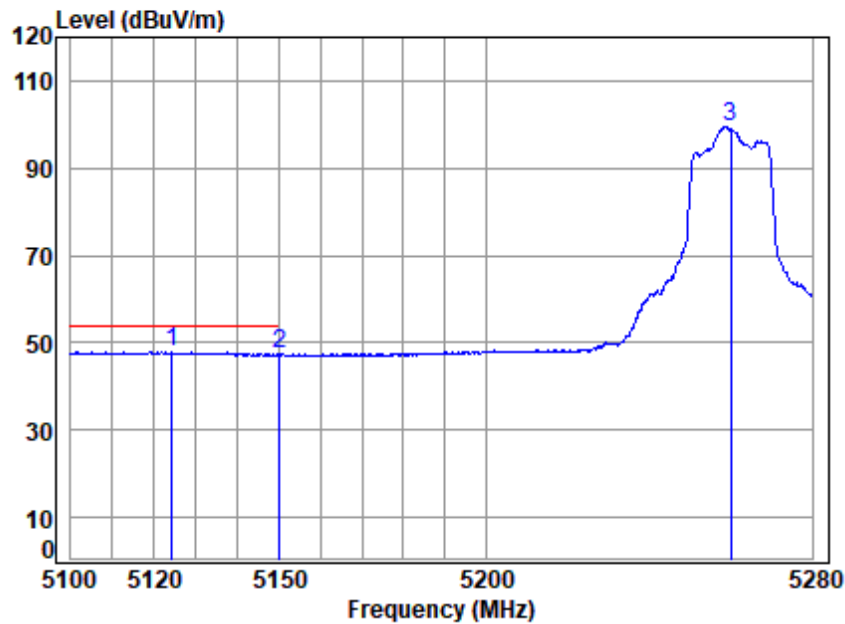


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5260 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5124.292	7.53	33.95	35.32	41.86	48.02	54.00	-5.98	Average
2 5149.980	7.55	33.90	35.31	41.24	47.38	54.00	-6.62	Average
3 5260.000	7.64	34.12	35.25	92.82	99.33	-----	-----	Average



Test Mode: 02; Polarity: Vertical; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

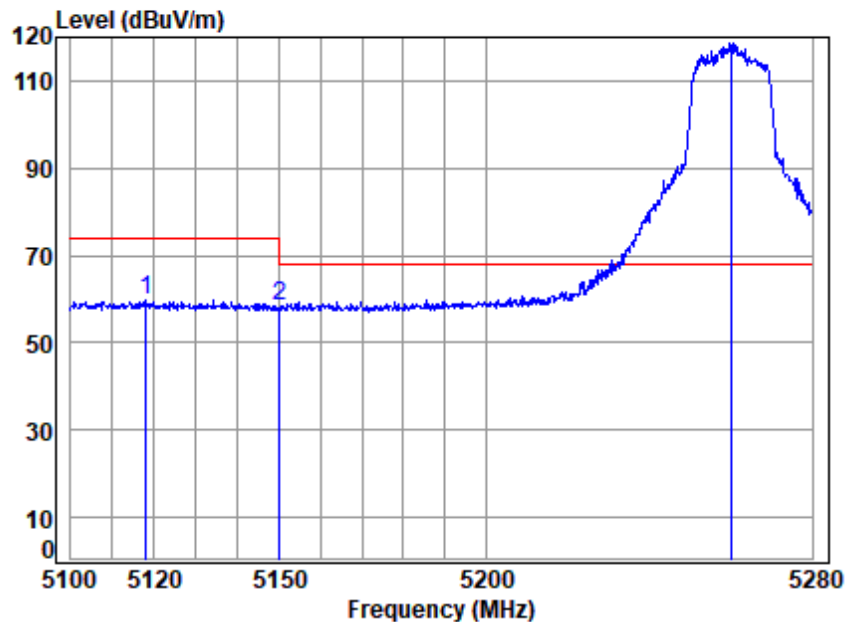


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5260 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5117.898	7.52	33.96	35.33	53.82	59.97	74.00	-14.03	Peak
2	5149.980	7.55	33.90	35.31	52.44	58.58	74.00	-15.42	Peak
3 q	5260.000	7.64	34.12	35.25	112.27	118.78	68.20	50.58	Peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

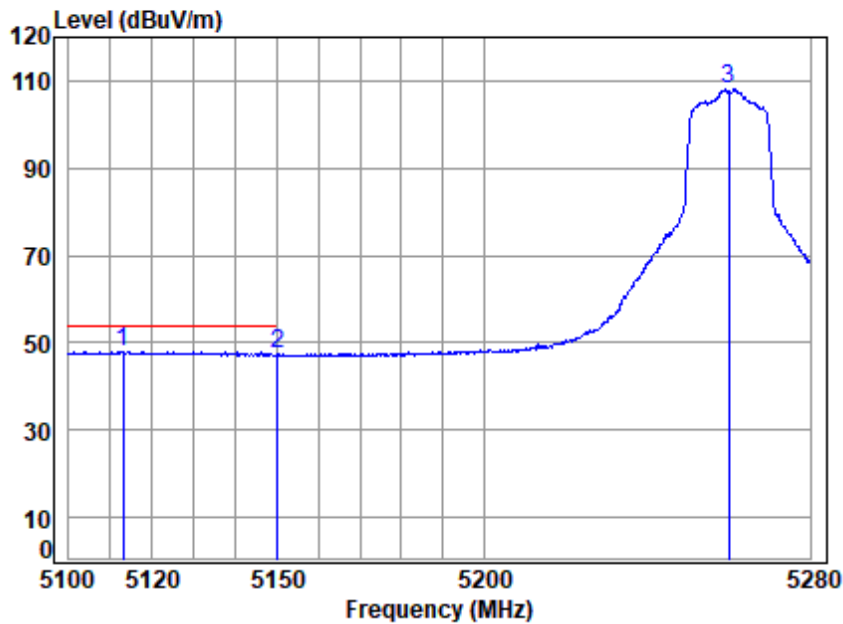


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5260 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 q 5112.930		7.52	33.97	35.33	41.91	48.07	54.00	-5.93 Average
2 5149.980		7.55	33.90	35.31	41.09	47.23	54.00	-6.77 Average
3 5260.000		7.64	34.12	35.25	101.51	108.02	-----	----- Average



Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

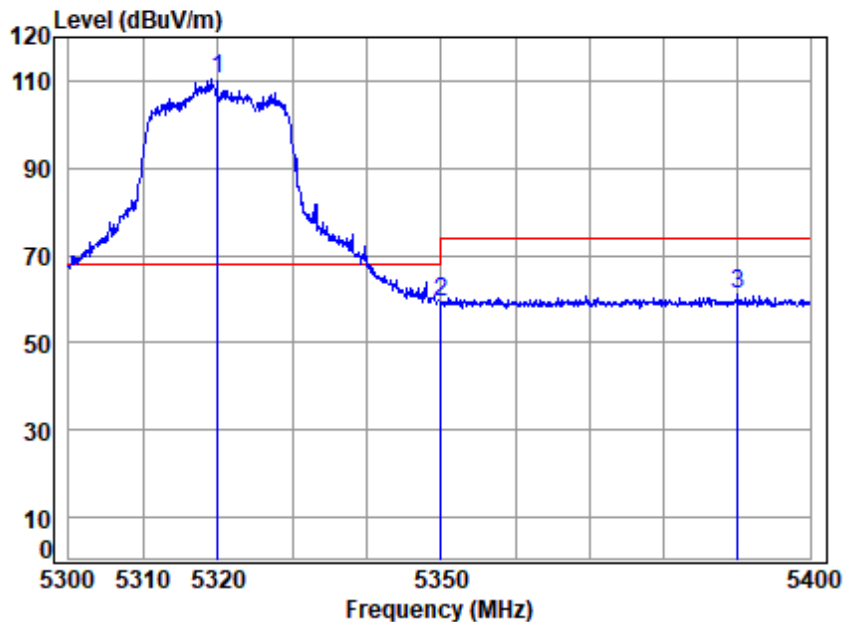


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5320 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q	5320.000	7.68	34.28	35.22	103.58	110.32	68.20	42.12	peak
2	5350.020	7.70	34.40	35.21	52.60	59.49	74.00	-14.51	peak
3	5390.117	7.73	34.56	35.19	54.01	61.11	74.00	-12.89	peak



Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

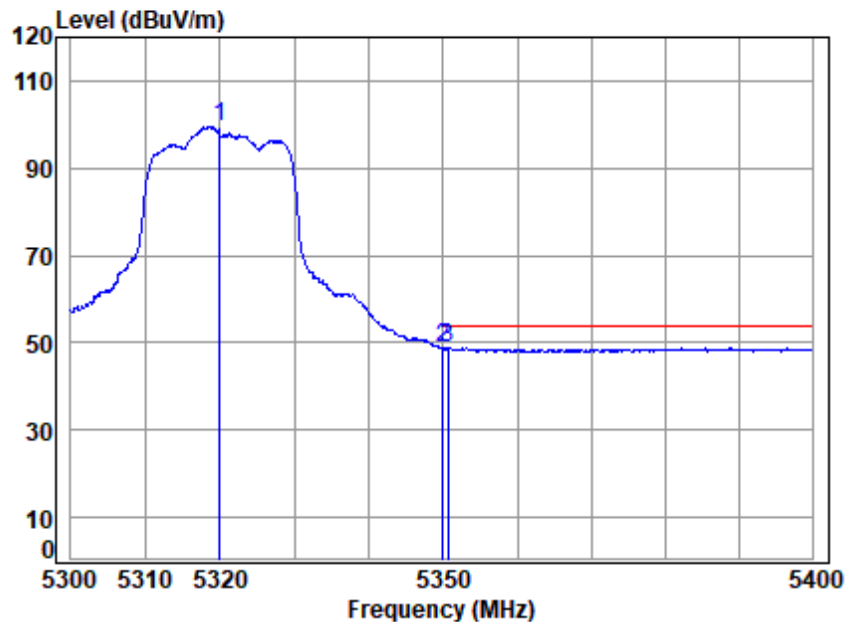


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5320 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5320.000	7.68	34.28	35.22	92.73	99.47	-----	-----	Average
2 5350.020	7.70	34.40	35.21	42.01	48.90	54.00	-5.10	Average
3 q 5350.667	7.71	34.40	35.21	42.14	49.04	54.00	-4.96	Average



Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

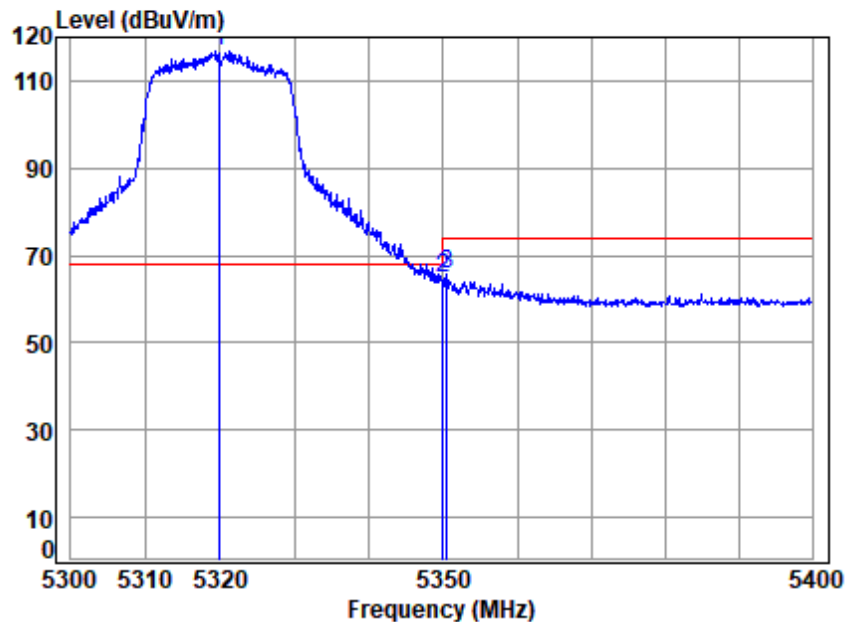


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5320 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5320.000	7.68	34.28	35.22	110.05	116.79	68.20	48.59	Peak
2 5350.020	7.70	34.40	35.21	57.73	64.62	74.00	-9.38	Peak
3 5350.566	7.71	34.40	35.21	58.58	65.48	74.00	-8.52	Peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

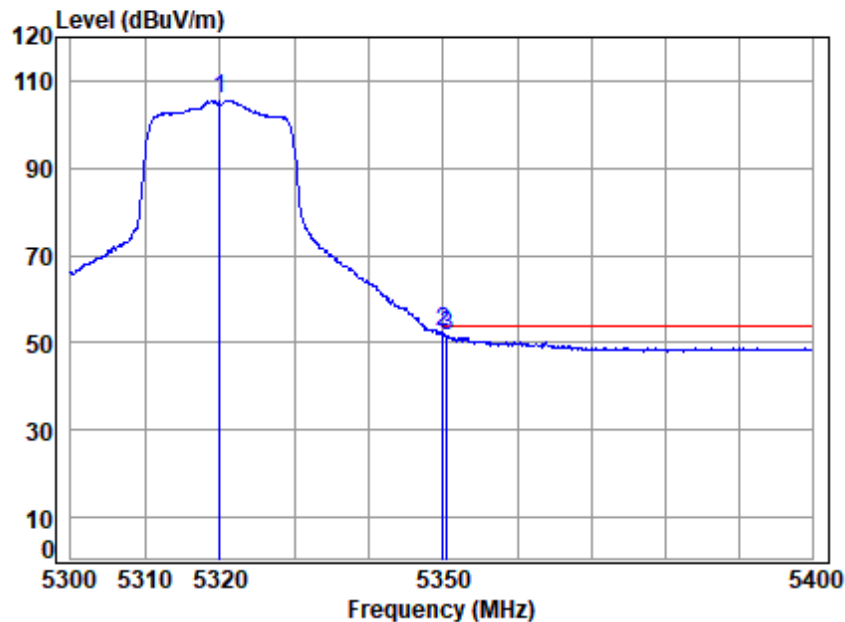

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5320 Band edge
: 5G WIFI 11AX20


		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5320.000	7.68	34.28	35.22	99.27	106.01	-----	----- Average
2 q	5350.020	7.70	34.40	35.21	45.63	52.52	54.00	-1.48 Average
3	5350.566	7.71	34.40	35.21	44.88	51.78	54.00	-2.22 Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

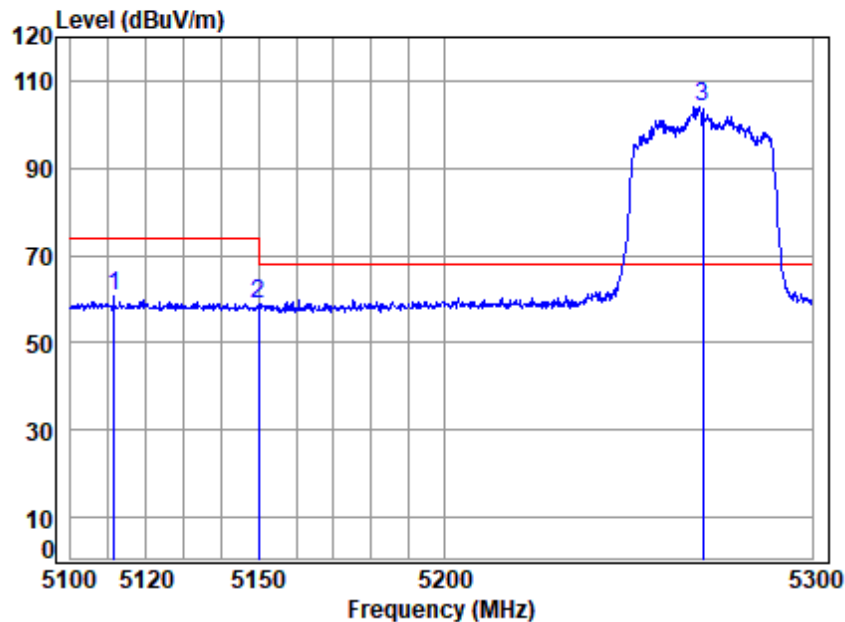


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5270 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5111.391	7.52	33.98	35.33	54.68	60.85	74.00	-13.15	peak
2	5149.980	7.55	33.90	35.31	52.56	58.70	74.00	-15.30	peak
3 q	5270.000	7.64	34.14	35.25	97.61	104.14	68.20	35.94	peak



Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

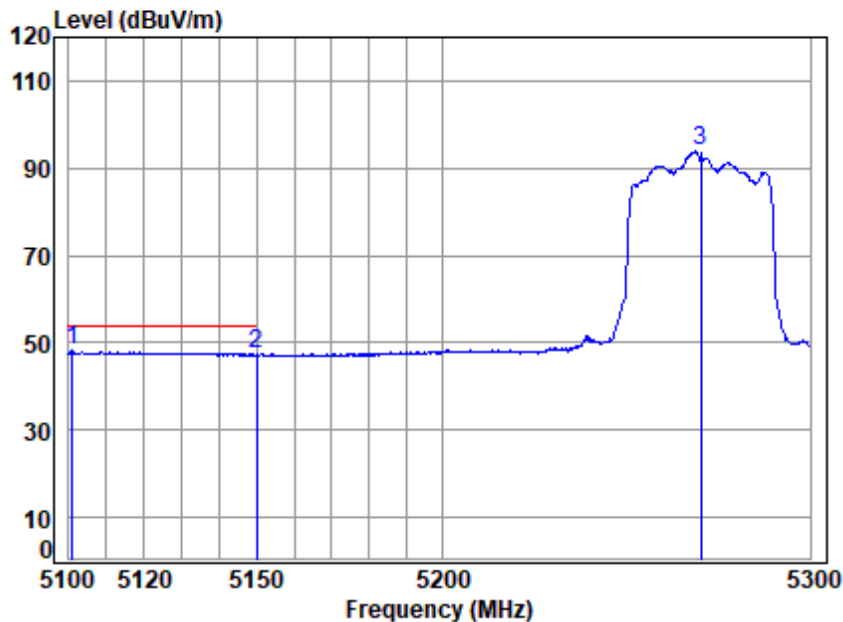


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5270 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5100.981	7.51	34.00	35.34	42.08	48.25	54.00	-5.75	Average
2 5149.980	7.55	33.90	35.31	41.09	47.23	54.00	-6.77	Average
3 5270.000	7.64	34.14	35.25	87.36	93.89	-----	-----	Average



Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

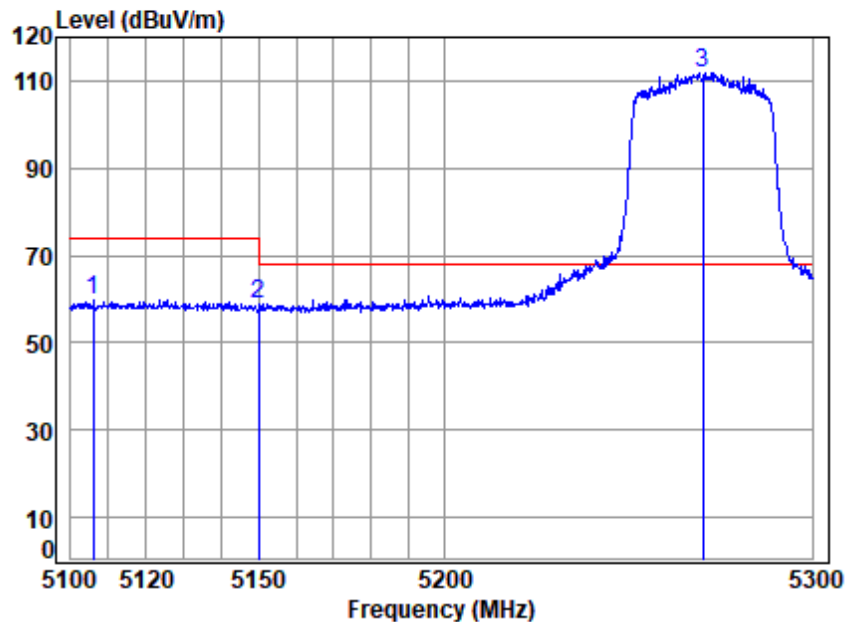


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5270 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5106.085	7.52	33.99	35.33	53.64	59.82	74.00	-14.18 Peak
2	5149.980	7.55	33.90	35.31	52.90	59.04	74.00	-14.96 Peak
3 q	5270.000	7.64	34.14	35.25	105.32	111.85	68.20	43.65 Peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

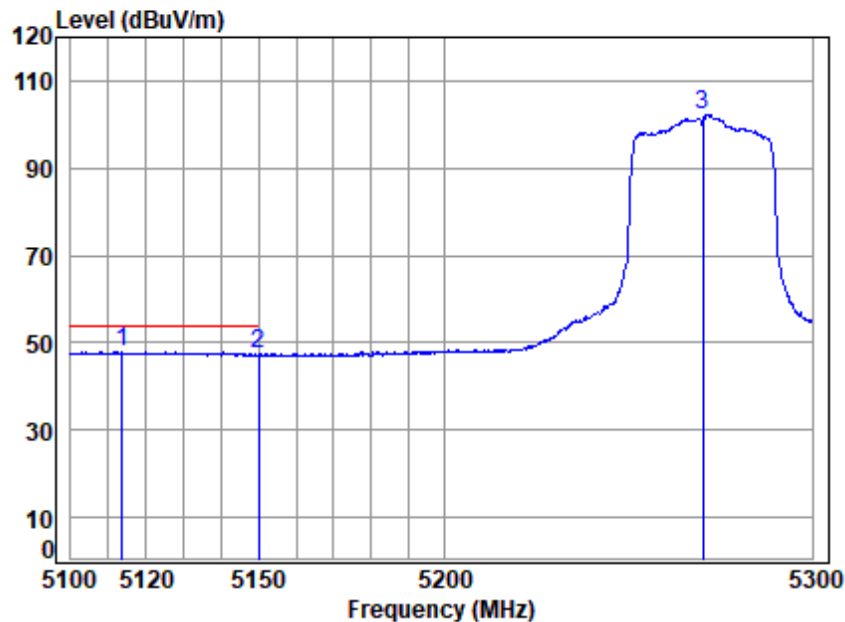


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5270 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 q 5113.554		7.52	33.97	35.33	41.82	47.98	54.00	-6.02 Average
2 5149.980		7.55	33.90	35.31	41.20	47.34	54.00	-6.66 Average
3 5270.000		7.64	34.14	35.25	95.70	102.23	-----	----- Average



Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

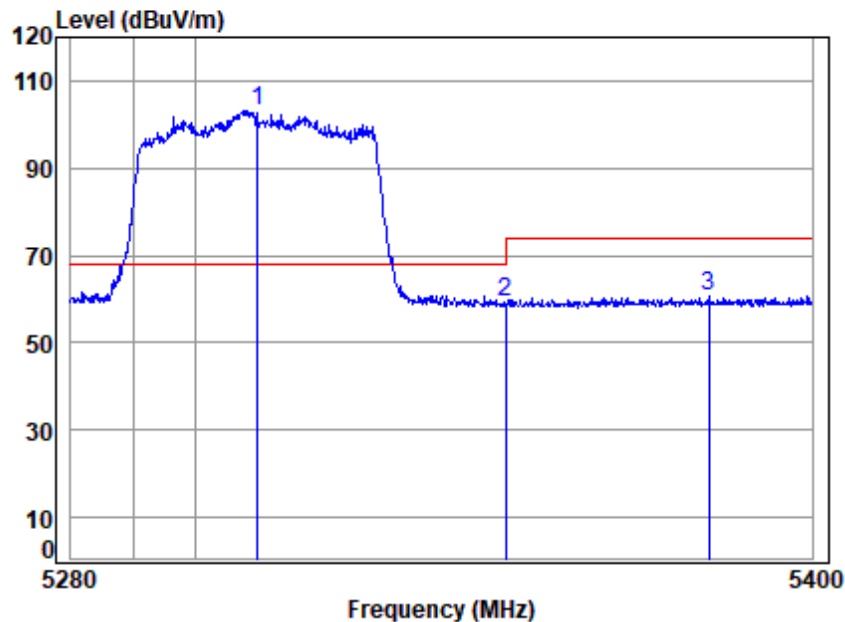


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5310 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q	5310.000	7.67	34.24	35.23	96.45	103.13	68.20	34.93	peak
2	5350.020	7.70	34.40	35.21	52.61	59.50	74.00	-14.50	peak
3	5383.158	7.73	34.53	35.19	53.62	60.69	74.00	-13.31	peak



Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

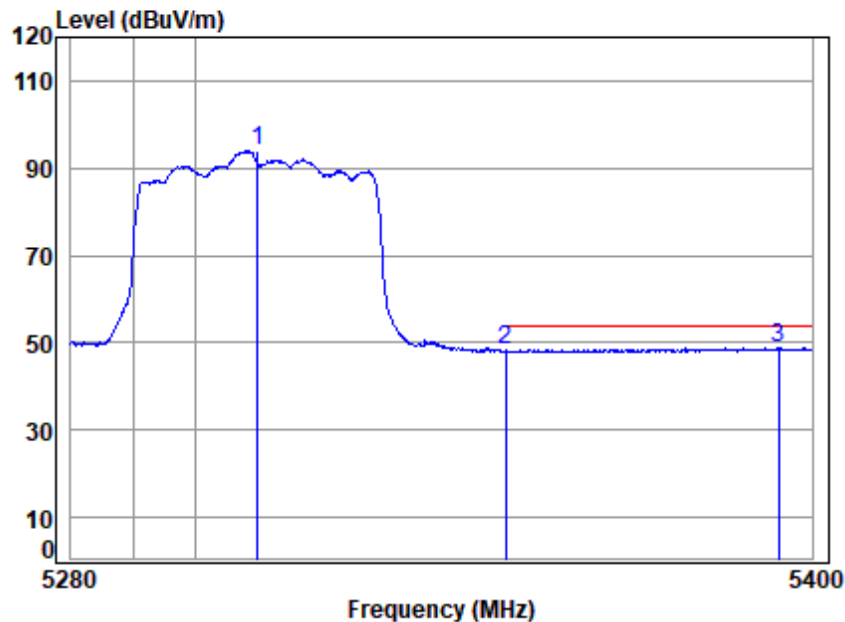


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5310 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5310.000	7.67	34.24	35.23	87.23	93.91	-----	----- Average
2	5350.020	7.70	34.40	35.21	41.41	48.30	54.00	-5.70 Average
3 q	5394.542	7.74	34.58	35.19	41.68	48.81	54.00	-5.19 Average



Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

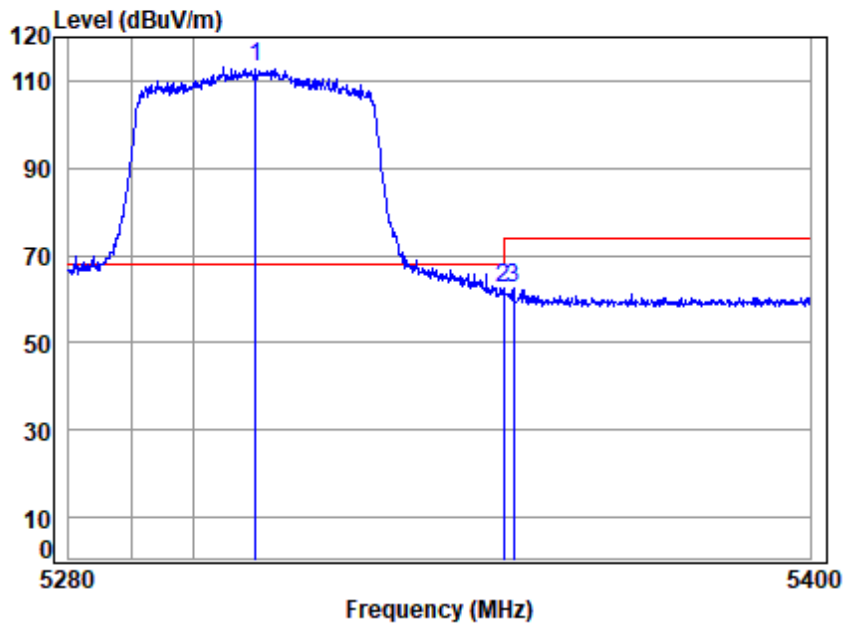


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5310 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 q	5310.000	7.67	34.24	35.23	106.47	113.15	68.20	44.95 Peak
2	5350.020	7.70	34.40	35.21	55.47	62.36	74.00	-11.64 Peak
3	5351.676	7.71	34.41	35.21	55.62	62.53	74.00	-11.47 Peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

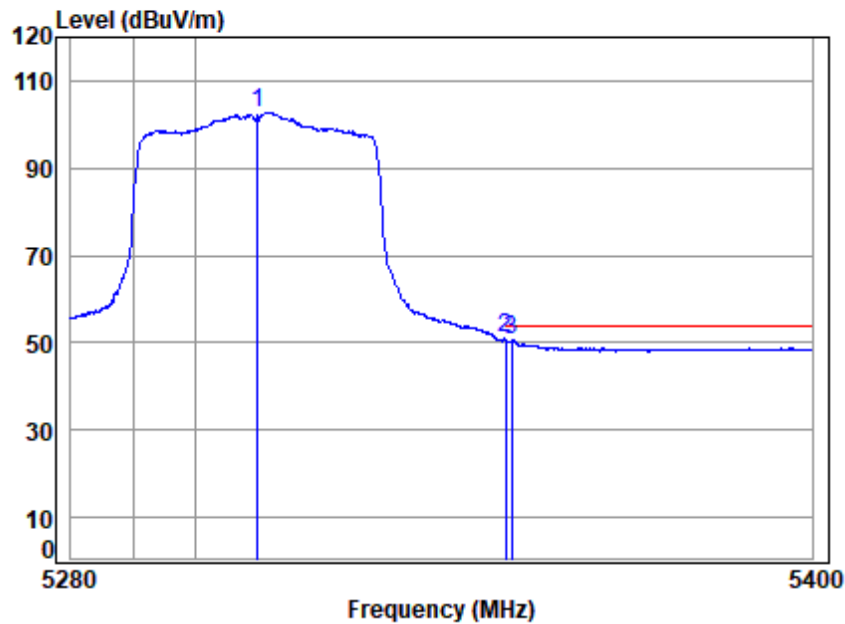


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5310 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5310.000	7.67	34.24	35.23	96.09	102.77	-----	-----	Average
2 q 5350.020	7.70	34.40	35.21	44.03	50.92	54.00	-3.08	Average
3 5351.075	7.71	34.40	35.21	43.76	50.66	54.00	-3.34	Average



Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

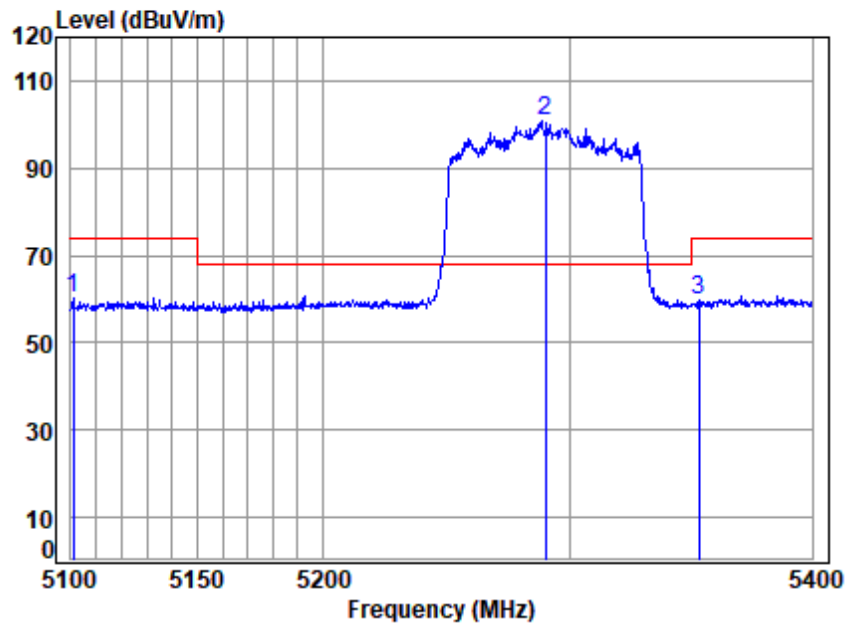


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5290 Band edge
: 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5100.875	7.51	34.00	35.34	53.96	60.13	74.00	-13.87	peak
2 q	5290.000	7.66	34.18	35.24	94.12	100.72	68.20	32.52	peak
3	5352.981	7.71	34.41	35.21	52.90	59.81	74.00	-14.19	peak



Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

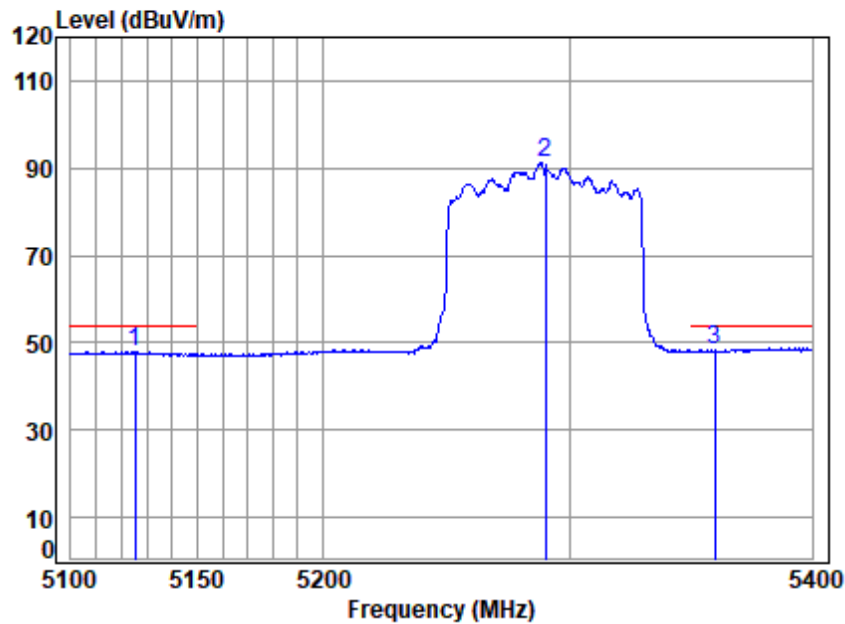


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5290 Band edge
: 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5125.424	7.53	33.95	35.32	41.81	47.97	54.00	-6.03	Average
2	5290.000	7.66	34.18	35.24	84.73	91.33	-----	-----	Average
3 q	5359.717	7.71	34.44	35.20	41.31	48.26	54.00	-5.74	Average



Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

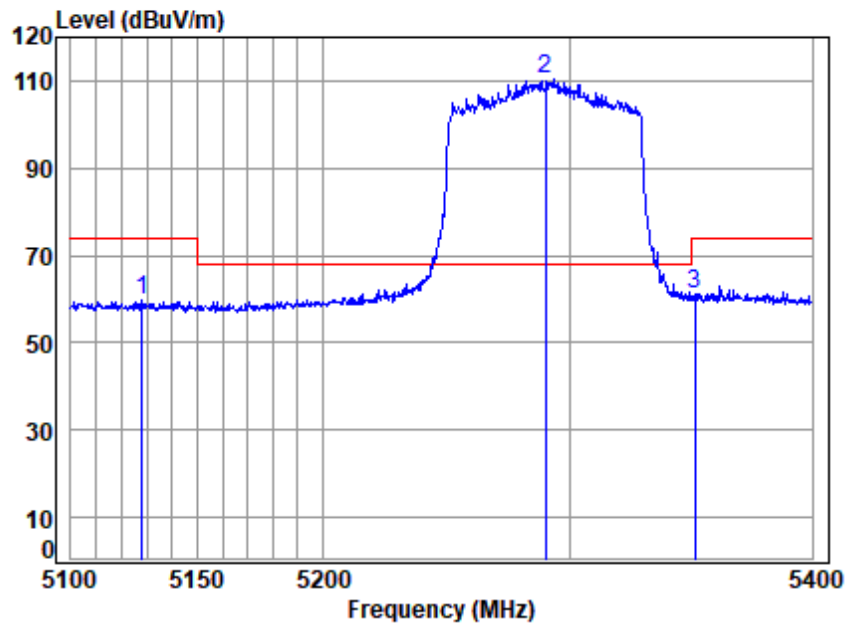

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5290 Band edge
: 5G WIFI 11AX80

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5128.062	7.53	33.94	35.32	53.47	59.62	74.00	-14.38 Peak
2 q	5290.000	7.66	34.18	35.24	103.94	110.54	68.20	42.34 Peak
3	5351.452	7.71	34.41	35.21	54.36	61.27	74.00	-12.73 Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

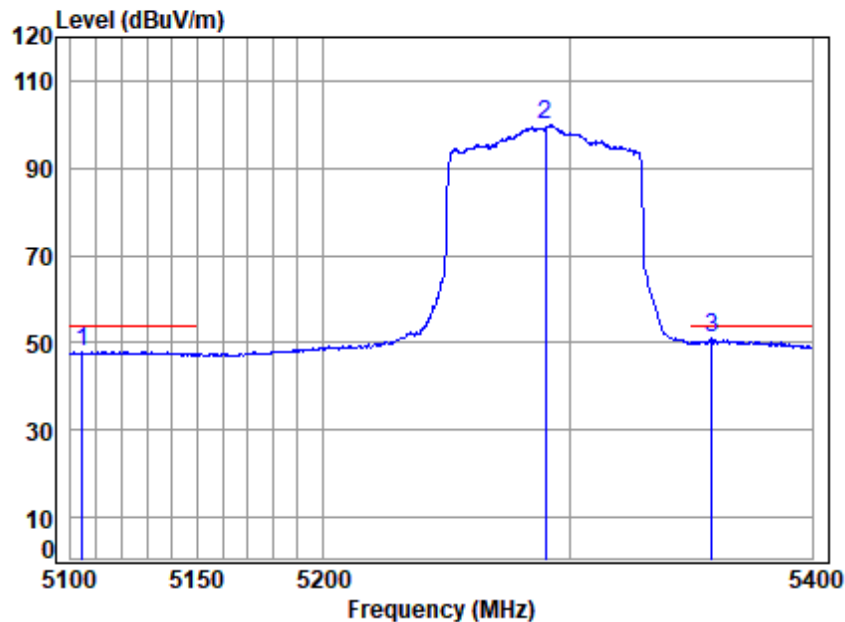

Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5290 Band edge
: 5G WIFI 11AX80

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5104.667	7.51	33.99	35.33	41.83	48.00	54.00	-6.00 Average
2	5290.000	7.66	34.18	35.24	93.19	99.79	-----	----- Average
3 q	5358.492	7.71	34.43	35.20	44.09	51.03	54.00	-2.97 Average




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR231000342403

Page: 290 of 1015

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:middle

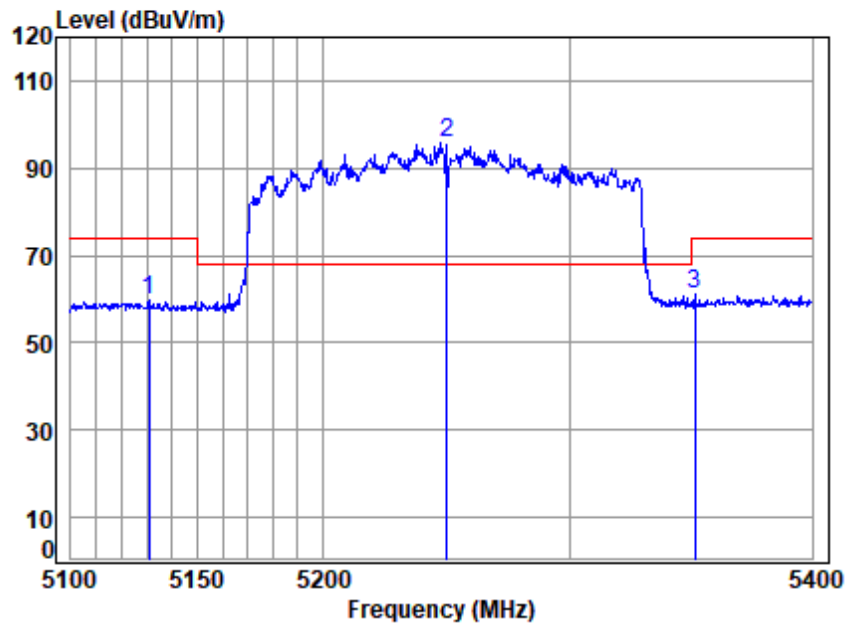

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5250 Band edge
: 5G WIFI 11AX160

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5130.700	7.53	33.94	35.32	53.84	59.99	74.00	-14.01	peak
2 q	5250.000	7.63	34.10	35.26	89.18	95.65	68.20	27.45	peak
3	5351.452	7.71	34.41	35.21	54.01	60.92	74.00	-13.08	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:middle

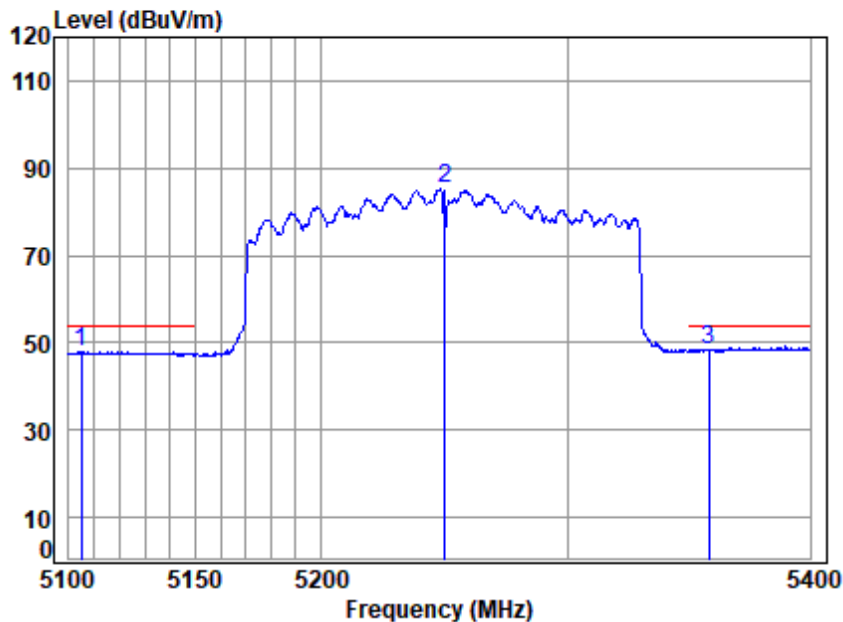


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5250 Band edge
: 5G WIFI 11AX160

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5104.958	7.51	33.99	35.33	41.92	48.09	54.00	-5.91	Average
2	5250.000	7.63	34.10	35.26	78.95	85.42	-----	-----	Average
3 q	5358.186	7.71	34.43	35.20	41.57	48.51	54.00	-5.49	Average



Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:middle

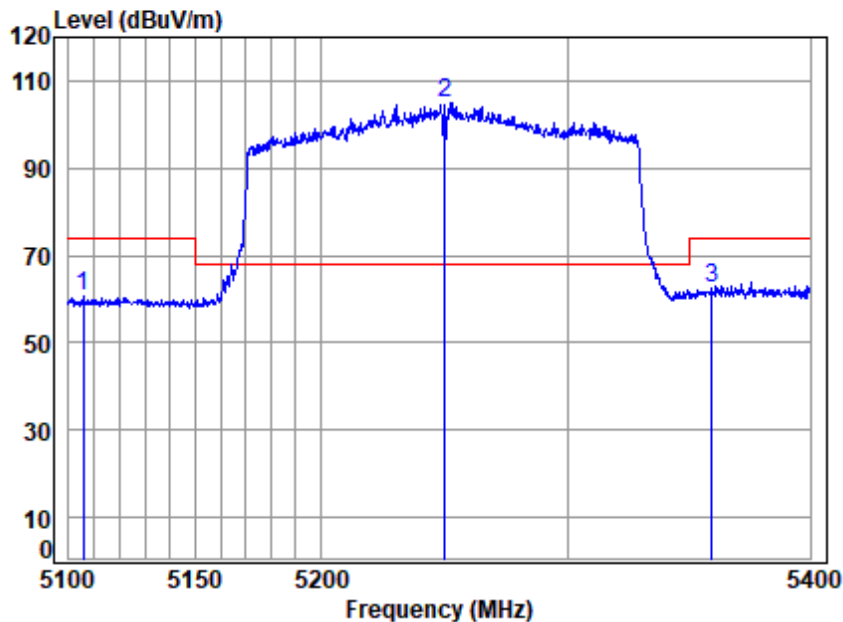


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5250 Band edge
: 5G WIFI 11AX160

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5105.542	7.51	33.99	35.33	54.51	60.68	74.00	-13.32	Peak
2 q	5250.000	7.63	34.10	35.26	98.61	105.08	68.20	36.88	Peak
3	5359.411	7.71	34.44	35.20	55.53	62.48	74.00	-11.52	Peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:middle

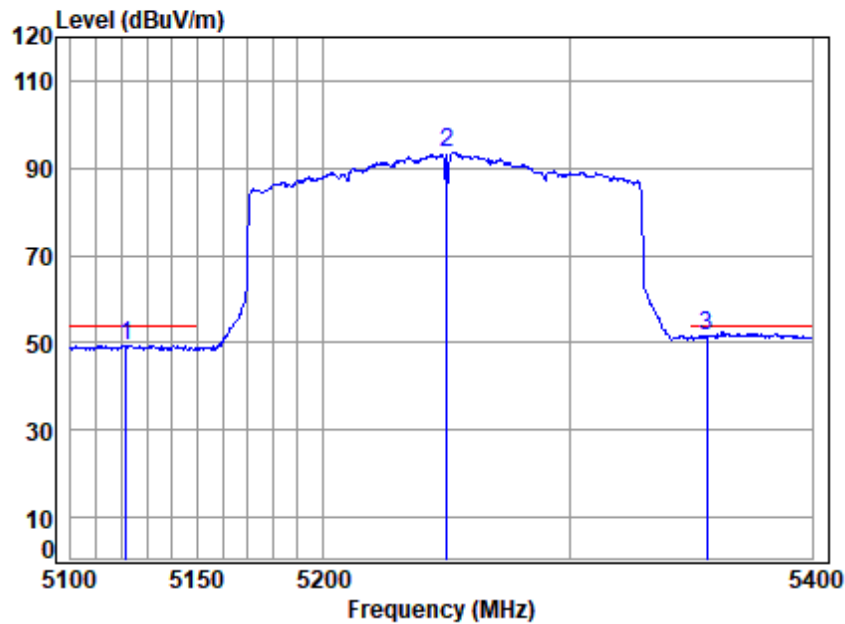


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5250 Band edge
: 5G WIFI 11AX160

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5121.910	7.53	33.96	35.33	43.26	49.42	54.00	-4.58 Average
2	5250.000	7.63	34.10	35.26	87.13	93.60	-----	----- Average
3 q	5356.348	7.71	34.43	35.20	44.79	51.73	54.00	-2.27 Average



Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

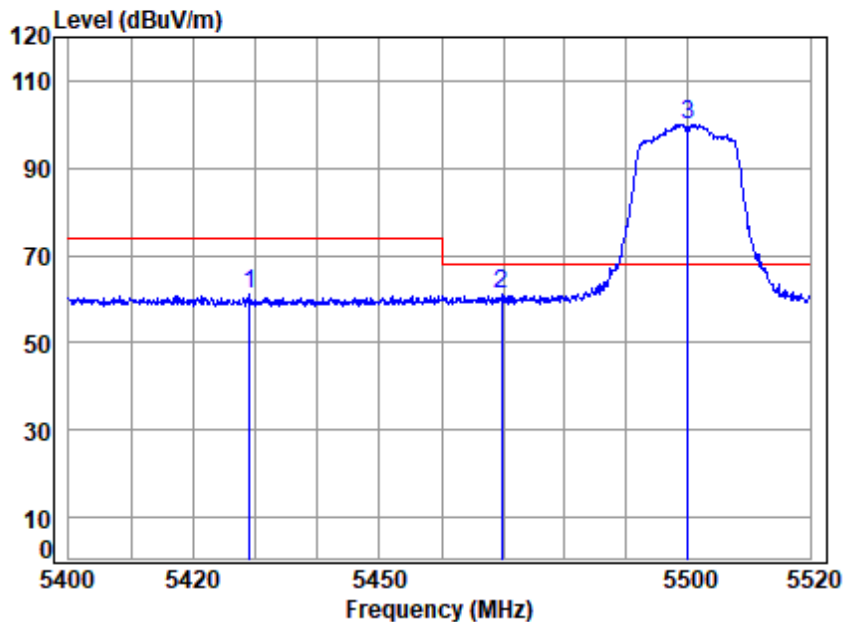


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5500 Band edge
: 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5429.037	7.76	34.66	35.17	53.93	61.18	74.00	-12.82	peak
2	5469.759	7.79	34.62	35.15	53.86	61.12	68.20	-7.08	peak
3 q	5500.000	7.82	34.50	35.13	92.90	100.09	68.20	31.89	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

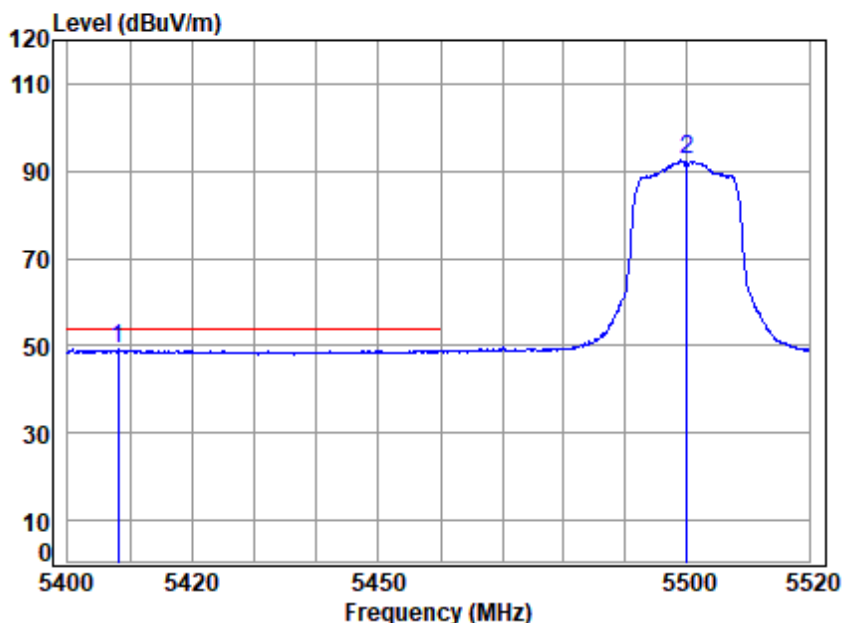


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5500 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5408.077	7.75	34.62	35.18	41.90	49.09	54.00	-4.91	Average
2 5500.000	7.82	34.50	35.13	85.23	92.42	-----	-----	Average



Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

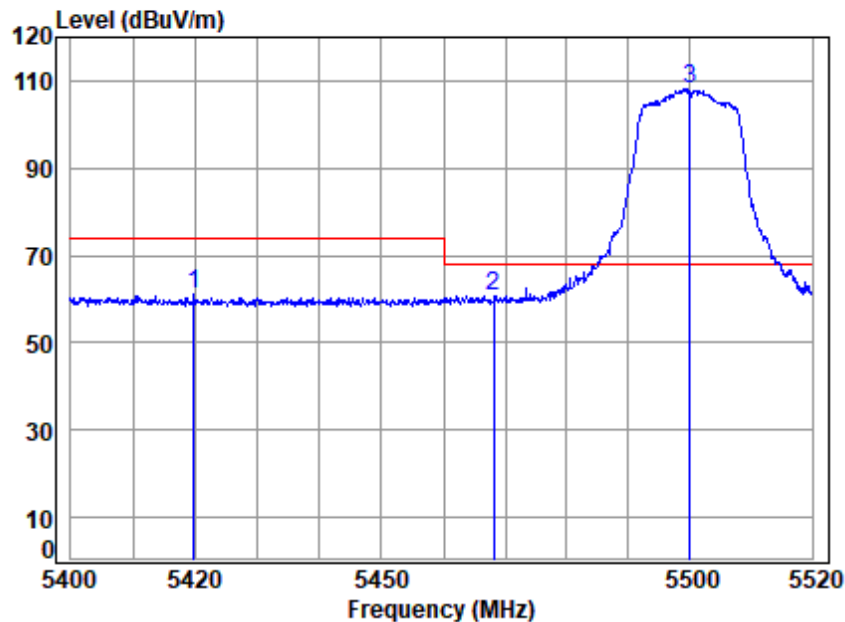


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5500 Band edge
: 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5419.738	7.76	34.64	35.17	53.84	61.07	74.00	-12.93	Peak
2	5468.197	7.79	34.63	35.15	53.39	60.66	68.20	-7.54	peak
3 q	5500.000	7.82	34.50	35.13	101.10	108.29	68.20	40.09	Peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

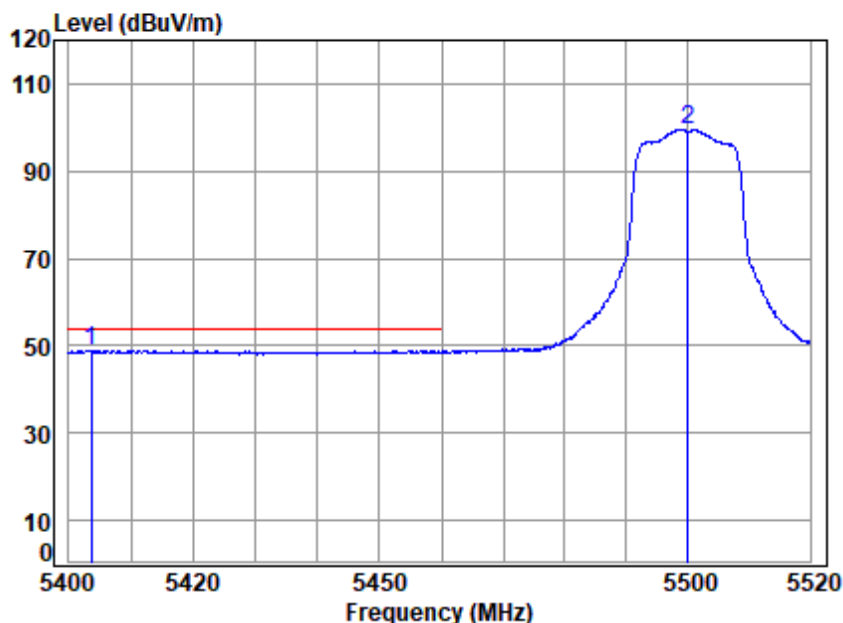


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5500 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5403.562	7.75	34.61	35.18	41.75	48.93	54.00	-5.07	Average
2 5500.000	7.82	34.50	35.13	92.48	99.67	-----	-----	Average



Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

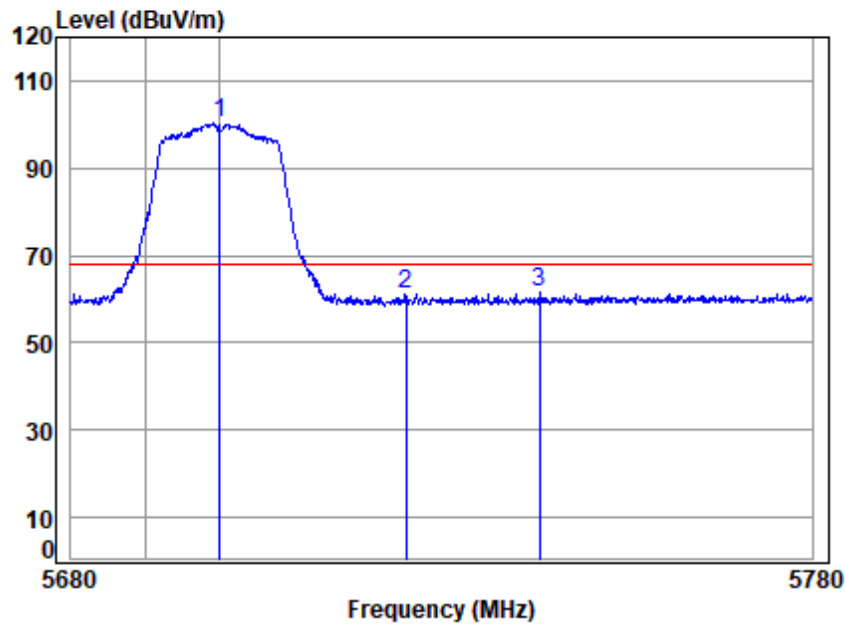


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5700 Band edge
: 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q	5700.000	7.96	34.30	35.04	93.02	100.24	68.20	32.04	peak
2	5725.000	7.98	34.25	35.03	53.98	61.18	68.20	-7.02	peak
3	5742.997	7.99	34.21	35.02	54.33	61.51	68.20	-6.69	peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

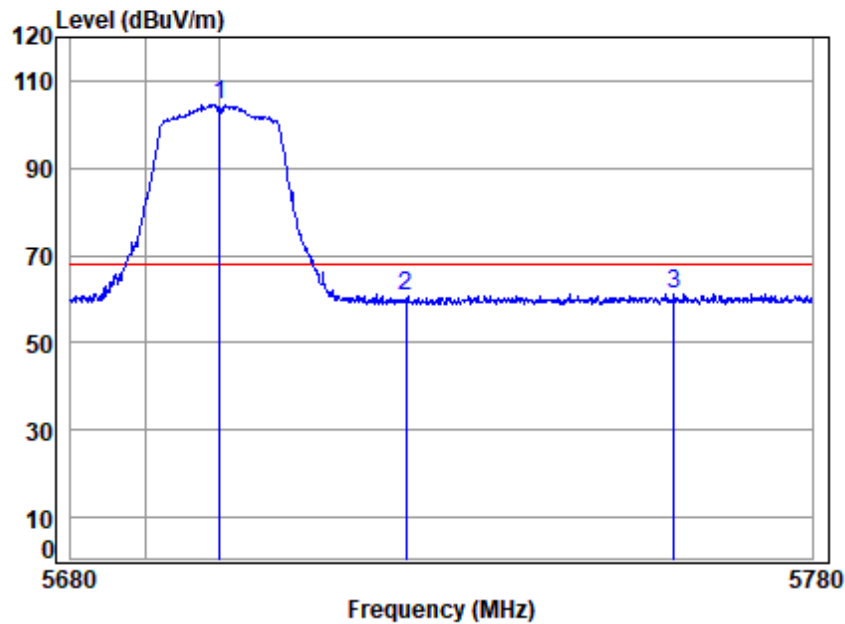


Site : chamber
Condition: 3m VERTICAL
Job No : 03424AT
Mode : 5700 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 q 5700.000		7.96	34.30	35.04	97.28	104.50	68.20	36.30 Peak
2 5725.000		7.98	34.25	35.03	53.46	60.66	68.20	-7.54 Peak
3 5761.268		8.01	34.22	35.01	54.06	61.28	68.20	-6.92 Peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

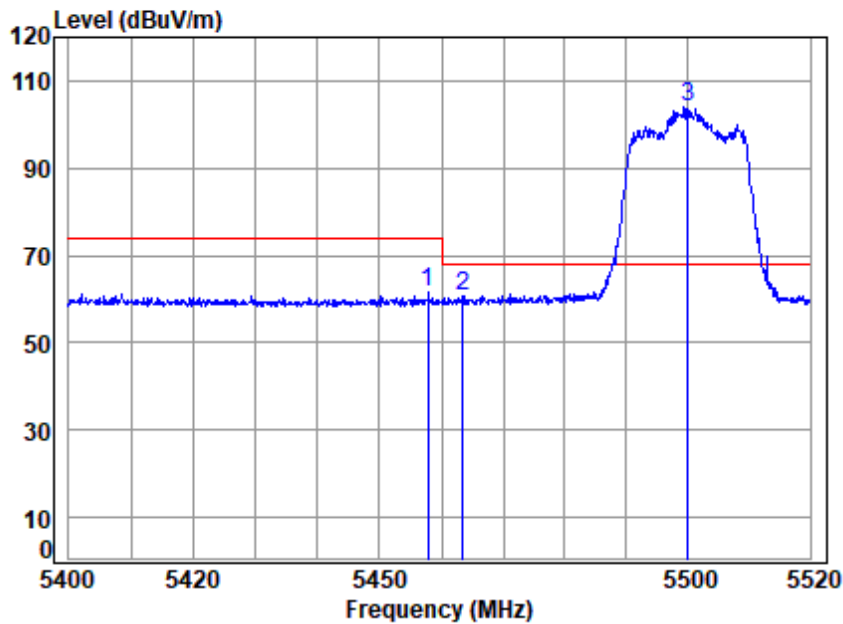


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5500 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5457.871	7.79	34.67	35.15	54.16	61.47	74.00	-12.53	peak
2	5463.392	7.79	34.65	35.15	53.44	60.73	68.20	-7.47	peak
3 q	5500.000	7.82	34.50	35.13	96.72	103.91	68.20	35.71	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

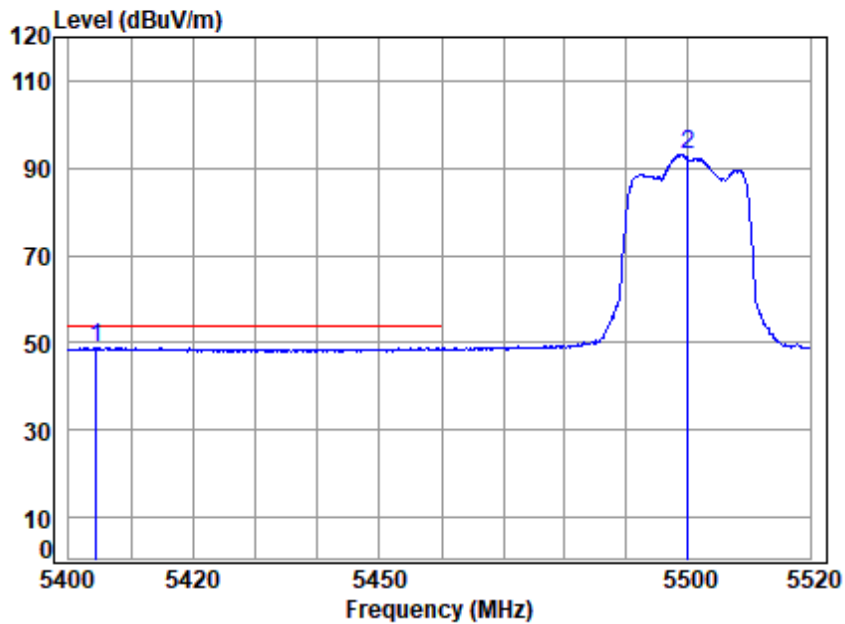

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03424AT
Mode : 5500 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5404.393	7.75	34.61	35.18	41.85	49.03	54.00	-4.97	Average
2 5500.000	7.82	34.50	35.13	85.86	93.05	-----	-----	Average

