






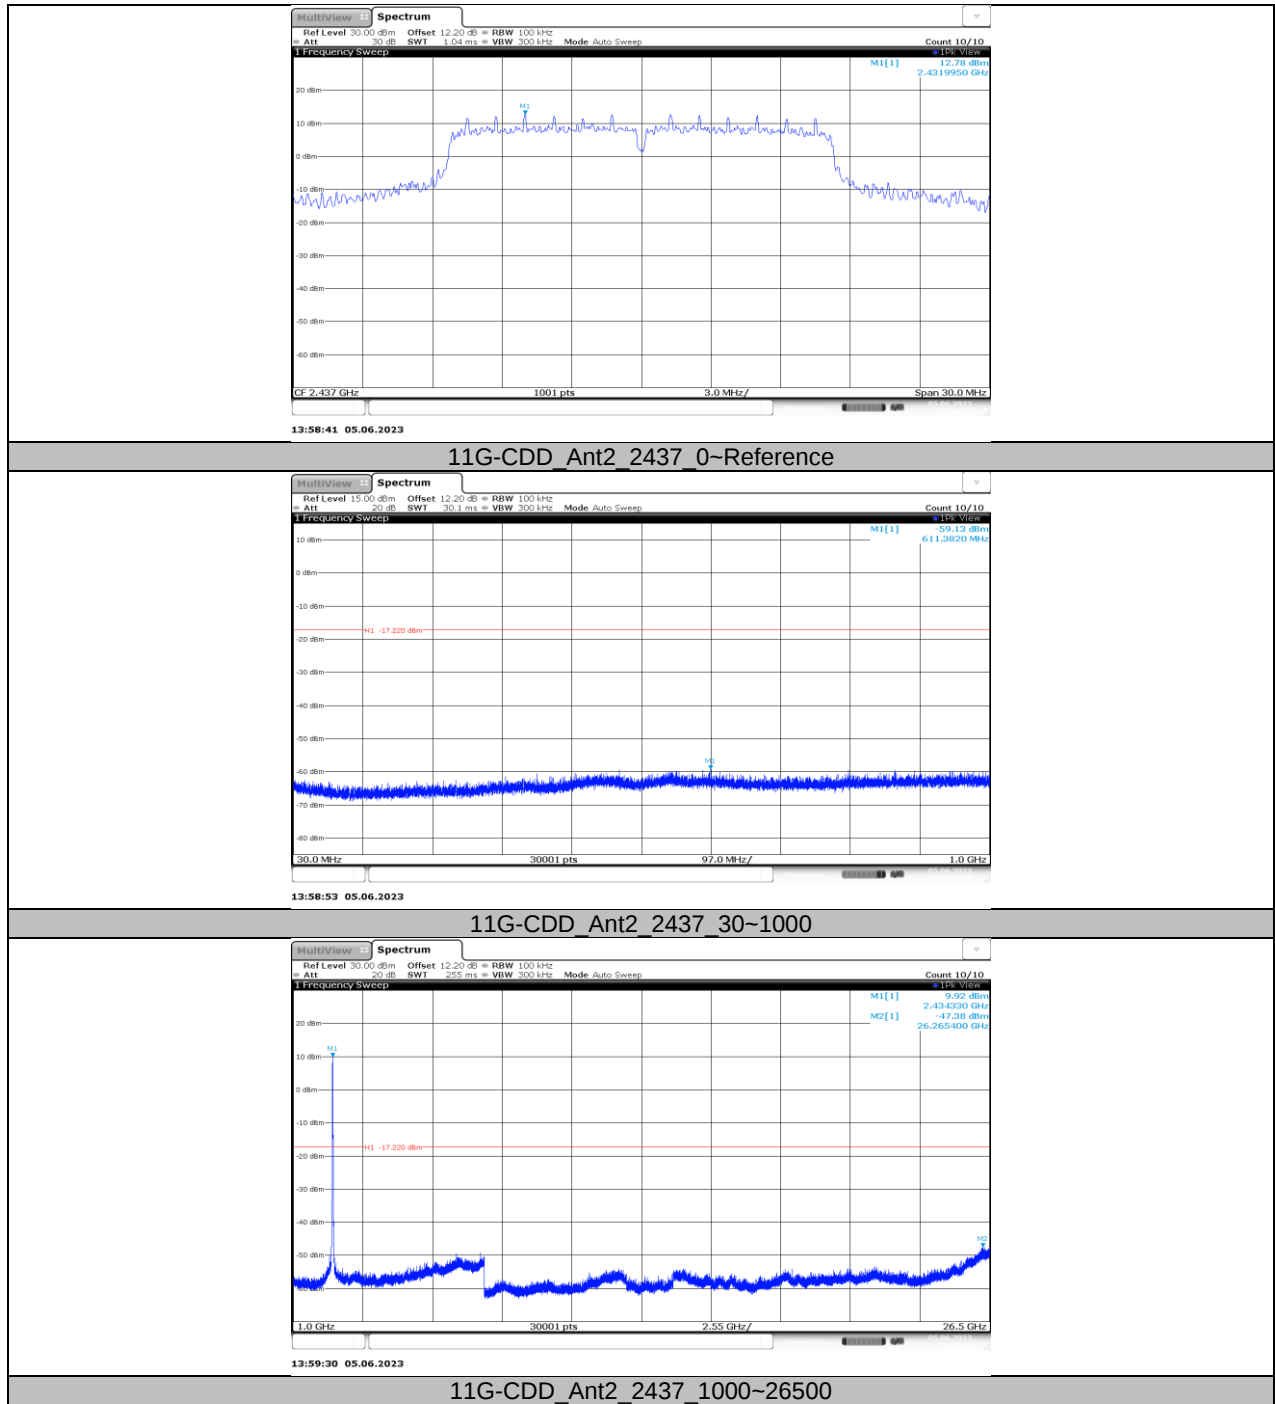




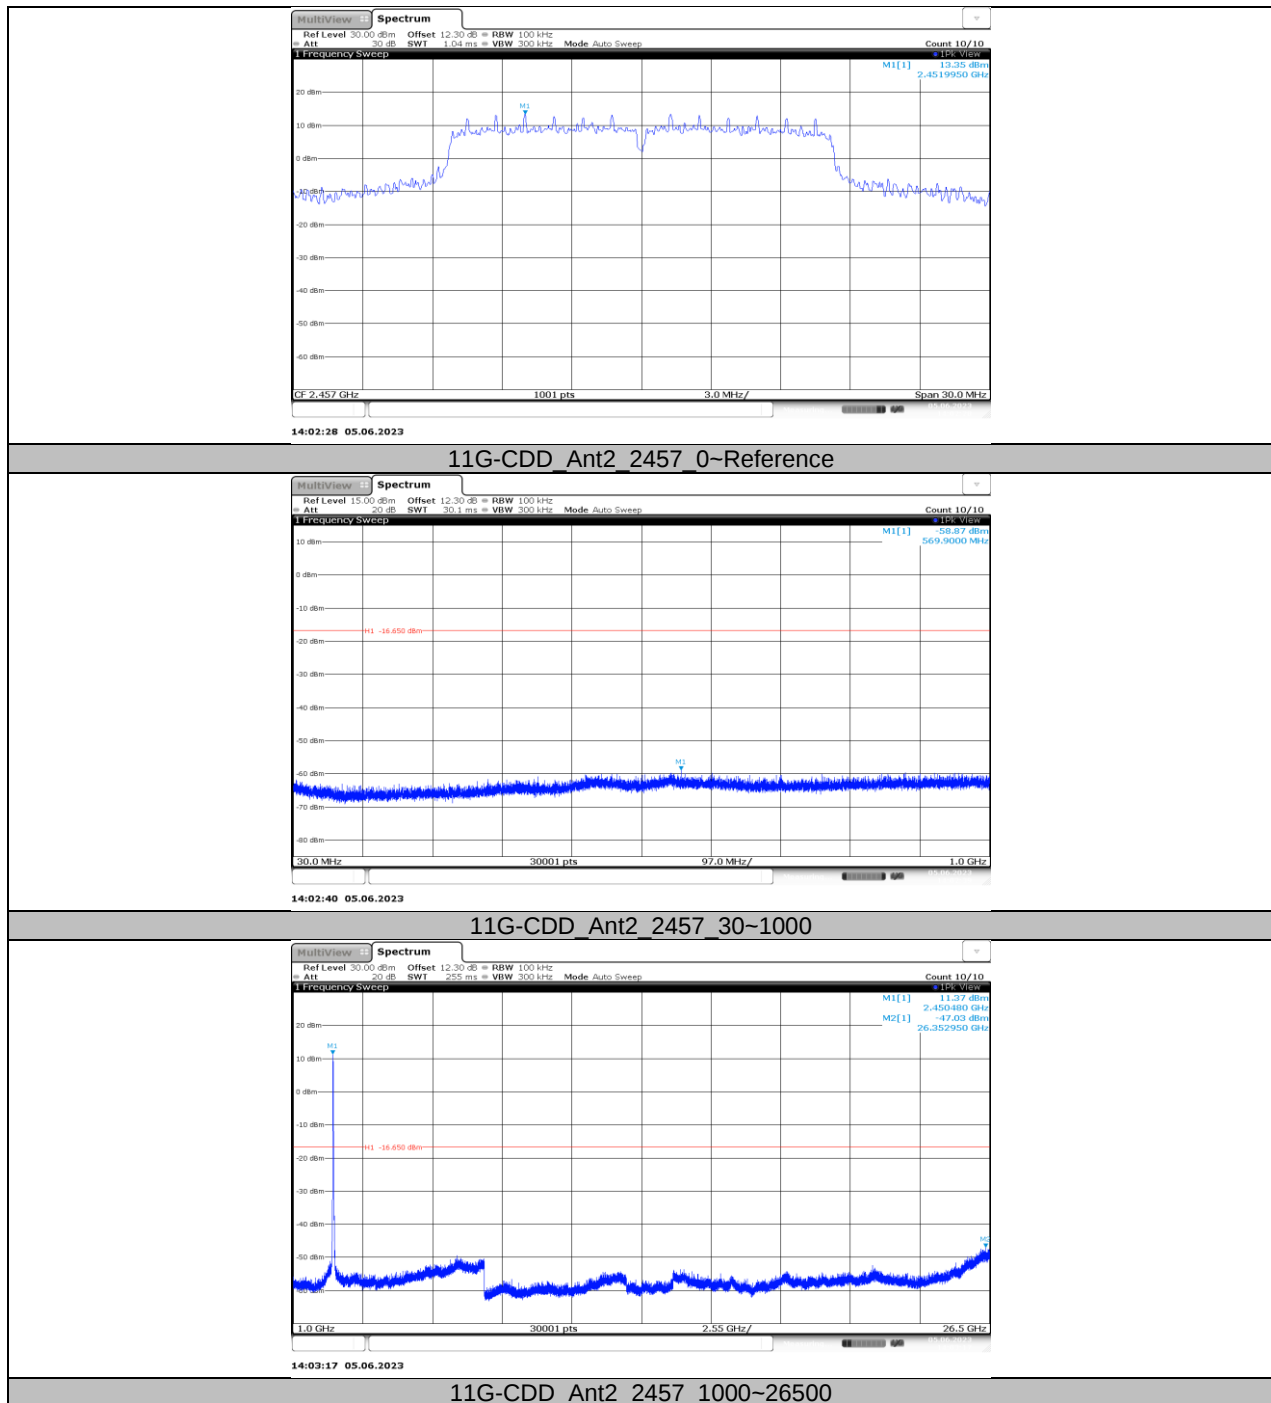


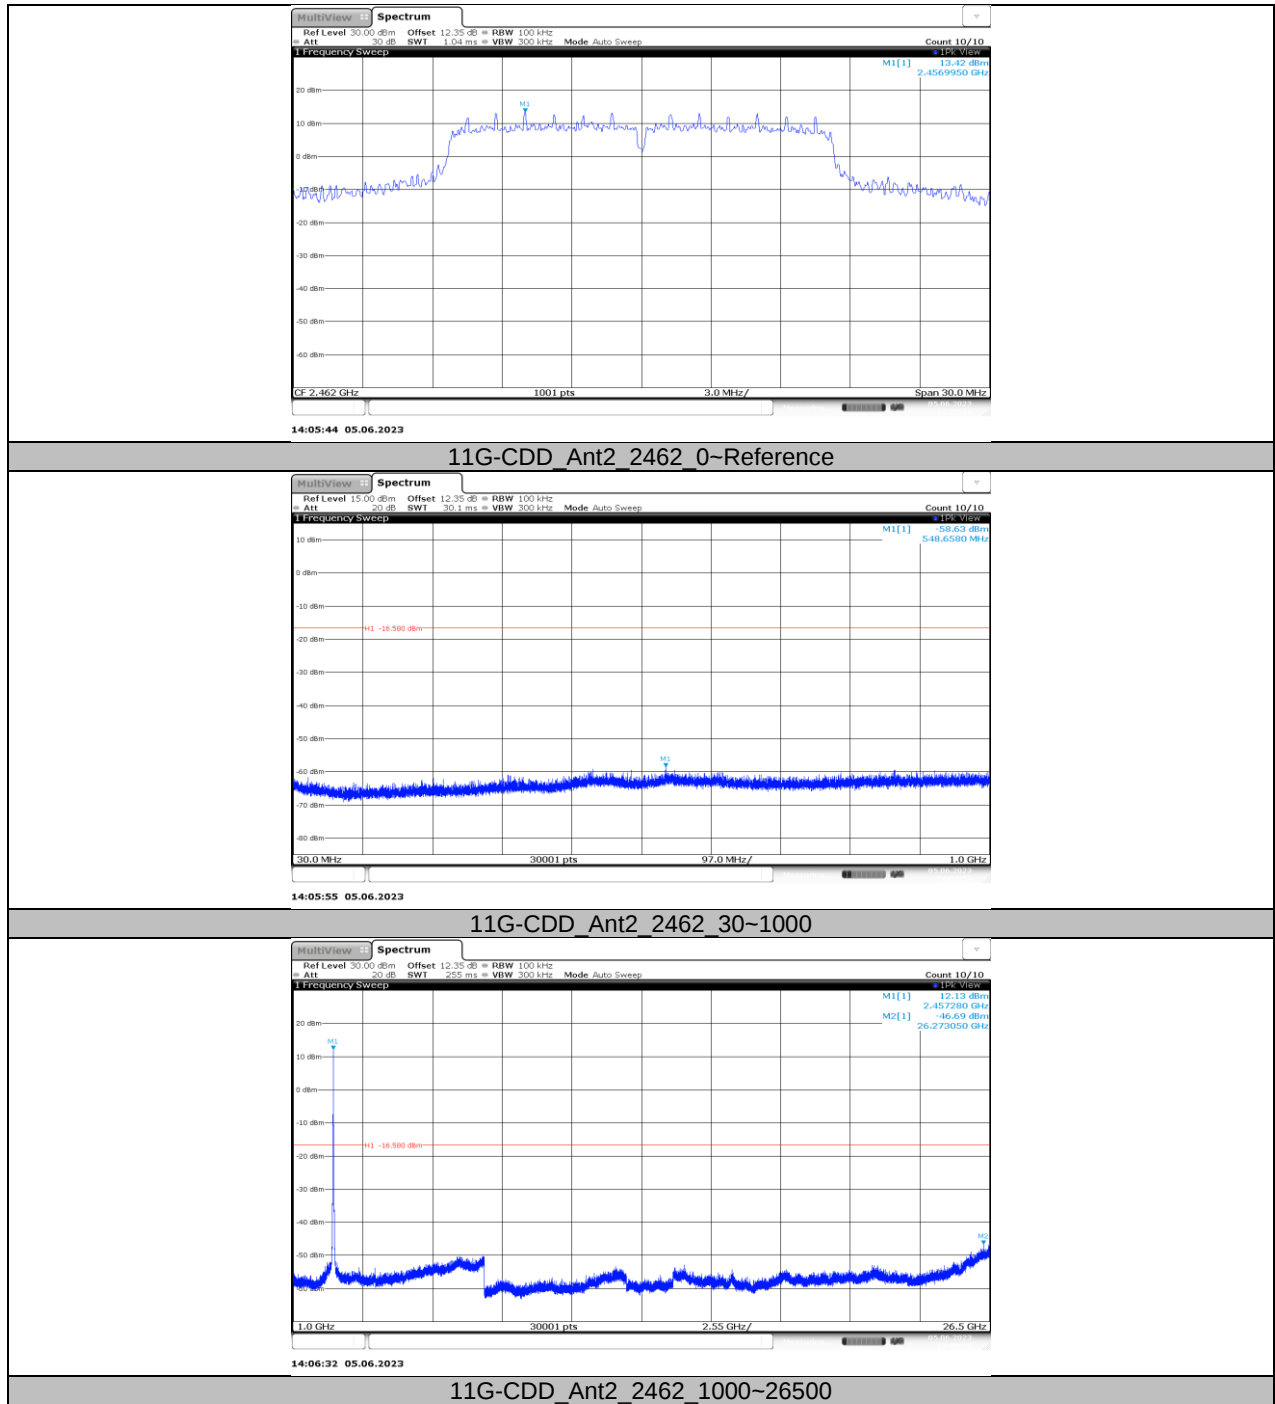


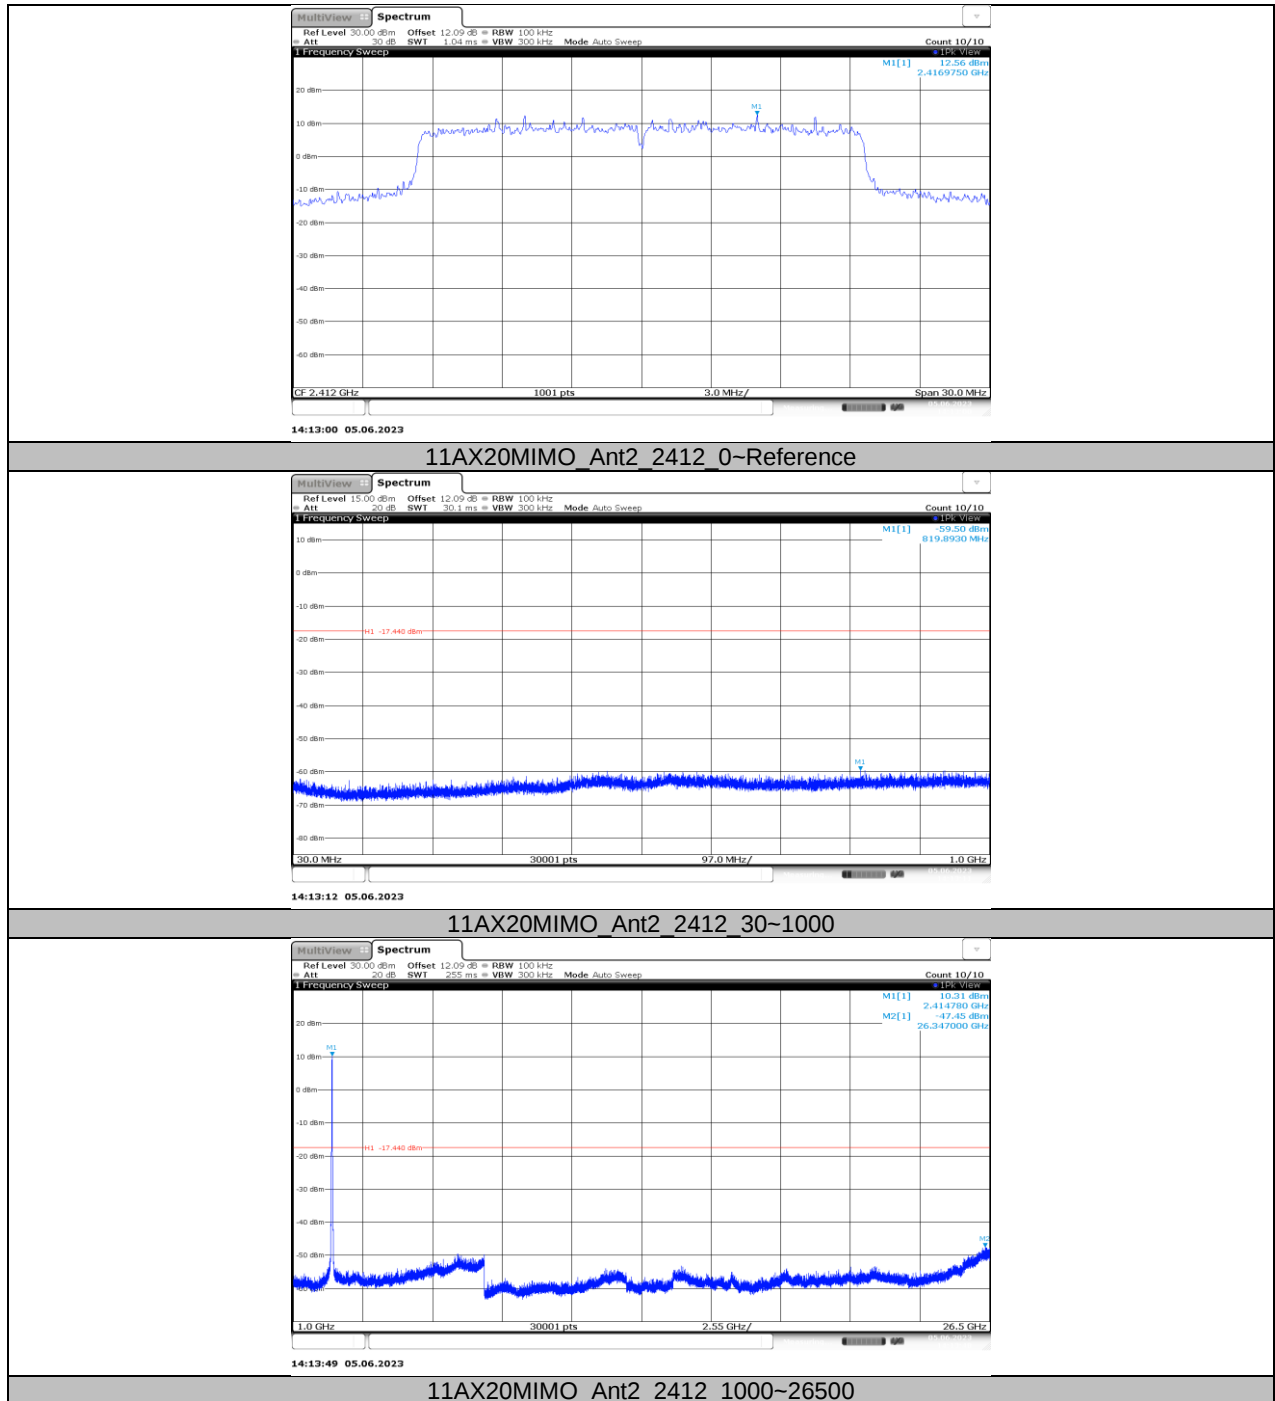

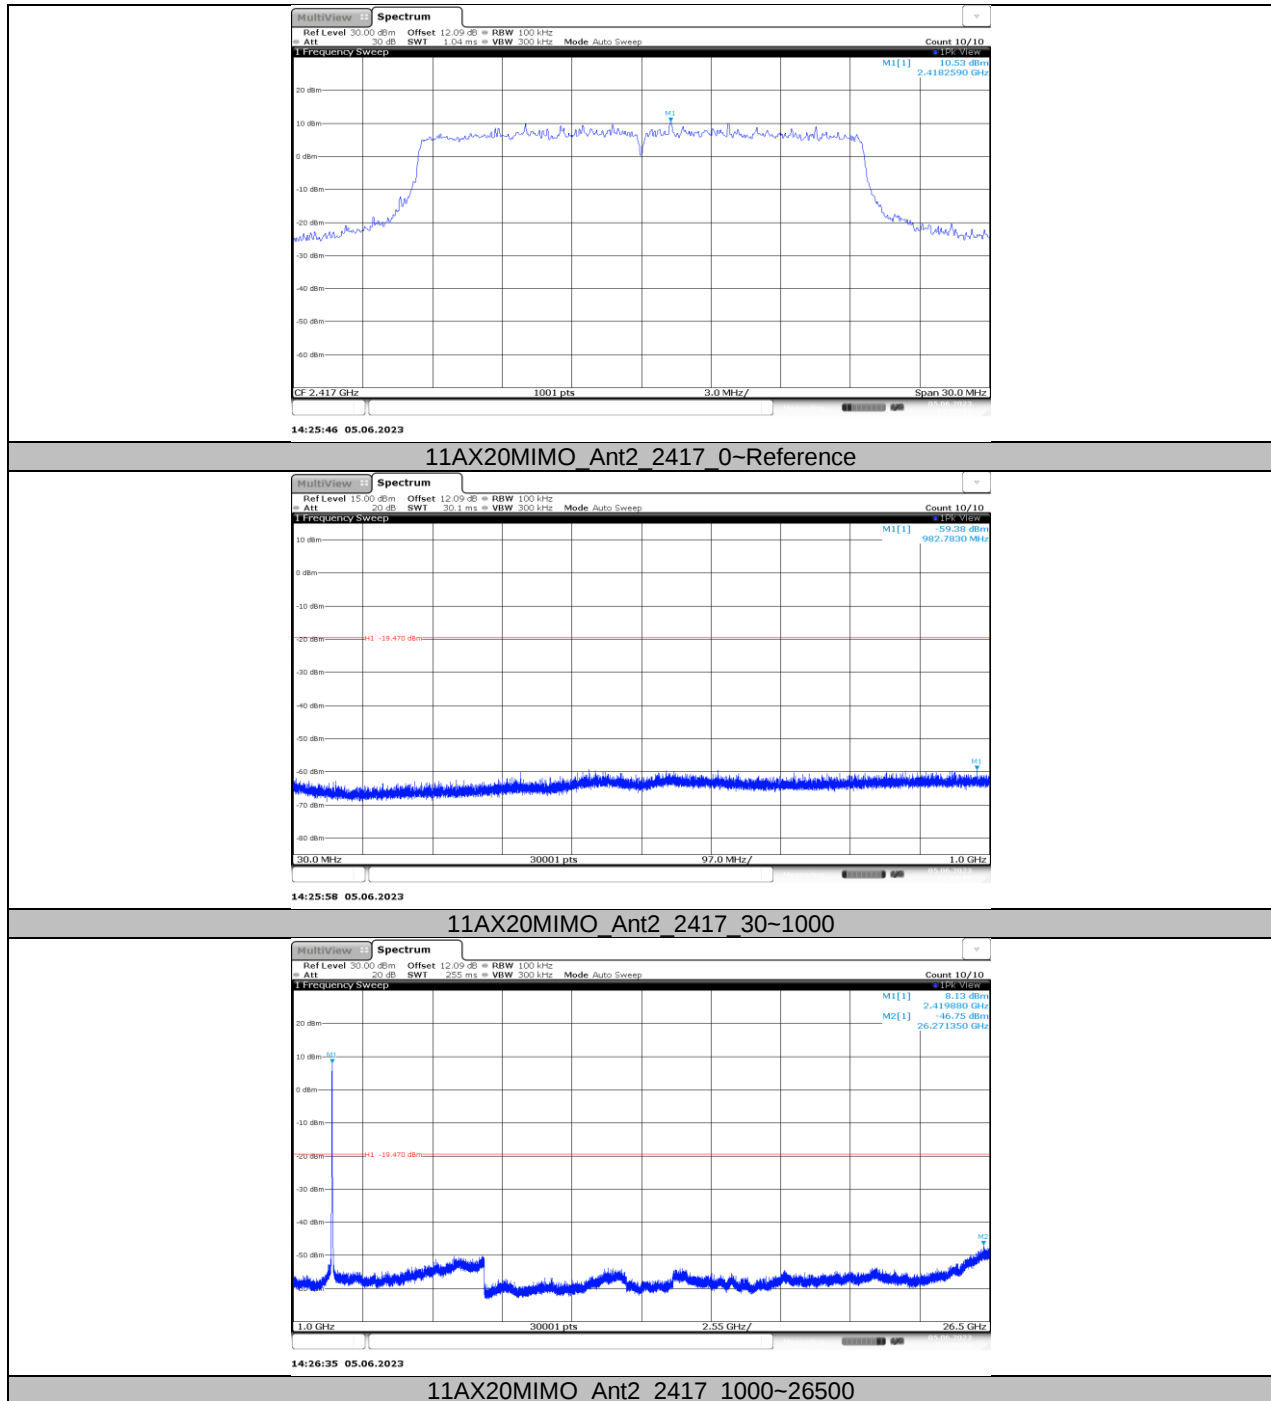


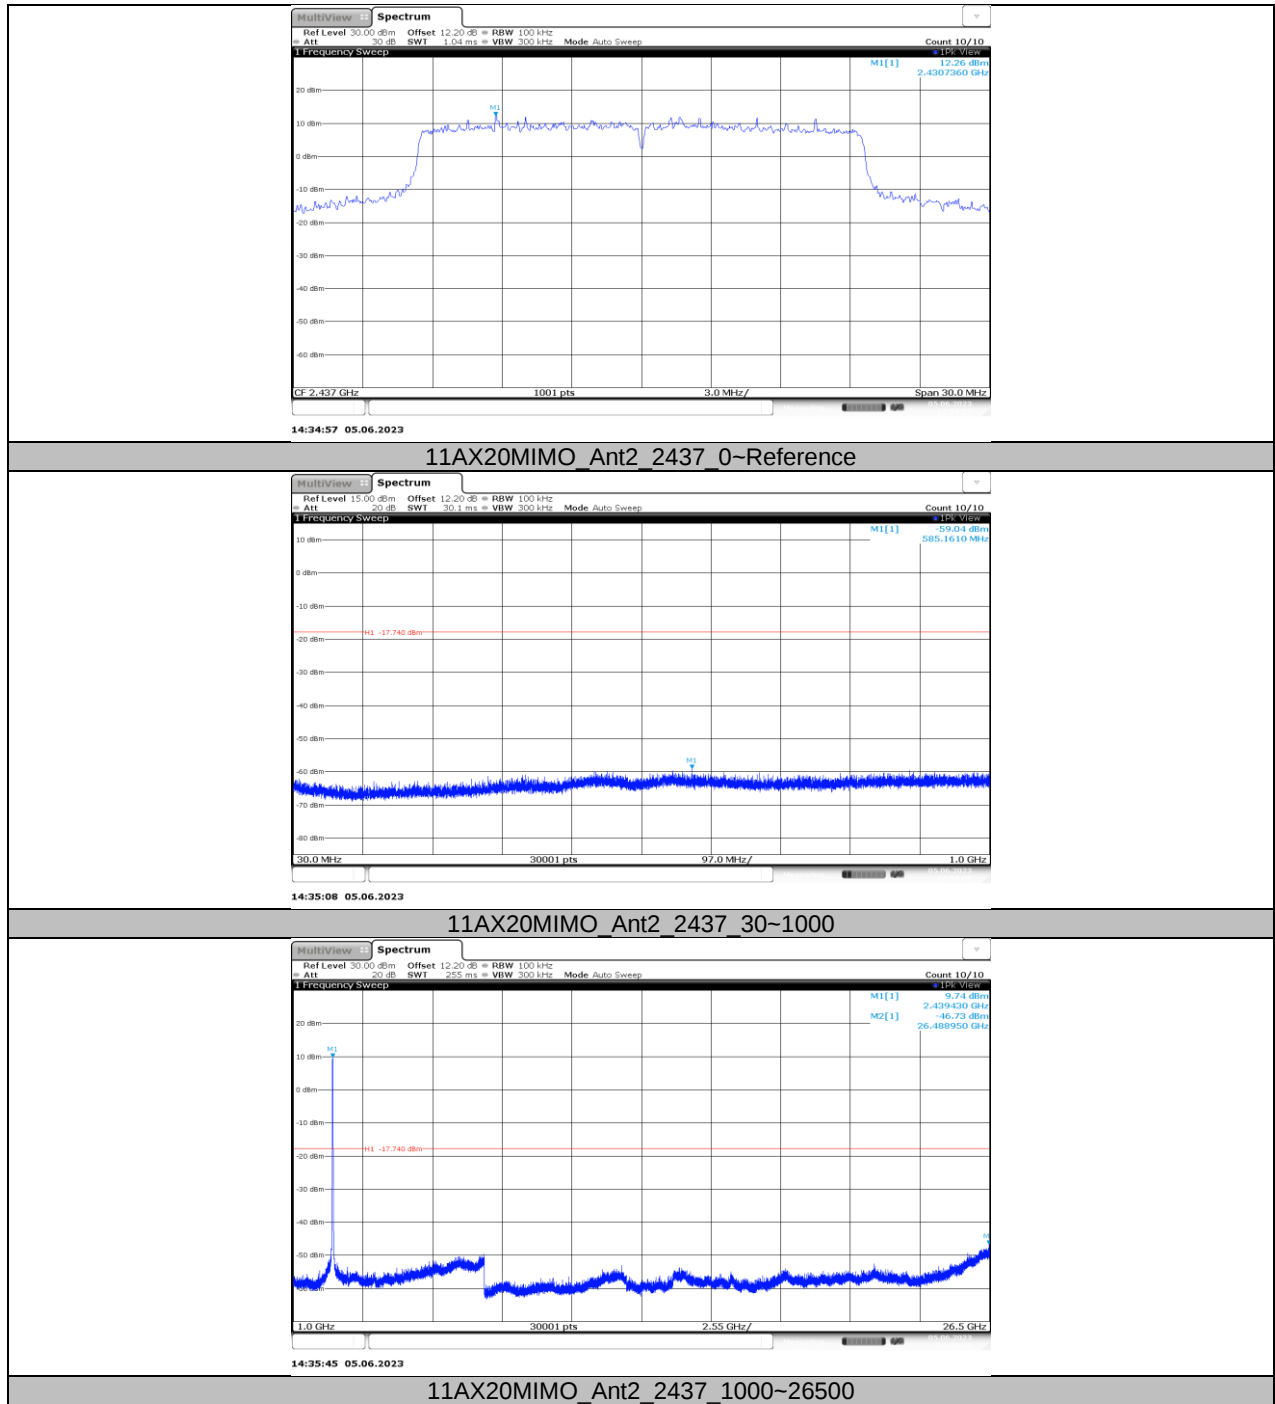

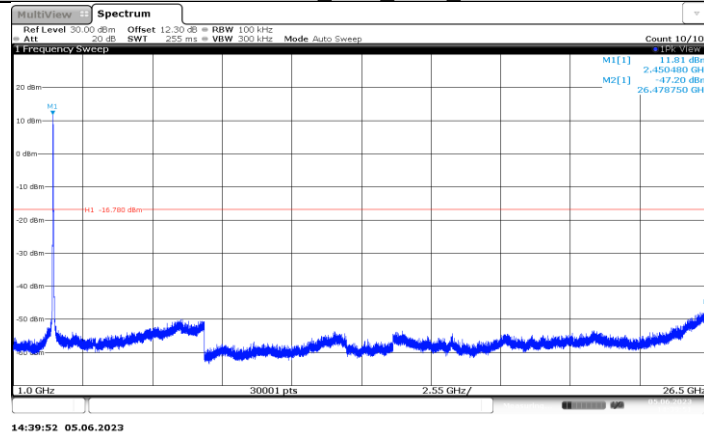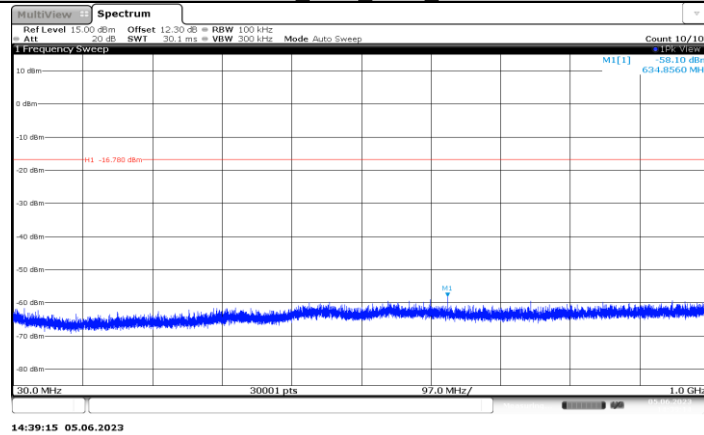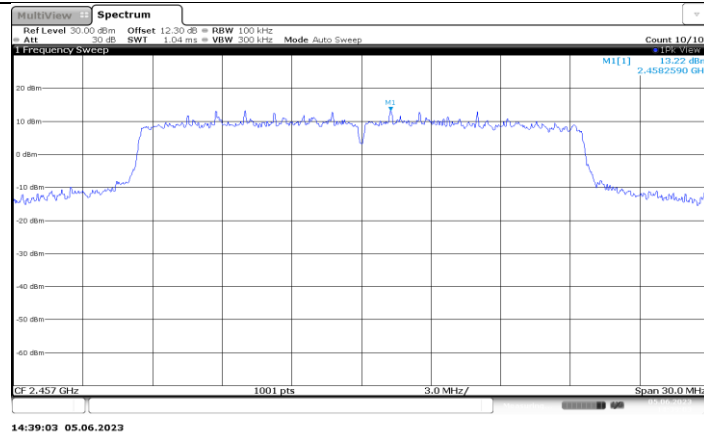


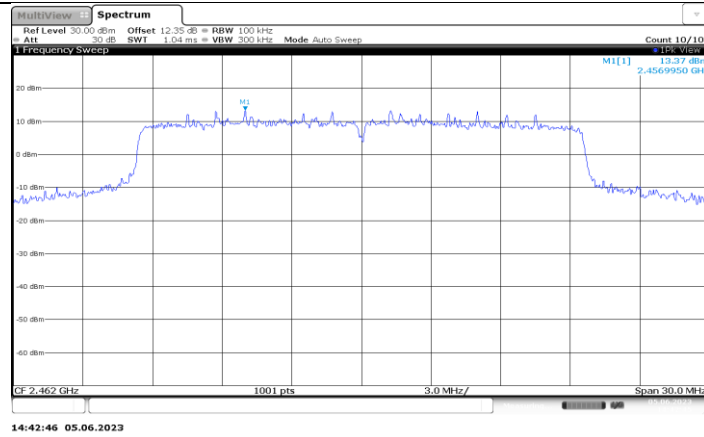


11AX20MIMO_Ant2_2462_0-Reference

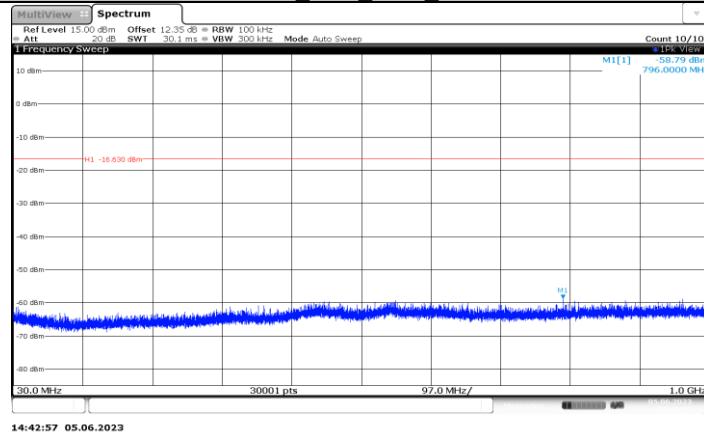



11AX20MIMO_Ant2_2462_30-1000

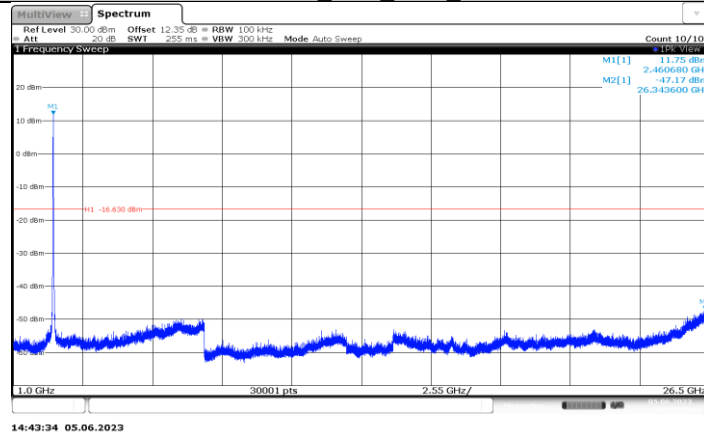



11AX20MIMO_Ant2_2462_1000-26500

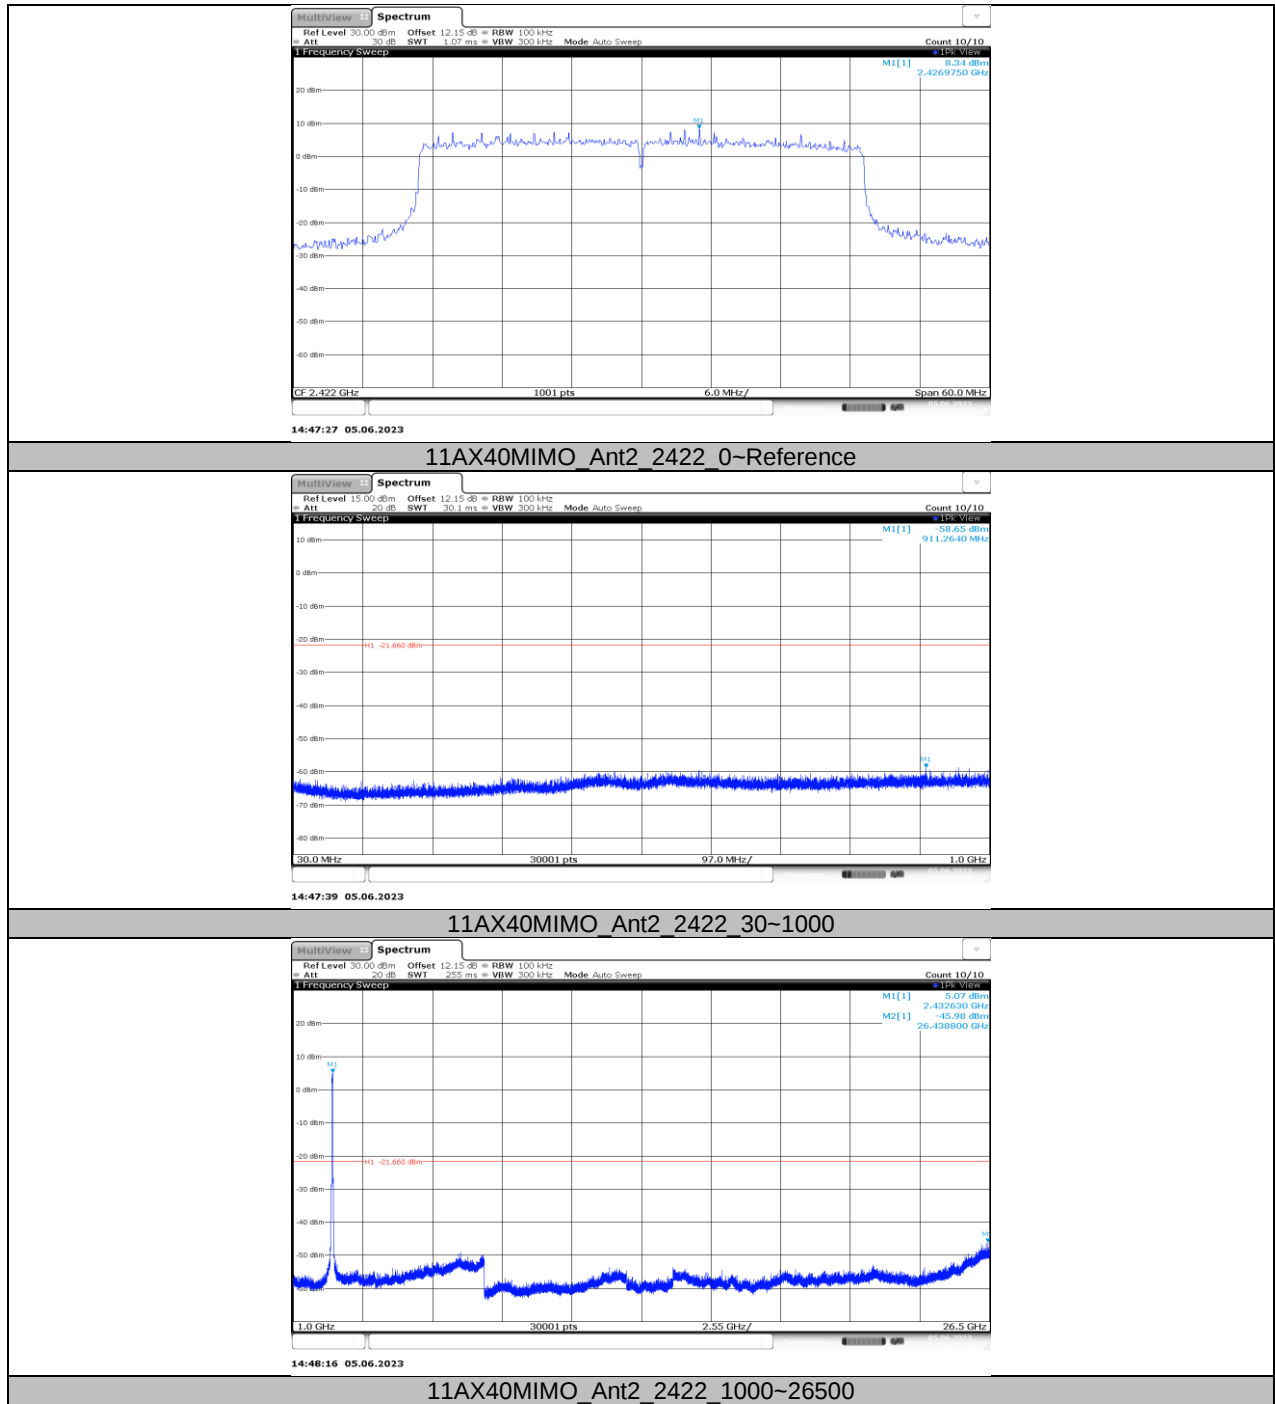

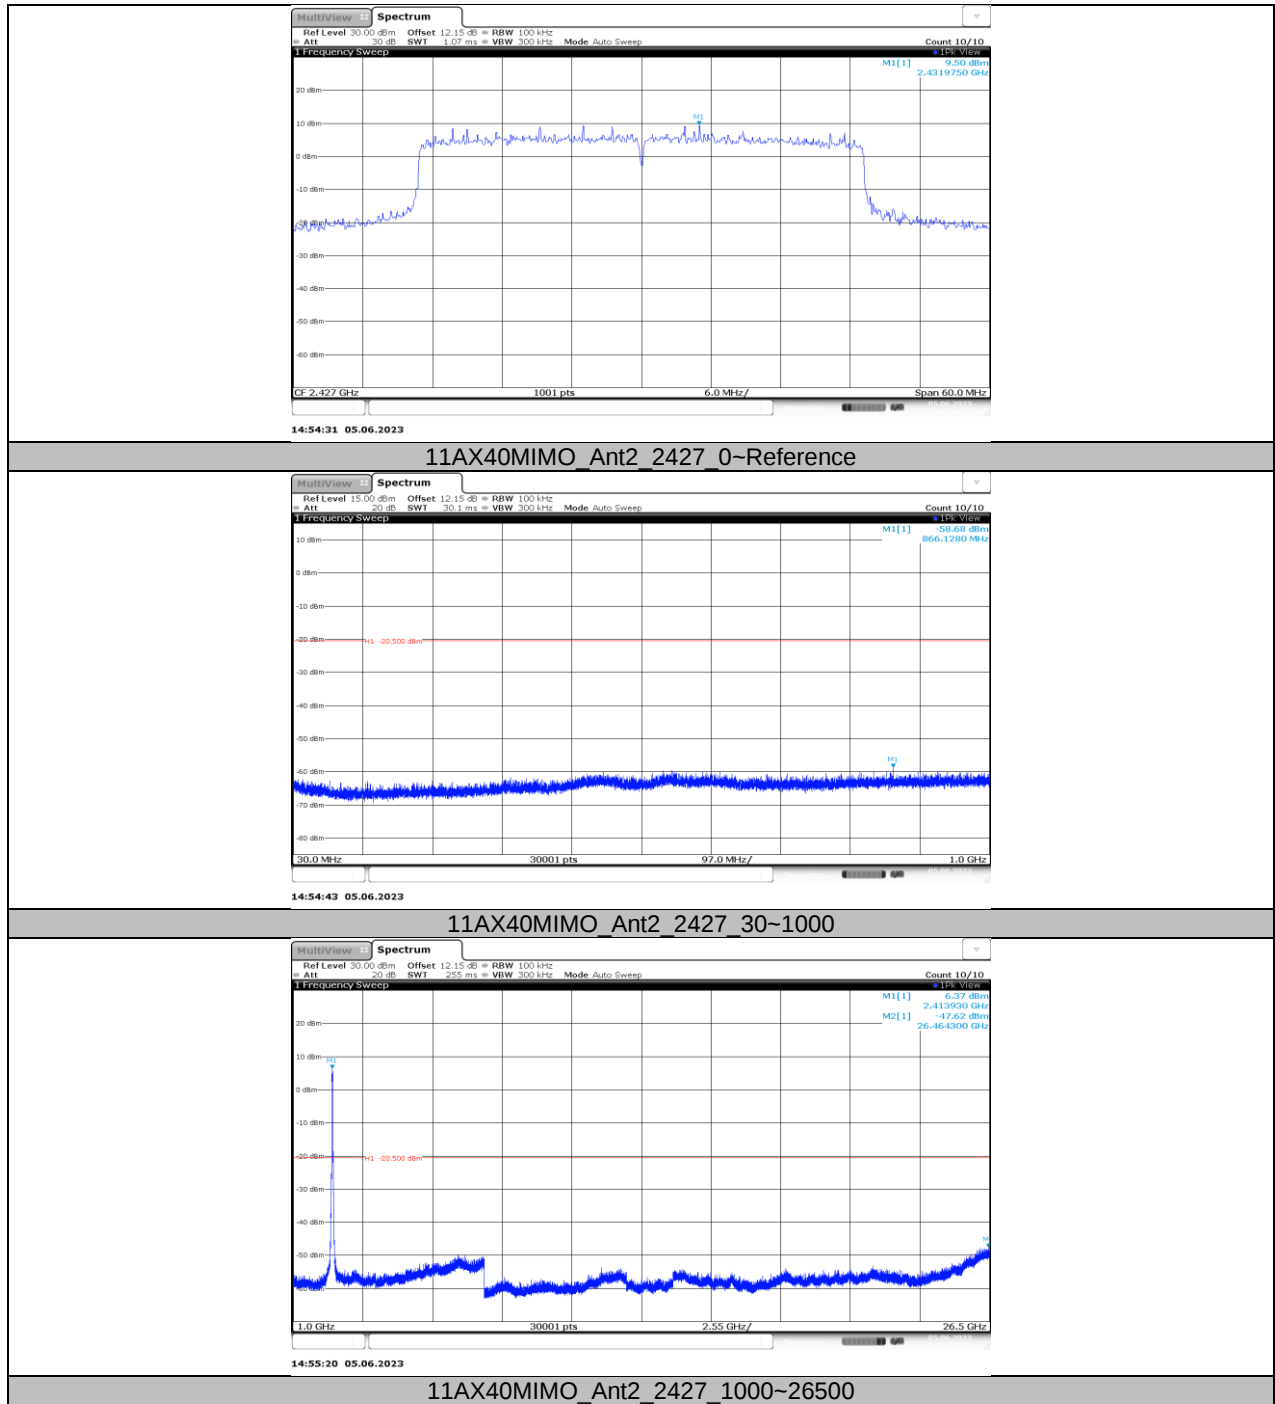

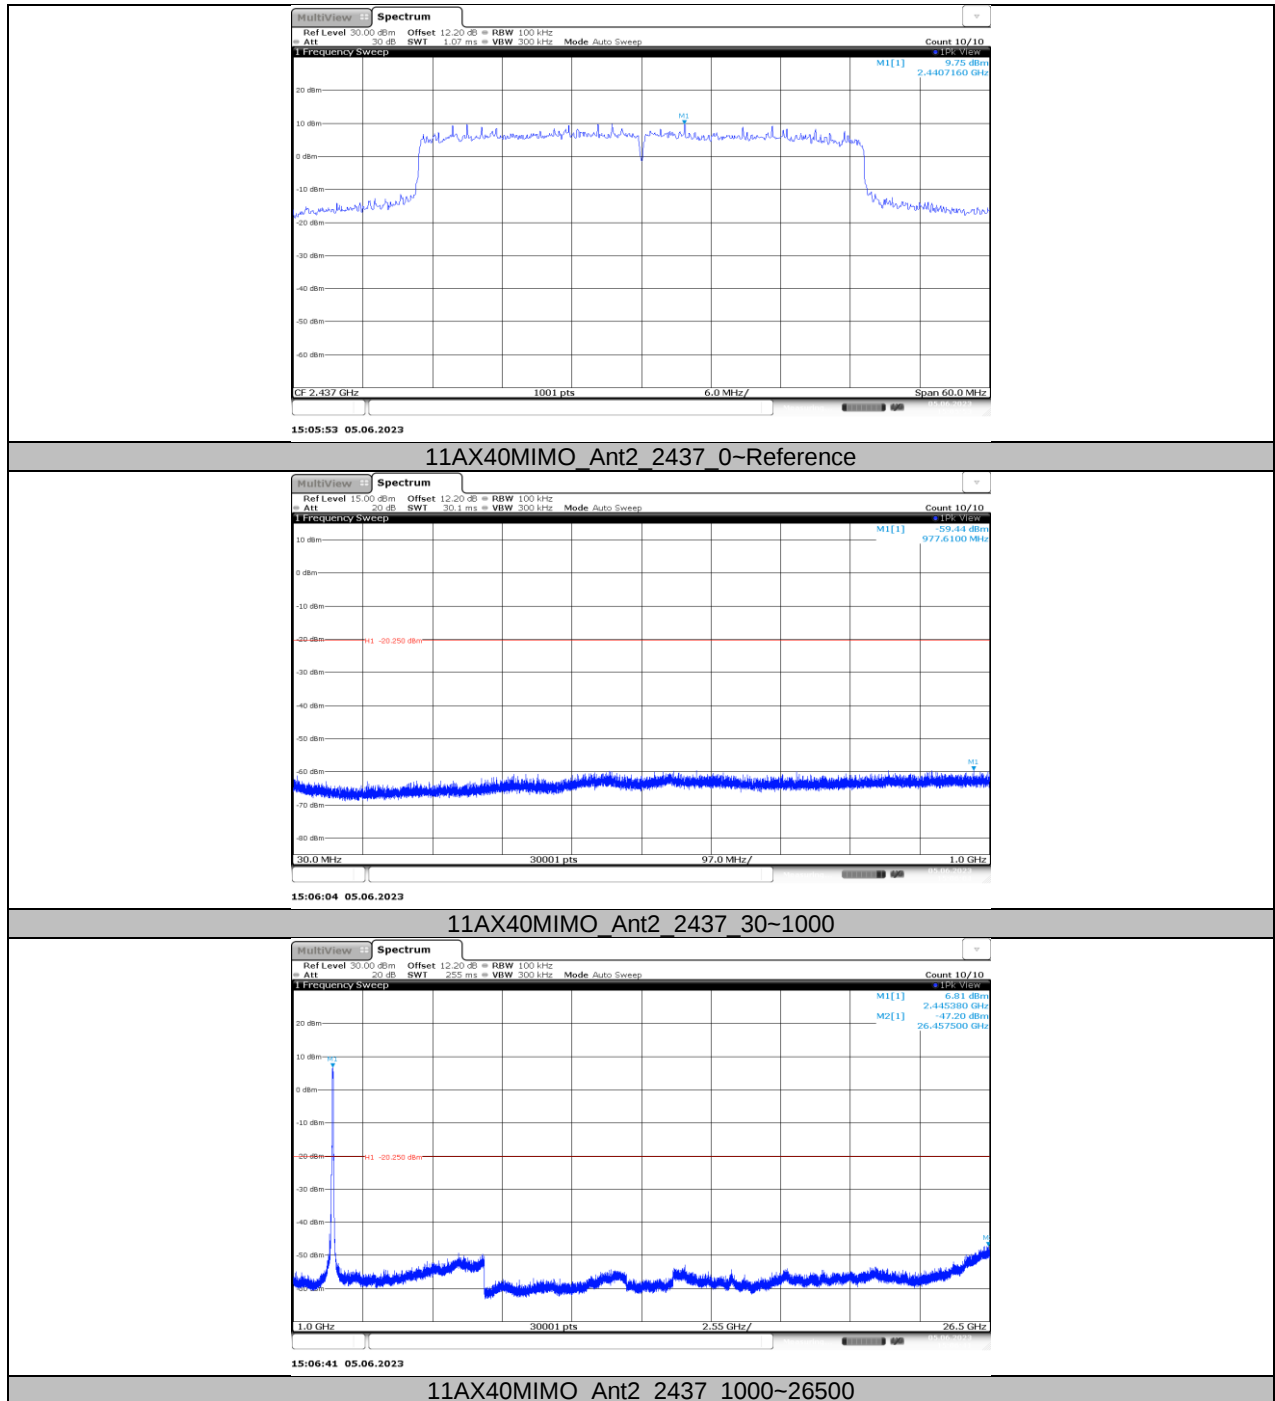

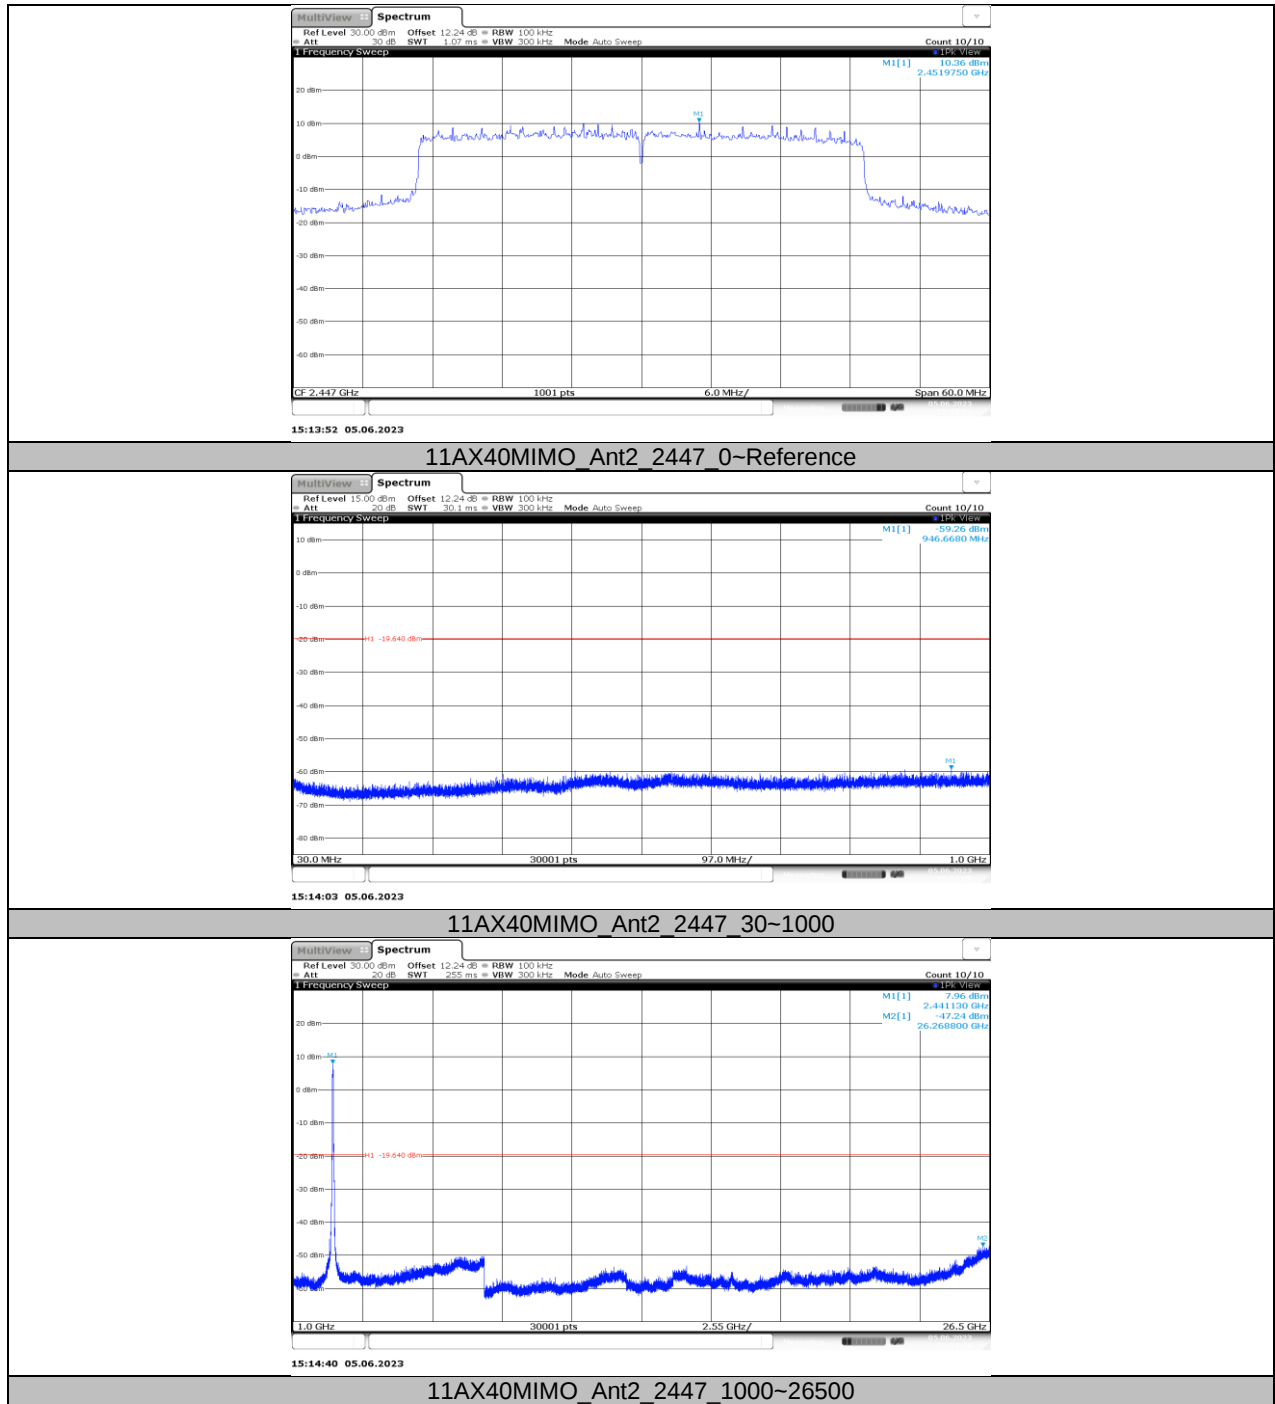

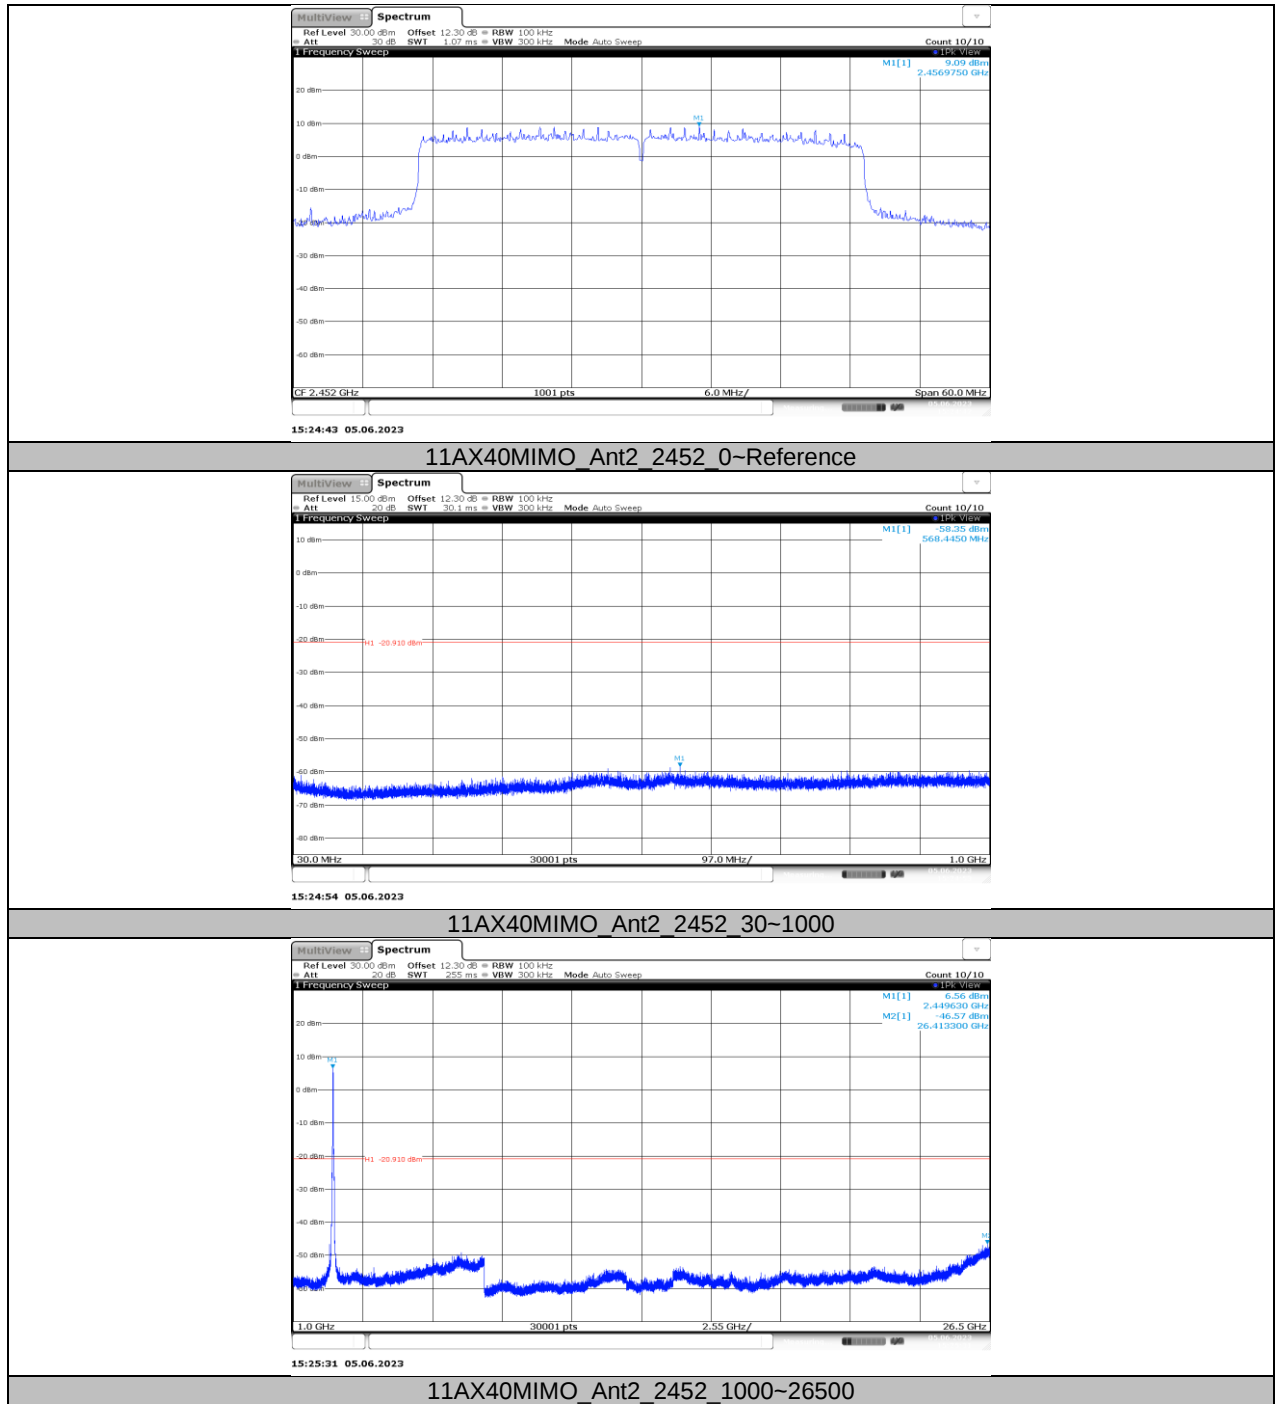

11.7. APPENDIX G: DUTY CYCLE

11.7.1. Test Result

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11B-CDD	2.62	2.74	0.9562	95.62	0.19	0.38	0.5
11G-CDD	1.98	2.14	0.9252	92.52	0.34	0.51	1
11AX20MIMO	5.45	7.02	0.7764	77.64	1.10	0.18	0.5
11AX40MIMO	5.45	7.04	0.7741	77.41	1.11	0.18	0.5

Note:


Duty Cycle Correction Factor= $10\log(1/x)$.


Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

11.7.2. Test Graphs

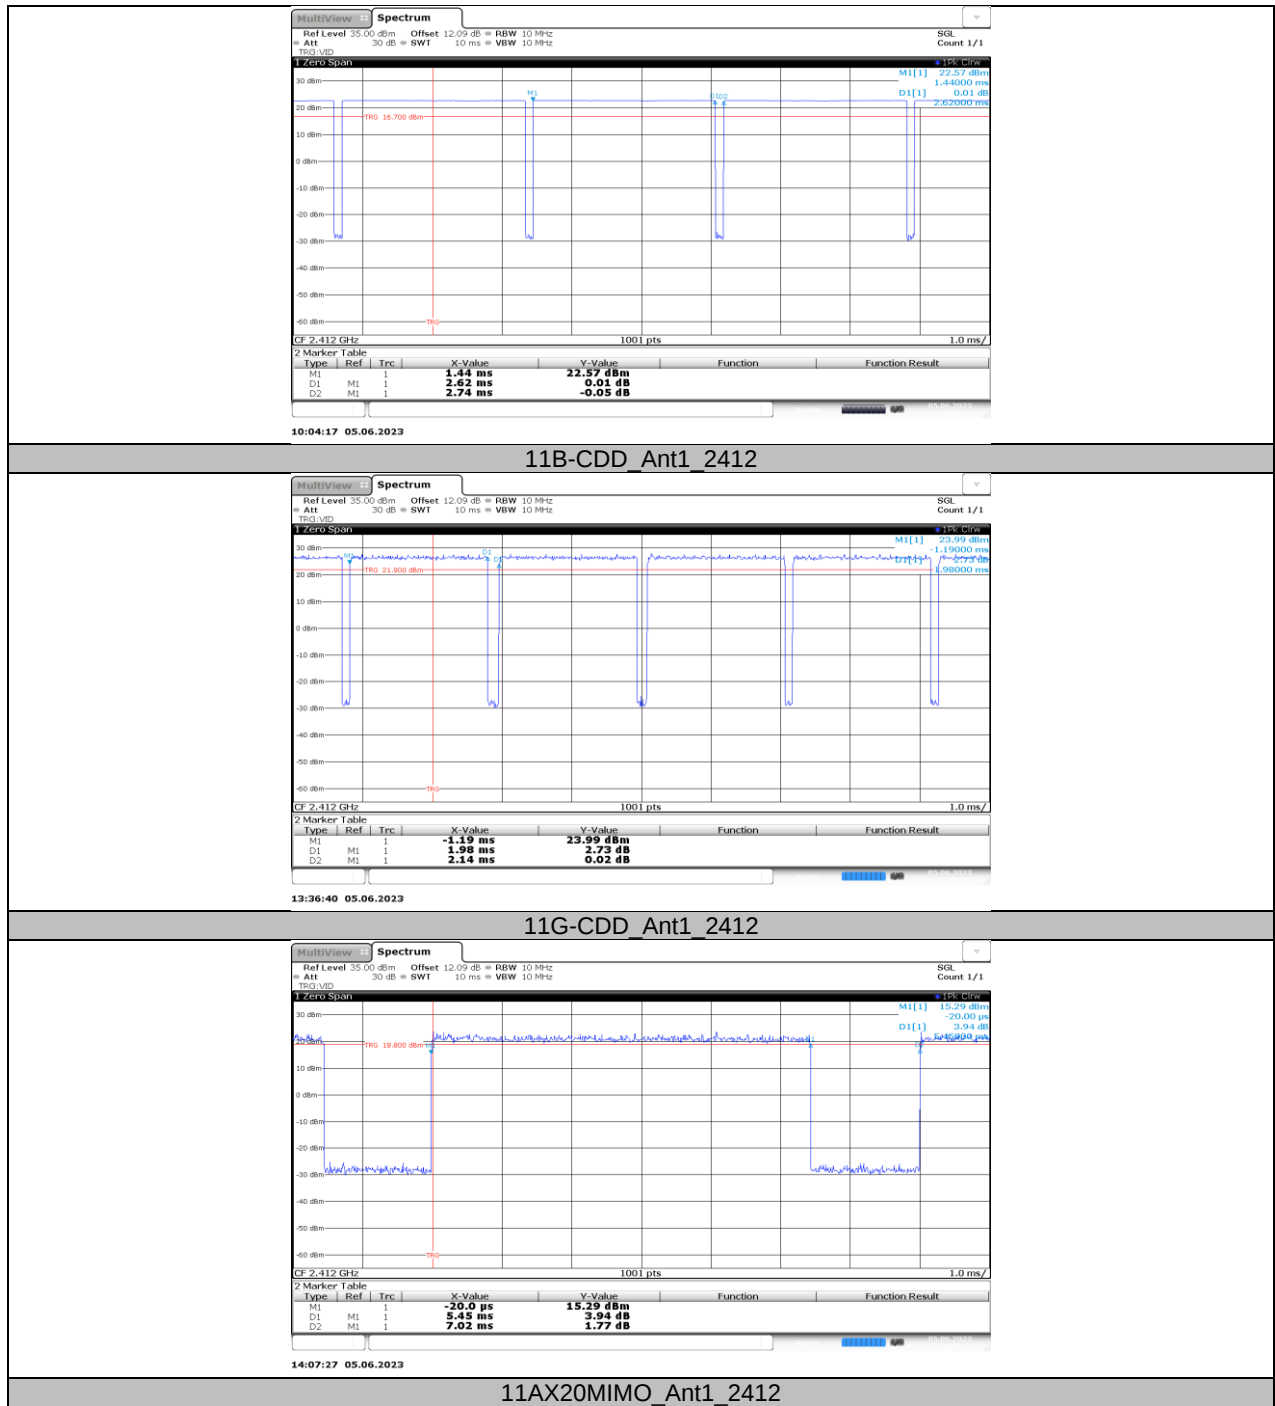

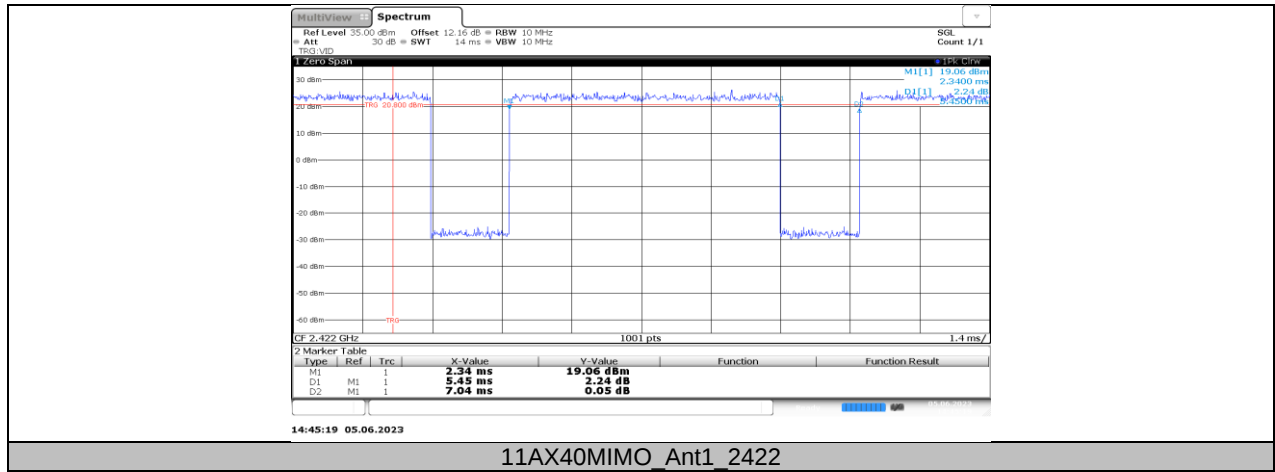

END OF REPORT